



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification<sup>6</sup> : <b>A61B 17/04</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 98/33439</b></p> <p>(43) International Publication Date: 6 August 1998 (06.08.98)</p>
<p>(21) International Application Number: PCT/US97/13380</p> <p>(22) International Filing Date: 4 August 1997 (04.08.97)</p> <p>(30) Priority Data: 08/792,738 31 January 1997 (31.01.97) US</p> <p>(71)(72) Applicant and Inventor: THAL, Raymond [US/US]; 11321 Bright Pond Lane, Reston, VA 22094 (US).</p> <p>(74) Agents: GITLER, Stewart, L. et al.; Hoffman, Wasson &amp; Gitler, P.C., Suite 522, 2361 Jefferson Davis Highway, Arlington, VA 22202 (US).</p>		<p>(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p><b>Published</b> <i>With international search report.</i></p>
<p>(54) Title: CAPTURED-LOOP KNOTLESS SUTURE ANCHOR ASSEMBLY</p>		
<p>(57) Abstract</p>		
<p>This invention is an enhanced un-knotted suture anchor assembly (10) having a snag element or recess (14) attached to, or formed in, an anchor assembly, for capturing a looped section (12) of the suture element for enhanced un-knotted surgical soft tissue reattachment to bone.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**CAPTURED-LOOP KNOTLESS SUTURE ANCHOR ASSEMBLY**  
**BACKGROUND OF THE INVENTION**

**1. Field of the Invention**

5           The present invention relates to devices or assemblies used in tissue repair. More particularly, the assembly is an enhanced device that enables the attachment together or repair of portions of biological tissue, such as tendons or ligaments, on a bone surface.

10           **2. Description of the Background Art**

          Soft tissues, such as tendons and ligaments, generally are attached to bone by small collagenous fibers. These connections are strong but permit the tendons and ligaments to be flexible. When a tissue is torn away from the bone and requires repair, a surgeon is often required to repair the detached soft tissue with sutures which are passed through bone tunnels and tied. A number of devices have been developed for securing a ligament or tendon to a bone mass. These devices can be used in place of bone tunnelling techniques. These attachment devices are usually inserted through extensive surgical incisions and, in some circumstances, by arthroscopic surgical techniques. The use of bone tunnels for repair can be difficult and generally require large open incisions. Recently, through the advent of endoscopic surgery, where the surgeon looks into a joint cavity with a telescope, there has been a trend to repair soft tissues back to bone through small incisions called portals. The unique knotless suture anchor assemblies described herein facilitate this difficult and precise procedure.

30           A variety of devices are available for attaching objects to bone, such as screws, staples, cement, suture anchors, and sutures alone. These devices have been used to attach soft tissue, such as ligaments, tendons, muscles, as well as objects such as prostheses, to bone. A suture anchor is a device which utilizes small anchors with suture materials attached thereto. A device, such as a screw, is inserted into the bone mass and anchored in place. After insertion of the anchor, the attached suture is passed through the tissue to be repaired. The tying of a knot in the suture is then required to secure the tissue to

the bone. The process of passing the anchored suture through the soft tissue and tying a knot is time consuming and difficult to undertake in the tight space encountered during endoscopic surgery and sometimes even in conventional open surgery.

5 One example of a suture anchor assembly is disclosed in U.S. Patent No. 5,370,662, wherein an anchor assembly includes a pre-threaded suture positioned at its posterior. First the anchor is inserted into the bone mass. The attached suture is then passed through the tissue for reattachment. The surgeon is  
10 required to tie a knot with the suture to complete the surgical process. Some suture anchors can be passed through the soft tissue first and then into the bone. Most suture anchors need to be inserted into the bone first. Only after this has been accomplished can the sutures be passed through the soft tissue.  
15 Alternatives to this procedure include non-suture soft tissue anchor systems. A few of these systems, such as those disclosed in U.S. Patent Nos. 5,013,316 and 4,532,926, can be used arthroscopically but fixation with these devices may not be as secure as that achieved with sutures. Only a few points of  
20 fixation are possible with the non-suture type anchor since the device is relatively large. Therefore suture devices are more favorable. This type of non-suture staple device is disadvantageous in that it has been known to crack the bone during deployment, or accidentally transect the object being attached  
25 to the bone. In addition, the device itself has been known to crack or break during or after deployment.

U.S. Patent Nos. 5,037,422; 5,224,946; and 5,236,445 all disclose bone anchor configurations for attaching sutures within openings formed in bones during joint reconstructive  
30 surgery and endoscopic surgical procedures. With all these intricate procedures, the suture itself must be inserted through a tissue mass and tied with a surgical knot to repair the soft tissue to bone.

It is an object of the present invention to provide a  
35 knotless suture anchor assembly which is easy to use and install.

Another object of the present invention is to provide a suture anchor assembly which allows for secure attachment of soft tissue to a bone mass without the use or requirement of tying a knot.

5 Still another object of the present invention is to provide a suture anchor assembly which is compact and allows a surgeon to easily guide the anchor means into the bone mass, or anchoring sleeve if desired, to enhance the security of the repair.

10 A primary feature of the present invention is to provide a unique snag-type means which is provided to facilitate engagement of the anchor means with a continuous suture loop, for drawing soft tissue to the bone mass, once the anchor means is deposited directly in the bone or in a hollow anchoring sleeve.

**SUMMARY OF THE INVENTION**

In accordance with the above objects, the present invention is an enhanced knotless suture anchor assembly for attachment or reattachment of biological soft tissue to bone.

5 The unique enhanced knotless suture anchor assembly includes an anchor means which can either be installed into a bone mass or into a hollow anchoring sleeve which has been installed into a bone mass. The hollow anchoring sleeve or anchor means can have varying shaped exteriors for secure capturing or engagement with  
10 a bone mass.

Incorporated by reference are U.S. Patent Nos. 4,007,743; 4,632,101; 4,721,103; 4,870,957; 4,898,156; 4,946,468; 5,084,050; 5,102,421; 5,141,520; 5,192,303; and 5,207,679, which  
15 all illustrate varying exterior structures which may embody the anchor means or anchoring sleeve of the invention.

Further, if desired, the hollow anchoring sleeve can contain a collar on the rear portion or rear side to control the depth of sleeve insertion into the bone and prevent excessive  
20 insertion depth. The anchor means of the assembly has a first end or configuration which allows for secure capturing of either the hollow anchoring sleeve or the bone mass and a component for securing the suture element or sliding continuous loop of the suture element. The first end can be pointed or frustoconical  
25 in shape. The anchor means can be ribbed, beaded, threaded, or expandable on its exterior surface or further can contain one or more prongs for secure mating with the anchoring sleeve or bone mass.

The anchor means has located thereon unique snag means in the shape of a hook, or other type projection, or a recess cut  
30 into the anchor, or a slit cut into an existing opening in the anchor, for engaging a continuous loop portion of the suture element.

The suture element can be attached permanently to the rear end of the anchor means or can be attached in a hole thereon  
35 in a continuous loop configuration. The hook portion or projection can be made of the same material as the entire anchor means or a different material, as desired. The anchor means can

be inserted during an open procedure, or an endoscopic procedure. In the preferred method, the suture element is first passed through the soft tissue and attached or connected to the snag-type means and subsequent to such steps, the anchor means is then  
5 inserted into the bone mass or into the hollowing anchoring sleeve which has been inserted into the bone mass.

Secondly, the anchor means can be directly pierced through the tissue and the continuous loop of the suture element can then be attached to the snag means followed by the engagement  
10 of the anchor means to the bone mass or hollow anchoring sleeve.

Numerous other features of various embodiments of the enhanced knotless suture anchor assembly will be apparent from the following detailed description and the accompanying drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

**Figure 1** is a perspective view of an anchor means with a continuous loop suture element and a snag recess;

5

**Figure 2** is a perspective view of a wedge type anchor means having a recess snag means with a continuous loop suture element;

10

**Figure 3** is a pronged type anchor with a perspective view of an alternate embodiment of an anchor means with suture element of the present invention;

15

**Figure 4** is an alternate embodiment of an anchor means with suture element of the present invention;

**Figures 5A** and **5B** are alternate embodiments of an anchor means with suture element of the present invention;

20

**Figure 6** illustrates the procedure for attachment of tissue to bone mass for the embodiment outlined in **Figure 1**; and

**Figure 7** illustrates the procedure for attachment of tissue to bone mass for the embodiment as outlined in **Figure 4**.

25



**DETAILED DESCRIPTION OF THE PRESENT INVENTION**

Referring to **Figure 1**, the enhanced knotless suture anchor assembly of the present invention contains an anchor means **10**, a suture element **12** and a snag means **14**. The anchor means in the figure also contains prongs **16** and **18** which facilitate the attachment of the anchor means **10** to a bone mass. The device can also contain, or be configured with, umbrella spokes, it can contain threads, be expandable, or have any other type of engaging features on its exterior for secure attachment with a bone mass. All of these exterior attachment features are known to the industry and incorporated herein by reference.

**Figure 2** illustrates an alternate embodiment of the enhanced knotless suture assembly. Depicted is a wedge-like anchor means **22**, a suture element **24** and a snag means **26**.

**Figure 3** illustrates another alternate embodiment of the present invention. Depicted is an anchor means **32**, a continuous suture loop **34** and a snag means **36** located on a rear hub **38** of the anchor means **32**. Also pictured in this embodiment are two prongs **39** and **40** for secure attachment or mating with a bone mass or hollow anchor assembly.

In **Figures 1, 2 and 3** the suture elements **12, 24 and 34** are all continuous loops. These elements may have more than one loop or be permanently affixed to the anchor means at one of its ends.

**Figure 4** is a depiction of an alternate embodiment of the present invention. Depicted is an anchor means **42**, a suture element **44** and a snag means **46** for capturing the suture element. In this embodiment, the continuous suture element **44** is engaged at a rear hub **48** of the anchor means **42**.

**Figure 5A and 5B** illustrate alternate embodiments of the invention wherein a wedge-like anchor means **52** includes a snag means **54** and a suture element **56**.

In all of the embodiments, either the anchor means or the suture element can be passed through the tissue first and then the continuous loop of the suture element is engaged into the recess or onto the projection or hook means thus capturing the suture loop. The anchor is then inserted into either a

hollow anchoring sleeve or a bone mass thereby approximating the soft tissue to the bone mass. It is also within the contemplation of the present invention to configure the anchor means such as is disclosed by U.S. Patent Nos. 4,632,101; 4,721,103; 4,898,156; 5,207,679; 4,946,468; and 5,192,303. A good depiction of the various configuration can be seen in applicant's own Patent No. 5,569,306. These patents are incorporated by reference and fall within the contemplation of the present invention for methods or means for anchoring the anchor means or hollow anchoring sleeve to a bone mass.

**Figures 6 and 7** depict the embodiments set forth in **Figures 1 and 4** wherein a hollow anchoring sleeve has an anchor means **66** inserted into a bone mass **68** for drawing a tissue **70** into secure engagement therewith. In these embodiments, the suture element **72** is first passed through the tissue element **70** and then engaged onto the recess **74** of **Figure 6** or projection **76** of **Figure 7** for engagement with the anchor means.

In both of these situations, the anchor can be passed through the tissue first, rather than having the suture element being passed through the tissue.

In many situations throughout the discussion above, the terminology secure attachment of soft tissue to bone has been used. Such terminology refers to the attachment or reattachment of tissue to a bone mass through the insertion of an anchor means into the bone mass or a hollow anchoring sleeve. In the one situation, the anchor means can seat into the hollow anchoring sleeve in a one step mating procedure or be inserted and ratcheted down in a step wise fashion into the sleeve. In the second situation, the anchor means will be directly inserted into the bone mass and ratcheted down drawing the tissue to the bone mass as well. In addition to the shapes illustrated for the snag means, such can take the form of anything which would allow the continuous loop portion of the suture to be captured by the hook, projection, slit or recess in the anchor means. The suture element can be made up us a known suture material, or it can be made of polymer materials, or can be formed of bioabsorbable material such as a polylactide polymer.

While a preferred embodiment of the invention is illustrated, it should be understood that the present disclosure is made by way of example and that variations to the structure shown and its use are possible within the scope of this disclosure without departing from the subject matter coming within the scope of the claims.

**WHAT IS CLAIMED IS:**

1. A knotless suture anchor assembly for attachment of tissue to a bone mass, said assembly comprising:

a) an anchor means for attachment to said bone mass;

b) a suture element connected to said anchor means having a continuous loop formed along its length; and

c) a snag means located on said anchor means, wherein said snag means captures said continuous loop of said suture element to draw said tissue into secure attachment with said bone mass.

2. A knotless suture anchor assembly as claimed in claim 1, wherein said snag means is a recess formed in said anchor means to capture said continuous loop of said suture element and allow said tissue to be drawn to said bone mass.

3. A knotless suture anchor assembly as claimed in claim 1, wherein said snag means is an external hook or projection for capturing said continuous loop of said suture element and allowing said tissue to be drawn to said bone mass.

4. A knotless suture anchor assembly as claimed in claim 1, wherein said suture element is permanently attached to said anchor means.

5. A knotless suture anchor assembly as claimed in claim 1, wherein said suture element is a continuous loop passing through said anchor means but not permanently affixed to said anchor assembly.

6. A knotless suture anchor assembly as claimed in claim 1, further comprising a hollow anchoring sleeve for installation and attachment to said bone mass for receiving said anchor means.

7. A method for the attachment of tissue to a bone mass utilizing said knotless suture anchor assembly as claimed in claim 1, comprising the steps of:

- a) passing said suture element through said tissue;
- b) capturing said continuous loop of said suture element with said snag means of said anchor means; and
- c) installing said anchor means into said bone mass, for attachment of said tissue to said bone mass.

8. A method for the attachment of tissue to a bone mass utilizing said knotless suture anchor assembly as claimed in claim 6, comprising the steps of:

- a) installing said hollow anchoring sleeve into said bone mass;
- b) passing said suture element through said tissue;
- c) capturing said continuous loop of said suture element with said snag means of said anchor means; and
- d) installing said anchor means into said hollow anchoring sleeve, for secure attachment of said tissue to said bone mass.

9. A method for the attachment of tissue to a bone mass utilizing said knotless suture anchor assembly as claimed in claim 1, comprising the steps of:

- a) passing said anchor means through said tissue;
- b) capturing said continuous loop of said suture element with said snag means of said anchor means; and
- c) installing said anchor means into said bone mass, for secure attachment of said tissue to said bone mass.

10. A method for the attachment of tissue to a bone mass utilizing said knotless suture anchor assembly as claimed in claim 6, comprising the steps of:

a) installing said hollow anchoring sleeve into said bone mass;

b) passing said anchor means through said tissue;

c) capturing said continuous loop of said suture element with said snag means of said anchor means; and

d) installing said anchor means into said hollow anchoring sleeve, for secure attachment of said tissue to said bone mass.

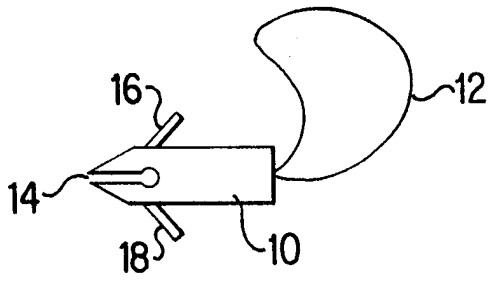


FIG. 1

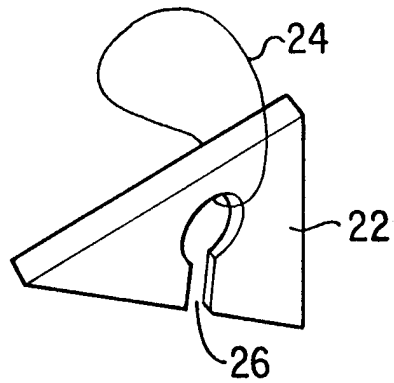


FIG. 2

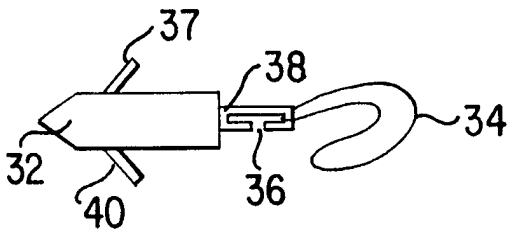


FIG. 3

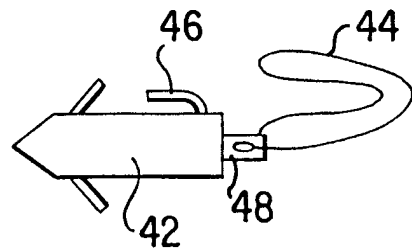


FIG. 4

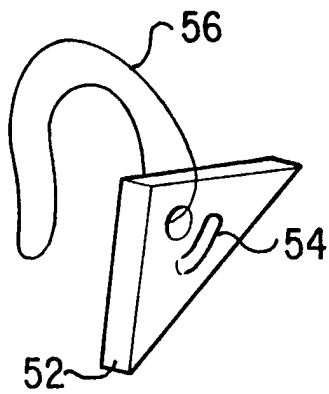


FIG. 5A

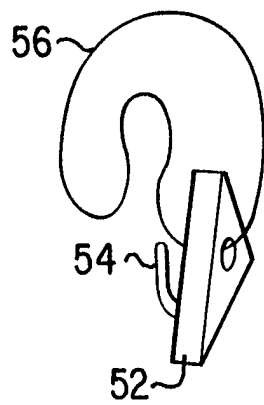


FIG. 5B

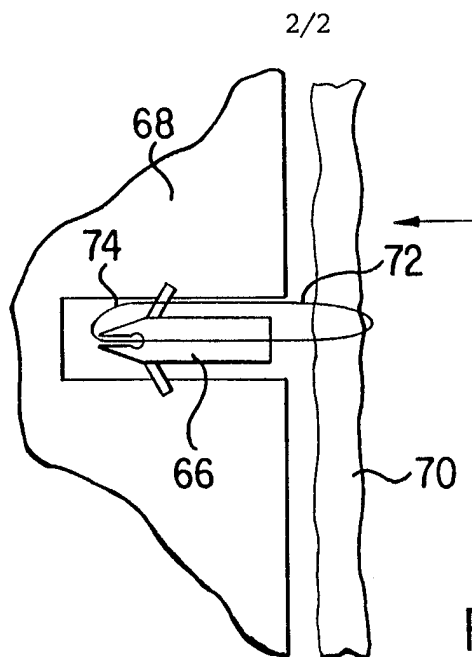


FIG. 6

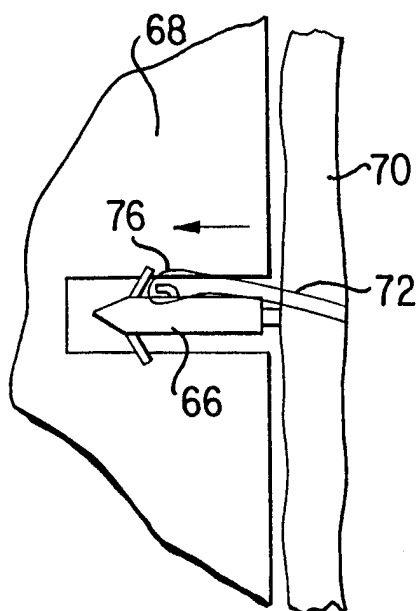


FIG. 7



INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/13380

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC(6) :A61B 17/04 US CL :606/232 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) U.S. : 606/72-75, 219, 224, 232 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,037,422 A (HAYHURST et al) 06 August 1991, col. 2, lines 18-47	1-10
A	US 5,102,421 A (ANSPACH, JR.) 07 April 1992, col. 1, lines 6-9, and col. 2, lines 1-25.	1-10
A	US 5,207,679 A (LI) 04 May 1993, col. 4 lines 36-59, and col. 5 lines 1-62.	1-10
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents:		*T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A document defining the general state of the art which is not considered to be of particular relevance		*X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E earlier document published on or after the international filing date		*Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		*G document member of the same patent family
*O document referring to an oral disclosure, use, exhibition or other means		
*P document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
16 SEPTEMBER 1997	14 OCT 1997	
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer <i>Diane Smith for</i> GARY JACKSON Telephone No. (703) 308-4302	