



(22) Date de dépôt/Filing Date: 2002/01/25

(41) Mise à la disp. pub./Open to Public Insp.: 2002/07/26

(30) Priorité/Priority: 2001/01/26 (09/770,858) US

(51) Cl.Int.⁷/Int.Cl.⁷ H04B 1/69, H04L 12/56, H04Q 7/36,
H04B 7/216


(71) Demandeur/Applicant:
AT&T CORP., US

(72) Inventeur/Inventor:
GERAKOULIS, DIAKOUMIS PARISSIS, US

(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : INTERFACE ENTRE UN SYSTEME AMRC ET UN SYSTEME DE COMMUTATION PAR PAQUETS POUR LA
COMMUTATION PAR REPARTITION DE CODE DANS UN SYSTEME TERRESTRE SANS FIL

(54) Title: CDMA TO PACKET SWITCHING INTERFACE FOR CODE DIVISION SWITCHING IN A TERRESTRIAL
WIRELESS SYSTEM

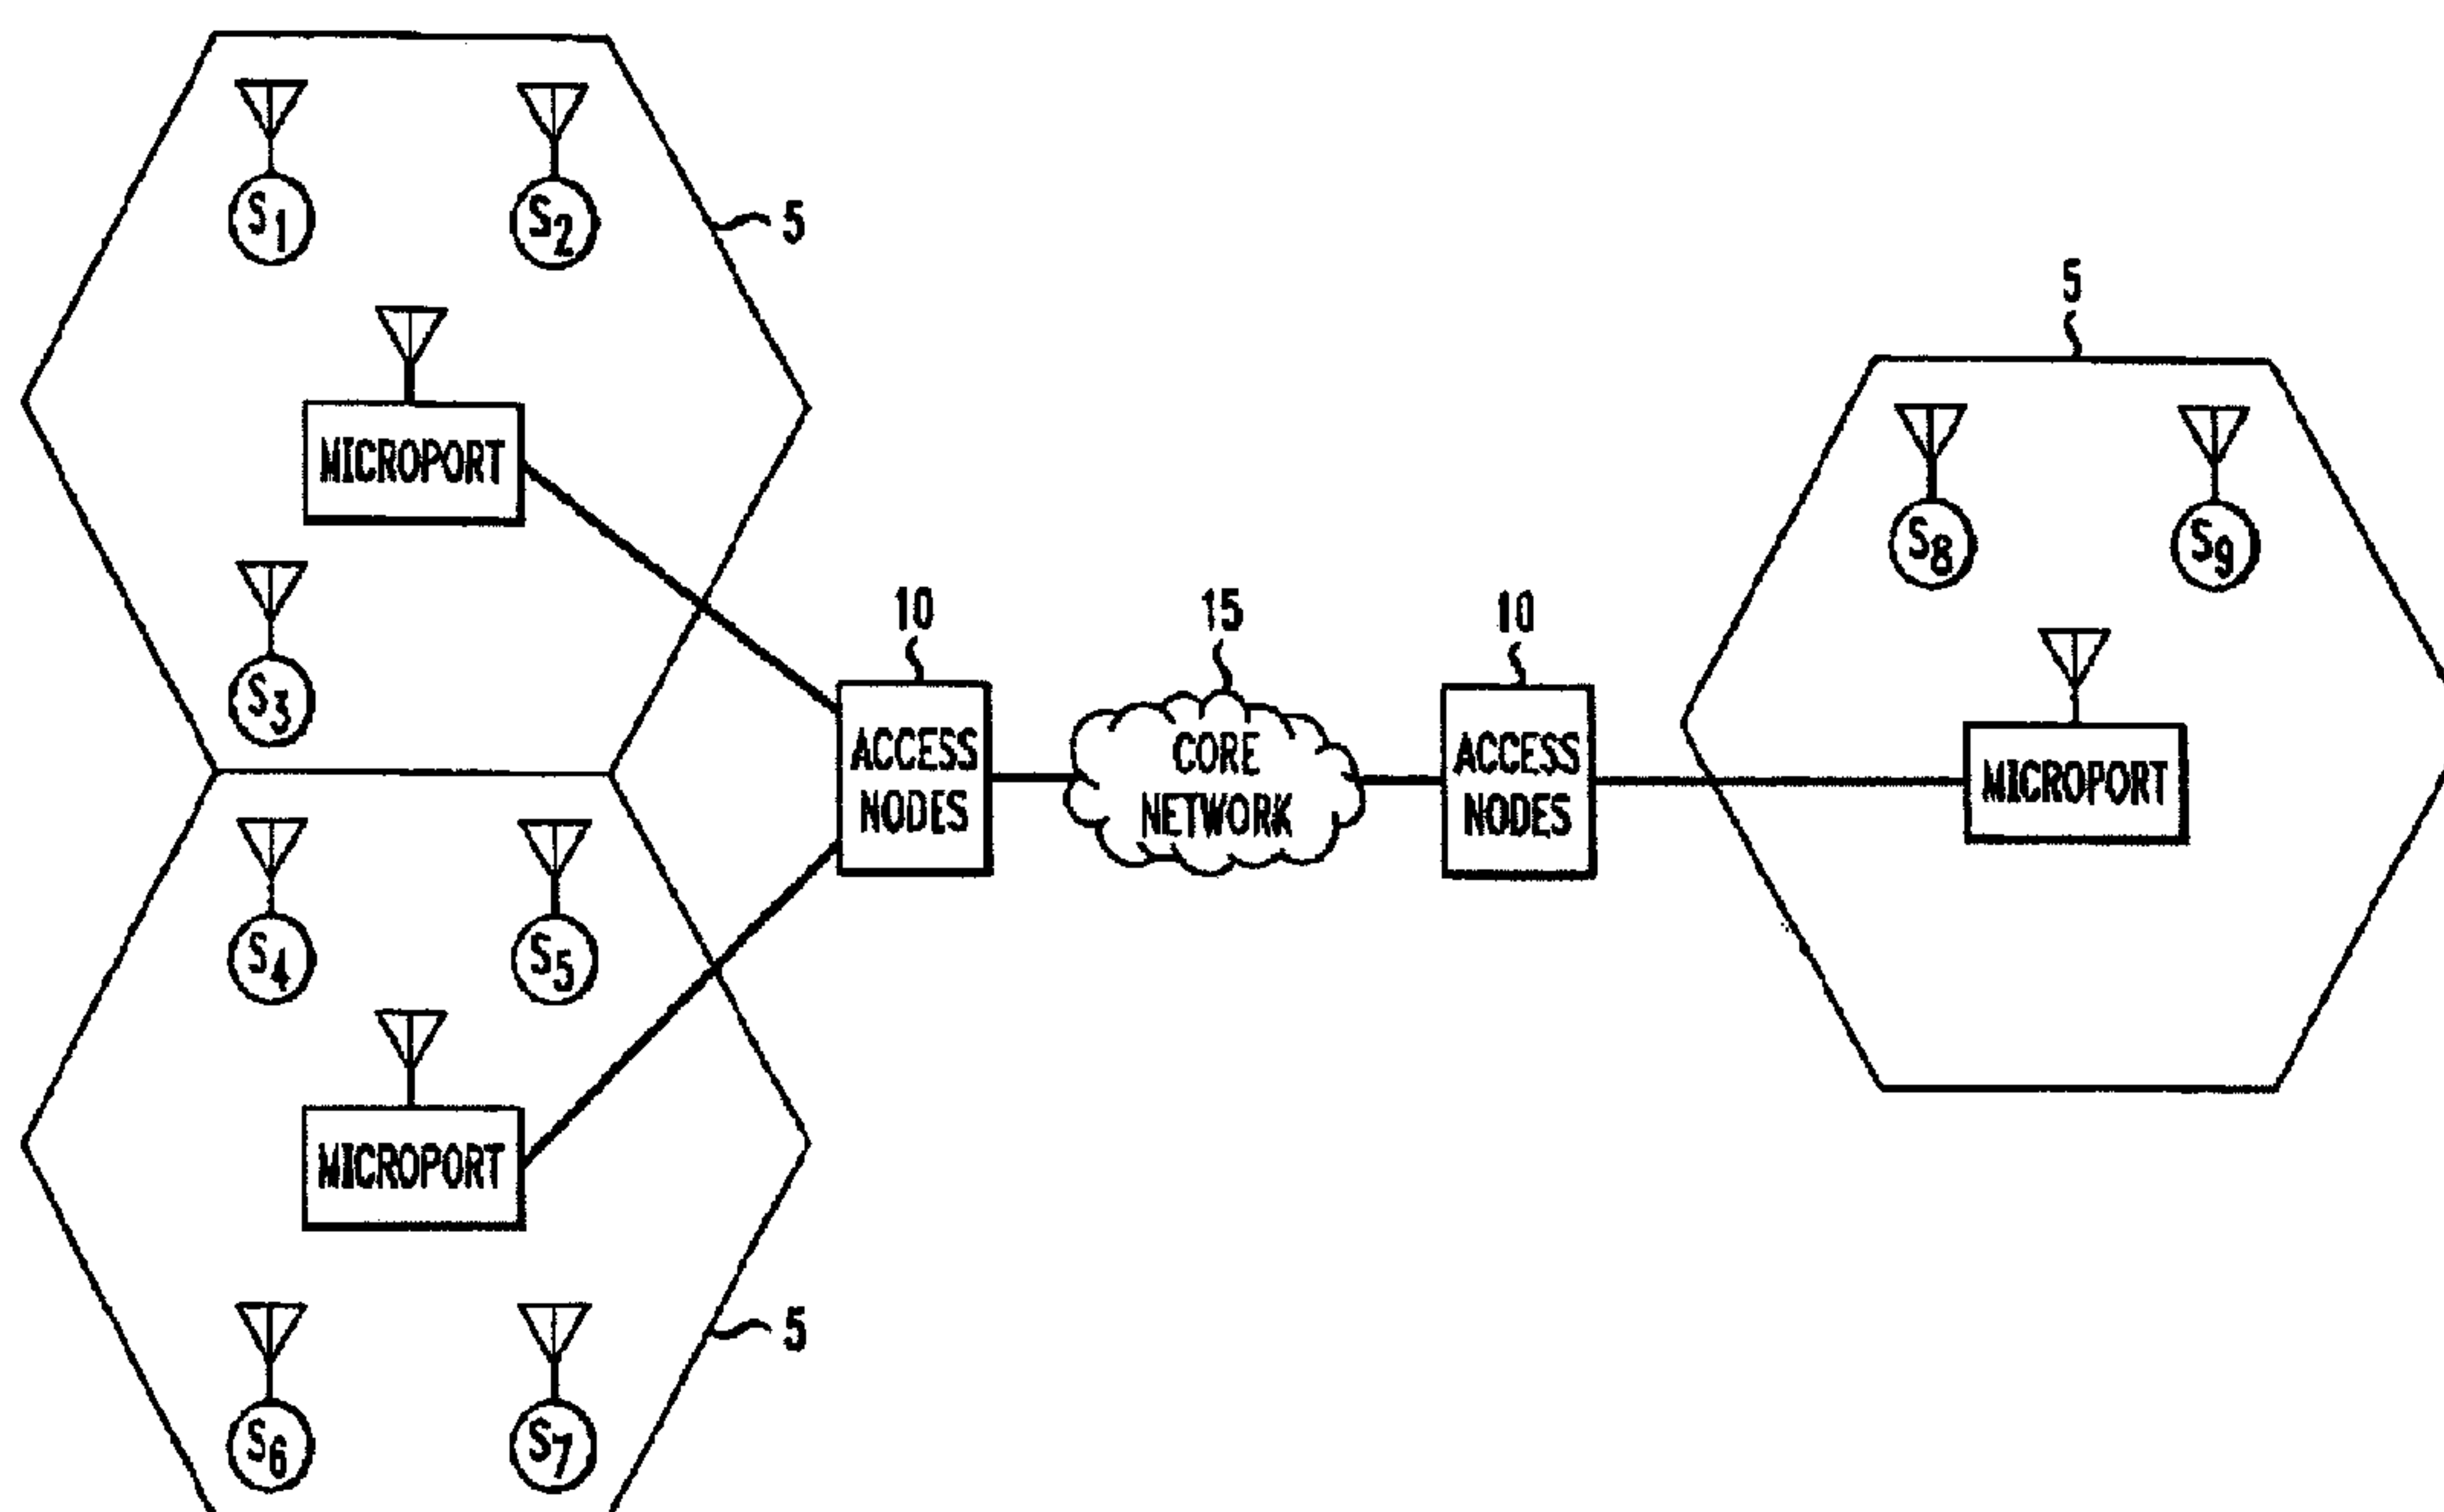

(57) Abrégé/Abstract:

A low-cost, flexible, high performance system and method comprises a means for interfacing a code division wireless system to a fast packet-switched network for transmission over a core network to a destination terminal user via a destination access node and a destination access radio port. The method is for code television switching at an originating terminal, the originating terminal being located within a microport cell of a terrestrial wireless network at a given instant in time, where said network interfaces with an access radio port, and comprises the steps of spreading a transmission signal by a PN-code assigned to an intended receiving port, inserting an identifier of a few bits for identifying a user, spreading a payload data signal by an orthogonal code, spreading the orthogonal spread payload data signal by the PN-code associating the user with payload data, modulating the PN-code spread transmission signal and the twice-spread payload data signal, and forwarding the modulated



(57) Abrégé(suite)/Abstract(continued):

PN-code spread transmission signal and the modulated twice-spread payload data signal to an access radio port. The code division switching system at an originating terminal is described, the originating terminal being located within a microport cell of a terrestrial wireless network at a given instant in time, where said network interfaces with an access radio port, comprises a first spreader for spreading a transmission signal by a PN-code assigned to an intended receiving port, a second spreader for spreading a payload data signal by an orthogonal code assigned to a receiving terminal user to which the payload data signal is directed, the payload data signal being further spread by the first spreader, a means for forwarding the PN-code spread transmission signal to an access radio port and a means for forwarding the twice-spread transmission signal to an access radio port.

5 CDMA TO PACKET-SWITCHING INTERFACE FOR CODE DIVISION SWITCHING
IN A TERRESTRIAL WIRELESS SYSTEM

ABSTRACT:

10 A low-cost, flexible, high performance system and method comprises a means for
interfacing a code division wireless system to a fast packet-switched network for
transmission over a core network to a destination terminal user via a destination access node
and a destination access radio port. The method is for code division switching at an
originating terminal, the originating terminal being located within a microport cell of a
terrestrial wireless network at a given instant in time, where said network interfaces with an
15 access radio port, and comprises the steps of spreading a transmission signal by a PN-code
assigned to an intended receiving port, inserting an identifier of a few bits for identifying a
user, spreading a payload data signal by an orthogonal code, spreading the orthogonal spread
payload data signal by the PN-code associating the user with payload data, modulating the
PN-code spread transmission signal and the twice-spread payload data signal, and
20 forwarding the modulated PN-code spread transmission signal and the modulated twice-
spread payload data signal to an access radio port. The code division switching system at an
originating terminal is described, the originating terminal being located within a microport
cell of a terrestrial wireless network at a given instant in time, where said network interfaces
with an access radio port, comprises a first spreader for spreading a transmission signal by a
25 PN-code assigned to an intended receiving port, a second spreader for spreading a payload
data signal by an orthogonal code assigned to a receiving terminal user to which the payload
data signal is directed, the payload data signal being further spread by the first spreader, a
means for forwarding the PN-code spread transmission signal to an access radio port and a
means for forwarding the twice-spread transmission signal to an access radio port.

5 **CDMA TO PACKET-SWITCHING INTERFACE FOR CODE DIVISION SWITCHING
IN A TERRESTRIAL WIRELESS SYSTEM**

FIELD OF THE INVENTION

The invention relates generally to communications systems and in particular, to wireless systems using a wireline backbone to communicate between a source subscriber terminal
10 and a destination subscriber terminal, where the wireline backbone forms a core network.

BACKGROUND OF THE INVENTION

The difficulty in a terrestrial system is the inherent need for internal communication. Cells are generally not connected over the air. Instead, an air interface is defined within a small area around a base station (access radio port or microport). A number of microports are
15 distributed geographically to give a desired region of coverage (e.g., the continental US). The distributed microports are connected by a plurality of access nodes to some core transport network, presumably wired as opposed to wireless, as shown in Fig. 1. Several microports may be connected to a single access node.

Between access nodes, which are typically connected terrestrially over wirelines, an
20 alternate means of addressing is needed. The demands of multimedia, for which terrestrial wireless systems are now being considered, imply transport by means of a fast packet-switched network, e.g., ATM (Asynchronous Transfer Mode). Packet switching affords flexibility in the bandwidth assigned to a connection as well as in the delay incurred in propagating through the network. Message switching and circuit switching would not appear
25 to offer the flexibility and speed necessary to meet the demands of multimedia. This is due, in part, to the longevity of message and circuit switched connections in a wireless environment, in which the users are mobile and move from cell to cell. Datagrams also do not appear to be a solution to the problems because of the additional circuitry and overhead involved in datagram reassembly. Both of the above observations further point to packet
30 switching as a fast and flexible solution.

5 In current terrestrial CDMA wireless systems, user signals, received by an originating access radio port, are routed to the intended destination radio port using an individual spreading code to encode the signal. The individual spreading code uniquely associates the spread spectrum signal with a particular wireless receiver. This method reduces optimum system performance and data rates. Therefore, there is a need for a low-cost, flexible, high
10 performance system that can distribute user data to the appropriate destination user without adding undue complexity and costs to the infrastructure (radio port) equipment. The present invention, as described herein, provides a low-cost, flexible, high performance means for interfacing a code division switched wireless system to a fast packet-switched network for backhaul to the core network.

15

SUMMARY OF THE INVENTION

The present invention comprises a system and method for solving the current problem by extending code division switching to a terrestrial CDMA wireless system. Code division switching is the means by which subscribers are interconnected in a large-scale wireless
20 system, leveraging the fact that multiple users share a common air interface at either end of the wireless connection. Code division switching is based on the ability through code division multiplexing to support multiple users over a common air interface.

The present invention relies upon the application by a source user terminal of an individual spreading code (PN-code) based on a port identifier to a transmission signal (containing no
25 payload data). This forms the preamble. A few bits of data follow, to which the PN-code is also applied to form the packet header. Following the preamble and packet header, a switch is triggered and PN-code sequences are applied by the source user terminal, after applying an individual spreading code based on an identifier for an individual user, to a transmitted spread spectrum signal (containing individual user data). The transmitted spread spectrum
30 signal is received by an originating access radio port (also called the receiving microport because the microport receives information and data from a mobile subscriber) to distribute the spread spectrum signal to the intended destination radio port (also called the transmitting

5 microport because the microport transmits information and data to the mobile subscriber) via a wireline packet-switched network such as ATM. The packet-switched network is used to distribute information and data to the destination radio port. Switching complexity and equipment volume are thereby greatly reduced since all user code processing is performed at the periphery of the network (subscriber/user terminal) and greater data rates and improved
10 system performance can be realized.

The present invention involves a novel change to the previous methods of transporting user data between access radio ports on the wireline backbone of terrestrial wireless systems.

It is therefore an objective of the present invention to simplify and reduce switching complexity (hardware and/or software) and equipment volume within the infrastructure of a
15 terrestrial CDMA wireless system satellite to increase system performance and data rates.

Yet another object of the present invention is to provide a method and apparatus for improving radio port routing of spread spectrum user data within a terrestrial CDMA wireless system using a packet-switched network backbone.

It is another objective of the present invention to take advantage of CDMA orthogonal
20 coding schemes to perform baseband self-routing (at the originating wireless terminal) in an effort to reduce the volume of radio port switching equipment to the number of interconnected radio ports rather than the number of individual system users.

BRIEF DESCRIPTION OF THE DRAWINGS

25 The invention is best described with reference to the detailed description and the following figures, where:

Fig. 1 depicts an exemplary system configuration.

Fig. 2 illustrates the common air interface.

Fig. 3a depicts the packet format of the reverse link.

5 Fig. 3b depicts the packet format of the forward link.

Fig. 4a is the reverse link access and transmission flow in time.

Fig. 4b is the forward link paging and transmission flow in time.

Fig. 5a is the flow of the actions of the originating mobile subscriber.

10 Fig. 5b is the flow of the actions of the originating access radio port (receiving microport).

Fig. 5c is the flow of the actions of the destination access radio port (transmitting microport).

Fig. 5d is the flow of the actions of the destination mobile subscriber.

15 Fig. 6 is a block diagram of the overall flow from an originating mobile subscriber and a destination subscriber.

Fig. 7a depicts the reverse link transmission and reception process.

Fig. 7b depicts the spreading process of the originating mobile subscriber.

Fig. 7c is a block diagram of the originating access radio port (receiving microport).

Fig. 7d depicts the serial/parallel PN-code acquisition process.

20 Fig. 7e depicts a typical double-dwell SSDC for PN-code acquisition.

Fig. 7f depicts the despreading process at the originating access radio port (microport receiver) during payload data transmission over the reverse link during the contention free period.

Fig. 8a depicts the forward link reception and transmission process.

25 Fig. 8b illustrates the spreading operation at the destination access radio port (microport transmitter) for the forward link.

Fig. 8c depicts the demodulation and despreading process at the destination mobile subscriber over the forward link.

30

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 depicts a terrestrial wireless system configuration. Within a terrestrial CDMA wireless communications system interfacing with a plurality of originating and destination

- 5 wireless terminal users, a core network backbone 15 interconnects a plurality of access nodes 10 within the system. Originating wireless subscriber/user terminals and destination wireless subscriber/user terminals are interchangeable. That is, on any given transmission, a given wireless subscriber/user terminal may be an originating or a destination terminal. The wireless subscriber/user terminals are depicted within cells 5 by a circle with an antenna.
- 10 They are distinguished from one another by the letter "S" with a numerical subscript. It should be noted here that the number and identification of subscriber/user terminals within a cell will vary as subscribers drive through a given cell. Also depicted within each cell is an access radio port (also called a microport). An access radio port is depicted as a rectangle with an antenna. The subscriber/user terminals send and receive signals to/from the access
- 15 radio ports over the air (wireless). The access radio ports are connected via a wireline to an access node. The wireline connections are depicted in Fig. 1 as solid lines. An access node interfaces with a plurality of radio ports communicating with the wireless terminal users. Initial access to the system by a mobile subscriber is asynchronous-, that is, the time is unslotted.
- 20 It is also possible and appropriate to characterize the air links between a mobile subscriber terminal and its access radio port. A forward link is a link in which the transmission is from the access radio port to the mobile subscriber terminal. A reverse link is a link in which the transmission is from the mobile subscriber terminal to the access radio port. Orthogonal channels are used for both forward and reverse links.
- 25 The core network backbone advantageously comprises a fast packet-switched network (e.g., Asynchronous Transfer Mode (ATM)). Packet switching provides flexibility in the bandwidth assigned to a wireless connection as well as in the delay incurred in propagating through the network. The present invention provides an efficient means for interfacing the terrestrial CDMA wireless system with the wireline packet switched core network to
- 30 distribute user data rapidly through the system to an intended destination radio port and user.

5 Interfacing to a packet-switched network is accomplished using the techniques outlined for
code division packet switching. In code division packet-switching, transmissions intended
for the same microport are grouped together by a common PN-code. In a terrestrial system,
the intervening transport is likely to be a packet-switched network. The transport in a
10 terrestrial system may, however, be by any other means that provides a flexible, high
performance system. Transmissions from a mobile subscriber terminal are broadcast over
the air to an originating access radio port on a reverse link. The transmission signals are
then directed through an access node to and through the packet-switched network to another
access node, which directs the signal to the destination microport. After reaching the
destination cell area, the data are transmitted over the air according to the forward link air
15 interface design.

A preamble is prepended to a packet to be transmitted (before the header). The preamble is
at most the length of one data bit but may contain a number of chips. There is a code
common to all packets contained within the preamble. The code is recognized by a receiver
and is used to acquire and synchronize the signal (packet). The PN-code is called a cover
20 code and is the same for all users that transmit to an access radio port. Once the PN or cover
code is acquired, then the orthogonal code can be recognized.

Within a given cell, all user preamble and header transmissions are presented over the air in
the same time and frequency space, separated by a pseudorandom noise code or PN-code.
The PN-code effectively spreads a user's preamble and header transmission over a
25 bandwidth greater than that needed to represent the data itself. Users are transmitting
asynchronously in this interval. This has the effect of hiding the data from anyone other
than the intended recipient. Without the proper code, the spread signal looks like noise and
cannot be used by an unintended receiver. The PN-code described is only used as a typical
example and any other code performing a similar identifying function may be substituted,
30 and therefore the PN-code is not intended as any hardware/software limitation to the present
invention. Contention for the initial access is resolved with a spread-spectrum random
access protocol, while the data transmissions utilize orthogonal codes.

5 Orthogonal codes, identifying each individual originating user, have the further effect of canceling the interference of other transmissions that may be present over the air at the time of decoding. Being orthogonal, they have zero cross-correlation. As a result, transmitted signals contribute relatively little co-interference in adjacent signal spaces. Orthogonal codes require synchronization between all transmitting users. Each transmitting user has its
10 own uniquely assigned orthogonal code. The number of orthogonal codes is limited and is equal to the spreading factor N. This is an important factor in multiplexing signals, which at some point are to be resolved with reasonably high integrity. Hadamard codes are a class of code sequences that have the additional property of being orthogonal.

15 According to the present invention, the routing procedure, both wired and wireless, for an end-to-end connection beginning with the transmitting subscriber terminal is described below.

At the transmitting terminal:

- 20 - spreading a transmission signal by a PN-code assigned to the intended receiver (receiving port) for the duration of the sequence (this constitutes the preamble);
- inserting a few bits identifying the user or the user's orthogonal code (this constitutes the packet header)
- spreading the orthogonal spread signal by the PN-code identifying (and
25 associating) the user with the payload data; and
- modulating the transmission signal and the twice-spread payload data signal and forwarding the modulated twice-spread transmission signal to an access radio port.

30 At each originating microport:

- demodulating a transmission signal;

- 5 - despreding a transmission signal by orthogonal code assignments to
recover microport groupings and route them accordingly; and
- translating the orthogonal code assignments to a packet address identifying
a destination microport augmented to identify a destination access node.
- 10 The transmitting (originating) access node directs the fully addressed packets into the core
network. At the destination access node, packets are distributed among the microports
according to their respective address fields. At each destination (transmitting) microport,
the address fields are translated to orthogonal codes, the data respread and put over the air.
Equipped with the correct orthogonal assignment, each receiving terminal can pull its
15 intended transmission out of the air without the need for explicit switching between
subscribers.

Fig. 2 depicts the common air interface design. Specifically, the system under consideration
is frequency division duplexing where the forward link carrier frequency is denoted by f_d
and the reverse link carrier frequency is denoted by f_u . That is, the frequencies are different
20 for the forward link and the reverse link. The "d" subscript represents "downlink" and the
"u" represents "uplink". The PN-code for identifying the destination port is g_j (in the
forward and reverse links) and ω_i are the orthogonal codes for identifying individual mobile
subscribers ($i=1,2,\dots,N$) and ω_j is the paging channel orthogonal code (forward link)

There is a paging channel between the destination radio access port (microport transmitter)
25 over the forward link that the microport uses to indicate to a mobile subscriber that the
microport has information and data for that mobile subscriber. The paging channel is an
orthogonal forward link channel for transmitting paging messages or responding to
contention access channel requests. There is one paging channel per microport and that
channel is identified by orthogonal code ω_j . There is a contention access channel between an
30 originating mobile subscriber and an originating radio access port (microport receiver) over
the reverse link by which an originating mobile subscriber communicates with an
originating radio access port. Since a number of mobile subscribers are attempting to

5 communicate with a single microport, there is contention for the microport's attention. Thus, the access channel has contention. That is, the contention access channel is for transmitting access request messages or responding to paging messages. There is one contention access channel per microport and that channel is identified by PN-code g_j . Transmissions over the contention access channel are made according to the spread
10 spectrum random access protocol.

Payload data (orthogonal data traffic channel) over the forward link is spread with both the PN-code identifying the port and an orthogonal code uniquely identifying the mobile subscriber. The forward link payload data channel is used for transmitting information and data and is identified by orthogonal code ω_i ($i=1,2,\dots,N$ and $i \neq j$) uniquely assigned to a
15 mobile subscriber by the microport transmitter after the paging process. Payload data (orthogonal data traffic channel) over the reverse link is spread with both the PN-code identifying the port and an orthogonal code uniquely identifying the mobile subscriber. The reverse link payload data channel is used for transmitting information and data and is identified by orthogonal code ω_i ($i=1,2,\dots,N$) uniquely assigned to a mobile subscriber by the
20 microport receiver after the access process.

Fig. 3a depicts the packet format for the reverse link. Initial access by a mobile subscriber terminal to a microport has the dual purpose of sending data to the microport and providing information that aids in the later transmission of data and the synchronization of that data with a standard reference time maintained by the microport. The payload data (transmitted
25 between the originating mobile subscriber and the originating radio access port (microport receiver)) is formatted according to the depicted packet where "P" represents the preamble (no data), "H" represents the header and "E" represents the end of the packet flag. The payload data is spread by both the microport PN-code g_j and the uniquely assigned mobile subscriber orthogonal code ω_i . The preamble and header are spread by the microport PN-code g_j only. The payload data comprises one or more packets or ATM cells. The ATM cells are packets that include ATM headers, which further include destination and source addresses. The preamble and the header are transmitted during the contention period.
30

5 During this period all transmission signals from all contending users are spread by the same microport-based PN-code g_j . The spread spectrum random access (SSRA) protocol utilizes the delay capture property of the spread spectrum signal. The contention-free period comprises the transmission period for the payload data and the end of packet indicator (flag). During this period all transmitting users are assigned an orthogonal code uniquely
10 identifying the transmitting user.

Fig. 3b depicts the packet format for the forward link. That is, the payload data is formatted according to the depicted packet between the destination access radio port (microport transmitter) and the destination mobile subscriber where "PG" represents paging information and "E" represents the end of packet flag. The payload data is spread by both
15 the microport PN-code g_j and the uniquely assigned mobile subscriber orthogonal code ω_i . The paging information is spread by the paging channel orthogonal code ω_j only.

Fig. 4a depicts the preamble, the packet header, the acknowledgment and the payload data as they flow between the originating mobile subscriber terminal and the microport receiver in time. The preamble and the header access are utilized by the spread spectrum random
20 access (SSRA) protocol. Also the preamble and header are transmitted asynchronously but "marking" their transmission time for obtaining synchronization of the orthogonal codes in the next step of the process.

Simultaneous transmission of preambles and headers from a plurality of contending mobile users may be received successfully by the receiving microport if they arrive at the microport despreaders greater than one chip (bit interval of the PN-code) apart. This is due to the delay
25 capture property of spread spectrum signals. The acknowledgment message contains the time adjustment required for the orthogonal transmission that follows. The acknowledgment message also contains the assignment of the orthogonal code to the transmitting mobile user. This assignment is made by the microport from the available (not utilized) orthogonal codes.
30 This is due to the limited number of orthogonal codes available. If there is no available orthogonal code, then the transmission is blocked. Upon receipt of the acknowledgment

5 message by the terminal, the terminal adjusts its transmission time with respect to its
 "marked" position in time. Note a propagation delay of τ_p . The subscriber terminal then
 switches to position 2 (see Fig. 7b) and utilizes the assigned orthogonal code ω_i for the
 payload data transmission. If no acknowledgment message is received by a predetermined
 time-out period, then the terminal retransmits the preamble and header. The microport
 10 receives the payload data synchronously with respect to other terminal transmissions. That
 is, all payload data arrives synchronously with respect to a reference time. The payload data
 are despread from the PN and orthogonal codes. The end of packet is indicated by a flag.
 After the end of packet indicator is received, the orthogonal code ω_i assigned to the
 subscriber terminal becomes available for re-use and can be assigned to another transmitting
 15 (originating) mobile subscriber terminal. The received payload data (e.g., ATM cells)
 contain their own routing headers and thus can be routed via routers over the core network
 to a destination as known in the art and in accordance with communications standards.

Fig. 4b depicts the paging message, the acknowledgment and the payload data as the flow
 between the destination access radio port (microport transmitter) and the destination mobile
 20 subscriber terminal. The paging message indicates to the destination mobile subscriber
 terminal that the transmitting microport (microport transmitter) has information and data for
 it. Note both that there is a propagation delay of τ_p and also that there is no time
 adjustment necessary on the forward link. The destination mobile subscriber terminal sends
 an acknowledgment message to the transmitting microport. Upon receipt of the
 25 acknowledgment message from the destination mobile subscriber terminal, the transmitting
 microport forwards the payload data.

Figs. 5a and 5b depict the reverse link (mobile-to-microport) access operation, which is
 based on the spread spectrum random access (SSRA) protocol. That is, the preamble and
 header (P&H, see Fig. 3a) of the transmitting (originating) mobile subscriber (user) is spread
 30 by the PN code, g_j , of microport j . Transmissions that arrive one or more chips apart, where a

- 5 chip is the bit length of the PN-code, can be distinguished and received successfully (this phenomenon is called delay capture).

Fig. 5a is a flowchart of the actions performed at the originating (transmitting) mobile subscriber terminal. Step 505 is performed with the switch (shown in Fig. 7b) in position 1, which allows the preamble and header information but no payload data to flow through the
10 switch. Step 510 represents the spreading of the payload data twice when the switch depicted in Fig. 7b is in position 2. Step 515 represents the completion of the sending of the payload data and the end of packet flag so that the uniquely assigned orthogonal code can be released.

Fig. 5b is a flowchart of the steps performed at the originating access radio port (microport
15 receiver). At step 520, the receiving microport acquires the preamble, which has the PN-code without any payload data. The preamble is acquired using a serial/parallel acquisition circuit, which synchronizes to the PN-code. The header is also received and despreaded at step 520. The PN-code is asynchronous and received unslotted. The acquisition process is the initial synchronization. At step 525, once the preamble is acquired and processed, the
20 receiving microport sends an acknowledgment, which contains a uniquely assigned orthogonal code for the originating mobile user and the required adjustments for the orthogonal transmission that follows. The timing adjustments are derived by comparing the arrival time of the preamble to the reference time, which is maintained by the receiving microport. The purpose of making timing adjustments is to synchronize all orthogonal code
25 transmissions to a standard reference time maintained by the microport. A short time later (a matter of a few msec), the receiving microport receives the payload data, which are processed by despreaded by the orthogonal and PN-codes as indicated at step 530. If the information and data are successfully received by the receiving microport, then an ATM cell (packet) is created and the packet is routed through the core network in accordance with
30 standards and protocols for core network use. After the end of packet flag (step 535) is received by the receiving microport, the assigned orthogonal code becomes available for re-use and re-assignment.

5 Figs. 5c and 5d depict the forward link operation (microport to mobile user). Fig. 5c depicts the actions at the destination microport (transmitting microport). Upon the arrival at the destination microport of one or more ATM cells destined for a mobile user, a paging message is sent to the mobile user via the paging channel (step 540). The paging message includes an assigned forward link orthogonal code ω_i . The mobile user terminal responds
 10 with an acknowledgment. After the transmitting microport receives the acknowledgment from the destination mobile user terminal via the contention access channel, the transmitting microport spreads the payload data (extracted from the ATM cell) with orthogonal code ω_i and transmits it to the mobile user terminal (step 545). The data includes the end of packet flag. If, after a time-out period, no negative acknowledgment is received, the transmitting
 15 microport assumes that the mobile subscriber terminal correctly received the data and releases the assigned (forward link) orthogonal code making it available for re-use and re-assignment for other transmissions (step 550).

Fig. 5d depicts the actions of the destination mobile user terminal via the forward link. While idle, the mobile subscriber terminal monitors the paging channel for transmissions
 20 (step 555). If a paging message is received indicating the assignment of a particular orthogonal code, the mobile user terminal switches to that orthogonal code in order to receive the data. The switch to the orthogonal code specified by the microport is indicated in the acknowledgment sent to the transmitting microport. The acknowledgment is sent via the contention access channel (step 560). After the end of packet flag is received and
 25 decoded (it was spread along with the data), the mobile user terminal reverts to monitoring the paging channel for further paging messages (step 565).

Fig. 6 is a block diagram of the overall flow from an originating mobile subscriber and a destination subscriber. Similar to the system configuration as depicted in Fig. 1, the solid lines between the receiving microport and the transmitting microport through the core
 30 network are wires. The interface between the originating mobile subscriber terminal and the receiving microport is a common air interface (CAI), as is the interface between the transmitting microport and the destination mobile subscriber terminal. The originating and

5 destination mobile subscriber terminal are represented on Fig. 1 as S_i . The originating mobile subscriber forwards the signal to the receiving microport, which modulates, spreads and codes the signal, creates a packet and forwards the packet to the access node. Following this stage, the packet is directed by the access node into the packet-switched network, where it is transmitted to the intended destination access radio port, via a routing node for that
 10 destination access radio port (transmitting microport), based on the packet address. After the (ATM) packet is received by the destination access radio port, then it is spread by an orthogonal code ω_i assigned to the receiving user i , and by the PN-code g_j , of the destination port j . The signal is then forwarded to the destination mobile subscriber terminal which demodulates, despreads and decodes the signal and presents the information and data to the
 15 mobile subscriber for his/her use.

Figs. 7a through 7f all depict various aspects and details of the reverse link process. Fig. 7a depicts the reverse link transmission and reception process showing the originating mobile subscriber terminal and the receiving microport. The originating mobile subscriber terminal uses forward error correction (FEC) to detect and correct certain errors. The signal is then
 20 spread using a PN-code to spread the preamble and header and both a uniquely assigned orthogonal code and the PN-code to spread the data and the end of packet flag. The signal is then modulated for transmission over the radio frequency (RF) to the receiving microport. The receiving microport is actually a plurality of receivers in parallel. The signal is recognized by at least one of the plurality of receivers and the preamble is synchronized by a
 25 PN-code acquisition process. The payload data and the end of packet flag are then despread by a data desreader. The data is then decoded and a cell (packet) is created for transmission over the core network (via the access node) in accordance with standards and protocols for the underlying core network.

Fig. 7b depicts the spreading process of the originating mobile subscriber. The inventive
 30 process begins with the originating wireless terminal user within the terrestrial CDMA wireless system (see Fig. 7b). The originating terminal spreads a transmission signal (preamble only) by a PN-code (g_j) assigned to the intended receiver microport j for

- 5 identifying the receiving microport for the duration of the PN sequence, which may be, for example, length $L = 1024$. This constitutes the preamble. Following the preamble a few bits of data are inserted uniquely identifying the user or the user's orthogonal code. This constitutes the packet header. Both of these steps are performed with the switch in position 1. That is, the switch allows the preamble and header to flow through the switch but no
- 10 payload data. Once this is accomplished, the switch is moved to position 2. That is, payload data now flows through the switch. The payload data is spread by ω_i , which is the orthogonal code that is assigned to user i by the microport. After being spread by ω_i the payload data is spread by the PN-code g_i used for identifying the receiving microport to which the transmission is directed. This second spreading separates the receiving microport
- 15 for the present data (signal) from other radio port groups. Conventional spread spectrum radio processing techniques follow this stage as the spread spectrum signal containing the PN-code and unique orthogonal code sequence is transmitted to the receiving microport. The conversion of the twice-spread transmission signal to a carrier frequency f_c is performed by the modulator shown on Fig. 7b.
- 20 Fig. 7c is a block diagram of the originating radio access port (receiving microport). Fig. 7c is a more detailed view of the circuit at the receiving microport. Demodulator 720, which is a device well known in the art, further comprises a pair of multipliers, a pair of baseband filters (BBF) and a pair of A/D converters. The array of serial search detection circuits is denoted as 725 and the array of l -parallel Data Receivers 730 comprises l channel decoders
- 25 (735-a, ... 735-l). The array of SSDCs 725 constitutes the acquisition process used to synchronize the preamble and header. The l -parallel data receivers 730 constitute data reception and comprise the data desreader and the decoder.
- Fig. 7d depicts the serial/parallel PN-code acquisition process. Fig. 7d depicts the serial/parallel acquisition circuit at the destination microport. The serial/parallel acquisition unit comprises a demodulator 720, an array of serial search detection circuits (725-a, ...
- 30 725-K) in parallel and an array of l -parallel data receivers 730, which further comprises l channel decoders. Each SSDC searches in a window of L/K chips, where L is the length of

- 5 the PN-code and K is the number of SSDCs. The SSDC- k searches in the window $[(k-1) \cdot kL/K]$. The plurality of SSDCs constitutes an acquisition circuit.

Fig. 7e depicts a typical double-dwell SSDC for PN-code acquisition. Process B follows process A. Process A is essentially an acquisition circuit. The timing adjustment determination portion has been left out for clarity and simplicity. Process A is performed within a variable window, which could be one chip long or up to the entire length of the PN-code sequence depending on the value of K ($K=1, \dots, L$). Windows one chip ($K=L$) in length are very fast. However, many windows are then required, increasing circuit complexity. Windows the entire length of the PN-code sequence ($K=1$) are significantly slower but significantly less complex. The step $n = n + 1$ accomplishes a shift by one chip. Once PN-code synchronization is achieved, the PN-code timing offset from the reference time (maintained by the receiving microport) is determined and inserted into the acknowledgment message and forwarded to the originating mobile subscriber terminal along with the uniquely assigned orthogonal code. Process B in Fig. 7e depicts a double-dwell algorithm.

Fig. 7f depicts the demodulation and despreading process at the originating access radio port (microport receiver) during payload data transmission over the reverse link during the contention free period. The despreader is a data despreader. The signal is demodulated. Following demodulation of the signal, the preamble and header are despread. Once the preamble and the header are received and despread, then the payload data are despread using both the uniquely assigned orthogonal code and the PN-code. The summation is performed over N , which is the length of the orthogonal code. The accumulator sums from 1 to N , where N is the total number of orthogonal codes and the length or size of the orthogonal Hadamard code. N is both the total number and the length of the orthogonal codes because the number of chips is the same. After the signal is despread, then the data is decoded by the decoder.

30 Fig. 8a depicts the forward link reception and transmission process. The transmitting microport receives the data (packaged in an ATM cell) and performs forward error

5 correction on the data. The transmitting microport then spreads the data (as further illustrated in Fig. 8b). The spread data are then modulated for transmission over a radio frequency (RF) to the destination mobile subscriber terminal. The destination mobile subscriber terminal receives the signal and demodulates it. The data are then despread (preamble, header and payload data) and finally decoded for presentation to the subscriber
10 using the mobile user terminal.

Fig. 8b illustrates the spreading operation at the destination access radio port (microport transmitter) for the forward link. Fig. 8b is an exploded view of the spreader at the transmitting microport. Fig. 8b is a block diagram of the transmitting microport and a destination subscriber terminal and the radio frequency (RF). The microport performs
15 forward error correction and then spreads the signal. This is followed by modulation and transmission over the air (RF) interface to the destination subscriber terminal. The receiving subscriber terminal demodulates the signal and then despreads and decodes the signal. The destination user terminal can extract the transmitted user signal by filtering out other signals that do not contain the unique orthogonal code applied by the originating user. A subscriber
20 terminal i , while idle monitors a broadcast/paging channel j spread by orthogonal code ω_j . The broadcast/paging is effective only for those subscriber terminals in the coverage area. When a broadcast/paging message is received for subscriber terminal i indicating an assigned code i , the subscriber terminal uses code ω_i to receive its data. In the spreader, the PN-code g_j is used to distinguish one microport from another microport and reject
25 interference between adjacent microports. The accumulator sums over $i = 1$ to N , where N is the length of the orthogonal code. No synchronization is required because the signals are transmitted from the same microport. The orthogonal codes ω_i , where $i = 1, \dots, N$, and $i \neq j$ are user channels and j is the paging channel.

Fig. 8c depicts the demodulation and despreading process at the destination mobile
30 subscriber over the forward link. This process is virtually identical to the demodulation and despreading process for the reverse link as depicted in Fig. 7f.

- 5 A procedure and system have been described for using code division packet switching techniques to simplify the network processing involved in interfacing with a packet-switched network in a terrestrial wireless system. Individual subscriber switching is accomplished through the unique assignment of orthogonal codes to the subscriber terminals. PN-codes are additionally assigned, to group transmissions intended for the
10 same receiving microport.

While the present invention is described using a wireless CDMA terrestrial communications network embodiment, it is not deemed a departure from the spirit and scope of the present invention to apply the fundamental novel concepts to a similarly configured wireless communications network.

- 15 It should be clear from the foregoing that the objectives of the invention have been met. While particular embodiments of the present invention have been described and illustrated, it should be noted that the invention is not limited thereto since modifications may be made by persons skilled in the art. The present application contemplates any and all modifications within the spirit and scope of the underlying invention disclosed and claimed herein.

5 **Claims:**

1. A system for code division packet switching at an originating mobile subscriber terminal, said originating mobile subscriber terminal being located within a microport cell of a terrestrial wireless network at a given instant of time, where said network interfaces with
10 an originating access radio port, comprising:

 means for spreading a transmission signal by a PN-code assigned to an access radio port;

 means for inserting an identifier of a few bits for identifying a user;

 means for modulating said PN-code spread transmission signal;

15 means for forwarding said modulated PN-code spread transmission signal and marking a time origin of said forwarding of said modulated PN-code spread transmission signal;

 means for receiving an acknowledgment, within a time-out period, from said originating access radio port, said acknowledgment comprising an assignment of an
20 orthogonal code to said originating mobile subscriber terminal and a timing adjustment;

 means for spreading a payload data signal by said assigned orthogonal code;

 means for spreading the orthogonal spread payload data signal by the PN-code thereby associating the user with payload data;

25 means for modulating said twice-spread payload data signal;

 means for adjusting a transmission time by said timing adjustment received from said originating access radio port; and

 means for forwarding said modulated twice-spread payload data signal to said originating access radio port.

30

2. The system according to claim 1, wherein if no acknowledgment is received from said originating access radio port within said time-out period, said modulated PN-code spread transmission signal is forwarded again marking the time origin of said forwarding again.

5

3. The system according to claim 1, wherein said first means for spreading by said PN-code forms a preamble, which is prepended to a packet.

10

4. The system according to claim 1, wherein said orthogonal code is a Hadamard code.

15

5. A system for code division packet switching at an originating access radio port of a terrestrial wireless network, where said originating access radio port interfaces with a plurality of originating mobile subscriber terminals located within a microport cell of said terrestrial wireless network, comprising:

means for demodulating a transmission signal;

means for acquiring a preamble from said transmission signal;

means for acquiring a header from said transmission signal;

20

means for forwarding an acknowledgment to one of said plurality of said originating mobile subscriber terminals, said acknowledgment comprising an assignment of an orthogonal code to said one of said plurality of originating mobile subscriber terminals and a timing adjustment;

means for receiving a further transmission signal comprising payload data; and

25

means for despreding said further transmission signal by both said assigned orthogonal code and a PN-code.

30

6. The system according to claim 5, further comprising:

means for creating an ATM packet; and

means for forwarding said ATM packet through said network via an access node.

7. The system according to claim 5, wherein said orthogonal code sequence is a Hadamard code.

5 8. The system according to claim 5, further comprising means for releasing said assignment of said orthogonal code.

 9. The system according to claim 5, wherein said first means for spreading by said PN-code forms a preamble, which is prepended to a packet.

10

 10. The system according to claim 6, further comprising means for releasing said assignment of said orthogonal code.

 11. A system for code division packet switching at an originating mobile subscriber terminal, said originating mobile subscriber terminal being located within a microport cell of a terrestrial wireless network at a given instant in time, where said network interfaces with an originating access radio port, comprising:

- means for spreading a transmission signal by a PN-code assigned to an access radio port;
- 20 means for inserting an identifier of a few bits for identifying a user;
- means for modulating said PN-code spread transmission signal;
- means for forwarding said modulated PN-code spread transmission signal and marking a time origin of said forwarding of said modulated PN-code spread transmission signal;
- 25 means for receiving an acknowledgment, within a time-out period, from said originating access radio port, said acknowledgment comprising an assignment of an orthogonal code to said originating mobile subscriber terminal and a timing adjustment;
- means for spreading a payload data signal and an end of packet flag by said assigned orthogonal code;
- 30 means for spreading the orthogonal spread payload data signal and said end of packet flag by the PN-code thereby associating the user with payload data;
- means for modulating said twice-spread payload data signal and said end of packet flag;

5 means for adjusting a transmission time by said timing adjustment received from said originating access radio port; and

means for forwarding said modulated twice-spread payload data signal and said end of packet flag to said originating access radio port.

10 12. The system according to claim 11, wherein if no acknowledgment is received from said originating access radio port within said time-out period, said modulated PN-code spread transmission signal is forwarded again marking the time origin of said forwarding again.

15 13. The system according to claim 11, wherein said first means for spreading by said PN-code forms a preamble, which is prepended to a packet.

14. A system for code division packet switching at a destination access radio port of a terrestrial wireless network, where said destination access radio port interfaces with a
20 plurality of destination mobile subscriber terminals located within a microport cell of said terrestrial wireless network, comprising:

means for transmitting a paging message to one of said plurality of destination mobile subscriber terminals over a paging channel indicating that there is payload data for said one of said plurality of destination mobile subscriber terminals;

25 means for receiving an acknowledgment from said one of said plurality of destination mobile subscriber terminals;

means for spreading said payload data extracted from an ATM packet with a uniquely assigned orthogonal code; and

30 means for transmitting said spread payload data to said one of said plurality of destination mobile subscriber terminals.

15. The system according to claim 14, further comprising:

means for waiting for a time-out period for a negative acknowledgment; and

5 means for releasing said uniquely assigned orthogonal code if no negative acknowledgment is received within said timeout period.

16. A system for code division packet switching at a destination mobile subscriber terminal, said destination mobile subscriber terminal being located within a microport cell of
10 a terrestrial wireless network at a given instant in time, where said network interfaces with a destination access radio port, comprising:

means for monitoring a paging channel for paging messages indicating that there is payload data for said destination mobile subscriber terminal;
means for receiving a paging message via said paging channel;
15 means for transmitting an acknowledgment to said destination access radio port;
means for receiving twice-spread payload data;
means for despread said payload data using a uniquely assigned orthogonal code and a PN-code; and
20 means for decoding said despread payload data.

17. The system according to claim 16, further comprising means for presenting said payload data to a user.

25 18. The system according to claim 16, wherein said means for monitoring is accomplished by monitoring said paging channel using an arbitrary orthogonal code.

19. The system according to claim 16, wherein said acknowledgment comprises an assignment of a unique orthogonal code.

30

20. The system according to claim 16, further comprising means for switching, by said destination mobile subscriber terminal, to said uniquely assigned orthogonal code before despread said twice-spread payload data.

5 21. A system for code division packet-switching at a destination access radio port of
a terrestrial wireless network, where said destination access radio port interfaces with a
plurality of destination mobile subscriber terminals located within a microport cell,
comprising:

 means for receiving a packet-switched transmission signal from an access
10 node via a network;

 means for assigning a unique orthogonal code to one of said plurality of said
destination mobile subscriber terminals;

 means for spreading payload data destined for said one of said plurality of
destination mobile subscriber terminals using both said uniquely assigned orthogonal
15 code and a PN-code;

 means for forwarding a paging message via a paging channel to said one of
said plurality of said destination mobile subscriber terminals indicating that there is
payload data destined for said one of said plurality of said destination mobile
subscriber terminals;

20 means for receiving an acknowledgment from said one of said plurality of
said destination mobile subscriber terminals;

 means for modulating said twice-spread payload data; and

 means for transmitting said twice-spread payload data over air to said one of
said plurality of said destination mobile subscriber terminals.

25

 22. A system for code division packet switching at a destination access radio port of
a terrestrial wireless network, where said destination access radio port interfaces with a
plurality of destination mobile subscriber terminals located within a microport cell,
comprising:

30 means for acquiring a preamble and a header, which has a PN-code;

 means for processing said PN-code to insure synchronization;

 means for sending an acknowledgment; and

 means for receiving payload data.

5 23. The system according to claim 22, wherein said preamble is acquired using a serial/parallel acquisition circuit.

 24. The system according to claim 23, wherein said synchronization is made to a standard reference time maintained by said destination access radio port.

10

 25. The system according to claim 22, wherein said payload data are received by despreding by a unique orthogonal code and said PN-code.

15 26. A system for code division packet switching used for interfacing a terrestrial wireless network with a packet-switched network, where said wireless network interfaces with a plurality of access radio ports, each of said access radio ports interfacing to a plurality of mobile subscriber terminals, comprising:

 means for spreading, by said originating mobile subscriber terminal, a transmission signal by a PN-code assigned to an intended receiving port;

20 means for inserting, by said originating mobile subscriber terminal, an identifier of a few bits for identifying a user;

 means for modulating, by said originating mobile subscriber terminal, said PN-code spread transmission signal;

25 means for forwarding, by said originating mobile subscriber terminal, said modulated PN-code spread transmission signal and marking the time origin of said forwarding;

 means for demodulating, by said originating access radio port, said modulated PN-code spread transmission signal;

30 means for acquiring, by said originating access radio port, a preamble from said transmitted signal;

 means for despreding, by said originating access radio port, a header from said transmitted signal;

 means for forwarding, by said originating access radio port, an acknowledgment to one of said plurality of said originating mobile subscriber

5 terminals, said acknowledgment comprising an assignment of an orthogonal code to said one of said plurality of originating mobile subscriber terminals and a timing adjustment;

means for receiving, by said originating mobile subscriber terminal, said acknowledgment, within a time-out period, from said originating access radio port;

10 means for spreading, by said originating mobile subscriber terminal, a payload data signal by said assigned orthogonal code;

means for spreading, by said originating mobile subscriber terminal, the orthogonal spread payload data signal by the PN-code associating the user with payload data;

15 means for modulating, by said originating mobile subscriber terminal, said twice-spread payload data signal;

means for adjusting, by said originating mobile subscriber terminal, a transmission time by said timing adjustment received from said originating radio access port;

20 means for forwarding, by said originating mobile subscriber terminal, said modulated twice-spread payload data signal to said originating access radio port;

means for receiving, by said originating access radio port, a further transmission signal comprising payload data;

25 means for despreading said further transmission signal by both said assigned orthogonal code and said PN-code;

means for monitoring, by a destination mobile subscriber terminal, a paging channel for paging messages indicating that there is payload data for said destination mobile subscriber terminal;

30 means for transmitting, by a destination access radio port, said paging message to a destination mobile subscriber terminal over said paging channel indicating that there is payload data for one of said plurality of destination mobile subscriber terminals;

means for receiving, by said destination mobile subscriber terminal, said paging message via said paging channel;

5 means for transmitting, by said destination mobile subscriber terminal, an acknowledgment to said destination access radio port;

means for receiving, by said destination access radio port, said acknowledgment from said one of said plurality of destination mobile subscriber terminals;

10 means for spreading, by said destination access radio port, said payload data extracted from an ATM packet with a uniquely assigned orthogonal code and with said PN-code;

15 means for transmitting, by said destination access radio port, said twice-spread payload data to said one of said plurality of destination mobile subscriber terminals;

means for receiving, by said destination mobile subscriber terminal, said twice-spread payload data;

means for despreading, by said destination mobile subscriber terminal, said payload data using said uniquely assigned orthogonal code and said PN-code; and

20 means for decoding, by said destination mobile subscriber terminal, said despread payload data.

27. The system according to claim 26, further comprising the step of presenting, by said destination mobile subscriber terminal, said payload data to a user.

25

28. The system according to claim 26, wherein said first means for spreading by said PN-code forms a preamble, which is prepended to a packet.

29. A system for code division packet switching used for interfacing a terrestrial
30 wireless network with a packet-switched network, where said wireless network interfaces with a plurality of access radio ports, each of said access radio ports interfacing to a plurality of mobile subscriber terminals, comprising:

means for spreading, by said originating mobile subscriber terminal, a transmission signal by a PN-code assigned to an intended receiving port;

5 means for inserting, by said originating mobile subscriber terminal, an identifier of a few bits for identifying a user;

means for modulating, by said originating mobile subscriber terminal, said PN-code spread transmission signal;

10 means for forwarding, by said originating mobile subscriber terminal, said modulated PN-code spread transmission signal and marking the time origin of said forwarding;

means for demodulating, by said originating access radio port, said modulated PN-code spread transmission signal;

15 means for acquiring, by said originating access radio port, a preamble from said transmitted signal;

means for despreading, by said originating access radio port, a header from said transmitted signal;

20 means for forwarding, by said originating access radio port, an acknowledgment to one of said plurality of said originating mobile subscriber terminals, said acknowledgment comprising an assignment of an orthogonal code to said one of said plurality of originating mobile subscriber terminals and a timing adjustment;

means for receiving, by said originating mobile subscriber terminal, said acknowledgment, within a time-out period, from said originating access radio port;

25 means for spreading, by said originating mobile subscriber terminal, a payload data signal by said assigned orthogonal code;

means for spreading, by said originating mobile subscriber terminal, the orthogonal spread payload data signal by the PN-code associating the user with payload data;

30 means for modulating, by said originating mobile subscriber terminal, said twice-spread payload data signal;

5 means for adjusting, by said originating mobile subscriber terminal, a transmission time by said timing adjustment received from said originating radio access port;

means for forwarding, by said originating mobile subscriber terminal, said modulated twice-spread payload data signal to said originating access radio port;

10 means for receiving, by said originating access radio port, a further transmission signal comprising payload data;

means for despreading, by said originating access radio port, said further transmission signal by both said assigned orthogonal code and said PN-code;

15 means for monitoring, by a destination mobile subscriber terminal, a paging channel for paging messages indicating that there is payload data for said destination mobile subscriber terminal;

means for receiving, by said destination radio access port, said packet switch transmission signal from an access node via a network;

20 means for assigning, by said destination access radio port, a unique orthogonal code to one of said plurality of said destination mobile subscriber terminals;

means for spreading, by said destination access radio port, payload data destined for said one of said plurality of destination mobile subscriber terminals using both said uniquely assigned orthogonal code and a PN-code;

25 means for transmitting, by a destination access radio port, said paging message to said one of said plurality of said destination mobile subscriber terminals over said paging channel indicating that there is payload data for said one of said plurality of destination mobile subscriber terminals;

30 means for receiving, by said destination mobile subscriber terminal, said paging message via said paging channel;

means for transmitting, by said destination mobile subscriber terminal, an acknowledgment to said destination access radio port;

5 means for receiving, by said destination access radio port, said acknowledgment from said one of said plurality of destination mobile subscriber terminals;

means for spreading, by said destination access radio port, said payload data extracted from an ATM packet with a uniquely assigned orthogonal code and with
10 said PN-code;

means for modulating, by said destination access radio port, said twice-spread payload data;

means for transmitting, by said destination access radio port, said twice-spread payload data over air to said one of said plurality of destination mobile
15 subscriber terminals;

means for receiving, by said destination mobile subscriber terminal, said twice-spread payload data;

means for despreading, by said destination mobile subscriber terminal, said payload data using said uniquely assigned orthogonal code and said PN-code; and

20 means for decoding, by said destination mobile subscriber terminal, said despread payload data.

30. The system according to claim 29, further comprising means for presenting, by said destination mobile subscriber terminal, said payload data to a user.

25

31. The system according to claim 29, wherein said first means for spreading by said PN-code forms a preamble, which is prepended to a packet.

32. A system for code division packet switching at an originating mobile subscriber
30 terminal, said originating mobile subscriber terminal being located within a microport cell of a terrestrial wireless network at a given instant of time, where said network interfaces with an originating access radio port, comprising:

means for spreading a preamble by a PN-code assigned to an access radio port;

- 5 means for inserting an identifier of a few bits for identifying a user;
means for modulating said PN-code spread transmission signal;
means for forwarding said modulated PN-code spread transmission signal
and marking a time origin of said forwarding of said modulated PN-code spread
transmission signal;
- 10 means for receiving an acknowledgment, within a time-out period, from said
originating access radio port, said acknowledgment comprising an assignment of an
orthogonal code to said originating mobile subscriber terminal and a timing
adjustment;
- 15 means for spreading a payload data signal by said assigned orthogonal code;
means for spreading the orthogonal spread payload data signal by the PN-
code thereby associating the user with payload data;
means for modulating said twice-spread payload data signal;
means for adjusting a transmission time by said timing adjustment received
from said originating access radio port; and
- 20 means for forwarding said modulated twice-spread payload data signal to
said originating access radio port.

33. The system according to claim 32, wherein said first spreading means and said
second spreading means are accomplished using a spreader comprising:

- 25 a first multiplier used to spread said payload data by said assigned orthogonal
code;
- a second multiplier used to spread said preamble, said header and said
payload data by said PN-code; and
- 30 a switch used to alternate between said first multiplier and said second
multiplier thereby spreading said preamble and said header by said PN-code only
and spreading said payload data by both said assigned orthogonal code and said PN-
code.

5 34. A system for code division packet switching used for interfacing a terrestrial wireless network with a packet-switched network, where said wireless network interfaces with a plurality of access radio ports, each of said access radio ports interfacing to a plurality of mobile subscriber terminals, comprising:

10 means for spreading, by said originating mobile subscriber terminal, a preamble and a header signal by a PN-code assigned to an intended receiving port;

 means for inserting, by said originating mobile subscriber terminal, an identifier of a few bits for identifying a user;

 means for modulating, by said originating mobile subscriber terminal, said PN-code spread transmission signal;

15 means for forwarding, by said originating mobile subscriber terminal, said modulating PN-code spread transmission signal and marking the time origin of said forwarding;

 means for demodulating, by said originating access radio port, said modulated PN-code spread transmission signal;

20 means for acquiring, by said originating access radio port, a preamble from said transmitted signal;

 means for despreading, by said originating access radio port, a header from said transmitted signal;

25 means for forwarding, by said originating access radio port, an acknowledgment to one of said plurality of said originating mobile subscriber terminals, said acknowledgment comprising an assignment of an orthogonal code to said one of said plurality of originating mobile subscriber terminals and a timing adjustment;

30 means for receiving, by said originating mobile subscriber terminal, said acknowledgment, within a time-out period, from said originating access radio port;

 means for spreading, by said originating mobile subscriber terminal, a payload data signal by said assigned orthogonal code;

5 means for spreading, by said originating mobile subscriber terminal, the orthogonal spread payload data signal by the PN-code associating the user with payload data;

means for modulating, by said originating mobile subscriber terminal, said twice-spread payload data signal;

10 means for adjusting, by said originating mobile subscriber terminal, a transmission time by said timing adjustment received from said originating access radio port;

means for forwarding, by said originating mobile subscriber terminal, said modulated twice-spread payload data signal to said originating access radio port;

15 means for receiving, by said originating access radio port, a further transmission signal comprising payload data;

means for despreading, by said originating access radio port, said further transmission signal by both said assigned orthogonal code and said PN-code;

20 means for monitoring, by a destination mobile subscriber terminal, a paging channel for paging messages indicating that there is payload data for said destination mobile subscriber terminal;

means for receiving, by said destination radio access port, said packet switch transmission signal from an access node via a network;

25 means for assigning, by said destination access radio port, a unique orthogonal code to one of said plurality of said destination mobile subscriber terminals;

means for spreading, by said destination access radio port, payload data destined for said one of said plurality of destination mobile subscriber terminals using both said uniquely assigned orthogonal code and a PN-code;

30 means for transmitting, by a destination access radio port, a paging message to said one of said plurality of said destination mobile subscriber terminals over said paging channel indicating that there is payload data for said one of said plurality of destination mobile subscriber terminals;

- 5 means for receiving, by said destination mobile subscriber terminal, said paging message via said paging channel;
- means for transmitting, by said destination mobile subscriber terminal, an acknowledgment to said destination access radio port;
- 10 means for receiving, by said destination access radio port, said acknowledgment from said one of said plurality of destination mobile subscriber terminals;
- means for spreading, by said destination access radio port, said payload data extracted from an ATM packet with a uniquely assigned orthogonal code and with said PN-code;
- 15 means for modulating, by said destination access radio port, said twice-spread payload data;
- means for transmitting, by said destination access radio port, said twice-spread payload data over air to one of said plurality of destination mobile subscriber terminals;
- 20 means for receiving, by said destination mobile subscriber terminal, said twice-spread payload data;
- means for despreading, by said destination mobile subscriber terminal, said payload data using said uniquely assigned orthogonal code and said PN-code; and
- 25 means for decoding, by said destination mobile subscriber terminal, said despread payload data.

35. The system according to claim 34 wherein said first spreading means and said second spreading means are accomplished using a spreader comprising:

- 30 a first multiplier used to spread said payload data by said assigned orthogonal code;
- a second multiplier used to spread said preamble, said header and said payload data by said PN-code; and
- a switch used to alternate between said first multiplier and said second multiplier thereby spreading said preamble and said header by said PN-code only

5 and spreading said payload data by both said assigned orthogonal code and said PN-code.

10 36. A code division switching system used for interfacing a terrestrial wireless network with a core network, where said wireless network interfaces with a plurality of wireless terminal users, comprising:

means for spreading a transmission signal by a PN-code assigned to an intended receiving port;

means for inserting an identifier of a few bits for identifying a user;

15 means for spreading payload data by an orthogonal code;

means for spreading the orthogonal spread payload data signal by the PN-code identifying the user with payload data;

20 means for forwarding, at the originating terminal, said PN-code spread transmission signal and said twice spread payload data signal to an access radio port;

means for despreading, at an originating access radio port, the transmission signal by orthogonal code assignments to recover microport groupings and route said microport groupings accordingly;

25 means for translating, at the originating access radio port, the orthogonal code assignments to a packet address identifying a destination microport augmented to identify a destination access node;

means for downconverting, at the originating access radio port, to an intermediate frequency;

30 means for depositing, at the originating access radio port, said despread transmission signal into a packet with said packet address;

means for transmitting, from the originating access radio port, said packet to an originating access node for further transmission over a network;

- 5 means for receiving, at a destination access radio port, said packet switched transmission signal from a destination access node via a core network;
means for translating a packet address into an orthogonal code sequence;
means for resspreading said orthogonal code sequence into a transmission signal at an intermediate frequency;
10 means for upconverting said resspread transmission signal; and
means for transmitting said resspread upconverted transmission signal over the air to a destination terminal user.

37. A code division switching system used for interfacing a terrestrial wireless network with a core network, where said wireless network interfaces with a plurality of wireless terminal users, comprising the steps of:

- means for spreading a transmission signal by a PN-code assigned to an intended receiving port;
means for inserting an identifier of a few bits for identifying a user;
20 means for spreading payload data by an orthogonal code;
means for spreading the orthogonal spread payload data signal by the PN-code identifying the user with payload data;
means for forwarding, at the originating terminal, said PN-code spread transmission signal and said twice spread payload data signal to an access radio port;
25 means for despreading, at an originating access radio port, the transmission signal by orthogonal code assignments to recover microport groupings and route said microport groupings accordingly;
means for directing the transmission signal within the same access node according to the orthogonal code assignments;
30 means for downconverting, at the originating access radio port, to an intermediate frequency;
means for depositing, at the originating access radio port, said despread transmission signal into a packet with said packet address;

5 means for transmitting, from the originating access radio port, said packet to an originating access node for further transmission over a core network;

means for receiving, at a destination access radio port, said packet switched transmission signal from a destination access node via a core network;

means for translating a packet address into an orthogonal code sequence;

10 means for resspreading said orthogonal code sequence into a transmission signal at an intermediate frequency;

means for upconverting said resspread transmission signal; and

means for transmitting said resspread upconverted transmission signal over the air to a destination terminal user.

15

38. A code division switching system at an originating terminal, located at an instant of transmission within a microport cell, of a terrestrial wireless network, where said network interfaces with an access radio port, comprising:

20 a first spreader for spreading a transmission signal by a PN-code assigned to an intended receiving port;

a second spreader for spreading a payload data signal by an orthogonal code assigned to a receiving terminal user to which the payload data signal is directed, said payload data signal being further spread by said first spreader;


25 means for forwarding said PN-code spread transmission signal to an access radio port; and

means for forwarding said twice spread transmission signal to an access radio port.



30

1/15

FIG. 1

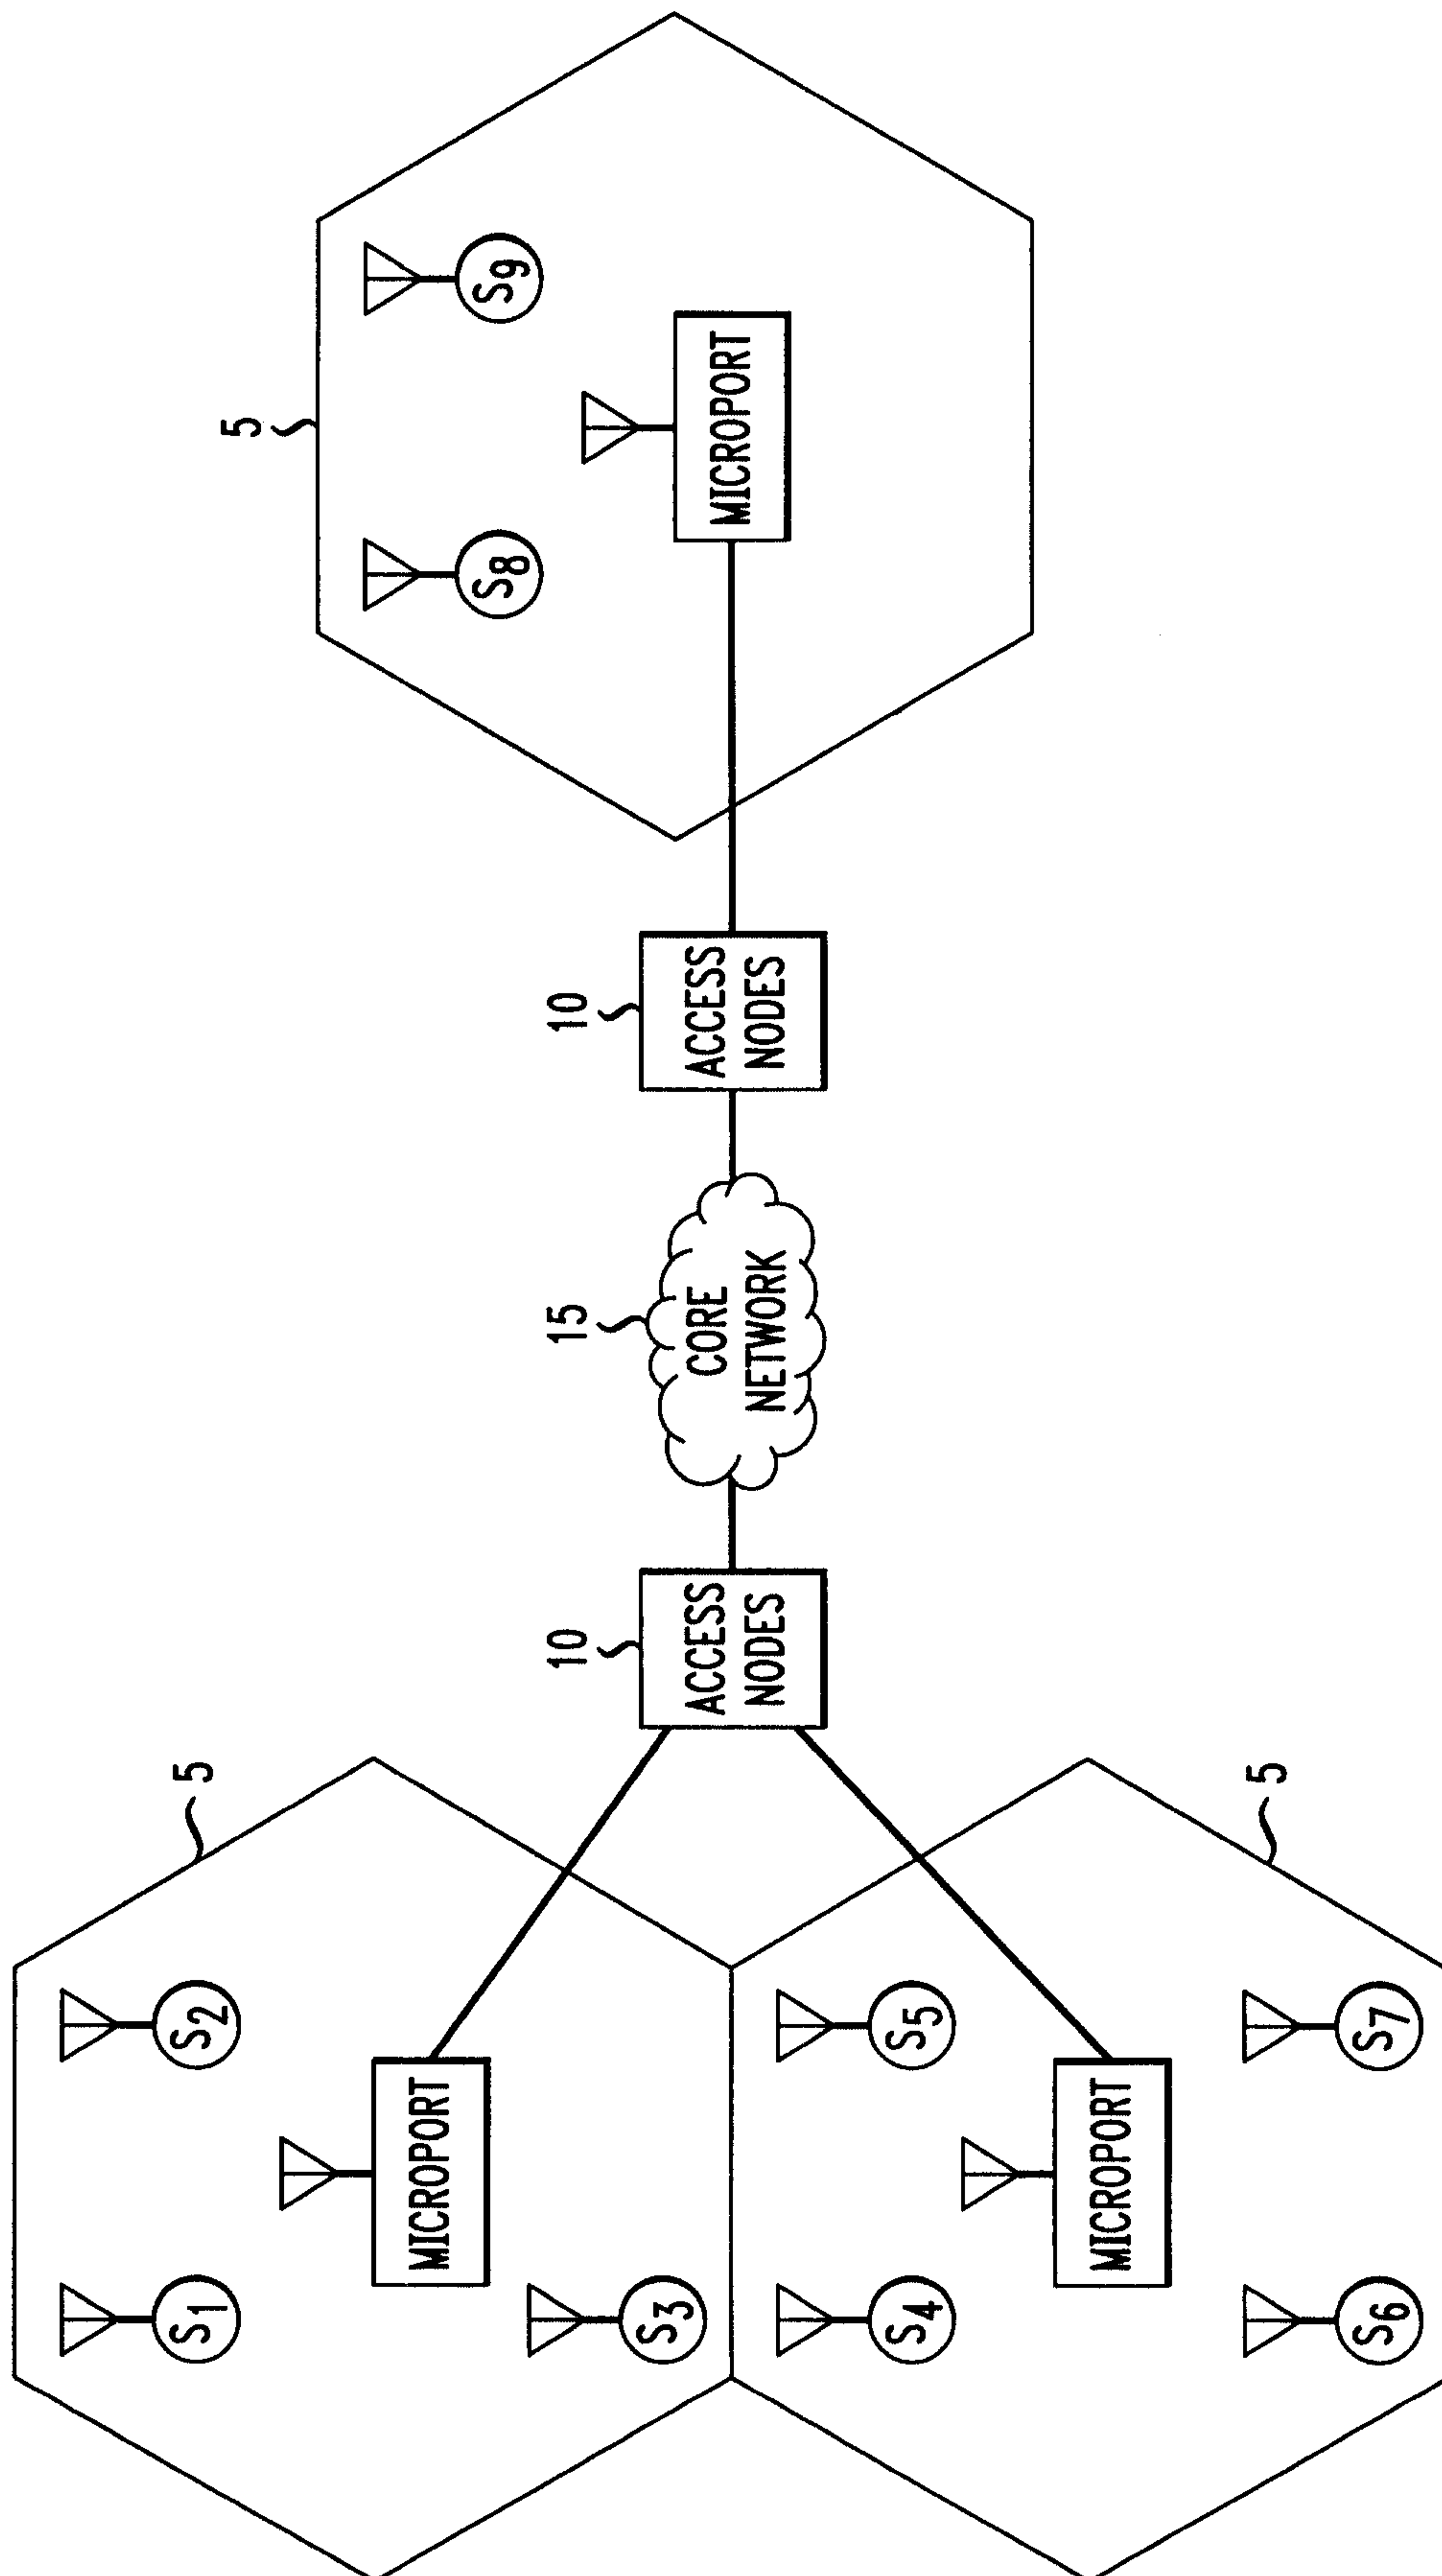

2/15

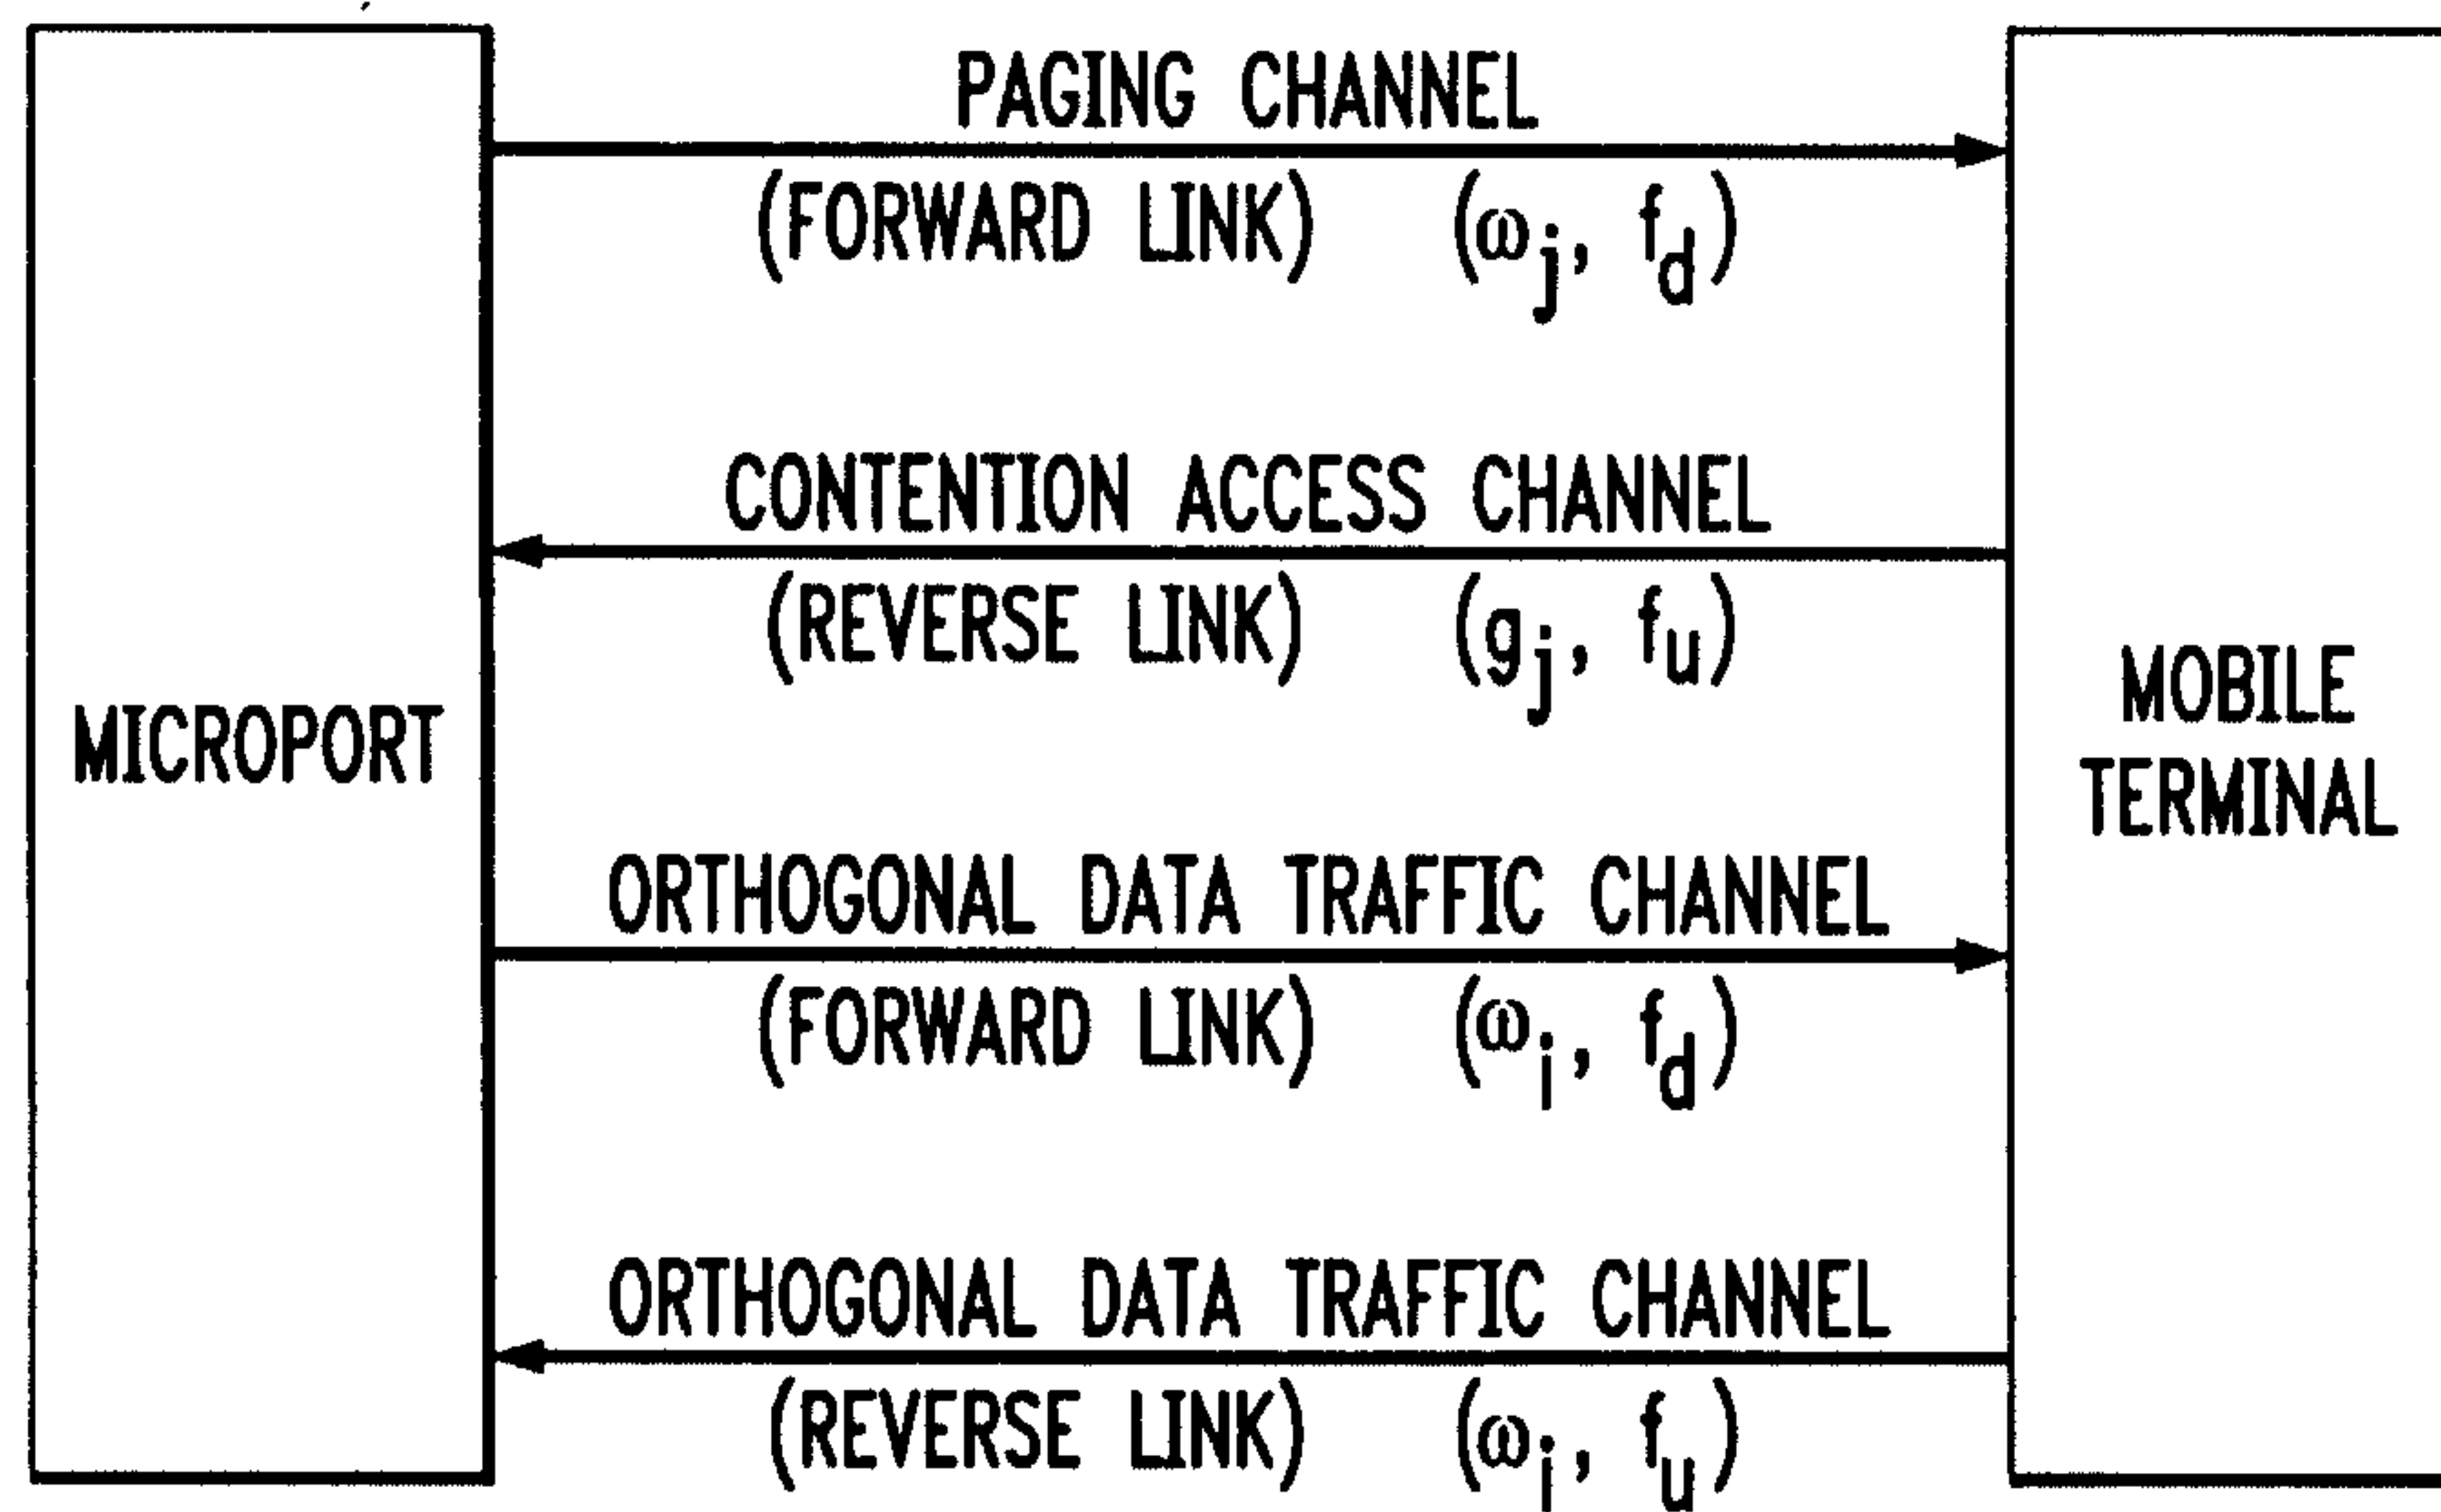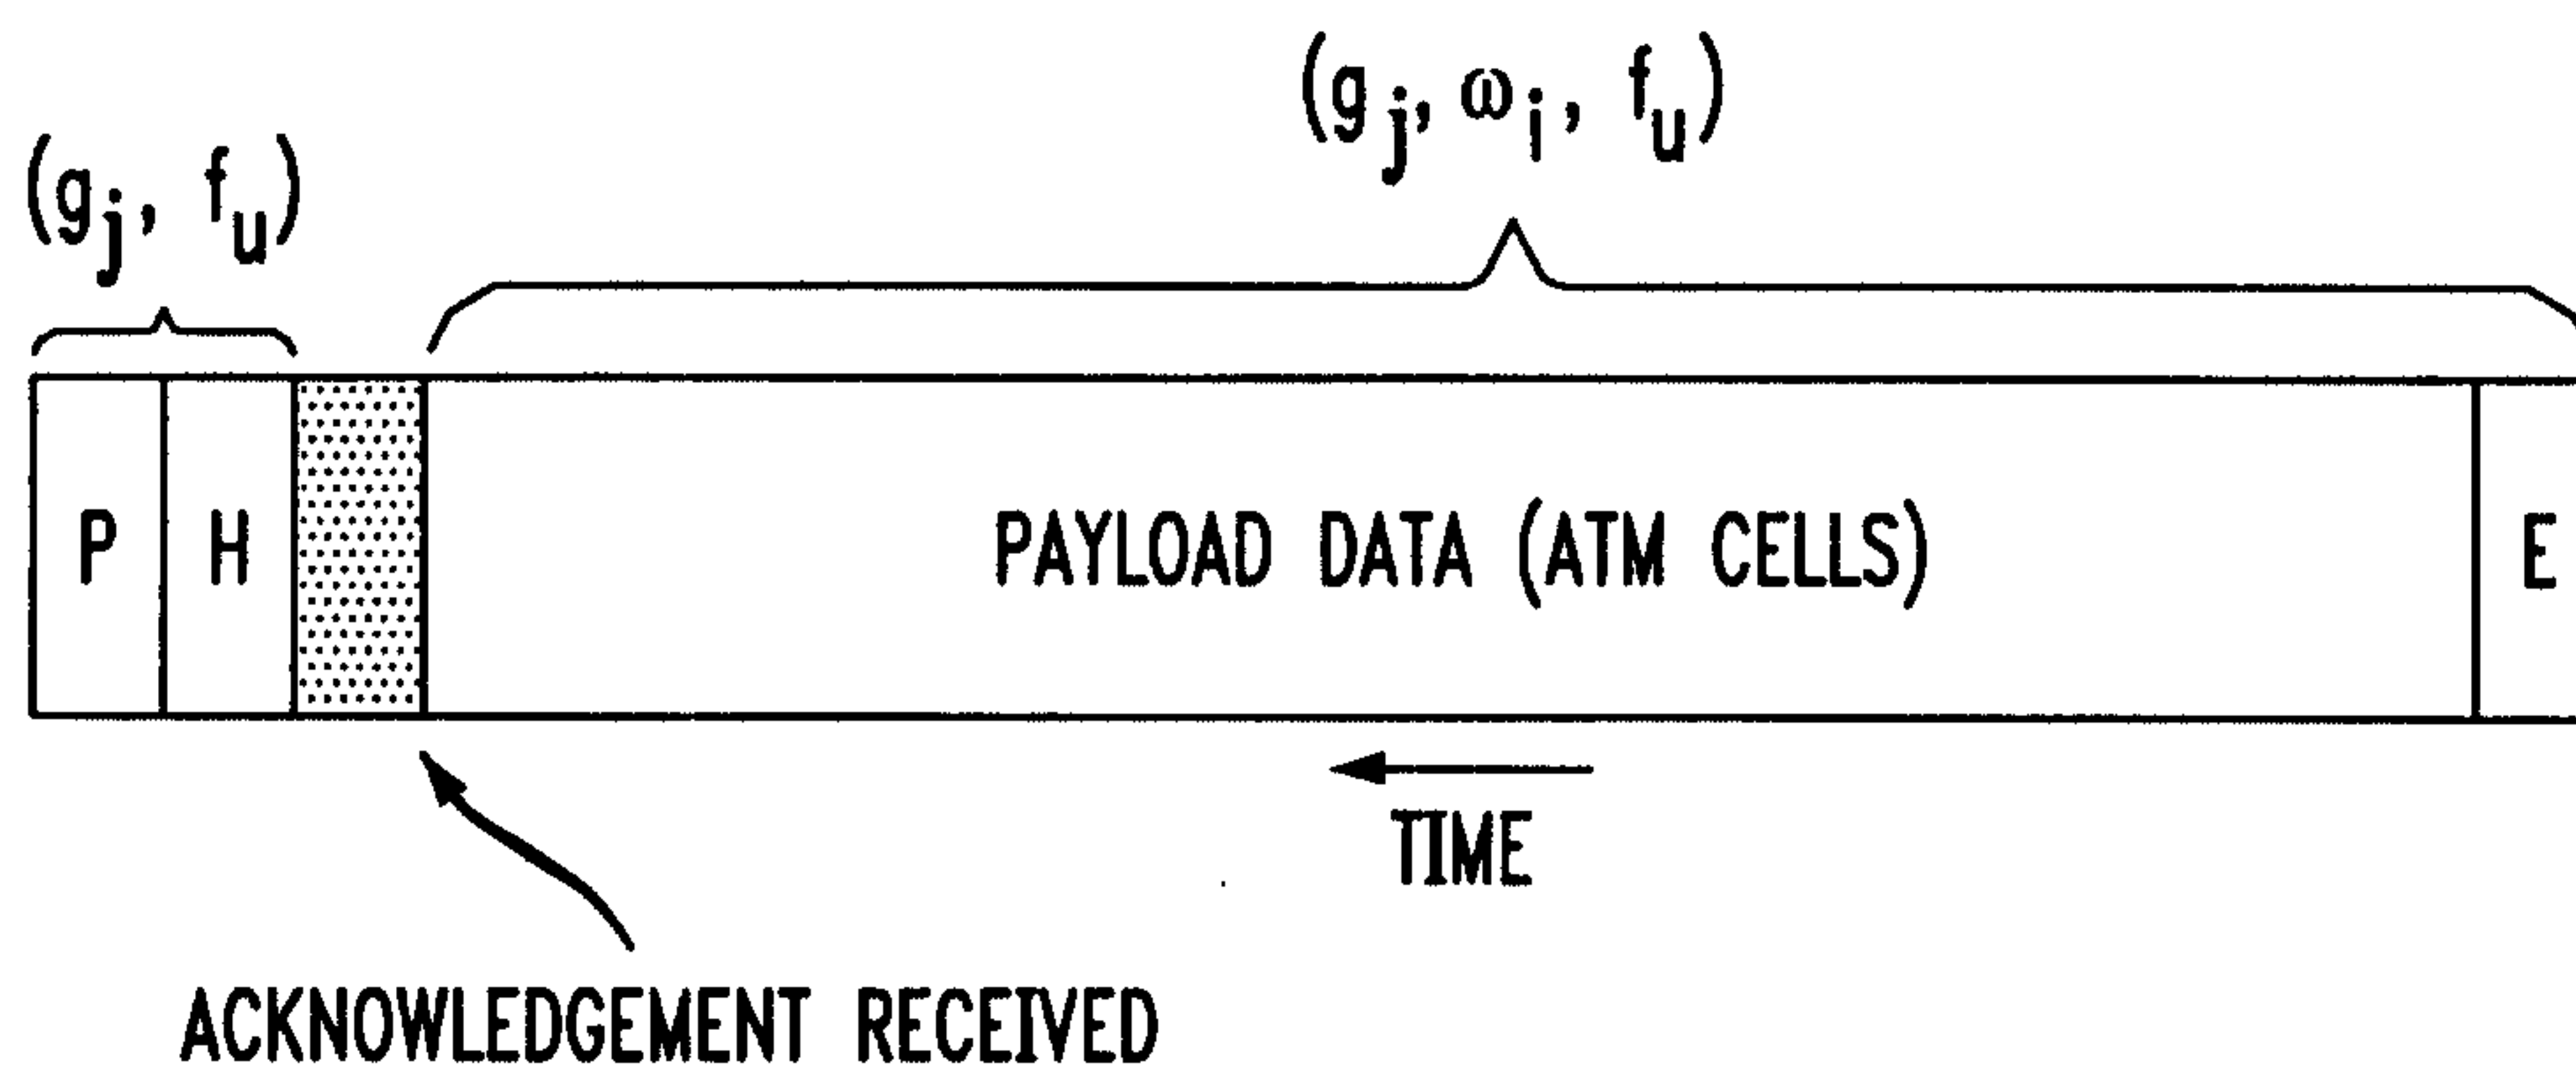FIG. 2*FIG. 3a*

3/15

FIG. 3b



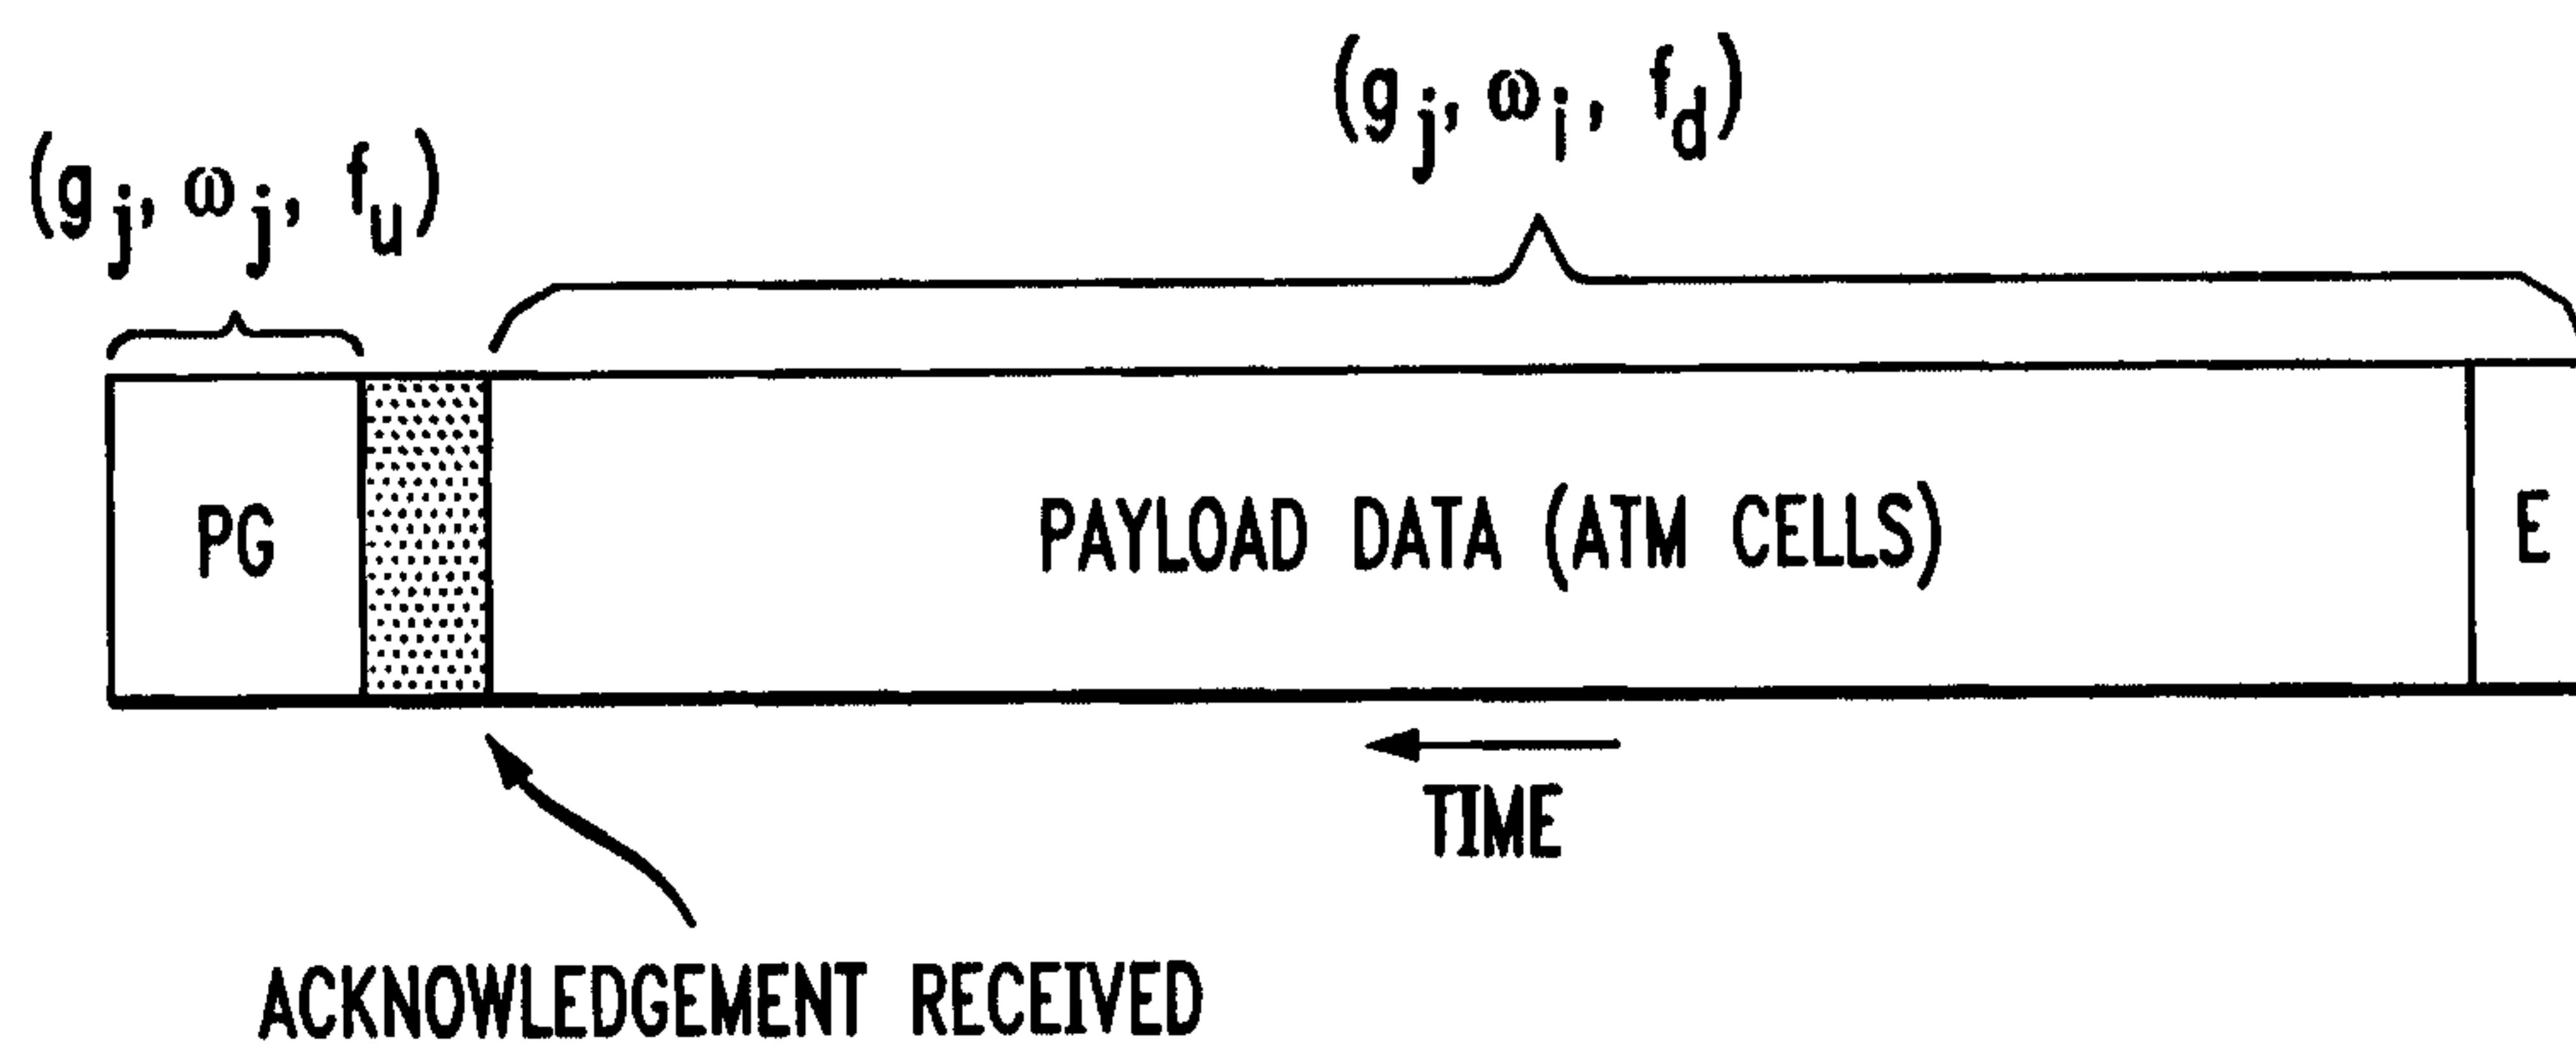



FIG. 4a

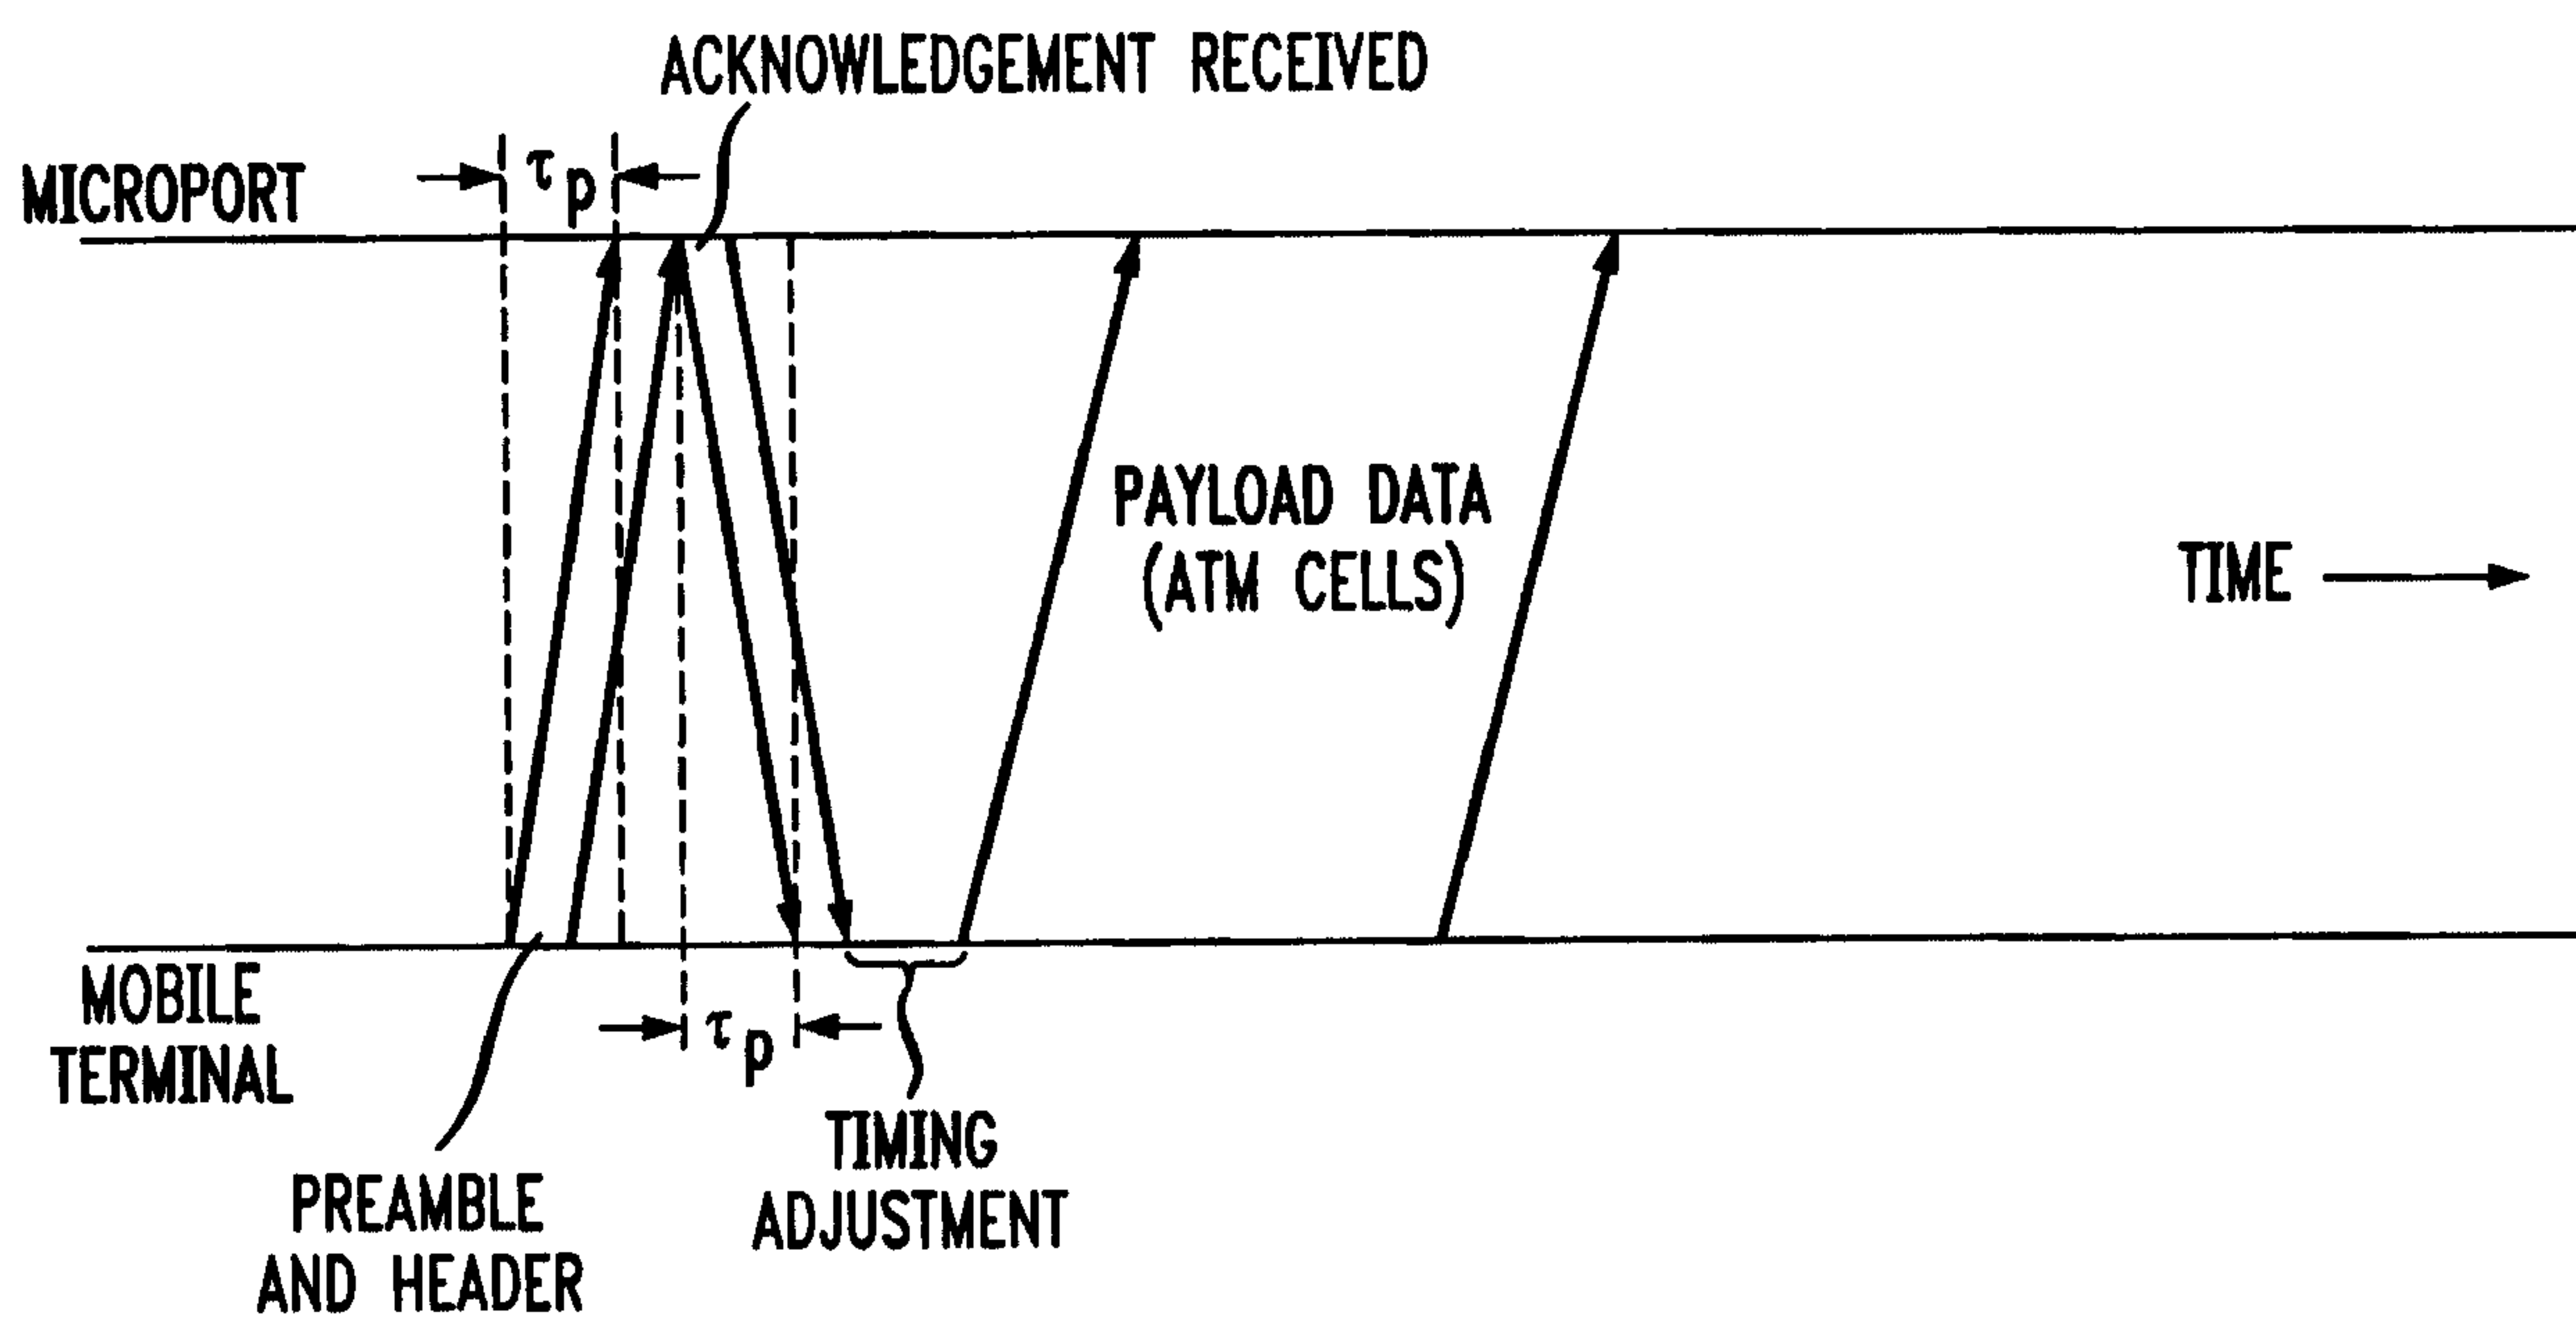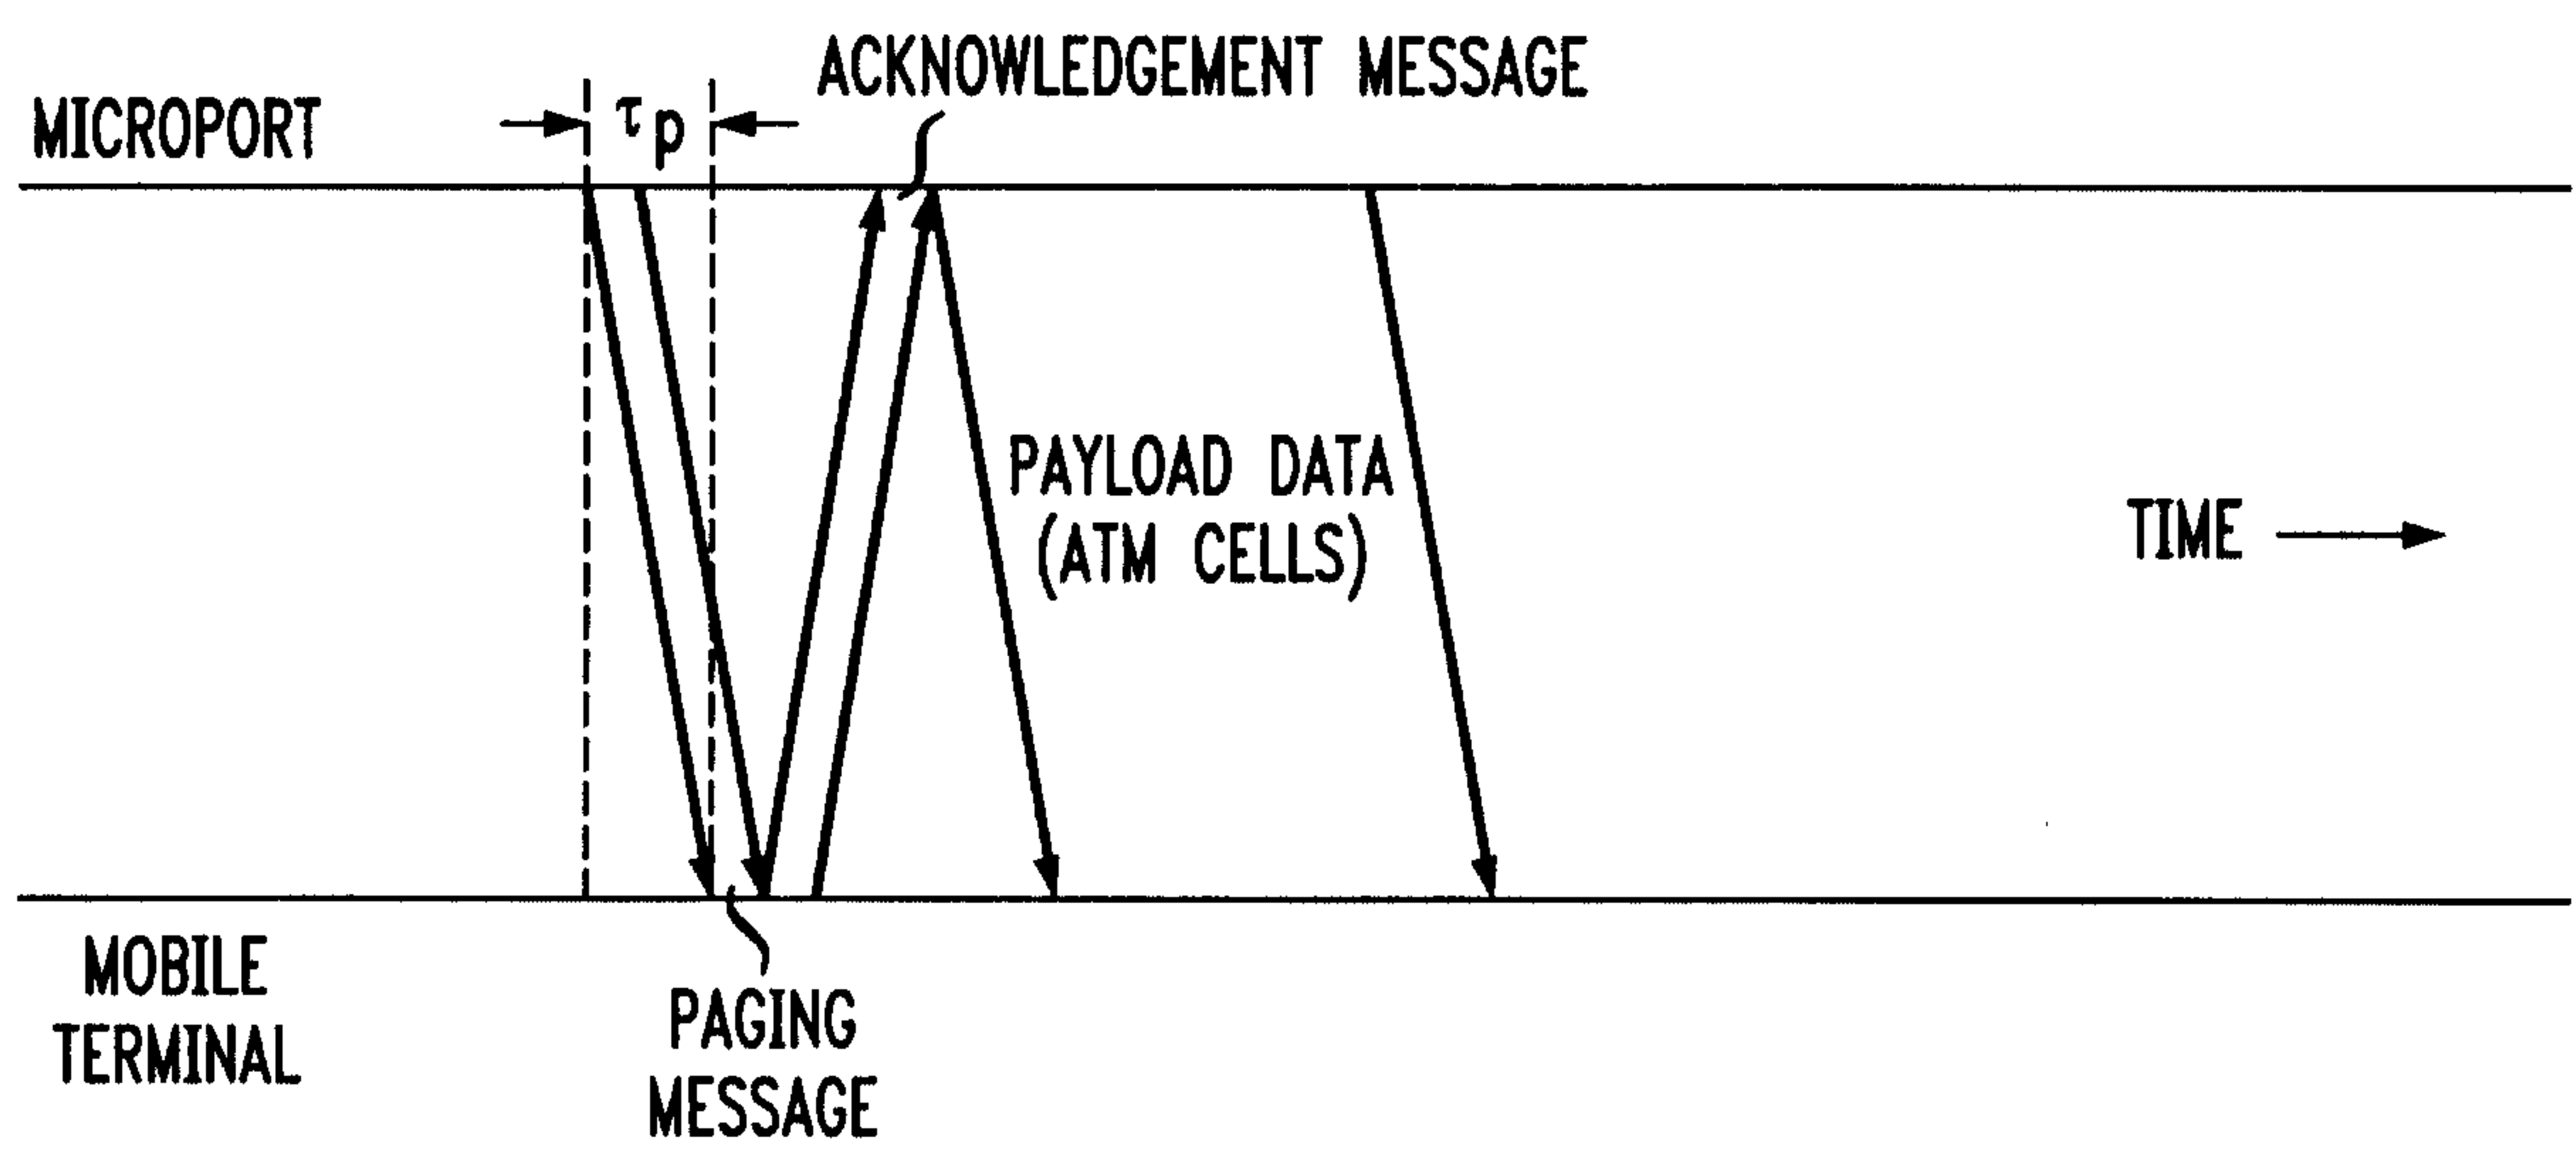

4/15


FIG. 4b

5/15

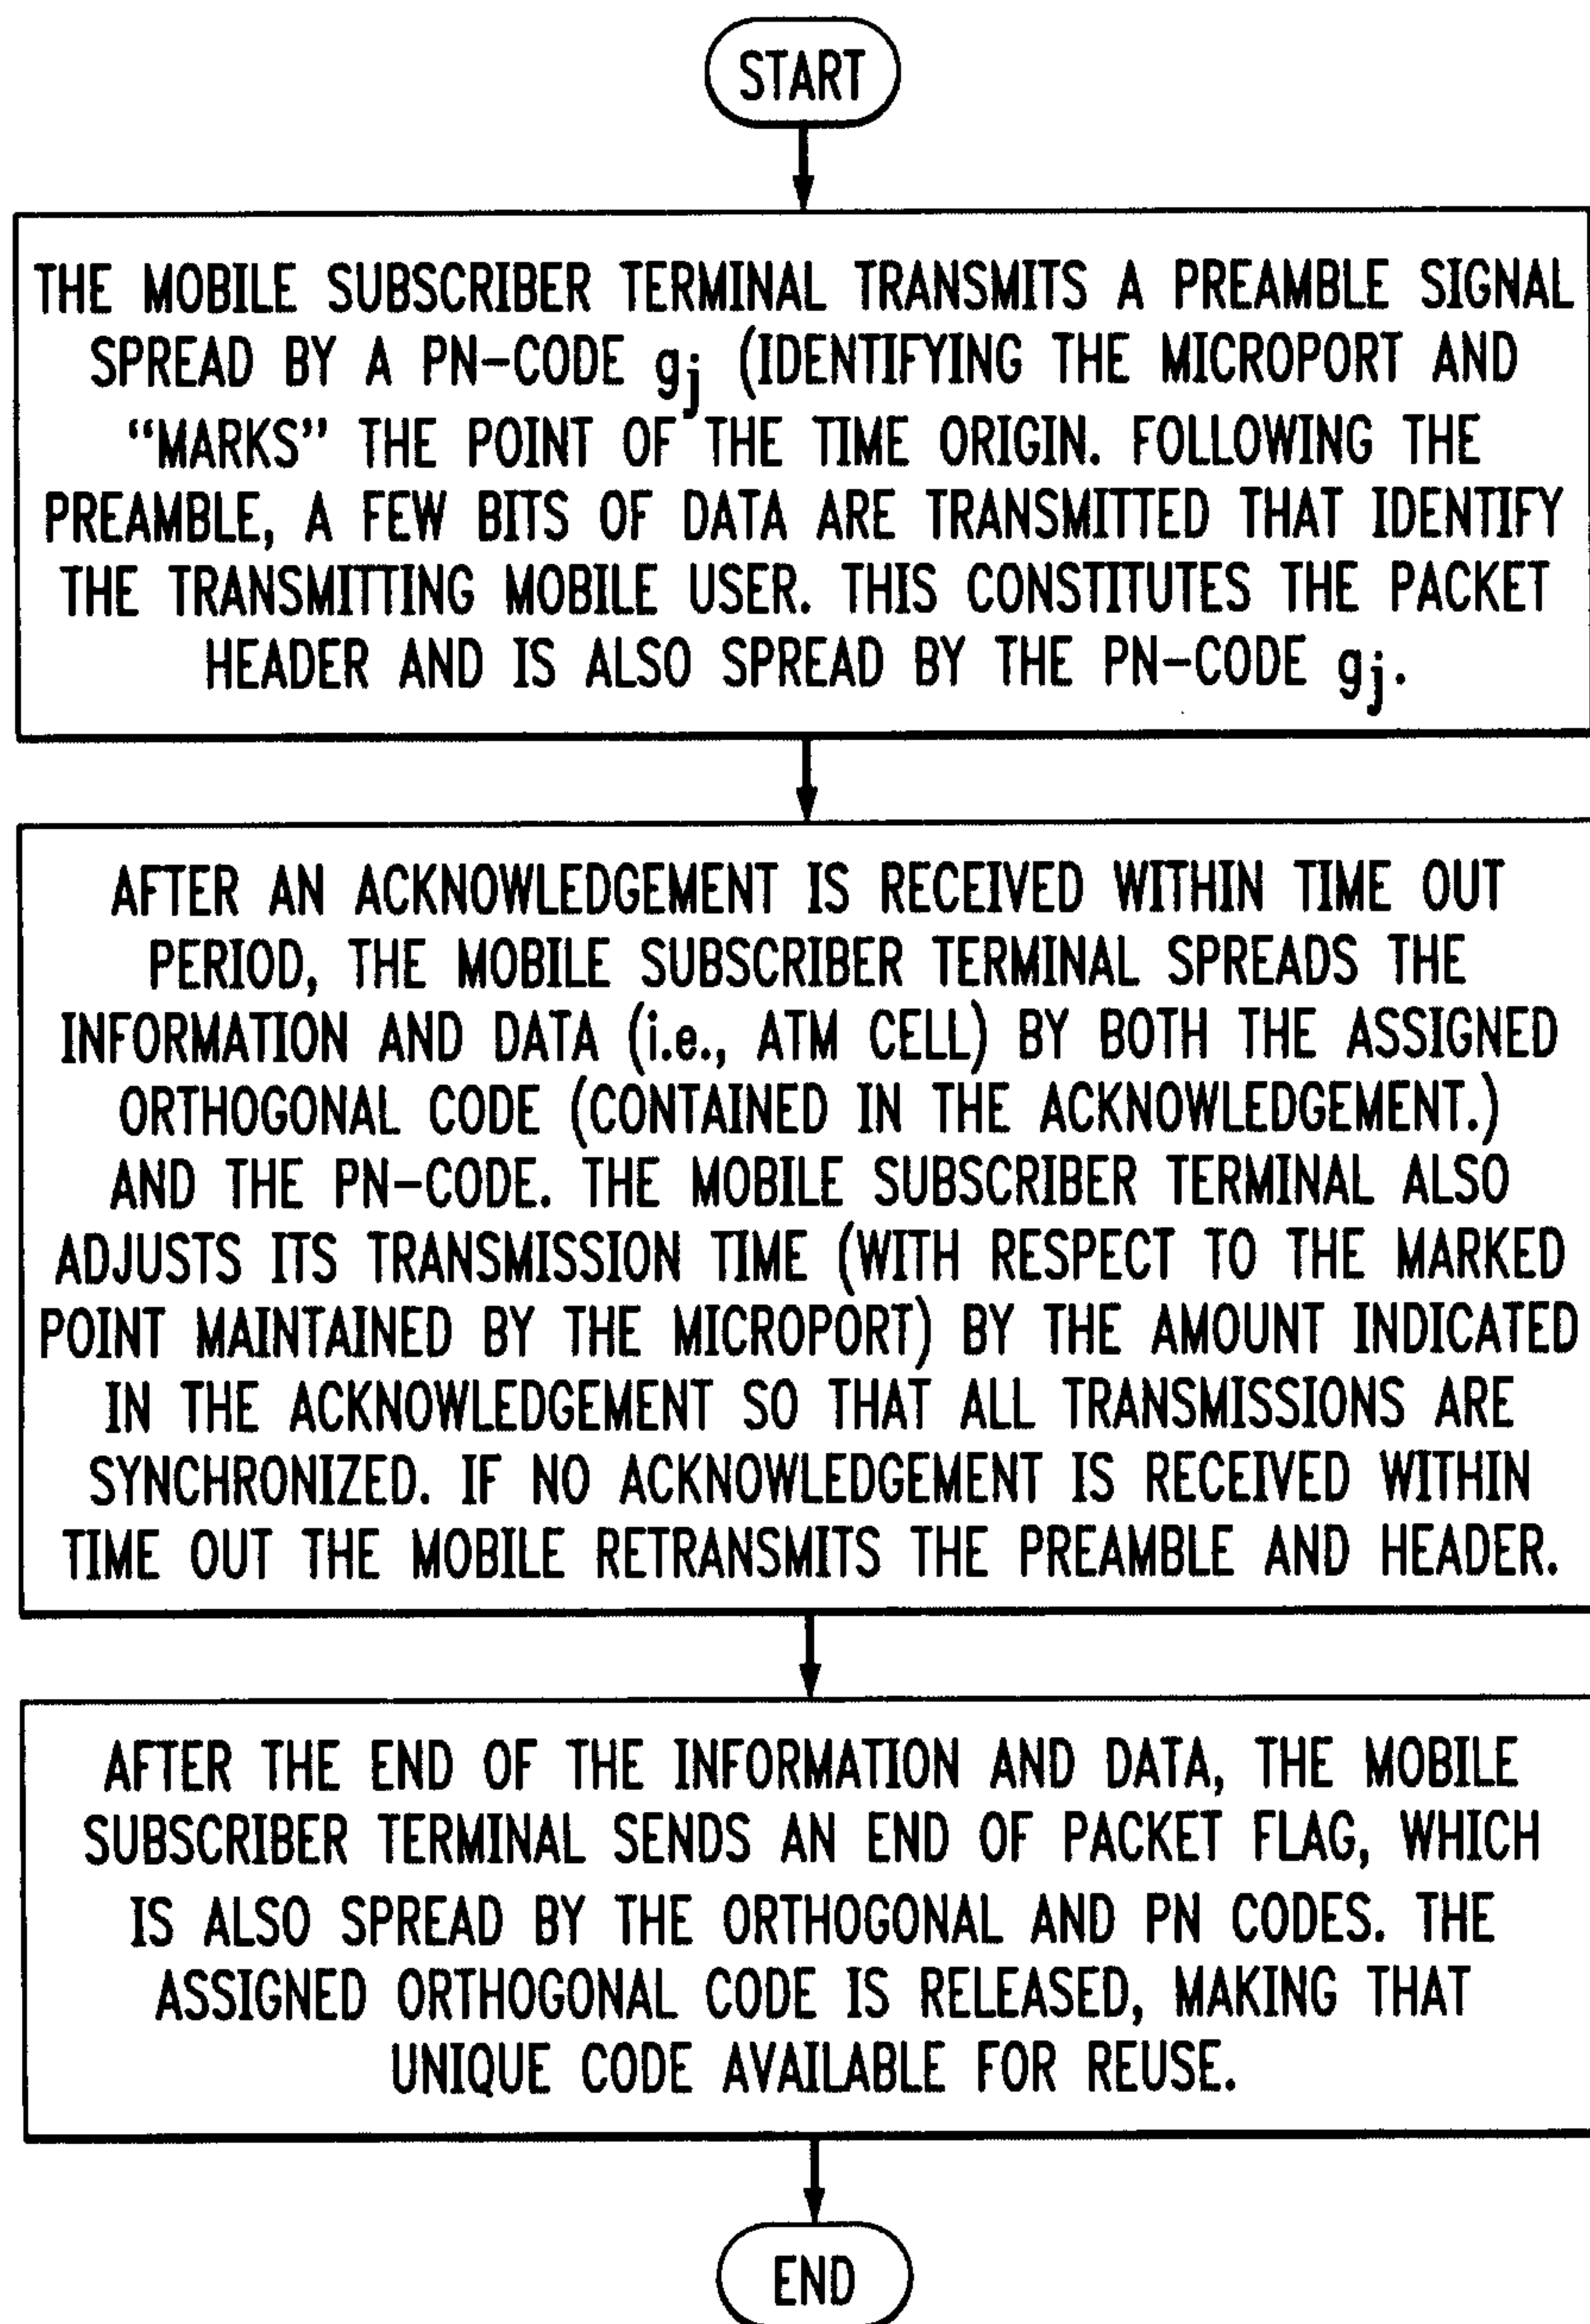FIG. 5a


6/15

FIG. 5b


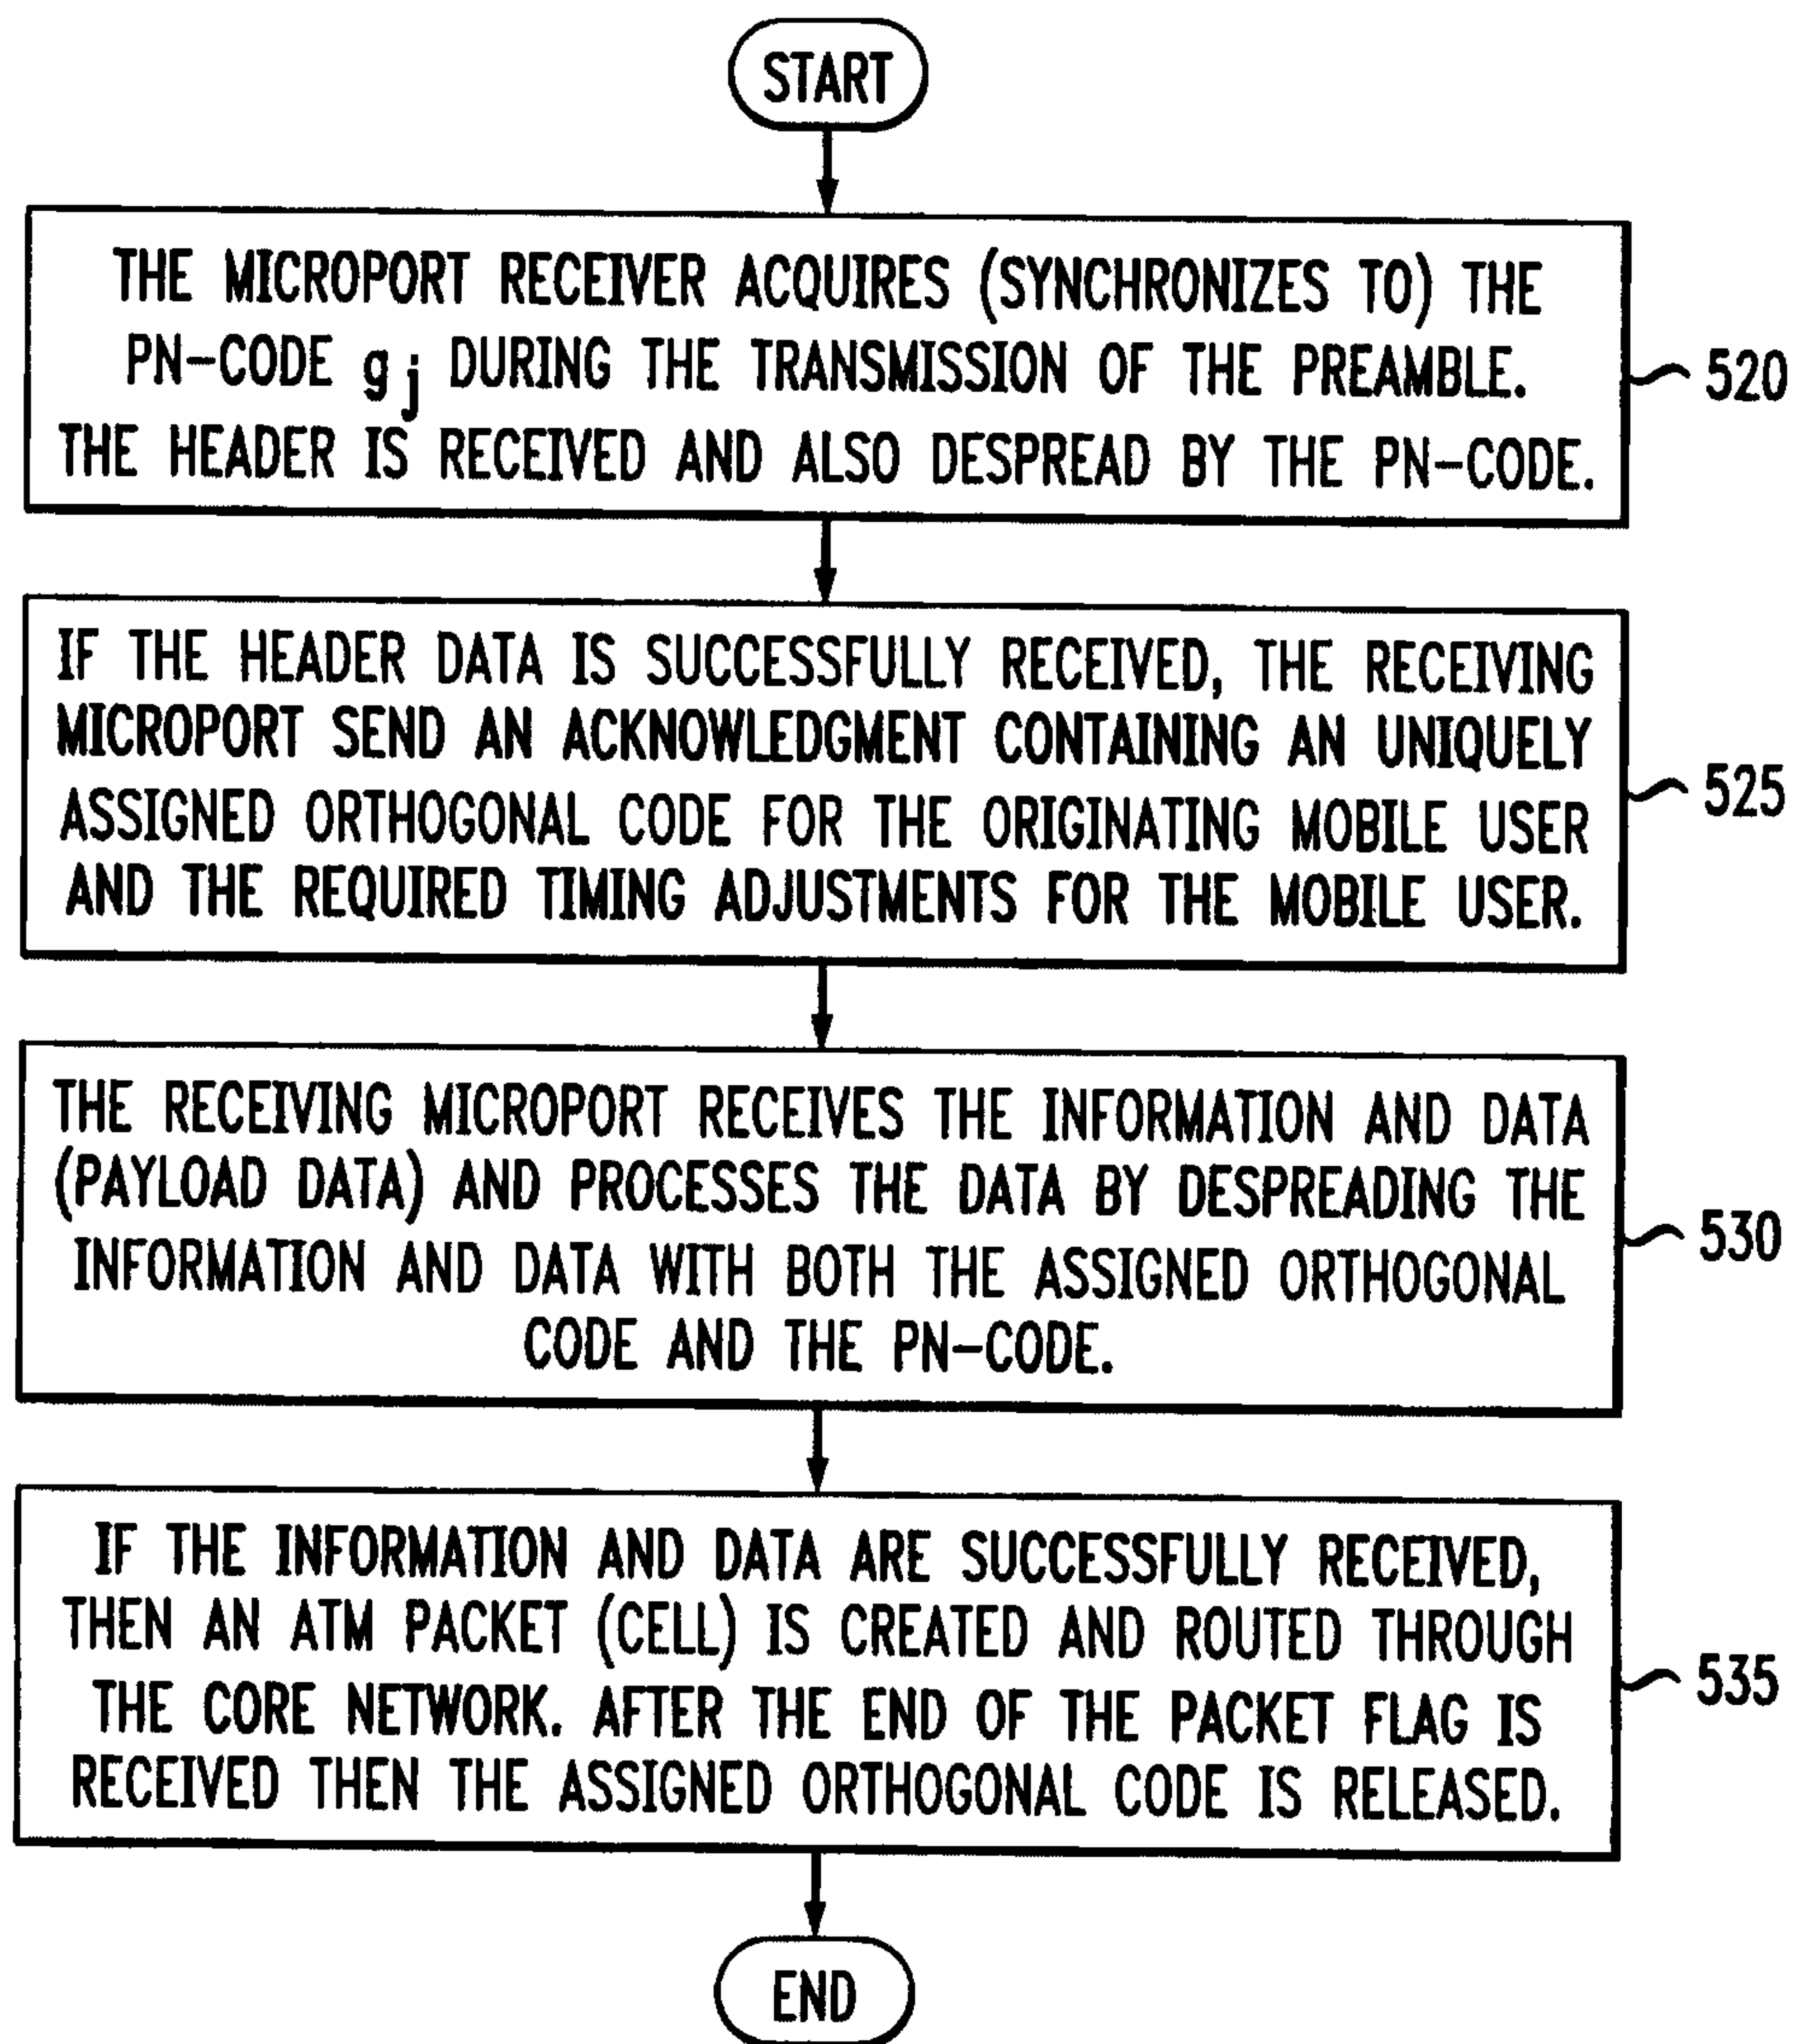


7/15

FIG. 5c

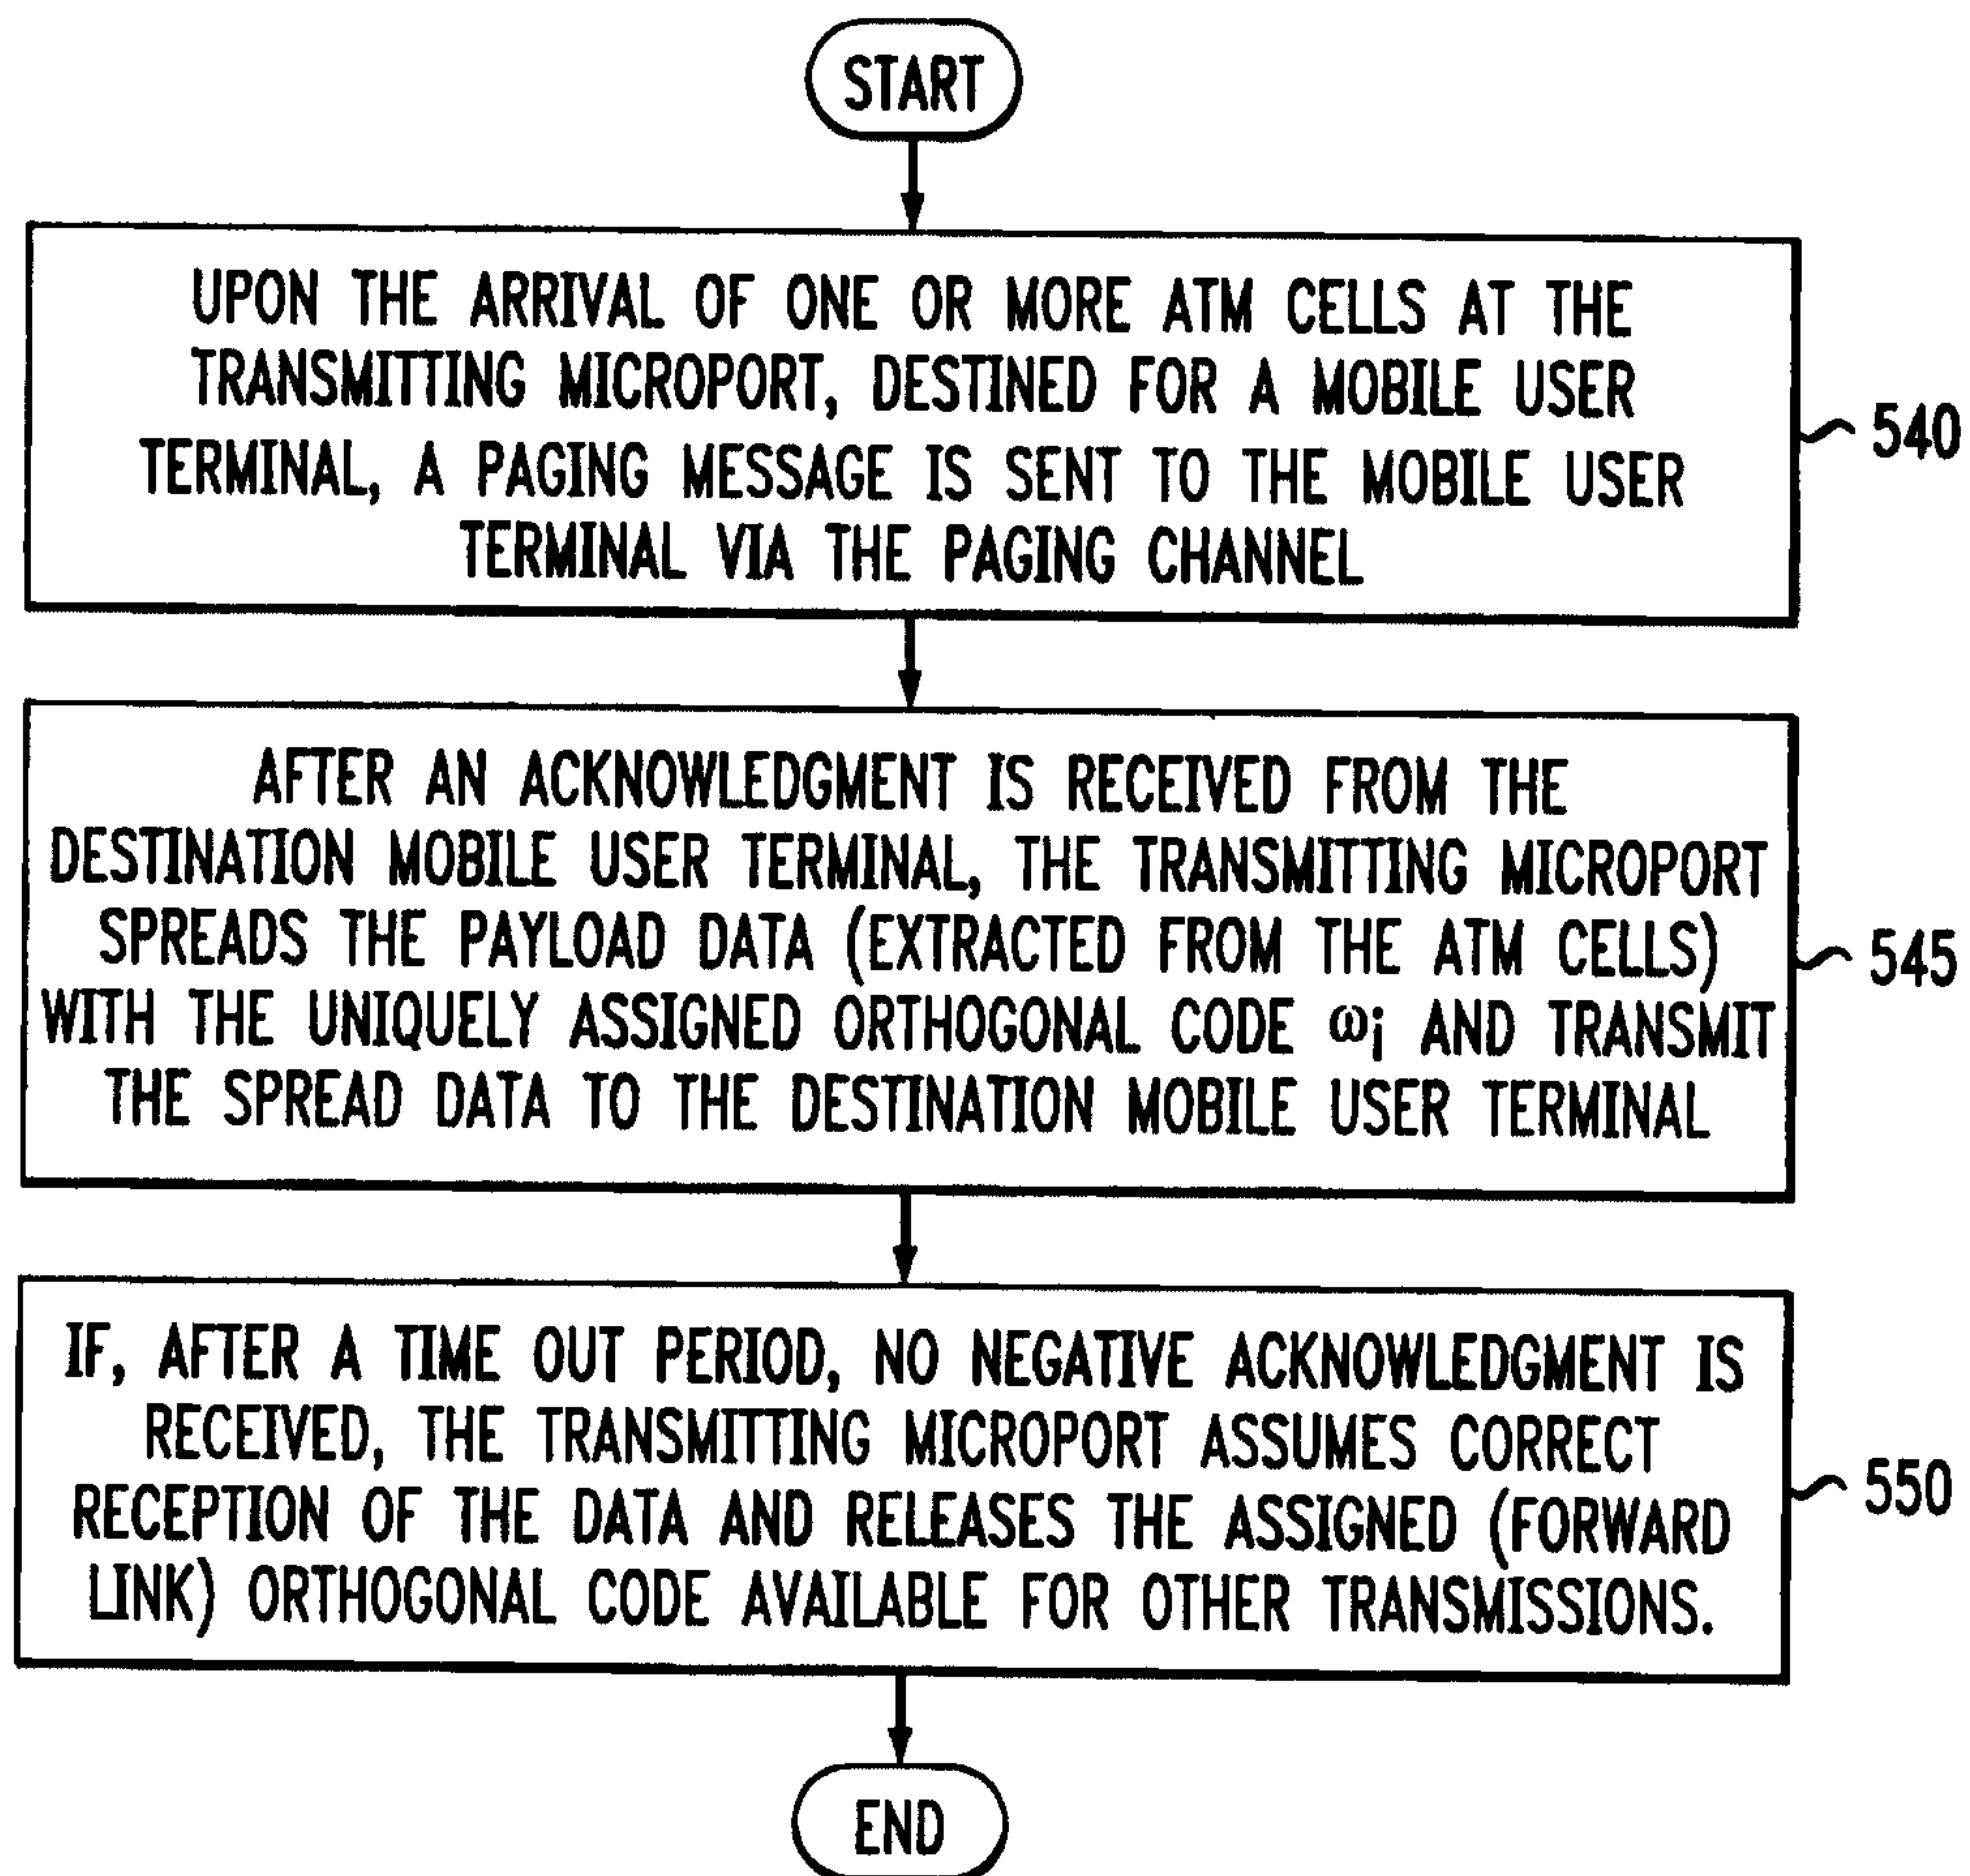


8/15

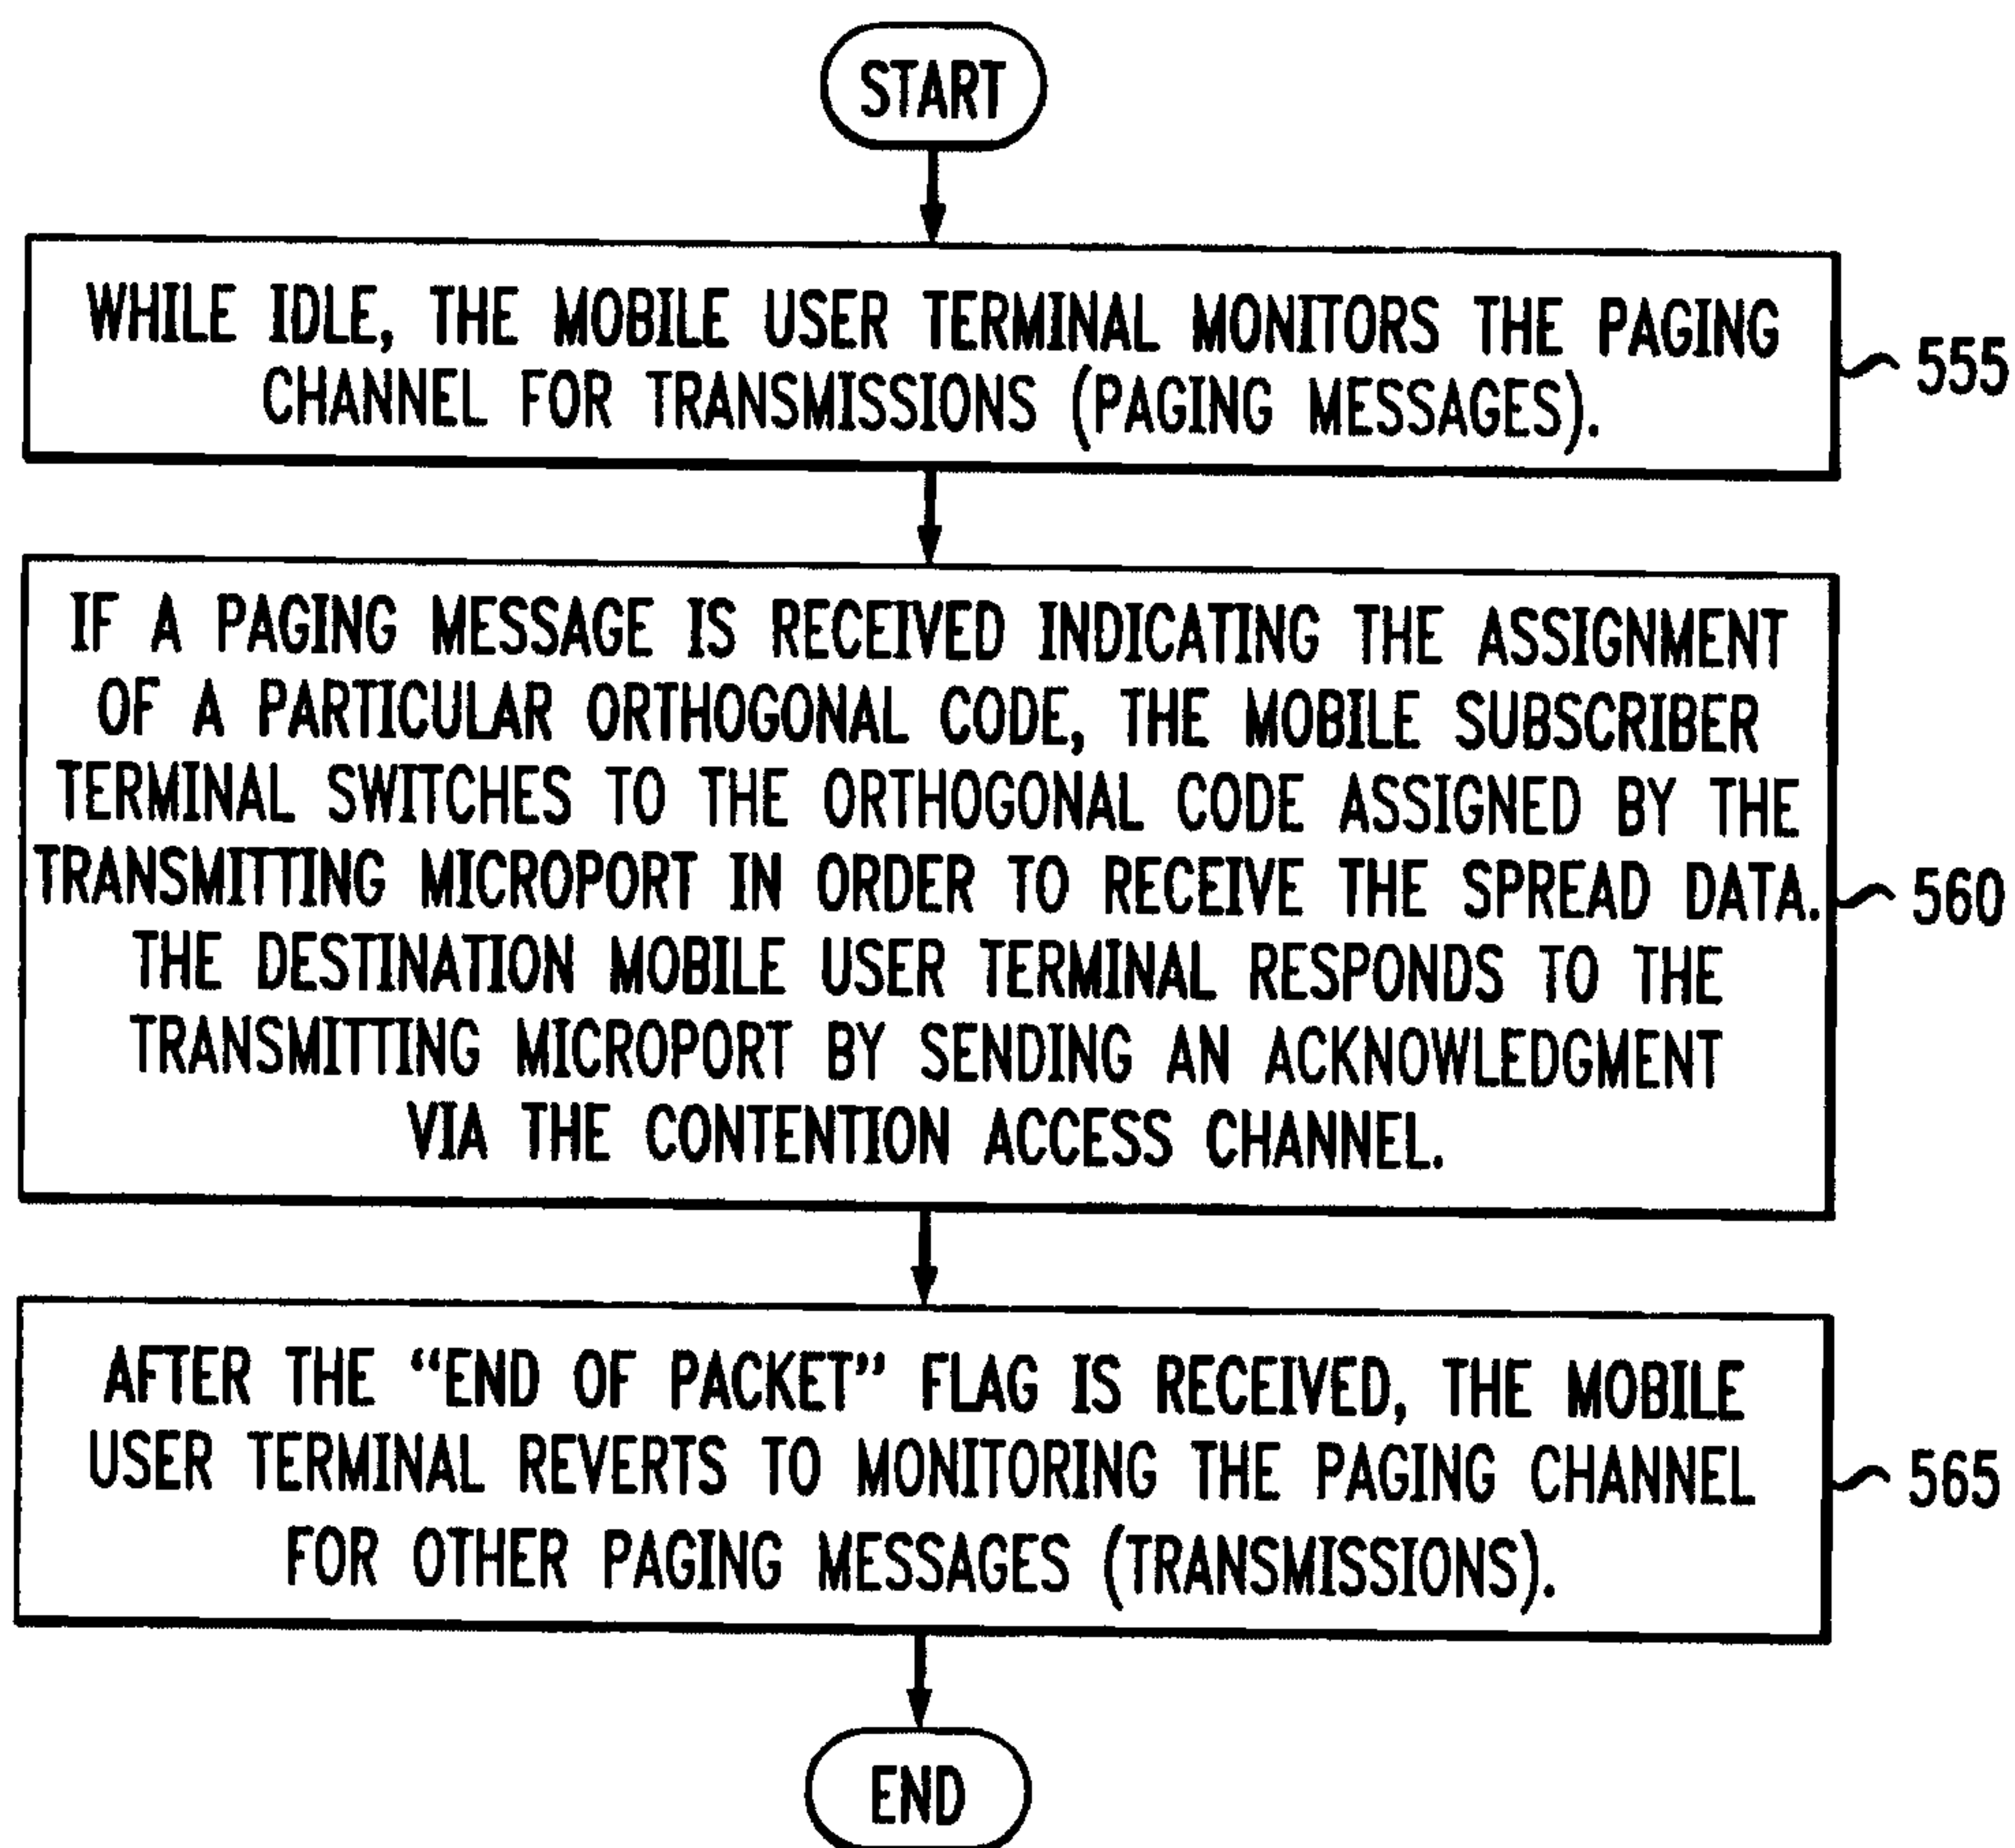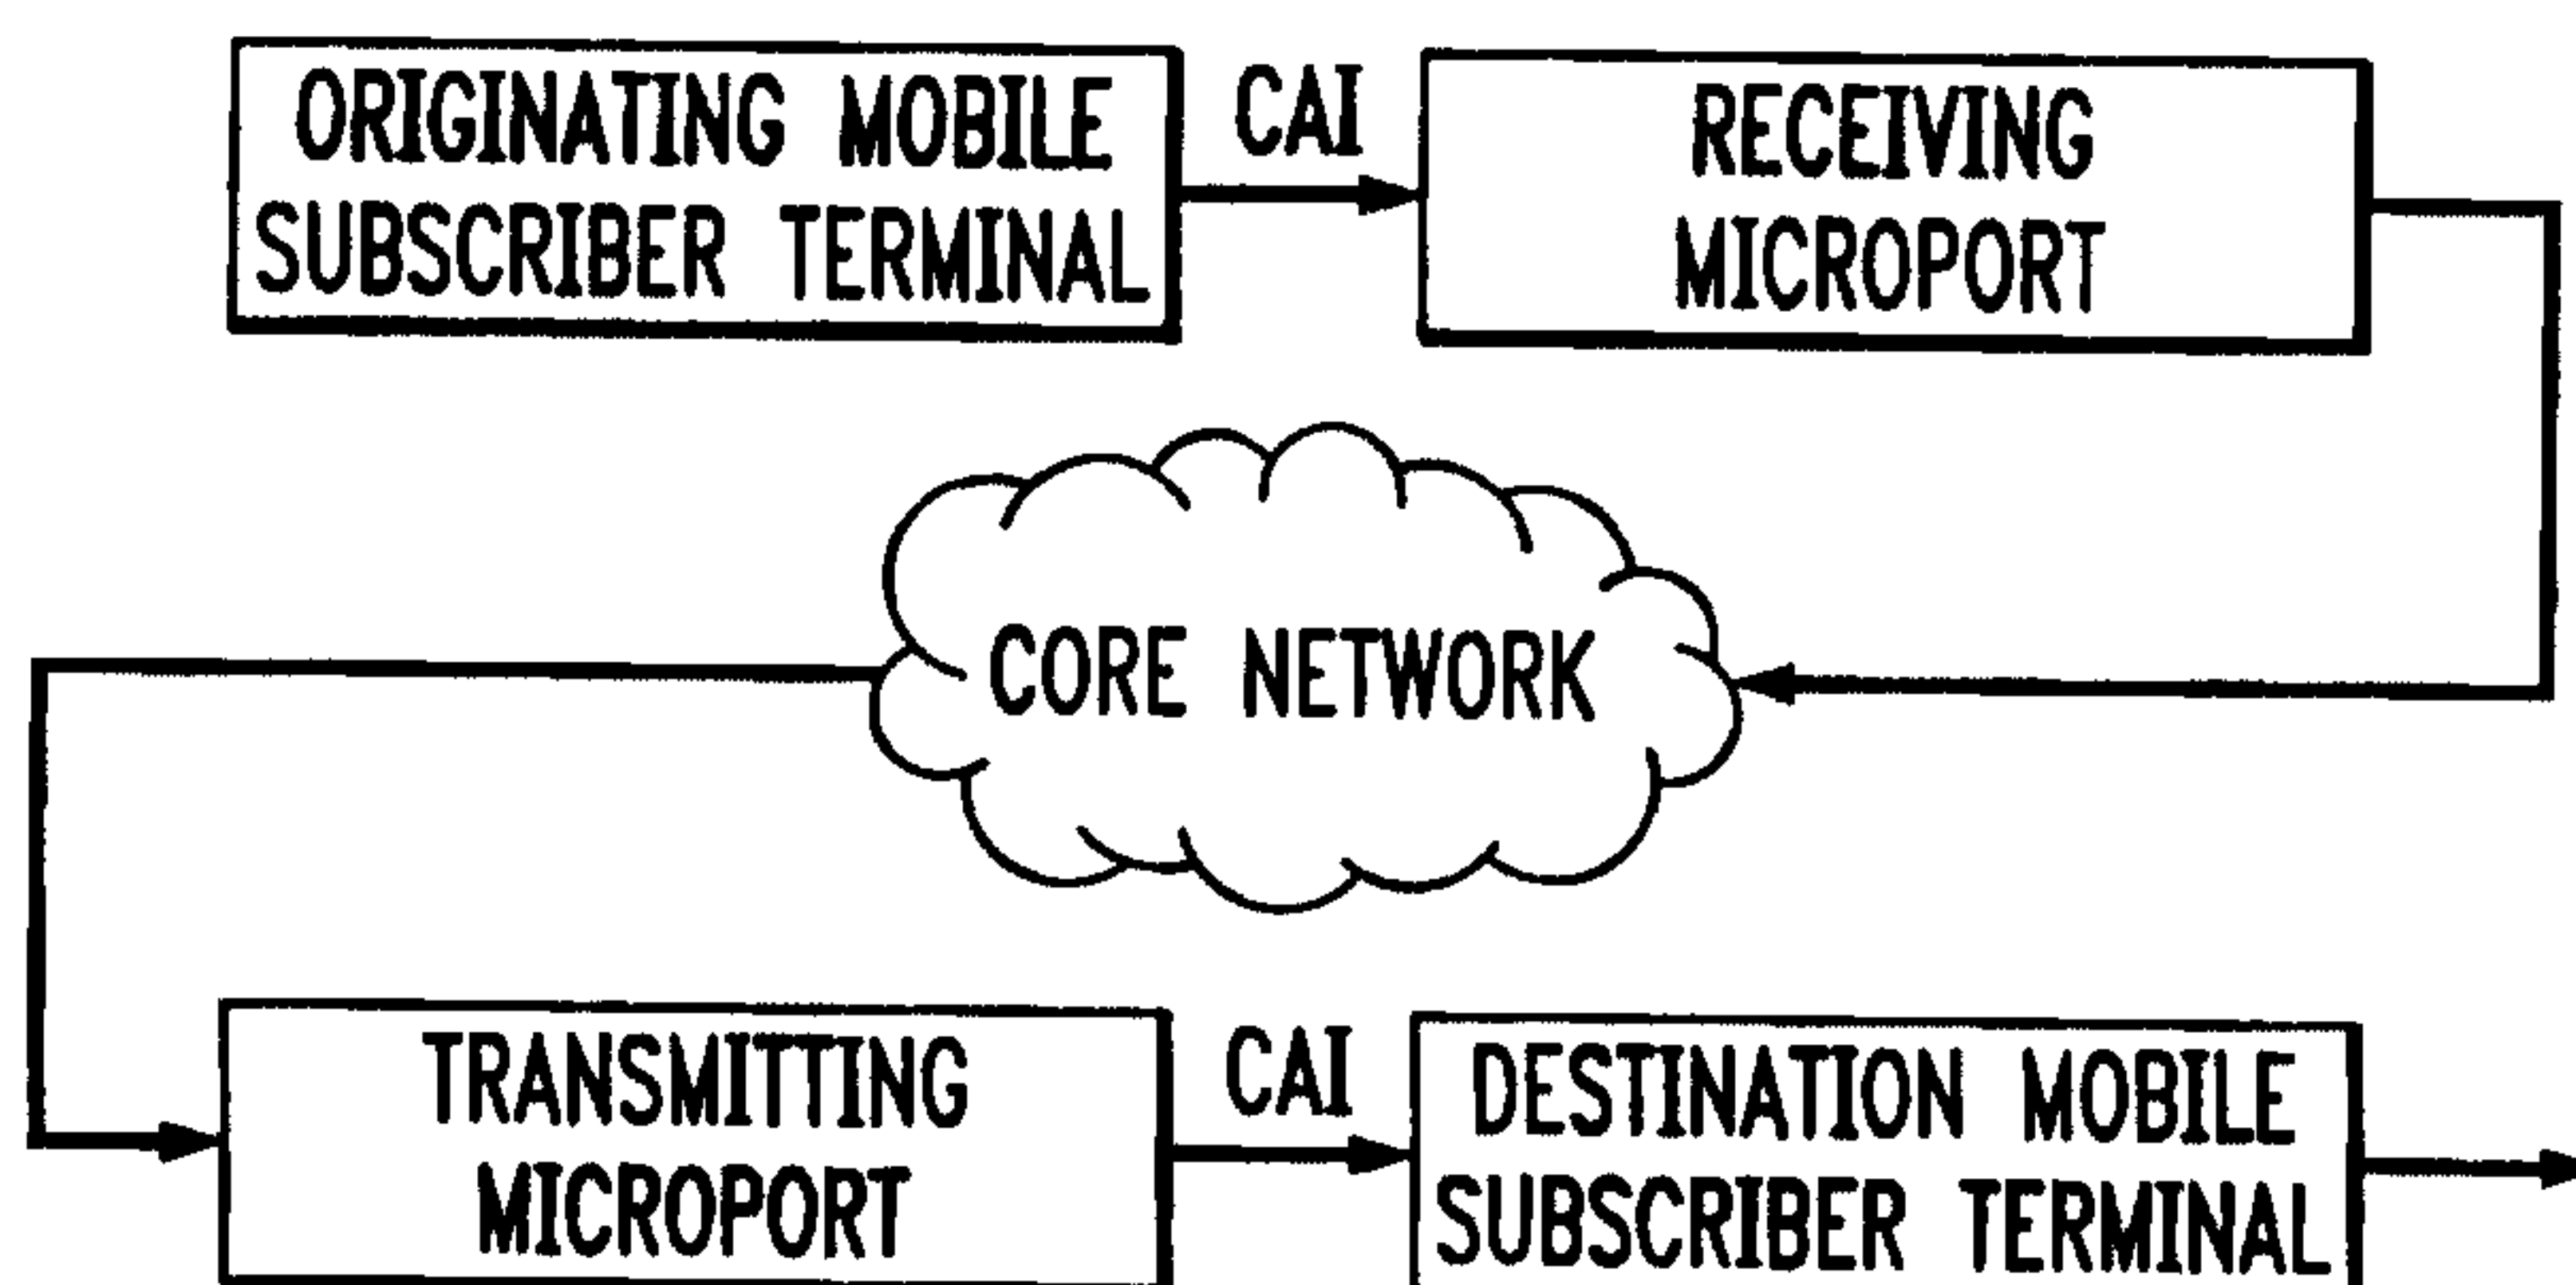FIG. 5d*FIG. 6*


9/15

FIG. 7a

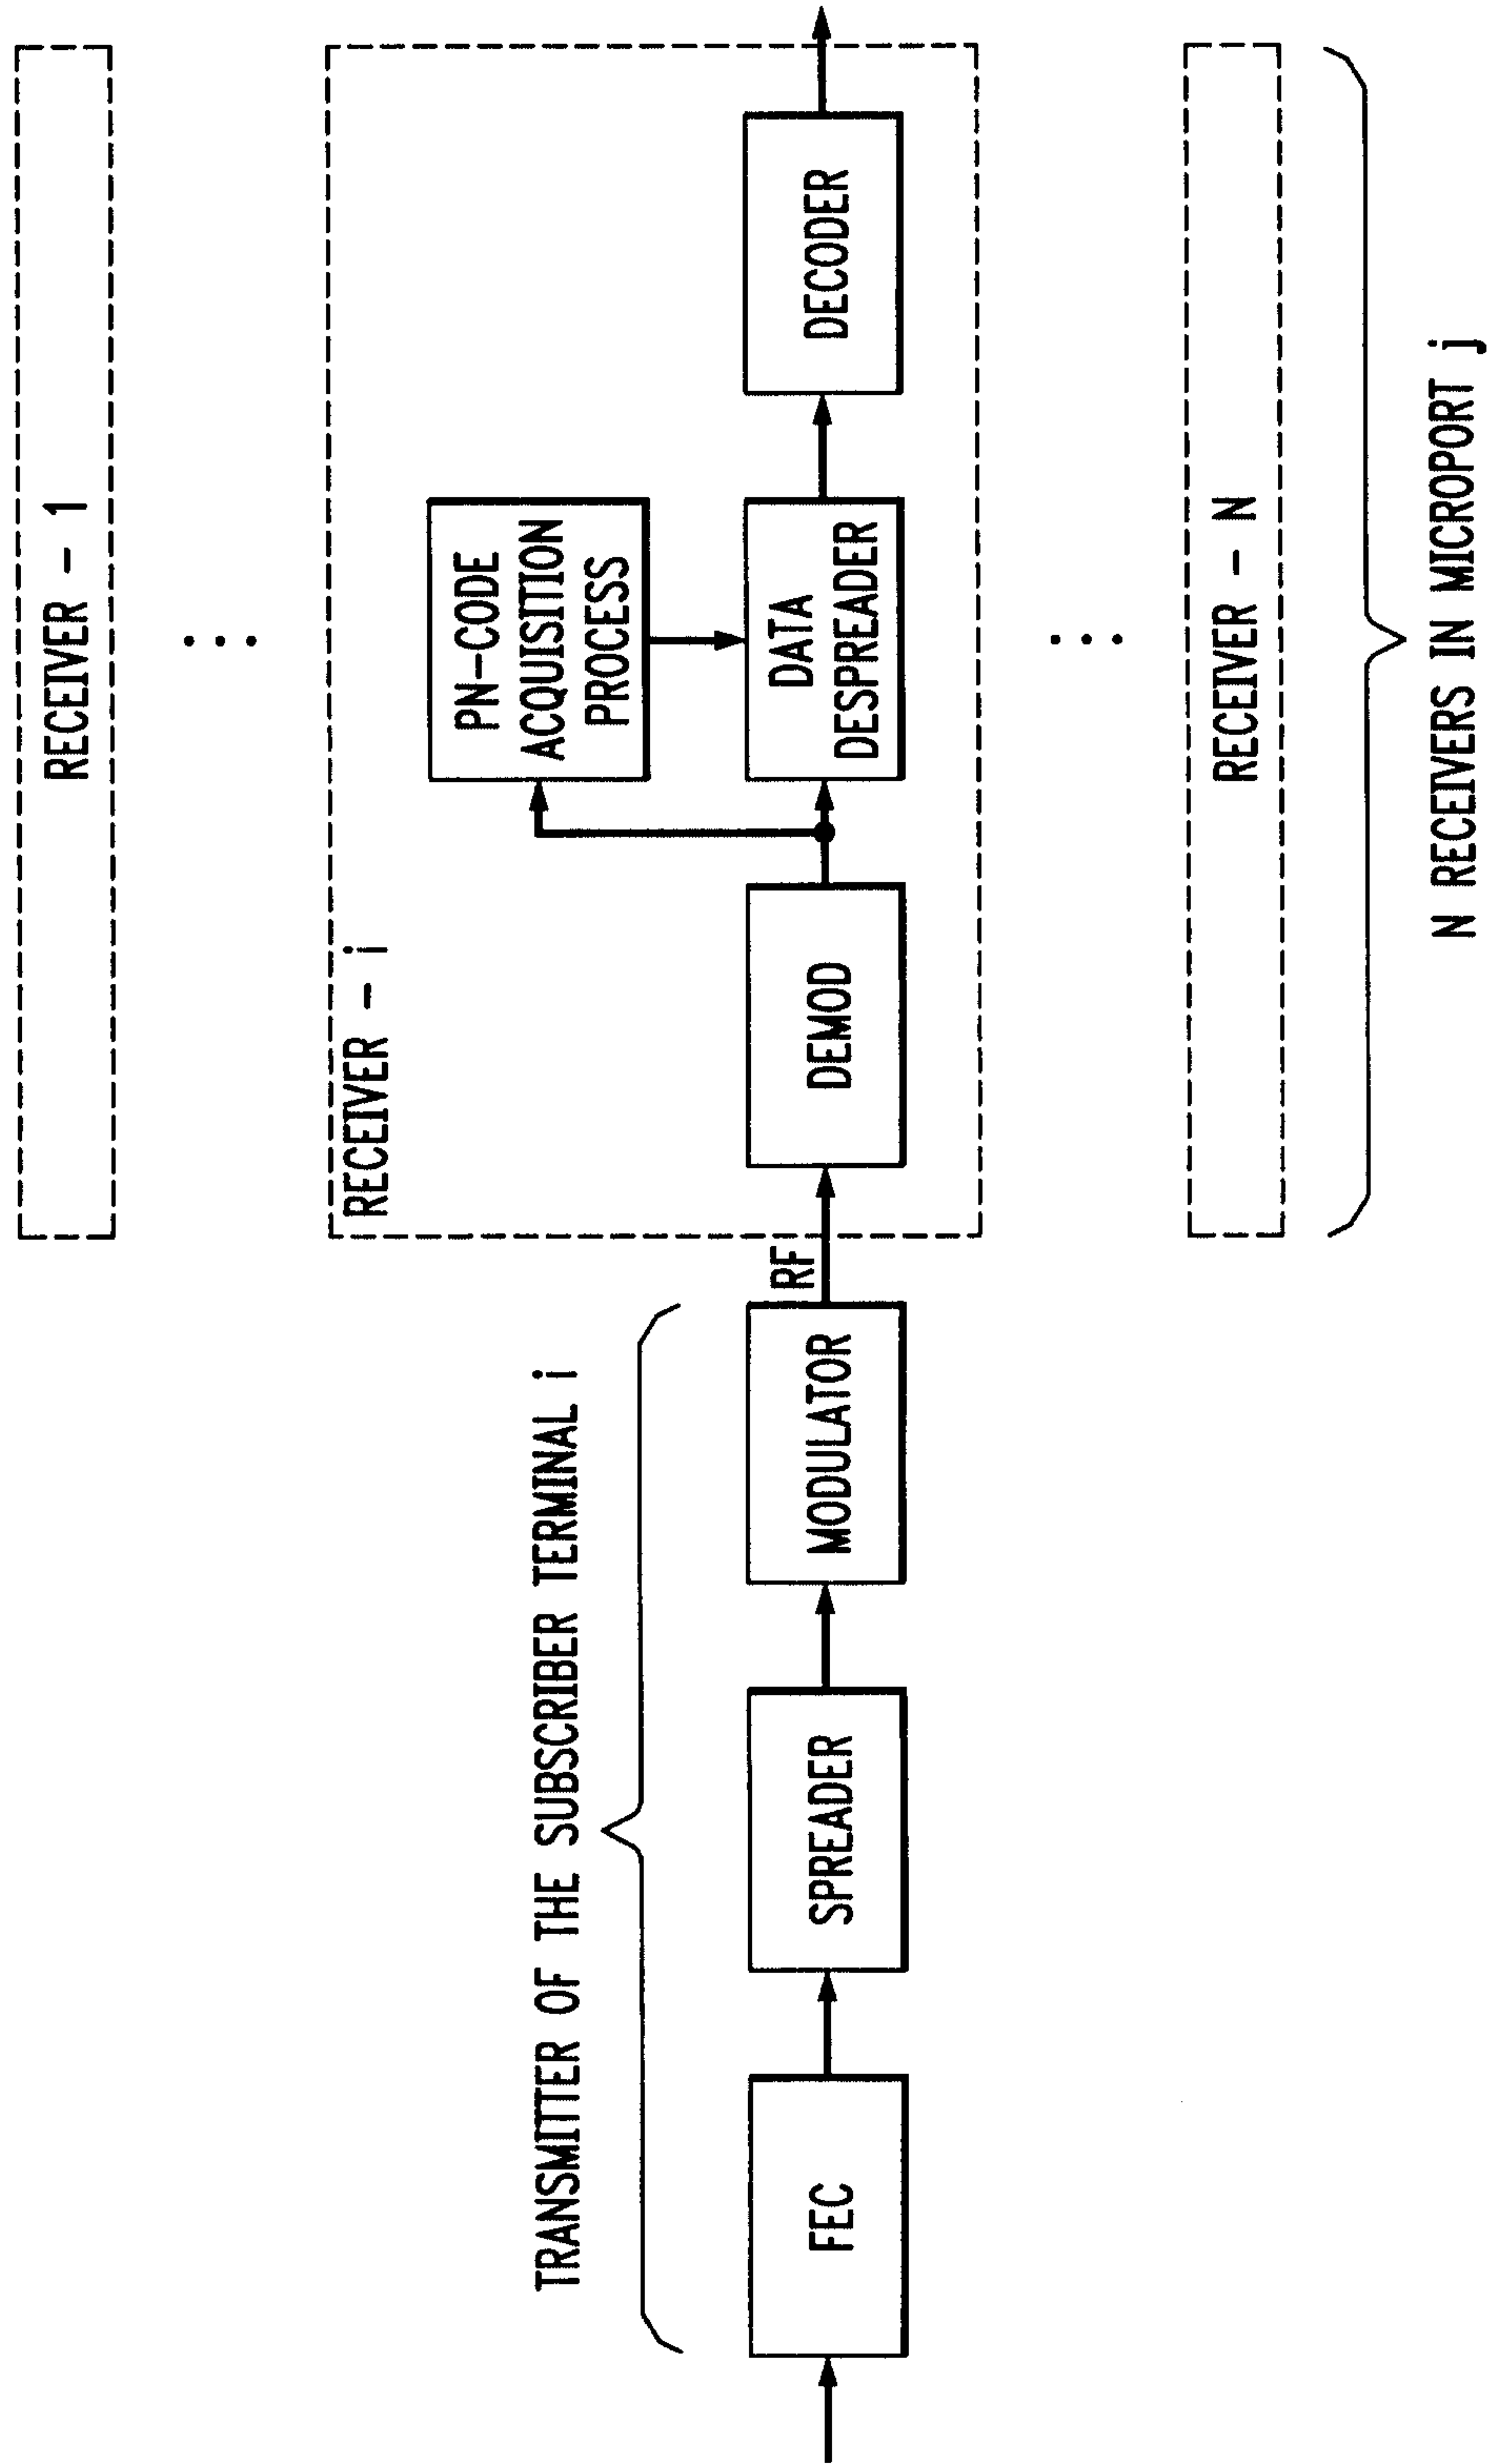


10/15

FIG. 7b

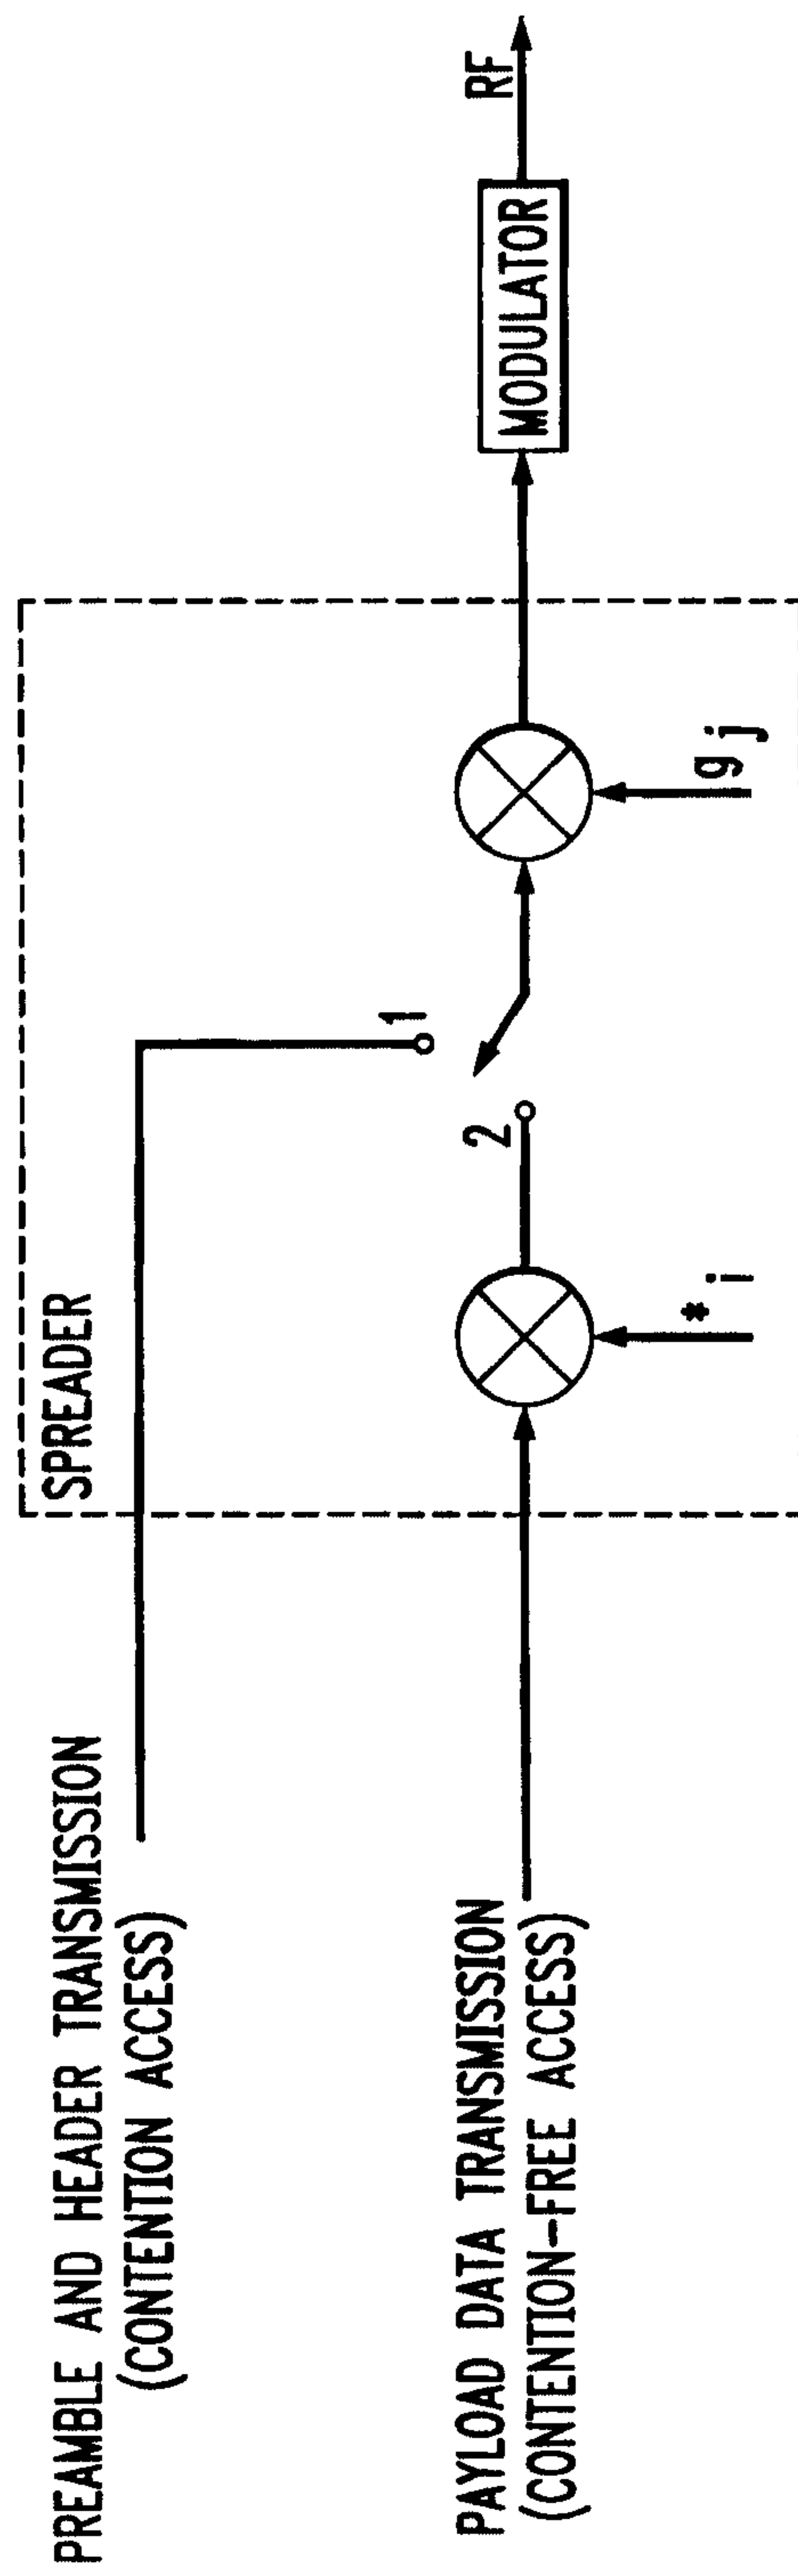

11/15

FIG. 7c

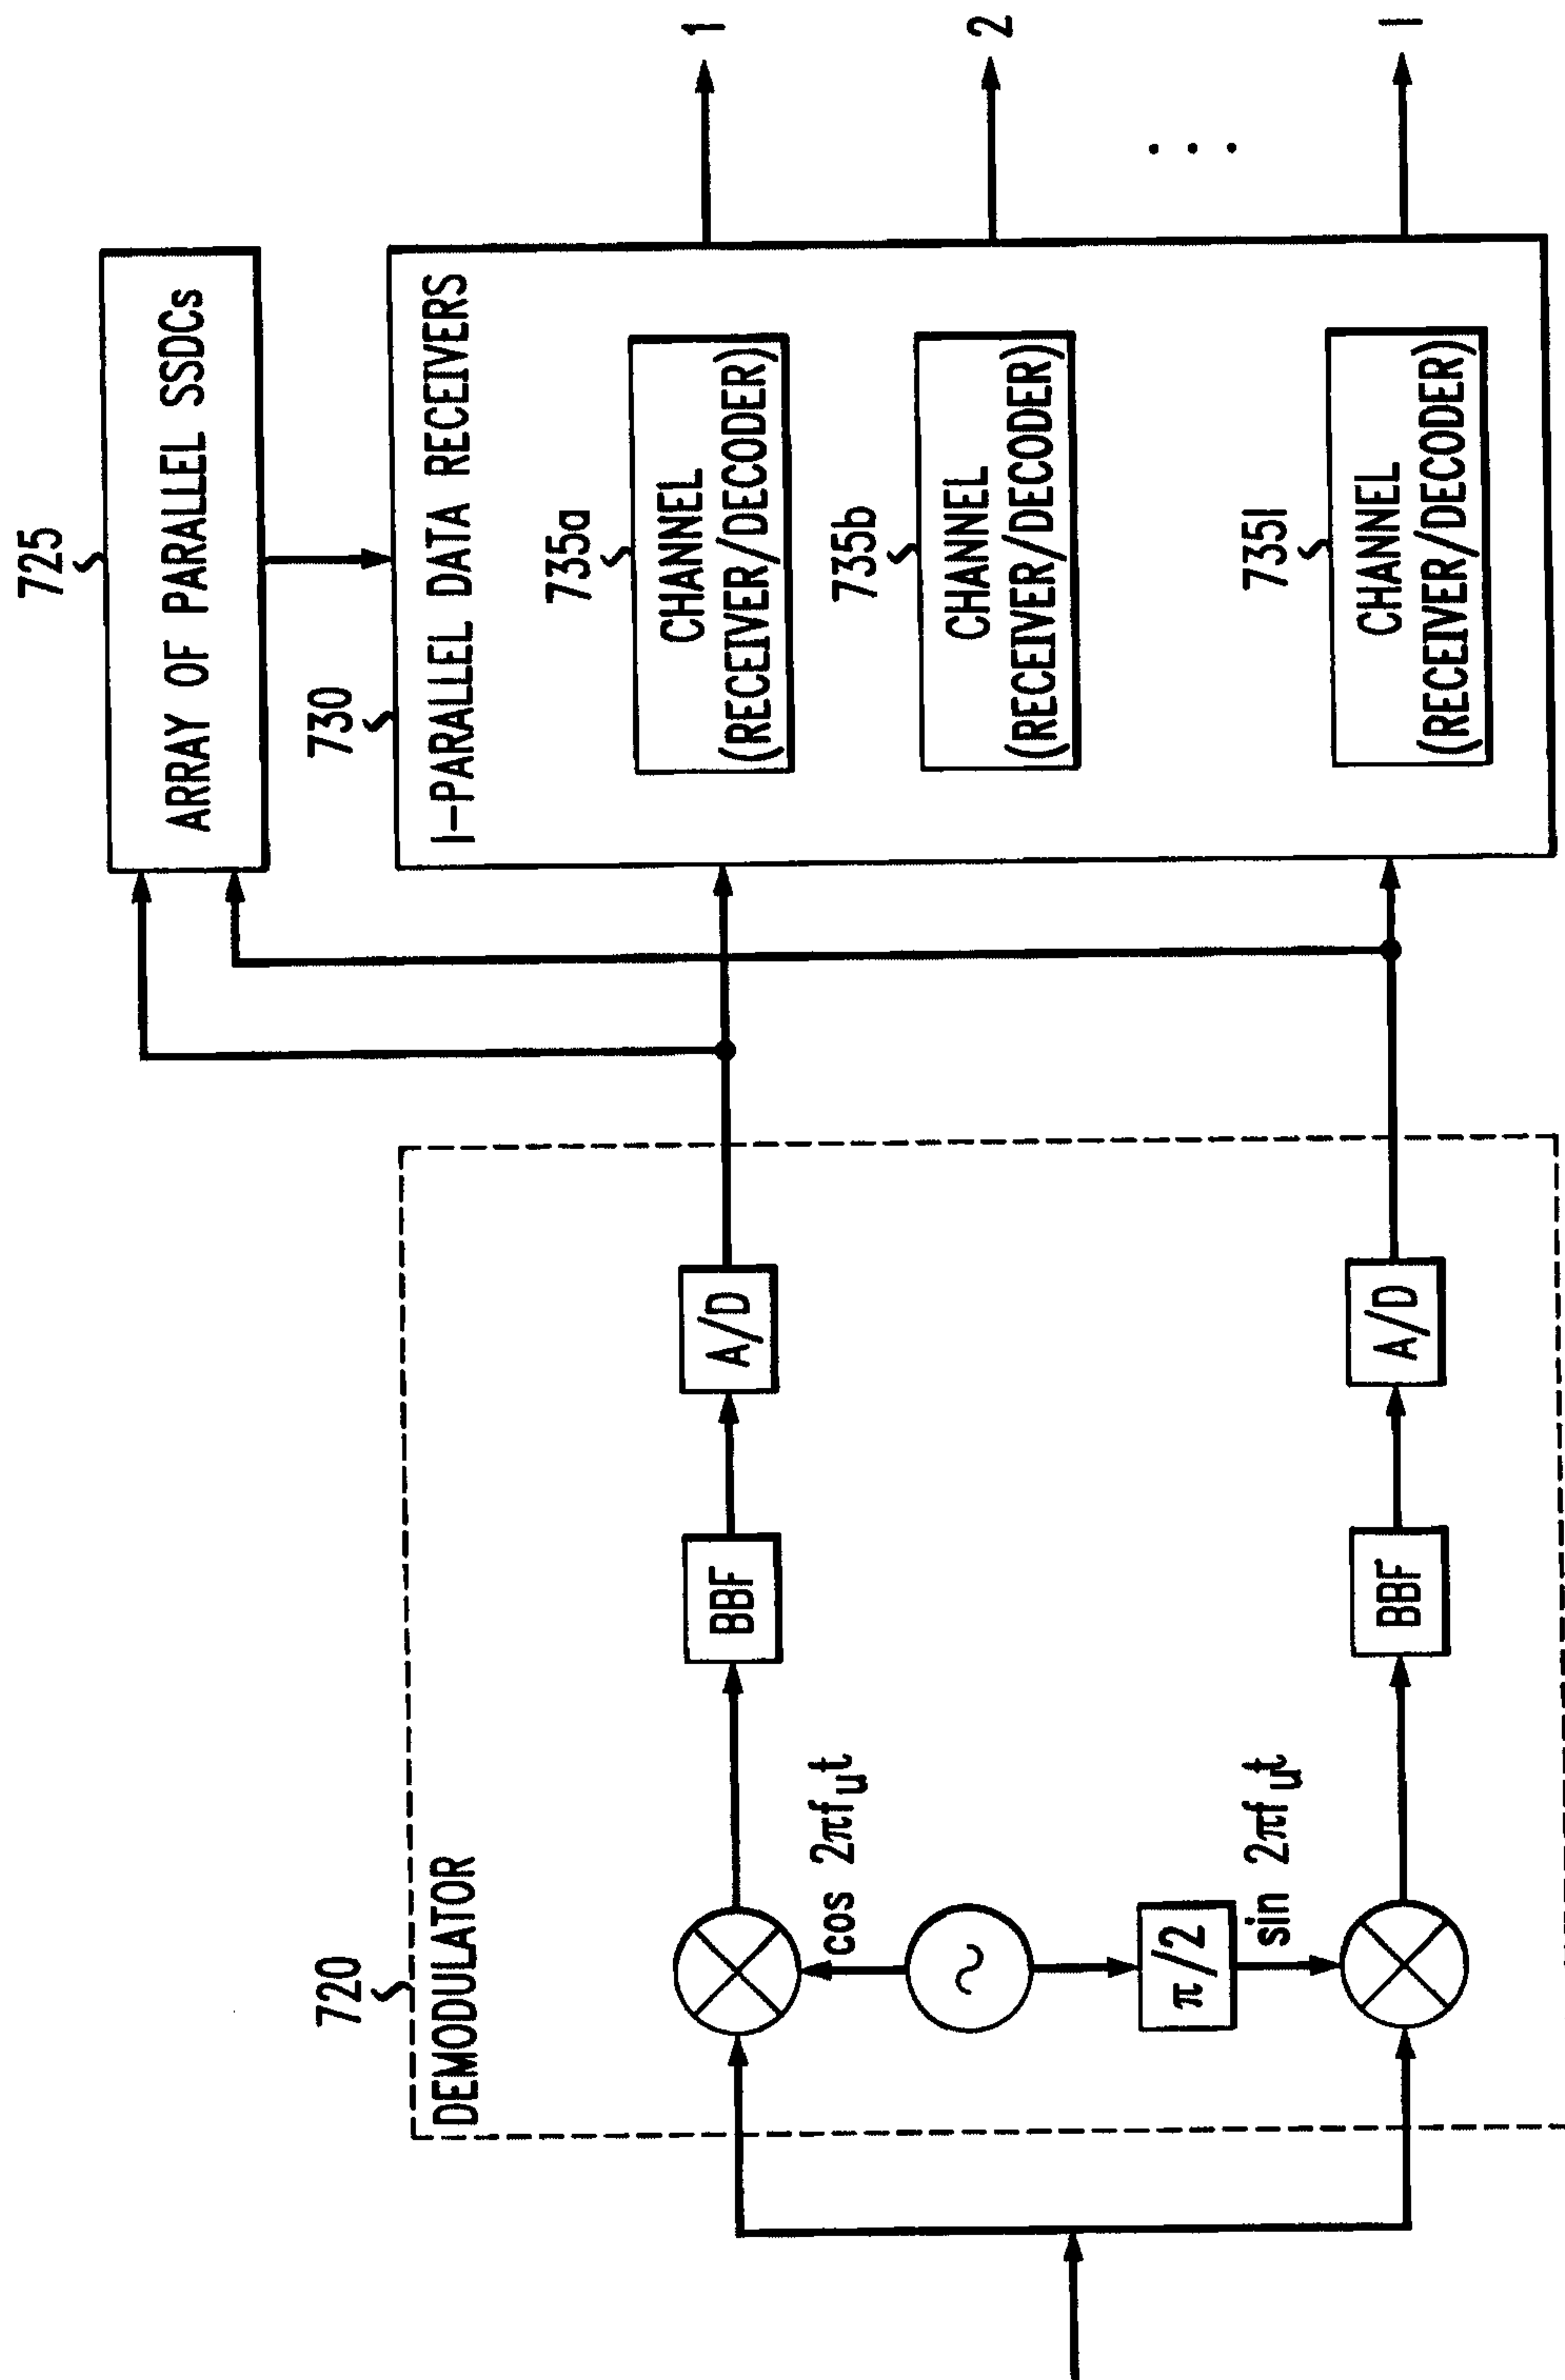

12/15

FIG. 7d




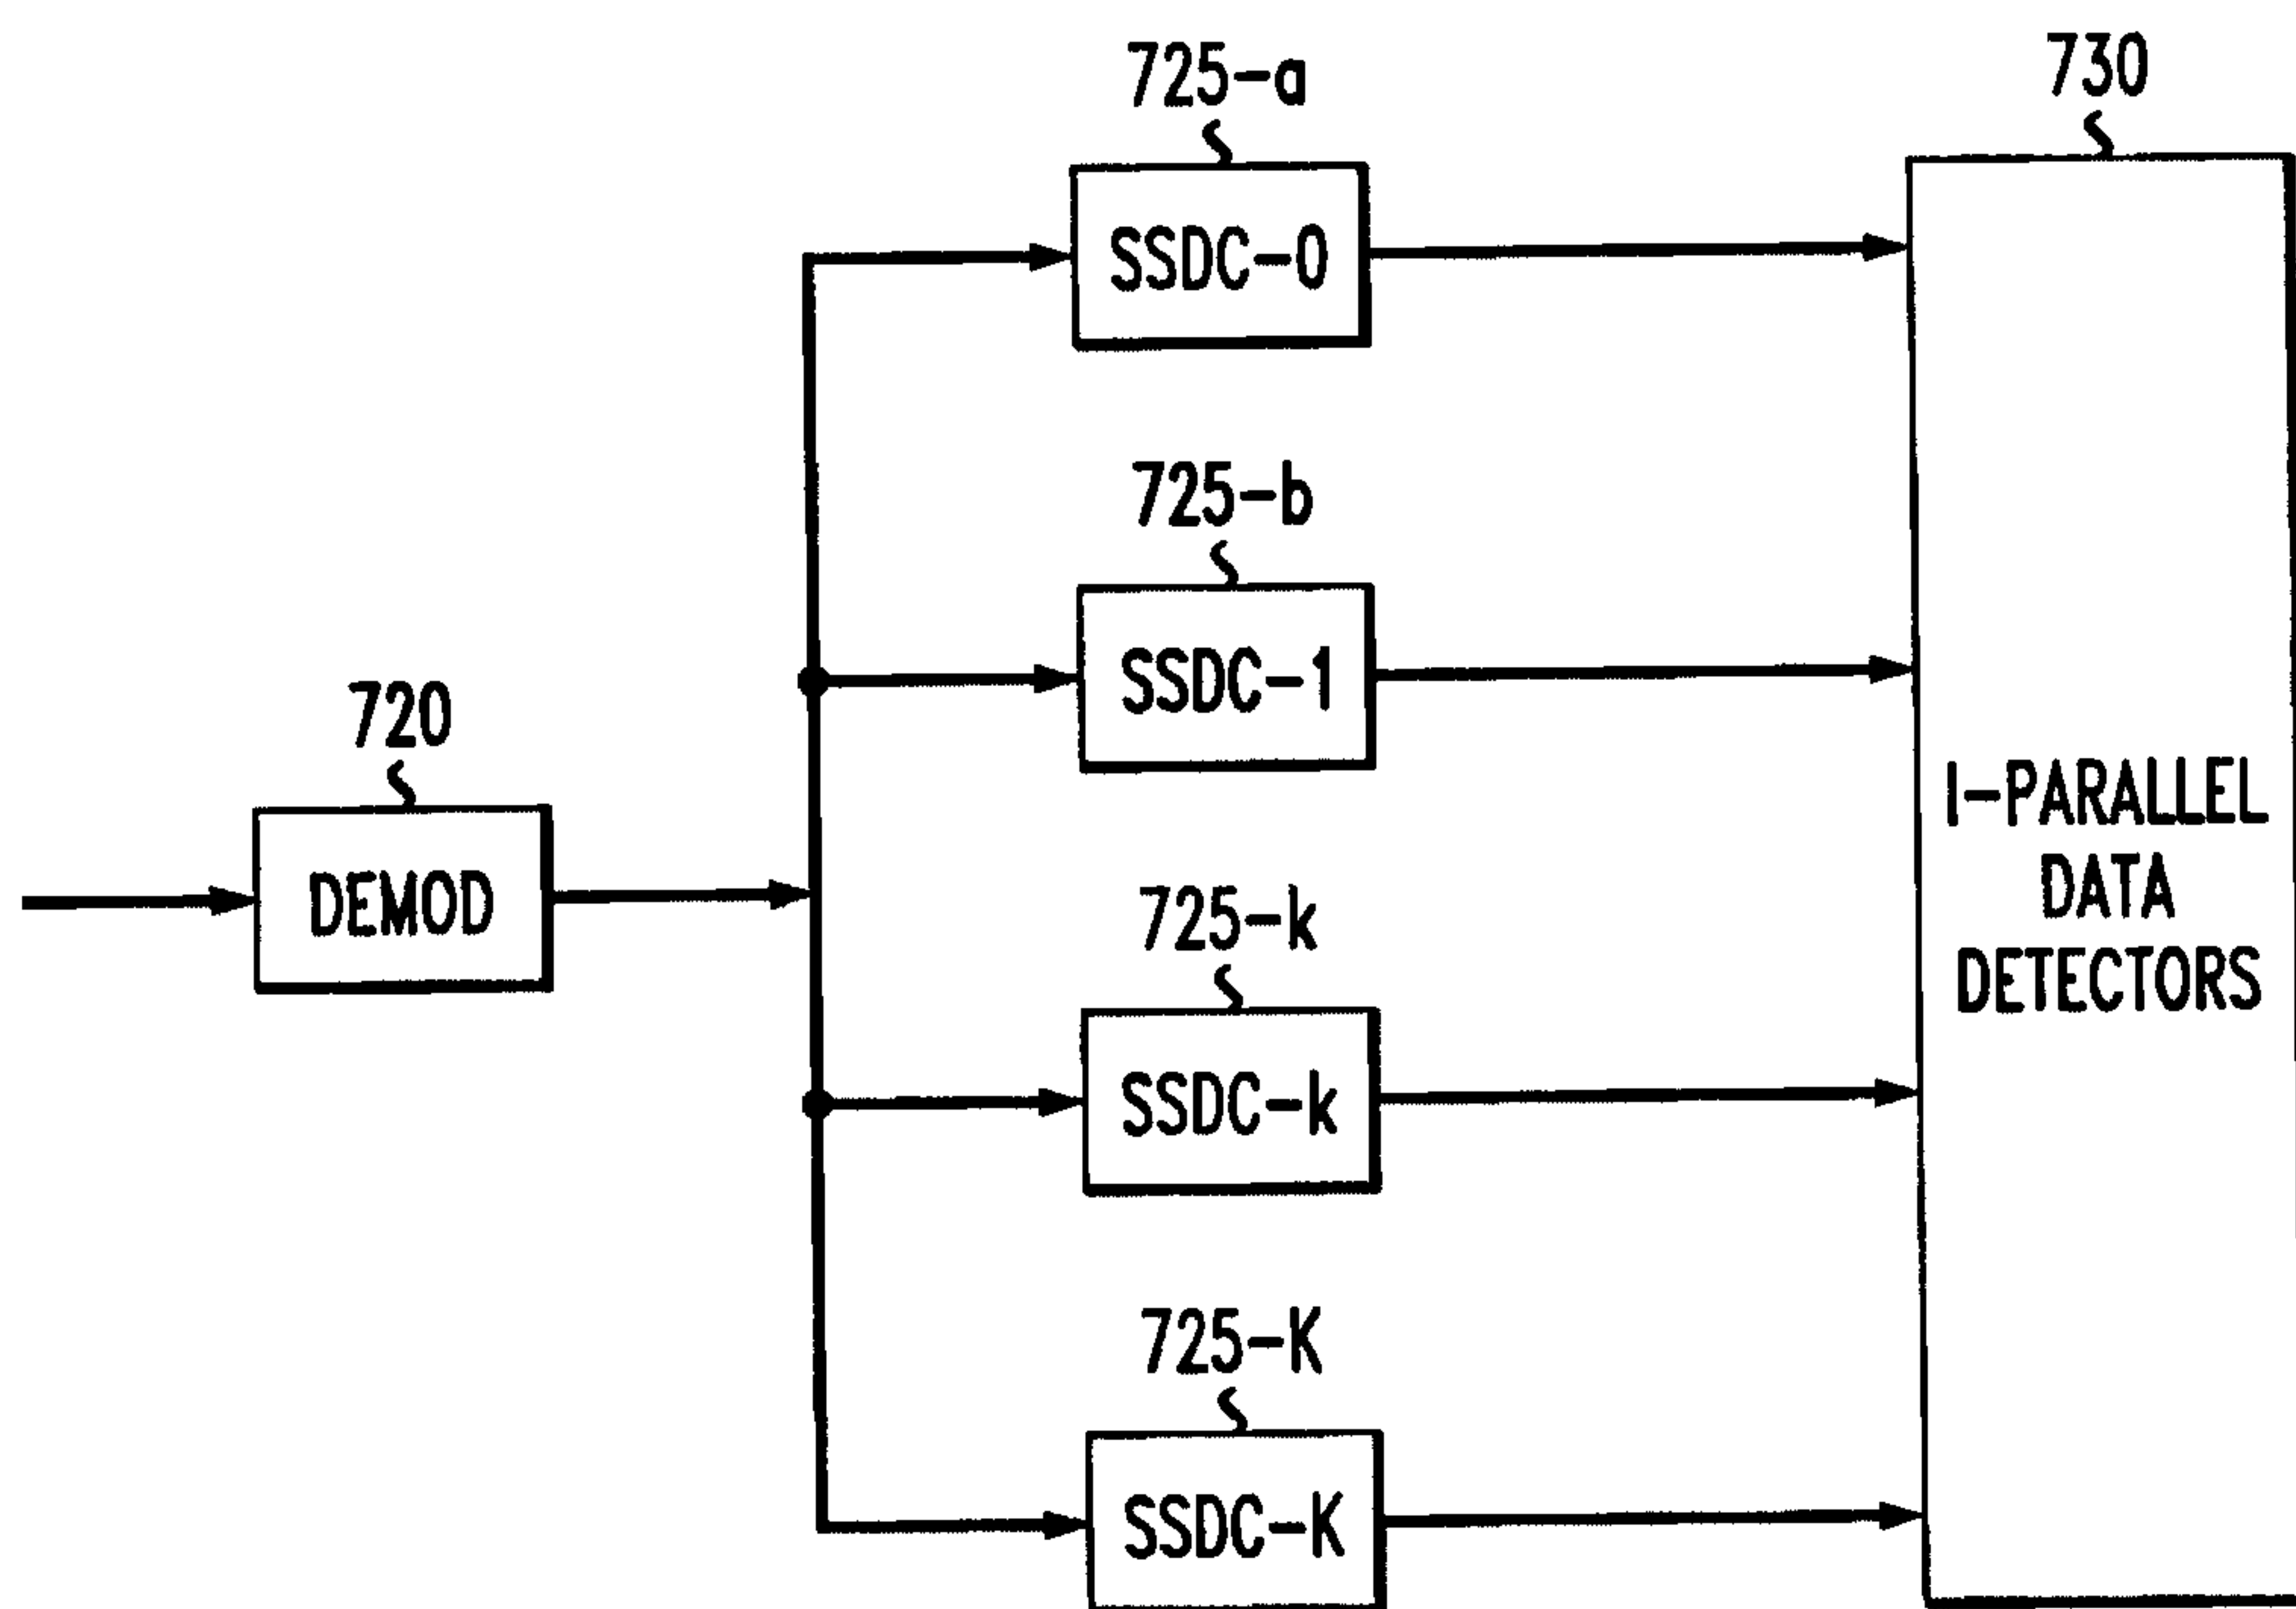



FIG. 7e

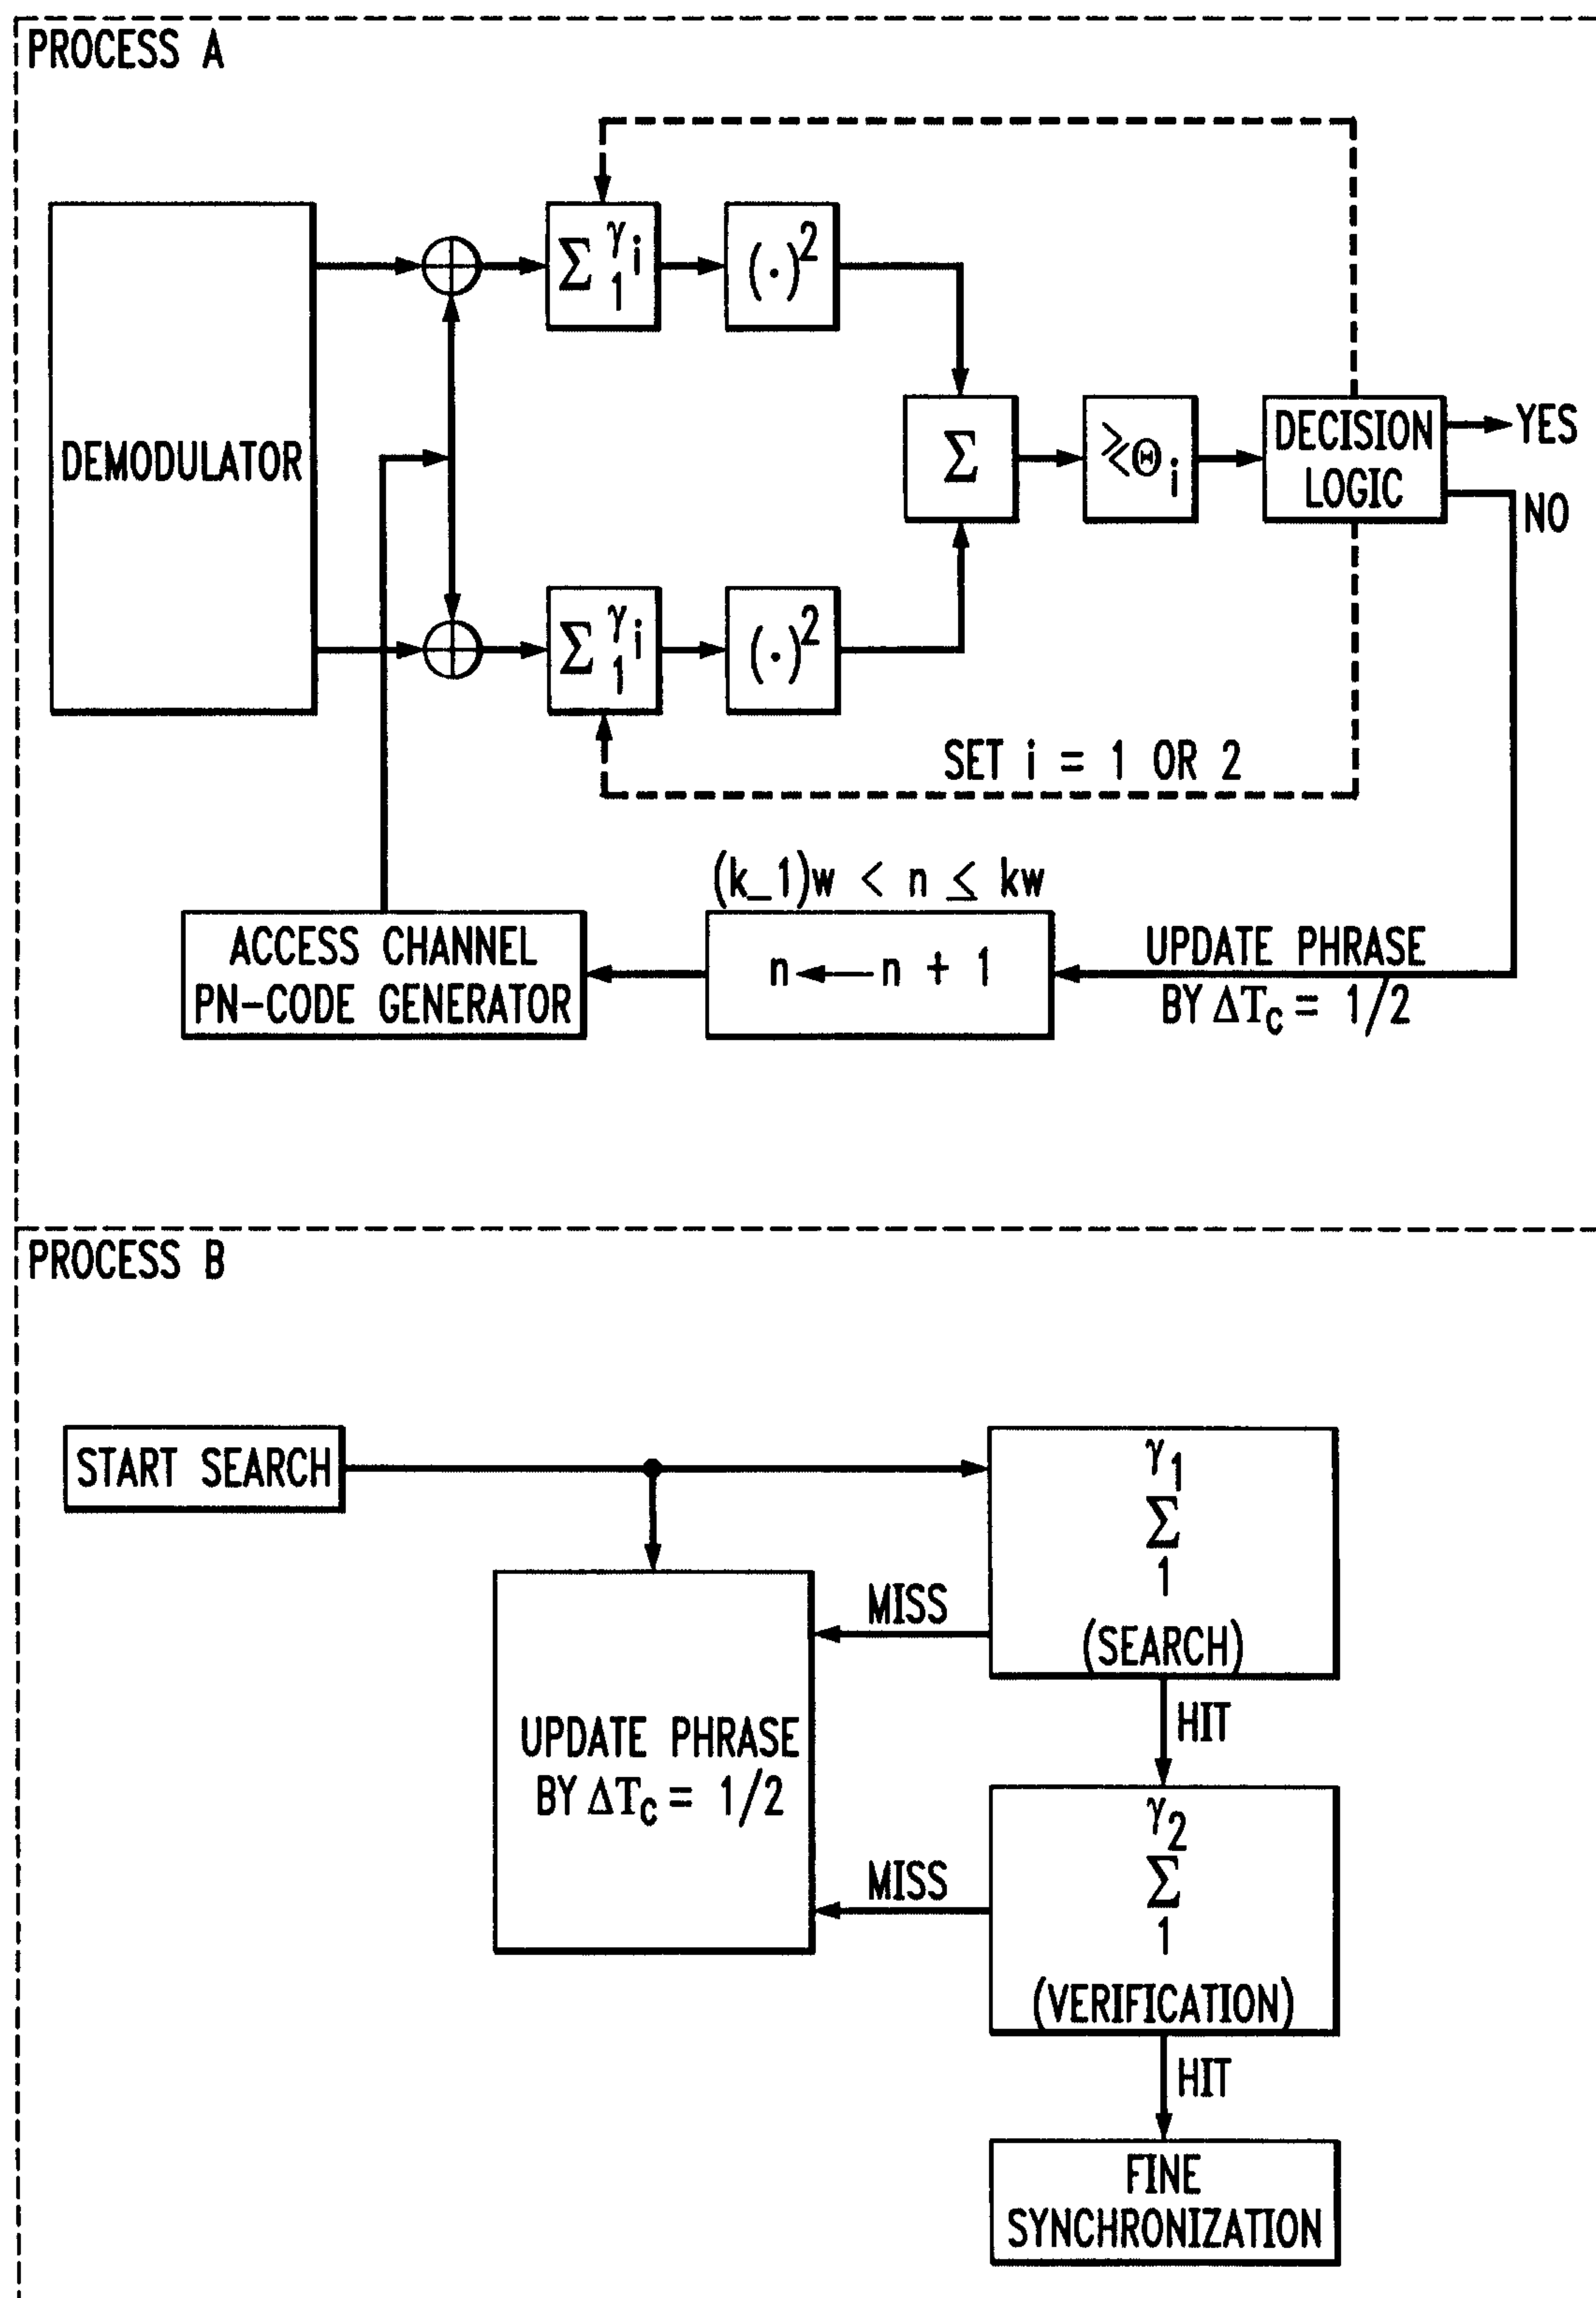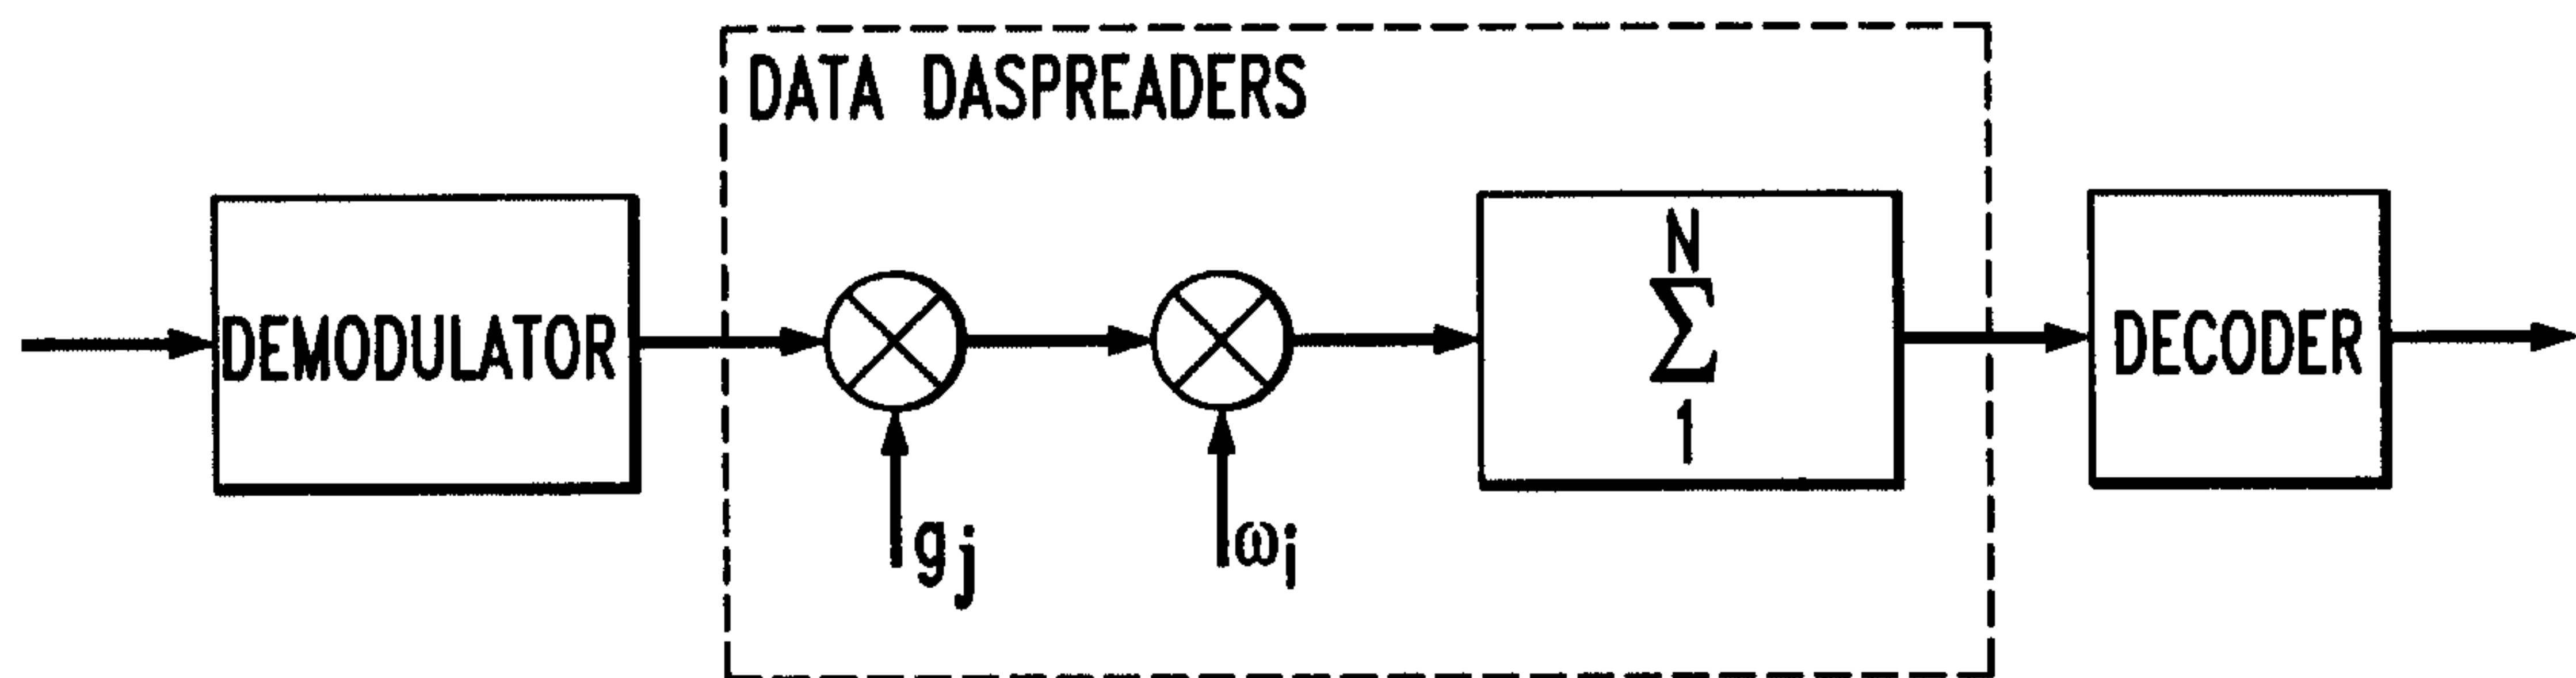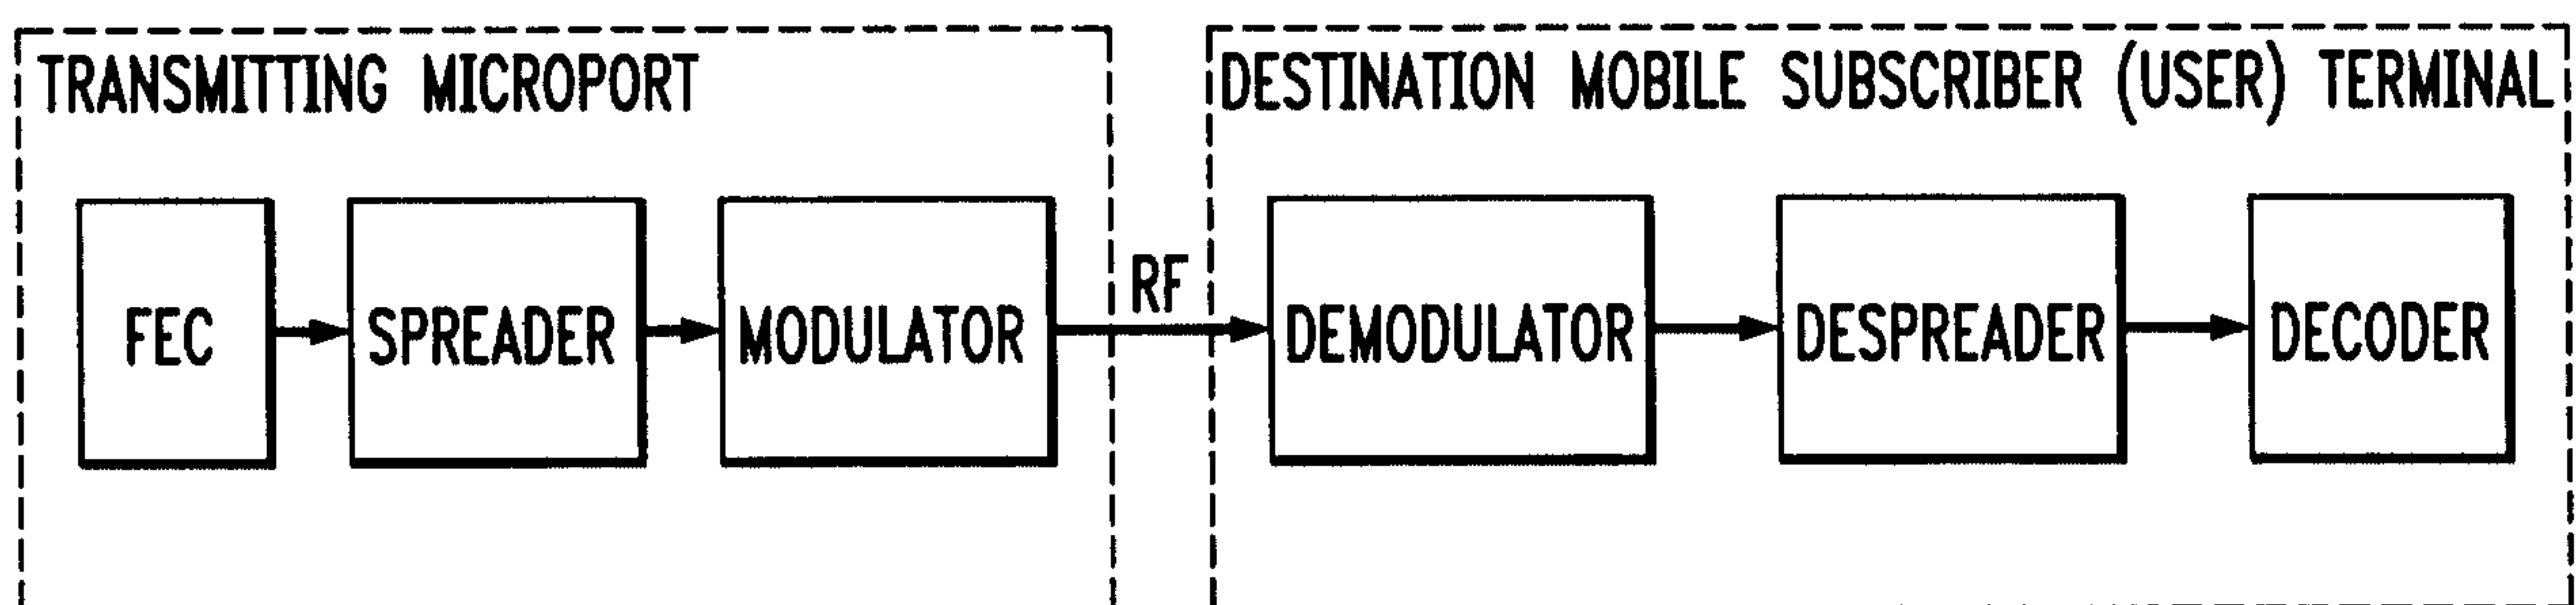

14/15

FIG. 7f*FIG. 8a*

15/15

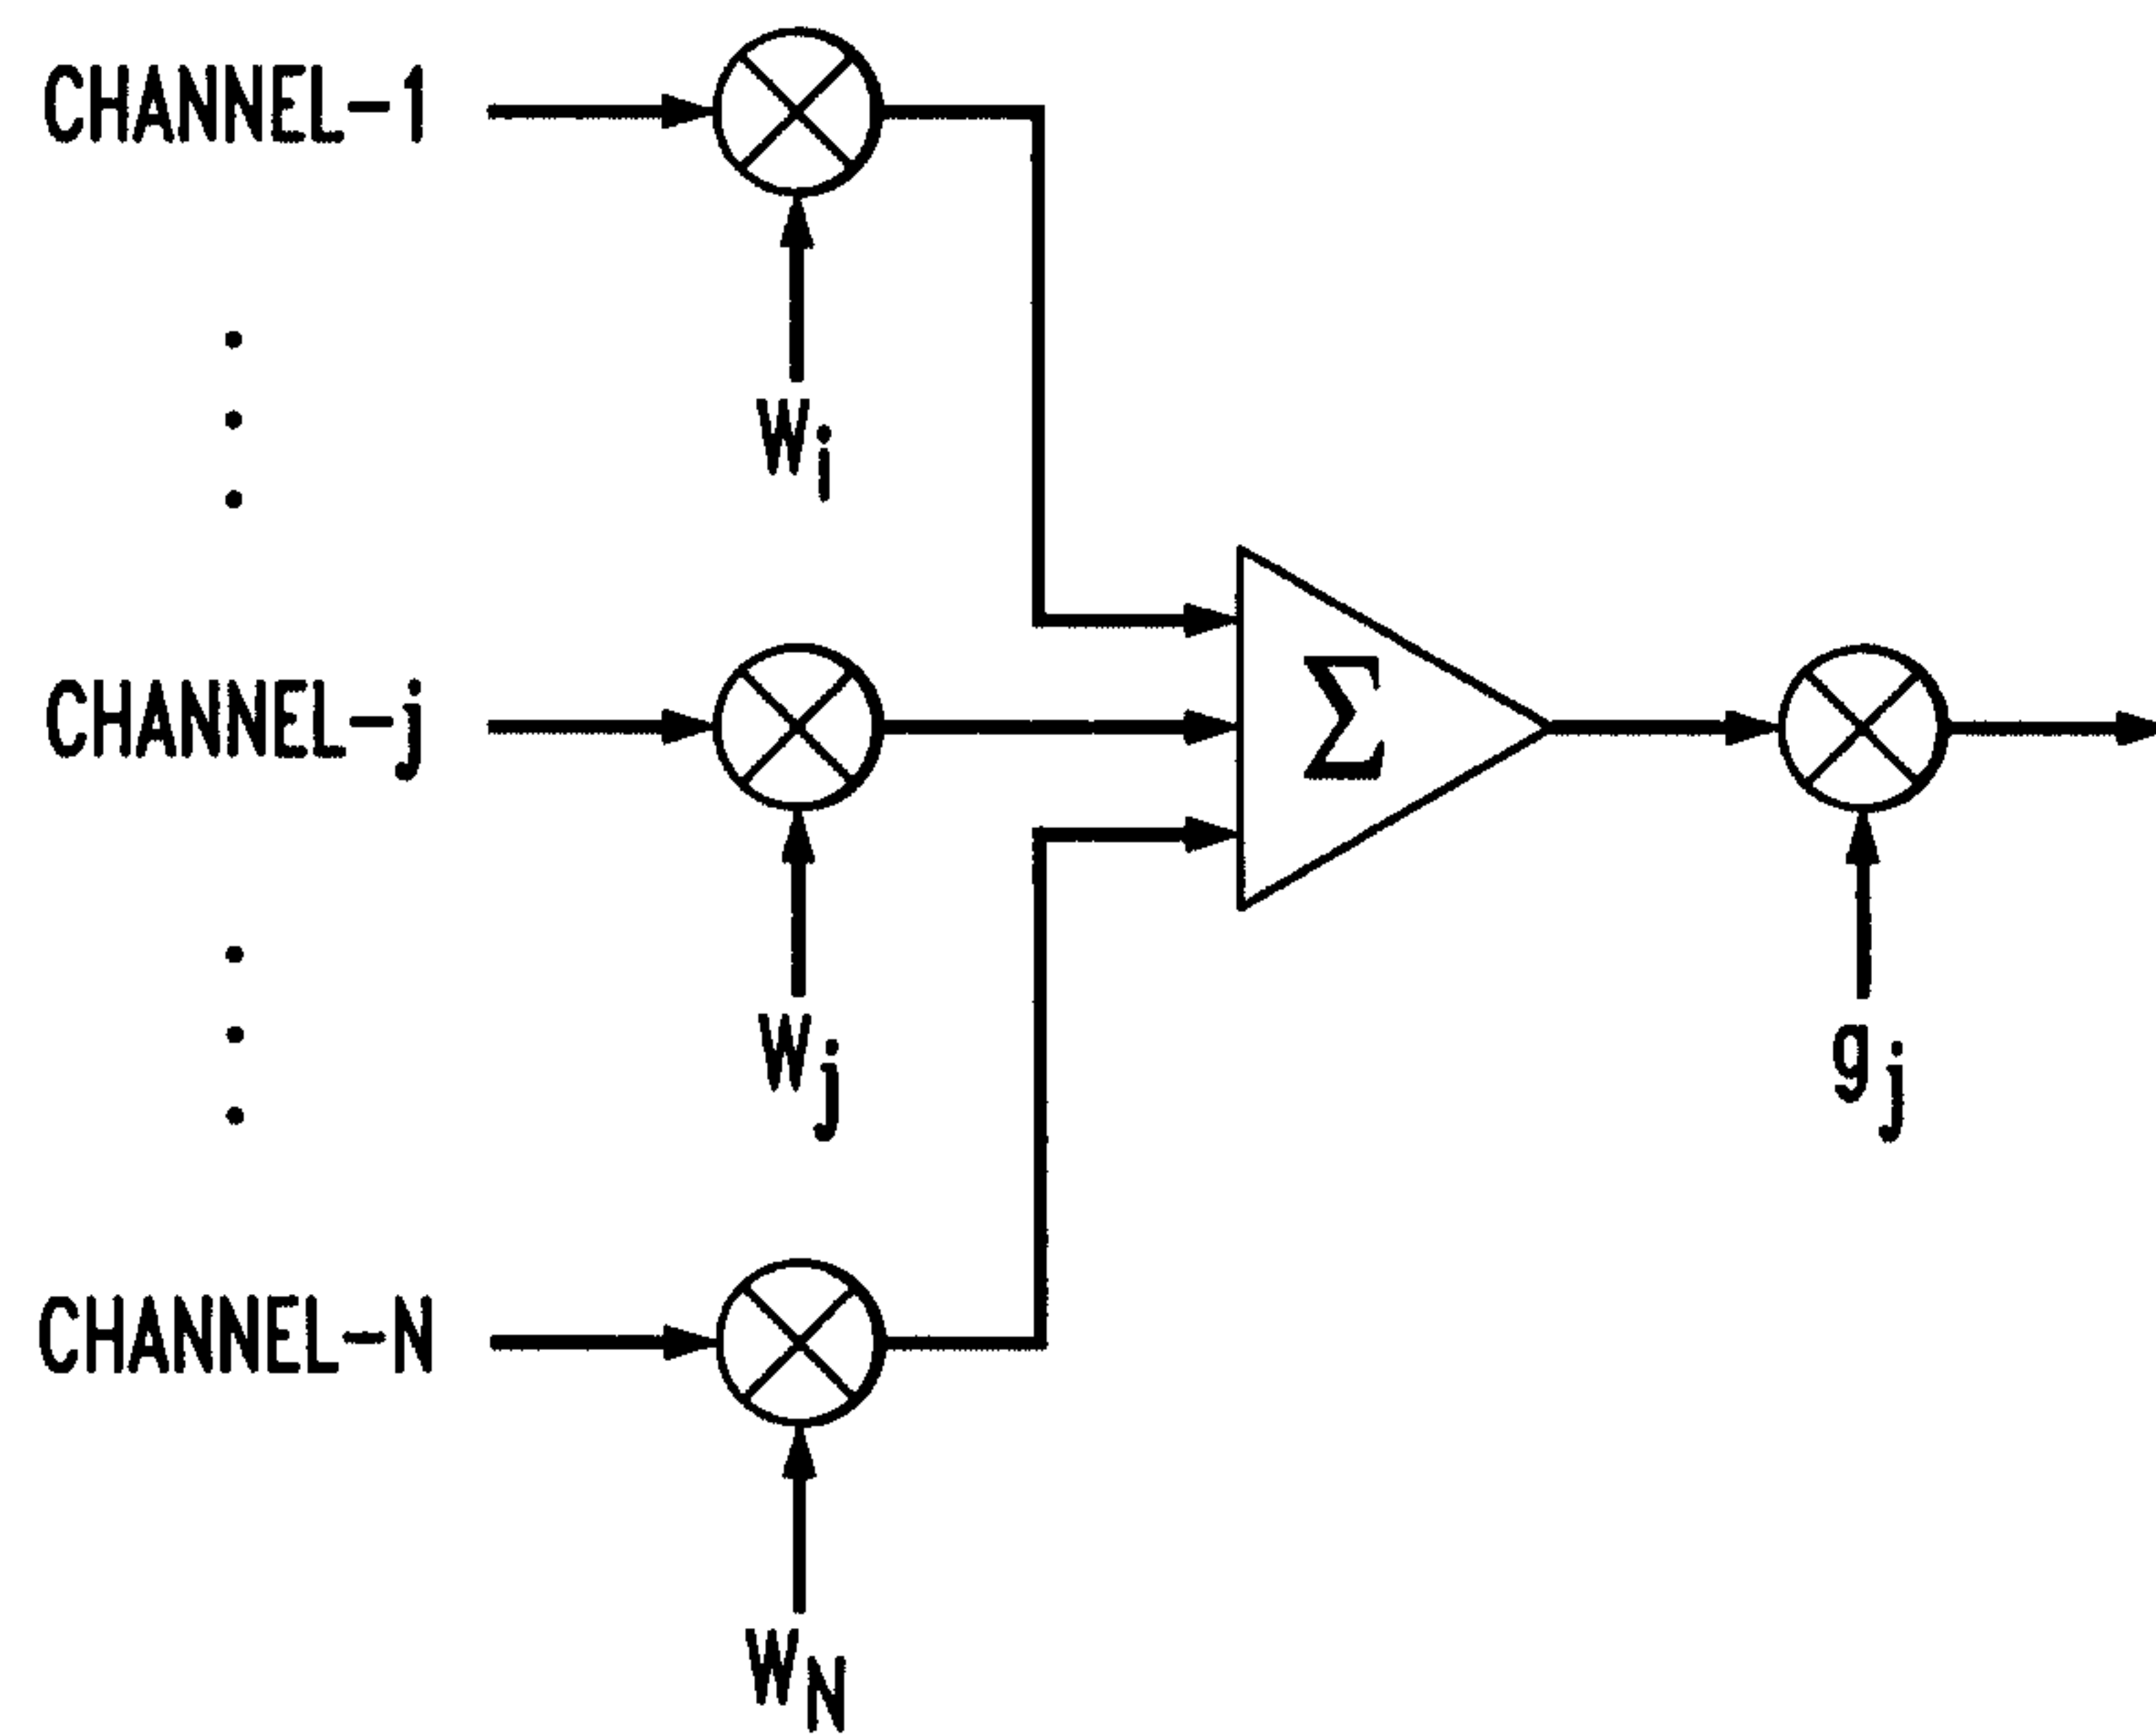FIG. 8b*FIG. 8c*