

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
5 October 2006 (05.10.2006)

PCT

(10) International Publication Number  
**WO 2006/103591 A1**

(51) International Patent Classification:

G01R 33/36 (2006.01)

(21) International Application Number:

PCT/IB2006/050851

(22) International Filing Date: 20 March 2006 (20.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

05102530.2 31 March 2005 (31.03.2005) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VAN HELVOORT, Marinus, J., A., M.** [NL/NL]; C/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **SAES, Marc, P.** [NL/NL]; C/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **VAN DEN BRINK, Johan, S.** [NL/NL]; C/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **KLEIHORST, Robert, P.** [NL/NL]; C/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **HAANS, Paulus, C., H., A.** [NL/NL]; C/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agents: **COHEN, Julius, S.** et al.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

**Published:**

— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: MRI SYSTEM COMPRISING A SCAN ROOM INTERFACE FOR A/D-CONVERSION OF MR SIGNALS BETWEEN A RECEIVER COIL UNIT AND A REMOTE SIGNAL PROCESSING UNIT

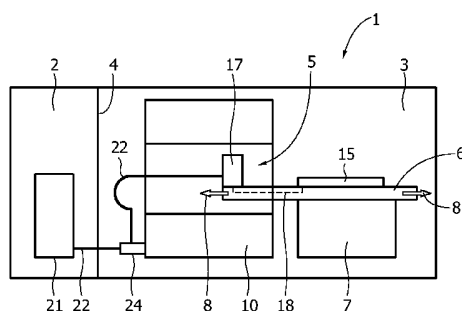

(57) Abstract: The present invention relates to a magnetic resonance imaging system, to a magnetic resonance imaging method for operating a magnetic resonance imaging system and to a computer program for operating a magnetic resonance imaging system. In order to considerably reduce the number of cabling in a magnetic resonance imaging system a magnetic resonance imaging system (1) is suggested, the system comprising: an examination zone (5) arranged to receive a body for examination; magnetic field generating means (9, 10, 24) for generating a magnetic field in the examination zone (5); a receiving unit (14) located in the examination zone (5) or in the vicinity of the examination zone (5); an interface unit (17) located in the examination zone (5) or in the vicinity of the examination zone (5), and arranged separately from the receiving unit (14); and a signal processing unit (21) disposed at a location (2) remote from the receiving unit (14) and the interface unit (17); wherein the receiving unit (14) comprising a receiver (15) adapted to receive a spin resonance signal generated in the examination zone (5), and a transmitter (16) adapted to transmit the spin resonance signal to the interface unit (17); and wherein the interface unit (17) comprises a receiver (20) for receiving the spin resonance signals, an analog to digital converter (19) adapted to generate a digital signal in response to the received spin resonance signal, and a transmitter (20) for transmitting the digitized signal to the signal processing unit (21).



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

MRI SYSTEM COMPRISING A SCAN ROOM INTERFACE FOR A/D-CONVERSION OF MR SIGNALS BETWEEN A RECEIVER COIL UNIT AND A REMOTE SIGNAL PROCESSING UNIT

The present invention relates to a magnetic resonance imaging system, to a magnetic resonance imaging method for operating a magnetic resonance imaging system and to a computer program for operating a magnetic resonance imaging system.

Magnetic resonance imaging is a technique which uses electromagnetic waves to form an image of objects disposed in an examination zone. In particular, magnetic resonance imaging is used to image organic tissue. In a conventional apparatus of this kind magnets are disposed so that a patient lying in an examination zone is exposed to a magnetic field. Radio waves are then transmitted into the body in the examination zone causing nuclei in atoms in the body to change orientation. As the nuclei return to their original orientation, they emit radio waves. An imaging apparatus receives the emitted radio waves in a receiving unit, and uses data derived from the received radio waves to form an image of the body examined in the examination zone.

In conventional magnetic resonance imaging apparatus, the receiving unit is disposed close to the patient in the magnet bore, and comprises one or more detecting coils/antennae. A coaxial cable connects the elements comprised in the receiving unit to a signal-processing unit for transmitting signal data to the signal-processing unit. The signal-processing unit processes those signal data. The signal-processing unit is situated in a location remote from the examination zone.

During examination of a body in the examination zone, a plurality of radio frequency antennae are used. In modern magnetic resonance scanners a high number of radio frequency channels, e.g. 8, 16, 32, 64, ..., is used. Each antenna requires a respective coaxial cable. Thus, the more antennae are used, the more complex the coaxial cable handling around the body becomes. The use of such a large number of coaxial cables is expensive, bulky and subject to environmental interaction interfering the magnetic resonance imaging process. Furthermore part of these coaxial cables have to be routed through dynamically moving areas within the examination zone, thus compromising reliability of the system and strongly reducing freedom of design.

It is an object of the present invention to considerably reduce the number of cabling in a magnetic resonance imaging system.

This object is achieved according to the invention by a magnetic resonance imaging system, the system comprising: an examination zone arranged to receive a body for examination; magnetic field generating means for generating a magnetic field in the examination zone; a receiving unit located in the examination zone or in the vicinity of the examination zone; an interface unit located in the examination zone or in the vicinity of the examination zone, and arranged separately from the receiving unit; and a signal processing unit disposed at a location remote from the receiving unit and the interface unit; wherein the receiving unit comprising a receiver adapted to receive a spin resonance signal generated in the examination zone, and a transmitter adapted to transmit the spin resonance signal to the interface unit; and wherein the interface unit comprises a receiver for receiving the spin resonance signals, an analog to digital converter adapted to generate a digital signal in response to the received spin resonance signal, and a transmitter for transmitting the digitized signal to the signal processing unit.

The object of the present invention is also achieved by an interface unit for use in a magnetic resonance imaging system, the magnetic resonance imaging system comprising: an examination zone arranged to receive a body for examination; magnetic field generating means for generating a magnetic field in the examination zone; a receiving unit located in the examination zone or in the vicinity of said examination zone, the receiving unit comprising a receiver adapted to receive a spin resonance signal generated in the examination zone, and a transmitter adapted to transmit the spin resonance signal to the interface unit; and a signal processing unit disposed at a location remote from the receiving unit and the interface unit; wherein the interface unit is locatable in the examination zone or in the vicinity of the examination zone, and arrangable separately from the receiving unit; and wherein the interface unit comprises a receiver for receiving the spin resonance signals; an analog to digital converter adapted to generate a digital signal in response to the received spin resonance signal, and a transmitter for transmitting the digitized signal to the signal processing unit.

The object of the present invention is also achieved by a magnetic resonance imaging method for operating a magnetic resonance imaging system, said method comprising the steps of: providing an examination zone arranged to receive a body for examination; generating a magnetic field in the examination zone; receiving in the examination zone or in the vicinity of the examination zone a spin resonance signal generated in the examination zone by means of a receiving unit; transmitting the spin resonance signal from the receiving unit to an interface unit located in the examination zone or in the vicinity of the examination

zone, the interface unit being arranged separately from the receiving unit; receiving the spin resonance signals; generating a digital signal in response to the received spin resonance signal in the interface unit; and transmitting the digitized signal to a signal processing unit disposed at a location remote from the receiving unit and the interface unit.

5           The object of the present invention is also achieved by a computer program for operating a magnetic resonance imaging system, the computer program comprising: computer instructions to transmit a spin resonance signal from a receiving unit to an interface unit being arranged separately from the receiving unit; computer instructions to receive the spin resonance signals by the interface unit; computer instructions to generate a digital signal  
10 in response to the spin resonance signal in an interface unit; and computer instructions to transmit the digitized signal from the interface unit to a signal processing unit; when the computer instructions are carried out in a computer. The technical effects necessary according to the invention can thus be realized on the basis of the instructions of the computer program in accordance with the invention. Such a computer program can be stored  
15 on a carrier or it can be available over the internet or another computer network. Prior to executing, the computer program is loaded into a computer by reading the computer program from the carrier, for example by means of a CD-ROM player, or from the internet, and storing it in the memory of the computer. The computer includes inter alia a central processor unit (CPU), a bus system, memory means, e.g. RAM or ROM etc. and input/output units.

20           A core idea of the invention is to reduce the number of cable by transferring the magnetic resonance signal data from the examination zone or from the vicinity of the examination zone to the remote signal-processing unit outside the examination zone using a digital format. This allows the use of a simple digital connection, e.g. a single connection wire or the like. A large bundle of coaxial cables is not needed, thus leading to a cheaper and  
25 more reliable magnetic resonance imaging system.

          For this purpose the invention suggests to provide an additional interface unit adapted to digitize the signals to be transferred, said interface unit being arranged in or in the vicinity of the examination zone but separately from the receive coils of the magnetic resonance system. By not including the interface unit in immediate vicinity of the receive  
30 coils or into the receive coil arrangement itself, it is possible to keep the receive coils free of additional unnecessary elements, like electronic circuits etc. Instead the receive coils can be designed freely and without design restrictions to reach a very high coverage. In other words an optimal antenna layout can be adopted. Furthermore the receive coils can be made much more flexible, thus better adaptable to the patient. Since receive coil and transmit coil may

electronically and physically be integrated, this advantage applies as well to transmit coils of the magnetic resonance imaging system.

These and other aspects of the invention will be further elaborated on the basis of the following embodiments which are defined in the dependent claims.

5 In a preferred embodiment of the present invention the interface unit is adapted to receive spin resonance signals from different receivers. In other words, the interface unit is adapted to collect and to merge spin resonance signals from all receive coils of the system in order to generate signals in response to the received spin resonance signals and to digitize those signals in order to transmit them in a digital way to the signal processing  
10 unit outside the examination zone. Since only one single interface unit is needed, the system design can be kept simple and inexpensive.

Because digital signals have to be transferred the interface unit and the signal-processing unit are preferably linked by a single cable or a small number of parallel galvanic cables, e.g. thin wires. Alternatively the signals are transferred using optical fibers. In this  
15 case the interface unit comprises an electro-optical transducer and a second electro-optical transducer is provided in the remote place for feeding the transmitted signals into the signal-processing unit. Alternatively a wireless link can also be used. In this case the interface unit comprises a wireless transmitter adapted to transmit the digitized signal to the signal-processing unit via radio waves or the like. Again for the signal processing unit a wireless  
20 receiver is provided. All transmitters and receivers are preferably parts of transceivers, thus enabling data transfer in both ways.

In all cases the number of cabling is reduced significantly. In order to transfer the amount of data using merely one single connection path, the interface unit is preferably adapted to provide a serial link to the signal-processing unit. Accordingly the interface unit  
25 preferably comprises a component for serializing the analogue signals before digitalization.

In another preferred embodiment of the invention the interface unit comprises signal condition means. Preferably analogue signal condition means (i.e. preamplifiers, attenuators, filters etc.) are provided in the interface unit. Such signal condition means may also be arranged in the receiving unit. However, it is preferred, that signal condition means  
30 are arranged in the interface unit only and that no signal condition is necessary in the radio frequency coils themselves; allowing a free and unlimited coil design. Preferably a preamplifier is designed such that the output signal matches with the required input voltages of the analog to digital converter. A band filter with controlled attenuation is also preferably

provided downstream of the preamplifier to condition the amplified signal in order to match the amplified signal with the input of the analog to digital converter.

If the interface unit is implemented partly or completely as an integrated circuit, the dimensions of the interface unit can be very small, thus allowing to use small shield dimension. Preferably the analog to digital converter and/or the signal condition means are packaged as an integrated circuit, e.g. system on a chip, multi-chip/multi-die module. Optionally other electronics might be included on chip as well.

If integrated into a circuit the interface unit can easily be integrated into existing parts of the system. In this case it is possible to design a new tidy and uncluttered examination zone without any cables (if using a wireless link) and without any additional constructional components. In such an examination zone potential risks of damaging the equipment by a patient or an inattentive operator or assistant are highly reduced.

Preferably the interface unit is located in or at the table for positioning the body in the examination zone. In particular the interface unit is fixed to or integrated into the table top or the table top carrier. If the receive coils are connected to the movable table top or to the table top carrier as well, only short cable connections are needed to connect the receiving unit with the interface unit. The remaining cabling (if any) to the operator's room is preferably routed via the table top support, which can for example be a movable trolley.

In another preferred embodiment of the present invention combined transmit/receive coils are used. In other words the radio frequency receiver are used alternatively as radio frequency transmitter for production of measurement pulses to excite the nuclei. Preferably the same signal transmission pathway is used as for the receiving process, hence a digital to analogue converter is provided in the interface unit. The digital to analogue converter is preferably adapted to receive signal data from the operator's room, to convert those signal data, and to transmit the signal data to a generator. The generator is preferably part of the interface unit and is adapted to generate radio frequency signals for the transmitter. These radio frequency signals are preferably amplified by means of a radio frequency amplifier, which is provided for the transmit coils. The radio frequency amplifier is preferably located in the interface unit as well. The digital to analogue converter and the other components are preferably also integrated in the circuit design of the interface unit.

These and other aspects of the invention will be described in detail hereinafter, by way of example, with reference to the following embodiment and the accompanying drawings, in which

Fig.1 is a first picture of an magnetic resonance imaging system illustrating the arrangement of the components of the present invention, and

Fig. 2 is as second more schematic picture of an magnetic resonance imaging system according to the present invention.

The magnetic resonance imaging system 1 comprises an operator's room 2 and an examination room 3, separated by an electromagnetic shielding 4. An examination zone 5 is arranged to receive a body (not shown) for examination. For thus purpose the body is placed on a table top 6 of a patient support 7. The table top 6 can be moved, which is indicated by arrows 8.

The magnetic resonance imaging system 1 further comprises magnetic field generating means 9 for generating a magnetic field in the examination zone 5. The magnetic field generating means 9 comprise a number of magnets 10 for generating a static magnetic field and a magnetic field gradient system 11, consisting of gradient amplifier 12 and gradient coils 13. The gradient system 11 is required for spatial selection and spatial encoding.

The magnetic resonance imaging system 1 further comprises a receiving/transmitting unit 14. The receiving/transmitting unit 14 is located either in the examination zone 5 or in the vicinity of the examination zone 5, depending on the position of the table top 6. The receiving/transmitting unit 14 comprised a number of receiver/transmitter in form of combined receive/transmit coils 15, adapted to acquire analogue magnetic spin resonance signals generated in the examination zone 5. The receiving/transmitting unit 14 further comprises a transceiver 16 adapted to transmit the spin resonance signal to an interface unit 17, arranged separately from the receiving/transmitting unit 14. The number of receive/transmit coils 15 are connected to the movable table top 6 and connected to the interface unit 17 using a conventional analogue coaxial cable 18 integrated into the table top 6, the cable being illustrated as a dashed line. Instead of a coaxial cable another RF conduit e.g. twisted pair or stripline may be used.

The interface unit 17 is fixed at one end of the table top 6 and located either in the examination zone 5 or in the vicinity of the examination zone, depending on the position



of the table top 6. The interface unit 17 interfaces between the receive/transmit coils 15 and the table top 6 in the examination room 3 and the components of the magnetic resonance imaging system 1 located in the operators room 2. The interface unit 17 is adapted to receive spin resonance signals from all receive/transmit coils 15 of the system, i.e. it is part of a multi-channel radio frequency signal acquisition system.

The interface unit 17 comprises an analog to digital converter 19 adapted to generate a digital signal in response to the received spin resonance signal, and a transceiver 20. The transceiver 20 is adapted for receiving the signals from the transceiver 16 of the receiving/transmitting unit 14, for delivering the digitized signal to a signal processing unit 21 outside the examination room 3 via a thin single cable 22 with serial link. The interface unit 17 comprises a component 23 for serializing the analogue signals before digitalization. Optionally the interface unit 17 comprises digital signal processing means (not shown) for carrying out a pre-processing of the digitized signals prior to transmission to the signal processing unit. The single cable 22 runs from the transceiver 20 of the interface unit 17 to the signal processing unit 22 via a control device 24 of the magnetic field generating means 9.

The interface unit 17 further comprises signal condition means 30, in particular a preamplifier adapted to match the output signal with the required input voltages of the analog to digital converter 19. The signal condition means 30 further comprises a band filter with controlled attenuation to condition the amplified signal in order to match the amplified signal with the input of the analog to digital converter 19.

The interface unit 17 comprises a digital to analogue converter 25 for converting signal data received from the operator's room 2 by the transceiver 20. The converted signal data is then transmitted from the digital to analogue converter 25 to a generator 26 adapted to generate radio frequency signals for the transmit coils 15. Additionally a radio frequency amplifier 27 is provided in the interface unit 17 for amplifying the radio frequency signals. The radio frequency signals are transferred to the transceiver 16 of the receiving/transmitting unit 14. The transceiver 16 is adapted to receive those signals. The required power supply for the interface unit 17 is not shown.

Because the interface unit 17 is not included in the coils 15, the coil design is not restricted or limited. The advantage of free coil design can even be better exploited, if other electronics are removed from the coils 15 itself. For example the detuning means (not shown) for changing the resonance frequency of the receive coils, which include electronic

circuits and switches, might be removed. This can be arranged by using a quarter lambda transmission line (not shown) between coils and detuning means.

The signal processing unit 21 of the magnetic resonance imaging system 1 is located in the operator's room 2 remote from the examination zone 5, the receiving unit 14 and the interface unit 17. The signal processing unit 21 is adapted for digital signal processing, hence the transmitted digital data can be fed into the signal processing unit 21 without any further conversion. The signal processing unit 21 is part of an acquisition and control system 28 for digital signal processing, image processing, and data acquisition control. The acquisition and control system 28 is linked to a reconstruction system 29, where measured data are reconstructed and displayed. The acquisition and control system 28 including the signal processing unit 21 as well as the reconstruction system 29 is (at least partly) implemented as a computer software executed in a computer.

It will be evident to those skilled in the art that the invention is not limited to the details of the foregoing illustrative embodiments, and that the present invention may be embodied in other specific forms without departing from the spirit or essential attributes thereof. The present embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the foregoing description, and all changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein. It will furthermore be evident that the word "comprising" does not exclude other elements or steps, that the words "a" or "an" do not exclude a plurality, and that a single element, such as a computer system or another unit may fulfil the functions of several means recited in the claims. Any reference signs in the claims shall not be construed as limiting the claim concerned.

- 1 MRI system
- 2 operators room
- 3 examination room
- 4 shielding
- 5 examination zone
- 6 table top
- 7 patient support
- 8 arrow
- 9 magnetic field generation means

	10	magnet
	11	magnetic field gradient system
	12	gradient amplifier
	13	gradient coil
5	14	receiving/transmitting unit
	15	receive/transmit coil
	16	transceiver
	17	interface unit
	18	coaxial cable
10	19	A/D converter
	20	transceiver
	21	signal processing unit
	22	single cable
	23	serializer
15	24	control device
	25	D/A converter
	26	RF generator
	27	RF amplifier
	28	acquisition and control system
20	29	reconstruction system
	30	signal condition means.

## CLAIMS:

1. A magnetic resonance imaging system (1), the system comprising:
  - an examination zone (5) arranged to receive a body for examination;
  - magnetic field generating means (9, 10, 24) for generating a magnetic field in the examination zone (5);
  - 5 - a receiving unit (14) located in the examination zone (5) or in the vicinity of the examination zone (5);
  - an interface unit (17) located in the examination zone (5) or in the vicinity of the examination zone (5), and arranged separately from the receiving unit (14); and
  - a signal processing unit (21) disposed at a location (2) remote from the receiving unit (14)
  - 10 and the interface unit (17);
  - wherein the receiving unit (14) comprising a receiver (15) adapted to receive a spin resonance signal generated in the examination zone (5), and a transmitter (16) adapted to transmit the spin resonance signal to the interface unit (17); and
  - wherein the interface unit (17) comprises a receiver (20) for receiving the spin resonance
  - 15 signals, an analog to digital converter (19) adapted to generate a digital signal in response to the received spin resonance signal, and a transmitter (20) for transmitting the digitized signal to the signal processing unit (21).
2. The magnetic resonance imaging system (1) as claimed in claim 1, wherein the
- 20 interface unit (17) is adapted to receive spin resonance signals from different receivers (15).
3. The magnetic resonance imaging system (1) as claimed in claim 1, wherein the interface unit (17) and the signal processing unit (21) are linked by a single cable (22), a small number of parallel cables, optical fibers or a wireless link.
- 25 4. The magnetic resonance imaging system (1) as claimed in claim 1, wherein the interface unit (17) comprises signal condition means (30).

5. The magnetic resonance imaging system (1) as claimed in claim 1, wherein the interface unit (17) is implemented as an integrated circuit.

6. The magnetic resonance imaging system (1) as claimed in claim 1, wherein the interface unit (17) is located in or at the table (6, 7) for positioning the body in the examination zone (5).

7. The magnetic resonance imaging system (1) as claimed in claim 1, comprising a transmitter (15) adapted to generate measurements pulses.

8. The magnetic resonance imaging system (1) as claimed in claim 7, wherein the interface unit (17) comprising a generator (26) adapted to generate radio frequency signals for the transmitter (15).

9. An interface unit (17) for use in a magnetic resonance imaging system (1), the magnetic resonance imaging system (1) comprising: an examination zone (5) arranged to receive a body for examination; magnetic field generating means (9, 10, 24) for generating a magnetic field in the examination zone (5); a receiving unit (14) located in the examination zone (5) or in the vicinity of said examination zone (5), the receiving unit (14) comprising a receiver (15) adapted to receive a spin resonance signal generated in the examination zone (5), and a transmitter (16) adapted to transmit the spin resonance signal to the interface unit (17); and a signal processing unit (21) disposed at a location (2) remote from the receiving unit (14) and the interface unit (17);

- wherein the interface unit (17) is locatable in the examination zone (5) or in the vicinity of the examination zone (5), and arrangeable separately from the receiving unit (14); and  
- wherein the interface unit (17) comprises a receiver (20) for receiving the spin resonance signals, an analog to digital converter (19) adapted to generate a digital signal in response to the received spin resonance signal, and a transmitter (20) for transmitting the digitized signal to the signal processing unit (21).

10. A magnetic resonance imaging method for operating a magnetic resonance imaging system (1), said method comprising the steps of:

- providing an examination zone (5) arranged to receive a body for examination;  
- generating a magnetic field in the examination zone (5);

- receiving in the examination zone (5) or in the vicinity of the examination zone (5) a spin resonance signal generated in the examination zone (5) by means of a receiving unit (14);
- transmitting the spin resonance signal from the receiving unit (14) to an interface unit (17) located in the examination zone (5) or in the vicinity of the examination zone (5), the
- 5 interface unit (17) being arranged separately from the receiving unit (14);
- receiving the spin resonance signals;
- generating a digital signal in response to the received spin resonance signal; and
- transmitting the digitized signal to a signal processing unit (21) disposed at a location (2) remote from the receiving unit (14) and the interface unit (17).

10

11. A computer program for operating a magnetic resonance imaging system (1), the computer program comprising:

- computer instructions to transmit a spin resonance signal from a receiving unit (14) to an interface unit (17) being arranged separately from the receiving unit (14);
- 15 - computer instructions to receive the spin resonance signals by the interface unit (17);
- computer instructions to generate a digital signal in response to the spin resonance signal in the interface unit (17); and
- computer instructions to transmit the digitized signal from the interface unit (17) to a signal processing unit (21);

20

- when the computer instructions are carried out in a computer.

1/1

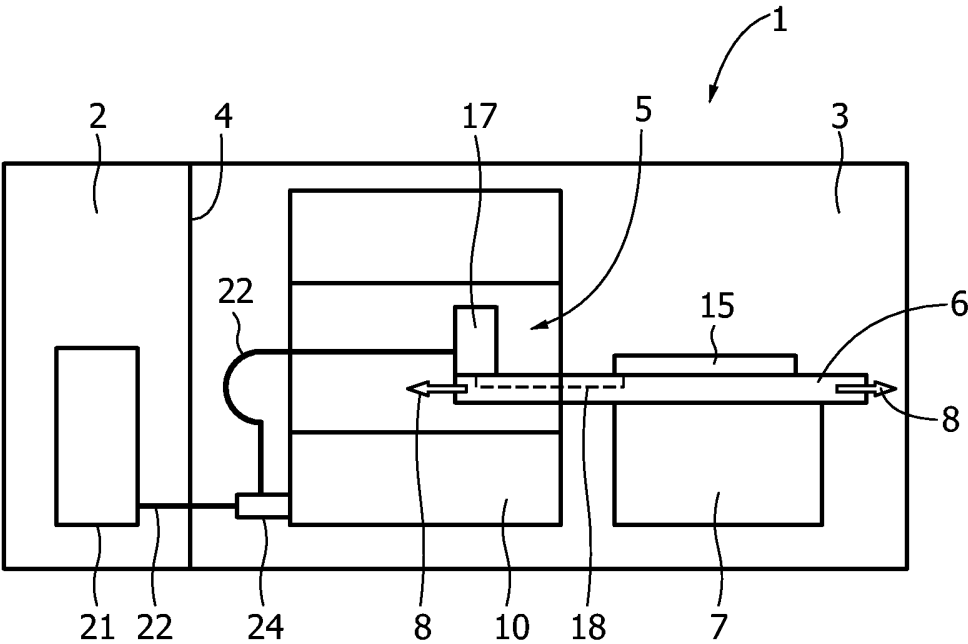


FIG. 1

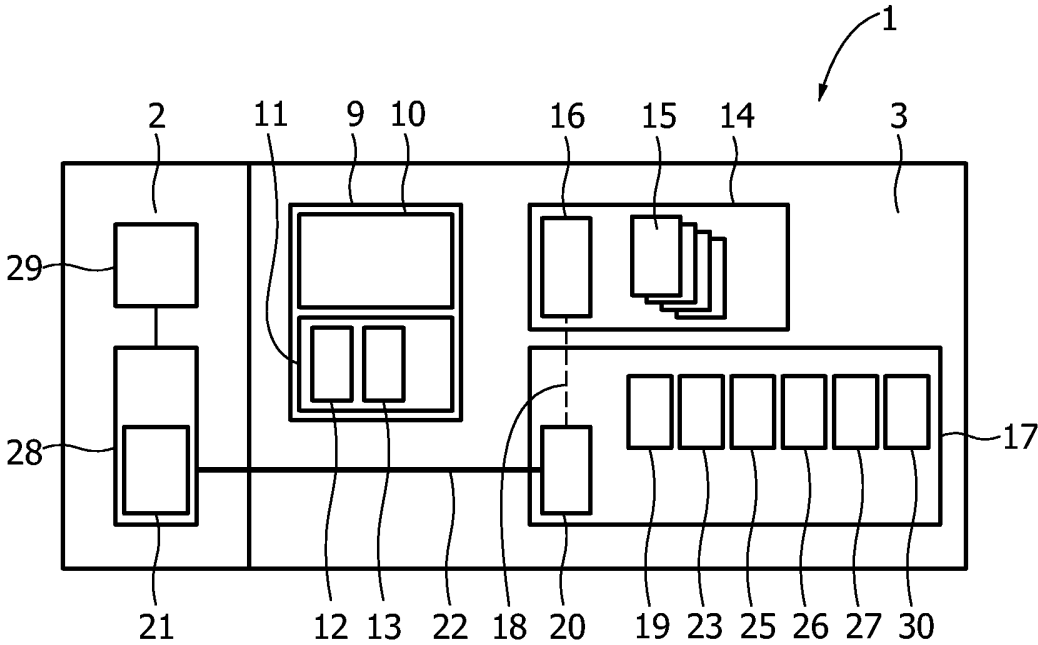


FIG. 2

## INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2006/050851

## A. CLASSIFICATION OF SUBJECT MATTER

INV. G01R33/36

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2004/089211 A (KONINKLIJKE PHILIPS ELECTRONICS N.V; TUIHOF, HANS, H; DEN BOEF, JOHAN) 21 October 2004 (2004-10-21) page 2, line 16 - page 3, line 5 page 6, line 5 - page 13, line 9; figures 2-5	1-11
X	WO 03/032002 A (KONINKLIJKE PHILIPS ELECTRONICS N.V; PHILIPS MEDICAL SYSTEMS, INC) 17 April 2003 (2003-04-17) page 1, line 31 - page 2, line 13 page 3, line 29 - page 6, line 28; figure 1	1-11



Further documents are listed in the continuation of Box C.



See patent family annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

19 July 2006

Date of mailing of the international search report

26/07/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lersch, W



## INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2006/050851

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 491 415 A (HOLMES ET AL) 13 February 1996 (1996-02-13) column 2, line 48 - column 3, line 26 column 4, line 66 - column 5, line 41 column 7, line 40 - column 7, line 67; figures 1,2 -----	1-11
X	US 5 384 536 A (MURAKAMI ET AL) 24 January 1995 (1995-01-24) column 4, line 29 - column 5, line 43 column 6, line 64 - column 9, line 65; figures 2,3,7-11 -----	1-6,9-11
Y	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 05, 30 May 1997 (1997-05-30) -& JP 09 024036 A (HITACHI MEDICAL CORP), 28 January 1997 (1997-01-28) abstract -----	1-11
Y	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 09, 4 September 2002 (2002-09-04) -& JP 2002 143122 A (TOSHIBA CORP), 21 May 2002 (2002-05-21) abstract -----	1-11
A	US 5 666 055 A (JONES ET AL) 9 September 1997 (1997-09-09) column 5, line 19 - column 5, line 57 column 8, line 21 - column 8, line 51; figures 3,6 -----	2,3,6
A	EP 1 130 412 A (KONINKLIJKE PHILIPS ELECTRONICS N.V; MARCONI MEDICAL SYSTEMS, INC) 5 September 2001 (2001-09-05) paragraphs [0015] - [0024]; figures 1,2 -----	2,3,6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2006/050851

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2004089211	A	21-10-2004	NONE	
WO 03032002	A	17-04-2003	EP 1438601 A1 JP 2005505361 T US 6961604 B1	21-07-2004 24-02-2005 01-11-2005
US 5491415	A	13-02-1996	US 5296813 A	22-03-1994
US 5384536	A	24-01-1995	JP 3168675 B2 JP 5261083 A	21-05-2001 12-10-1993
JP 09024036	A	28-01-1997	NONE	
JP 2002143122	A	21-05-2002	NONE	
US 5666055	A	09-09-1997	NONE	
EP 1130412	A	05-09-2001	JP 2001346775 A US 6362622 B1	18-12-2001 26-03-2002