




(86) **Date de dépôt PCT/PCT Filing Date:** 2008/04/03
(87) **Date publication PCT/PCT Publication Date:** 2008/12/31
(45) **Date de délivrance/Issue Date:** 2016/11/29
(85) **Entrée phase nationale/National Entry:** 2009/12/14
(86) **N° demande PCT/PCT Application No.:** SE 2008/050383
(87) **N° publication PCT/PCT Publication No.:** 2009/002251
(30) **Priorité/Priority:** 2007/06/27 (SE0701582-9)

(51) **Cl.Int./Int.Cl. H04B 7/06** (2006.01)
(72) **Inventeurs/Inventors:**
JOENGREN, GEORGE, SE;
GOERANSSON, BO, SE;
WAN, LEI, CN
(73) **Propriétaire/Owner:**
UNWIRED PLANET, LLC, US
(74) **Agent:** GILBERT'S LLP

(54) **Titre : COMMUTATION DE MODE ENTRE LES MODES MONO-UTILISATEUR ET MULTIUTILISATEUR ENTREE MULTIPLE
SORTIE MULTIPLE**
(54) **Title: MODE SWITCHING BETWEEN SU-MIMO AND MU-MIMO**

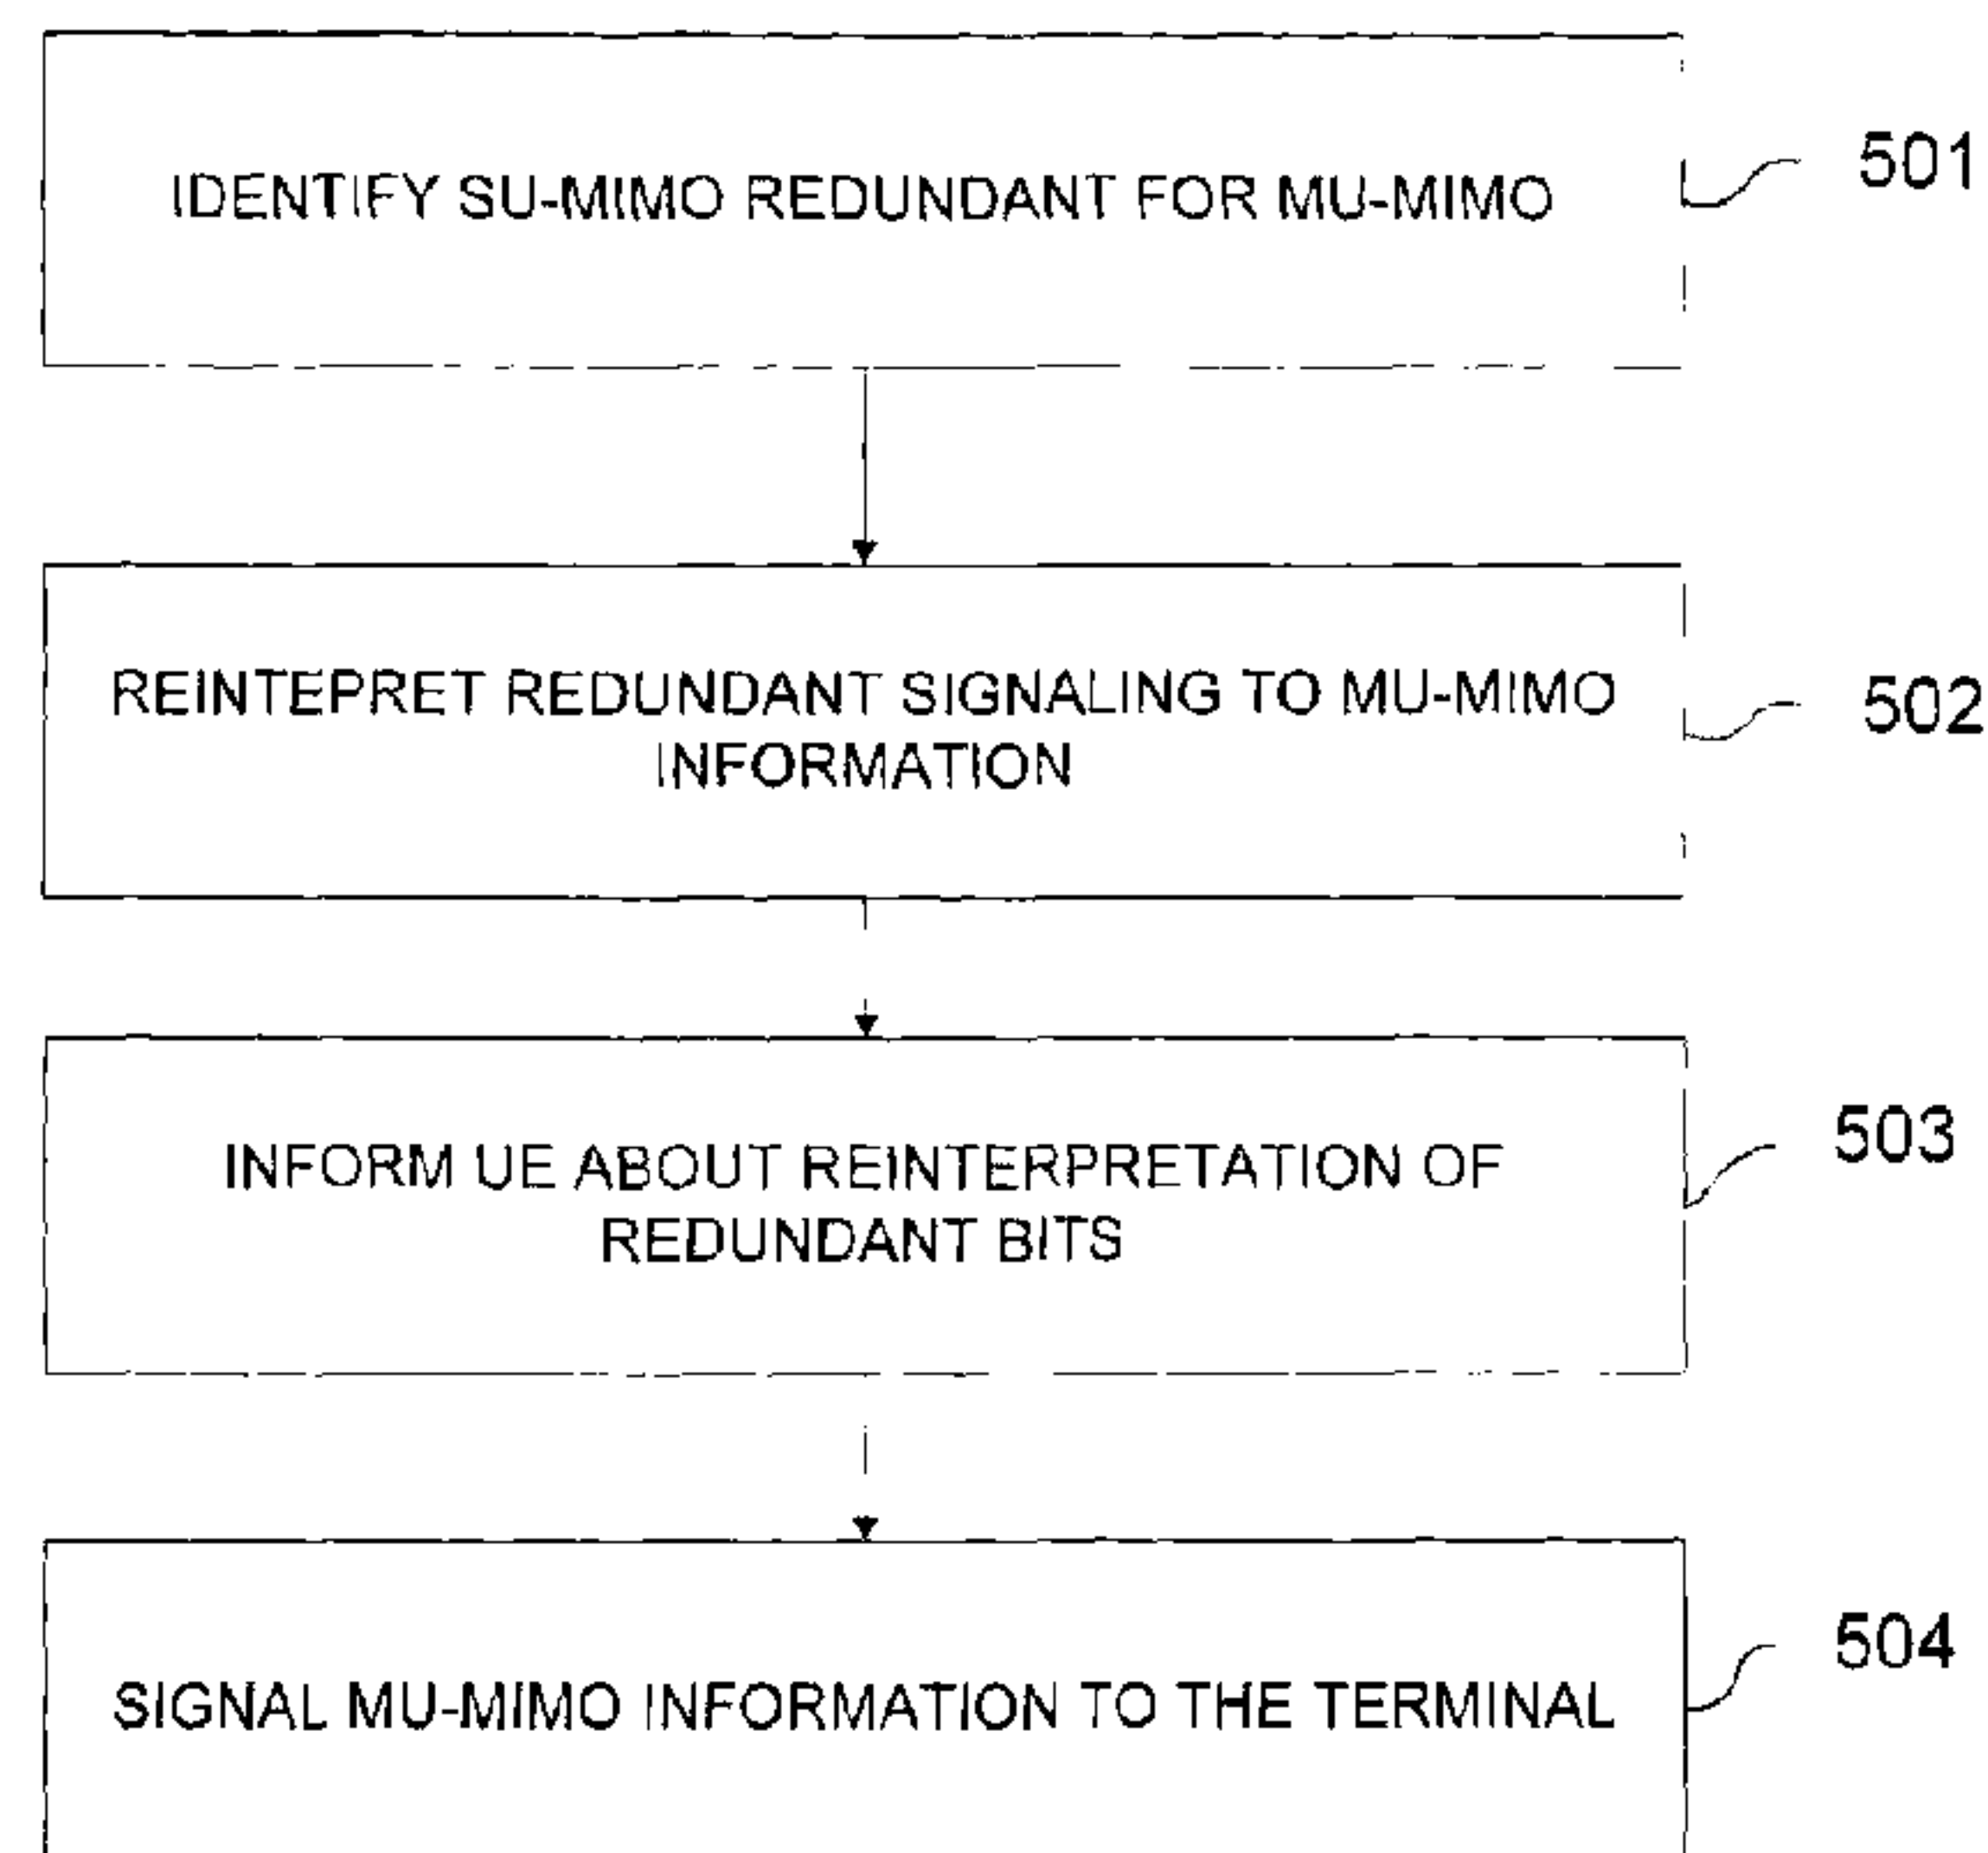

(57) **Abrégé/Abstract:**

The present invention relates to a method and arrangements in a communication system for Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling via Multiple-Input-Multiple-Output (MIMO) antennas between a base station and one of a plurality of mobile terminals supporting both Single User and Multi User Multiple- Input-Multiple-Output (SU-MIMO and MU-MIMO) signaling modes. Switching between the modes is supported in the system and the modes have partly shared signaling. SU-MIMO mode signaling which is redundant, i.e. not needed, for MU-MIMO mode signaling is identified. Bits, i.e. data bits, of the identified redundant signaling is re-interpreted or re-defined to comprise signaling information associated with MU-MIMO mode. The signaling information associated with MU-MIMO mode is signaled to the mobile terminal by using the reinterpreted redundant bits.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 December 2008 (31.12.2008)

PCT

(10) International Publication Number
WO 2009/002251 A3

(51) International Patent Classification:
H04B 7/06 (2006.01)

(74) Agent: **HASSELGREN, Joakim**; Ericsson AB, Patent Unit LTE, S-164 80 Stockholm (SE).

(21) International Application Number:
PCT/SE2008/050383

(22) International Filing Date: 3 April 2008 (03.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0701582-9 27 June 2007 (27.06.2007) SE

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)** [SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **JÖNGREN, George** [SE/SE]; Karlsviksgatan 15, S-112 41 Stockholm (SE). **GÖRANSSON, Bo** [SE/SE]; Silverdalsvägen 67, S-191 38 Sollentuna (SE). **WAN, Lei** [CN/CN]; No. 703, Building 4, Shui Qing Mu Hua Yuan Xiao Qu, CHINA, Beijing 100080 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: MODE SWITCHING BETWEEN SU-MIMO AND MU-MIMO

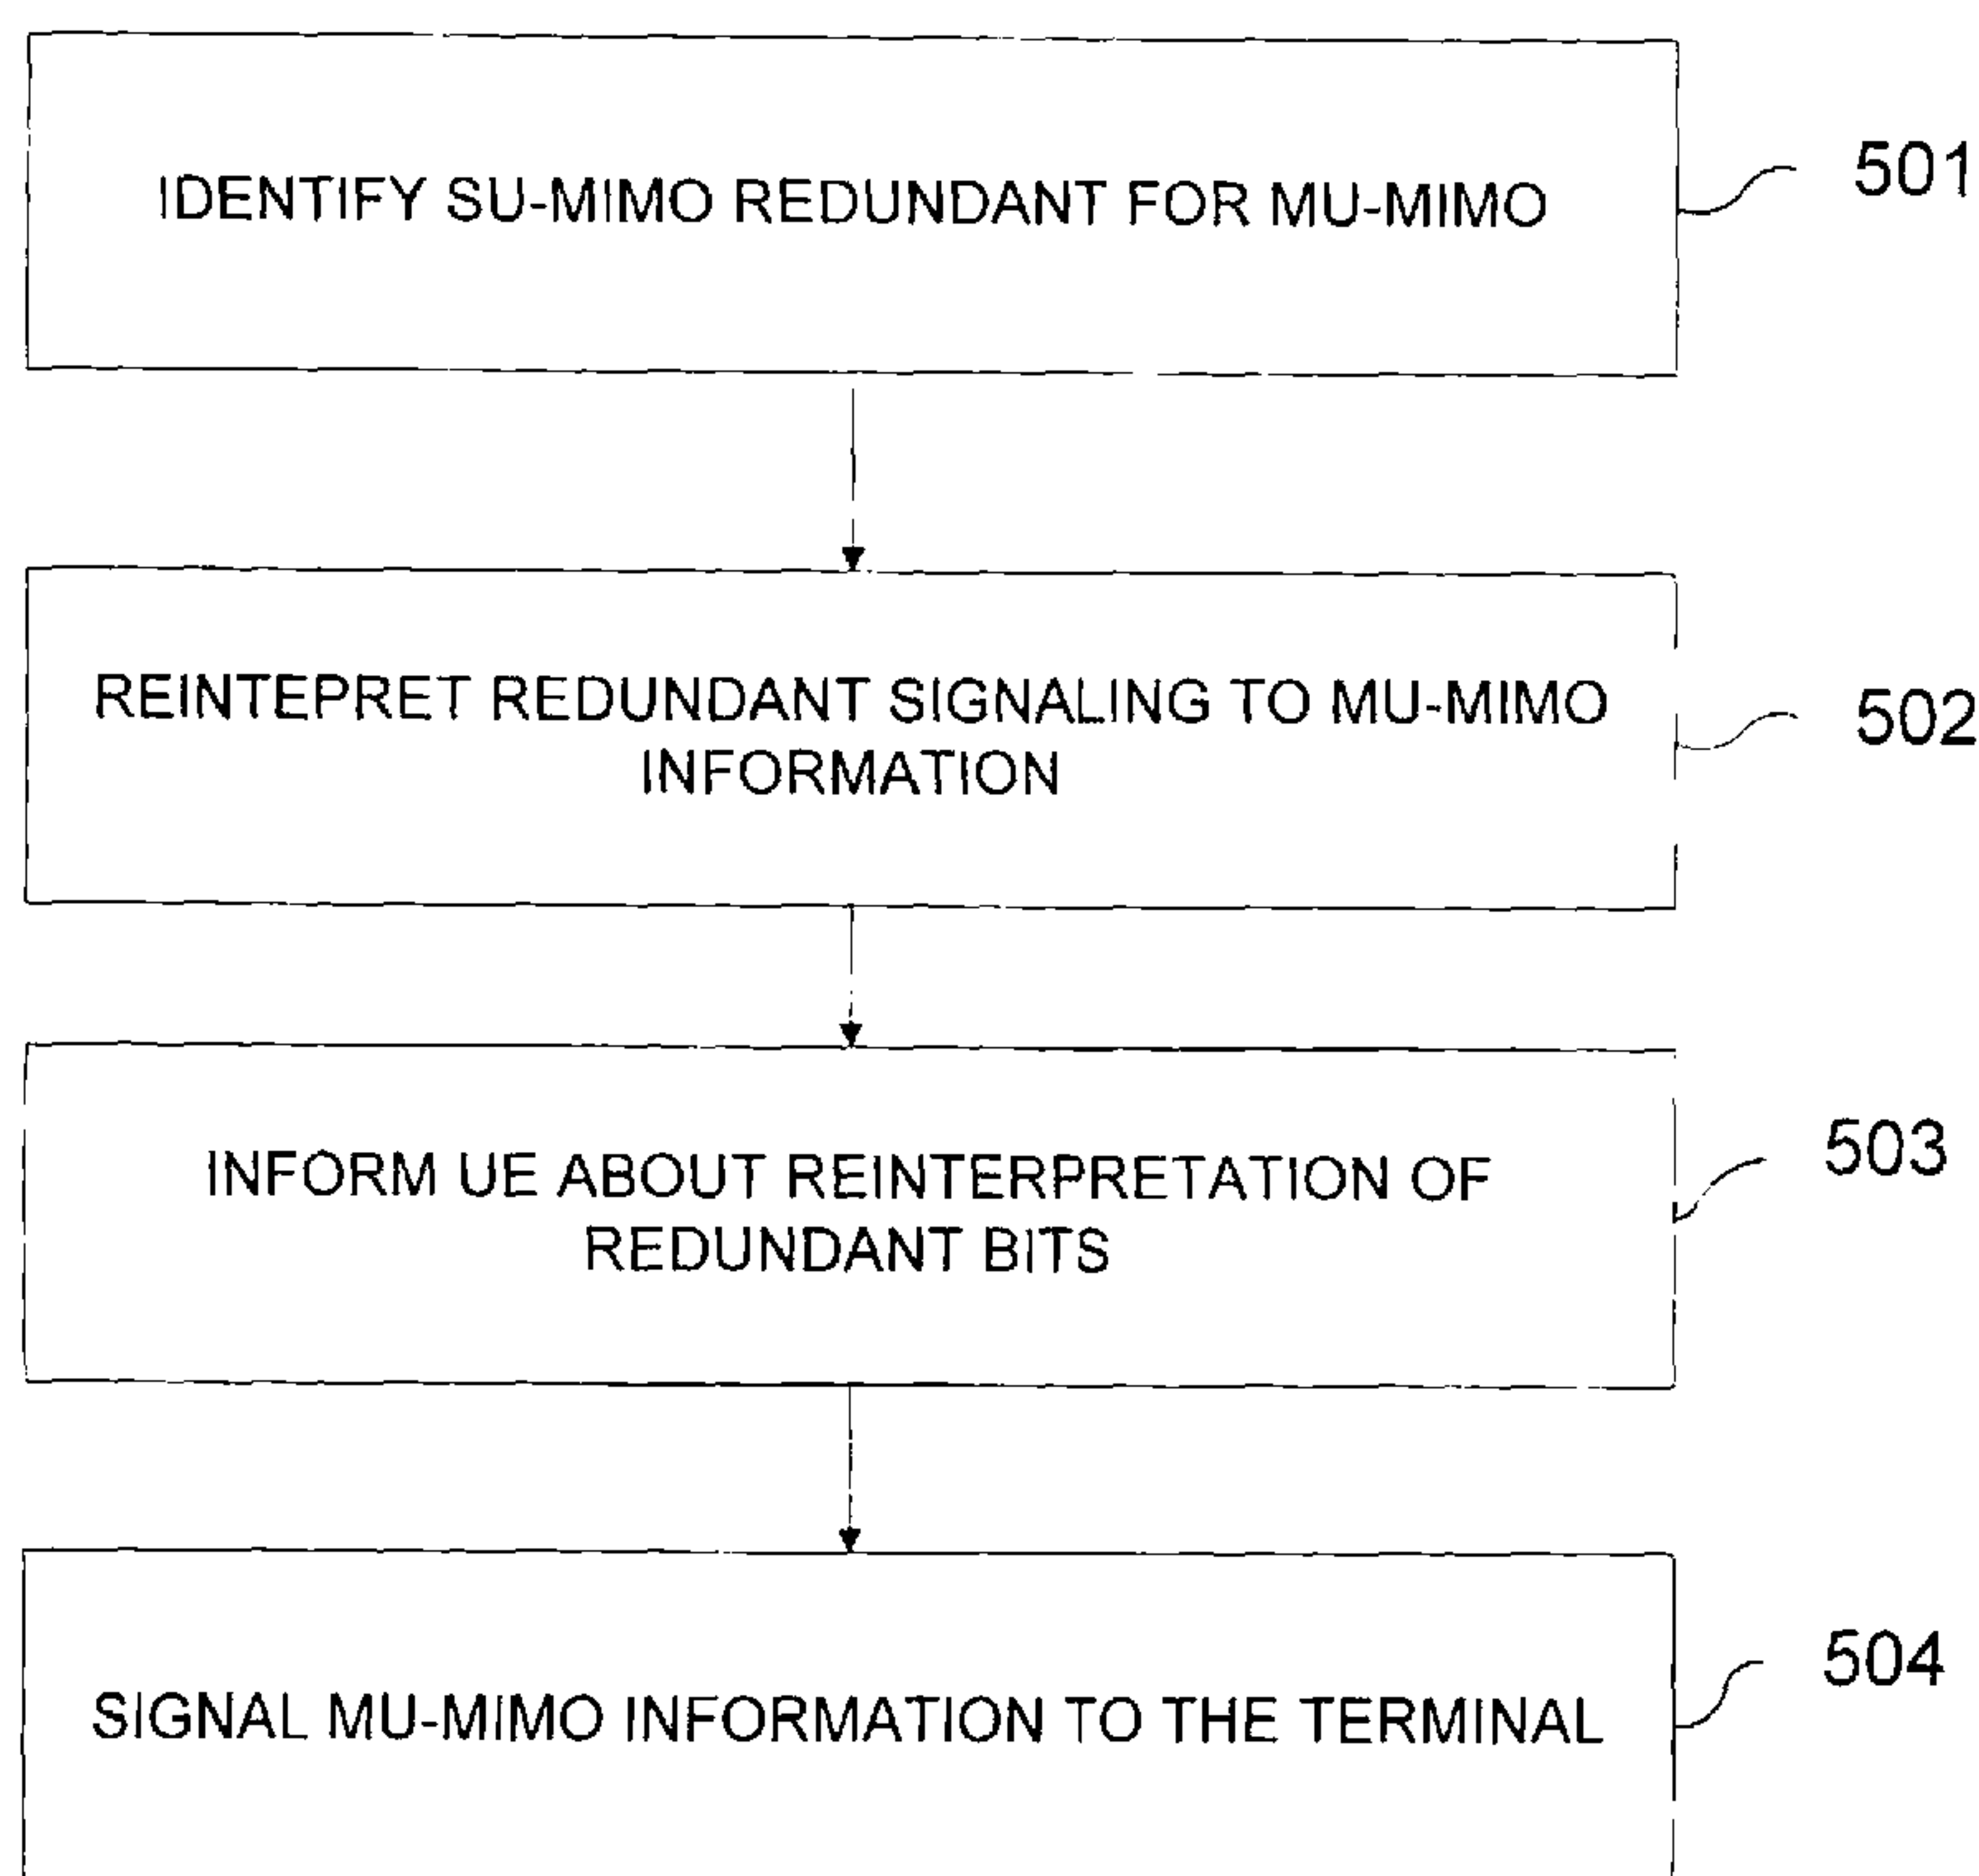

(57) Abstract: The present invention relates to a method and arrangements in a communication system for Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling via Multiple-Input-Multiple-Output (MIMO) antennas between a base station and one of a plurality of mobile terminals supporting both Single User and Multi User Multiple-Input-Multiple-Output (SU-MIMO and MU-MIMO) signaling modes. Switching between the modes is supported in the system and the modes have partly shared signaling. SU-MIMO mode signaling which is redundant, i.e. not needed, for MU-MIMO mode signaling is identified. Bits, i.e. data bits, of the identified redundant signaling is re-interpreted or re-defined to comprise signaling information associated with MU-MIMO mode. The signaling information associated with MU-MIMO mode is signaled to the mobile terminal by using the reinterpreted redundant bits.

Fig. 5

WO 2009/002251 A3



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

(88) Date of publication of the international search report:

26 February 2009

MODE SWITCHING BETWEEN SU-MIMO AND MU-MIMO

TECHNICAL FIELD

The present invention relates to a method and arrangements in a
5 telecommunication system. In particular it relates to a method and arrangements
for Multi User Multiple-Input-Multiple-Output signaling in the
telecommunication system.

BACKGROUND

10 In the cellular telecommunication system which typically comprises, as illustrated in
fig. 1, a core network 1, a radio access network 2, User Equipments (UEs) 4 and base
stations 3 multiple transmit antennas can be used for achieving high data rates in
various ways. A multiple-input-multiple-output (MIMO) channel is formed if also the
receiver has multiple antennas. One application in such a setup is to strive for high
15 peak rates to a single user. By transmitting on several layers which means that the
information is transmitted on several bit streams the information is spread in the
spatial domain, substantial improvement in data rate can be achieved under favorable
channel conditions. This is called single user MIMO (SU-MIMO) since the data on
several layers is intended for a single receiver/user/UE/terminal. Figure 2 shows an
20 example of a base station 20, with multiple transmit antennas 23, that is transmitting
in SU-MIMO mode to a single UE 21. As shown in figure 2 several layers 22 are
transmitted to a single UE 21. In figure 2 the UE is also transmitting to the base
station 20 using several layers. The telecommunication system may be a LTE-system
which is an evolution of the UMTS.

25

The number of simultaneously transmitted layers depends highly on the
properties of the MIMO channel. Because of for example fading, usually the
MIMO channel does not support more than one layer transmission to a single
UE. This limits the data rate and means that spatial multiplexing gain is not
30 possible. To still reach high system capacity it might be beneficial to transmit

only a limited number of layers to a single user and instead schedule several users on the same physical resource (e.g. time – frequency - code tile) and use the spatial domain (layers) to separate the users. In essence, layers belonging to different users are transmitted on the same physical resource. Even if the
5 channel to a particular user is such that it does not support multiple layers, which means that it is not possible to transmit multiple layers to that particular user, spatial multiplexing gain on a system level can be achieved as long as the user can efficiently suppress the layers transmitted to the other users. This technique is sometimes referred to as multi-user MIMO (MU-MIMO) and is
10 especially attractive in high load scenarios with many active users as described in 3GPP R1-063130, "System level comparison between MU- and SU-MIMO for downlink precoding systems with four transmit antennas", Ericsson, TSG-RAN WG1 #47, Nov 2006. Figure 3 shows an example of a base station
20 with multiple transmit antennas 23, that is transmitting in MU-MIMO mode to multiple UEs 31, 32 and 33. As shown in figure 3 different layer 34, 35 and 36 is transmitted to each UE 31, 32 and 33. As illustrated in figure 3 each UE is also transmitting to the base station 20 using different layers.

In the Long Term Evolution (LTE) standardization process, there is agreement
20 on the support of SU-MIMO and MU-MIMO in the downlink and that there will be the possibility to semi-statically switch between these two modes. Each UE (user/receiver) can in the MU-MIMO mode receive zero or one layer. There are basically three proposals for MU-MIMO support under discussion:

- 25 1. Classical space-division multiple access (SDMA) for correlated antenna array setups described in 3GPP R1-072464, "*MU-MIMO for E-UTRA DL*", Ericsson, TSG-RAN WG1 #49, May 2007 .
2. Zero-forcing beamforming described in 3GPP R1-071510, "Details of Zero-Forcing MU-MIMO for DL E-UTRA", Freescale Semiconductor
30 Inc, TSG RAN WG1 #48bis, March 2007.

3. Per user unitary rate control (PU2RC) described in 3GPP R1-060335, "Downlink MIMO for EUTRA", Samsung, TSG RAN WG1 #44, Feb 2006 .

5 It has not yet been decided which scheme to support and many remaining details of the standardization of MU-MIMO are hence lacking. One problem that occur regardless of MU-MIMO mode is how the UE is to know the power offset between a power reference like for instance reference symbols (RS) and data symbols transmitted to the UE. The base station has a certain transmit power of
10 which a certain amount is used to transmit data symbols to a particular UE. The power offset indicates how much power that is used to transmit the data symbols in relation to the power reference. This power offset is needed in order to support efficient demodulation in the UE when higher order modulation alphabets like 16 QAM or other higher order modulation schemes are used. The
15 power offset can vary dynamically because of different power settings at the base station also referred to as Node B or eNode B. In case of MU-MIMO, the power offset can however also fluctuate because of a varying number of multiplexed UEs on the same physical resource. The available transmission power may for example be equally divided among UEs scheduled on different
20 layers in the MU-MIMO mode, meaning less power per UE when several UEs are multiplexed.

SUMMARY

It is therefore an object of the present invention to provide an improved solution for
25 MU-MIMO signaling in a telecommunication system for obviating at least some of the above mentioned problems. The inventive solution to this end intends to enable reuse of SU-MIMO functionality as much as possible in order to support MU-MIMO operation and to reinterpret any signaling in SU-MIMO mode that is not needed for MU-MIMO.

More specifically a first aspect of the present invention relates to a method for Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling from Multiple-Input-Multiple-Output MIMO antennas of a base station to one of a plurality of mobile terminals of a communication system, where the mobile terminal is configured for both Single User and Multi User Multiple-Input-Multiple-Output (SU-MIMO and MU-MIMO) signaling modes. The mobile terminal is also configured to switch between the modes, wherein the modes have partly shared signaling. A first step of the method comprises identifying SU-MIMO signaling, which is redundant for the MU-MIMO mode. A second step in the method comprises reinterpreting bits of the redundant signaling to comprise signaling information, associated with MU-MIMO mode. A third step in the method is to inform the UE via signaling about the reinterpretation of the redundant bits. The method further comprises a fourth step of signaling information associated with MU-MIMO mode by using the reinterpreted redundant bits.

15

A second aspect of the present invention relates to a radio base station in a communication system comprising Multiple-Input-Multiple-Output (MIMO) antennas for signaling to one of a plurality of mobile terminals and configured to both Single User and Multi User Multiple-Input-Multiple-Output (SU-MIMO and MU-MIMO) signaling modes, where the base station comprises means for switching between the modes. The modes having partly shared signaling and the base station further comprises, a signaling mode comparator means for identifying, SU-MIMO mode signaling which is redundant for MU-MIMO mode. A reinterpreting means is also present for reinterpreting bits of the redundant signaling to comprise signaling information, associated with MU-MIMO mode. Further means in the base station is a transmitter means for informing via signaling to the UE about the reinterpretation of the redundant bits and signaling information associated with MU-MIMO mode by using the reinterpreted redundant bits.

30

A third aspect of the present invention relates to a mobile terminal comprising Multiple-Input-Multiple-Output (MIMO) antennas configured for both Single User and Multi User Multiple-Input-Multiple-Output (SU-MIMO and MU-MIMO) signaling modes wherein the mobile terminal comprises means for switching between the modes, the modes having partly shared signaling. The mobile terminal further comprises a receiver means for receiving from the base station information about a reinterpretation of redundant SU-MIMO bits. By using the receiver means, the mobile terminal also receives signaling information associated with MU-MIMO mode by receiving the reinterpreted redundant bits. There is also means for interpreting the reinterpreted redundant bits using the information about the reinterpretation of redundant SU-MIMO bits.

The invention has the advantage of enabling simpler implementation and fewer options in the communication system. The latter is particularly important for facilitating testing that equipment complies with standard. By possibly using codebook subset restriction in combination with intentionally scheduling several terminals or UEs on the same physical resources (resource elements), MU-MIMO can be efficiently supported, at least for SDMA (Space Division Multiple Access) and correlated antenna arrays, when the terminals or UEs are informed of the power offset between the power reference and own data symbols.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a cellular telecommunication system wherein the present invention may be implemented.

5 Fig. 2 illustrates a base station operating in SU-MIMO mode.

Fig. 3 illustrates a base station operating in MU-MIMO mode.

Fig. 4 illustrates bits used for signaling in SU-MIMO mode and MU-MIMO mode.

Fig. 5 illustrates a method according to embodiments of the present invention.

Fig. 6 illustrates a base station according to embodiments of the present invention.

10 Fig. 7 illustrates a mobile terminal according to embodiments of the present invention.

DETAILED DESCRIPTION

The foregoing and other objects, features and advantages of the invention will be
15 apparent from the following detailed description of preferred embodiments.

The present invention relates to a cellular telecommunication system as illustrated in fig. 1. The present invention sets forth a method and arrangements for Multi User Multiple-Input-Multiple-Output signaling in a telecommunication system. The basic
20 idea of the present invention is to utilize the fact that MU-MIMO and SU-MIMO share many similarities. However they are currently classified as two quite different modes, but there is a lot to gain from exploiting the commonality between the two modes for reducing the number of signaling options. This would not only mean simpler implementation of transmitters and receivers but it will also facilitate testing
25 of equipment to ensure that it fulfills the standard.

When transmitting in SU-MIMO mode or MU-MIMO mode a precoding matrix needs to be selected by the base station for the transmission. According to 3GPP standard

the precoding matrix shall be selected from precoding matrices in a 3GPP standard code book. Each UE recommends, among the precoding matrixes in the codebook, a subset of precoding matrix from the codebook to be used by the Node B in possible subsequent downlink transmissions. Based on e.g. the antenna configuration of the
5 base station the base station can further confine the precoding matrices selection in the UE to a subset of the precoding matrices in the codebook. This technique is called codebook subset restriction. Using code book subset restriction means that the base station has to signal fewer alternative precoding matrices to the UE from which the UE can recommend one to the base station.

10

By utilizing the agreed working assumption of codebook subset restriction, almost everything from SU-MIMO mode can be reused for MU-MIMO mode as long as it is not explicitly forbidden to schedule multiple terminals or UEs on the same physical resource. One thing that needs to be added to the MU-MIMO
15 mode is informing the UE at a fast rate about the previously mentioned power offset between its data symbols and the power reference. This minor modification seems at least sufficient for SDMA for correlated antenna arrays and a number of related setups. An alternative to signaling the power offset to the UEs, is to signal the total number of multiplexed UEs.

20

The present invention adds support for MU-MIMO mode signaling such as power offset signaling by utilizing SU-MIMO signaling (i.e. bits) that is not needed for MU-MIMO operation and let them be re-interpreted as MU-MIMO mode signaling information such as the power offset signaling. Note that the
25 signaled power offset can be relative to other varying power offset levels such as data to pilot power ratios and/or measurement power offsets. The transmission rank, i.e. the number of transmitted layers is one example of such unused SU-MIMO signaling since the MU-MIMO mode only needs to support a limited transmission rank per UE. Bits used for precoding matrices not needed because
30 of e.g. application of codebook subset restriction can also be reused/reinterpreted.

Taking four transmitting antennas at the NodeB as an example, signaling of the transmission rank in SU-MIMO mode requires essentially two bits. The transmission rank is signaled in the downlink whenever the UE is scheduled, i.e. possibly for each sub frame. These bits can be reused when transmitting in MU-MIMO mode to e.g. indicate a four-level power offset instead of the transmission rank. The same or a different granularity between the power offset steps may be used. In the simplest case, the power offsets correspond to the factors $1/4$, $1/3$, $1/2$ and 1 corresponding to four, three, two and one multiplexed UEs respectively. This would for example be applicable to a scenario using Space Division Multiple Access (SDMA) with eight beamformers and a uniform linear array (ULA) having 0.5 wavelength element spacing, since this antenna configuration makes it possible to multiplex up to four UEs on the physical resources.

15

Similarly, for the case with two transmitting antennas up to two UEs can be multiplexed in MU-MIMO mode and there is hence a need to signal power offset factors $1/2$ and 1 . In the case of correlated SDMA, four different beamforming/precoding matrices are typically needed, since the other precoding matrices in the 2 Tx LTE codebook are not relevant for this antenna configuration. The 2 Tx codebook in LTE has totally nine elements, which means that five of the elements never need to be signaled to the UE.

20

As illustrated in fig. 4 four bits 40 are reserved in SU-MIMO mode for signaling from the base station to the UE which precoding matrix that the UE should choose from. In the case of MU-MIMO mode only two bits 41 are needed for signaling to the UE which precoding matrix that the UE should choose from. In MU-MIMO mode the two bits 42 are therefore redundant and may therefore be used to signal the power offset to the UE.

25

30

A 4 Tx NodeB antenna setup divided into two pairs of cross-polarized antennas is another important scenario that may be beneficial for MU-MIMO operation. If the antenna pairs are spaced 0.5 wavelengths apart, it is possible to perform correlated beamforming to separate the users and to utilize the two orthogonal polarizations for supporting up to two layer transmission for each UE. The 4 Tx SU-MIMO codebook has been concluded in the LTE standardization process, to contain 16 elements per transmission rank (number of transmitted layers). A minimal codebook for MU-MIMO in the considered setup would need four precoder elements when implementing 2 Tx beamforming on each polarization for single layer transmission and two precoder elements for dual layer transmission. For single rank transmission, a two bit power scaling offset is needed while for dual layer transmission, only a single bit power scaling is needed. This leads to a total of $4*4+2*2=20$ combinations, which fit well into the 64 different combinations of precoder elements and rank in the current SU-MIMO codebook. The power offset may be combined with other, possibly dynamically varying, power offsets to form the overall power ratio.

Referring to figure 5, one aspect of the present invention relates to a method in a radio base station in a communication system for Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling via Multiple-Input-Multiple-Output (MIMO) antennas between the base station and one of a plurality of multiplexed mobile terminals supporting both Single User and Multi User Multiple-Input-Multiple-Output (SU-MIMO and MU-MIMO) signaling modes. The MU-MIMO modes can for instance be SDMA, zero-forcing beamforming or per user unitary rate control (PU2RC). The communication system supports switching between the modes which also have partly shared signaling. The method, which is shown in the flowchart in figure 5, comprises the steps of:

501 Identify SU-MIMO mode signaling which is redundant, i.e. not needed, for a MU-MIMO mode signaling.

502 Re-interpret or re-define bits i.e. data bits, of the identified redundant signaling to comprise signaling information, associated with MU-MIMO mode,

503 Inform the UE about the reinterpretation of the redundant bits,

5 504 Signal information associated with MU-MIMO mode by using said reinterpreted redundant bits.

In one embodiment of the method according to the present invention, the redundant SU-MIMO mode signaling relates to transmission rank signaling and precoder element signaling. According to one embodiment of the method according to the present invention the identified redundant SU-MIMO mode signaling information is reinterpreted to comprise a power offset between a power reference and data symbols of said one terminal. The power reference can for instance be reference symbols. The identified redundant signaling information can also in another embodiment be reinterpreted to comprise the total number of the multiplexed terminals. The reinterpreted MU-MIMO mode bits may be signaled whenever the terminal is scheduled.

Another aspect of the present invention relates to a radio base station 60 in a communication system. The base station 60, which is shown in figure 6, has Multiple-Input-Multiple-Output (MIMO) antennas 65 for enabling signaling to at least one of a plurality of multiplexed mobile terminals (not shown) and supports both Single User and Multi User Multiple-Input-Multiple-Output (SU-MIMO and MU-MIMO) signaling modes. The modes may be SDMA for correlated antenna arrays setups, zero-forcing beamforming or per user unitary rate control (PU2RC) or other MU-MIMO modes. The base station further comprises means 61 for switching between said modes and signaling mode comparator means 62 for identifying redundant SU-MIMO mode signaling that can be reinterpreted to be used with MU-MIMO mode. The redundant SU-MIMO mode signaling can for instance relate to transmission rank signaling and/or precoder element signaling. The radio base station 60 also has reinterpreting means 63 for redefining bits of the redundant signaling to comprise signaling information, associated with the MU-MIMO mode. The MU-MIMO

signaling information may comprise a power offset between a power reference (e.g. reference symbols (RS)) and the power used to transmit data symbols. Alternatively the MU-MIMO signaling information comprises the total number of multiplexed terminals. The base station also comprises transmitter means 64 for informing the UE
5 about the reinterpretation of the redundant bits and signaling information associated with MU-MIMO mode by using the reinterpreted redundant bits. The MU-MIMO mode signaling information could for instance be the power offset or the number of terminals that are multiplexed on the physical resource.

10 Yet another aspect of the present invention relates to mobile terminal 70. The mobile terminal 70, which is shown in figure 7, has Multiple-Input-Multiple-Output (MIMO) antennas 74 and supports both Single User and Multi User Multiple-Input-Multiple-Output (SU-MIMO and MU-MIMO) signaling modes. The modes may be SDMA for correlated antenna arrays setups, zero-forcing beamforming or per user unitary rate
15 control (PU2RC) or other MU-MIMO modes. The mobile terminal 70 further comprises means 71 for switching between the modes. Redundant SU-MIMO mode signaling can for instance relate to transmission rank signaling and/or precoder element signaling. Receiver means 72 is also provided in the mobile terminal 70 for receiving from a base station (not shown) information about a reinterpretation of
20 redundant SU-MIMO bits. The receiver means 72 is further configured to receive signaling information associated with MU-MIMO mode by receiving the reinterpreted redundant bits. The MU-MIMO signaling information may comprise a power offset between a power reference (e.g. reference symbols (RS)) and the power used to transmit data symbols. Alternatively, the MU-MIMO signaling information may
25 comprise the total number of multiplexed terminals. The mobile terminal also comprises means 75 for interpreting the received reinterpreted redundant bits using the information about the reinterpretation of redundant SU-MIMO bits.

30 The invention herein disclosed provides significant advantages by proposing a way for supporting MU-MIMO by reusing as much as possibly of the signaling

functionality from SU-MIMO mode. By using codebook subset restriction in combination with intentionally scheduling several UEs on the same physical resources (resource elements), MU-MIMO can be efficiently supported, at least for SDMA and correlated antenna arrays, when the UEs are informed at a high
5 rate about the power offset between the power reference and own data symbols.

The invention is however not limited to SDMA and correlated antenna arrays as it may be applicable regardless of MU-MIMO mode.

The high reuse of signaling enables simpler implementation and provides fewer options in the system. The latter is particularly important for facilitating testing
10 that equipment complies with standard.

Note that although terminology from 3GPP LTE has been used in this disclosure to exemplify the invention, this should not be seen as limiting the scope of the invention to only the aforementioned system. Other wireless systems may also
15 benefit from exploiting the ideas covered within this disclosure. Furthermore, the invention is not necessarily restricted to downlink as it may be applicable for uplink transmission techniques as well.

Means mentioned in the present description can be software means, hardware means or a combination of both.

20 While the present invention has been described with respect to particular embodiments (including certain device arrangements and certain orders of steps within various methods), those skilled in the art will recognize that the present invention is not limited to the specific embodiments described and illustrated herein. Therefore, it is to be understood that this disclosure is only illustrative.
25 Accordingly, it is intended that the invention be limited only by the scope of the claims appended hereto.

CLAIMS

1. A method for a base station for Multi User Multiple-Input-Multiple-Output, MU-MIMO, signaling from Multiple-Input-Multiple-Output, MIMO, antennas of a base station to one of a plurality of mobile terminals of a communication system configured for both Single User Multiple-Input-Multiple-Output, SU-MIMO, and Multi User Multiple-Input-Multiple-Output, MU-MIMO, signaling modes and configured to switch between said modes, wherein said modes have partly shared signaling, the method comprising:

identifying SU-MIMO signaling, which is redundant for the MU-MIMO mode, and reinterpreting bits of said redundant signaling to comprise signaling information, associated with MU-MIMO mode,

informing the mobile terminal via signaling about the reinterpretation of the redundant bits; and

signaling information associated with MU-MIMO mode by using said reinterpreted redundant bits.

2. A method according to claim 1, wherein the redundant signaling relates to transmission rank signaling and/or precoder element signaling.

3. A method according to claim 1 or 2, wherein said MU-MIMO signaling information comprises a power offset between a power reference and data symbols.

4. A method according to claim 3, wherein said power reference is reference symbols, RS.

5. A method according to claim 1 or 2, wherein said MU-MIMO signaling information comprises a total number of terminals.

6. A method according to any one of claims 1 to 5, wherein said reinterpreted redundant bits are signaled whenever the terminal is scheduled.

7. A radio base station in a communication system comprising Multiple-Input-Multiple-Output, MIMO, antennas for signaling to one of a plurality of mobile terminals and configured for both Single User Multiple-Input-Multiple-Output, SU-MIMO, and Multi User Multiple-Input Multiple-Output, MU-MIMO, signaling modes, wherein said base station comprises means for switching between said modes, said modes having partly shared signaling, and wherein said base station further comprises:

a signaling mode comparator means for identifying, SU-MIMO mode signaling which is redundant for MU-MIMO mode,

a reinterpreting means for reinterpreting bits of said redundant signaling to comprise signaling information associated with MU-MIMO mode,

a transmitter means for informing the UE about the reinterpretation of the redundant bits and signaling information associated with MU-MIMO mode by using said reinterpreted redundant bits.

8. A radio base station according to claim 7, wherein the redundant signaling relates to transmission rank signaling and/or precoder element signaling.

9. A radio base station according to claim 7 or 8, wherein said MU-MIMO signaling information comprises a power offset between a power reference and data symbols of said one terminal.

10. A radio base station according to claim 9, wherein said power reference is reference symbols, RS.

11. A radio base station according to claim 7 or 8, wherein said MU-MIMO signaling information comprises a total number of terminals.

12. A mobile terminal comprising Multiple-Input-Multiple-Output, MIMO, antennas configured for both Single User Multiple-Input-Multiple-Output, SU-MIMO, and Multi User Multiple Input-Multiple-Output, MU-MIMO, signaling modes wherein said mobile terminal comprises means for switching between said modes, said modes having partly shared signaling, and wherein said mobile terminal further comprises:

a receiver means for receiving from the base station:

information about a reinterpretation of redundant SU-MIMO bits; and

signaling information associated with MU-MIMO mode by receiving said reinterpreted redundant bits,

means for interpreting said reinterpreted redundant bits by using the information about the reinterpretation of redundant SU-MIMO bits.

13. A mobile terminal according to claim 12, wherein the redundant signaling relates to transmission rank signaling and/or precoder element signaling.

14. A mobile terminal according to claim 12 or 13, wherein said MU-MIMO signaling information comprises a power offset between a power reference and data symbols of said one mobile terminal.

15. A mobile terminal according to claim 14, wherein said power reference is reference symbols, RS.

16. A mobile terminal according to claim 12 or 13, wherein said MU-MIMO signaling information comprises a total number of terminals.

17. A method for signaling a mobile terminal configured for both Single-User MIMO (SU-MIMO) and Multi-User MIMO (MU-MIMO) signaling modes, the method comprising:
 - identifying a data bit configured to be transmitted to the mobile terminal in a SU-MIMO bit stream, wherein the SU-MIMO bit stream comprises a plurality of bits configured to be interpreted by the mobile terminal in the SU-MIMO signaling mode, and wherein the identified data bit is not required in the MU-MIMO signaling mode;
 - redefining the identified data bit to comprise power offset signaling data associated with the MU-MIMO signaling mode;
 - generating redefinition data, wherein the redefinition data is configured to cause the mobile terminal to interpret the identified data bit as the power offset signaling data associated with the MU-MIMO signaling mode;
 - transmitting the redefinition data to the mobile terminal; and
 - transmitting a bit stream comprising the identified data bit to the mobile terminal using the MU-MIMO mode.
18. The method of claim 17, wherein the identified data bit relates to at least one of a transmission rank or a precoder element in the SU-MIMO signaling mode.
19. The method of claim 17, wherein the power offset signaling data associated with the MU-MIMO signaling mode signals a power offset.
20. The method of claim 19, wherein the power offset is between a power reference and a data symbol transmit power.
21. The method of claim 17, wherein the bit stream comprising the identified data bit is transmitted when the mobile terminal is scheduled.
22. A radio base station configured to transmit data in a Single-User MIMO (SU-MIMO) signaling mode and a Multi-User MIMO (MU-MIMO) signaling mode to a mobile terminal, comprising:
 - a controller configured to switch the radio base station between the SU-MIMO and MU-MIMO signaling modes;
 - a processor configured to:
 - identify a data bit configured to be transmitted to the mobile terminal in a SU-MIMO bit stream, wherein the SU-MIMO bit stream comprises a plurality of bits configured to be interpreted by the mobile terminal in the SU-MIMO signaling mode, and wherein the identified data bit is not required in the MU-MIMO signaling mode;
 - redefine the identified data bit to comprise power offset signaling data associated with the MU-MIMO signaling mode; and

generate redefinition data, wherein the redefinition data is configured to cause the mobile terminal to interpret the identified data bit as the power offset signaling data associated with the MU-MIMO signaling mode; and

a transmitter configured to:

transmit the redefinition data to the mobile terminal; and

transmit a bit stream comprising the identified data bit to the mobile terminal using the MU-MIMO mode.

23. The radio base station of claim 22, wherein the identified data bit relates to at least one of a transmission rank or a precoder element in the SU-MIMO signaling mode.

24. The radio base station of claim 22, wherein the signaling data associated with the MU-MIMO signaling mode signals a power offset.

25. The radio base station of claim 24, wherein the power offset is between a power reference and a data symbol transmit power.

26. A mobile terminal configured to receive data in a Single-User MIMO (SU-MIMO) signaling mode and a Multi-User MIMO (MU-MIMO) signaling mode, comprising:

a controller configured to switch the mobile terminal between the SU-MIMO and MU-MIMO signaling modes;

a receiver configured to:

receive redefinition data from a base station, wherein the base station is configured to:

identify a data bit configured to be transmitted to the mobile terminal in a SU-MIMO bit stream, wherein the SU-MIMO bit stream comprises a plurality of bits configured to be interpreted by the mobile terminal in the SU-MIMO signaling mode, and wherein the identified data bit is not required in the MU-MIMO signaling mode; and

redefine the identified data bit to comprise signaling data associated with the MU-MIMO signaling mode, wherein the redefinition data is configured to cause the mobile terminal to interpret the identified data bit as power offset signaling data associated with the MU-MIMO signaling mode; and

receive a bit stream comprising the identified data bit at the mobile terminal using the

MU-MIMO mode; and

a processor configured to interpret the identified data bit as the power offset signaling data associated with the MU-MIMO signaling mode based on the received redefinition data.

27. The mobile terminal of claim 26, wherein the identified data bit relates to at least one of a transmission rank or a precoder element in the SU-MIMO signaling mode.

28. The mobile terminal of claim 26, wherein the power offset signaling data associated with the MU-MIMO signaling mode signals a power offset.
29. The mobile terminal of claim 28, wherein the power offset is between a power reference and a data symbol transmit power.
30. A method for operating a mobile terminal configured to receive data in a Single-User MIMO (SU-MIMO) signaling mode and a Multi-User MIMO (MU-MIMO) signaling mode, and to switch the mobile terminal between the SU-MIMO and MU-MIMO signaling modes, the method comprising:
- receiving redefinition data from a base station, wherein the base station is configured to:
 - identify a data bit configured to be transmitted to the mobile terminal in a SU-MIMO bit stream, wherein the SU-MIMO bit stream comprises a plurality of bits configured to be interpreted by the mobile terminal in the SU-MIMO signaling mode, and wherein the identified data bit is not required in the MU-MIMO signaling mode; and
 - redefine the identified data bit to comprise signaling data associated with the MU-MIMO signaling mode, wherein the redefinition data is configured to cause the mobile terminal to interpret the identified data bit as power offset signaling data associated with the MU-MIMO signaling mode; and
 - receiving a bit stream comprising the identified data bit at the mobile terminal using the MU-MIMO mode; and
 - interpreting the identified data bit as the power offset signaling data associated with the MU-MIMO signaling mode based on the received redefinition data.
31. The method of claim 30, wherein the identified data bit relates to at least one of a transmission rank or a precoder element in the SU-MIMO signaling mode.
32. The method of claim 30, wherein the power offset signaling data associated with the MU-MIMO signaling mode signals a power offset.
33. The method of claim 32, wherein the power offset is between a power reference and a data symbol transmit power.
34. A communication system configured for both Single User Multiple-Input-Multiple-Output, SU-MIMO, and Multi-User Multiple-Input-Multiple-Output, MU-MIMO, signaling modes and configured to switch between said modes, wherein said modes have partly shared signaling, the system comprising a base station with means for carrying out the steps of a method as claim in any one of claims 17 to 21, and

at least one mobile terminal with means for carrying out the steps of a method as claims in any one of claims 30 to 33.

35. A method of signaling a mobile terminal from a base station, the mobile terminal being operable in Single User Multiple-Input-Multiple-Output (SU-MIMO) mode and Multi User Multiple-Input-Multiple-Output (MU-MIMO) mode, the method comprising:

identifying a subset of SU-MIMO signaling bits associated with SU-MIMO signaling that is not needed in the MU-MIMO mode;

redefining the subset of SU-MIMO signaling bits to be associated with MU-MIMO signaling;

informing the UE about the redefinition of the subset of SU-MIMO signaling bits; and

signaling the mobile terminal in the MU-MIMO mode using MU-MIMO signaling bits, the MU-MIMO signaling bits comprising the redefined subset of SU-MIMO signaling bits.

36. The method of claim 35, wherein the SU-MIMO and MU-MIMO modes have partly shared signaling.

37. The method of claim 35, wherein the subset of SU-MIMO signaling bits is associated with transmission rank signaling and/or precoder element signaling, in the SU-MIMO signaling bits.

38. The method of claim 35, wherein the redefined subset of SU-MIMO signaling bits is associated with a power offset in the MU-MIMO signaling bits.

39. The method of claim 38, wherein the power offset is between a power reference and data symbols.

40. The method of claim 39, wherein said power reference is reference symbols (RS).

41. The method of claim 35, comprising signaling the mobile terminal in the MU-MIMO mode using the MU-MIMO signaling bits whenever the mobile terminal is scheduled.

42. A base station comprising:

Multiple-Input-Multiple-Output (MIMO) antennas for signaling a mobile terminal;

a signaling mode comparator configured to identify a subset of SU-MIMO signaling bits associated with SU-MIMO signaling that is not needed in the MU-MIMO mode;

a reinterpreter configured to redefine the subset of SU-MIMO signaling bits to be associated with MU-MIMO signaling;

a transmitter configured to:

inform the UE about the redefinition of the subset of SU-MIMO signaling bits; and

signal the mobile terminal in the MU-MIMO mode using MU-MIMO signaling bits, the MU-MIMO signaling bits comprising the redefined subset of SU-MIMO signaling bits.

43. The base station of claim 42, wherein the SU-MIMO and MU-MIMO modes have partly shared signaling.

44. The base station of claim 42, wherein the subset of SU-MIMO signaling bits is associated with transmission rank signaling and/or precoder element signaling, in the SU-MIMO signaling bits.

45. The base station of claim 42, wherein the redefined subset of SU-MIMO signaling bits is associated with a power offset in the MU-MIMO signaling bits.

46. The base station of claim 45, wherein the power offset is between a power reference and data symbols.

47. The base station of claim 46, wherein said power reference is reference symbols (RS).

48. The base station of claim 42, wherein the transmitter is configured to signal the mobile terminal in the MU-MIMO mode using the MU-MIMO signaling bits whenever the mobile terminal is scheduled.

49. A method for a mobile terminal operable in Single User Multiple-Input-Multiple-Output (SU-MIMO) mode and Multi User Multiple-Input-Multiple-Output (MU-MIMO) mode, the method comprising the steps of:

receiving information from a base station, the information redefining a subset of SU-MIMO signaling bits to be associated with MU-MIMO signaling, the subset of SU-MIMO signaling bits having been identified by the base station as being associated with SU-MIMO signaling that is not needed in the MU-MIMO mode;

receiving MU-MIMO signaling bits in the MU-MIMO mode, the MU-MIMO signaling bits comprising the redefined subset of SU-MIMO signaling bits; and

interpreting said received redefined subset of SU-MIMO signaling bits in the MU-MIMO mode based on the received information.

50. The method of claim 49, wherein the SU-MIMO and MU-MIMO modes have partly shared signaling.

51. The method of claim 49, wherein the subset of SU-MIMO signaling bits is associated with transmission rank signaling and/or precoder element signaling, in the SU-MIMO signaling bits.
52. The method of claim 49, wherein the redefined subset of SU-MIMO signaling bits is associated with a power offset in the MU-MIMO signaling bits.
53. The method of claim 52, wherein the power offset is between a power reference and data symbols.
54. The method of claim 53, wherein said power reference is reference symbols (RS).
55. The method of claim 49, comprising receiving the MU-MIMO signaling bits in the MU-MIMO mode whenever the mobile terminal is scheduled.
56. A mobile terminal configured to operate in Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes, the mobile terminal comprising:
 - a receiver configured to receive from the base station:
 - information redefining a subset of SU-MIMO signaling bits to be associated with MU-MIMO signaling, the subset of SU-MIMO signaling bits having been identified by the base station as being associated with SU-MIMO signaling that is not needed in the MU-MIMO mode;
 - and
 - MU-MIMO signaling bits in the MU-MIMO mode, the MU-MIMO signaling bits comprising the redefined subset of SU-MIMO signaling bits; and
 - an interpreter configured to interpret said received redefined subset of SU-MIMO signaling bits in the MU-MIMO mode based on the received information.
57. The mobile terminal of claim 56, wherein the SU-MIMO and MU-MIMO modes have partly shared signaling.
58. The mobile terminal of claim 56, wherein the subset of SU-MIMO signaling bits is associated with transmission rank signaling and/or precoder element signaling, in the SU-MIMO signaling bits.
59. The mobile terminal of claim 56, wherein the redefined subset of SU-MIMO signaling bits is associated with a power offset in the MU-MIMO signaling bits.
60. The mobile terminal of claim 59, wherein the power offset is between a power reference and data symbols.

61. The mobile terminal of claim 60, wherein said power reference is reference symbols (RS).
62. The mobile terminal of claim 56, wherein the receiver is configured to receive the MU-MIMO signaling bits in the MU-MIMO mode whenever the mobile terminal is scheduled.
63. A communication system configured for both Single User Multiple-Input-Multiple-Output, SU-MIMO, and Multi-User Multiple-Input-Multiple-Output, MU-MIMO, signaling modes and configured to switch between said modes, wherein said modes have partly shared signaling, the system comprising a base station with means for carrying out the steps of a method as claim in any one of claims 35 to 41, and at least one mobile terminal with means for carrying out the steps of a method as claims in any one of claims 49 to 55.
64. A method for a base station for Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling from Multiple-Input-Multiple-Output (MIMO) antennas of a base station to one of a plurality of mobile terminals of a communication system configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi User Multiple-Input-Multiple-Output (MU-MIMO), signaling modes and configured to switch between said modes, wherein said modes have partly shared signaling, the method comprising:
- identifying SU-MIMO signaling, which is redundant for the MU-MIMO mode, and redefining bits of said redundant signaling to comprise signaling information, associated with MU-MIMO mode,
 - informing the mobile terminal via signaling about the redefinition of the redundant bits; and
 - signaling information associated with MU-MIMO mode by using said redefined redundant bits.
65. The method of claim 64, wherein the redundant signaling relates to transmission rank signaling and/or precoder element signaling.
66. The method of claim 64 or 65, wherein said MU-MIMO signaling information comprises a power offset between a power reference and data symbols.
67. The method of claim 66, wherein said power reference is reference symbols (RS).
68. The method of claim 64 or 65, wherein said MU-MIMO signaling information comprises a total number of terminals.
69. The method of any one of claims 64 to 68, wherein said redefined redundant bits are signaled whenever the terminal is scheduled.

70. A radio base station in a communication system comprising Multiple-Input-Multiple-Output (MIMO) antennas for signaling to one of a plurality of mobile terminals and configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes, wherein said base station comprises means for switching between said modes, said modes having partly shared signaling, and wherein said base station further comprises:

a signaling mode comparator means for identifying SU-MIMO mode signaling which is redundant for MU-MIMO mode,

a redefining means for redefining bits of said redundant signaling to comprise signaling information, associated with MU-MIMO mode,

a transmitter means for informing the UE about the redefinition of the redundant bits and signaling information associated with MU-MIMO mode by using said redefined redundant bits.

71. The radio base station of claim 70, wherein the redundant signaling relates to transmission rank signaling and/or precoder element signaling.

72. The radio base station of claim 70 or 71, wherein said MU-MIMO signaling information comprises a power offset between a power reference and data symbols of said one terminal.

73. The radio base station of claim 72, wherein said power reference is reference symbols (RS).

74. The radio base station of claim 70 or 71, wherein said MU-MIMO signaling information comprises a total number of terminals.

75. A mobile terminal comprising Multiple-Input-Multiple-Output (MIMO), antennas configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes wherein said mobile terminal comprises means for switching between said modes, said modes having partly shared signaling, and wherein said mobile terminal further comprises:

a receiver means for receiving from the base station:

information about a redefinition of redundant SU-MIMO bits; and

signaling information associated with MU-MIMO mode by receiving said redefined redundant bits,

means for interpreting said redefined redundant bits by using the information about the redefinition of redundant SU-MIMO bits.

76. The mobile terminal of claim 75, wherein the redundant signaling relates to transmission rank signaling and/or precoder element signaling.

77. The mobile terminal of claim 75 or 76, wherein said MU-MIMO signaling information comprises a power offset between a power reference and data symbols of said one mobile terminal.

78. The mobile terminal of claim 77, wherein said power reference is reference symbols, RS.

79. The mobile terminal of claim 75 or 76, wherein said MU-MIMO signaling information comprises a total number of terminals.

80. A method for operating a mobile terminal comprising Multiple-Input-Multiple-Output (MIMO) antennas configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes wherein said mobile terminal comprises means for switching between said modes, said modes having partly shared signaling, the method comprising:

receiving from the base station:

information about a redefinition of redundant SU-MIMO bits; and

signaling information associated with MU-MIMO mode by receiving said redefined redundant bits,

interpreting said redefined redundant bits by using the information about the redefinition of redundant SU-MIMO bits.

81. The method of claim 80, wherein the redundant signaling relates to transmission rank signaling and/or precoder element signaling.

82. The method of claim 80 or 81, wherein said MU-MIMO signaling information comprises a power offset between a power reference and data symbols of said one mobile terminal.

83. The method of claim 82, wherein said power reference is reference symbols (RS).

84. The method of claim 80 or 81, wherein said MU-MIMO signaling information comprises a total number of terminals.

85. A communication system configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi-User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes and configured to switch between said modes, wherein said modes have partly shared signaling, the system comprising a base station with means for carrying out the steps of a method as claim in any one of claims 64 to 69, and at least one mobile terminal with means for carrying out the steps of a method as claims in any one of claims 80 to 84.

86. A method for a base station for Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling from Multiple-Input-Multiple-Output (MIMO) antennas of a base station to one of a plurality of mobile terminals of a communication system configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi-User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes and configured to switch between said modes, wherein said modes have partly shared signaling, the method comprising:

redefining precoder element signaling associated with SU-MIMO mode to comprise power offset signaling information associated with MU-MIMO mode, the precoder element signaling for the SU-MIMO mode being redundant for the MU-MIMO mode;

informing the mobile terminal via signaling about the redefinition of the redundant precoder element signaling; and

signaling power offset signaling information associated with MU-MIMO mode by using said redefined redundant precoder element signaling.

87. The method of claim 86, wherein said power offset signaling information associated with MU-MIMO mode comprises a power offset between a power reference and data symbols.

88. The method of claim 87, wherein said power reference is reference symbols (RS).

89. The method of any one of claims 86 to 88, wherein said redefined redundant precoder element signaling is signaled when the terminal is scheduled.

90. A method for a mobile terminal comprising Multiple-Input-Multiple-Output (MIMO) antennas configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes and configured for switching between said modes, wherein said modes have partly shared signaling, the method comprising:

receiving from a base station:

information about a redefinition of precoder element signaling associated with SU-MIMO mode which is redundant in MU-MIMO mode; and

signaling information associated with MU-MIMO mode by receiving said redefined precoder element signaling as power offset signaling information associated with MU-MIMO mode, and

interpreting said redefined precoder element signal as power offset signaling information associated with MU-MIMO mode by using the information about the redefinition of redundant precoder element signaling.

91. The method of claim 90, wherein said power offset signaling information associated with MU-MIMO mode comprises a power offset between a power reference and data symbols.

92. The method of claim 91, wherein said power reference is reference symbols (RS).
93. The method of any one of claims 90 to 92, wherein said redefined redundant precoder element signaling is received when the terminal is scheduled.
94. A radio base station for Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling from Multiple-Input-Multiple-Output (MIMO) antennas of a base station to one of a plurality of mobile terminals of a communication system configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi-User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes, wherein said modes have partly shared signaling, base station comprising:
- a controller configured to switch the radio base station between the SU-MIMO and MU-MIMO signaling modes;
 - a processor configured to:
 - redefine precoder element signaling associated with SU-MIMO mode to comprise power offset signaling information associated with MU-MIMO mode, the precoder element signaling for the SU-MIMO mode being redundant for the MU-MIMO mode;
 - inform the mobile terminal via signaling about the redefinition of the redundant precoder element signaling; and
 - signal power offset signaling information associated with MU-MIMO mode by using said redefined redundant precoder element signaling.
95. The base station of claim 94, wherein said power offset signaling information associated with MU-MIMO mode comprises a power offset between a power reference and data symbols.
96. The base station of claim 95, wherein said power reference is reference symbols (RS).
97. The base station of any one of claims 94 to 96, wherein said redefined redundant precoder element signaling is signaled when the terminal is scheduled.
98. A mobile terminal comprising Multiple-Input-Multiple-Output (MIMO) antennas configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes, said modes having partly shared signaling, the mobile terminal comprising:
- a controller configured to switch the mobile terminal between the SU-MIMO and MU-MIMO signaling modes;
 - a receiver configured to receive from a base station:

information about a redefinition of precoder element signaling associated with SU-MIMO mode which is redundant in MU-MIMO mode; and

signaling information associated with MU-MIMO mode by receiving said redefined precoder element signaling as power offset signaling information associated with MU-MIMO mode,

the controller being configured to interpret said redefined precoder element signal as power offset signaling information associated with MU-MIMO mode by using the information about the redefinition of redundant precoder element signaling.

99. The mobile terminal of claim 98, wherein said power offset signaling information associated with MU-MIMO mode comprises a power offset between a power reference and data symbols.

100. The mobile terminal of claim 99, wherein said power reference is reference symbols (RS).

101. The mobile terminal of any one of claims 98 to 100, wherein said redefined redundant precoder element signaling is received when the terminal is scheduled.

102. A communication system configured for both Single User Multiple-Input-Multiple-Output (SU-MIMO) and Multi-User Multiple-Input-Multiple-Output (MU-MIMO) signaling modes and configured to switch between said modes, wherein said modes have partly shared signaling, the system comprising a base station with means for carrying out the steps of a method as claim in any one of claims 86 to 89, and at least one mobile terminal with means for carrying out the steps of a method as claims in any one of claims 90 to 93.

1/6

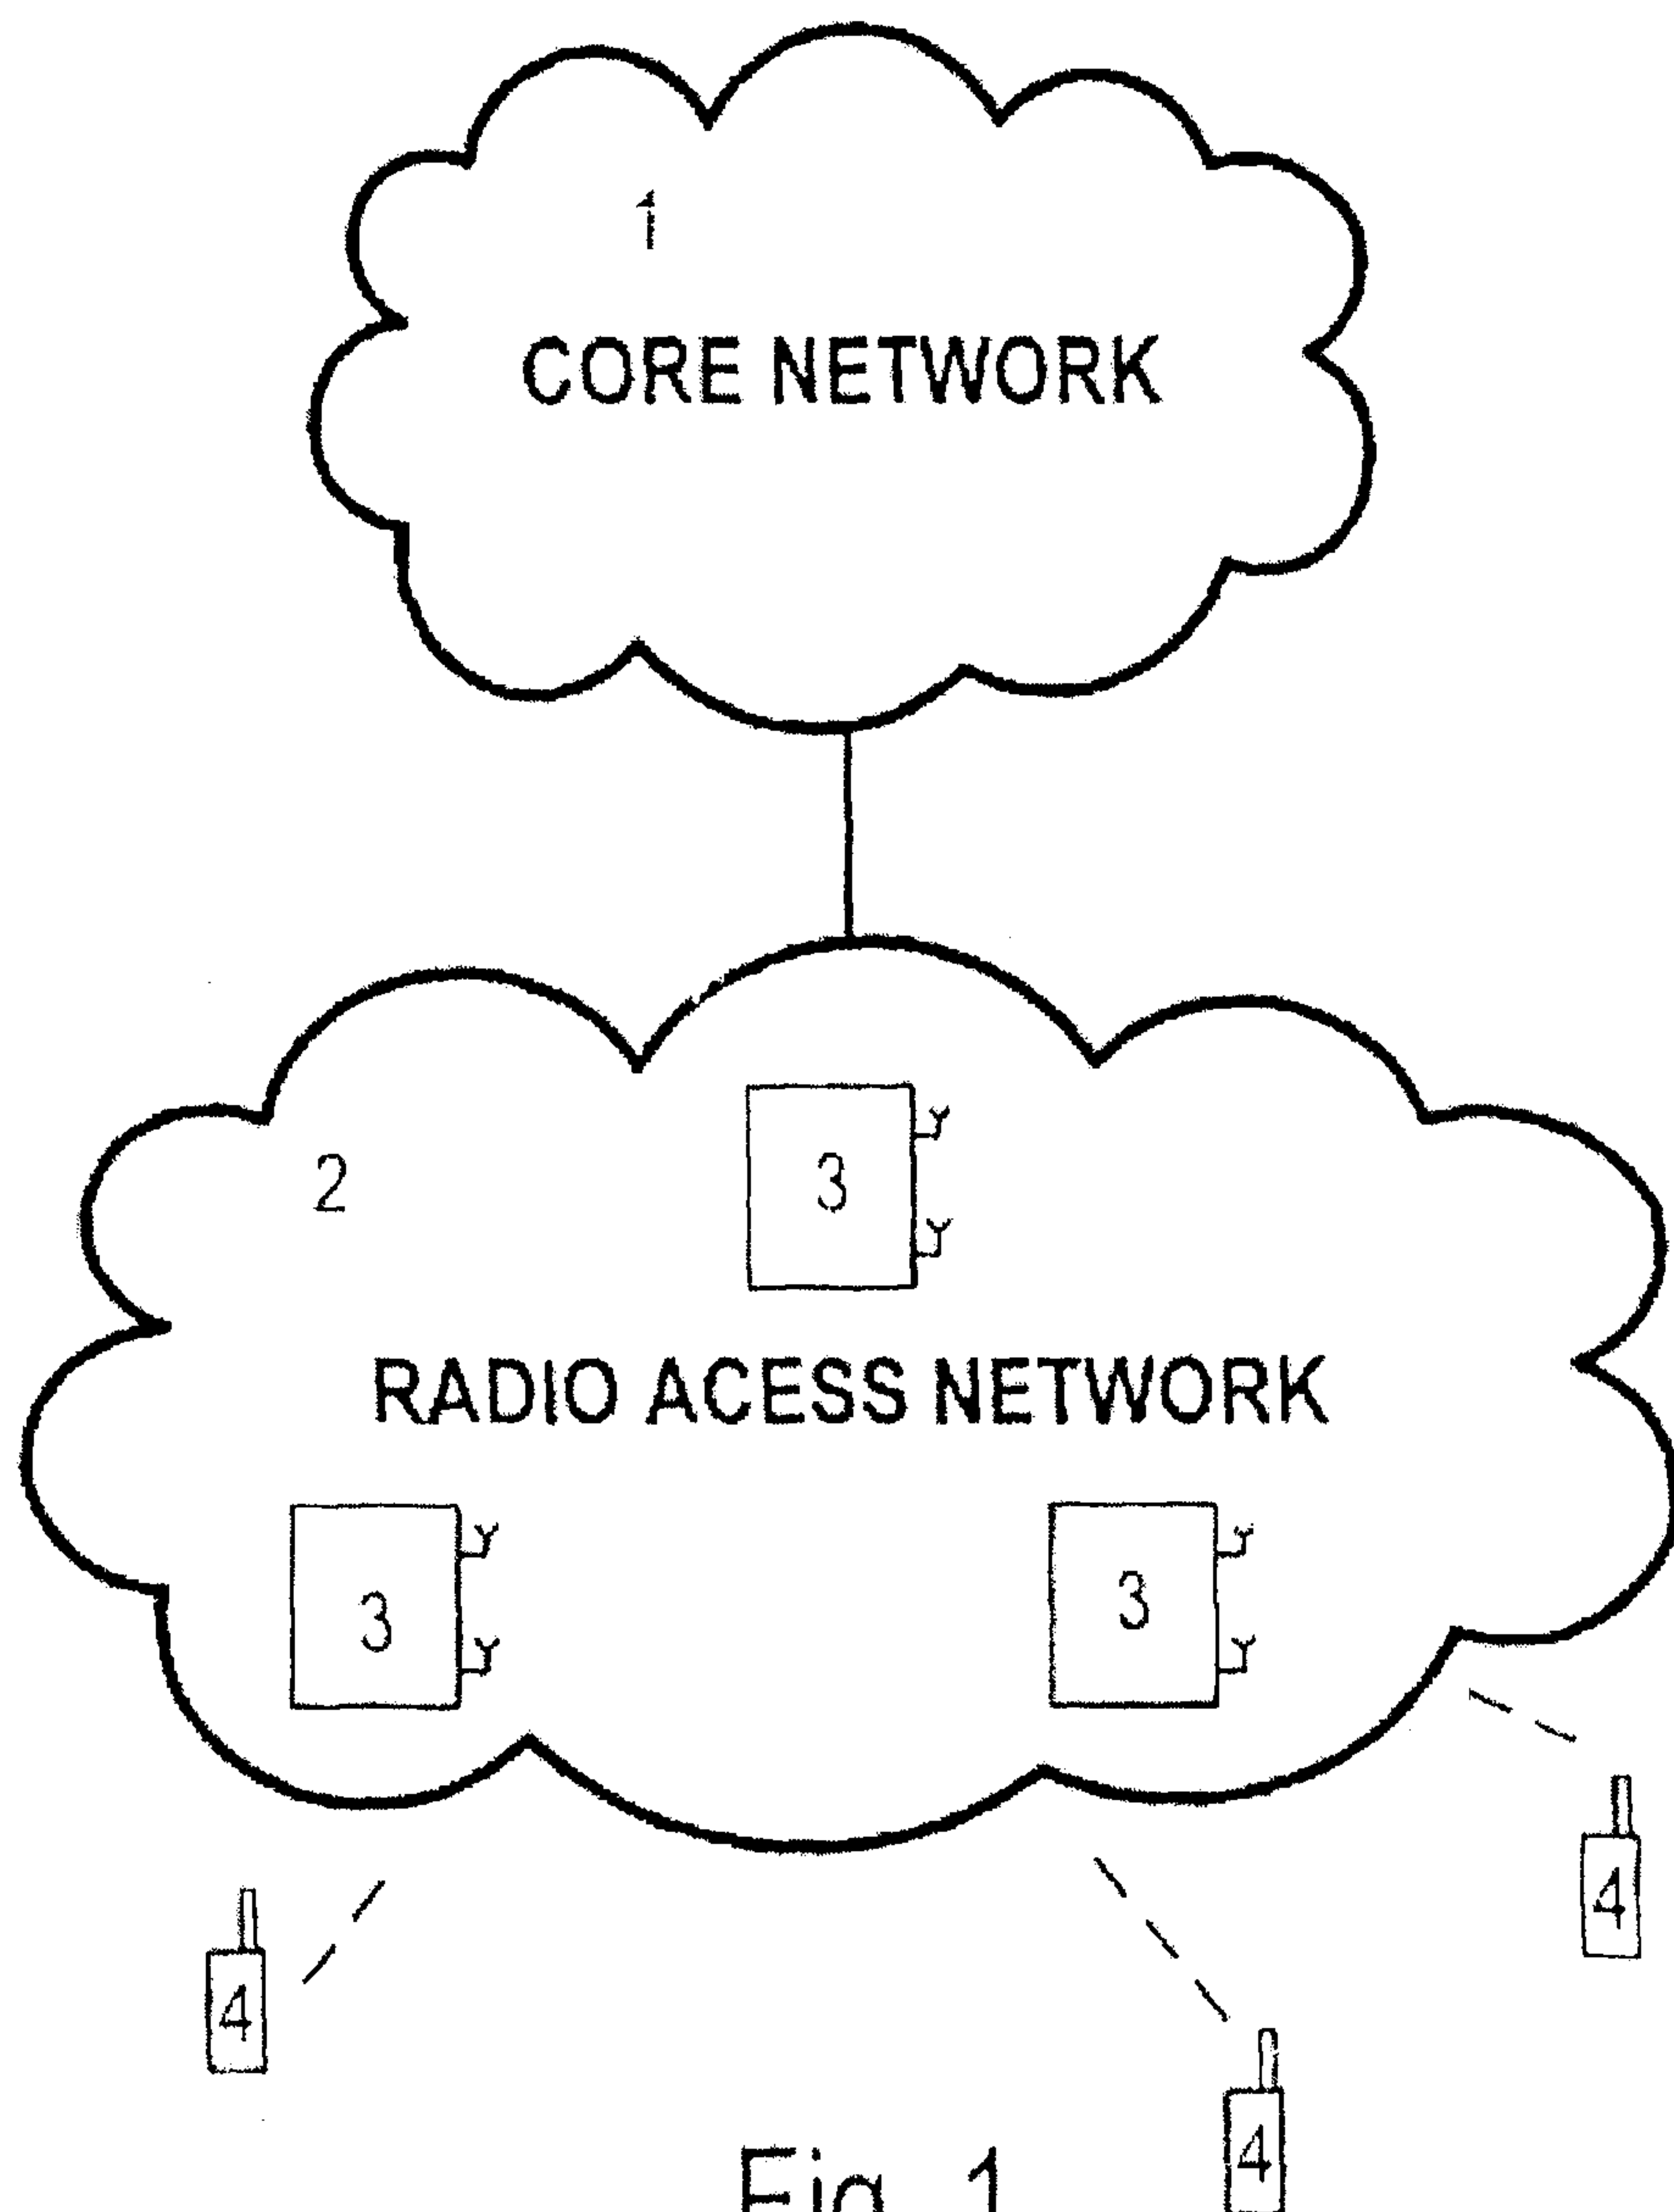


Fig. 1
(Prior Art)

2/6

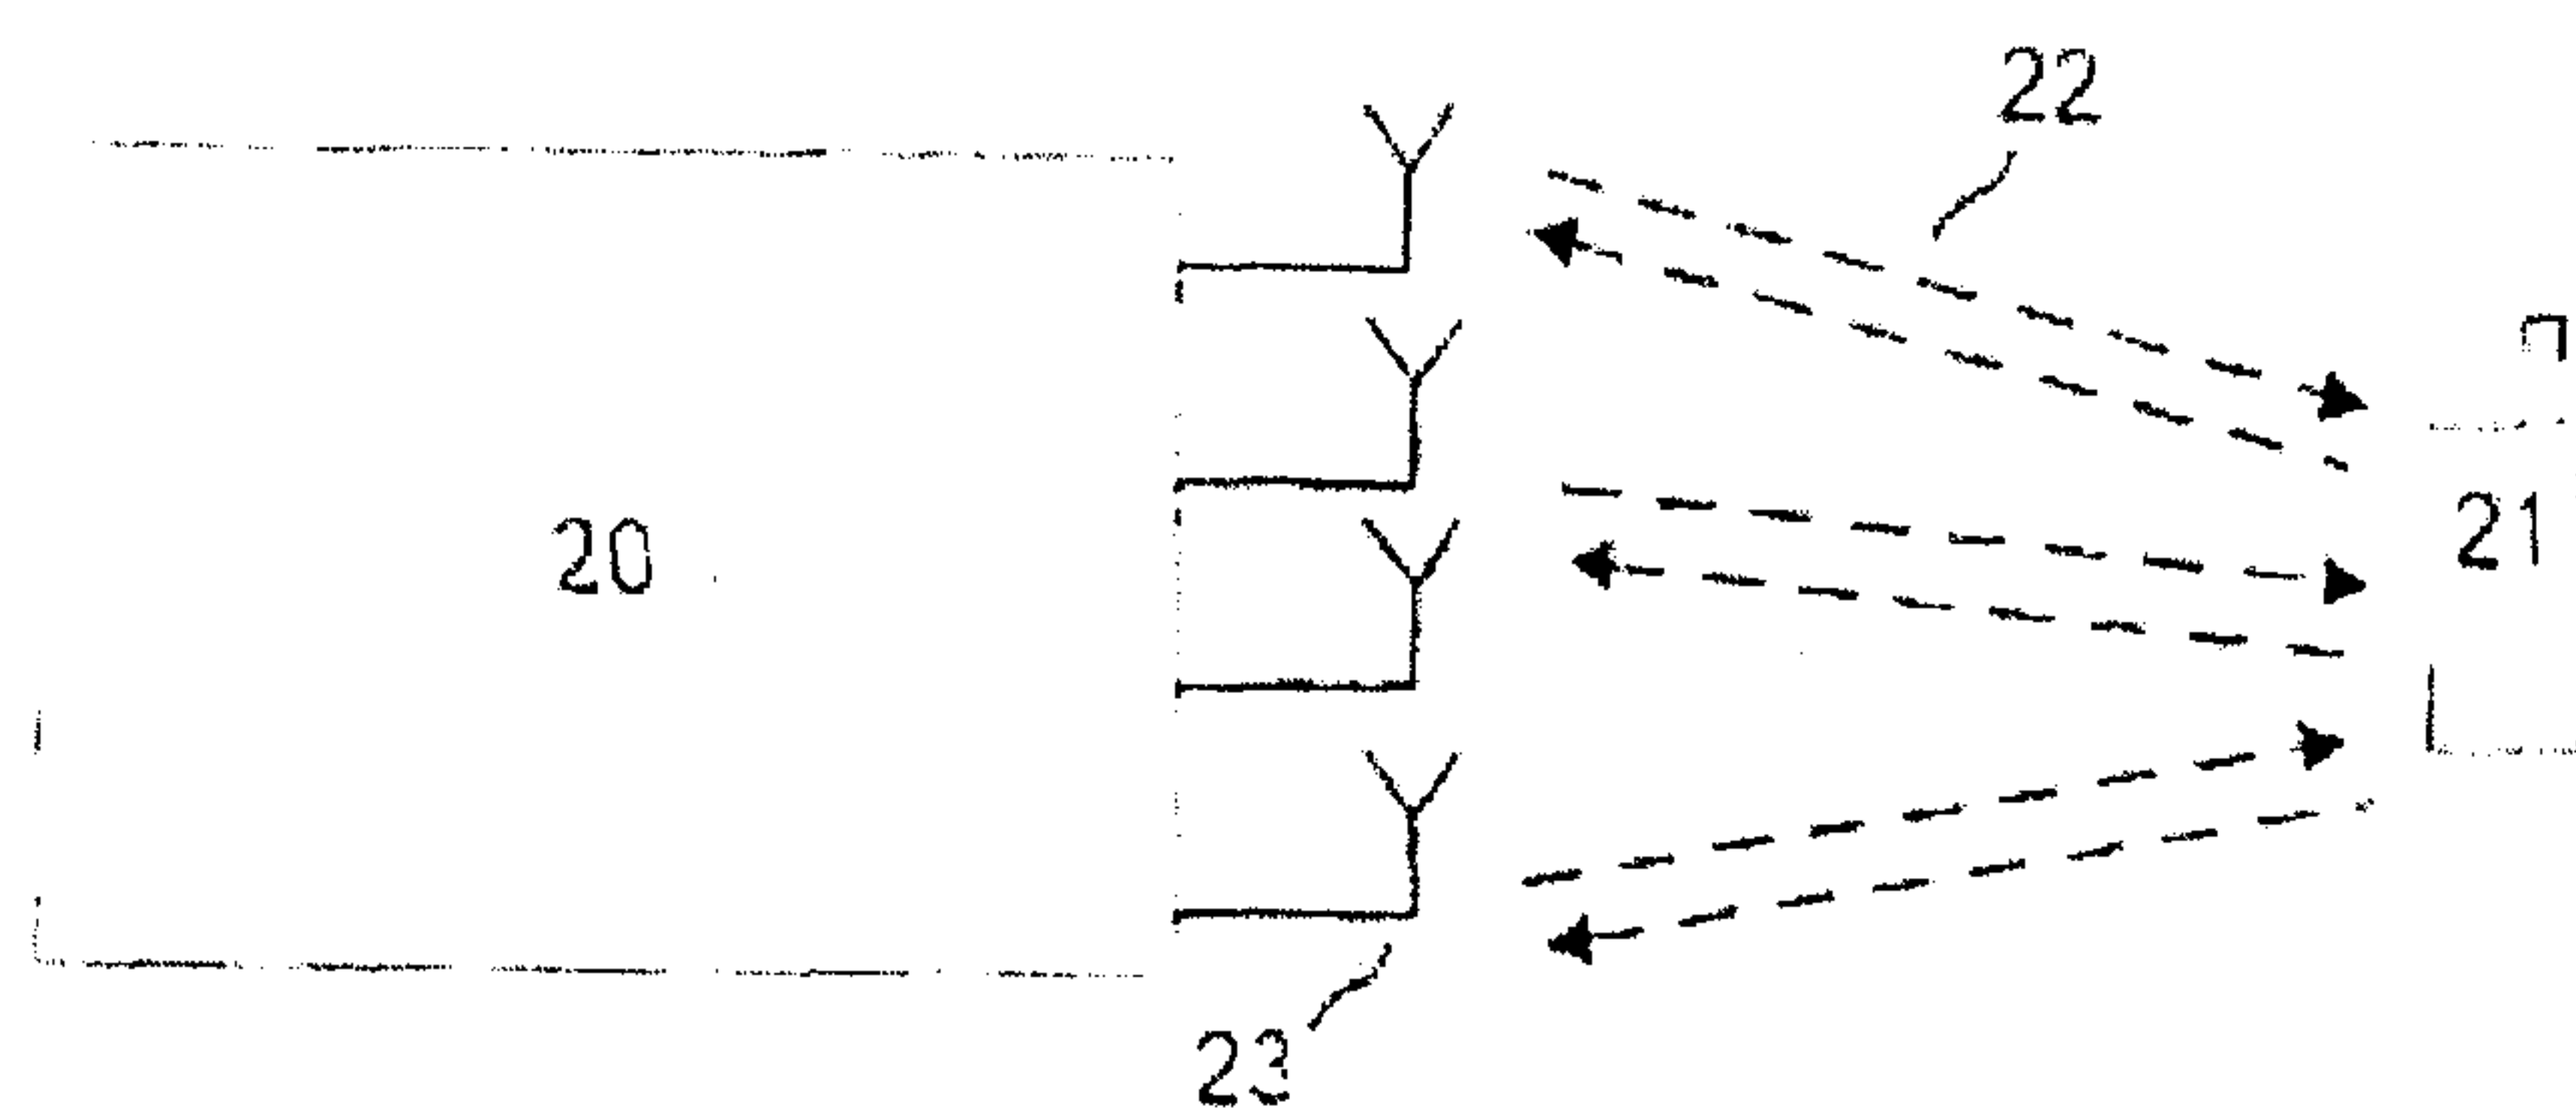


Fig. 2
(Prior Art)


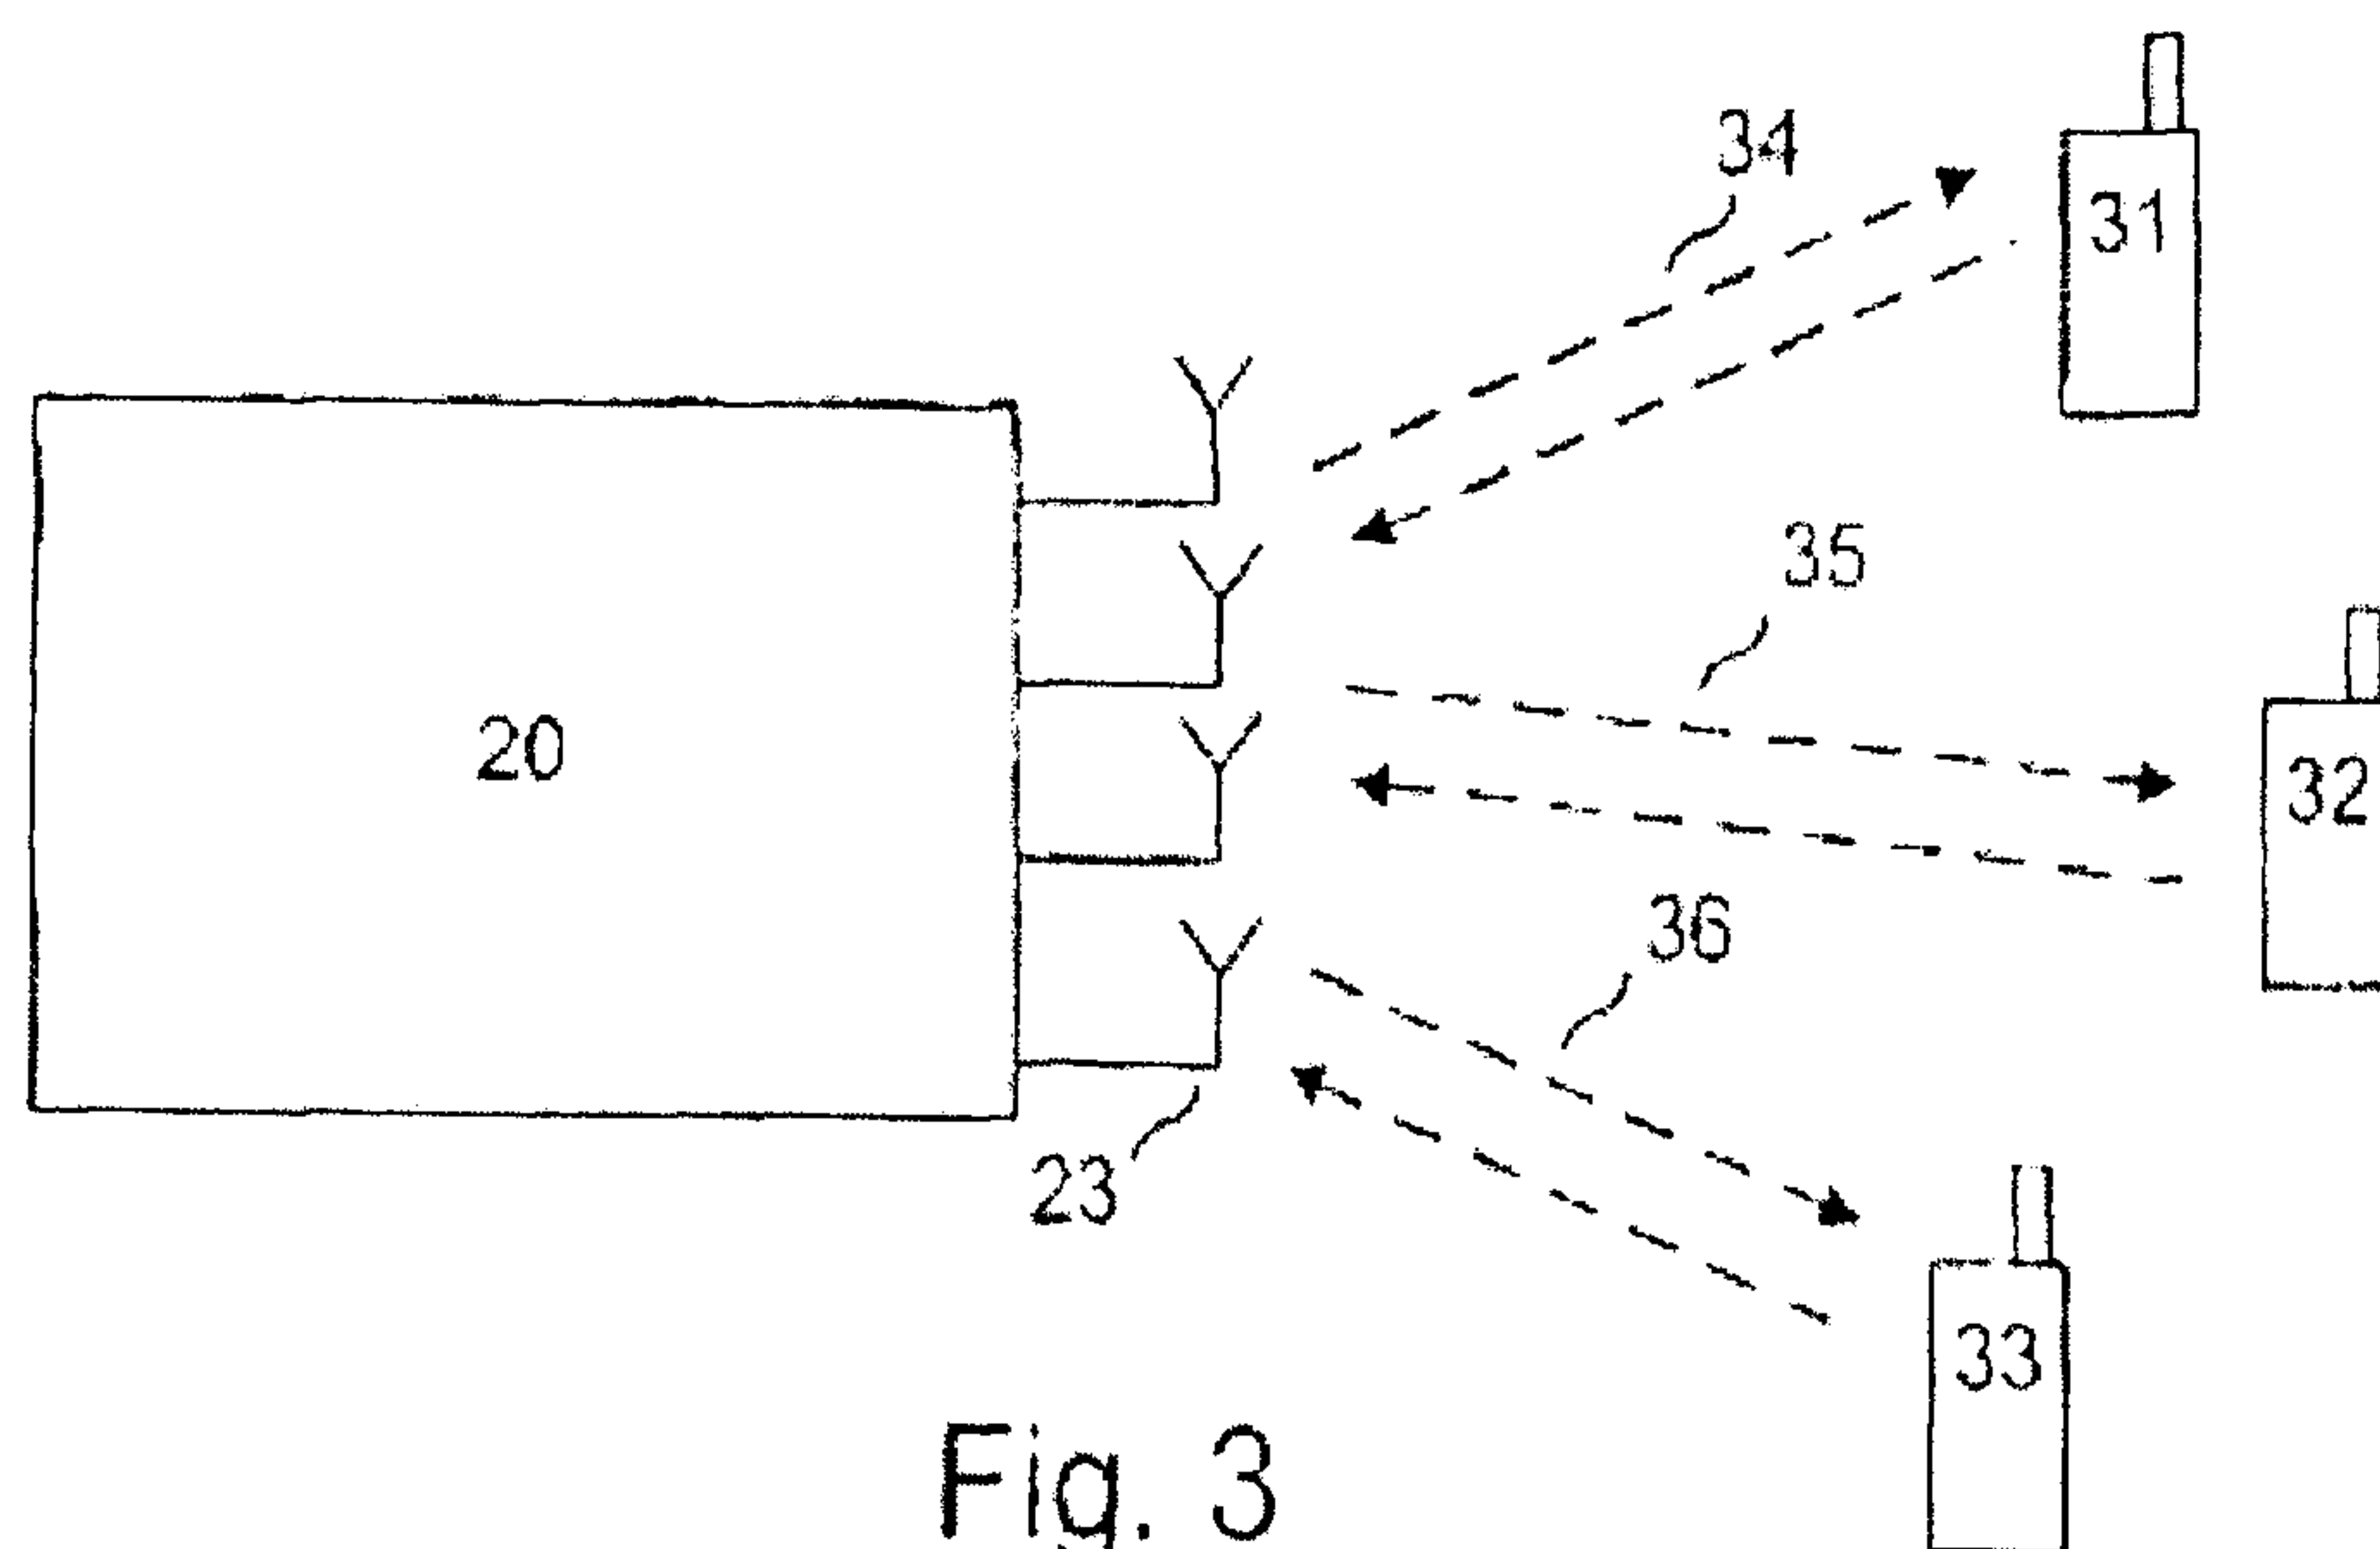


Fig. 3
(Prior Art)

3/6

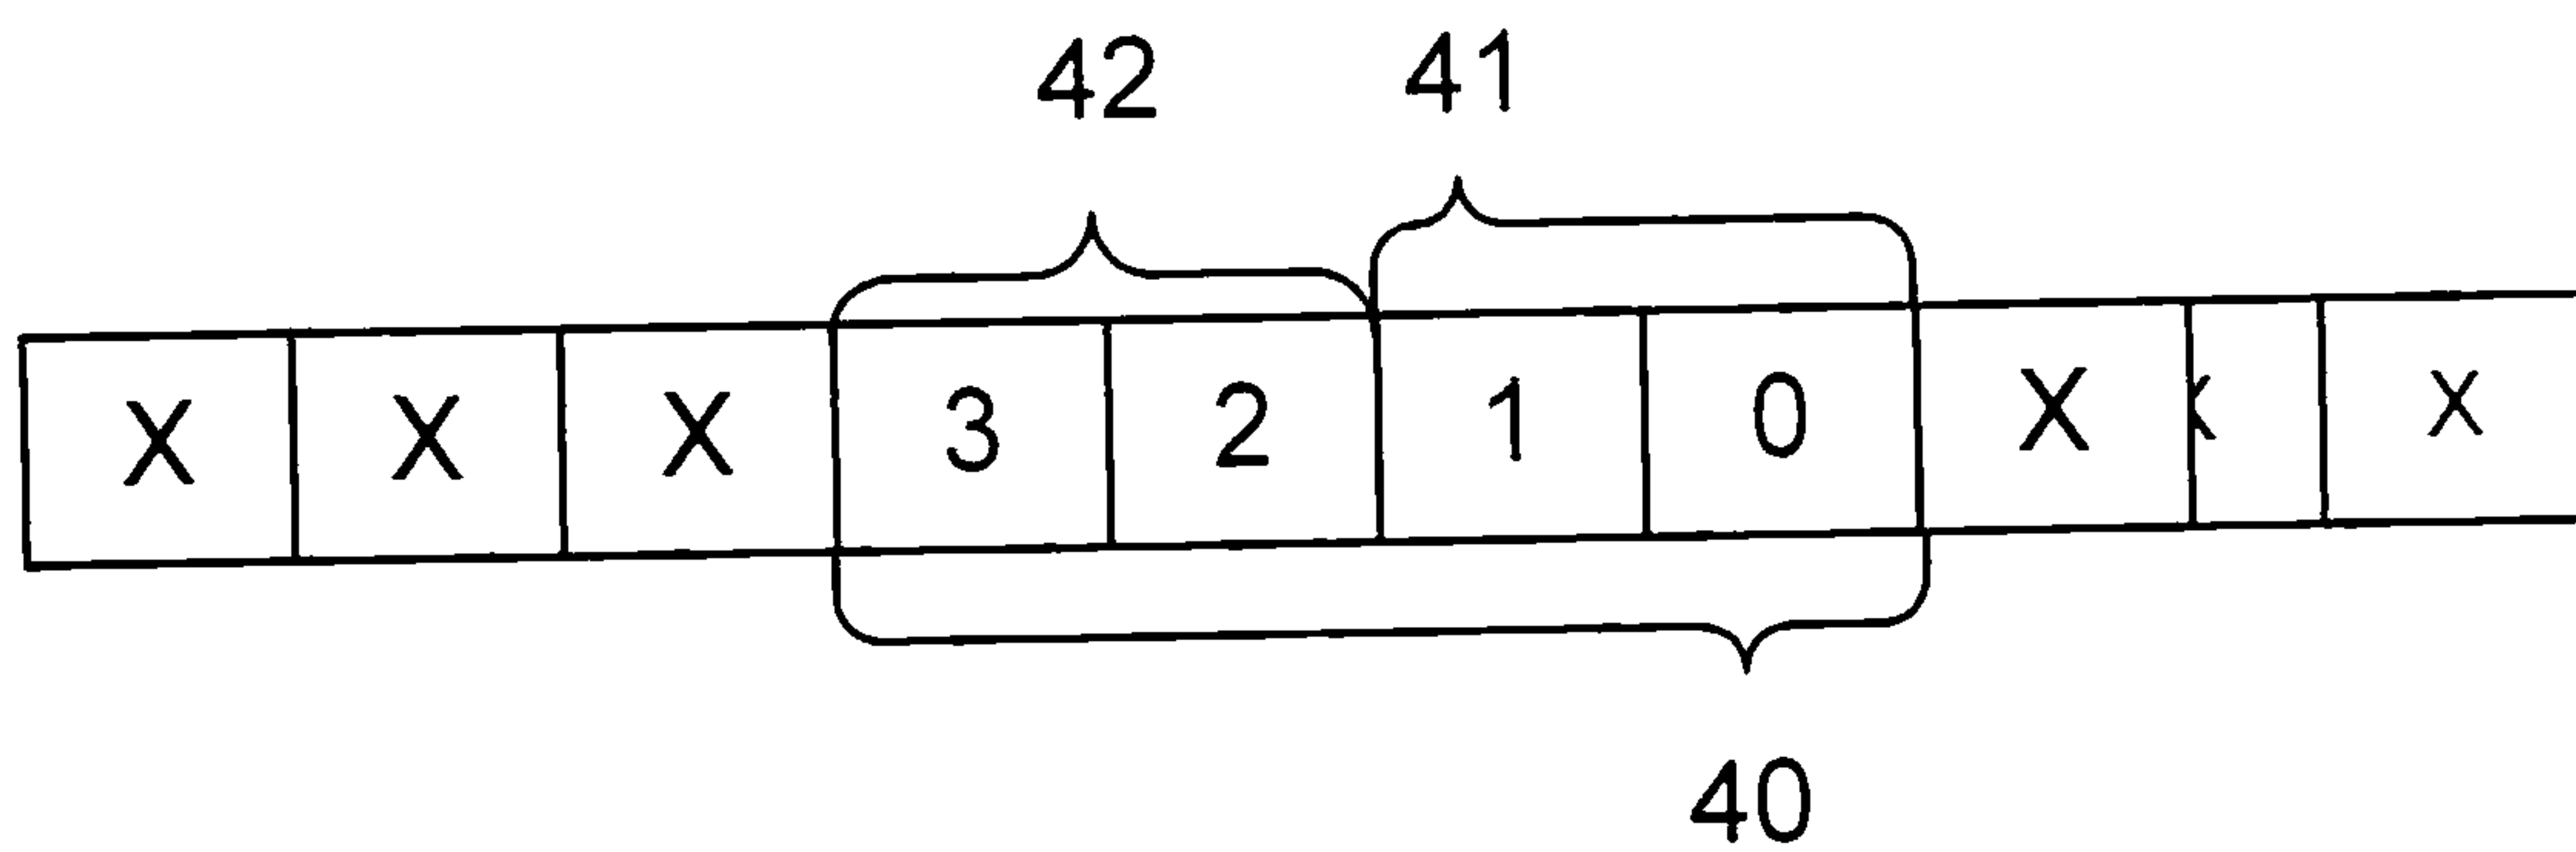

40: Bits reserved for SU-MIMO mode

41: Bits necessary for 2 Tx correlated SDMA
in MU-MIMO mode

42: Redundant bit for 2 Tx MU-MIMO mode

Fig. 4

4/6

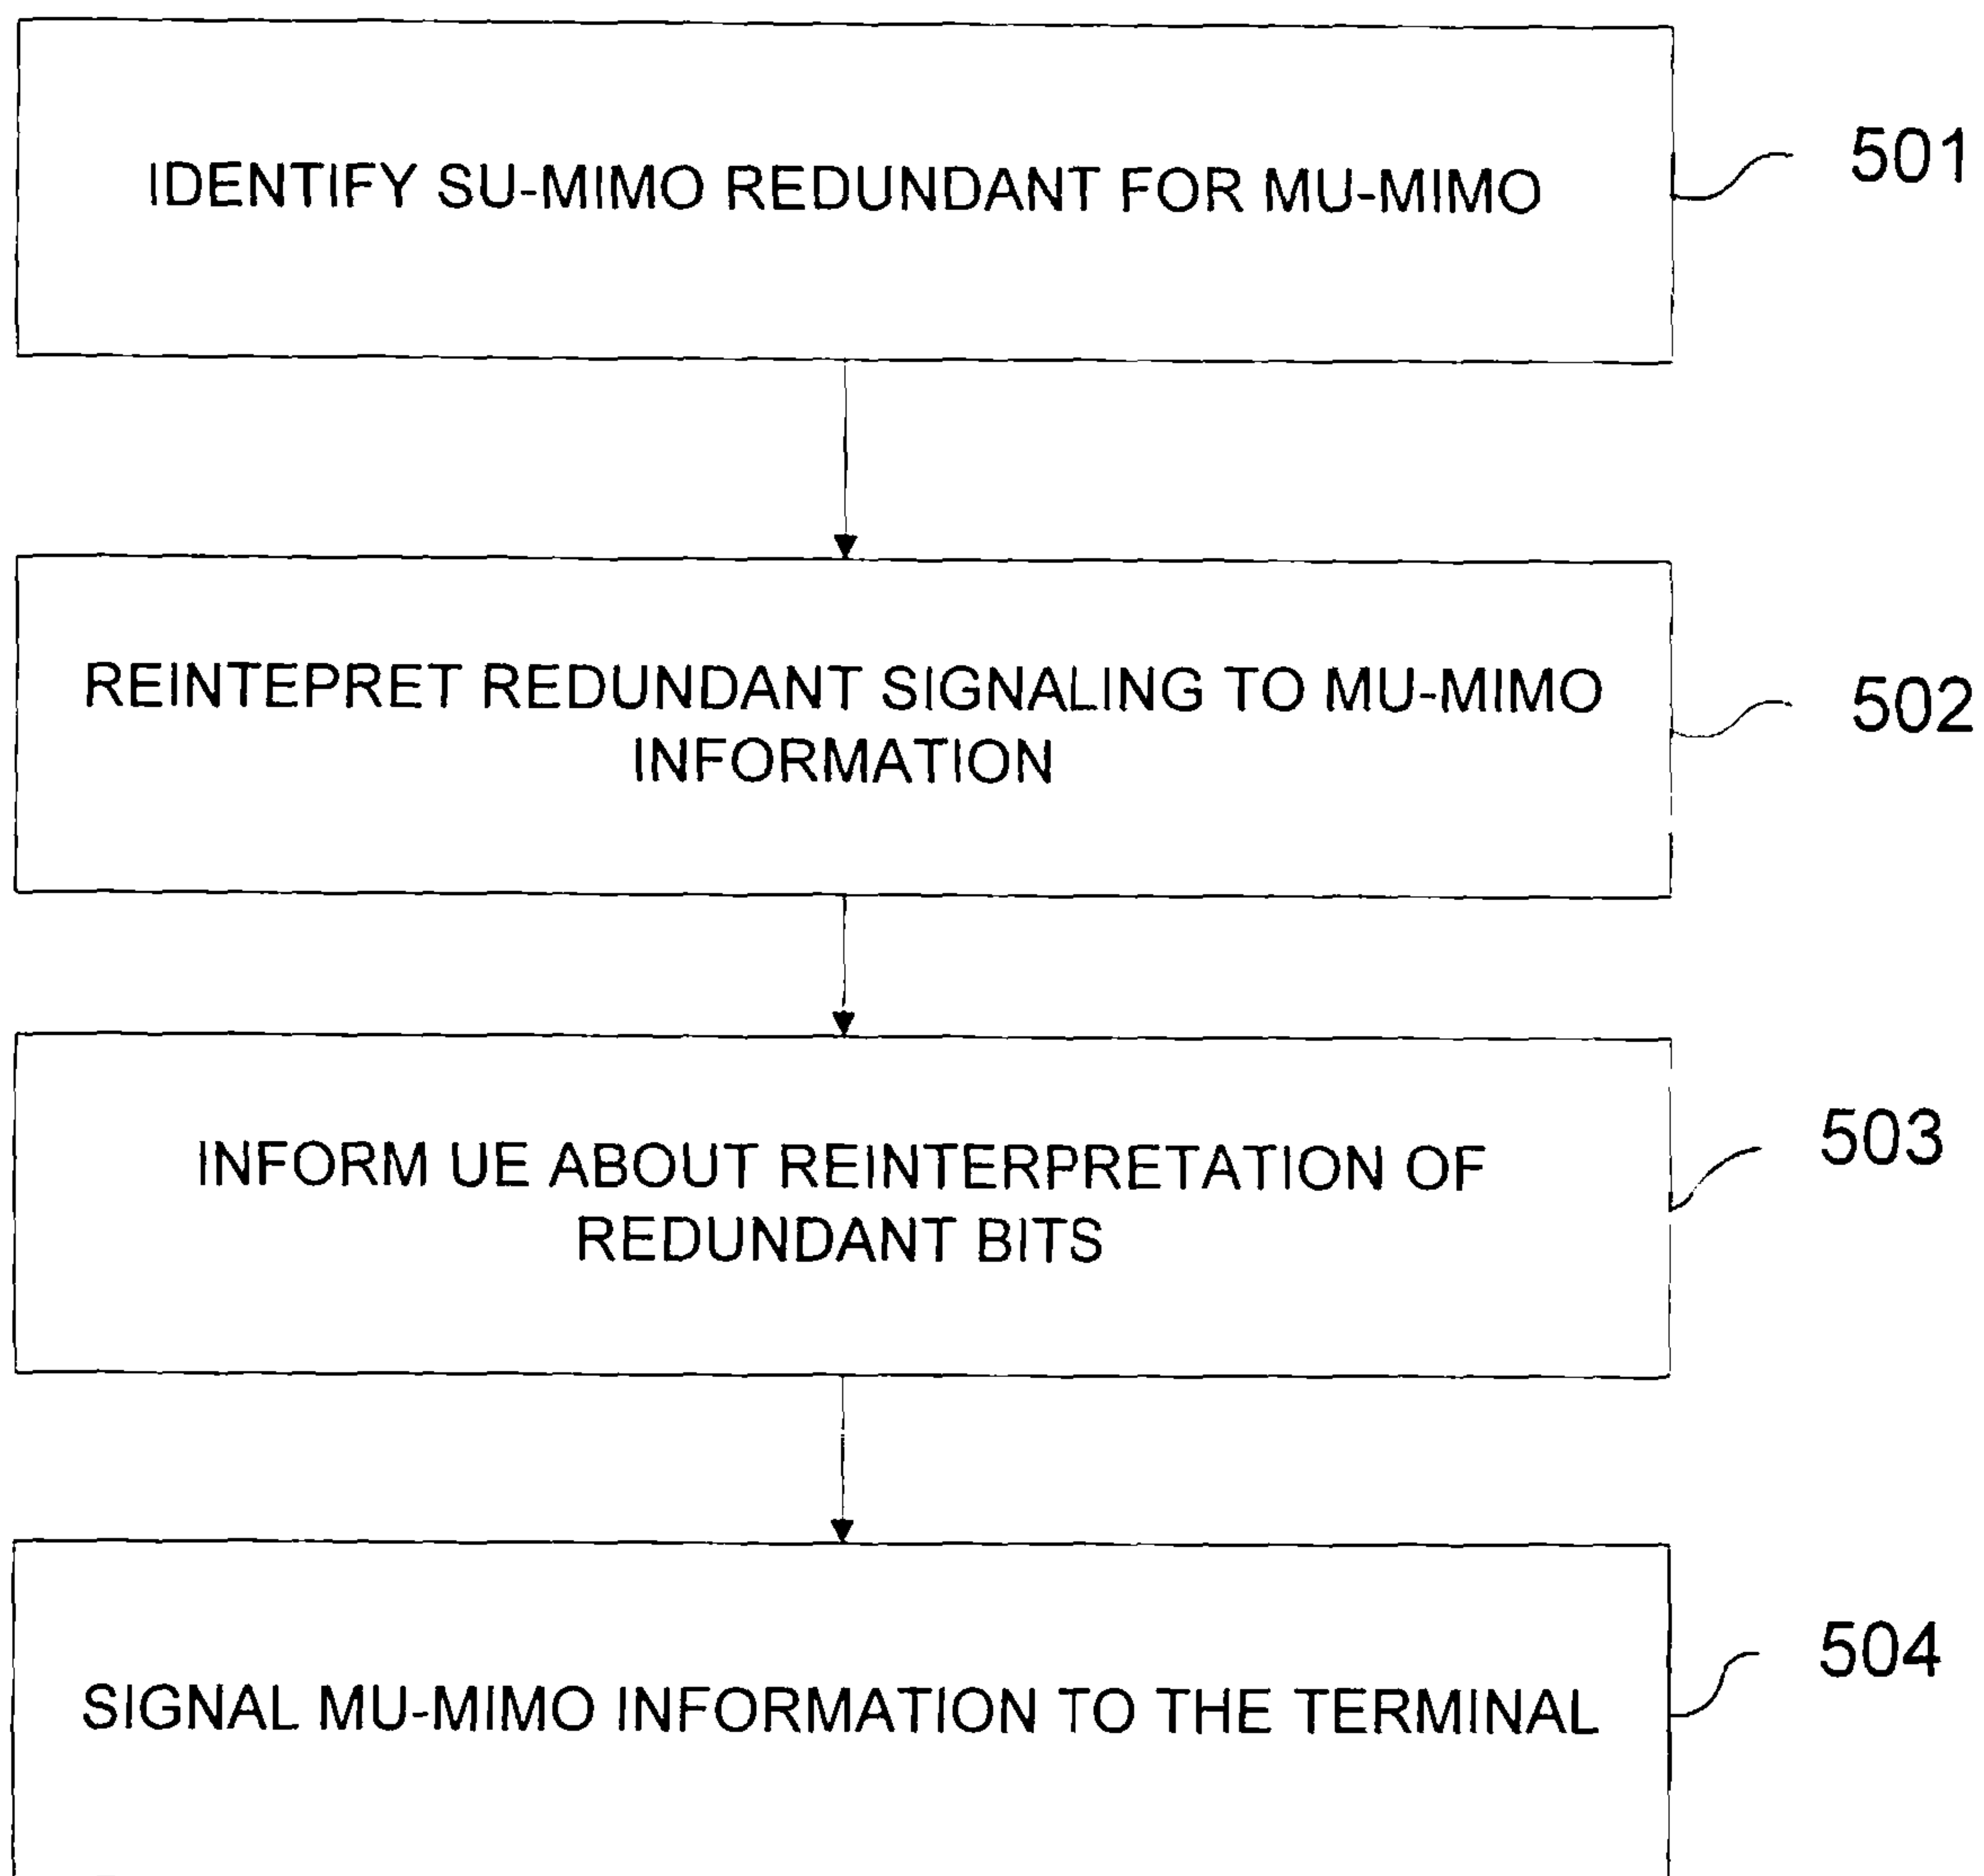


Fig. 5

5/6

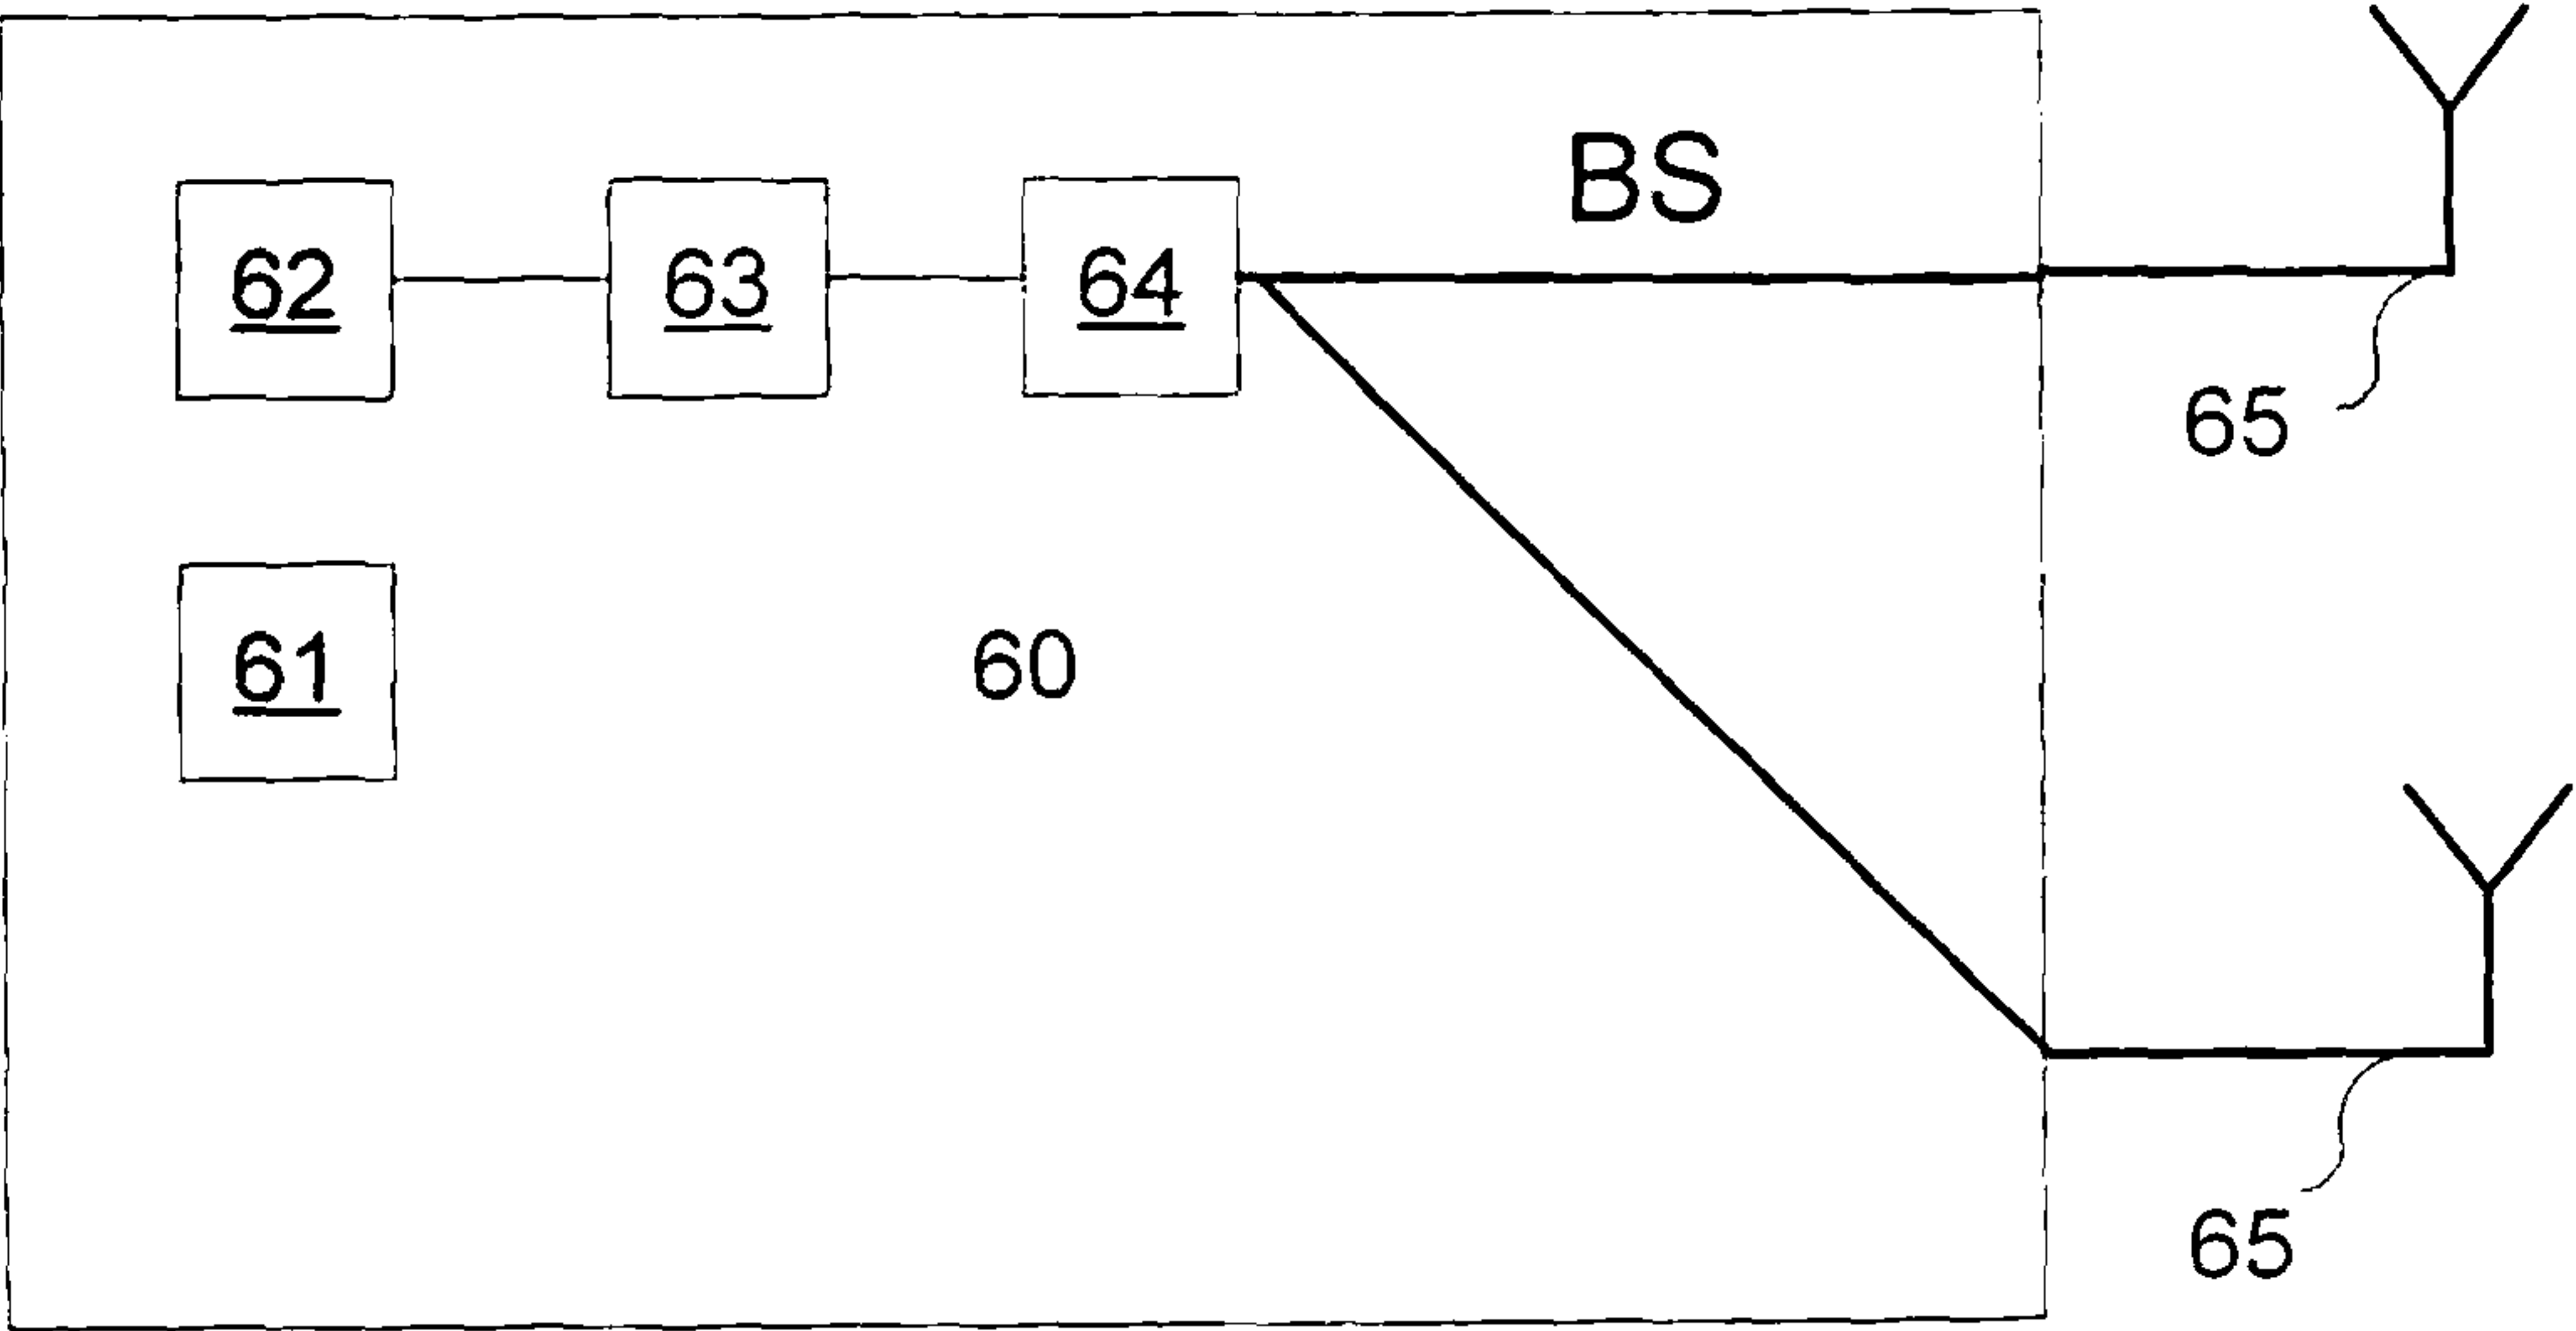


Fig. 6

6/6

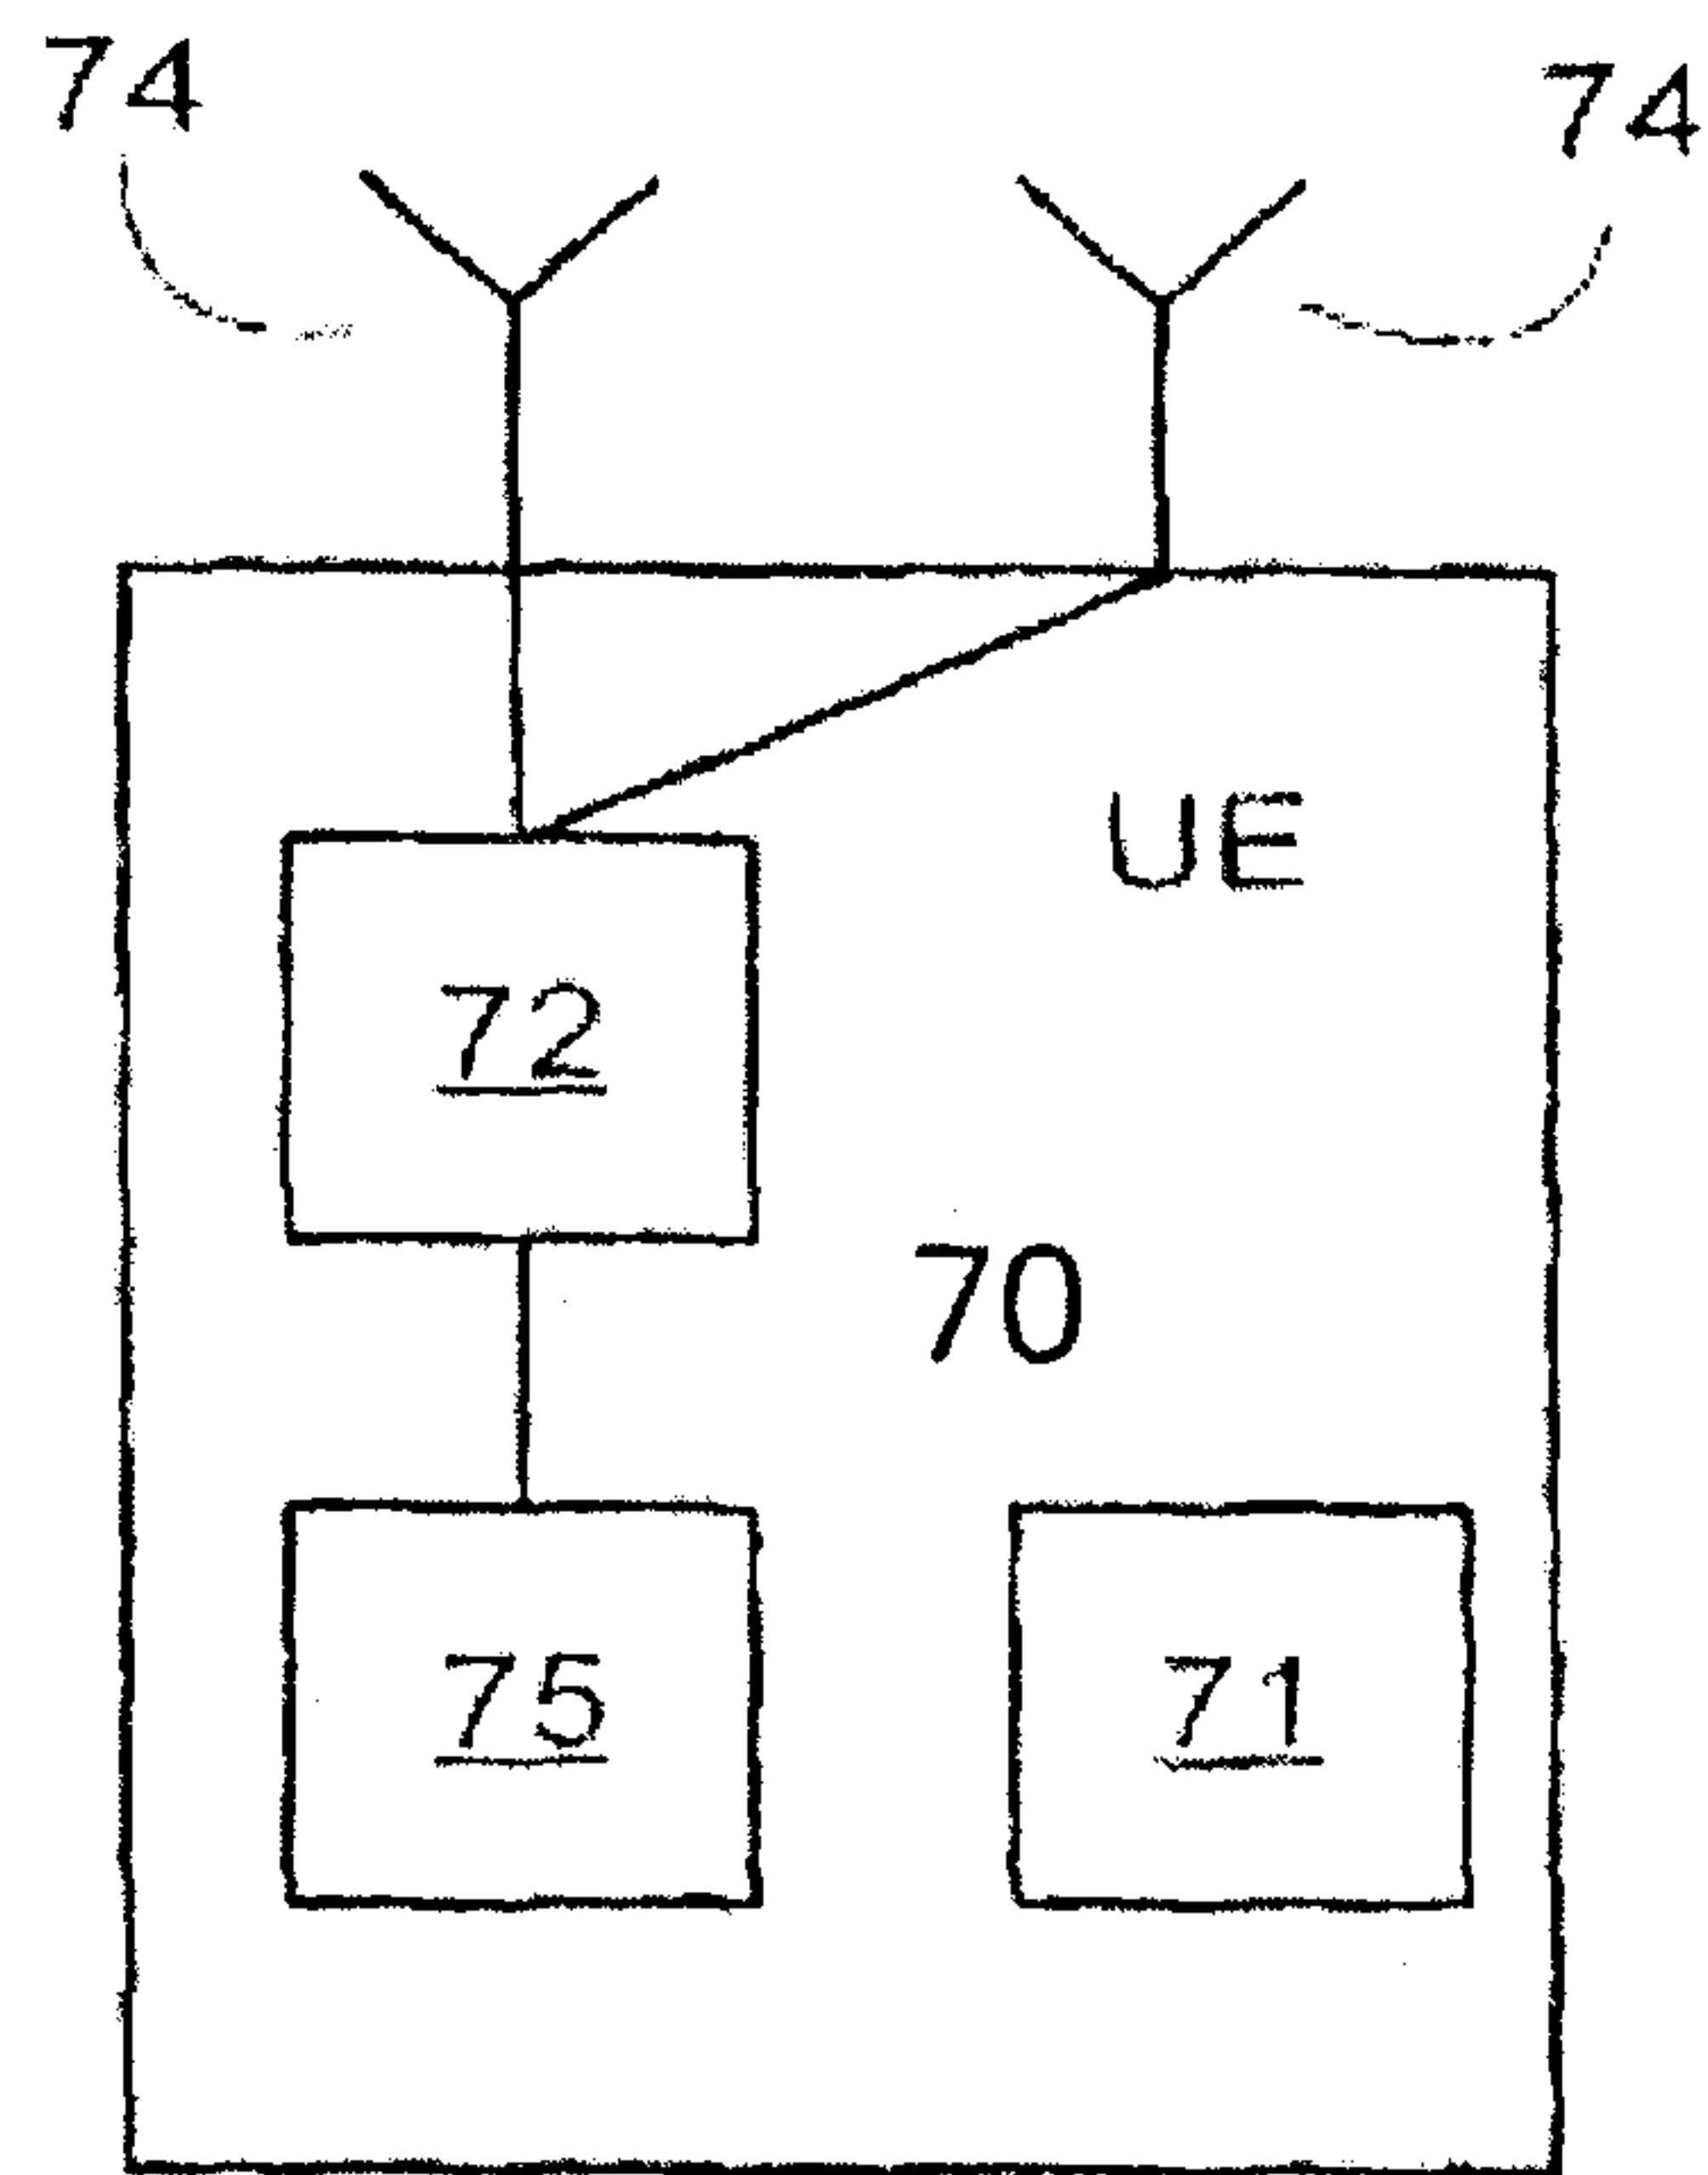


Fig. 7

IDENTIFY SU-MIMO REDUNDANT FOR MU-MIMO

501

REINTERPRET REDUNDANT SIGNALING TO MU-MIMO
INFORMATION

502

INFORM UE ABOUT REINTERPRETATION OF
REDUNDANT BITS

503

SIGNAL MU-MIMO INFORMATION TO THE TERMINAL

504

