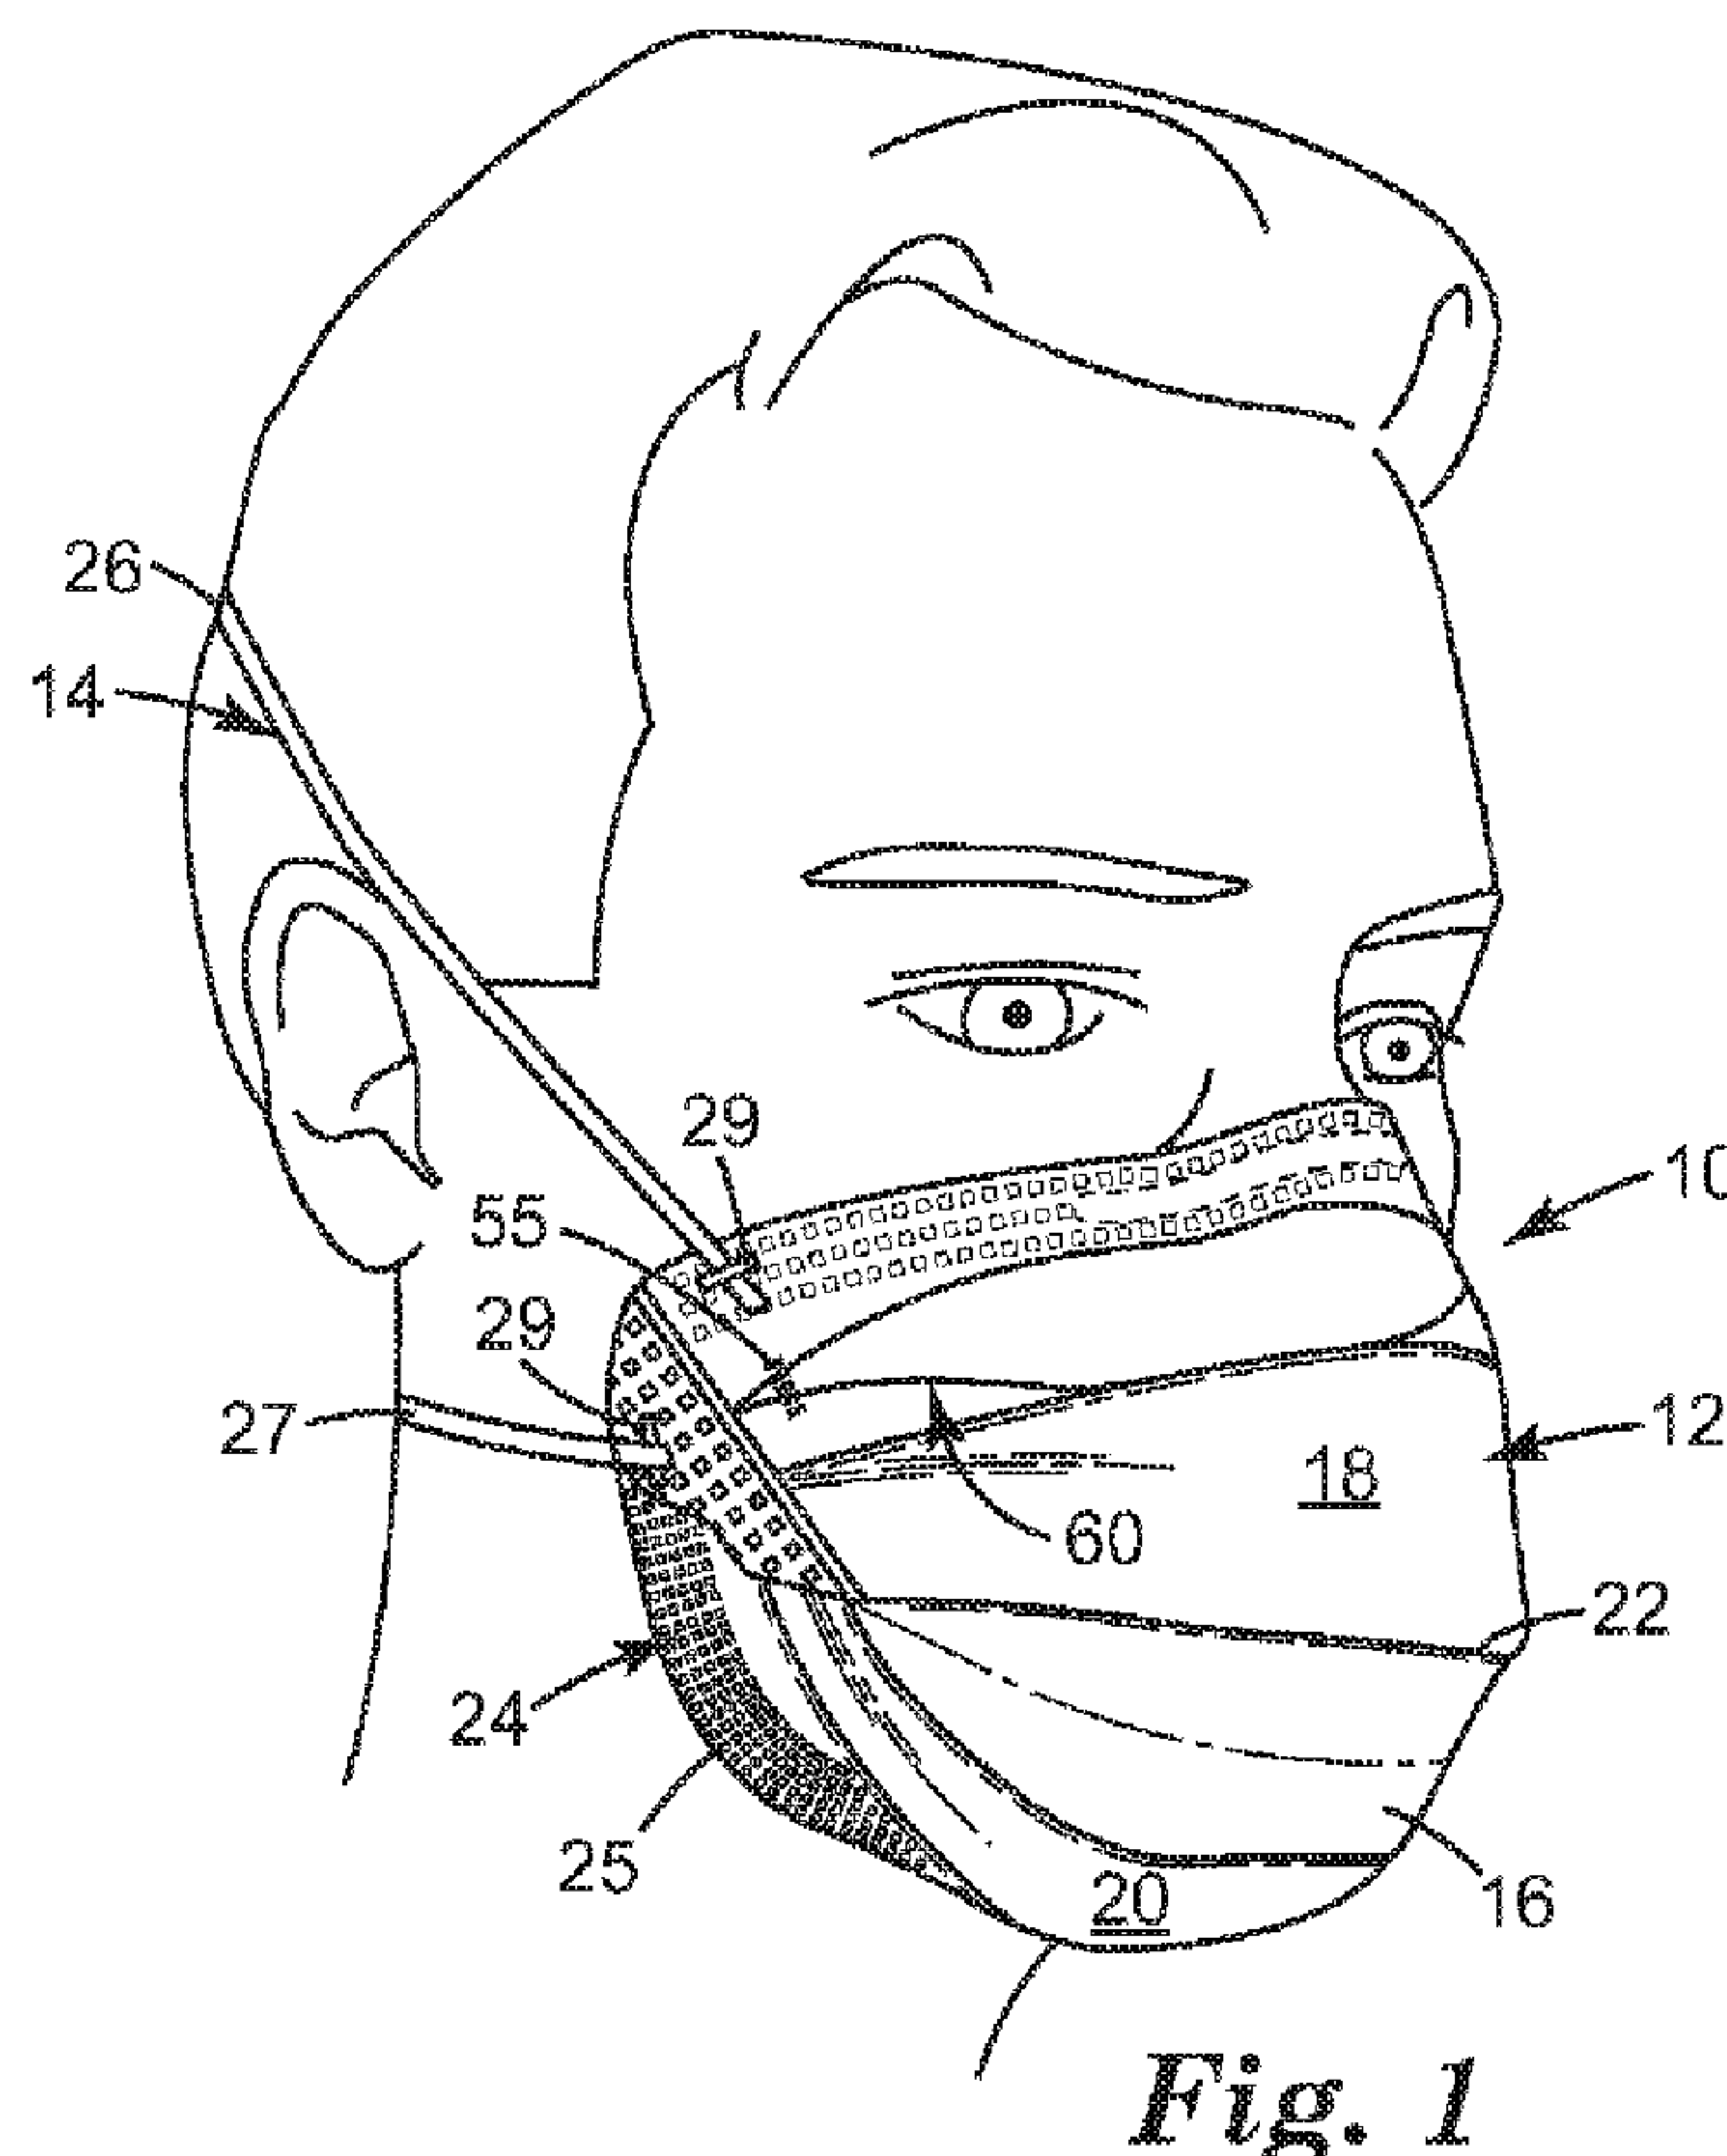




(86) Date de dépôt PCT/PCT Filing Date: 2014/08/14
(87) Date publication PCT/PCT Publication Date: 2015/03/05
(85) Entrée phase nationale/National Entry: 2016/02/17
(86) N° demande PCT/PCT Application No.: US 2014/051072
(87) N° publication PCT/PCT Publication No.: 2015/031066
(30) Priorité/Priority: 2013/08/29 (US14/013,314)

(51) Cl.Int./Int.Cl. *A62B 23/02* (2006.01),
A41D 13/11 (2006.01)
(71) Demandeur/Applicant:
3M INNOVATIVE PROPERTIES COMPANY, US
(72) Inventeur/Inventor:
DUFFY, DEAN R., US
(74) Agent: SMART & BIGGAR

(54) Titre : MASQUE RESPIRATOIRE FILTRANT AYANT UN CORPS DE MASQUE POURVU DE PINCES
(54) Title: FILTERING FACE-PIECE RESPIRATOR HAVING DARTED MASK BODY



(57) **Abrégé/Abstract:**

A cup-shaped filtering face-piece respirator 10 that includes a harness 14 and a mask body 12 that has a multi-layer filtering structure 16. The mask body 12 includes at least one dart 60 permanently bonded in the filtering structure 16, the dart 60 tapering from a center plane 32 of the mask body 12 to a side edge of the mask body. The dart 60 inhibits collapse of the cup-shaped form of the respirator 10.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2015/031066 A3(43) International Publication Date
5 March 2015 (05.03.2015)

(51) International Patent Classification:

A62B 23/02 (2006.01) *A41D 13/11* (2006.01)

(21) International Application Number:

PCT/US2014/051072

(22) International Filing Date:

14 August 2014 (14.08.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/013,314 29 August 2013 (29.08.2013) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).(72) Inventor: **DUFFY, Dean R.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).(74) Agents: **GOVER, Melanie G.**, et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

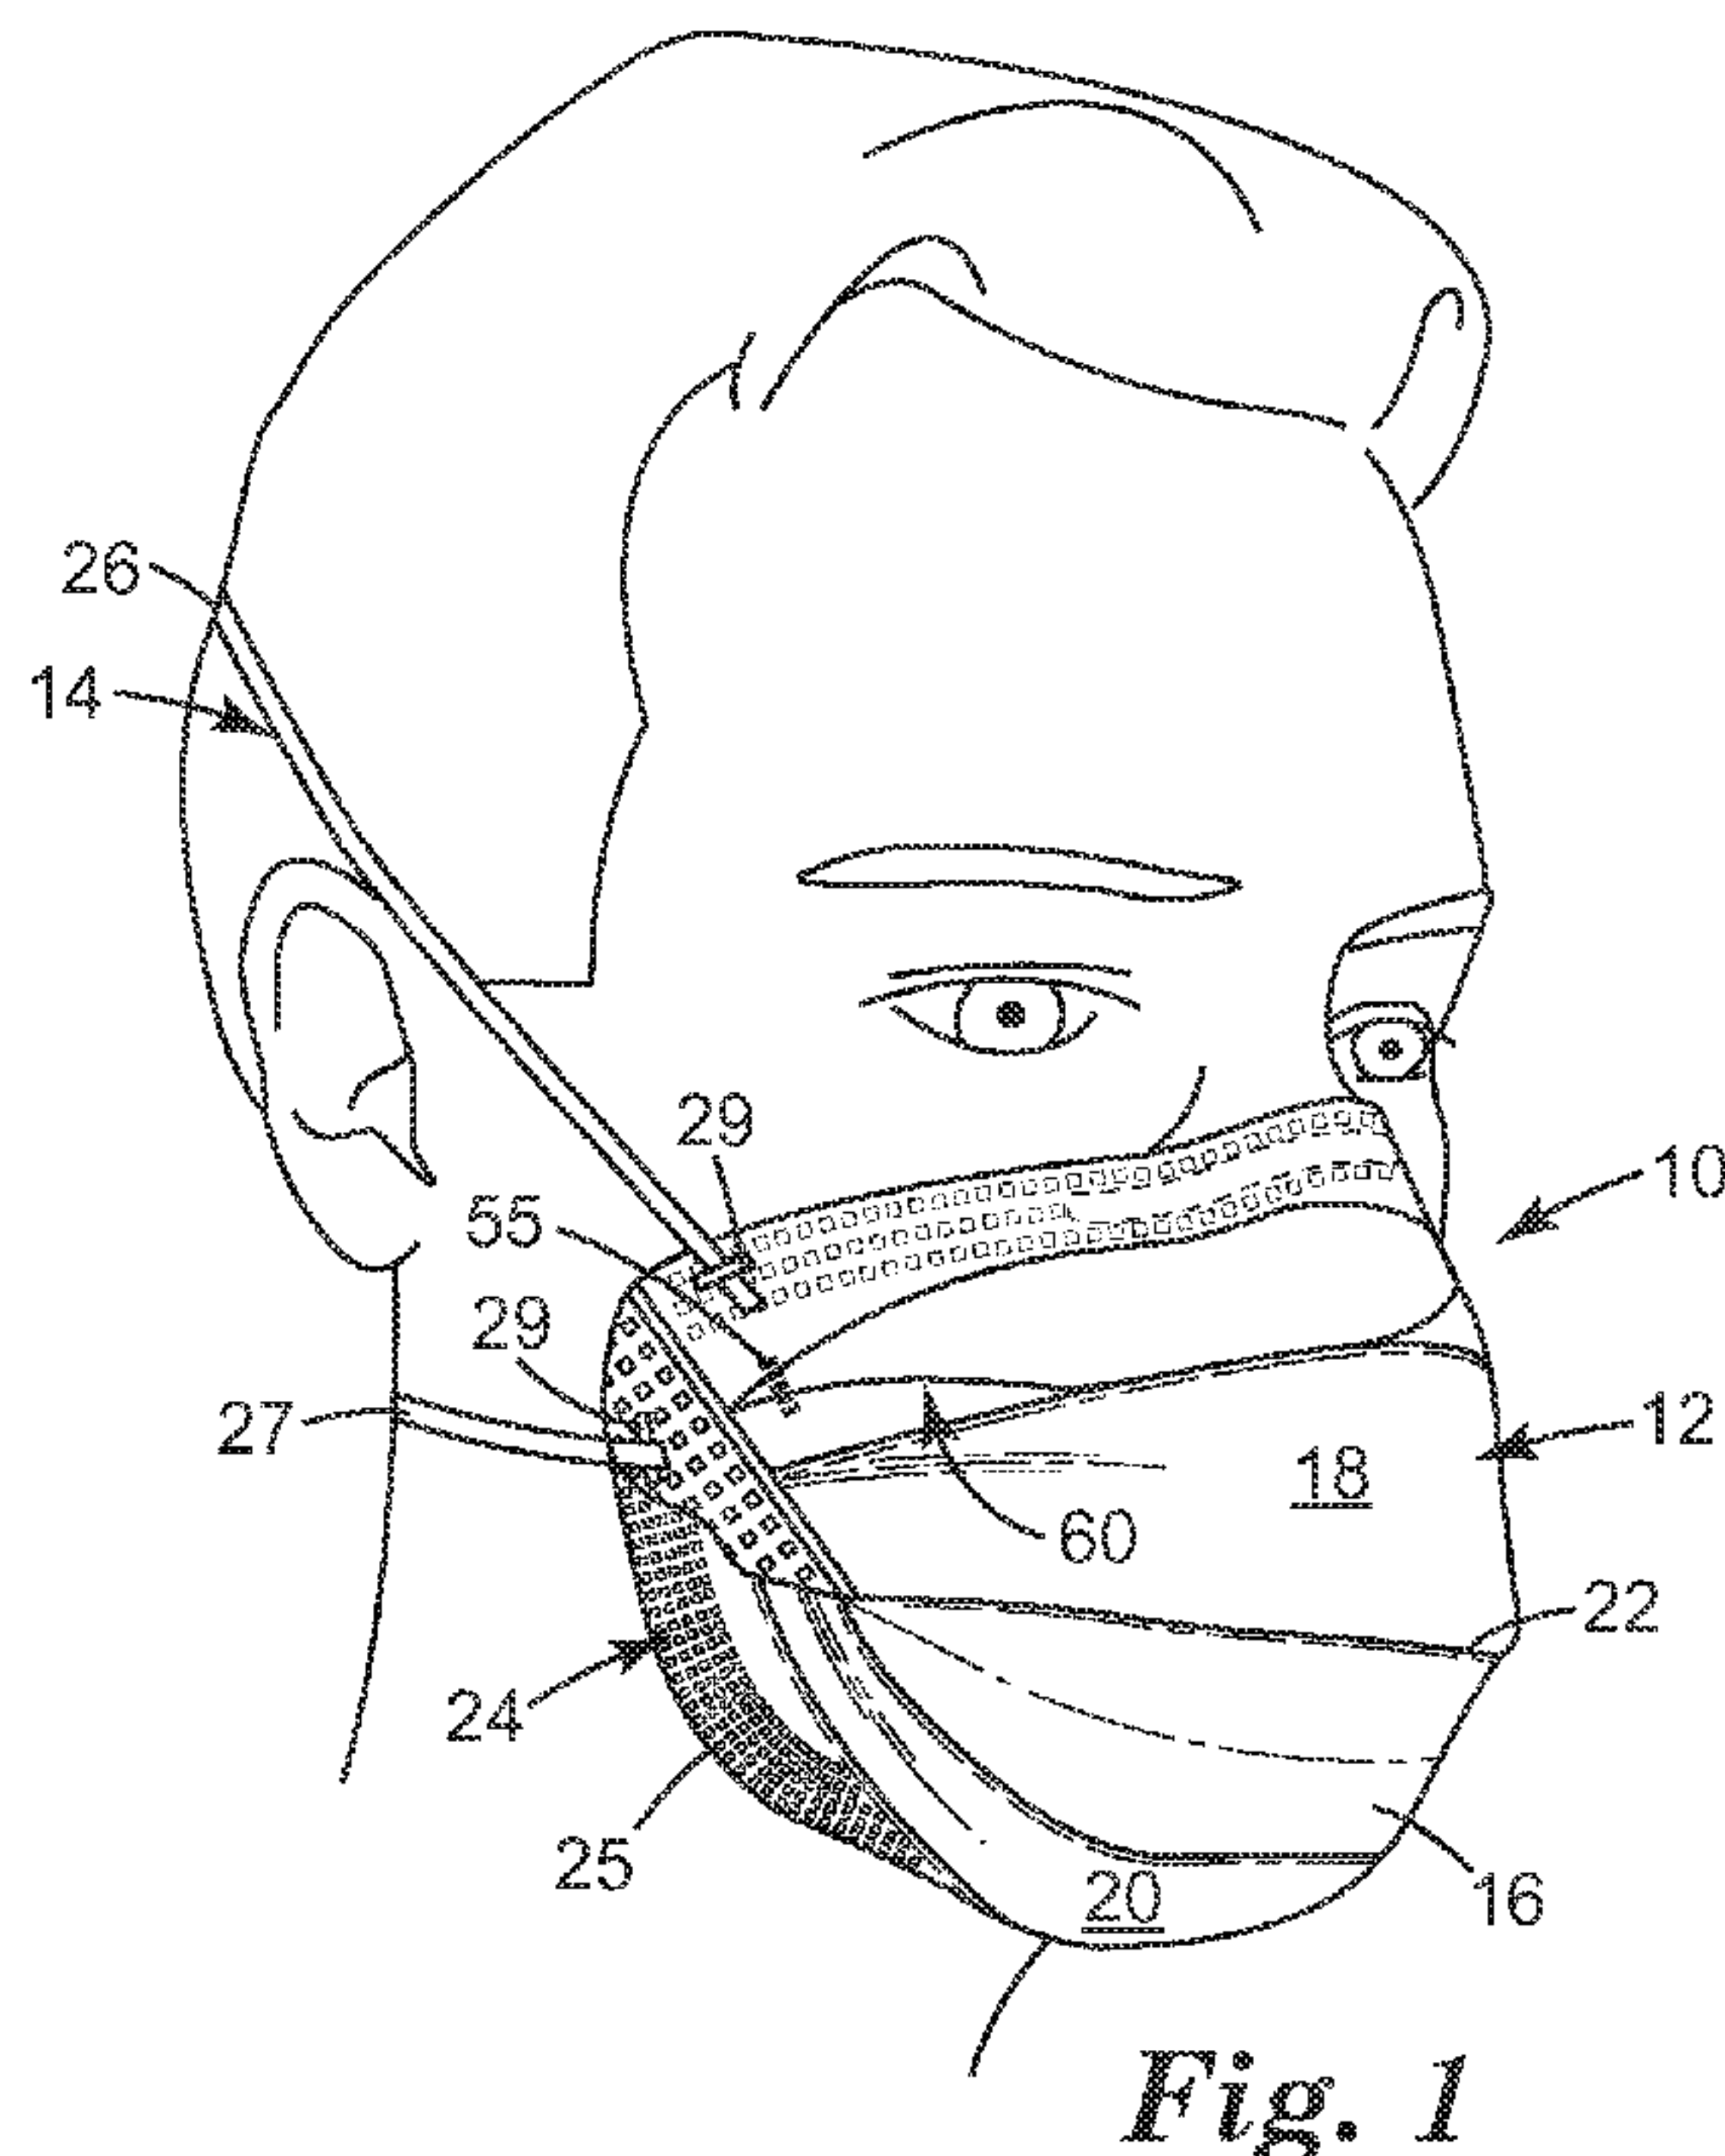
(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

[Continued on next page]

(54) Title: FILTERING FACE-PIECE RESPIRATOR HAVING DARTED MASK BODY



(57) Abstract: A cup-shaped filtering face-piece respirator 10 that includes a harness 14 and a mask body 12 that has a multi-layer filtering structure 16. The mask body 12 includes at least one dart 60 permanently bonded in the filtering structure 16, the dart 60 tapering from a center plane 32 of the mask body 12 to a side edge of the mask body. The dart 60 inhibits collapse of the cup-shaped form of the respirator 10.

WO 2015/031066 A3



— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:

25 June 2015

FILTERING FACE-PIECE RESPIRATOR HAVING DARTED MASK BODY

[0001] The present invention pertains to a filtering face-piece respirator that includes darts in the mask body to inhibit collapse of the mask body.

5

BACKGROUND

[0002] Respirators are commonly worn over a person's breathing passages for at least one of two common purposes: (1) to prevent impurities or contaminants from entering the wearer's respiratory system; and (2) to protect other persons or things from being exposed to pathogens and other contaminants exhaled by the wearer. In the first situation, the respirator is worn in an environment where the air contains particles that are harmful to the wearer, for example, in an auto body shop. In the second situation, the respirator is worn in an environment where there is risk of contamination to other persons or things, for example, in an operating room or clean room.

[0003] A variety of respirators have been designed to meet either (or both) of these purposes. Some respirators have been categorized as being "filtering face-pieces" because the mask body itself functions as the filtering mechanism. Unlike respirators that use rubber or elastomeric mask bodies in conjunction with attachable filter cartridges (see, e.g., U.S. Patent RE39,493 to Yuschak et al.) or insert-molded filter elements (see, e.g., U.S. Patent 4,790,306 to Braun), filtering face-piece respirators are designed to have the filter media cover much of the whole mask body so that there is no need for installing or replacing a filter cartridge. These filtering face-piece respirators commonly come in one of two configurations: molded respirators and flat-fold respirators.

[0004] Molded filtering face piece respirators have regularly comprised non-woven webs of thermally-bonding fibers or open-work plastic meshes to furnish the mask body with its cup-shaped configuration. Molded respirators tend to maintain the same shape during both use and storage. These respirators therefore cannot be folded flat for storage and shipping. Examples of patents that disclose molded, filtering, face-piece respirators include U.S. Patents 7,131,442 to Kronzer et al, 6,923,182, 6,041,782 to Angadjivand et al., 4,807,619 to Dyrud et al., and 4,536,440 to Berg.

[0005] Flat-fold respirators — as their name implies — can be folded flat for shipping and storage. They also can be opened into a cup-shaped configuration for use. Examples of flat-fold respirators are shown in U.S. Patents 6,568,392 and 6,484,722 to Bostock et al., and 6,394,090 to Chen. Some flat-fold respirators have been designed with weld lines, seams, and folds, to help maintain their cup-shaped configuration during use. Stiffening members also have been

30

incorporated into panels of the mask body (see U.S. Patent Application Publications 2001/0067700 to Duffy et al., 2010/0154805 to Duffy et al., and U.S. Design Patent 659,821 to Spoo et al.).

[0006] The present invention, as described below, provides an alternative construction of a filtering face-piece respirator configured to maintain its cup-shape.

SUMMARY OF THE INVENTION

[0007] The present invention provides a filtering face-piece respirator that comprises a mask body formed from a filtering structure. The mask body includes a dart permanently formed in the mask body to inhibit collapse of the respirator from its cup-shape, the dart transversely extending across the mask body and tapering at each of its ends. The dart is locked at its ends by a securement, such as a weld, which is distanced from the perimeter of the mask body. Between the securement and the perimeter of the mask body is usable, breathable filtering structure.

[0008] The dart increases the integrity of the mask body, when in the opened cup-shaped configuration, inhibiting collapse of the mask body, due to, for example, increased pressure drop across the mask body due to dirty or moisture laden air. The sealed ends of the dart permanently lock the position of the dart while the flexible center portion of the dart allows sufficient confirmation of the mask body to the wearer's face. Additionally, the flexible center portion of the dart allows sufficient flexibility in the mask body to accommodate for the wearer's head and facial movements.

Glossary

[0009] The terms set forth below will have the meanings as defined:

[0010] "comprises" or "comprising" means its definition as is standard in patent terminology, being an open-ended term that is generally synonymous with "includes", "having", or "containing". Although "comprises", "includes", "having", and "containing" and variations thereof are commonly-used, open-ended terms, this invention also may be suitably described using narrower terms such as "consists essentially of", which is semi open-ended term in that it excludes only those things or elements that would have a deleterious effect on the performance of the inventive respirator in serving its intended function;

[0011] "clean air" means a volume of atmospheric ambient air that has been filtered to remove contaminants;

[0012] "contaminants" means particles (including dusts, mists, and fumes) and/or other substances that generally may not be considered to be particles (e.g., organic vapors, etc.) but which may be suspended in air;

[0013] "crosswise dimension" is the dimension that extends laterally across the respirator, from side-to-side when the respirator is viewed from the front;

[0014] "cup-shaped configuration", and variations thereof, mean any vessel-type shape that is capable of adequately covering the nose and mouth of a person;

5 [0015] "dart" means a double-tapered region in the filtering structure of the mask body, the region having two fixed opposite ends and a center region having an adjustable width tapering to the fixed ends;

[0016] "exterior gas space" means the ambient atmospheric gas space into which exhaled gas enters after passing through and beyond the mask body and/or exhalation valve;

10 [0017] "exterior surface" means the surface of the mask body exposed to ambient atmospheric gas space when the mask body is positioned on the person's face;

[0018] "filtering face-piece" means that the mask body itself is designed to filter air that passes through it; there are no separately identifiable filter cartridges or insert-molded filter elements attached to or molded into the mask body to achieve this purpose;

15 [0019] "filter" or "filtration layer" means one or more layers of air-permeable material, which layer(s) is adapted for the primary purpose of removing contaminants (such as particles) from an air stream that passes through it;

[0020] "filter media" means an air-permeable structure that is designed to remove contaminants from air that passes through it;

20 [0021] "filtering structure" and "breathable filtering structure" each means a generally air-permeable construction that filters air;

[0022] "folded inwardly" means being bent back towards the part from which extends;

[0023] "harness" means a structure or combination of parts that assists in supporting the mask body on a wearer's face;

25 [0024] "interior gas space" means the space between a mask body and a person's face;

[0025] "interior surface" means the surface of the mask body closest to a person's face when the mask body is positioned on the person's face;

[0026] "line of demarcation" means a fold, seam, weld line, bond line, stitch line, hinge line, and/or any combination thereof;

30 [0027] "mask body" means an air-permeable structure that is designed to fit over the nose and mouth of a person and that helps define an interior gas space separated from an exterior gas space (including the seams and bonds that join layers and parts thereof together);

[0028] "nose clip" means a mechanical device (other than a nose foam), which device is adapted for use on a mask body to improve the seal at least around a wearer's nose;

[0029] "perimeter" means the outer edge of the mask body, which outer edge would be disposed generally proximate to a wearer's face when the respirator is being donned by a person; a "perimeter segment" is a portion of the perimeter;

[0030] "pleat" means a portion that is designed to be or is folded back upon itself;

5 [0031] "polymeric" and "plastic" each mean a material that mainly includes one or more polymers and that may contain other ingredients as well;

[0032] "respirator" means an air filtration device that is worn by a person to provide the wearer with clean air to breathe; and

[0033] "transversely extending" means extending generally in the crosswise dimension.

10

BRIEF DESCRIPTION OF THE DRAWINGS

[0034] FIG. 1 is a front perspective view of a filtering face-piece respirator **10** being worn on a person's face, the respirator **10** having a dart **60**;

[0035] FIG. 2 is a side view of the respirator **10** of FIG. 1;

15 [0036] FIG. 3 is a cross-sectional view of a filtering structure **16** suitable for use in the respirator **10** of FIGS. 1 and 2;

[0037] FIG. 4 is a top plan view of a mask body **12** in a collapsed configuration, prior to bonding the dart;

[0038] FIG. 5 is a cross-sectional view of the pleat **50** taken along lines 5-5 of FIG. 4;

20 [0039] FIG. 6 is a top plan view of the mask body **12** of FIG. 4 in a partially opened cup-shape configuration, prior to bonding the dart;

[0040] FIG. 7 is a side view of the mask body **12** of FIG. 6;

[0041] FIG. 8 is a side view of the mask body **12** in a fully opened, cup-shaped configuration with the dart **60** and an optional secondary dart **70**.

[0042] FIG. 9 is a cross-sectional view of the pleat **50** taken along lines 9-9 of FIG. 8.

25 [0043] FIG. 10 is a schematic process for forming the mask body **12** of FIG. 4, which can be formed into the respirator **10** having a dart **60**.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

30 [0044] In practicing the present invention, a filtering face-piece respirator is provided that has a permanent dart in the mask body of the respirator. The dart, formed by pleating the filtering structure and then sealing or bonding the pleat while the mask body is in a cup-shape, inhibits collapse of the respirator from its final cup-shape.

[0045] In the following description, reference is made to the accompanying drawings that form a part hereof and in which are shown by way of illustration various specific embodiments.

The various elements and reference numerals of one embodiment described herein are consistent with and the same as the similar elements and reference numerals of another embodiment described herein, unless indicated otherwise. It is to be understood that other embodiments are contemplated and may be made without departing from the scope or spirit of the present invention. The following description, therefore, is not to be taken in a limiting sense. While the present invention is not so limited, an appreciation of various aspects of the invention will be gained through a discussion of the examples provided below.

[0046] Turning to the figures, FIGS. 1 and 2 show an example of a filtering face-piece respirator **10** that may be used in connection with the present invention to provide clean air for the wearer to breathe. The filtering face-piece respirator **10** includes a mask body **12** and a harness **14**. In this use-configuration, the mask body **12** has a cup-shape that is fairly rigid. The mask body **12** retains this cup shape and inhibits deforming from this shape unless an intentional force (e.g., pressure) is applied thereto.

[0047] The mask body **12** has a filtering structure **16** through which inhaled air must pass before entering the wearer's respiratory system. The filtering structure **16** removes contaminants from the ambient environment so that the wearer breathes clean air. The filtering structure **16** may take on a variety of different shapes and configurations and typically is adapted so that it properly fits against the wearer's face or within a support structure. Generally the shape and configuration of the filtering structure **16** corresponds to the general shape of the mask body **12**.

[0048] The filtering structure **16** that is used in the mask body **12** can be of a particle capture or gas and vapor type filter. The filtering structure **16** also may be a barrier layer that prevents the transfer of liquid from one side of the filter layer to another to prevent, for instance, liquid aerosols or liquid splashes (e.g., blood) from penetrating the filter layer. Multiple layers of similar or dissimilar filter media may be used to construct the filtering structure **16** as the application requires. Filtration layers that may be beneficially employed in a layered mask body are generally low in pressure drop (for example, less than about 195 to 295 Pascals at a face velocity of 13.8 centimeters per second) to minimize the breathing work of the mask wearer. Filtration layers additionally may be flexible and may have sufficient shear strength so that they generally retain their structure under the expected use conditions.

[0049] The mask body **12** includes a top portion **18** and a bottom portion **20** separated by a line of demarcation **22**. In this particular embodiment, the line of demarcation **22** is a fold or pleat that extends transversely across the central portion of the mask body from side-to-side. The mask body **12** also includes a perimeter **24** that defines a perimeter edge **25**.

[0050] The harness **14** has a first, upper strap **26** that is secured to the top portion **18** of mask body **12** and a second, lower strap **27**. The straps **26**, **27** are secured to mask body **12** by staples **29**. The straps **26**, **27** may be made from a variety of materials, such as thermoset rubbers, thermoplastic elastomers, braided or knitted yarn and/or rubber combinations, inelastic braided components, and the like. The straps **26**, **27** preferably can be expanded to greater than twice their total length and be returned to their relaxed state. The straps **26**, **27** also could possibly be increased to three or four times their relaxed state length and can be returned to their original condition without any damage thereto when the tensile forces are removed. The straps **26**, **27** may be continuous straps or may have a plurality of parts, which can be joined together by further fasteners or buckles. Alternatively, the straps may form a loop that is placed around the wearer's ears.

[0051] A nose clip **35** (FIG. 2) can be disposed on or in the top portion **18** of the mask body **12** adjacent to the perimeter **24**, centrally positioned between the mask body side edges to assist in achieving an appropriate fit on and around the nose and upper cheekbones. The nose clip **35** may be made from a pliable metal or plastic that is capable of being manually adapted by the wearer to fit the contour of the wearer's nose. The nose clip **35** may comprise, for example, a malleable or pliable soft band of metal such as aluminum, which can be shaped to hold the mask in a desired fitting relationship over the nose of the wearer and where the nose meets the cheek.

[0052] In accordance with this invention, respirator **10** includes a permanent dart **60** in the filtering structure **16**. The dart **60** is created when a transversely extending pleat is closed or locked at each end by a securement **55** (e.g., a weld) and opened at the center of the mask body **12**. Thus the dart **60** tapers both directions from a central area of the mask body **12** to the side edges of the mask body **12**. The securement **55** locks the construction and dimensions of the dart **60** at the location of securement **55**, inhibiting the two edges of the dart **60** from closing upon themselves and thus collapsing the cup shape of the mask body **12**. Details regarding the dart **60** and methods of forming it are described below in relation to FIGS. 4 through 9.

[0053] Respirator **10** includes other features that are not specifically called out in reference to FIGS. 1 or 2, such as the side flanges, one of which is seen in FIGS. 1 and 2, but which are discussed in relation to FIG. 4 below. Additional details regarding the flanges and other features of respirator **10** and mask body **12** can be found in U.S. patent application 13/727,923 filed December 27, 2012, titled "Filtering Face-Piece Respirator Having Folded Flange," the entire disclosure of which is incorporated herein by reference.

[0054] FIG. 3 shows an exemplary filtering structure **16** of the mask body **12** having multiple layers such as an inner cover web **38**, an outer cover web **40**, and a filtration layer **42**.

The filtering structure **16** also may have a structural netting or mesh juxtaposed against at least one or more of the layers **38**, **40**, or **42**, typically against the outer surface of the outer cover web **40**, that assist in providing a cup-shaped configuration. The filtering structure **16** also could have one or more horizontal and/or vertical lines of demarcation (e.g., pleat, fold, or rib) that contribute to its structural integrity.

[0055] An inner cover web **38**, which typically defines the interior surface of the mask body **12**, can be used to provide a smooth surface for contacting the wearer's face, and an outer cover web **40**, which typically defines the exterior surface of the mask body **12**, can be used to entrap loose fibers in the mask body or for aesthetic reasons. Both cover webs **38**, **40** protect the filtration layer **42**. The cover webs **38**, **40** typically do not provide any substantial filtering benefits to the filtering structure **16**, although outer cover web **40** can act as a pre-filter to the filtration layer **42**.

[0056] To obtain a suitable degree of comfort, the inner cover web **38** preferably has a comparatively low basis weight and is formed from comparatively fine fibers, often finer than those of outer cover web **40**. Either or both cover webs **38**, **40** may be fashioned to have a basis weight of about 5 to about 70 g/m² (typically about 17 to 51g/m² and in some embodiments 34 to 51g/m²), and the fibers may be less than 3.5 denier (typically less than 2 denier, and more typically less than 1 denier) but greater than 0.1. Fibers used in the cover webs **38**, **40** often have an average fiber diameter of about 5 to 24 micrometers, typically of about 7 to 18 micrometers, and more typically of about 8 to 12 micrometers. The cover web material may have a degree of elasticity (typically, but not necessarily, 100 to 200% at break) and may be plastically deformable.

[0057] Typically, the cover webs **38**, **40** are made from a selection of nonwoven materials that provide a comfortable feel, particularly on the side of the filtering structure that makes contact with the wearer's face, i.e., inner cover web **38**. Suitable materials for the cover web may be blown microfiber (BMF) materials, particularly polyolefin BMF materials, for example polypropylene BMF materials (including polypropylene blends and also blends of polypropylene and polyethylene). Spun-bond fibers also may be used.

[0058] A typical cover web may be made from polypropylene or a polypropylene/polyolefin blend that contains 50 weight percent or more polypropylene. Polyolefin materials that are suitable for use in a cover web may include, for example, a single polypropylene, blends of two polypropylenes, and blends of polypropylene and polyethylene, blends of polypropylene and poly(4-methyl-1-pentene), and/or blends of polypropylene and polybutylene. Cover webs **38**, **40**

preferably have very few fibers protruding from the web surface after processing and therefore have a smooth outer surface.

[0059] The filtration layer **42** is typically chosen to achieve a desired filtering effect. The filtration layer **42** generally will remove a high percentage of particles and/or or other
5 contaminants from the gaseous stream that passes through it. For fibrous filter layers, the fibers selected depend upon the kind of substance to be filtered.

[0060] The filtration layer **42** may come in a variety of shapes and forms and typically has a thickness of about 0.2 millimeters (mm) to 5 mm, more typically about 0.3 mm to 3 mm (e.g., about 0.5 mm), and it could be a generally planar web or it could be corrugated to provide an
10 expanded surface area. The filtration layer also may include multiple filtration layers joined together by an adhesive or any other means. Essentially any suitable material that is known (or later developed) for forming a filtering layer may be used as the filtering material. Webs of melt-blown fibers, especially when in a persistent electrically charged (electret) form are especially useful. Electrically charged fibrillated-film fibers also may be suitable, as well as
15 rosin-wool fibrous webs and webs of glass fibers or solution-blown, or electrostatically sprayed fibers, especially in microfilm form. Also, additives can be included in the fibers to enhance the filtration performance of webs produced through a hydro-charging process. Fluorine atoms, in particular, can be disposed at the surface of the fibers in the filter layer to improve filtration performance in an oily mist environment.

[0061] Examples of particle capture filters include one or more webs of fine inorganic fibers (such as fiberglass) or polymeric synthetic fibers. Synthetic fiber webs may include electret-charged, polymeric microfibers that are produced from processes such as meltblowing. Polyolefin microfibers formed from polypropylene that has been electrically-charged provide particular utility for particulate capture applications. An alternate filter layer may comprise a
25 sorbent component for removing hazardous or odorous gases from the breathing air. Sorbents may include powders or granules that are bound in a filter layer by adhesives, binders, or fibrous structures. A sorbent layer can be formed by coating a substrate, such as fibrous or reticulated foam, to form a thin coherent layer. Sorbent materials may include activated carbons that are chemically treated or not, porous alumina-silica catalyst substrates, and alumina particles.

[0062] Although the filtering structure **16** has been illustrated in FIG. 3 with one filtration layer **42** and two cover webs **38, 40**, the filtering structure **16** may comprise a plurality or a combination of filtration layers **42**. For example, a pre-filter may be disposed upstream to a more refined and selective downstream filtration layer. Additionally, sorptive materials such as activated carbon may be disposed between the fibers and/or various layers that comprise the
30

filtering structure. Further, separate particulate filtration layers may be used in conjunction with sorptive layers to provide filtration for both particulates and vapors.

[0063] During respirator use, incoming air passes sequentially through layers **40**, **42**, and **38** before entering the mask interior. The air that is within the interior gas space of the mask body may then be inhaled by the wearer. When a wearer exhales, the air passes in the opposite direction sequentially through layers **38**, **42**, and **40**. Alternatively, an exhalation valve (not shown) may be provided on the mask body **12** to allow exhaled air to be rapidly purged from the interior gas space to enter the exterior gas space without passing through filtering structure **16**. The use of an exhalation valve may improve wearer comfort by rapidly removing the warm moist exhaled air from the mask interior. Essentially any exhalation valve that provides a suitable pressure drop and that can be properly secured to the mask body may be used in connection with the present invention to rapidly deliver exhaled air from the interior gas space to the exterior gas space.

[0064] Turning now to FIG. 4, FIG. 4 shows the mask body **12** from the respirator **10** in a folded or collapsed configuration, prior to having the dart formed therein, with additional features called out in this configuration. In this flat, collapsed configuration, various features such as the line of demarcation **22** are seen, as well as first and second flanges **30a** and **30b** at opposing sides **31a**, **31b** of the mask body **12**.

[0065] A center plane **32** bisects the mask body **12** to define the first and second sides **31a**, **31b**. The first and second flanges **30a** and **30b** located on opposing sides **31a** and **31b**, respectively, of the mask body **12** can be readily seen. The flanges **30a**, **30b** extend away from the filtering structure **16** of the mask body **12** at a line of demarcation **36a** at side **31a** and a line of demarcation **36b** in a generally planar manner. The flanges **30a**, **30b** may be an extension of filtering structure **16**, or they may be made from a separate material such as a rigid or semi-rigid plastic. Although the flanges **30a**, **30b** may comprise one or more or all of the various layers that comprise the mask body filtering structure **16**, the flanges **30a**, **30b** are not part of the primary filtering area of the mask body **12**.

[0066] Unlike the filtering structure **16**, the layers that comprise the flanges **30a**, **30b** may be compressed, rendering them nearly fluid impermeable. The flanges **30a**, **30b** can have welds or bonds **34** thereon to increase flange stiffness, and the mask body perimeter **24** also may have a series of bonds or welds **34** to join the various layers of the mask body **12** together and also to maintain the position of the nose clip **35**. The remainder of the filtering structure **16** – inwardly from the perimeter **24** – may be and preferably is fully fluid permeable over much of its

extended surface, with the possible exception of areas where there are bonds, welds, or fold lines.

[0067] The respirators of this invention include at least one permanent dart **60** formed in the mask body **12**, the dart **60** extending transversely across the mask body **12**, from one side **31a** of the mask through the center plane **32** to the other side **31b**.

[0068] The dart **60** is formed by securing (e.g., sealing, welding or otherwise bonding) a partially-open pleat close to its ends while leaving the center open. The securement **55** locks the three layers of the pleat into the double-tapering dart configuration. In accordance with this invention, the securement **55** is formed a distance from the perimeter edge **25** of the mask body **12**, to reduce the stiffness of the mask body **12** at its perimeter **24** and to allow better forming of the mask body **12** to the wearer's face. Additionally, having the securement **55** a distance from the perimeter edge **25** provides for usable filtering structure on either transverse side of the securement **55**.

[0069] FIGS. 4 through 9 illustrate the various configurations of the mask body **12** when forming the dart **60**. It is noted that the various elements of the mask body **12** of these five figures are interchangeable among the figures, and although a feature may not be specifically called out in a particular figure, the element is present unless it is contrary to the particular figure.

[0070] In FIG. 4, the mask body **12**, in a folded or collapsed configuration, has a pleat **50** extending from the line of demarcation **36a** at side **31a** to the line of demarcation **36b** at side **31b**. At these lines **36a**, **36b**, the pleat **50** is locked, but the pleat **50** can be opened as it nears the center plane **32**. FIG. 5 illustrates features of the pleat **50**, which are also seen in FIG. 4, including the external fold **52** and the internal fold **54**, and a line **53** where the external fold **52** terminates in relation to the filtering structure **16**. In the configuration of FIG. 4, because the entire length of pleat **50** is in an unopened state, the external fold **52** overlaps the line **53**.

[0071] FIG. 6 shows the mask body **12** from the front in a partially opened configuration, with the top portion **18** separated at least slightly from the bottom portion **20**; in this partially opened configuration, the mask body **12** is beginning to take on a cup-shape configuration. As can be seen, the pleat **50** has opened at least partially, separating the external fold **52** from the line **53** and exposing the internal fold **54**. The external fold **52** and line **53** are locked in relation to each other at the lines of demarcation **36a**, **36b** but the distance between fold **52** and line **53** increases towards the center plane **32**, resulting in two areas tapering from the center plane **32** to the lines of demarcation **36a**, **36b** and the flanges **30a**, **30b**. These tapering regions, at this stage, can be collapsed to return external fold **52** and line **53** together again.

[0072] FIG. 7 shows the mask body **12** from a side thereof, in a fully opened configuration and with the flange **30b** (and unseen flange **30a**) folded to be in contact with the filtering structure **16**. The cup-shaped configuration of the mask body **12**, formed by the top portion **18** and the bottom portion **20**, is readily identifiable. The pleat **50** is at least partially open, separating the external fold **52** from the line **53** thus exposing the internal fold **54** and forming two tapering areas extending to the lines of demarcation.

[0073] In FIG. 8, a securement **55** has been formed across the pleat (i.e., across external fold **52** and line **53** and thus internal fold **54**) resulting in bonded dart **60**. The securement **55** locks together the three individual layers of the filtering structure **16** and the sets the distance between external fold **52** and line **53**. FIG. 9 shows the three layers of filtering structure **16** secured and the partially opened pleat, with fold **52** not aligned with but offset from line **53**.

[0074] The securement **55** may be any mechanism that is applied to hold or fix the external fold **52** in relation to the line **53**, or, to hold or fix the three layers of filtering structure **16**. Examples of securement mechanisms include, for example, adhesive, a mechanical fastener or attachment (e.g., staple, sewing, rivet), or welding (e.g., ultrasonic and/or thermal welding (which includes heat and pressure)).

[0075] The securement **55** is positioned along the pleat at a location distanced from the perimeter **24** and edge **25** of the mask body **12**. A portion of the pleat is present between the securement **55** and the perimeter **24** and edge **25**, and in the illustrated embodiment, between the line of demarcation **36b**. By having a portion of unsecured or unsealed length of the pleat, the rigidity and stiffness of the mask body **12** at its perimeter **24** where it contacts the wearer's face is less than if the securement **55** was at the perimeter **24**, due in part to the usable (e.g., breathable) filtering structure **16** on either side of the securement **55**. This provides for better fit and sealing of the mask body **12** to the wearer's face than if the securement **55** was at the perimeter **24**. This distance, between securement **55** and perimeter **24**, particularly perimeter edge **25**, is at least 10 mm (1 cm) and in some embodiments 25 mm (2.5 cm).

[0076] In the mask body **12** of FIG. 8, a second bonded dart **70** is illustrated below the line of demarcation **22** in the bottom portion **20**. This second dart **70** extends from the line of demarcation **36b** through the center plane **32** (FIG. 6) to the other line of demarcation **36a** (FIG. 6). Second dart **70** further increases the strength of the mask body **12** and inhibits its collapse. Although two darts **60**, **70** are illustrated in the particular embodiment, other embodiments may include three or more darts, each extending transversely across the mask body **12**.

[0077] FIG. 10 illustrates an exemplary method for forming a mask body **12** which can be subsequently form into the filtering face-piece respirator **10** having the at least one bonded dart

60. Particularly, this method shown in FIG. 10 forms the mask body **12** of FIG. 4, after which the method of forming the bonded dart **60** is as explained above in reference to FIGS. 4 and 6 through 8. The mask body **12** is assembled in two operations – mask body making and mask finishing. The mask body making stage includes (a) lamination and fixing of nonwoven fibrous webs to form the filtration structure, (b) formation of various pleat crease lines, (c) formation of various bonded areas in the filtering structure including sealing the lateral mask edges, and (d) cutting the final form, which may be done in any sequence(s) or combination(s). The mask finishing operation includes (a) forming a cup-shaped structure, (b) folding the flanges to contact the filtration structure, (c) forming and bonding the darts, and (d) attaching a harness (e.g., straps). At least portions of this method can be considered a continuous process rather than a batch process; for example, the mask body can be made by a process that is continuous in the machine direction.

[0078] Referring to FIG. 10, three individual material sheets, an inner cover web **38**, an outer cover web **40**, and a filtration layer **42**, are brought together and plied face-to-face to form an extended length of filtering structure **16**. These materials are laminated together, for example, by adhesive, thermal welding, or ultrasonic welding, and cut to desired size. Welds or bonds **34** may be formed on the extended length of filtering structure **16**.

[0079] The filtering structure **16** laminate is then folded and/or pleated and various seals and bonds are made to form various features, such as the demarcation line **22** and flanges **30a**, **30b**, on the flat mask body **12**. In some embodiments, the filtering structure **16** is cut to desired size, typically a length suitable for a single mask, after forming of the demarcation line **22** and/or other folds, pleats and various seals and bonds.

[0080] The bonded dart **60** can then be formed in the mask body **12** as described above.

[0081] Straps **26**, **27** (FIG. 1) can be added to the mask body **12** at any stage; for example, to the flat mask as in FIG. 4, to the partially opened cup shape as in FIG. 6, to the fully opened cup shape as in FIG. 7, or to the fully opened cup shape with bonded flanges and dart **60** as in FIG. 8.

[0082] This invention may take on various modifications and alterations without departing from its spirit and scope. For example, an alternate face mask could be molded from filtering structure, using well known male-female molding techniques, with a dart as described herein. A pleat extending transversely across the mask could be sealed at securement areas distanced from the perimeter of the mask to form a dart. The resulting securement area would have breathable material on either transverse side of the area.

[0083] Accordingly, this invention is not limited to the above-described but is to be controlled by the limitations set forth in the following claims and any equivalents thereof.

[0084] This invention also may be suitably practiced in the absence of any element not specifically disclosed herein.

5 **[0085]** All patents and patent applications cited above, including those in the Background section, are incorporated by reference into this document in total. To the extent there is a conflict or discrepancy between the disclosure in such incorporated document and the above specification, the above specification will control.

What is claimed is:

1. A filtering face-piece respirator that comprises:

(a) a harness; and

5 (b) a mask body comprising a filtering structure and having a first side edge, a second opposite side edge and a perimeter, the filtering structure folded into a three-layer pleat at the side edges and sealed to itself at a location distanced from the perimeter to create a transversely extending dart.

10 2. The filtering face piece respirator of claim 1, wherein the pleat is sealed at least 5 mm from the perimeter.

3. The filtering face piece respirator of claim 1, wherein the pleat is sealed by a welded area.

15 4. The filtering face-piece respirator of claim 1, the mask body further comprising first and second flanges located at the first and second opposing sides, the first and second flanges each being folded inwardly to contact the filtering structure when the mask body is in an in-use configuration, with the transversely extending dart extending from the first flange to the
20 second flange.

5. The filtering face-piece respirator of claim 1, the face mask having a line of demarcation separating the face mask into a top portion and a bottom portion, and the transversely extending dart is located in the top portion.

25 6. The filtering face-piece respirator of claim 1, further comprising a second transversely extending dart located in the bottom portion.

7. A filtering face-piece respirator that comprises:

30 (a) a harness; and

(b) a mask body comprising a filtering structure and having a first side, a second opposite side, a center plane and a perimeter, the mask body having a dart transversely extending from the first side to the second side, the dart comprising a first securement on the first side and

a second securement on the second side, with breathable filtering structure present between the first securement and the first side and the second securement and the second side.

8. The filtering face-piece respirator of claim 7, the mask body further comprising first and second flanges located at the first and second sides, respectively, the first and second flanges each being folded inwardly to contact the filtering structure, with the transversely extending dart extending from the first flange to the second flange and with breathable filtering structure present between the first securement and the first flange and the second securement and the second flange.

9. The filtering face-piece respirator of claim 8, wherein the first and second securements are each at least 5 mm from the perimeter.

10. The filtering face-piece respirator of claim 7, wherein the first and second securements each comprise a welded region.

11. The filtering face-piece respirator of claim 7, the mask body having a line of demarcation separating the mask body into a top portion and a bottom portion, and the transversely extending dart is located in the top portion.

12. The filtering face-piece respirator of claim 11, further comprising a second transversely extending dart located in the bottom portion.

13. A method of making a cup-shaped filtering face-piece respirator, the method comprising:

(a) forming a flat face mask from filtering structure having a pleat extending from a first side to a second side;

(b) at least partially expanding the flat face mask to form a partially cup-shaped face mask with the pleat partially expanded; and

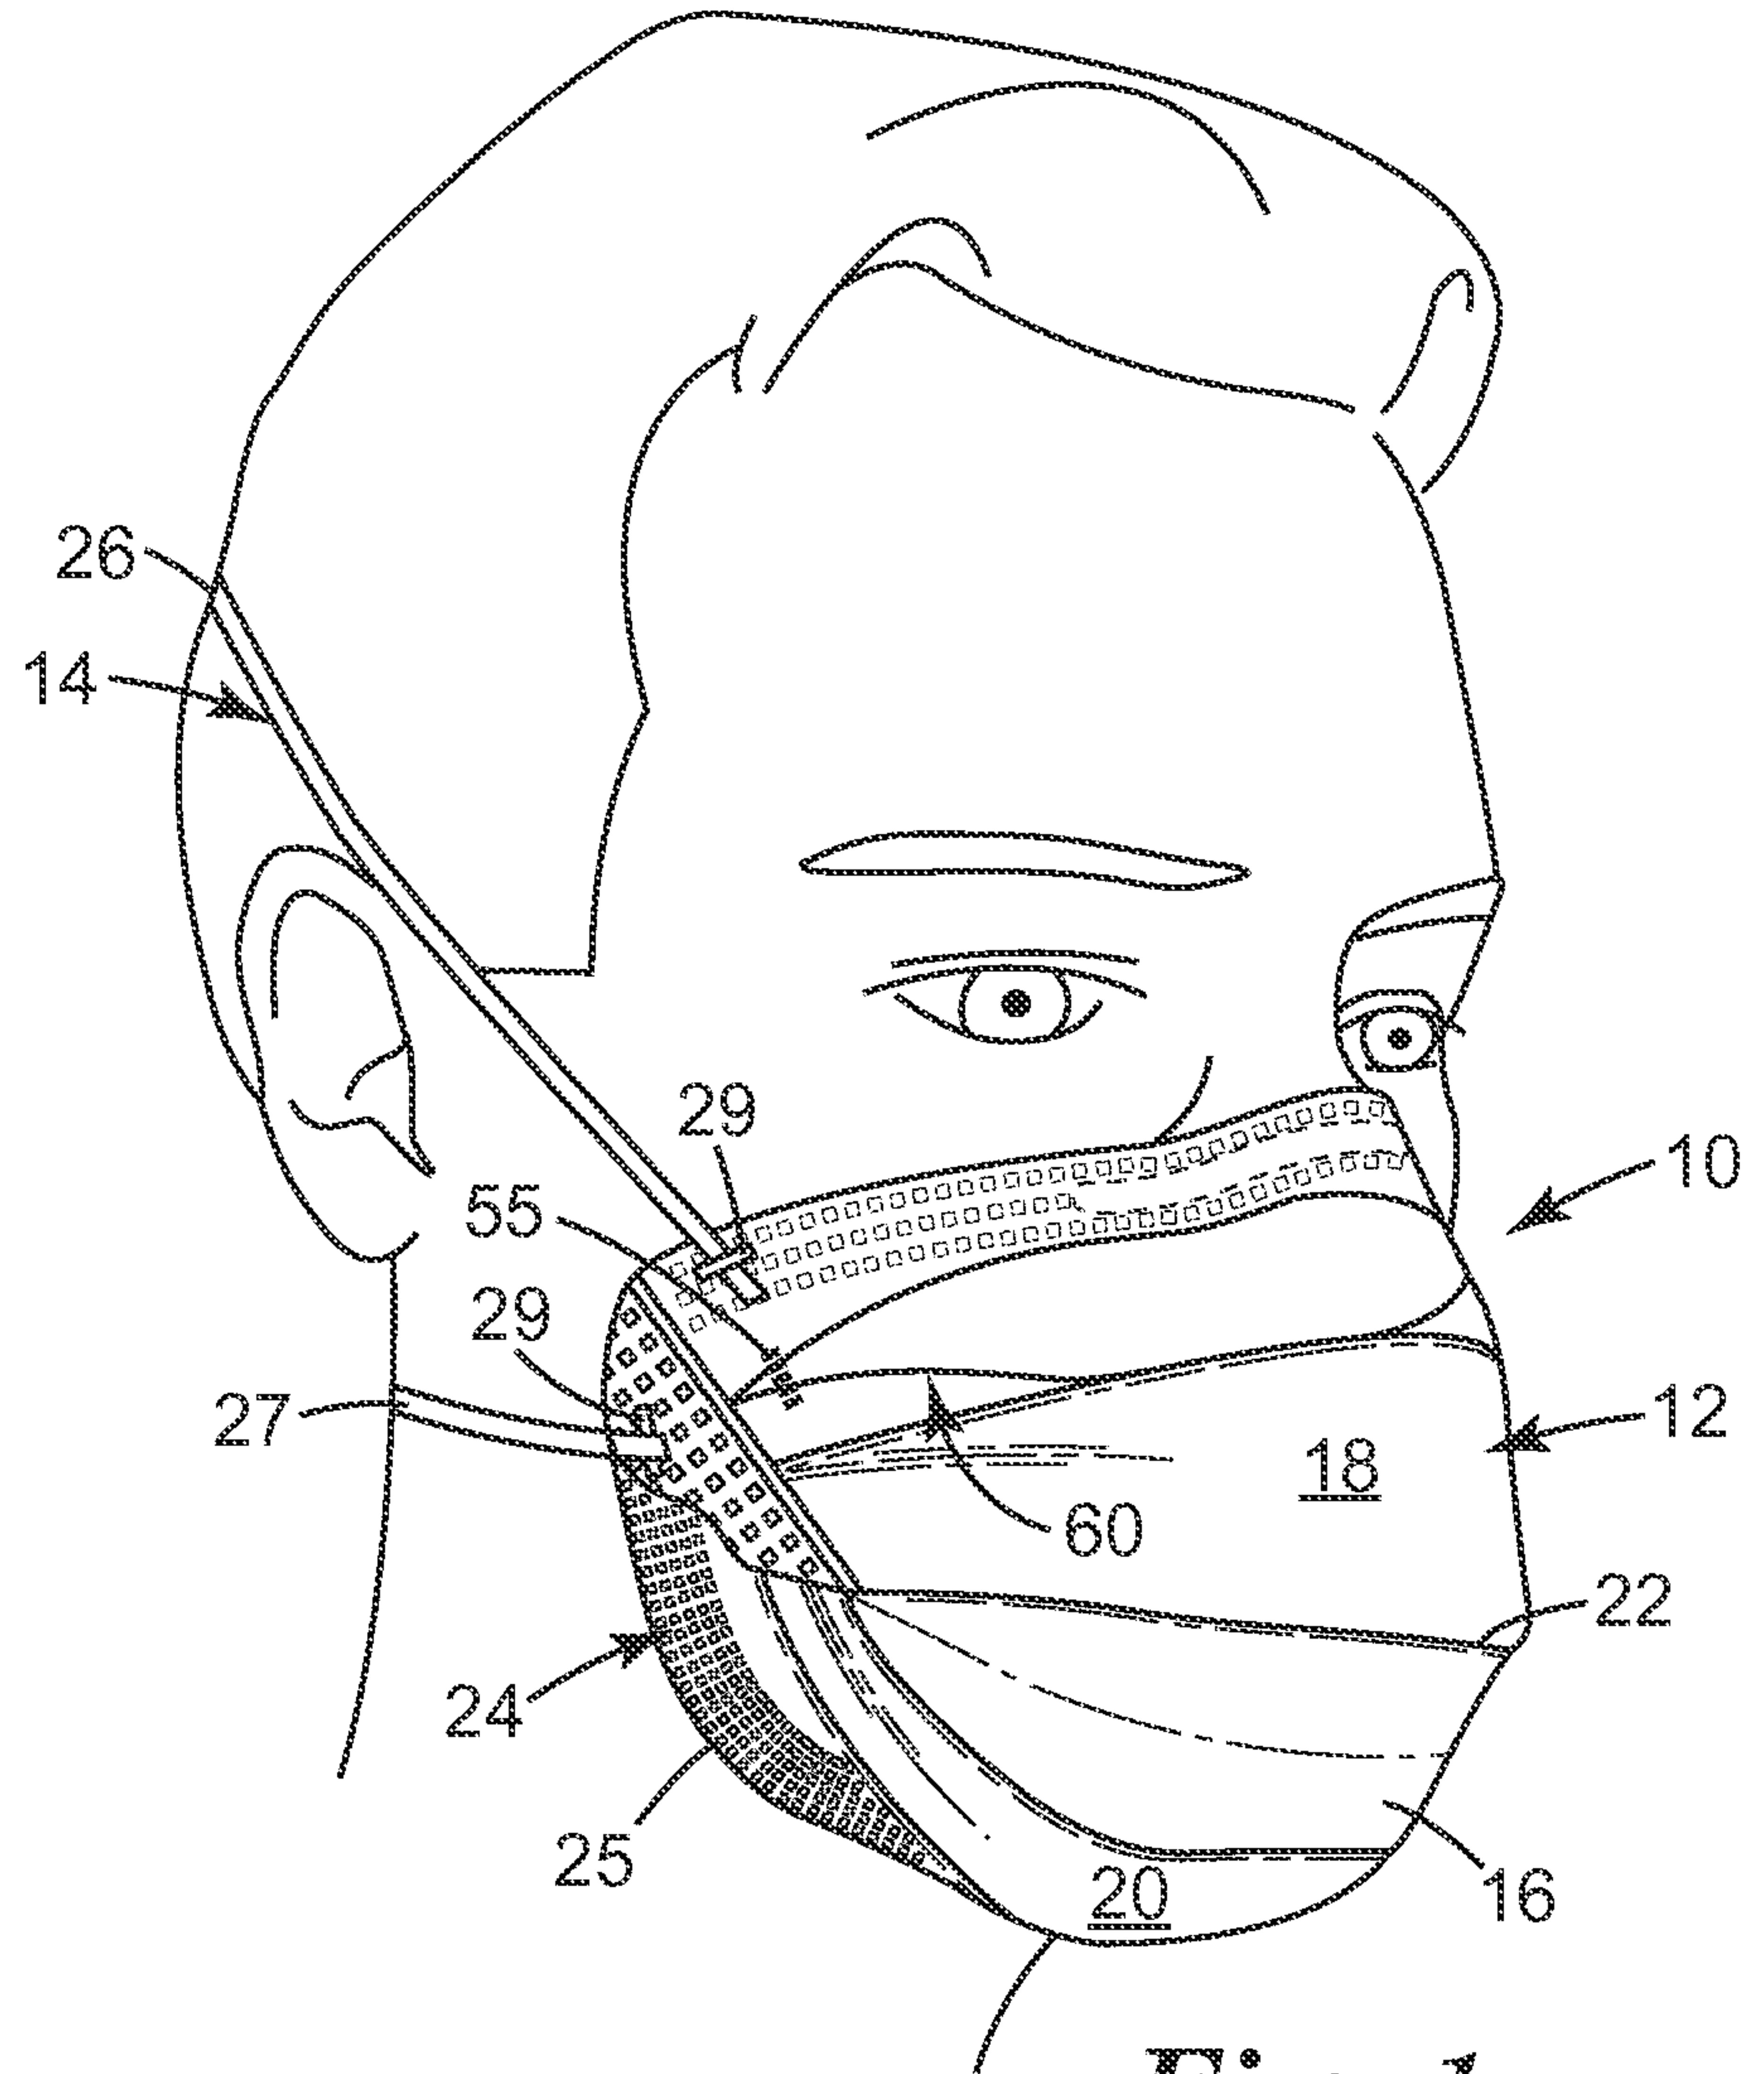
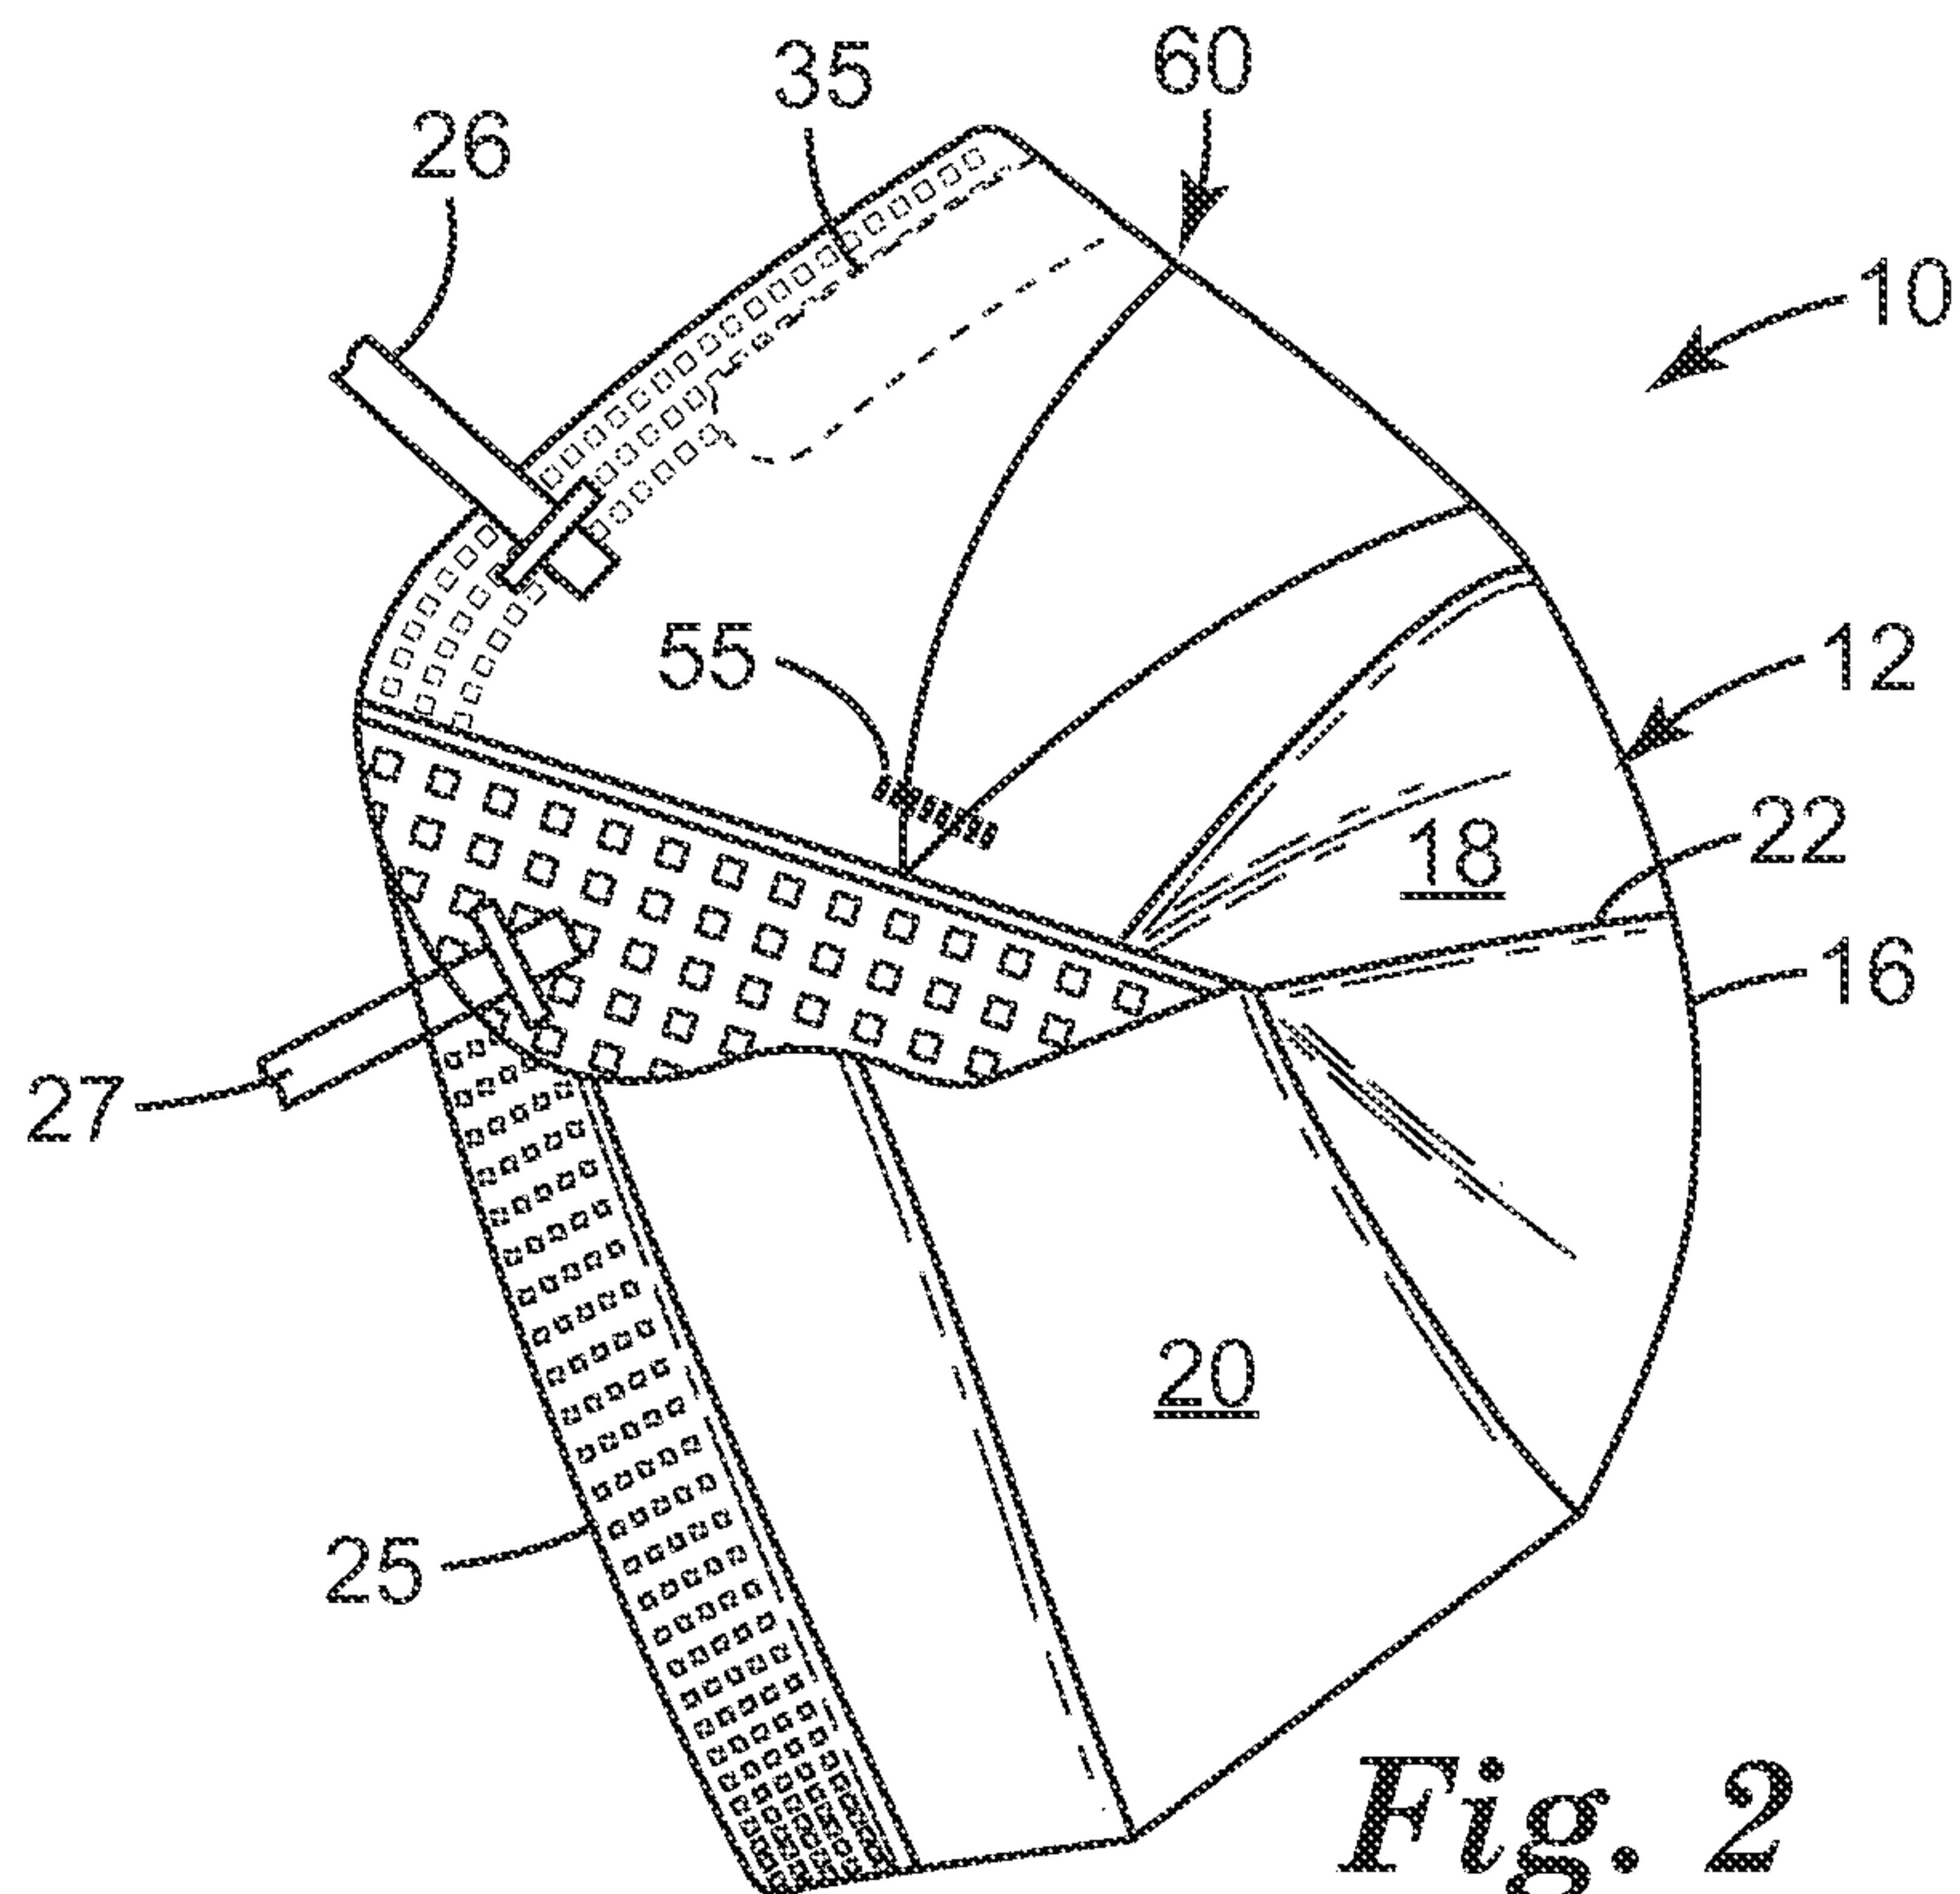
(c) forming a securement across the partially expanded pleat proximate each side to lock the pleat thus forming a dart.

14. The method of claim 13 wherein the step of forming a securement comprises forming a securement across the partially expanded pleat at a distance of at least 5 mm from each side.

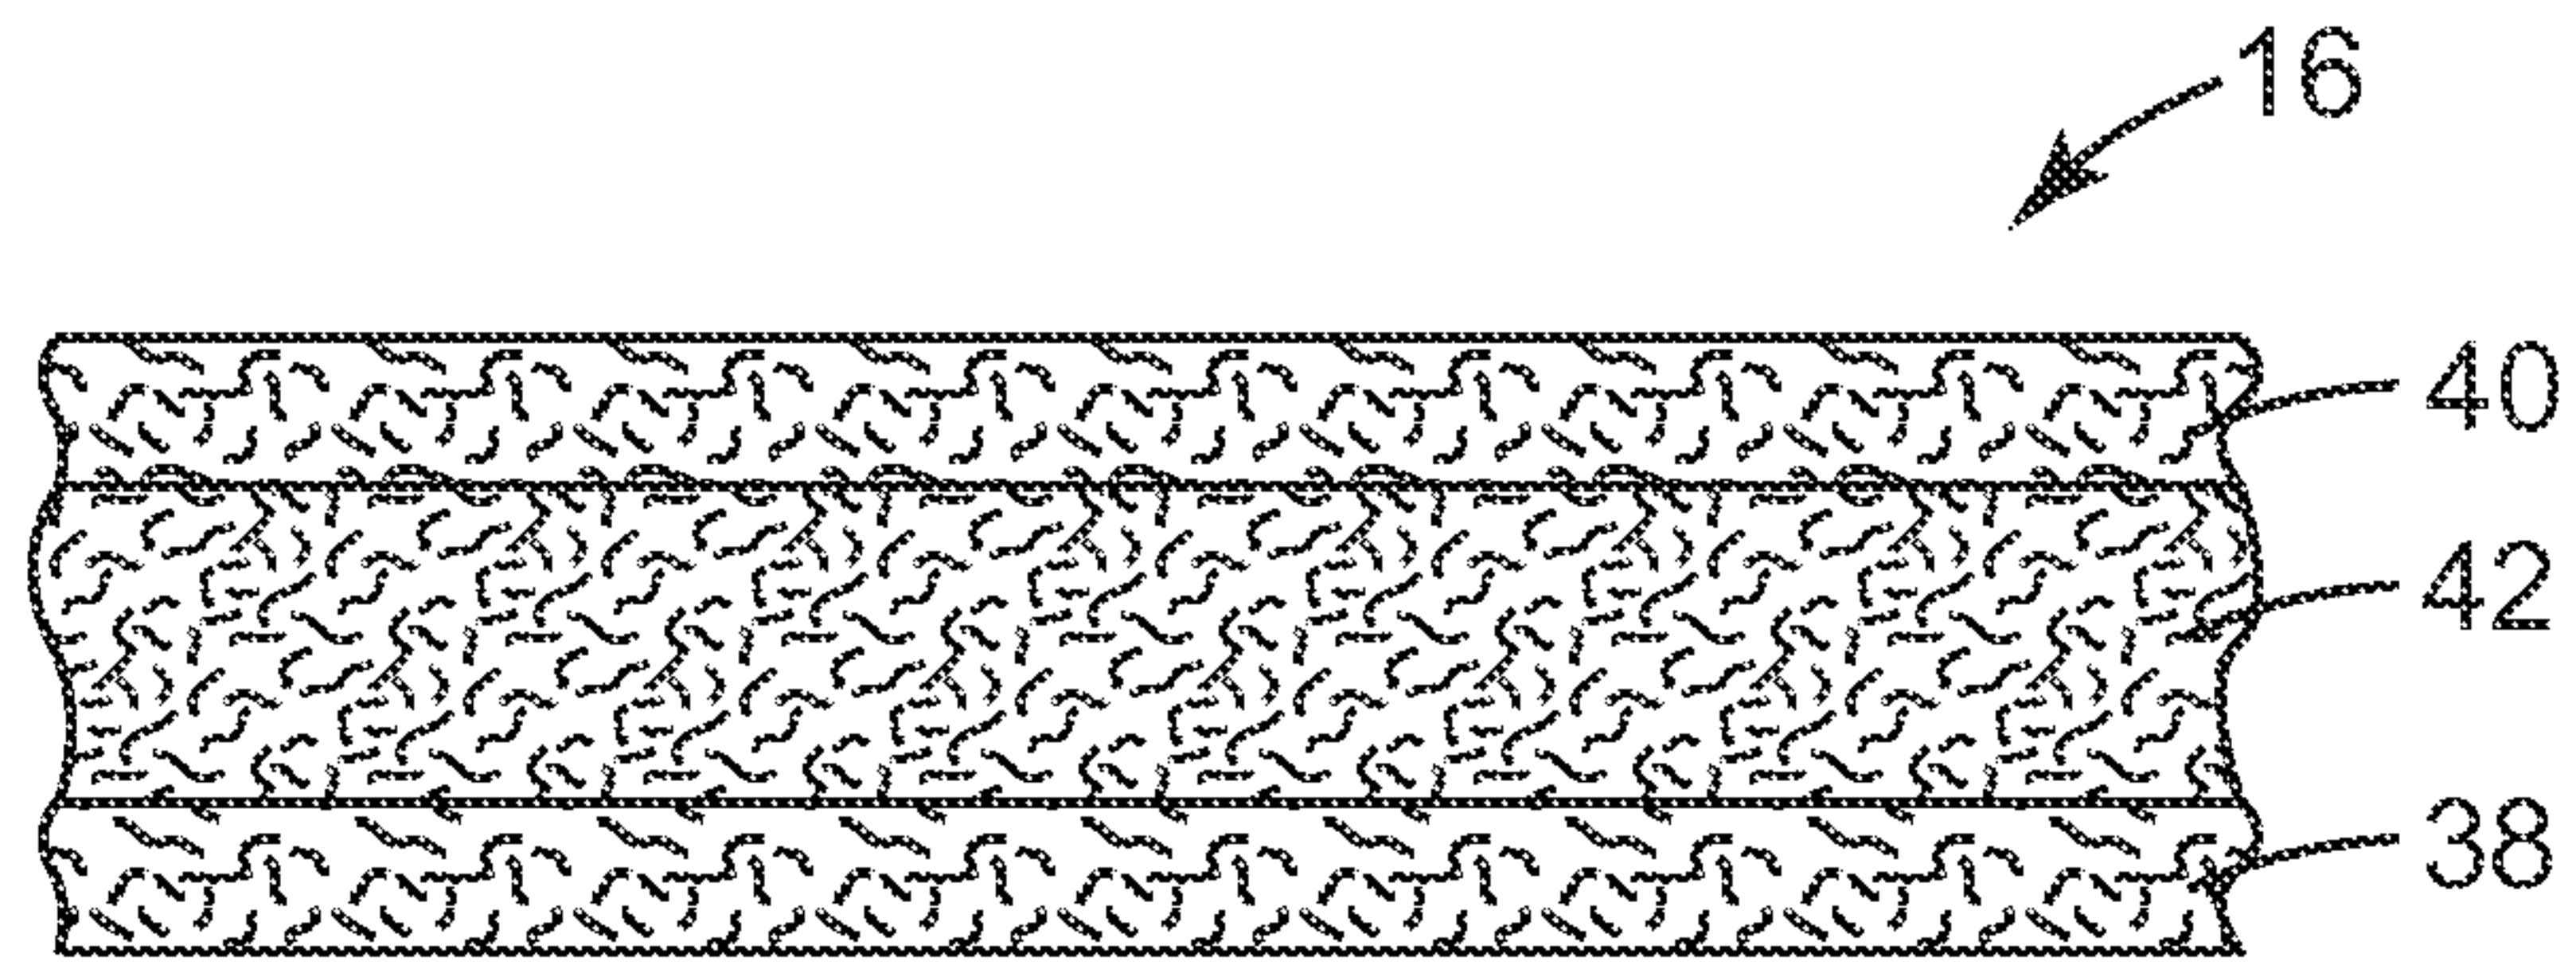
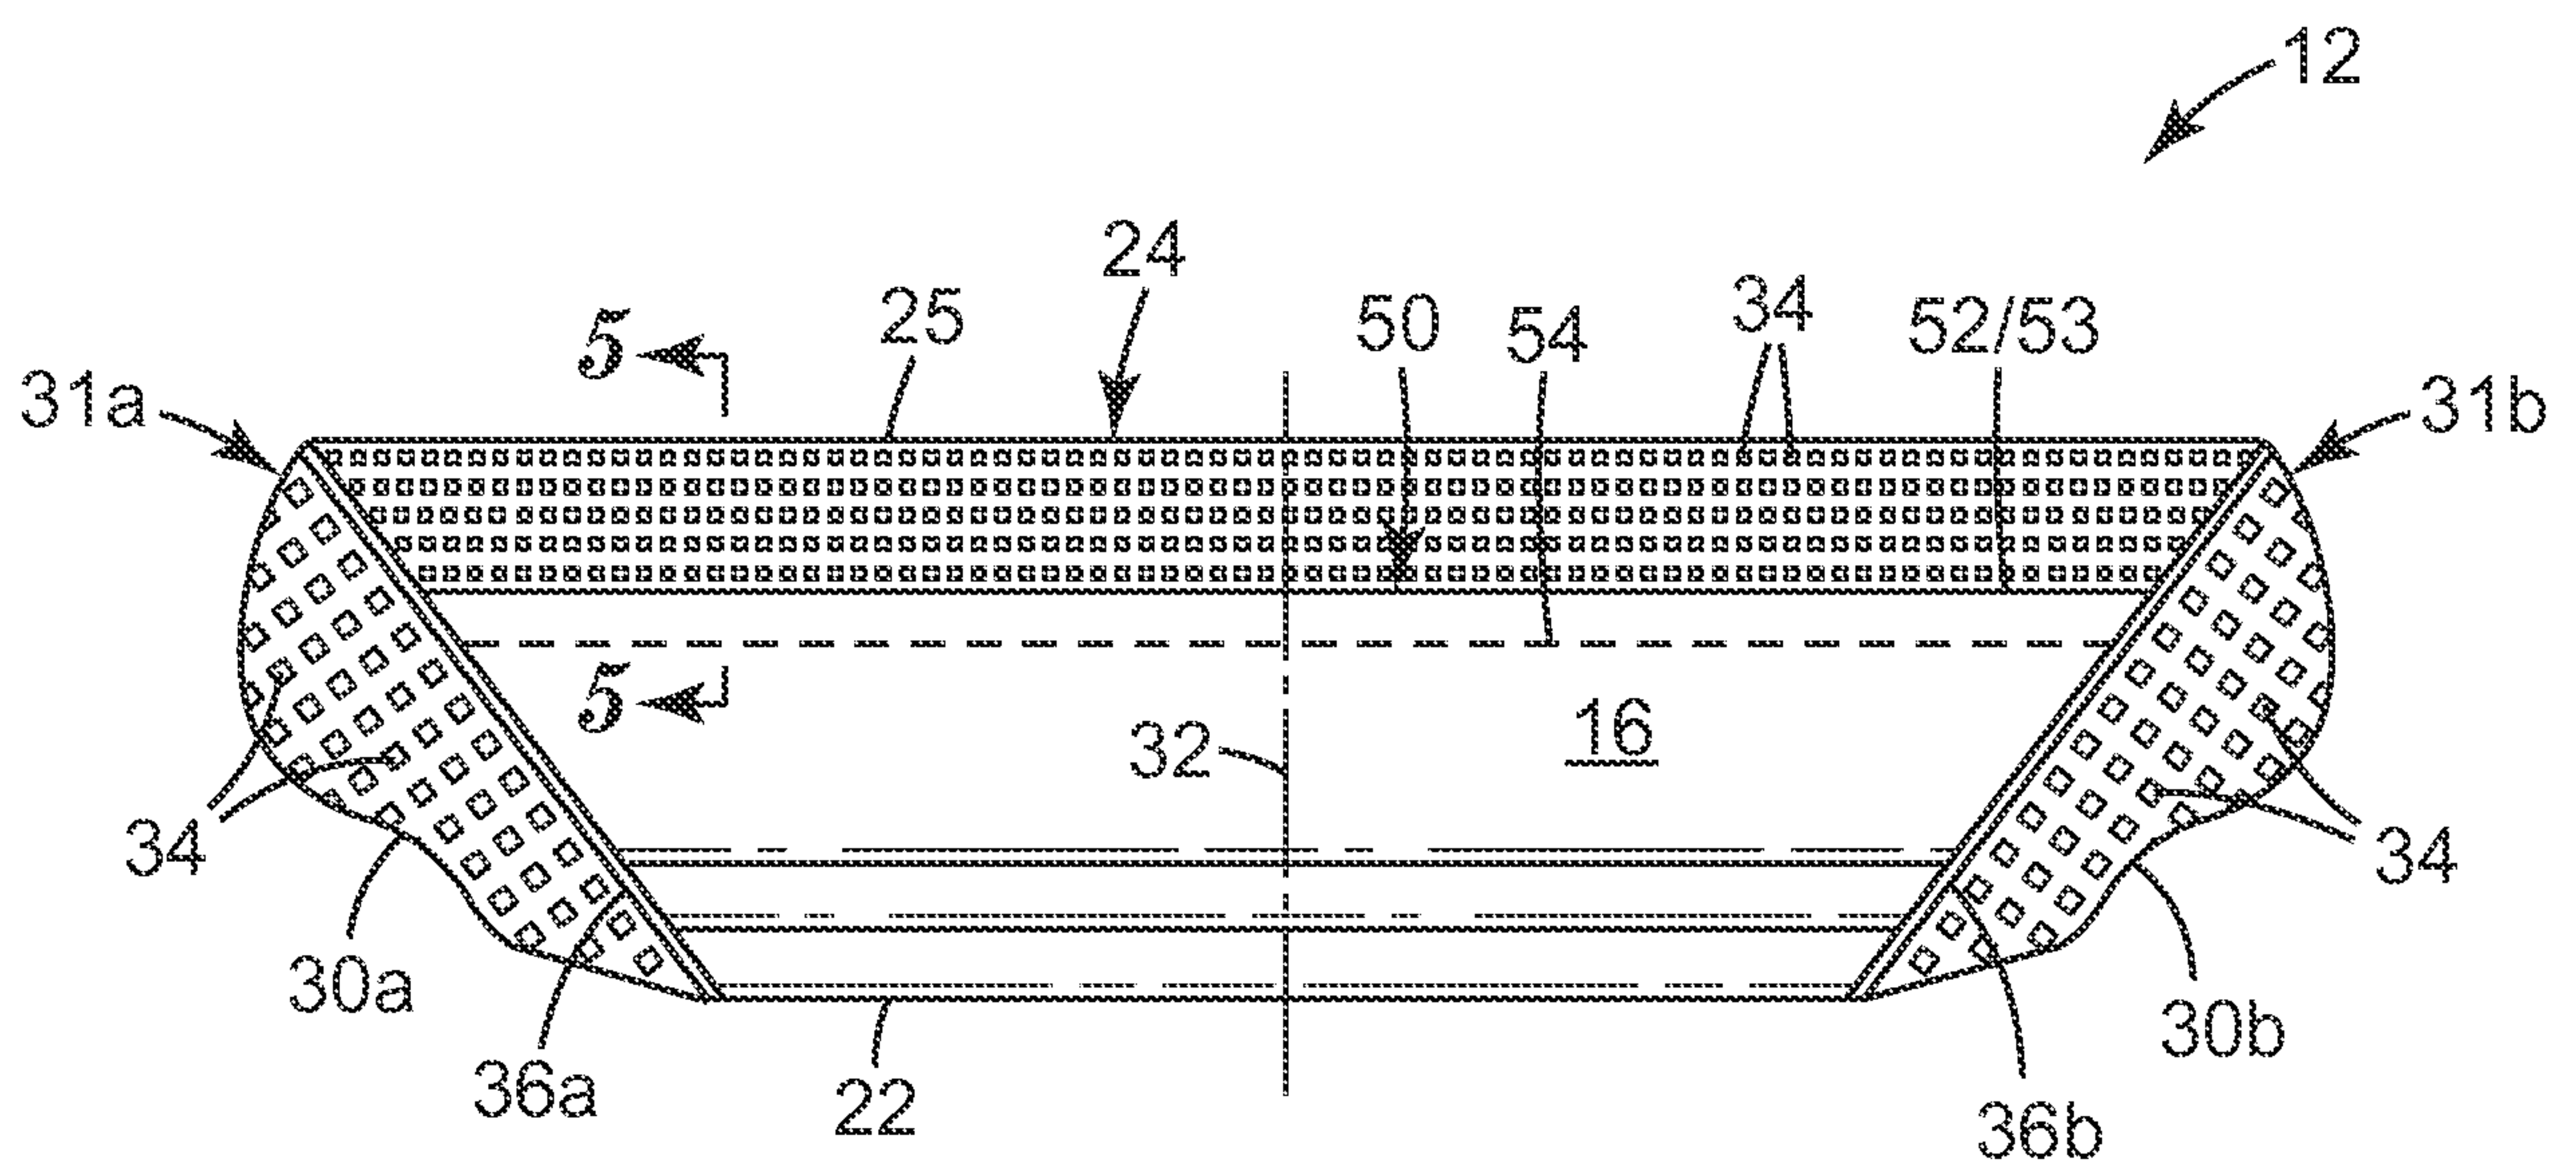
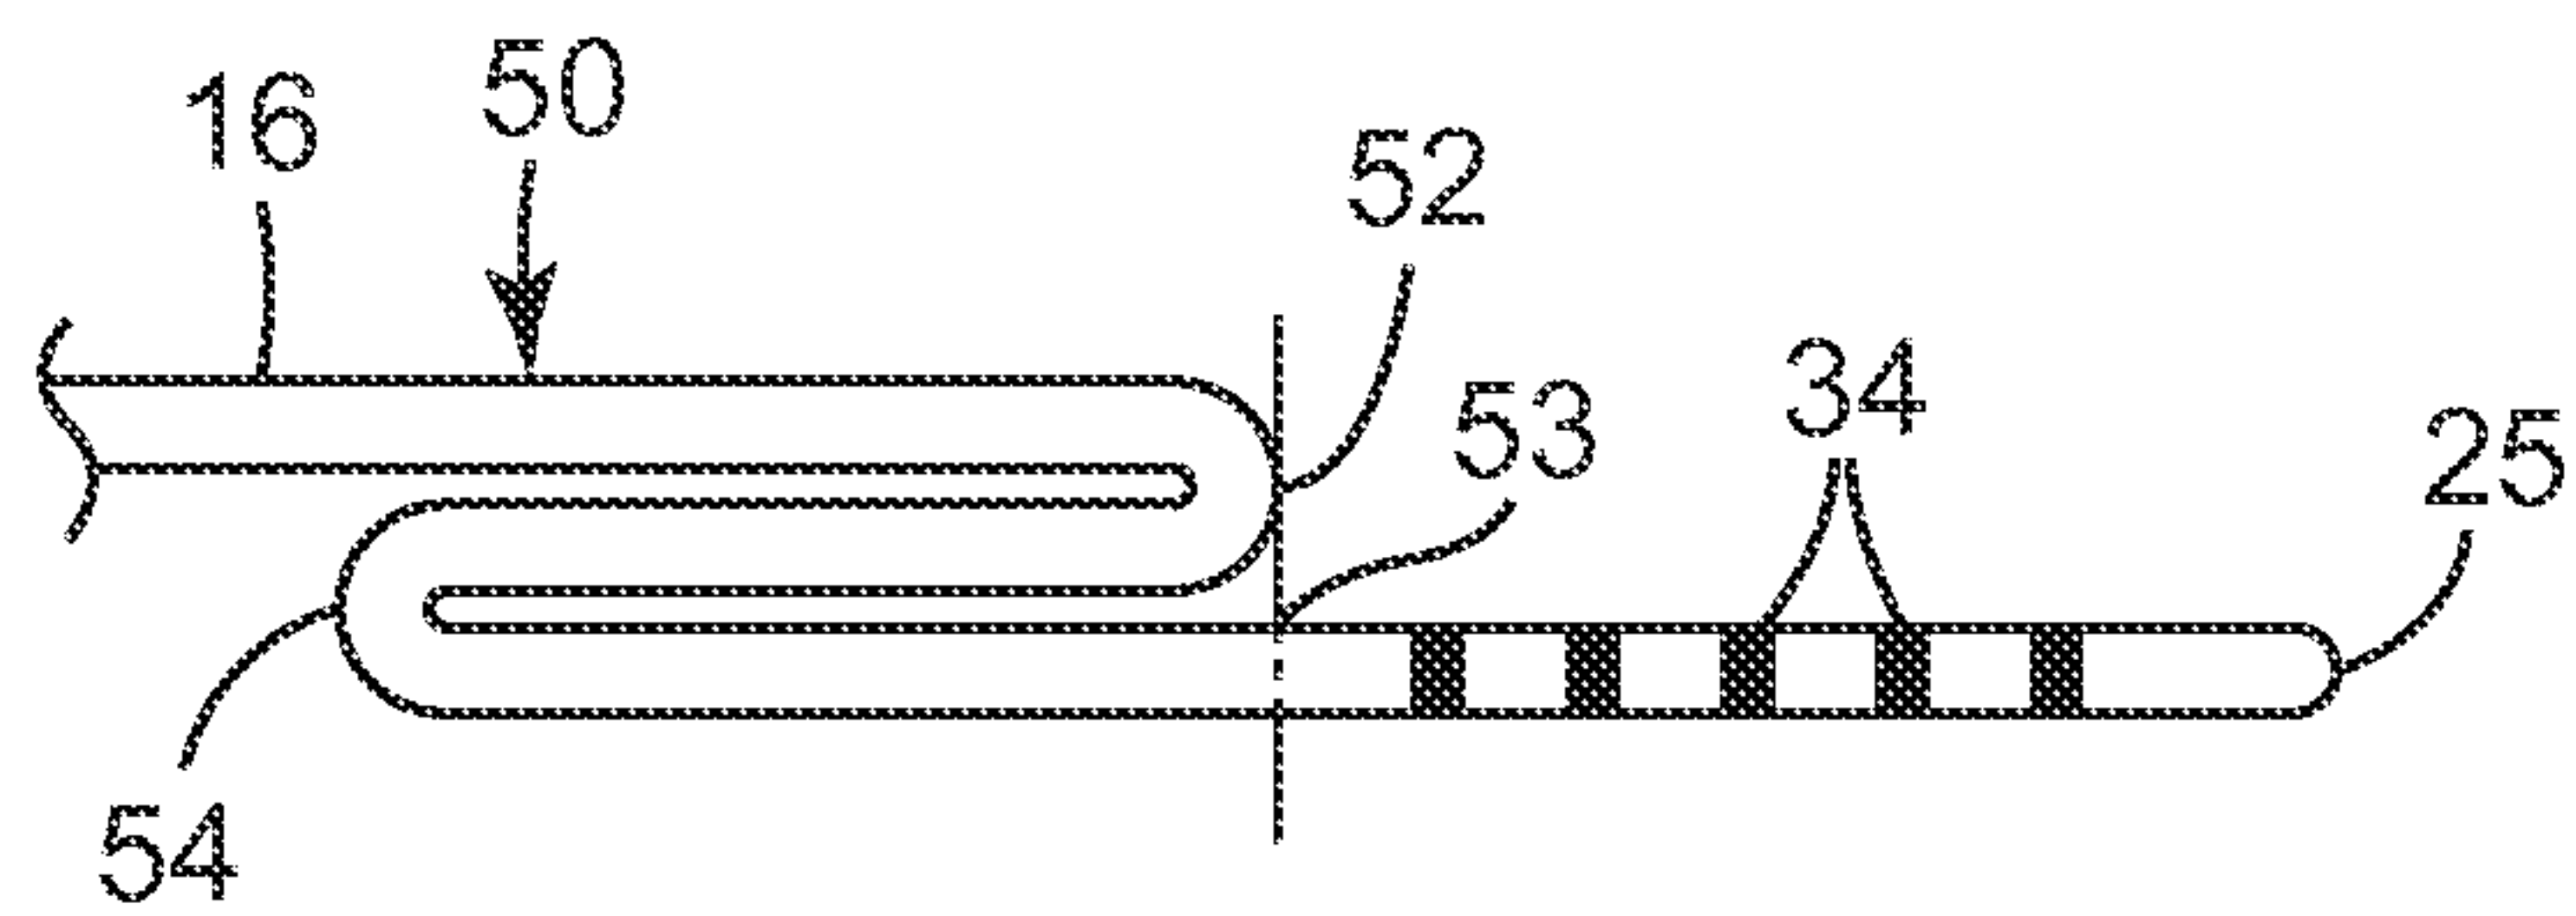
5 15. The method of claim 13 wherein the step of forming a securement comprises forming a securement across three layers of filtering structure.

10 16. The method of claim 13, wherein the flat face mask further comprises a first flange at the first side and a second flange at the second side and the pleat extends from the first flange to the second flange.

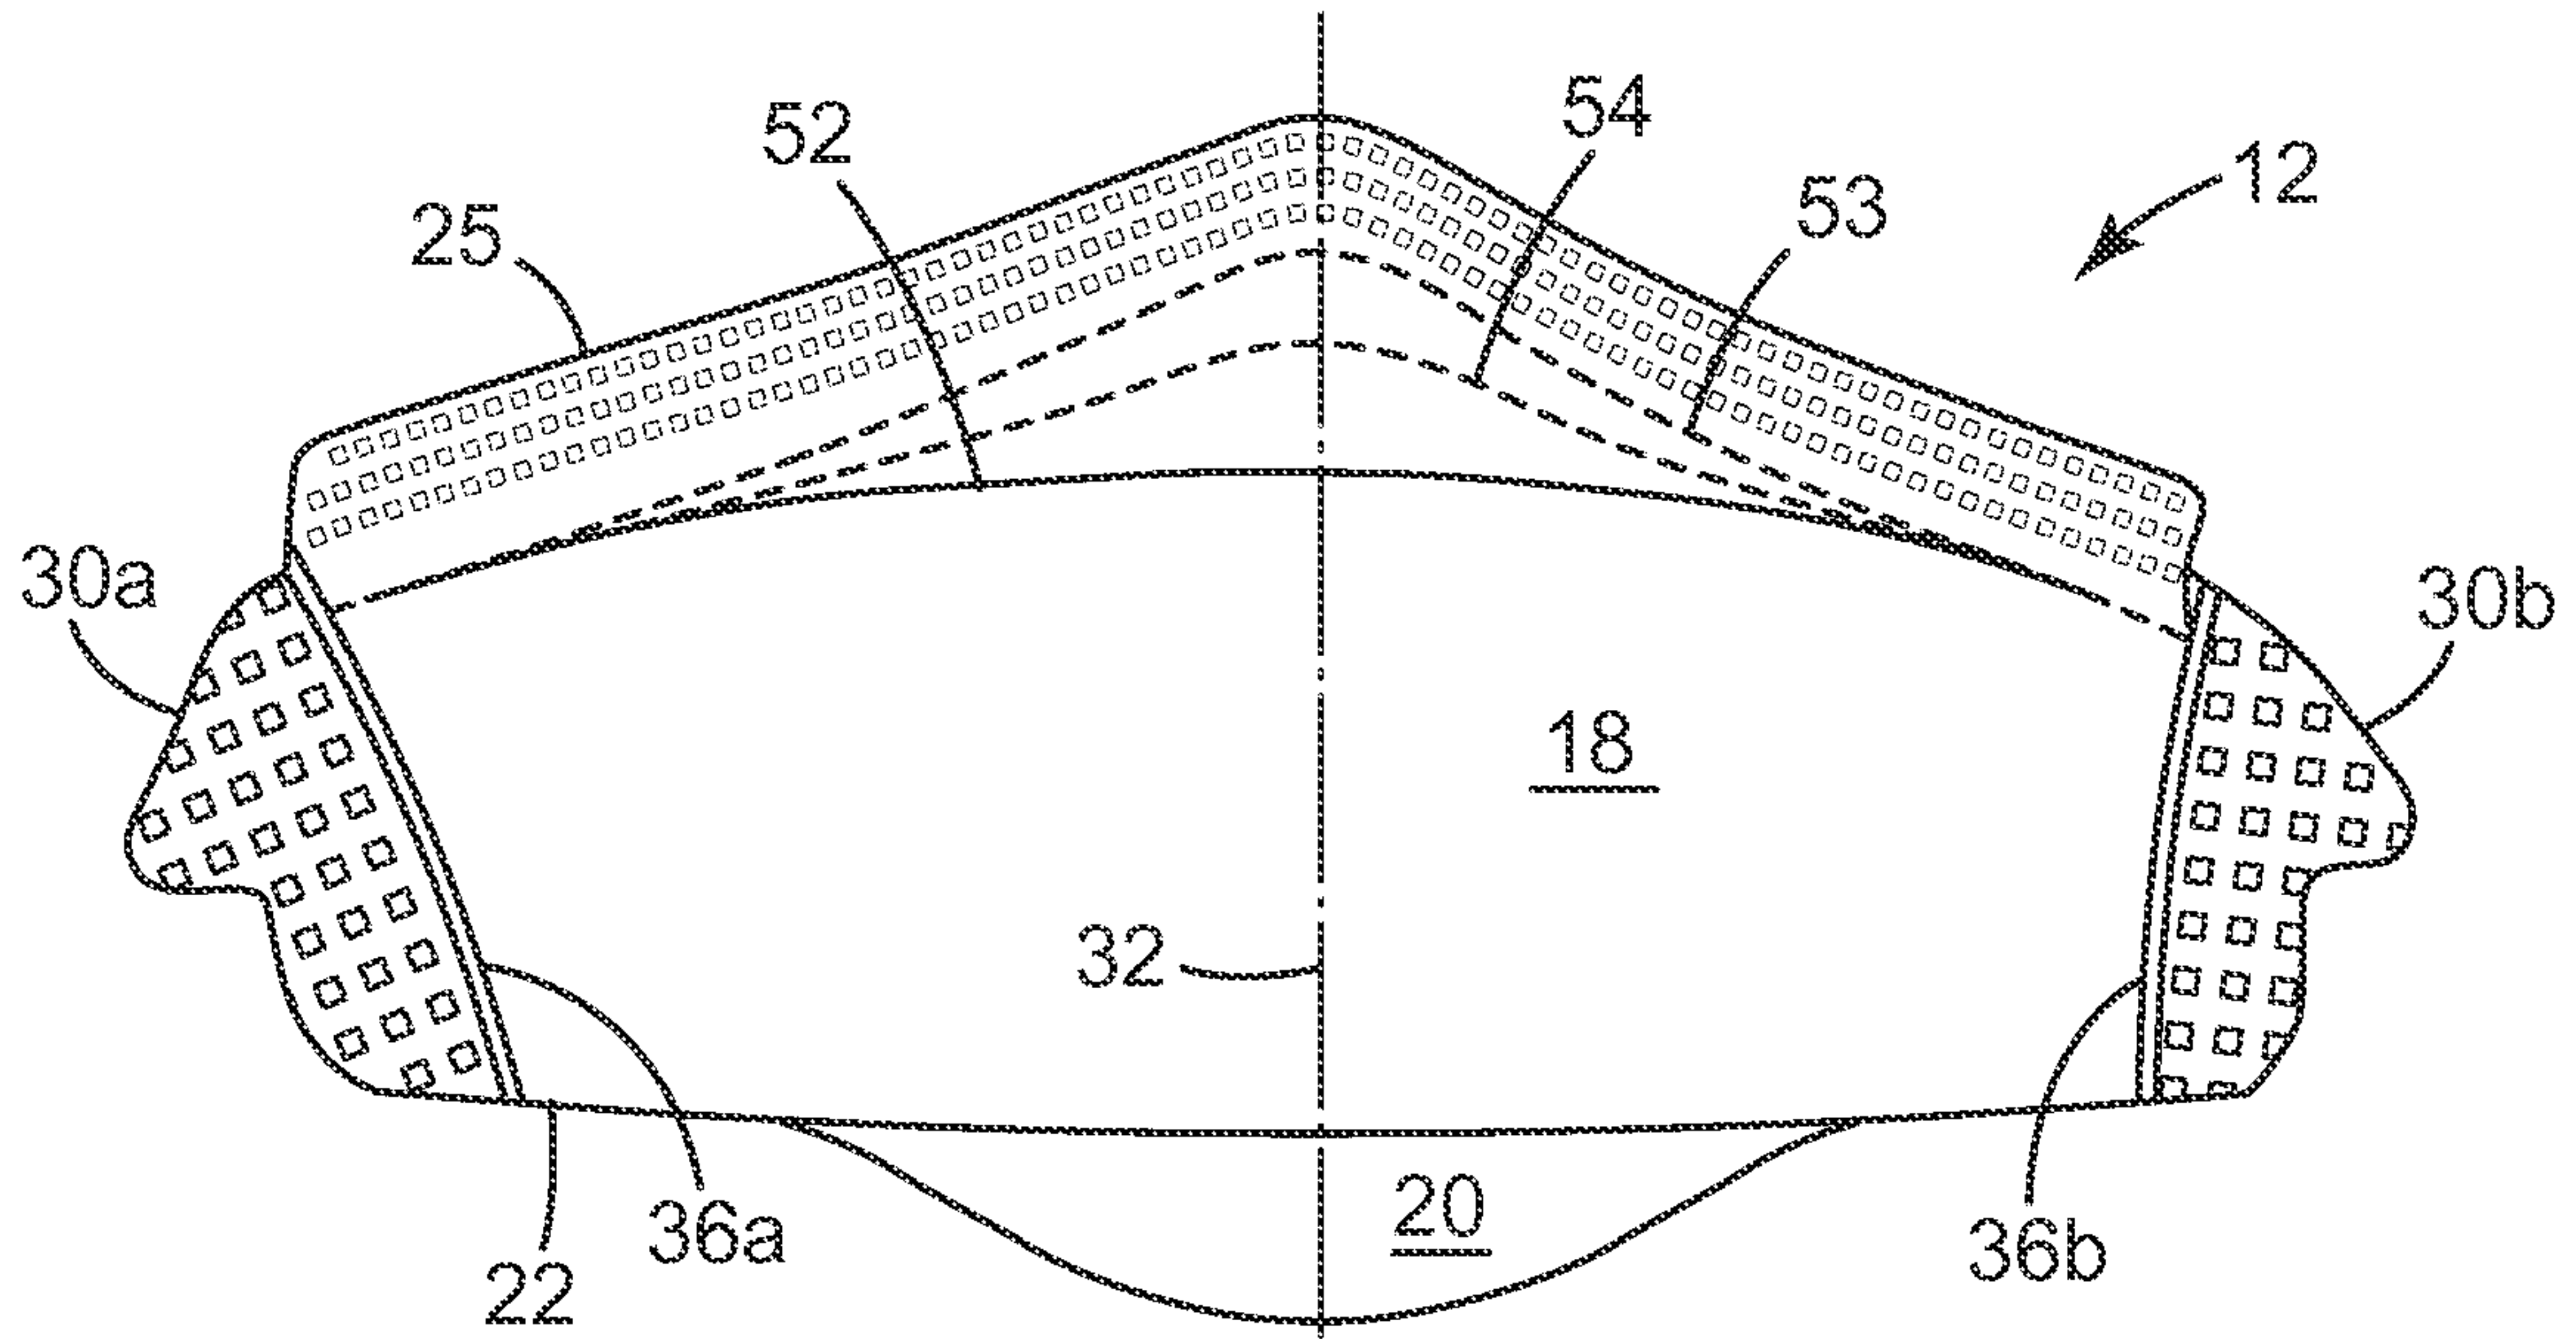
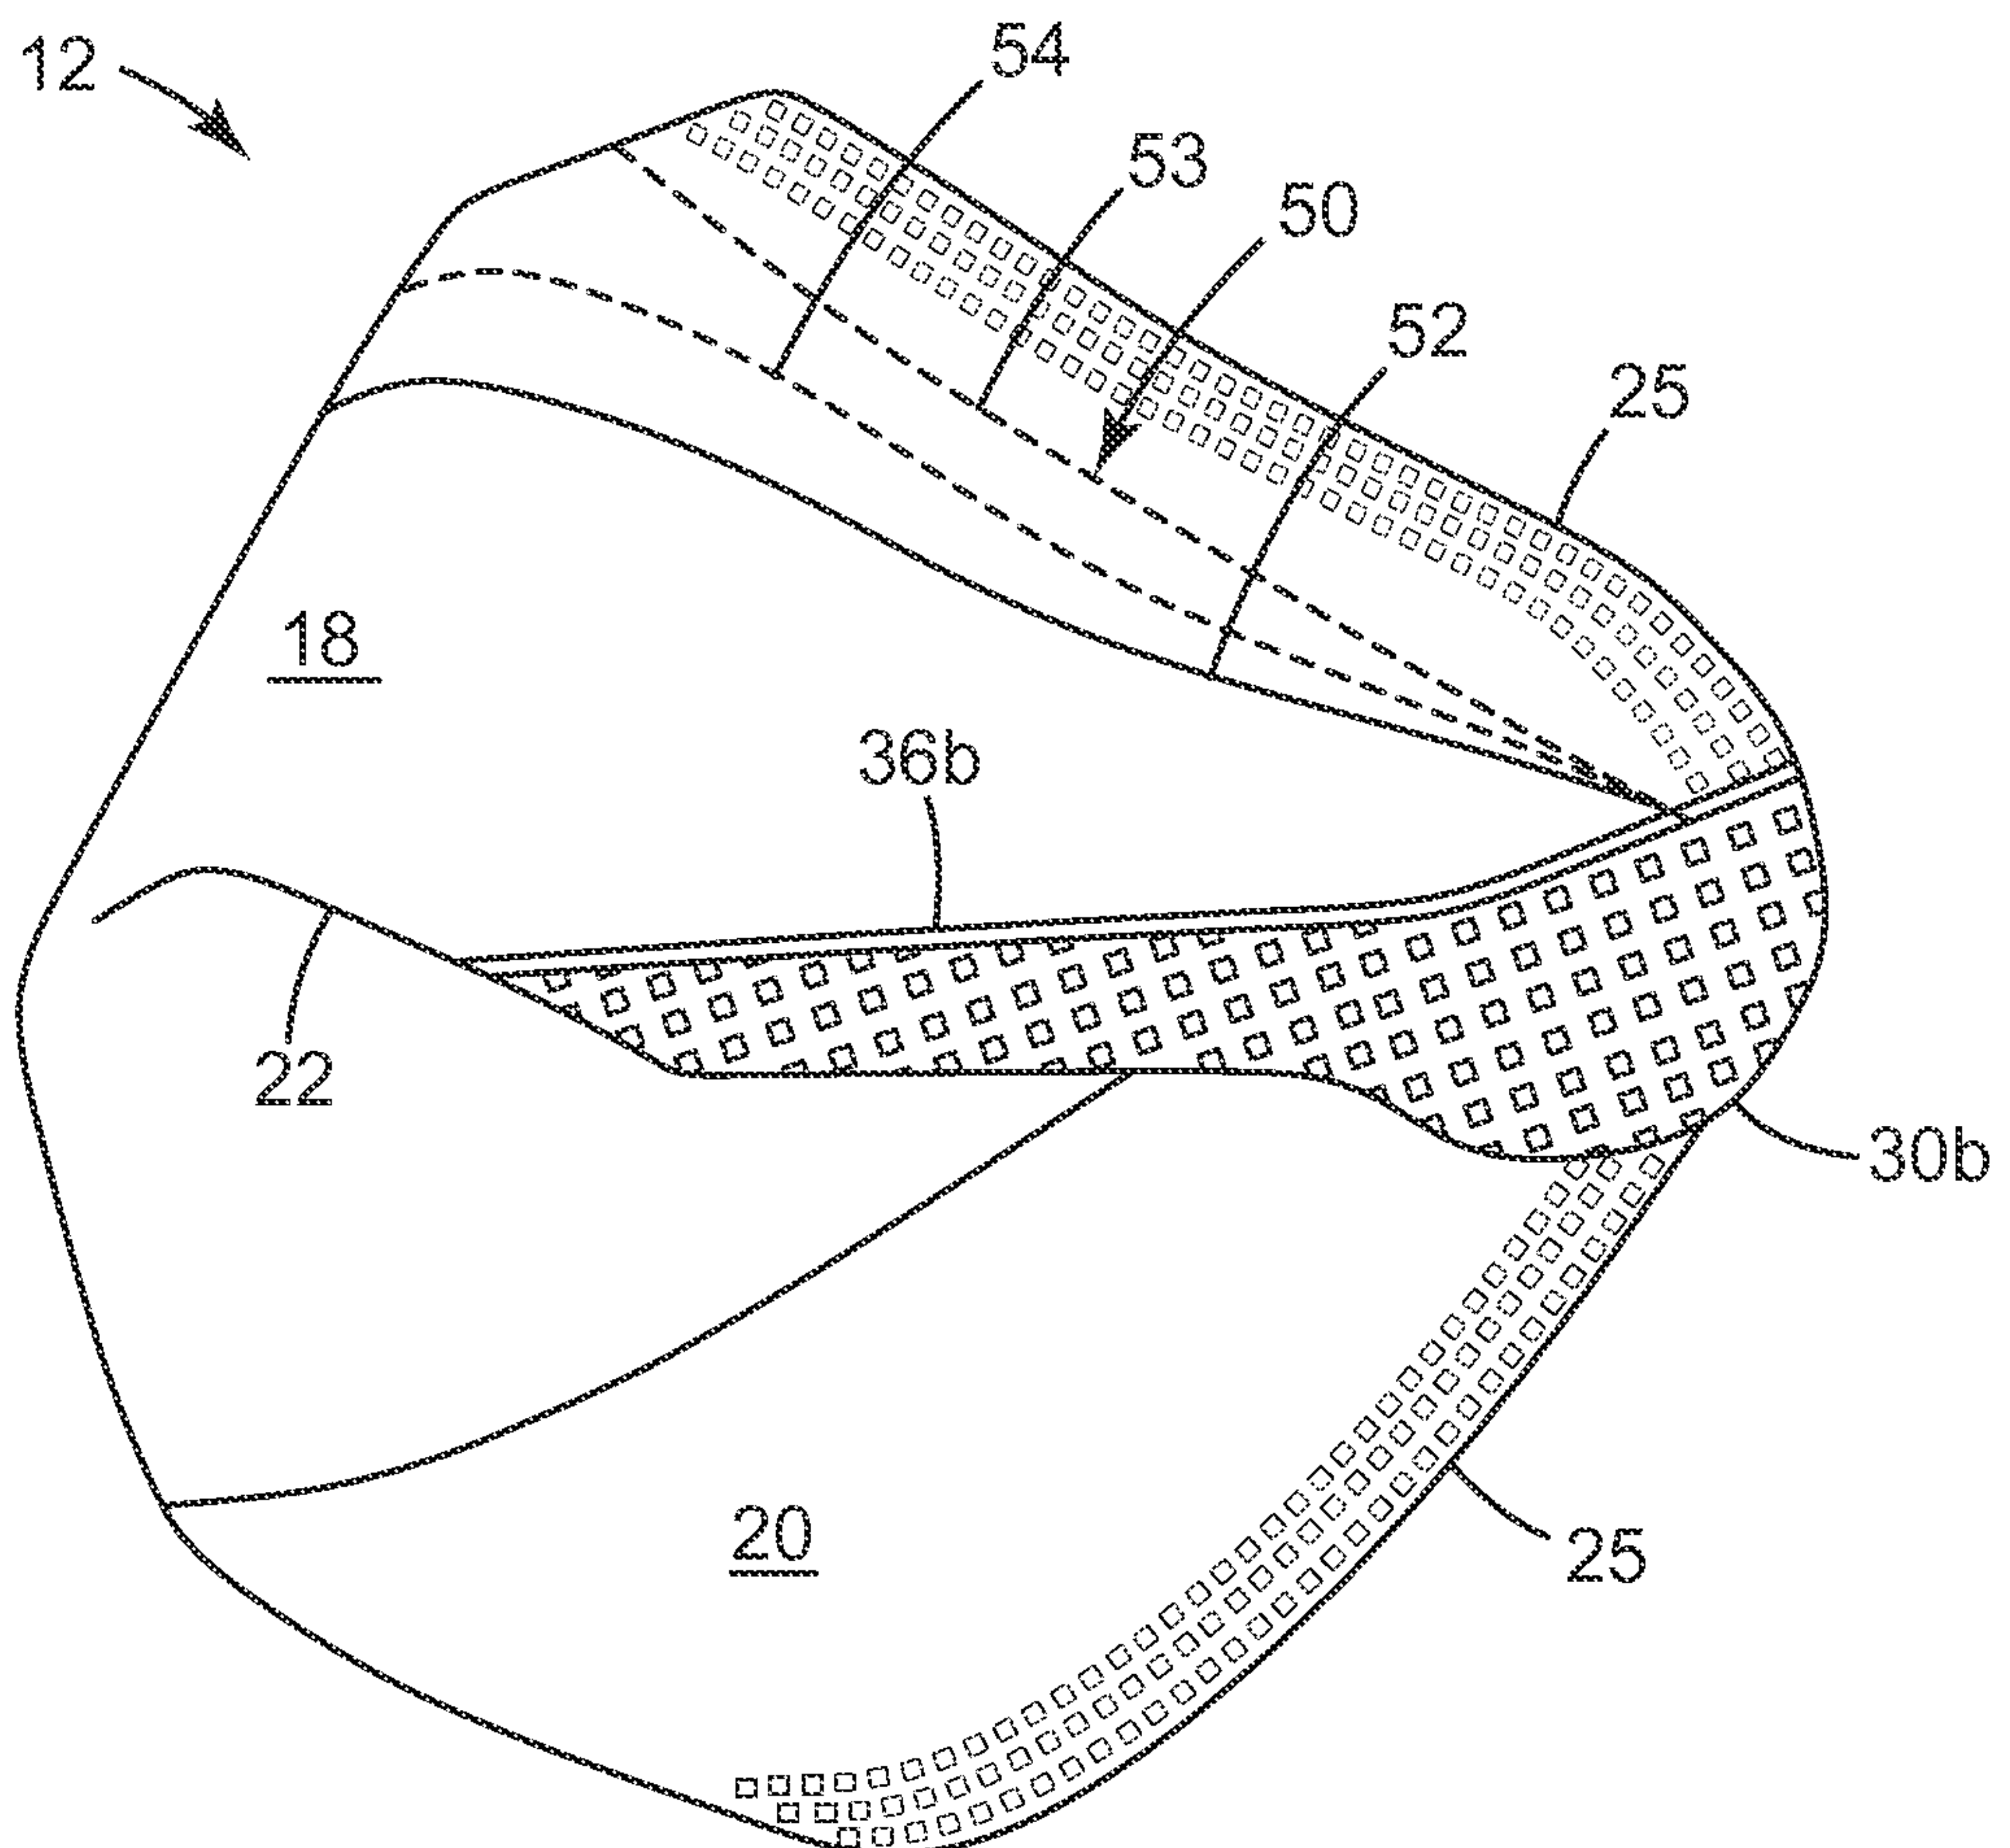
1/5

*Fig. 1**Fig. 2*

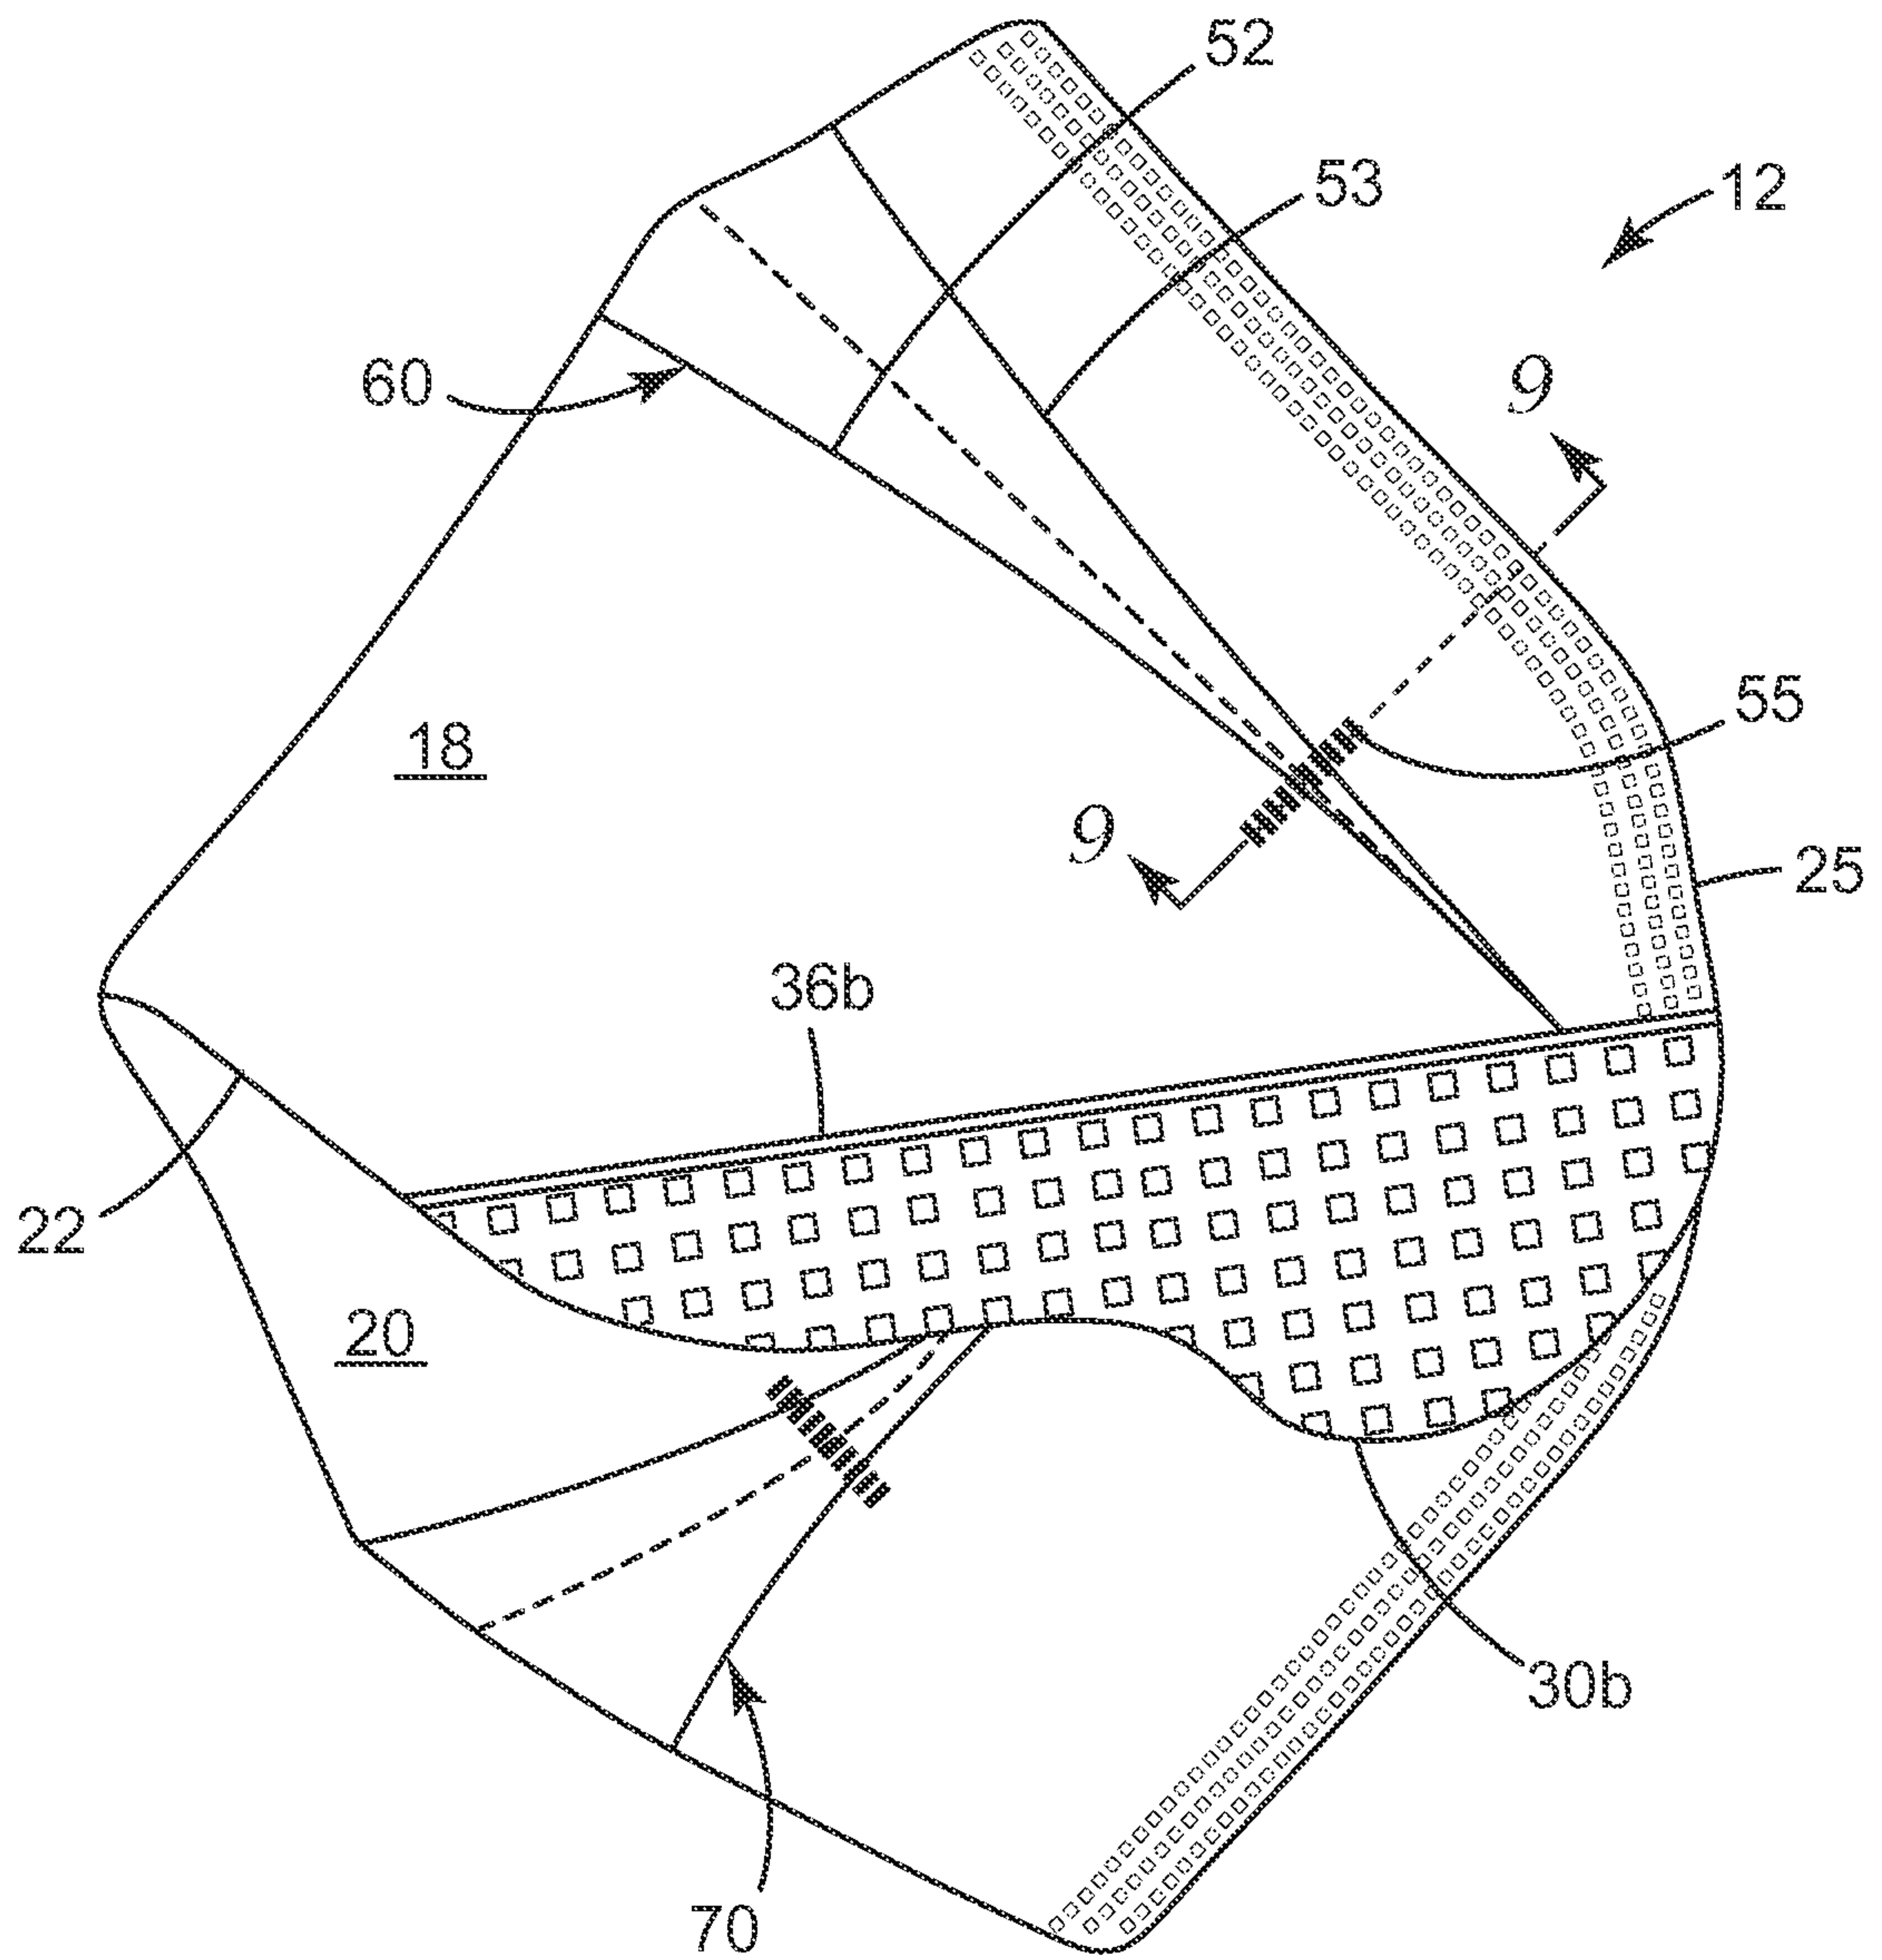
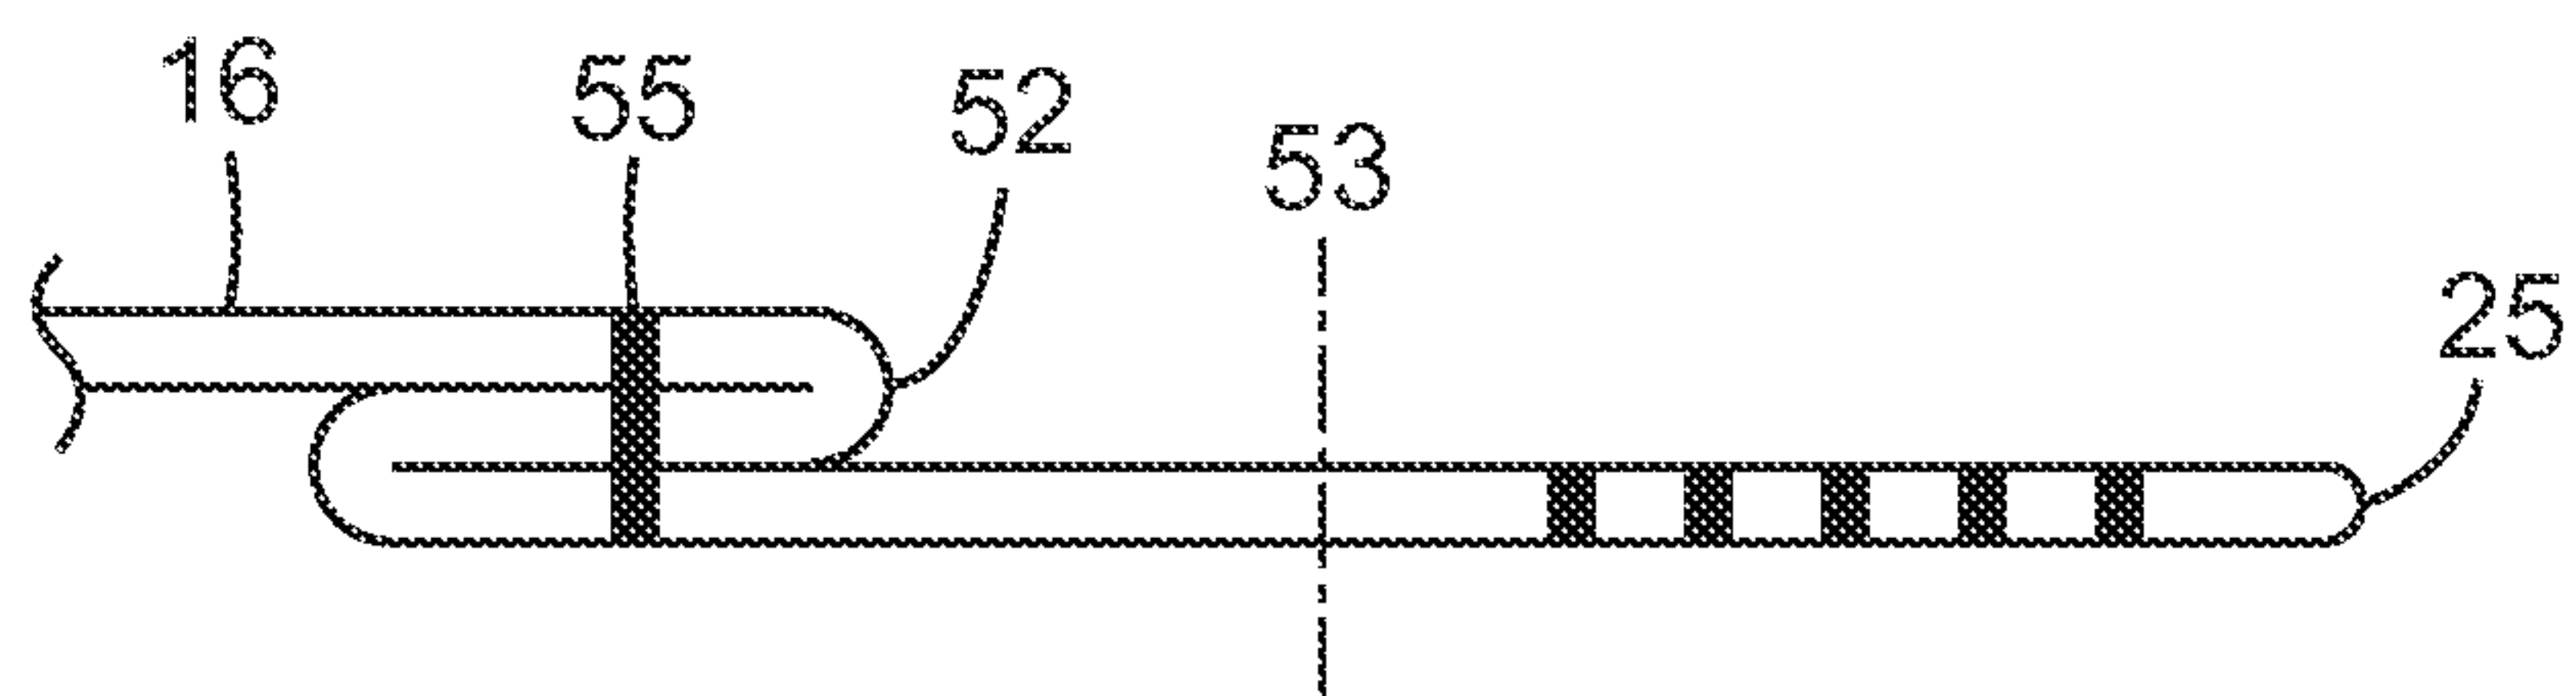
2/5

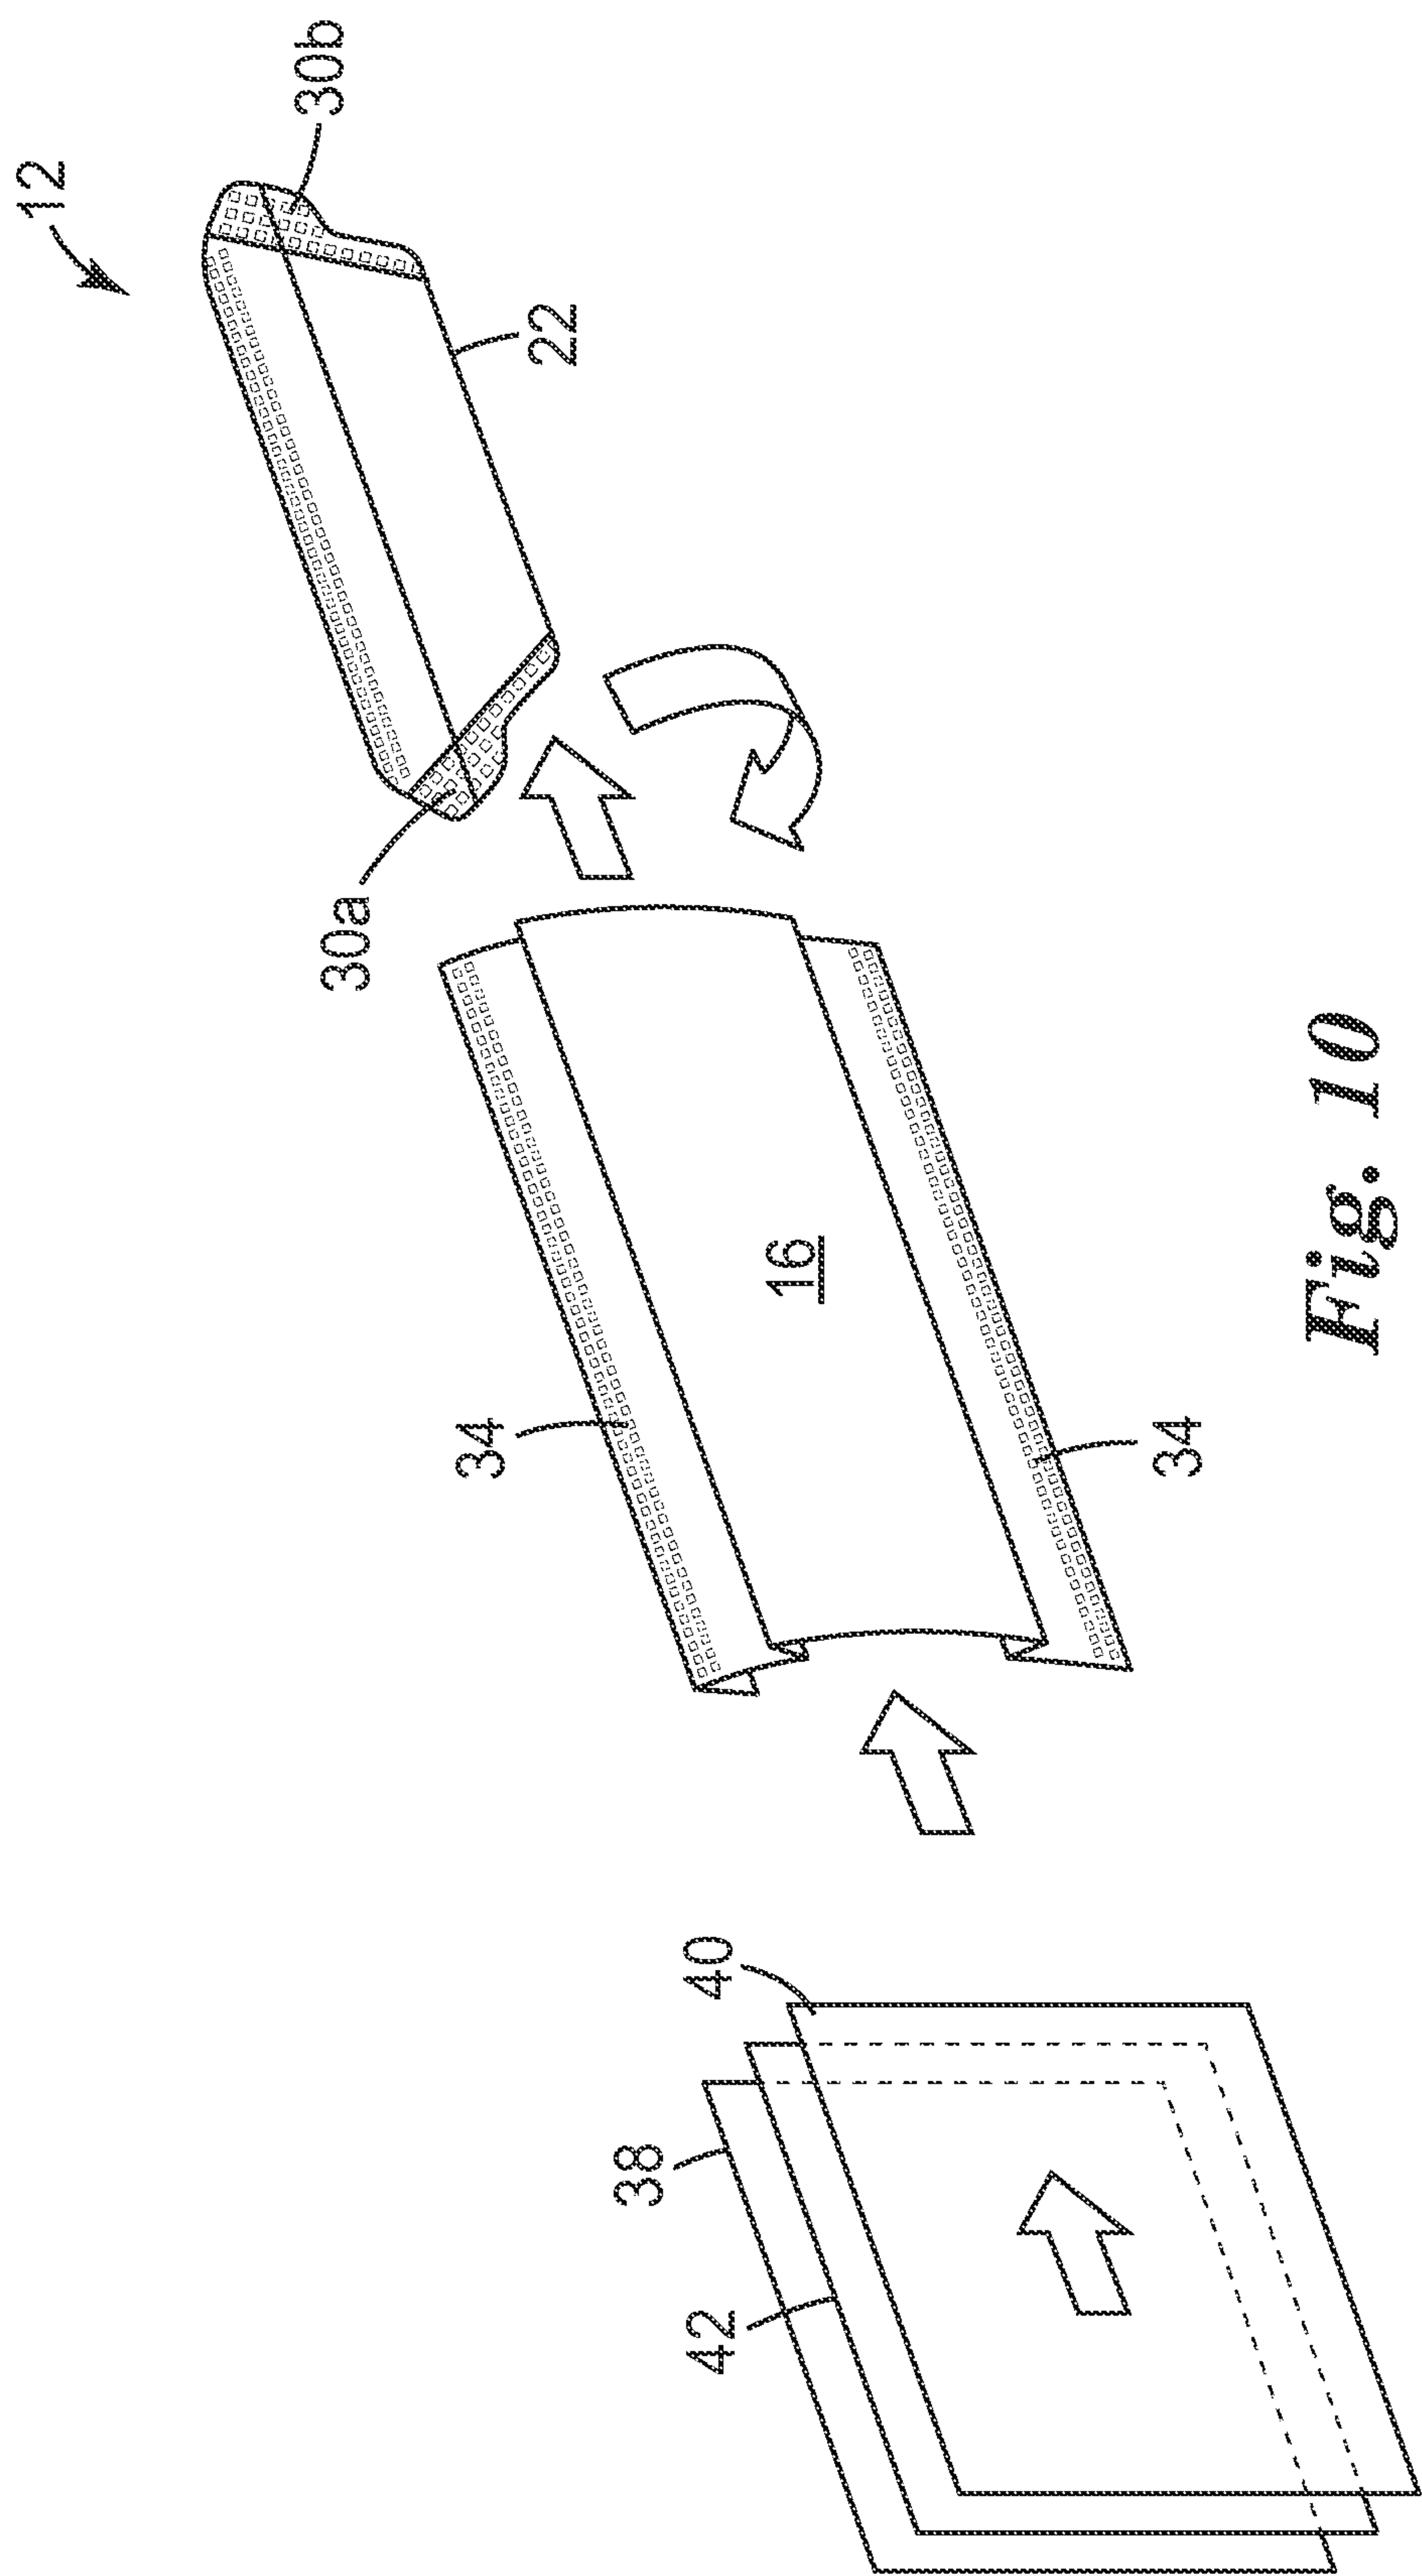
*Fig. 3**Fig. 4**Fig. 5*

3/5

*Fig. 6**Fig. 7*

4/5

*Fig. 8**Fig. 9*



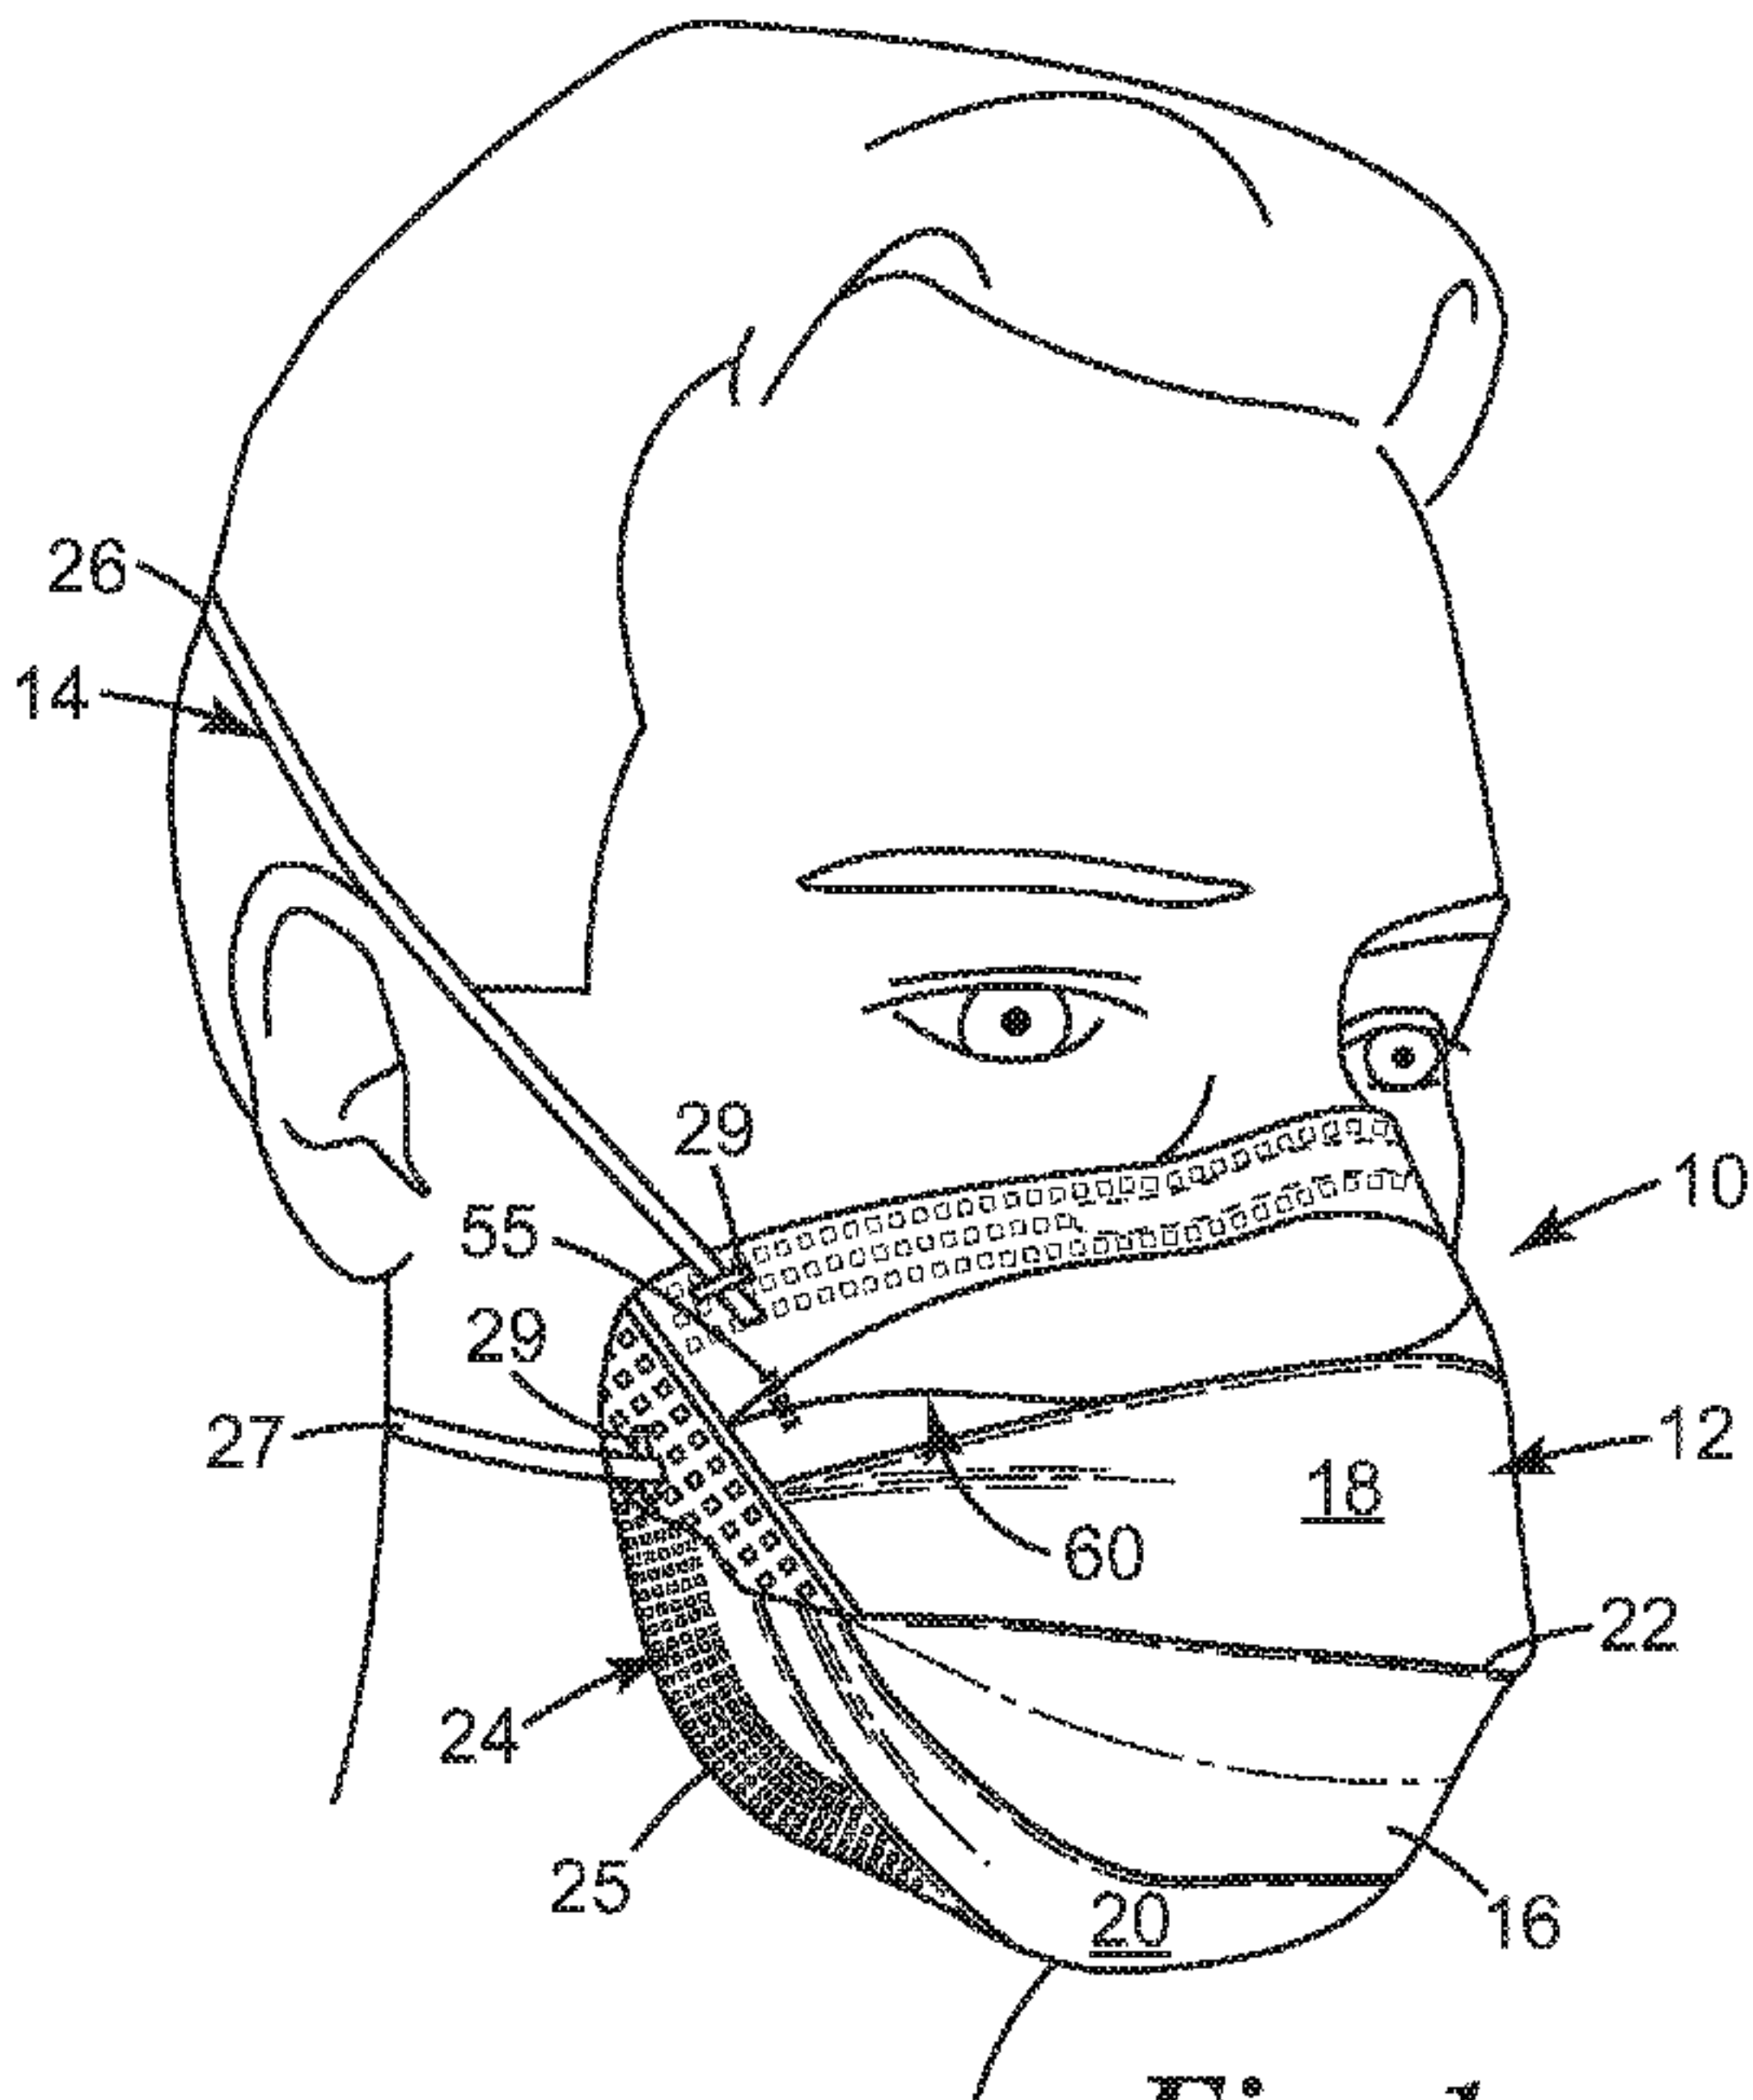


Fig. 1