



(51) International Patent Classification:

H01M 4/86 (2006.01) *H01M 8/12* (2006.01)
H01M 4/96 (2006.01) *H01M 4/88* (2006.01)

(21) International Application Number:

PCT/GB2012/051474

(22) International Filing Date:

22 June 2012 (22.06.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1110585.5 22 June 2011 (22.06.2011) GB

(71) Applicant (for all designated States except US): **ACAL ENERGY LTD** [GB/GB]; The Heath Business and Technical, Park, Runcorn Cheshire WA7 4QX (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CREETH, Andy** [GB/GB]; ACAL Energy Ltd, The Heath Business and Technical Park, Runcorn Cheshire WA7 4QX (GB). **BAYNES, Nick** [GB/GB]; ACAL Energy Ltd, The Heath Business and Technical Park, Runcorn Cheshire WA7

4QX (GB). **POTTER, Andy** [GB/GB]; ACAL Energy Ltd, The Heath Business and Technical Park, Runcorn Cheshire WA7 4QX (GB).

(74) Agent: **BRAND, Thomas Louis**; W.P Thompson & Co., 55 Drury Lane, London WC2B 5SQ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: CATHODE ELECTRODE MATERIAL

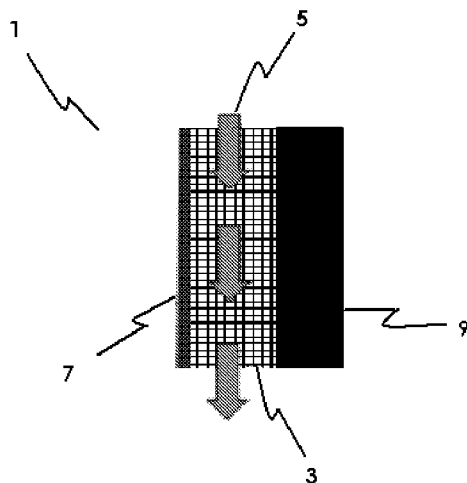


Figure 1

(57) Abstract: There is provided a fuel cell cathode electrode, comprising a porous skeletal medium, the surface of which medium is modified or otherwise arranged or constructed to induce enhanced activated behaviour, wherein the enhanced activated behaviour is induced by means of increasing the surface area for a given volume of the electrode and/or by increasing the number and/or availability of reactive sites on the electrode. A fuel cell having such a cathode electrode, a method of manufacturing such a cathode electrode, and use of such a cathode electrode in a fuel cell is also disclosed.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, ML, MR, NE, SN, TD, TG).

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

Cathode Electrode Material

The present invention generally relates to a fuel cell cathode electrode and, more particularly, to a cathode electrode the surface of which is modified or otherwise arranged or constructed to induce enhanced activated behaviour. A method of manufacturing such a cathode electrode is also disclosed. Further, a fuel cell having a cathode electrode of this type is also described. Use of such a cathode electrode in a fuel cell is also provided.

Cathode electrodes have been used for many years in applications such as fuel cells, for instance, and their technology is well understood. In particular applications, carbon through-flow electrodes may be used as the cathode. The primary tasks of such electrodes are providing a surface area upon which electrochemical reactions can occur; transporting electrons to and from the electrode/liquid interface into the external electrical circuit, via bipolar or monopolar plates; supporting the fragile polymer electrolyte membrane; and enabling optimal flow of reactants through the electrode.

An example of an electrode of this type is shown in Figure 1. From Figure 1, it can be seen that the electrode, generally indicated 1, is constituted by a porous electrode material 3 which is in between a membrane 7 and a bipolar plate 9. The flow of catholyte liquid is indicated by arrows 5.

If the electrode fails to perform any of its primary functions (described above), this will result in either a reduced electrochemical reaction rate or possible damage to the cell components.

Various materials have been suggested and used to make cathode electrodes, but suffer from numerous disadvantages which include poor surface area availability and poor conductivity.

For example, rigid carbon electrodes, such as reticulated vitreous carbon (RVC) electrodes suffer from relatively poor surface area availability for reaction when compared with alternative electrode materials. A further disadvantage of RVC electrodes is that the sharp points of the strand ends of the electrodes can cause punctures and short-circuits through the polymer electrolyte membrane. It is also difficult to make RVC electrodes to a sufficiently slim configuration.

Softer fibre-based electrodes, such as carbon felts, offer higher surface areas than RVC, but lower electrical conductivity. Increased compression of the felts within the electrode cavity was previously known to help increase electrical conductivity, but this is often accompanied with increased resistance to fluid flow, increasing the energy required to pump an electrolyte through the material. Additionally, such compressive forces can lead to damage of the felt materials by breakage of the carbon fibres.

Other materials include high surface area activated carbons, similar to those used in catalyst inks printed onto the anode of a fuel cell, but these are not conducive to allowing significant liquid electrolyte flow through the micro- and nano- scale pore structure, which is highly undesirable.

From the discussion that is to follow, it will become apparent how the present invention addresses the aforementioned deficiencies associated with known arrangements while providing numerous additional advantages not hitherto contemplated or possible with prior art constructions.

According to a first aspect of the present invention, there is provided a fuel cell cathode electrode, comprising a porous skeletal medium, the surface of which medium is modified or otherwise arranged or constructed to induce enhanced activated behaviour, by means of increasing the surface area for a given volume of the electrode and/or by increasing the number and/or availability of reactive sites on the electrode.

A desirable electrode material may be realised by the modification of available materials to obtain electrode materials that fulfil the requirements of a fuel cell electrode (as discussed above). It may be advantageous to begin with an electrode structure that provides the electrical conductivity, liquid electrolyte flow distribution and membrane support required by the application and modifying its surface to an extent sufficient to achieve significant performance improvements.

By 'induce enhanced activated behaviour', it is meant that the cathode electrode performs with greater efficiency than the same electrode would in the absence of the said modification, arrangement or construction so that more power may be generated from the same volume of electrode, for instance. Modification of the surface may be achieved in various ways. For example, a first technique may be to increase the effective surface area of the electrode. Another way may be to alter the surface chemistry of the electrode so that the likelihood of specific functional groups presenting at the electrode surface is enhanced, increasing the proportion of the electrode surface that is available for reaction.

By 'or otherwise arranged or constructed' it will be understood that the porous electrode material comprises the requisite properties as defined herein to induce enhanced activated behaviour. These requisite properties may include (among others) for example having a sufficiently high surface area availability for reaction with the reactants and/or having a sufficiently high number of reactive sites on the surface to encourage reactive behaviour, and other associated or independent properties referred to in the claims which follow.

It will be understood that in one or more embodiments, the porous electrode material (skeletal medium) may comprise existing materials which have the requisite properties for effecting enhanced activated behaviour as described herein. This may include, for example, an unmodified substrate or porous electrode medium, which can equally be used in a fuel cell application and induce enhanced activated behaviour by virtue of its inherent advantageous properties.

In other words, the invention may be effected, in some embodiments, without modification of the porous skeletal medium. In this way, the porous skeletal medium may be 'otherwise arranged or constructed'.

Fuel cells have been known for portable applications such as automotive and portable electronics technology for very many years, although it is only in recent years that fuel cells have become of serious practical consideration. In its simplest form, a fuel cell is an electrochemical energy conversion device that converts fuel and oxidant into reaction product(s), producing electricity and heat in the process. In one example of such a cell, hydrogen is used as fuel, air or oxygen as oxidant and the product of the reaction is water. The gases are fed respectively into catalysing, diffusion-type electrodes separated by a solid or liquid electrolyte which carries electrically charged particles between the two electrodes. In an indirect or redox fuel cell, the oxidant (and/or fuel in some cases) is not reacted directly at the electrode but instead reacts with the reduced form (oxidised form for fuel) of a redox couple to oxidise it, and this oxidised species is fed to the cathode.

The point of particular interest in relation to the present invention is the reaction which takes place at the cathode region (electrode) of the cell. By altering the surface chemistry of the electrode, enhanced electrochemical reactions can be achieved, thereby enhancing the productivity and/or efficiency of the electrode.

Cathode electrodes as defined in Claim 1 may be particularly effective in fuel technology applications such as back-up power for mobile phone masts and computer systems requiring around 2 to 10kW power; stationary power such as replacing a diesel engine genset for off-grid applications or larger back-up power; and transport applications including automotive.

The enhanced activated behaviour is induced by means of increasing the surface area for a given volume of the electrode and/or by increasing the number and/or availability of reactive sites on the electrode, the latter increasing the effective surface area for the electrochemical reaction.

It may be that the surface modification of the porous skeletal medium includes at least one increased surface area zone. In other words, the modification acts to increase the surface area of the electrode. A physical increase in the amount of surface electrode material exposed to the reactants will result in more opportunities for electrochemical reactions to occur.

The surface modification of the medium may include the provision of a sputtered coating of carbon. Using a sputtering technique, it is possible to deposit small particles of active electrode material (for example, carbon) onto the support structure (porous skeletal medium). Advantageously, control of the parameters used in the coating process may grant control of the morphology of the deposited particles. Control of the morphology enables the amount of surface area exposed to the reactants to be optimised.

Additionally or alternatively, the surface modification of the medium may include physisorbed carbon. This type of surface modification involves the addition of carbon particles chosen for their high surface area or electrochemical properties. The ability to choose the type of additional carbon deposited gives a high degree of control to the surface activation procedure. Specific high surface area carbons can be chosen that maximise the reactivity for a particular catholyte.

Additionally or alternatively, the surface modification of the medium may include the provision of deposits of templated carbon. This technique involves the use of a templating precursor prior to the addition of carbon. As well as increasing the surface area of the electrode, this technique allows for a great deal of control in both electrode surface morphology (through choice of template) and electrode surface chemistry (through choice of carbon precursor and treatment conditions).

Additionally or alternatively, the surface modification of the medium may include the provision of chemical vapour deposited carbon. Chemical vapour deposition (CVD) techniques can be utilised to 'grow' additional carbon structures using the surface of the porous skeletal medium as a support skeleton. Alteration and regulation of the conditions in which the additional carbon species are formed on the surface allows for tailoring of the resulting microstructure of the electrode.

Additionally or alternatively, the surface modification of the medium may include the provision of chemical vapour infiltrated carbon. Chemical vapour infiltration

(CVI) techniques can be utilised to 'grow' additional carbon structures in a similar manner to CVD techniques (described above).

An efficient technique for improving the productivity and/or efficiency of the cathode electrode is to alter its surface chemistry in order for the electrode to become more reactive to the reactants. In this manner, the surface of the medium is modified to induce enhanced activated behaviour. Hence, the surface modification of the medium may include a region of increased electrochemical reactive sites per unit surface area. By increasing the number of reactive sites per unit surface area, in other words increasing the reactive site density, the likelihood of specific functional groups necessary for reaction meeting a liquid reactant is increased. A higher proportion of reactive sites increases the current and power density of the fuel cell.

Additionally or alternatively, the surface modification of the medium may include liquid chemical modification. At least one advantage of this technique is the ability to utilise low-cost commercially available treatment agents, keeping the additional cost of performing such treatments down. A further advantage is that the specific treatment agents used can be tailored to create the optimal surface modification required for a specific catholyte.

Depending on the catholyte used, the surface modification of the medium may include at least one oxidised region. By oxidising the surface of the medium, this alters its surface chemistry thereby increasing the number of reactive sites for

reaction between the reactants. Of course, it will be appreciated that the surface may include numerous oxidised regions.

In at least one or more embodiments, the at least one oxidised region may be effected by exposure to a strong acid, such as nitric acid or sulphuric acid, and/or a strong oxidising agent, such as ammonium persulfate.

Additionally or alternatively, the surface modification of the medium may include gas-phase chemical modification. Gas-phase chemical modification acts to create more reactive surface sites for the reaction to occur. Particular advantages of this technique are that a gas treatment process requires no post-treatment clean up of the electrodes, good pore infiltration can be achieved and the choice of treatment gas or gases can be used to tailor the end-result surface chemistry to match the particular requirements of the catholyte solution.

It may be, for instance, that the gas-phase chemical modification is effected by oxygen plasma treatment. This may be particularly favourable depending on the catholyte used.

Additionally or alternatively, the surface modification of the medium may include plasma etching. Controlled use of a plasma to etch micropores into the surface of the porous skeletal medium may increase the surface area while keeping the flow, support and electrical conductivity of the material at a satisfactory level compared with its original state.

Additionally or alternatively, the surface modification of the medium may include heat treatment. Heat treatment of the electrode may induce micropores to alter surface chemistry of the porous skeletal medium, thereby improving the productivity of the cathode electrode. A particular advantage of this technique is that no additional reagents are required, offering a reduced complexity treatment and potentially saving on cost.

The arrangement or construction of the medium may comprise compressing the electrode. It has previously been thought that carbon electrodes in flow batteries and electrochemical reactors should only be compressed to approximately 80% of their original thickness (for example see Montiel et al. *Ind. Eng. Chem. Res.* 1998, 37, 4501-4511). However, the inventors have surprisingly found that for certain fuel cell applications some cathode materials can give optimum performance when compressed to much less than 80% of their original thickness. In some cases, optimum performance was achieved when the cathode material was compressed to less than 50% of its original thickness. Without wishing to be bound by theory, such a compression increases the conductivity of the medium and the surface area of the cathode in the region near the membrane surface. These benefits surprisingly outweigh the reduced flow that also results from the compression. Before or after compression, the electrode may or may not be further modified.

The arrangement or construction of the cathode electrode may therefore comprise compressing the porous electrode to less than 80% of its original thickness, preferably to less than 70%, more preferably to less than 60% and even more preferably to less than 50% of its original thickness.

The skilled person will recognise that the techniques mentioned hereinabove for modifying the surface chemistry of the porous skeletal medium may be used separately or in combination. It may be that combination of the techniques described above produces a synergistic effect for inducing enhanced activated behaviour of the cathode electrode which is highly desirable.

The porous skeletal medium may comprise a rigid carbon structure. This may improve the strength and robustness of the electrode while exhibiting a good electrical conductivity in all directions.

It may be that the porous skeletal medium comprises reticulated vitreous carbon (RVC). RVC is a microporous, glassy carbon electrode material. RVC offers a high ratio of surface area to volume and minimal reactivity over a wide range of processing conditions, combined with low cost and easy handling. The design of an electrochemical cell having an RVC electrode allows for uniform current and potential distribution, low ohmic internal resistance and high rates of mass transport of the electroactive species to the electrode surface.

The porous skeletal medium may comprise a soft fibre-based structure. A soft fibre-based structure may offer superior surface area exposure to the reactants.

The porous skeletal medium may comprise compressed carbon felts. The compression of the felts within the electrode may help increase electrical conductivity.

In one embodiment, the porous skeletal medium comprises a carbon/PTFE composite medium. In other embodiments, the porous skeletal medium comprises a carbon aerogel. In still further embodiments, the porous skeletal medium may comprise carbon cloths. Such carbon cloths may include a Zorflex activated carbon cloth. In still further embodiments, the porous skeletal medium may comprise carbon paper or a carbon veil.

In a further embodiment, the porous skeletal medium may comprise a carbon cloth. The inventors have surprisingly found that in some cases the weave of the cloth material may alter the performance of the cathode. Changing the weave is thought to alter the flow characteristics of the catholyte, thereby allowing performance to be tailored. Preferably, the cloth is woven or knitted.

The porous skeletal medium and/or the material with which the surface of the medium is modified may have a thickness of no more than 2mm; more particularly, a thickness of less than 1mm; more particularly, a thickness of less than 0.4mm; more particularly still, a thickness of less than 0.25mm. In this way,

the thickness may range from 0.01mm to 2mm. A reduction in thickness is desirable as a thinner overall cell will result in a higher volumetric and gravimetric power density for the fuel cell when incorporated into an operating fuel cell system – both these parameters may be considered critical for fuel cell system design.

It may be that the porous skeletal medium takes the form of one or more panels. More particularly, the one or more panels may have dimensions of 250mm x 250mm. Such dimensions may be particularly suitable for ease of manufacture of the electrode and ease of transport, for instance.

The surface of the porous skeletal medium may be reactive to a catholyte liquid. This is advantageous because if areas of the support material remain untreated during the process, they remain capable of performing the electrode reaction(s), albeit at a reduced capacity.

The porous skeletal medium and/or the material with which the surface of the medium is modified may have a specific surface area from 600 to 30000cm²/cm³. In one or more embodiments, the specific surface area may be 3000cm²/cm³. The surface area as specified is significantly higher than conventional electrodes which makes an electrode formed according to the present invention particularly suitable for enhancing the productivity of a fuel cell in terms of electrical conductivity and electricity generation.

The porous skeletal medium and/or the material with which the surface of the medium is modified may have a through-plane electrical resistance of no more than $17\text{m}\Omega\text{cm}^2$. More particularly, the through-plane electrical resistance may be of no more than $5\text{m}\Omega\text{cm}^2$. This value includes contact resistance with the bipolar plate. A low resistance is often necessary in fuel cells to reduce efficiency losses generated by electrical conduction through the relevant components of the fuel cell.

The porous skeletal medium and/or the material with which the surface of the medium is modified may be stable in an oxidising environment of pH 0 at 80°C ; alternatively or additionally, may be stable in an oxidising environment of pH 0 at 95°C ; and alternatively or additionally, may be stable in an oxidising environment of pH 0 at 120°C . A failure for the electrode structure to be stable in such environments may result in degradation of the electrode, reduced electrochemical performance and may possibly affect mechanical stability and/or contaminate the fuel cell system with corrosion products.

The fuel cells may also operate at high pressures and so the porous skeletal medium and/or the material with which the surface of the medium is modified may be stable at such pressures. Preferably, the fuel cells operate at a pressure above atmospheric (or ambient) pressure and below 5 bar absolute pressure.

The porous skeletal medium and/or the material with which the surface of the medium is modified may have a pore structure permeability of at least $5 \times 10^{11}\text{m}^2$.

A permeability at this level provides adequate ease of flow of liquid catholyte reactant.

The porous skeletal medium may comprise at least one of carbon or a metal. Advantageously, the present invention provides the flexibility of modifying, for instance, a carbon electrode base structure by coating it with additional carbon to enhance the effective surface area for reactivity, and/or by altering its surface chemistry by creating more active sites thereon. Additionally, the present invention also offers the capability of utilising an otherwise electrochemically unreactive structure (such as a porous metal, for instance) that otherwise offers the other requirements of an electrode, by coating it with an active carbon surface as described herein. The porous skeletal medium may, for example, comprise one or more of platinum group metals, and less-active metals including stainless steel, austenitic nickel-chromium-based superalloys and titanium.

The porous skeletal medium may be self-supporting. In this way, the porous skeletal medium does not necessarily require any further means for support and can be used as a stand-alone structure.

In another embodiment, the surface modification, arrangement or construction of the cathode electrode of the present invention results in an increased wettability of the cathode electrode. This may result in a more efficient fuel cell by reducing the pressure required to pump the catholyte, thereby reducing a parasitic loss.

In another aspect, the present invention envisages a method of manufacturing a fuel cell cathode electrode, the method comprising the steps of: providing a porous skeletal medium; and modifying or otherwise arranging or constructing the surface of the medium to induce enhanced activated behaviour.

The step of modifying the surface of the medium may include increasing the surface area of the medium.

The surface area of the medium may be increased by the provision of at least one increased surface area zone; in other words, a zone with a specific surface area greater than a neighbouring region on the same electrode, for instance.

The step of modifying the surface of the medium may involve sputter coating it with carbon particles.

In particular embodiments, the sputtering process may involve vacuum sputtering.

The step of modifying the surface of the medium may involve physisorbing carbon particles onto the medium. The physisorbing process may comprise the steps of: providing a suspension of carbon particles in a carrier; contacting the medium with the suspension of carbon particles; and evaporating the carrier so that carbon particles remain deposited on the medium by physisorption. Advantageously, using this technique the deposited particles either remain in

position through physisorption and/or the method may further comprise the step of heat treating the carbon particles to adhere to the medium. Alternatively, proton conductive polymers such as Nafion (RTM) can be used as a means to attach the carbon particles. In this manner, the poor electrical conductivity that may be a restricting factor of high surface area carbons (used conventionally) is of lesser consequence since the main backbone of the porous skeletal medium will transport the electrons for the majority of the conduction pathway.

The step of modifying the surface of the medium may involve a templating method for applying carbon to the medium.

The templating method may involve the steps of: applying a template to the medium; depositing carbon over the template; and removing the template to leave carbon deposited on the surface of the medium. The template may be selected for imparting a desirable configuration of the carbon over the electrode surface.

In one or more embodiments, the template may be soluble. This may make the template easier to remove.

It may be that a template is arranged on a medium in a particular formation chosen for its intended application.

The step of modifying the surface of a medium may involve chemical vapour depositing carbon thereonto.

The step of modifying the surface of the medium may involve chemical vapour infiltration of carbon thereinto.

The step of modifying the surface of the medium may involve increasing the number of electrochemical reactive sites per unit surface area. This may enhance the productivity of the electrode and consequently the fuel cell by the generation of superior amounts of electricity when compared with conventional cathode electrode fuel cells.

The method may involve the step of liquid chemical modification to alter the surface chemistry of the medium.

The method may additionally or alternatively involve the step of oxidising the surface of the medium.

In one or more embodiments, the oxidising step may be performed using a strong acid, such as nitric acid or sulphuric acid, and/or a strong oxidising agent, such as ammonium persulfate.

The step of modifying the surface of the medium may involve gas-phase chemical modification.

The gas-phase chemical modification may be effected by oxygen plasma treatment.

A step of modifying the surface of the medium may involve plasma etching.

The plasma etching may comprise etching micropores into the surface of the medium.

The step of modifying the surface of the medium may involve heat treatment.

In another aspect, the present invention envisages a fuel cell having a cathode electrode as described herein.

The fuel cell may employ FlowCath® technology; that is a fuel cell in which hydrogen is catalysed on the anode. Electrons and protons are absorbed into a solution containing redox catalyst systems, which flow continuously from the stack to an external regeneration vessel. In the regenerator, the catholyte comes into contact with air and the electrons, protons and oxygen from air react to form water, which exits the regenerator as vapor. The catholyte then flows back to the cell.

In yet another aspect, the present invention contemplates the use of a cathode electrode as described herein in a fuel cell.

The present invention will now be described more particularly with reference to the accompanying drawings, by way of example only, in which:

- Figure 1 illustrates a side elevation of a porous skeletal medium situated between a polymer electrolyte membrane and a bipolar plate;
- Figure 2 is a partial side elevation of a porous skeletal medium formed in accordance with the present invention having a surface modified for enhanced electrochemical reactivity;
- Figure 3 illustrates a chart which compares the fuel cell performance of a control cell with a fuel cell having an electrode which has undergone a sputter-coating treatment in accordance with an embodiment of the present invention;
- Figure 4 illustrates a chart which compares the fuel cell performance of a control cell with a fuel cell having an electrode that has undergone a treatment process using a template to add additional high surface area carbon thereto formed in accordance with an embodiment of the present invention;

Figure 5 illustrates a chart which compares the fuel cell performance of a control cell with a fuel cell having an electrode that has undergone a prior treatment process using an oxidising agent to increase reaction sites on the surface and formed in accordance with an embodiment of the present invention;

Figure 6 illustrates a chart which compares the fuel cell performance of a control cell with a fuel cell having an electrode that has undergone a prior treatment process using gas-phase chemical modification to increase the proportion of active reaction sites on the electrode surface and formed in accordance with an embodiment of the present invention;

Figure 7 illustrates charts which compare the performance (using the polarisation curve and the power density curve), at an open circuit voltage of 0.80V, of a control cell with that of fuel cells having an electrode that has undergone a prior heat treatment process to increase the proportion of active reaction sites on the electrode surface and formed in accordance with an embodiment of the present invention;

Figure 8 illustrates charts which compare the performance (using the polarisation curve and the power density curve), at an open circuit voltage of 0.80V, of a control cell with fuel cells having

an electrode that has undergone a prior treatment process of soaking in nitric or sulphuric acid followed by heat treatment to increase the proportion of active reaction sites on the electrode surface and formed in accordance with an embodiment of the present invention;

Figure 9 illustrates charts which compare the performance (using the polarisation curve and the power density curve), at an open circuit voltage of 0.80V, of a control cell with fuel cells having an electrode that has undergone a prior treatment process of soaking in nitric or sulphuric acid followed by heat treatment and fuel cells having an electrode that has undergone prior heat treatment alone to increase the proportion of active reaction sites on the electrode surface and formed in accordance with an embodiment of the present invention;

Figure 10 illustrates the differing hydrophilicity of a control graphitic felt cathode electrode and graphitic felt cathode electrodes that have undergone heat treatment in accordance with an embodiment of the present invention;

Figure 11 illustrates the differing hydrophilicity of a control graphitic felt cathode electrode and graphitic felt cathode electrodes that

have undergone acid and heat treatment in accordance with an embodiment of the present invention;

Figure 12 illustrates the change in performance of the cathode of the present invention on compression; and

Figure 13 illustrates the performance of cathodes according to the present invention in comparison to those of the prior art, as well as demonstrating the change in performance with changing the weave of a carbon cloth electrode.

With reference to Figure 2, there is illustrated a side elevation of a porous skeletal medium generally indicated 11. The surface 13 of the porous skeletal medium 11 is configured such that it takes the form of recurring hemispherical indentations therealong. Each hemispherical indentation is referenced 15, for instance. The hemispherical indentations 15, in this embodiment, abut one another. The hemispherical indentations 15 constitute the modification of the surface 13 of the porous skeletal medium 11. The surface 13 has, therefore, been modified to induce enhance activated behaviour. In this way, an electrode formed in this manner would exhibit superior electrochemical performance in terms of enhanced surface area of the reactants such as protons and oxygen to generate greater amounts of electrical current per unit volume.

Referring now to Figure 3, there is illustrated a chart which makes a direct comparison of a fuel cell having an unmodified RVC cathode electrode, and a fuel cell having a similar RVC electrode that has undergone a sputter-coating treatment. In both cases the cathode was 5 times compressed 100 pores per inch RVC of dimensions 50 x 63 x 2 mm (this RVC electrode was further modified, as discussed, for the dashed line in Figure 3). A standard gas diffusion layer (carbon paper approximately 0.3 mm thick) was placed between the bipolar plate and the RVC electrode to increase the conductivity of the connection. A carbon veil (10 g/m^2) was placed between the RVC electrode and the membrane. The membrane was a commercially available membrane electrode assembly of membrane thickness 50 microns and active area 50 x 50 mm with an anode catalyst loading of $0.3 \text{ mg Pt cm}^{-2}$. A polyoxometallate catholyte was used (0.3 molar solution of $\text{Na}_4\text{H}_3[\text{PMo}_8\text{V}_4\text{O}_{40}]\cdot(\text{H}_2\text{O})_x$ in water), with a catholyte flow of 240 ml/min and a cell temperature of 79-86°C. A standard gas diffusion layer of approximate thickness 0.3 mm was used in the anode compartment. The hydrogen pressure in the anode compartment was 1.5-2 bar absolute. The results of the control fuel cell are shown by the solid line, while the results of the fuel cell having a cathode electrode formed in accordance with an embodiment of the present invention are shown with the dashed line. The experimental cathode electrode was formed by depositing $51 \text{ } \mu\text{g/cm}^2$ carbon material at 0V acceleration. Operating conditions, other fuel cell components and the catholyte solution used were otherwise identical. As can be seen in the dashed polarisation curve, the performance of the sputter-coated sample is significantly superior (a

higher cell voltage for a given current) compared with the control sample indicated by the solid polarisation curve.

Referring now to Figure 4, a similar chart is illustrated to that shown in Figure 3. However, in this figure, there is shown a direct comparison of the fuel cell performance of a control cell having an unmodified RVC cathode electrode, with a fuel cell having a similar RVC electrode but which has undergone a treatment process using a template to add additional high surface area carbon to the existing RVC support structure (porous skeletal medium). Operating conditions, other fuel cell components and the catholyte solution used were otherwise identical to those in Figure 3. As can be seen from the dashed polarisation curve, the performance of the experimental sample with the additional templated carbon is significantly superior (a higher cell voltage for a given current) compared with the control sample indicated by the solid polarisation curve.

Figure 5 charts the results of a further test which compares the fuel cell performance of a control cell having an unmodified RVC cathode electrode with a fuel cell having a similar RVC electrode but which has undergone a prior treatment process using an oxidising agent. The oxidising agent in this embodiment is an ammonium persulfate ($(\text{NH}_4)_2\text{S}_2\text{O}_8$) treatment solution used in order to increase the proportion of active reaction sites on the electrochemical surface. Operating conditions, fuel cell components and the catholyte solution used throughout were otherwise identical to those in Figure 3 except the membrane was a commercially available membrane electrode assembly of

membrane thickness 25 microns with an anode catalyst loading of 0.4 mg Pt cm⁻². As can be seen from the dashed polarisation curve, the performance of the experimental sample that has undergone prior electrode treatment is significantly superior (a higher cell voltage for given current) compared with the control sample indicated by the solid polarisation curve.

Figure 6 also illustrates a further example of an experiment in which the fuel cell performance of a control cell having an unmodified RVC cathode electrode is compared with the performance of a fuel cell having a similar RVC electrode that has undergone a prior treatment process using an oxygen plasma treatment in order to increase the proportion of the active sites of the electrode surface. Operating conditions, other fuel cell components and the catholyte selection used were otherwise identical to those in Figure 5. As can be seen from the dashed polarisation curve, the performance of the sample that has undergone prior electrode treatment is significantly superior (a higher cell voltage for a given current) compared with the control sample indicated by the solid polarisation curve.

Figure 7 illustrates the results of a test which compares the performance, at an open circuit voltage of 0.80V, of a control cell having an unmodified graphitic felt cathode electrode with that of fuel cells having similar graphitic felt electrodes but which have undergone a prior heat treatment at 400°C, 450°C or 500°C for 2 hours (in air). In all cases, the graphite felt electrode was a 50 x 63 mm polyacrylonitrile graphitic felt of thickness 2.5 mm, which was compressed to 1.1

mm during the cell build. The cathode electrode was fixed next to a commercially available membrane electrode assembly with an active area of 50 x 50 mm and membrane thickness 15 microns with an anode catalyst loading of 0.3 mg Pt cm⁻². A polyoxometallate catholyte was used (0.3 molar solution of Na₄H₃[PMo₈V₄O₄₀].(H₂O)_x in water), with a catholyte flow of 160 ml/min and a cell temperature of 75-80°C. A standard gas diffusion layer (carbon paper) of approximate thickness 0.3 mm was used in the anode compartment. The hydrogen pressure in the anode compartment was 1.5-2 bar absolute. The treatment in this embodiment is used in order to increase the proportion of active reaction sites on the electrochemical surface. Operating conditions, fuel components and the catholyte solution used throughout were otherwise identical. Figure 7a illustrates the polarisation curves resulting from the experiments, while Figure 7b shows the power density curves. As can be seen from the figures, the performance of the experimental samples that have undergone prior electrode treatment at 450°C or 500°C is superior (a higher cell voltage/power density for given current) at 0.80V compared with the control sample. The performance after treatment at 500°C is significantly superior. However, the sample at 400°C did not show an improvement. This demonstrates that the heat treatment must be tailored to the specific material. Without wishing to be bound by theory, it is thought that 400°C is too low a temperature to activate the surface of the graphitic felt and so the temperature at which the material is treated should be carefully selected so as to result in an improved performance.

Figure 8 illustrates the results of a further test which compares the fuel cell performance, at an open circuit voltage of 0.80V, of a control cell having an unmodified graphitic felt cathode electrode with fuel cells having similar graphitic felt electrodes but which have undergone a multiple pre-treatment process. In all cases, the graphite felt electrode was a 50 x 63 mm polyacrylonitrile graphitic felt of thickness 2.5 mm, which was compressed to 1.1 mm during the cell build. The cathode electrode was fixed next to a commercially available membrane electrode assembly with an active area of 50 x 50 mm and membrane thickness 15 microns with an anode catalyst loading of 0.3 mg Pt cm⁻². Initially, the treated electrodes were left to soak in concentrated nitric or sulphuric acid for 5 hours at room temperature, followed by thorough rinsing. The modified felts were then heated at 450°C or 500°C for 2 hours (in air). A polyoxometallate catholyte was used (0.3 molar solution of Na₄H₃[PMo₈V₄O₄₀].(H₂O)_x in water), with a catholyte flow of 160 ml/min and a cell temperature of 75-80°C. A standard gas diffusion layer (carbon paper) of approximate thickness 0.3 mm was used in the anode compartment. The hydrogen pressure in the anode compartment was 1.5-2 bar absolute. The treatment in this embodiment is used in order to increase the proportion of active reaction sites on the electrochemical surface. Operating conditions, fuel components and the catholyte solution used throughout were otherwise identical. Figure 8a illustrates the polarisation curves resulting from the experiments, while Figure 8b shows the power density curves. As can be seen from the figures, the performance of the experimental samples that have undergone prior electrode treatment at 450°C is significantly superior (a higher cell voltage/power density for given current) compared with the control sample.

However, treatment at 500°C resulted in a lower performance. Once again, this demonstrates the importance of selecting the conditions with reference to the material used.

Figure 9 is a combination of the graphs shown in Figures 7 and 8, comparing the performance of the heat treatment alone to that of the heat treatment in combination with acid treatment. As can be seen from the graphs, heat treatment at 450°C in combination with acid treatment improves performance of a fuel cell more than heat treatment alone.

Figures 10 and 11 illustrate the differing hydrophilicity of the graphitic felt cathode electrodes with the treatments discussed above. Figure 10a shows a control sample, Figure 10b is a sample after treatment at 400°C, Figure 10c is a sample after treatment at 450°C and Figure 10d is a sample after treatment at 500°C. Figure 11a shows a control sample, Figure 11b is a sample after treatment with sulphuric acid and heat treatment at 450°C, Figure 11c is a sample after treatment with nitric acid and heat treatment at 450°C, Figure 11d is a sample after treatment with sulphuric acid and heat treatment at 500°C and Figure 11e is a sample after treatment with nitric acid and heat treatment at 500°C. A drop of water was added from a pipette and the photographs were taken after 60 seconds for Figures 10 and 11a. A drop of water was added from a pipette and the photographs were taken after 1 second for Figure 11b, 11c, 11d and 11e. It appears that the wettability (hydrophilic nature) of the treated cathode surface was found to be higher than the untreated cathode surface. This provides a

benefit, as felts with an increased wettability would be easier to pump the catholyte solution through, which would result in a more efficient fuel cell by reducing the pressure required to pump the catholyte, thereby reducing a parasitic loss. Further, these figures suggest that there may be an optimum wettability to be obtained with treatment of graphitic felt. The felt of Figure 10d showed the best performance (see Figure 7) as did the felt of Figure 11b (see Figure 8). A wettability between these two felts therefore may exemplify an optimum, with an increase or a decrease from this level being detrimental to the performance of the felt.

Figure 12 shows the performance data (polarisation curves) for fuel cells of the present invention operating using graphitic felt electrodes at different compression ratios. In all cases, the graphite felt electrode was a 50 x 63 mm polyacrylonitrile graphitic felt of thickness 2.5 mm, which was compressed to smaller thicknesses during the experiment (the percentage compression is given in the figure legend). The cathode electrode was fixed next to a commercially available membrane electrode assembly with active an area of 50 x 50 mm and membrane thickness 25 microns with an anode catalyst loading of $0.4 \text{ mg Pt cm}^{-2}$. A polyoxometallate catholyte was used (0.3 molar solution of $\text{Na}_4\text{H}_3[\text{PMo}_8\text{V}_4\text{O}_{40}]\cdot(\text{H}_2\text{O})_x$ in water), with a catholyte flow of 240 ml/min and a cell temperature of 79-82°C. A standard gas diffusion layer (carbon paper) of approximate thickness 0.3 mm was used in the anode compartment. The hydrogen pressure in the anode compartment was approximately 2 bar absolute. The fuel cell was run at different cathode compressions and the performance

monitored. As shown in Figure 12, the performance improves as the compression increases, with the best performance being seen for a felt compressed to 46% of its original thickness.

Figure 13 shows the performance data (polarisation curves) for fuel cells of the present invention operating using carbon cloth electrodes, with a thickness of approximately 0.5mm, compared to a 2mm thick reticulated vitreous carbon electrode. The cathode compartment for the RVC electrode was similar to that described in Figure 3. The knitted carbon cloth was originally 0.47 mm thick. On building the fuel cell, this electrode was placed next to the membrane and compressed to 0.35 mm. The woven carbon cloth was originally 0.528 mm thick. On building the fuel cell, this electrode was placed next to the membrane and compressed to 0.35 mm. For all fuel cells in Figure 13, the membrane was a commercially available electrode membrane assembly of active area 50 x 50 mm and membrane thickness 25 microns with an anode catalyst loading of 0.4 mg Pt cm⁻². A standard gas diffusion layer (carbon paper) of approximate thickness 0.3 mm was used in the anode compartment. The hydrogen pressure in the anode compartment was approximately 2 bar absolute. A polyoxometallate catholyte was used (0.3 molar solution of Na₄H₃[PMo₈V₄O₄₀].(H₂O)_x in water), with a catholyte flow of 240, 156 and 180 ml/min for the RVC, woven carbon cloth and knitted carbon cloth electrodes, respectively. The cell temperature was 79-82°C. Figure 13 demonstrates the increased performance of the cathodes of the present invention compared to that of the prior art. Further, Figure 13 also demonstrates the increase in performance of a woven cloth electrode, compared

to a knitted cloth electrode. This therefore shows that the weave of the cloth material can be tailored to the requirements of the fuel cell.

Claims

1. A fuel cell cathode electrode, comprising a porous skeletal medium, the surface of which medium is modified or otherwise arranged or constructed to induce enhanced activated behaviour, wherein the enhanced activated behaviour is induced by means of increasing the surface area for a given volume of the electrode and/or by increasing the number and/or availability of reactive sites on the electrode.
2. The cathode electrode of Claim 1, wherein the surface modification of the medium includes at least one increased surface area zone.
3. The cathode electrode of Claim 1 or Claim 2, wherein the surface modification of the medium includes a sputtered coating of carbon.
4. The cathode electrode of any one of Claims 1 to 3, wherein the surface modification of the medium includes physisorbed carbon.
5. The cathode electrode of any one of Claims 1 to 4, wherein the surface modification of the medium includes deposits of templated carbon.
6. The cathode electrode of any one of Claims 1 to 5, wherein the surface modification of the medium includes chemical vapour deposited carbon.

7. The cathode electrode of any one of Claims 1 to 6, wherein the surface modification of the medium includes chemical vapour infiltrated carbon.
8. The cathode electrode of any one of Claims 1 to 7, wherein the surface modification of the medium includes a region of increased electrochemical reactive sites per unit surface area.
9. The cathode electrode of Claim 8, wherein the surface modification of the medium includes liquid chemical modification.
10. The cathode electrode of Claim 8 or Claim 9, wherein the surface modification of the medium includes at least one oxidised region.
11. The cathode electrode of Claim 10, wherein the at least one oxidised region is effected by exposure to a strong acid, such as nitric acid or sulphuric acid, and/or a strong oxidising agent, such as ammonium persulfate.
12. The cathode electrode of any one of Claims 8 to 11, wherein the surface modification of the medium includes gas-phase chemical modification.
13. The cathode electrode of Claim 12, wherein the gas-phase chemical modification is effected by oxygen plasma treatment.

14. The cathode electrode of any one of Claims 8 to 13, wherein the surface modification of the medium includes plasma etching.
15. The cathode electrode of any one of Claims 8 to 14, wherein the surface modification of the medium includes heat treatment.
16. The cathode electrode of any one of Claims 1 to 15, wherein the arrangement or construction of the medium may comprise compressing the electrode.
17. The cathode electrode of Claim 16, wherein the compression is significantly beyond the recommended compression ratio.
18. The cathode electrode of any one of claims 1 to 17 wherein the porous skeletal medium is compressed to less than 80% of its original thickness.
19. The cathode electrode of any one of claims 1 to 18 wherein the porous skeletal medium is compressed to less than 70% of its original thickness.
20. The cathode electrode of any one of claims 1 to 19 wherein the porous skeletal medium is compressed to less than 60% of its original thickness.
21. The cathode electrode of any one of claims 1 to 20 wherein the porous skeletal medium is compressed to less than 50% of its original thickness.

22. The cathode electrode of any one of Claims 1 to 21, wherein the porous skeletal medium is compressible.
23. The cathode electrode of any one of Claims 1 to 22, wherein the porous skeletal medium comprises a soft fibre-based structure.
24. The cathode electrode of any one of Claims 1 to 23, wherein the porous skeletal medium comprises a carbon cloth.
25. The cathode electrode of Claim 24 wherein the carbon cloth is either woven or knitted.
26. The cathode electrode of Claim 25 wherein the carbon cloth is woven.
27. The cathode electrode of any one of Claims 1 to 23, wherein the porous skeletal medium comprises carbon paper.
28. The cathode electrode of any one of Claims 1 to 23, wherein the porous skeletal medium comprises a carbon veil.
29. The cathode electrode of any one of Claims 1 to 23, wherein the porous skeletal medium comprises a Carbon/PTFE composite medium.
30. The cathode electrode of any one of Claims 1 to 23, wherein the porous skeletal medium comprises a carbon aerogel.
31. The cathode electrode of any one of Claims 1 to 26, wherein the porous skeletal medium comprises an activated carbon cloth.

32. The cathode electrode of any one of Claims 1 to 23, wherein the porous skeletal medium comprises compressed carbon felts.
33. The cathode electrode of any one of Claims 1 to 15, wherein the porous skeletal medium comprises a rigid carbon structure.
34. The cathode electrode of Claim 33, wherein the porous skeletal medium comprises reticulated vitreous carbon.
35. The cathode electrode of any one of Claims 1 to 34, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a thickness of no more than 2mm.
36. The cathode electrode of any one of Claims 1 to 35, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a thickness of less than 1mm.
37. The cathode electrode of any one of Claims 1 to 36, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a thickness of less than 0.4mm.
38. The cathode electrode of any one of Claims 1 to 37, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a thickness of less than 0.25mm.

39. The cathode electrode of any one of Claims 1 to 38, wherein the porous skeletal medium takes the form of one or more panels.

40. The cathode electrode of Claim 39, wherein the one or more panels have dimensions of 250mm x 250mm.

41. The cathode electrode of any one of Claims 1 to 40, wherein the surface of the porous skeletal medium is reactive to a catholyte liquid.

42. The cathode electrode of any one of Claims 1 to 41, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a specific surface area from 600 to $30000\text{cm}^2/\text{cm}^3$.

43. The cathode electrode of any one of Claims 1 to 42, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a specific surface area of $3000\text{cm}^2/\text{cm}^3$.

44. The cathode electrode of any one of Claims 1 to 43, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a through-plane electrical resistance of no more than $17\text{m}\Omega\text{cm}^2$.

45. The cathode electrode of any one of Claims 1 to 44, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a through-plane electrical resistance of no more than $5\text{m}\Omega\text{cm}^2$.

46. The cathode electrode of any one of Claims 1 to 45, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified is/are stable in an oxidising environment of pH 0 at 80°C .

47. The cathode electrode of any one of Claims 1 to 46, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified is/are stable in an oxidising environment of pH 0 at 95°C .

48. The cathode electrode of any one of Claims 1 to 47, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified is/are stable in an oxidising environment of pH 0 at 120°C .

49. The cathode electrode of any one of Claims 1 to 48, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified is/are stable at elevated pressures.

50. The cathode electrode of Claim 49, wherein the elevated pressures are above atmospheric (or ambient) pressure, but below 5 bar absolute pressure.

51. The cathode electrode of any one of Claims 1 to 50, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a pore structure permeability of at least $5 \times 10^{11} \text{m}^2$.

52. The cathode electrode of any one of Claims 1 to 51, wherein the porous skeletal medium comprises at least one of carbon or a metal.

53. The cathode electrode of any one of Claims 1 to 52, wherein the porous skeletal medium is self supporting.

54. The cathode electrode of any one of Claims 1 to 53, wherein the surface modification, arrangement or construction results in an increased wettability of the cathode electrode.

55. A method of manufacturing a fuel cell cathode electrode, the method comprising the steps of: providing a porous skeletal medium; and modifying or otherwise constructing or arranging the surface of the medium to induce enhanced activated behaviour.

56. The method of Claim 55, wherein the step of modifying the surface of the medium includes increasing the surface area of the medium.

57. The method of Claim 56, wherein the surface area of the medium is increased by the provision of at least one increased surface area zone.

58. The method of any one of Claims 55 to 57, wherein the step of modifying the surface of the medium involves sputter coating it with carbon particles.

59. The method of Claim 58, wherein the sputtering process involves vacuum sputtering.

60. The method of any one of Claims 55 to 59 wherein the step of modifying the surface of the medium involves physisorbing carbon particles onto the medium.

61. The method of Claim 60, wherein the physisorbing process comprises the steps of: providing a suspension of carbon particles in a carrier; contacting the medium with the suspension of carbon particles; and evaporating the carrier so that carbon particles remain deposited on the medium through physisorption.

62. The method of Claim 61, further comprising the step of heat treating the carbon particles to adhere them to the medium.

63. The method of any one of Claims 55 to 62, wherein the step of modifying the surface of the medium involves a templating method for applying carbon to the medium.

64. The method of Claim 63, wherein the templating method involves the steps of: applying a template to the medium; depositing carbon over the template; removing the template to leave carbon deposited on the surface of the medium.

65. The method of Claim 64, wherein the template is soluble.

66. The method of any one of Claims 63 to 65, wherein the template is arranged on the medium in a particular formation chosen for its intended application.

67. The method of any one of Claims 55 to 66, wherein the step of modifying the surface of the medium involves chemical vapour depositing carbon thereonto.

68. The method of any one of Claims 55 to 67, wherein the step of modifying the surface of the medium involves chemical vapour infiltrating carbon thereinto.

69. The method of any one of Claims 55 to 68, wherein the step of modifying the surface of the medium involves increasing the number of electrochemical reactive sites per unit surface area.

70. The method of Claim 69, involving the step of liquid chemical modification to alter the surface chemistry of the medium.

71. The method of Claim 69 or Claim 70, involving the step of oxidising the surface of the medium.

72. The method of Claim 71, wherein the oxidising step is performed using a strong acid, such as nitric acid or sulphuric acid, and/or a strong oxidising agent, such as ammonium persulfate.

73. The method of any one of Claims 55 to 72, wherein the step of modifying the surface of the medium involves gas-phase chemical modification.

74. The method of Claim 73, wherein the gas-phase chemical modification is effected by oxygen plasma treatment.

75. The method of any one of Claims 55 to 74, wherein the step of modifying the surface of the medium involves plasma etching.

76. The method of Claim 75, wherein plasma etching comprises etching micropores into the surface of the medium.

77. The method of any one of Claims 55 to 76, wherein the step of modifying the surface of the medium involves heat treatment.

78. The method of any one of Claims 55 to 77, wherein the arrangement or construction of the medium may comprise compressing the electrode.

79. The method of Claim 78, wherein the compression is significantly beyond the recommended compression ratio.

80. The method of any one of Claims 55 to 79, wherein the porous skeletal medium is compressible.

81. The method of any one of Claims 55 to 80, wherein the porous skeletal medium is compressed to less than 80% of its original thickness.

82. The method of any one of Claims 55 to 81, wherein the porous skeletal medium is compressed to less than 70% of its original thickness.

83. The method of any one of Claims 55 to 82, wherein the porous skeletal medium is compressed to less than 60% of its original thickness.

84. The method of any one of Claims 55 to 83, wherein the porous skeletal medium is compressed to less than 50% of its original thickness.

85. The method of any one of Claims 55 to 84, wherein the porous skeletal medium comprises a soft fibre-based structure.

86. The method of any one of Claims 55 to 85, wherein the porous skeletal medium comprises a carbon cloth.
87. The method of Claim 86 wherein the carbon cloth is either woven or knitted.
88. The method of Claim 87 wherein the carbon cloth is woven.
89. The method of any one of Claims 55 to 85, wherein the porous skeletal medium comprises carbon paper.
90. The method of any one of Claims 55 to 85, wherein the porous skeletal medium comprises a carbon veil.
91. The method of any one of Claims 55 to 85, wherein the porous skeletal medium comprises a carbon/PTFE composite medium.
92. The method of any one of Claims 55 to 85, wherein the porous skeletal medium comprises a carbon aerogel.
93. The method of any one of Claims 55 to 88, wherein the porous skeletal medium comprises an activated carbon cloth.
94. The method of any one of Claims 55 to 85, wherein the porous skeletal medium comprises compressed carbon felts.

95. The method of any one of Claims 55 to 77, wherein the porous skeletal medium comprises a rigid carbon structure.
96. The method of Claim 95, wherein the porous skeletal medium comprises reticulated vitreous carbon.
97. The method of any one of Claims 55 to 96, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a thickness of no more than 2mm.
98. The method of any one of Claims 55 to 97, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a thickness of less than 1mm.
99. The method of any one of Claims 55 to 98, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a thickness of less than 0.4mm.
100. The method of any one of Claims 55 to 99, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a thickness of less than 0.25mm.
101. The method of any one of Claims 55 to 100, wherein the porous skeletal medium takes the form of one or more panels.

102. The method of Claim 101, wherein the one or more panels have dimensions of 250mm x 250mm.

103. The method of any one of Claims 55 to 102, wherein the surface of the porous skeletal medium is reactive to a catholyte liquid.

104. The method of any one of Claims 55 to 103, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a specific surface area from 600 to 30000cm²/cm³.

105. The method of any one of Claims 55 to 104, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a specific surface area of 3000cm²/cm³.

106. The method of any one of Claims 55 to 105, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a through-plane electrical resistance of no more than 17mΩcm².

107. The method of any one of Claims 55 to 106, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a through-plane electrical resistance of no more than 5mΩcm².

108. The method of any one of Claims 55 to 107, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified is/are stable in an oxidising environment of pH 0 at 80°C.

109. The method of any one of Claims 55 to 108, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified is/are stable in an oxidising environment of pH 0 at 95°C.

110. The method of any one of Claims 55 to 109, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified is/are stable in an oxidising environment of pH 0 at 120°C.

111. The method of any one of Claims 55 to 110, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified is/are stable at elevated pressures.

112. The method of Claim 111, wherein the elevated pressures are above atmospheric (or ambient) pressure, but below 5 bar absolute pressure.

113. The method of any one of Claims 55 to 112, wherein the porous skeletal medium and/or the material with which the surface of the medium is modified has/have a pore structure permeability of at least $5 \times 10^{11} \text{m}^2$.

114. The method of any one of Claims 55 to 113, wherein the porous skeletal medium comprises at least one of carbon or a metal.

115. The method of any one of Claims 55 to 114, wherein the porous skeletal medium is self supporting.

116. The method of any one of Claims 55 to 115, wherein the surface modification, arrangement or construction results in an increased wettability of the cathode electrode.

117. A fuel cell having a cathode electrode according to any one of Claims 1 to 54.

118. Use of a cathode electrode according to any one of claims 1 to 54 in a fuel cell.

119. Use of a cathode electrode according to any one of claims 1 to 54 in a back-up power application for mobile phone masts.

120. Use of a cathode electrode according to any one of claims 1 to 54 in computer systems applications requiring around 2 to 10kW power.

121. Use of a cathode electrode according to any one of claims 1 to 54 in stationary power applications including replacing a diesel engine genset for off-grid applications or larger back-up power.

122. Use of a cathode electrode according to any one of claims 1 to 54 in transport applications including automotive.

123. A fuel cell cathode electrode substantially as herein described with reference to and as shown in the accompanying drawings.

124. A method of manufacturing a fuel cell cathode electrode substantially as herein described with reference to and as shown in the accompanying drawings.

125. A fuel cell having a cathode electrode substantially as herein described with reference to and as shown in the accompanying drawings.

126. Use of a cathode electrode substantially as herein described with reference to and as shown in the accompanying drawings.

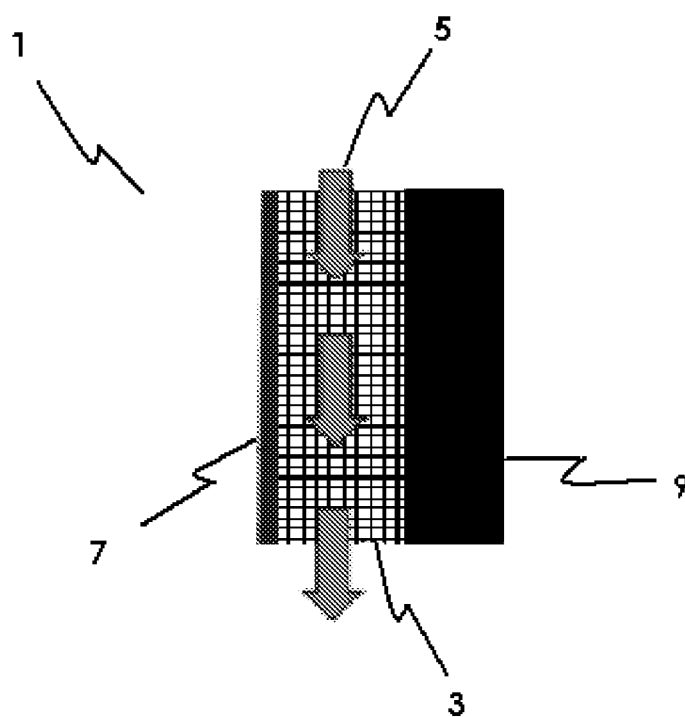
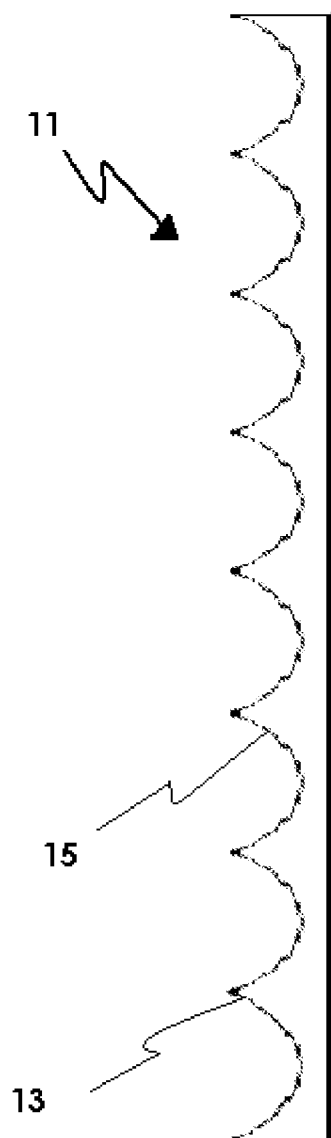


Figure 1

**Figure 2**

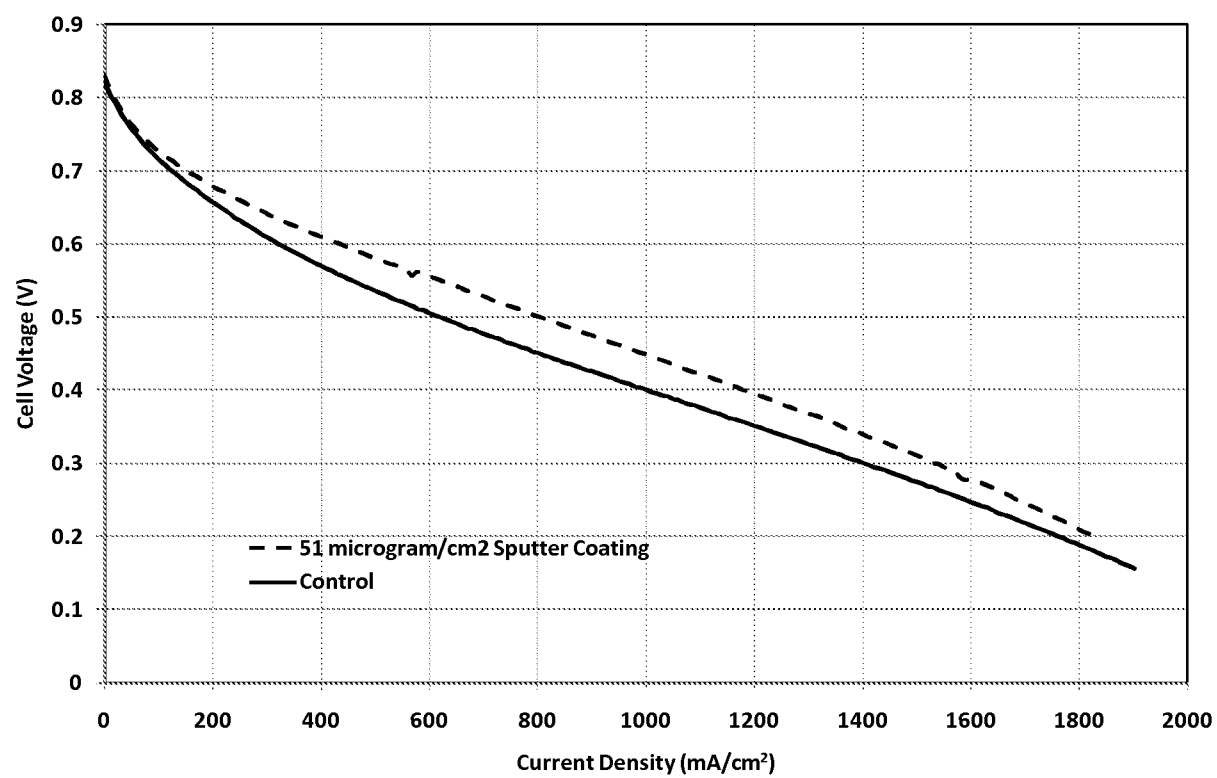
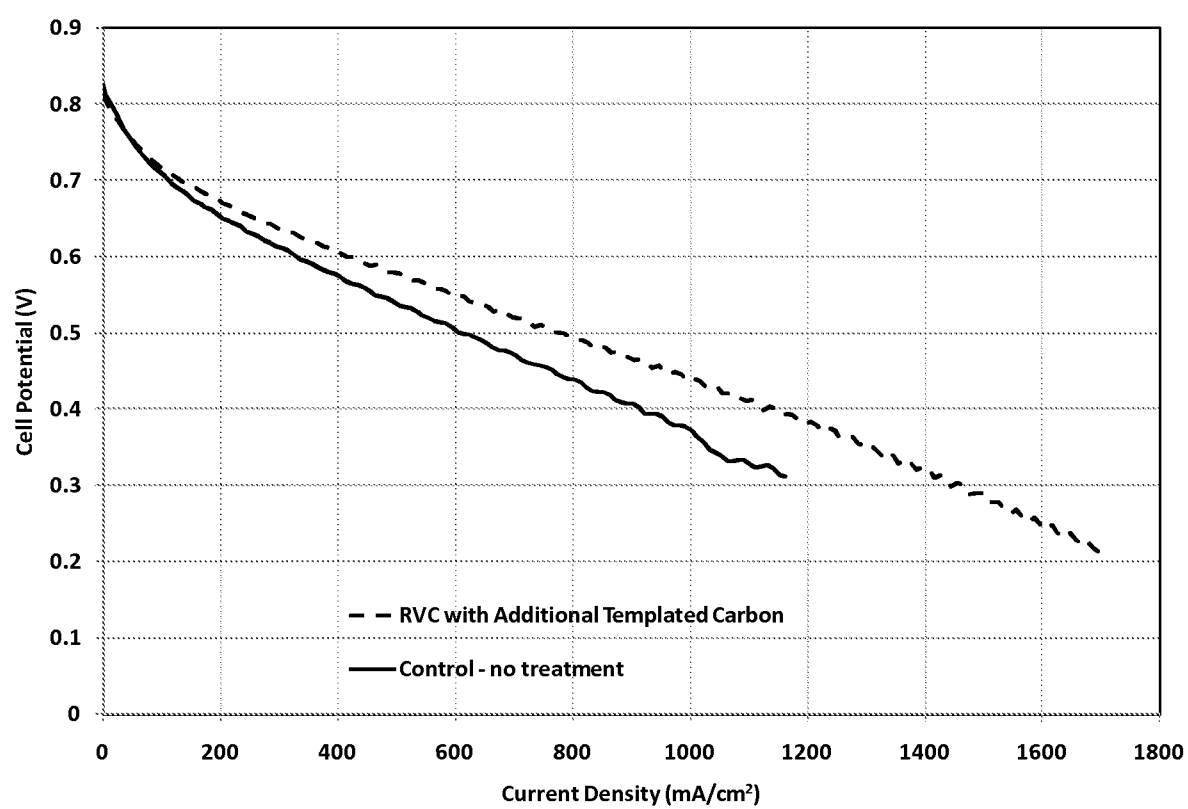


Figure 3

**Figure 4**

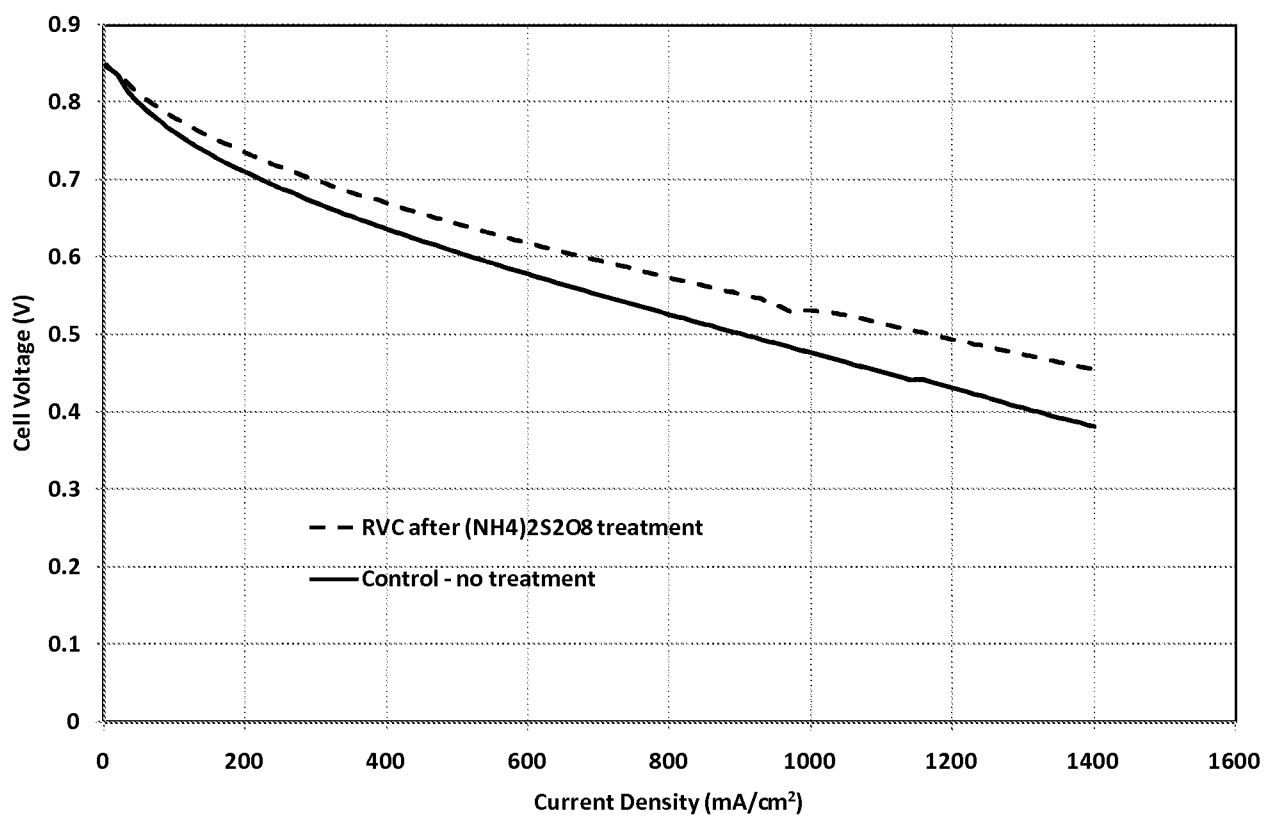


Figure 5

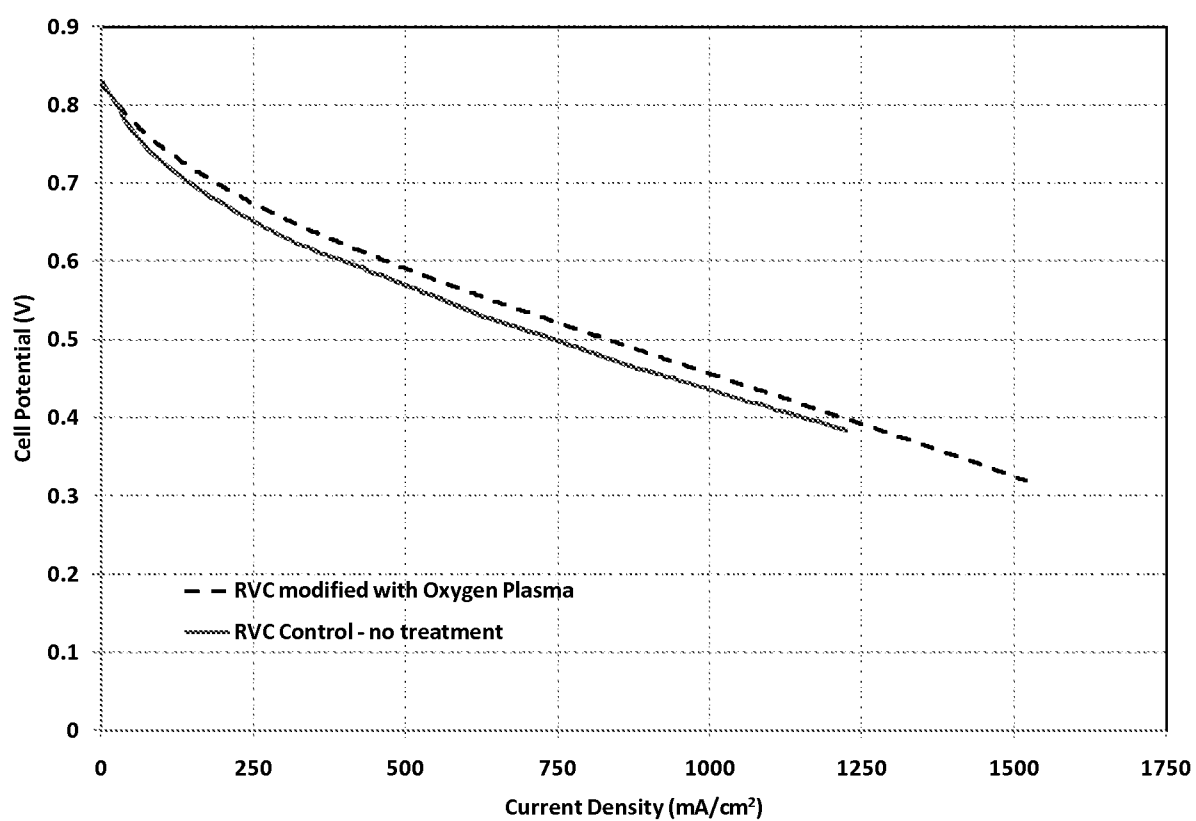


Figure 6

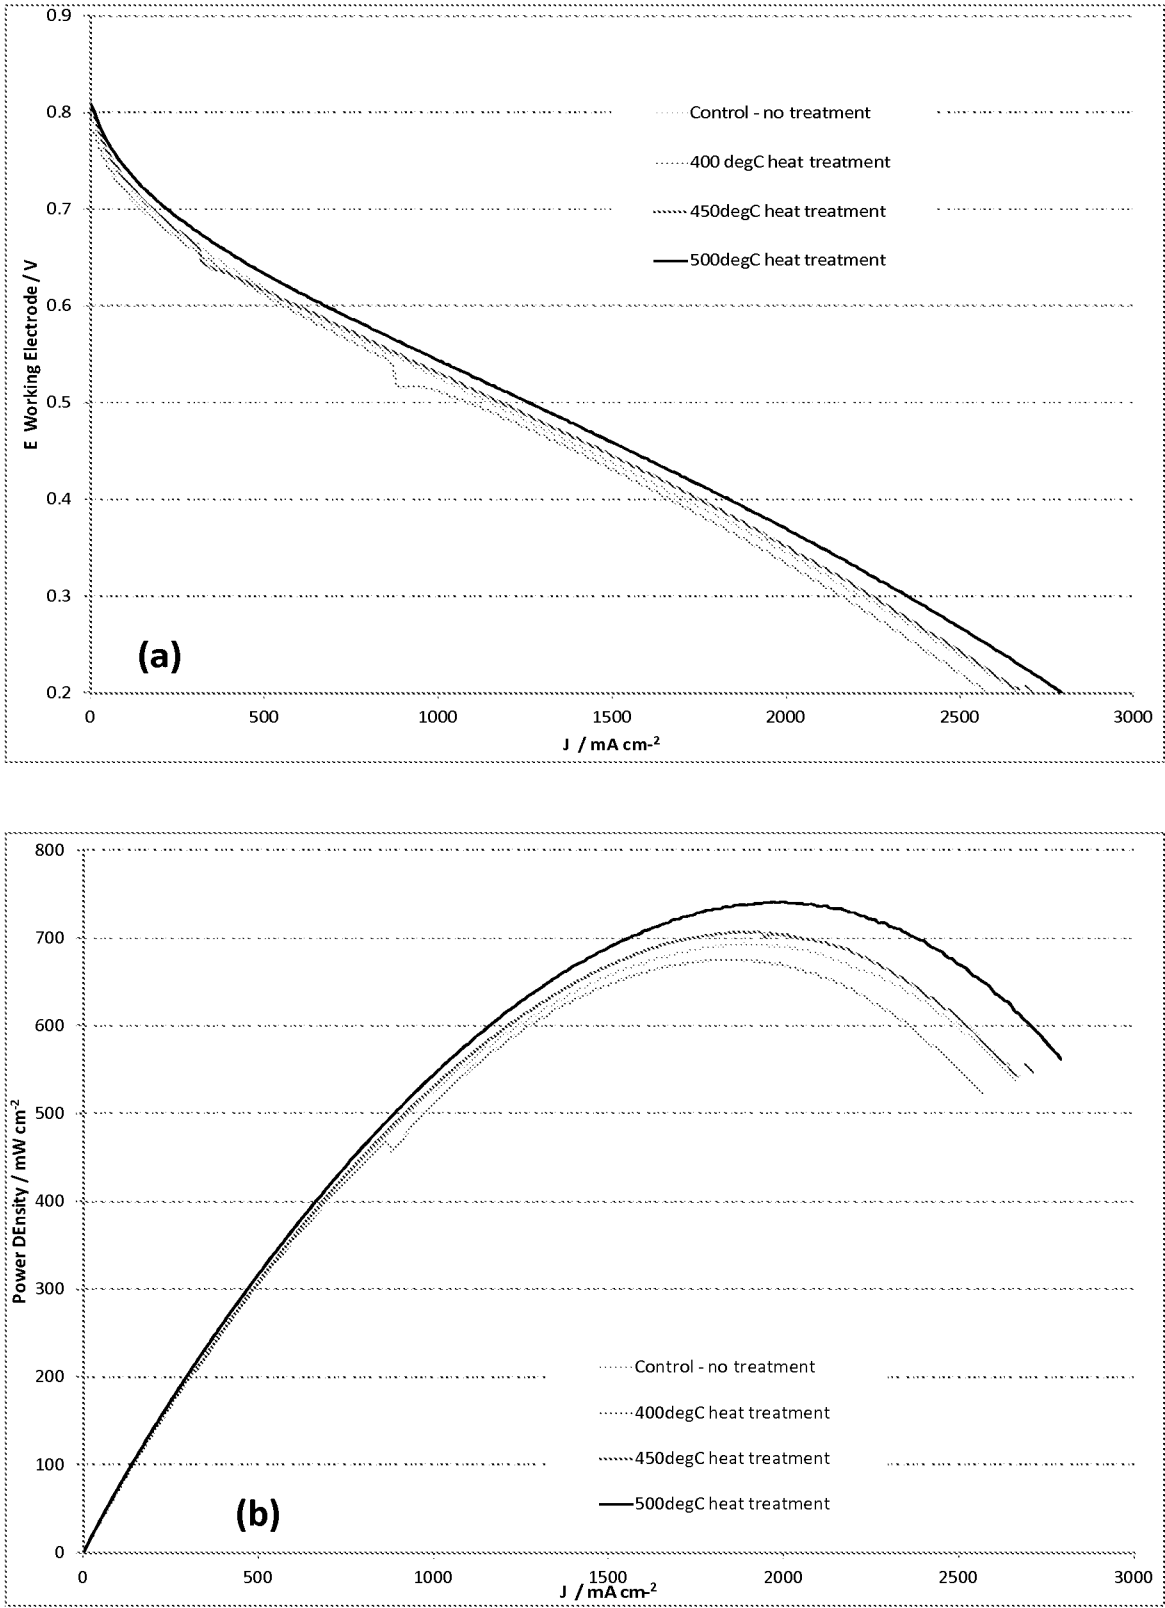
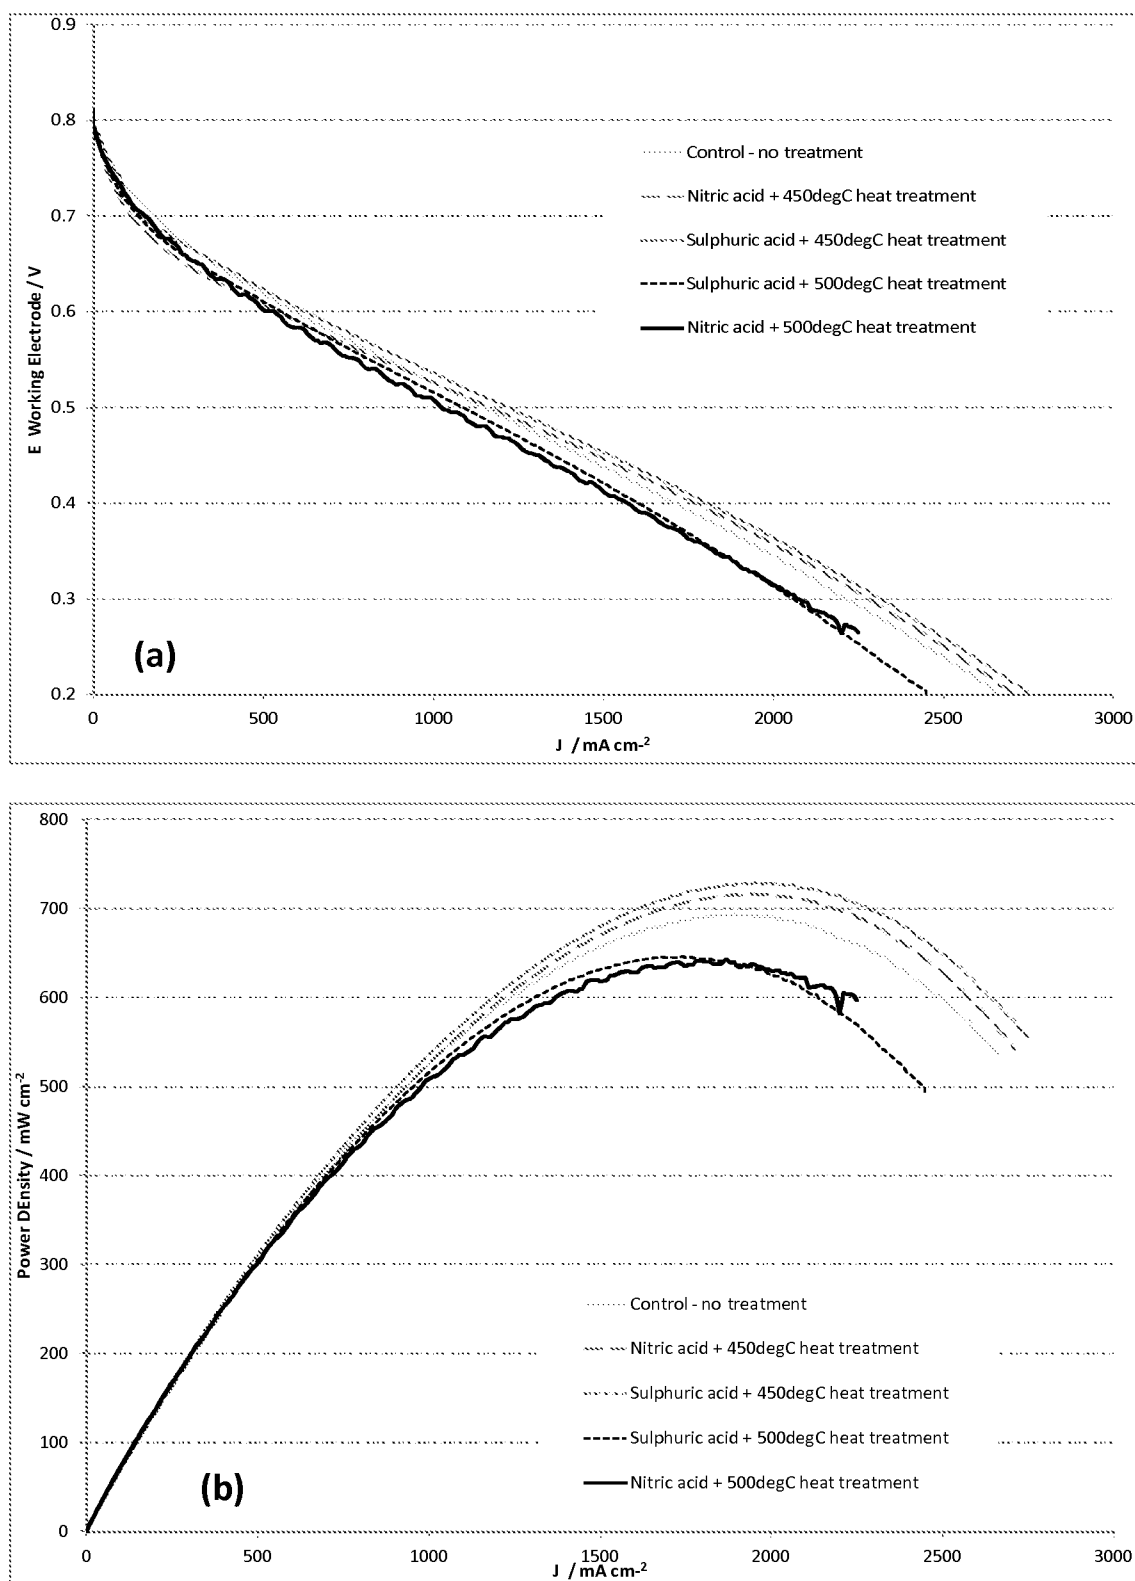
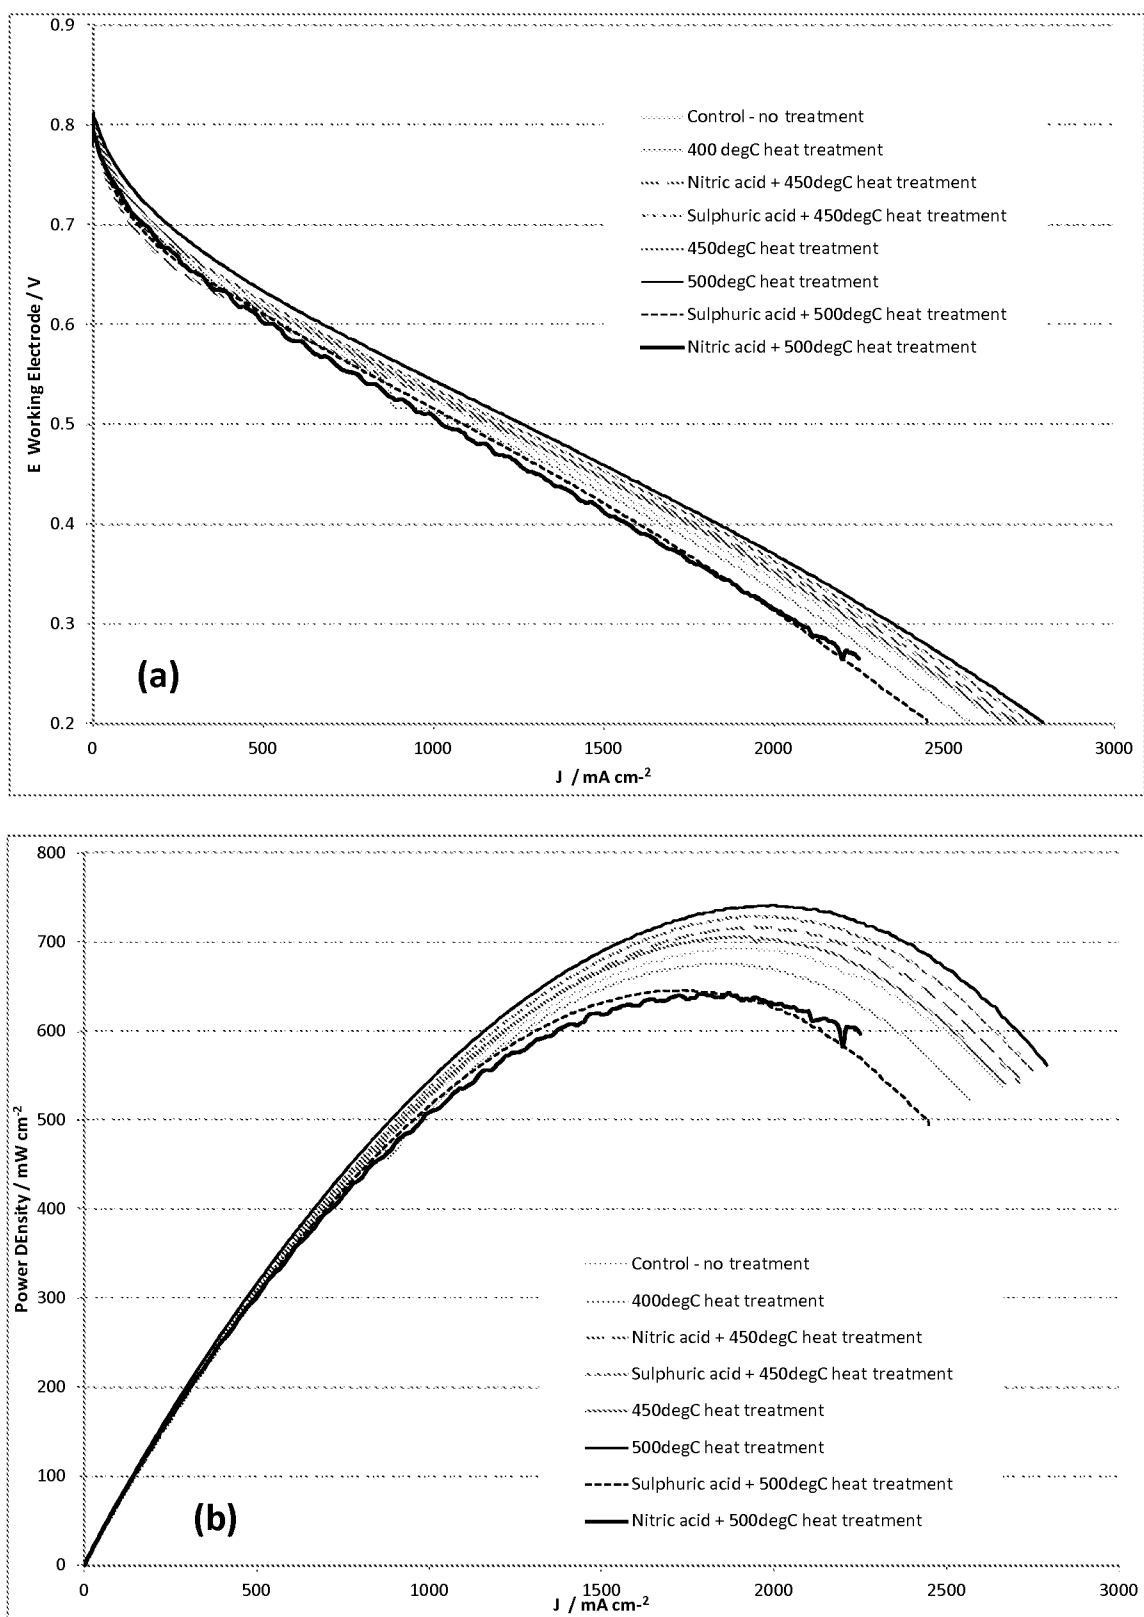


Figure 7

**Figure 8**

**Figure 9**

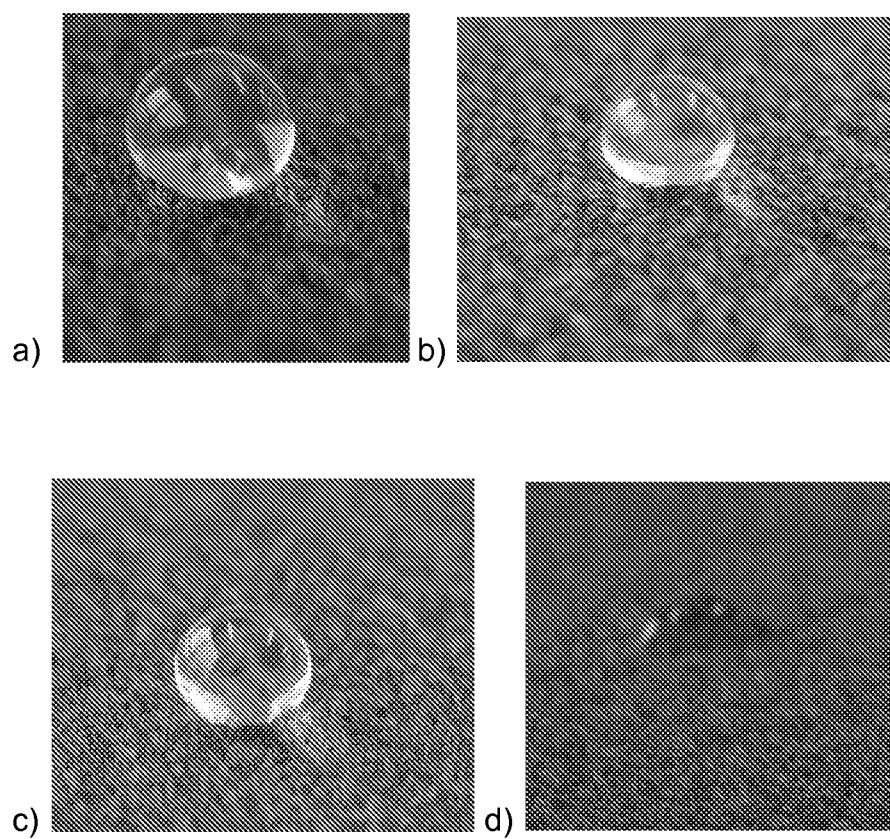


Figure 10

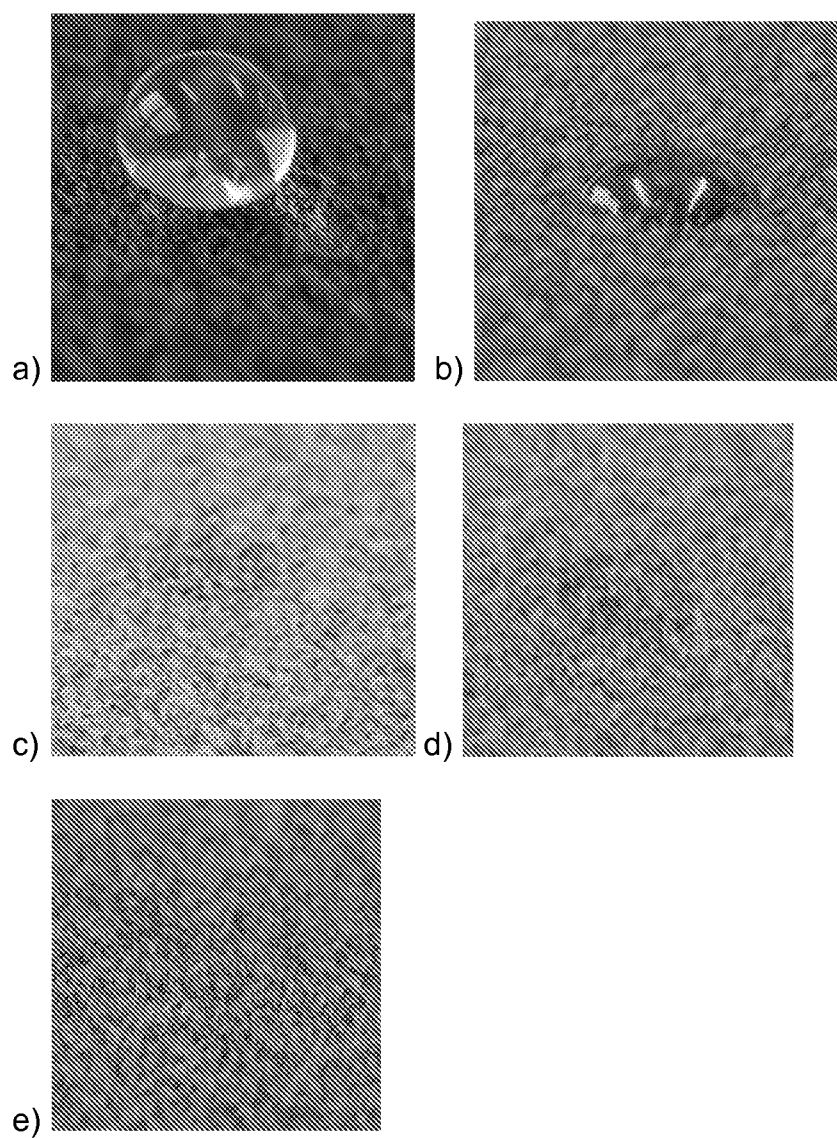


Figure 11

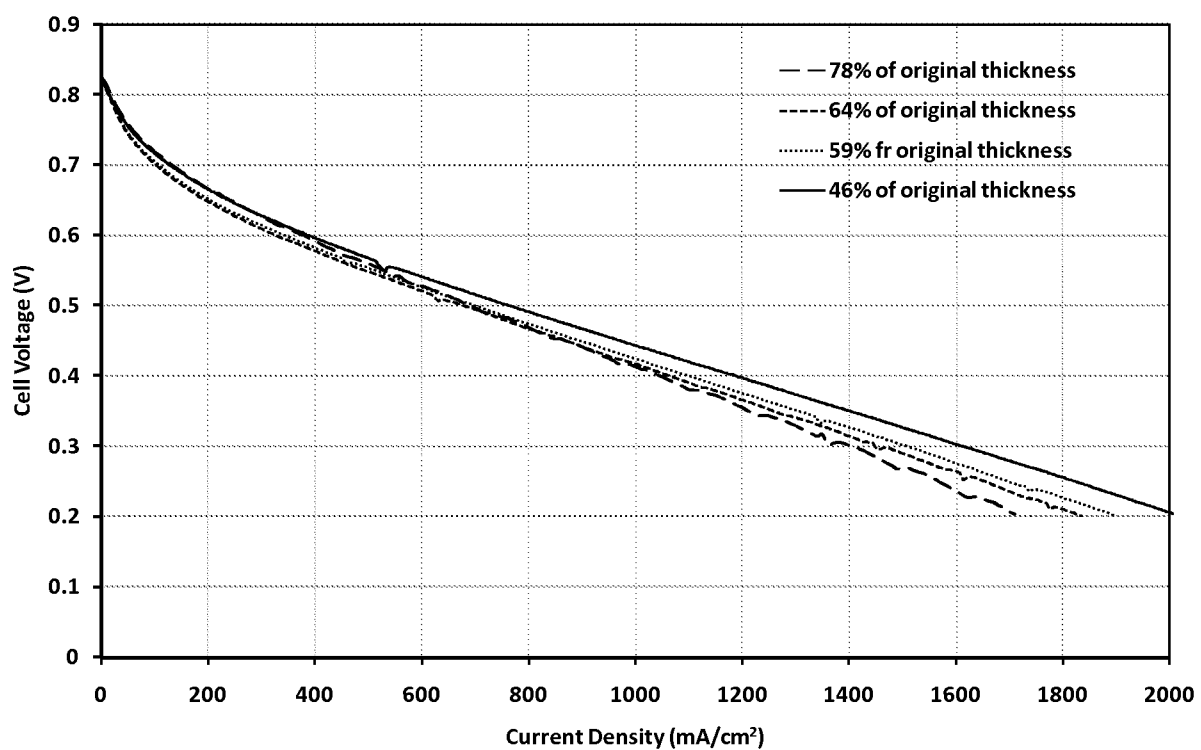


Figure 12

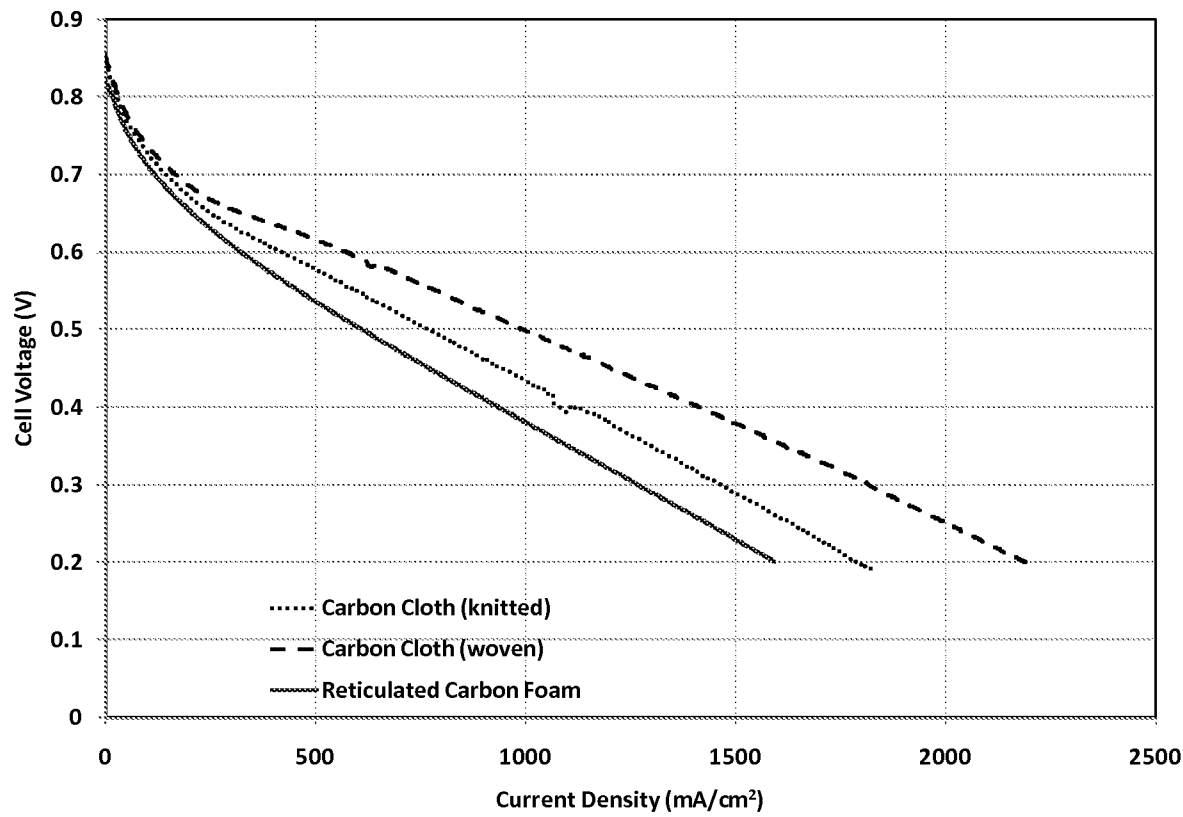


Figure 13