

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 October 2008 (16.10.2008)

PCT

(10) International Publication Number
WO 2008/124591 A1

- (51) International Patent Classification:
H04L 29/08 (2006.01)
- (21) International Application Number:
PCT/US2008/059411
- (22) International Filing Date: 4 April 2008 (04.04.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/910,101 4 April 2007 (04.04.2007) US
12/062,404 3 April 2008 (03.04.2008) US
- (71) Applicants (for all designated States except US): ZTE CORPORATION [CN/CN]; ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen 518057 (CN). ZTE USA, INC. [US/US]; 2425 N. Central Expressway, Suite 323, Richardson, TX 75080 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MO, Li [CA/US]; 4585 Spencer Drive, Plano, TX 75024 (US). LEE, Weijun [CA/US]; 209 Deep Spring Drive, Plano, TX 75025 (US). MA, Larry, Shaoyan [US/US]; 2045 Saint Anne Drive, Allen, TX 75013 (US). CHEN, Xing [US/US]; 8129 Haning Drive, Plano, TX 75025 (US).

- (74) Agents: O'DELL, David M. et al.; Haynes And Boone, LLP, 901 Main Street, Suite 3100, Dallas, TX 75202 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: SYSTEM AND METHOD OF PROVIDING SERVICES VIA PEER-TO-PEER-BASED NEXT GENERATION NETWORK

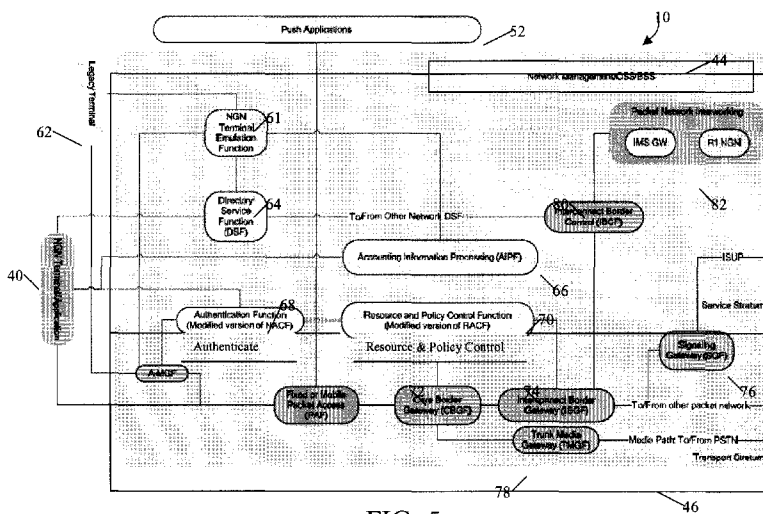


FIG. 5

(57) Abstract: A peer-to-peer network comprises a plurality of intelligent terminal nodes, each intelligent terminal node being operable to establish, maintain, and tear-down communication sessions with another intelligent terminal node, a plurality of network service nodes coupled to the plurality of intelligent terminal nodes, the plurality of network service nodes comprise at least one of the plurality of intelligent terminal nodes, at least one user P2P function module operable to store, locate and distribute service resource information related to user policies, and at least one network P2P function module operable to store, locate and distribute service resource information related to operator provider policies, and operable to exert stricter security control than the at least one user P2P function module.

WO 2008/124591 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

**SYSTEM AND METHOD OF PROVIDING SERVICES
VIA A PEER-TO-PEER-BASED NEXT GENERATION NETWORK**

BACKGROUND

5 The fundamental principle behind Peer-to-Peer (P2P) network architectures is that the application server functions offered by the network are implemented by a large number of distributed and autonomous network nodes and end nodes called peers, which collaborate with each other to accomplish the designated tasks. This P2P arrangement is in stark contrast with the traditional client-server architecture (e.g., public switched telephone network (PSTN), IP
10 multimedia subsystem (IMS)) in which a large number of clients communicate only with a small number of centralized, tightly managed servers responsible for performing designated tasks.

In the P2P-based network architecture, each peer provides server-like functionality and services as well as being a client within the system. In this way, the services or resources that would be provided by a centralized entity are instead available from the peers of the system.

15

BRIEF DESCRIPTION OF THE DRAWINGS

Aspects of the present disclosure are best understood from the following detailed description when read with the accompanying figures. It is emphasized that, in accordance with the standard practice in the industry, various features are not drawn to scale. In fact, the
20 dimensions of the various features may be arbitrarily increased or reduced for clarity of discussion.

FIG. 1 is a high-level block diagram of an embodiment of the P2P-based next generation network described herein;

FIG. 2 is a high-level message flow diagram of an embodiment of a session setup process in the P2P-based next generation network;

25 FIG. 3 is a high-level message flow diagram of an embodiment of an application provisioning process in the P2P-based next generation network;

FIG. 4 is another high-level block diagram of an embodiment of the P2P-based next generation network;

30 FIG. 5 is a more detailed block diagram of an embodiment of the P2P-based next generation network;

FIG. 6 is another more detailed block diagram of an embodiment of the P2P-based next generation network;

FIG. 7 is a high-level message flow diagram of an embodiment of a dynamic class of service (CoS) process in the P2P-based next generation network;

35 FIG. 8 is a high-level message flow diagram of an embodiment of a process to provide content security in the P2P-based next generation network;

FIG. 9 is a diagram of an embodiment of a service offering environment in the P2P-based next generation network; and

FIG. 10 is a block diagram of an embodiment of multi-registration of smart terminal nodes in the P2P-based next generation network.

DETAILED DESCRIPTION

5 The P2P-based next generation network (NGN) described herein supports the delivery of multimedia and communication services, and further maintains the robustness, easy-access to resources, and scalability of a traditional P2P network. The P2P-based next generation network architecture is based on the assumption that all of its participants or nodes are ephemeral in nature because the edge nodes of the network can join, leave, and fail at any time. Therefore, the network
10 is designed to operate with minimal impact when failures occur. Further, efficient algorithms are used in the P2P-based next generation network for resource lookup such as, for example, obtaining the IP address of a subscriber. As each participant or node is responsible for central processing unit (CPU) resource and storage, the P2P-based next generation network can scale from very small to very large without any added resources from each service provider. In other words, the users are
15 responsible for part of the capital and operational expenditures of operating the network.

With the advent of intelligent terminals that are capable of performing many application services locally without resorting to centralized network servers offered by the service provider, it is essential to identify the core values of a “service provider” network. An intelligent terminal in this context is any device that has processing power, and typically has memory, and some form of
20 wired or wireless communication capabilities, such as desktop computers, laptop computers, palmtop computers, mobile telephones, smartphones, SIP phones, and set-top boxes.

A high-level diagram of the P2P-based next generation network 10 is shown in FIG. 1. P2P-based next generation network 10 includes a plurality of nodes 12-19 show as video application node 12, provider’s nodes 13, 15, and 18, intelligent terminals 14, 16, and 19, and an application node 17. These network nodes 12-19 are physically connected to other nodes via a variety of connection media such as copper, fiber optics, and all forms of wireless media. Upon the physical connectivity of the network nodes, there are P2P agents 20-34 “overlaid” on each node. Each P2P agent serves a specific purpose, such as providing directory information, Centrix services, video services, and providing provider-only information, for example. In the P2P-based
25 network, the concept of “resources” is important. Everything can be considered as a “resource.” For example, the current IP address of an active subscriber can be viewed as a resource, which maps the telephone number or a uniform resource identifier (URI) into the IP address. The directory of a Centrex can also be viewed as a resource, which maps the short number to an IP address. Likewise, a multimedia file can be viewed as a resource. The application server that
30 provides certain services, e.g. file storage or billing server, can also be viewed as a resource. The strength of the P2P network is its capability to locate, distribute, and store those resources.

With intelligent terminals 14, 16, and 19, the terminals themselves locate the service or resource and invoke the service directly by connecting to them. Intelligent terminals can make the communication connection once the called party's IP address is located or identified. Another example of resources includes a fragment of an IPTV program. At the conceptual level, the intelligent terminal nodes are responsible for most of the session handling which alleviate the need to have session state in the provider's network. All the resources (e.g. subscriber's current IP address, TV fragments, file fragments, billing records, services, etc.) are distributed in the network, which encompasses all the equipment involved. Different equipment may be only responsible for different resources (e.g. subscriber's current IP address may have to be limited to be distributed inside the provider's network). Equipment in the network may contain P2P networking component (shown as P2PF in the architecture discussed later). In this setup, we utilize the key functions of the P2P network – distributing, locating, and storing files (or resources).

P2P-based next generation network 10 has, as much as possible, all or most of the intelligence in the network edge nodes or the intelligent terminals. If it is not possible to put all the intelligence into the edge nodes, then build all the intelligence into the first-hop nodes (e.g., home gateway and access points) and the edge nodes. However, if it is not possible to put all the intelligence into the edge and first-hop network nodes, then build the intelligence into the next-hop nodes (e.g. DSLAM/Edge routers) as well as the first-hop, and edge nodes. The very last choice is to put the intelligence into the servers in the core of the network (e.g. S-CSCF, Application Servers, media servers).

FIG. 2 is a high-level message flow diagram of an embodiment of a session setup process in the P2P-based next generation network. A first intelligent terminal 40 establishes a communication session with a second intelligent terminal 42 via a service stratum 44 and a transport stratum 46 of the network. The intelligent terminals has the intelligence to perform communication session set-up, maintenance, and tear-down. Traditional value-added service features, such as session blocking, session forwarding, can also be implemented on the intelligent terminals. Other traditional value-added services, such as caller ID blocking, can be realized by service agent or relay equipment inside the network. The network may also provide default IP addresses for terminals that are not on-line for session forwarding purposes. As shown in FIG. 2, core functions of service stratum 44 includes directory lookup, authentication, charging processing, and quality of service (QoS) or resource control. For any given user ID, an IP address is provided if the user can be located, other session setup-related information can also be included in the lookup. Further, during terminal registration, the user terminal is authenticated for security considerations. The P2P-based next generation network performs the task of authenticating all the parties involved in the communication connection, such as authenticating the identities of the caller and called parties. In general, this task is not performed by the intelligent terminals because they are deemed untrustworthy. Further, while charging information is collected by the intelligent

terminal, the processing of the charging information is done by service stratum 44 of the network. Additionally, the control of QoS or network transport resources is also performed by service stratum 44 of the network. The control may be segment-by-segment or end-to-end.

By pushing intelligence of the network to the edge nodes, or the terminals, service stratum 44 may eliminate the need to maintain the session state information, which improves network scalability, robustness and performance. The boundaries of service stratum 44 may not necessarily stop at the boundaries of transport stratum 46, but may reach far into the transport networks.

FIG. 3 is a high-level message flow diagram of an embodiment of an application provisioning process in the P2P-based next generation network. First intelligent terminal 40 first obtains or looks up the IP address or service ID for service XYZ. The user of intelligent terminal 40 then uses the service ID to invoke or connect to the XYZ service. This user-centric model provides more flexibility of service selection and end-user experience, but also decreases the burden of service stratum 44 and potentially increases the scalability and robustness of the network.

FIG. 4 is another high-level block diagram of an embodiment of the P2P-based next generation network 10. Network 10 includes service stratum 44 and transport stratum 46 as described above, and further end-user functions and applications 50 as well as push applications 52. End-user applications 50 reside in the intelligent terminals and enables the functionalities described above. Further, push applications 52 in network 10 uses service and transport strata 44 and 46 to “push” or deliver content to subscribers from service providers. For example, advertisement may be pushed and inserted into media streams delivered to subscribers’ intelligent terminals depending on subscription options.

FIG. 5 is a more detailed functional block diagram of an embodiment of P2P-based next generation network 10. Service stratum 44 of network 10 includes an NGN terminal emulation function 60 to provide support to legacy terminals 62 such as dumb terminals in the network. However terminal emulation function 60 may be phased out gradually as more intelligent terminals 40 are deployed in the network and the number of legacy terminals 62 decreases. Because legacy terminal support is isolated in the network and not distributed across various network components, it is a straight forward process to phase out and eliminate this function in the network. Directory service function 64 provides the directory lookup service described above. Directory service function 64 services the terminals directly.

Directory service function 64 is operable to communicate with service provider directory lookup services for called party information if the information is not available locally. Managed VPN services can also be achieved via proper manipulation and management of the directory lookup function. Network 10 also includes accounting information processing functions 66. Accounting information processing functions 66 receive the charging information related to subscribers’ communication activities from the intelligent terminals and generate an accounting statement based on the provided information. These activities may include best-effort

communication sessions and sessions in which dynamic class of service (CoS) is provided. Accounting information processing functions 66 may also perform audits of data gathered and stored on the intelligent terminals to ensure the integrity of the accounting/charging information.

5 Authentication in network 10 may be performed by an authentication function 68, which may straddle service and transport strata 44 and 46, as shown in FIG. 5. Authentication function 68 may be similar to network attachment control functions (NACF) and/or resource and admission control functions (RACF) proposed in ITU-T Recommendation Y.2012 but modified to support mobility and different means of access mechanisms of the intelligent terminals. Authentication function 68 provides access and transport layer authentication while service authentication may or
10 may not be bundled with access and transport authentication. Resource and policy control function 70 manages QoS for communication and permission to access certain resources similar to the RACF described in the Y.2012 Recommendations, but with modifications to cover both the mobile and fixed network environment.

Because the air interface bandwidth may be limited, all the mobile handsets can be viewed
15 as non-P2P end-points and the network provides the necessary emulation to fit the mobile sets in the P2P network architecture. Roaming for other provider's subscriber can be supported if authentication can be performed and there is roaming agreement between those subscribers. Handovers between packet-based networks can be established by mobile IP. Handovers between circuit-based networks and P2P-based networks is can be done in a similar fashion as switching
20 over between an IMS-based network and a circuit-based network. Nomadic users may access the "home" network services via the Internet. In this case, proper authentication mechanisms are provided to ensure security.

Transport stratum 46 of network 10 includes a number of gateway functions 72-78 to provide internetworking with existing networks. An interconnect border control function 80 is
25 further provided in service stratum 44 as an interface to packet network internetworking functions 82.

FIG. 6 is another more detailed block diagram of an embodiment of P2P-based next generation network 10. P2P-based next generation network 10 is characterized by the concept that no session state information is maintained in the network, with possible exception of the session admission control (SACF) component and POTS_AF (POTS Access Function). All the session-
30 related information for intelligent terminals 40 are controlled by USIPF (User SIP Function) 84 and UPF (User Policy Function) 86. This simplifies network design and increases the scalability of the network. UP2PF (User P2P Function) 90 is the component or function that stores, locates, and distributes resource information (e.g. IP addresses of a given subscriber, a fragment of IPTV program, etc) and is associated with user policy function (UPF) 85. Intelligent terminal 40 further
35 includes a charging function 86 operable to collect all service charges, dynamic CoS charges, and session-based charges. Intelligent terminal 40 further includes a user interface function (UIF) 87

that provides a display and user input devices such as keyboard, keypad, touch-sensitive display or pad, pointing devices, for example. NP2PF (Network P2P Function) 92 may exert stricter security control than that of UP2PF and is associated with the operator provider's policy decision function (PDF) 94. Policy decision function 94 provides centralized policy control, which bridges the application and the subscribers. Those policies represent service provider's policy while the user personalized policy can be implemented in the intelligent terminals.

The architectural entity POTS Access Function (POTS-AF) 60 is similar or equivalent to NGN terminal emulation function 60 shown in FIG. 5. Function 60 emulates next generation network terminal function for the traditional POTS terminals. This function can be easily fulfilled by a soft switch upgraded with the P2P-related software.

The PSTN gateway (GW) function 96 provides internetworking between the P2P-based next generation network and the PSTN for the voice component of the communication sessions. Mobile circuit-switched (CS) gateway 98 provides support for inter-connectivity between the P2P-based next generation network and the current mobile circuit switched network. It may additionally provide home subscriber server (HSS) emulation for the mobile circuit switched network.

The ETSI NASS (Network Access Subsystem) 68 provides user authentication in the P2P-based next generation network. The Session Admission Control Function (SACF) 100 supports dynamic CoS and ensures QoS, described in detail below. The P2P-based next generation gateway 102 connects with other providers' P2P networks 104, which may have different P2P topology structure and different P2P search mechanisms. An Internet gateway 106 provides connectivity via the Internet where security needs to be enhanced. An IP multimedia subsystem (IMS) gateway 108 provides connectivity to an IMS for delivering Internet protocol multimedia to the users.

As described above, charging function (CF) module 66 receives charging information from the intelligent terminals, and does not maintain the intermediate state of a session. Charging information is a type of resources which can be stored, located, and distributed by the P2PF. This resource will be generated by core border gateway (CBGF) 72 or other components and send to NP2PF for storage and distribution. A plurality of charging servers can be used in the network to remove those resources once the charging information has been properly stored and processed. The items to be charged are based on operator's policy. On-line charging is possible via a proper credit system. The subscriber's credit is also a "resource" to be distributed by the NP2PF. The subscriber may replenish his/her credit for acquiring resources and services in the network.

A media insertion function (MIF) 110 is a push application that is responsible for storing, distribution, insertion or deletion of certain media content into the media stream. One example of MIF is the insertion of advertisement for the video media for certain classes of subscribers.

FIG. 7 is a high-level message flow diagram of an embodiment of a dynamic class of service (CoS) process in P2P-based next generation network 10. The P2P-based next generation network provides dynamic class of service (CoS) capability with monetary repercussions. For example, the caller or the called party can dynamically adjust the differentiated services code point (DSCP) in the DiffServ network, which has higher (or lower) fee associated with the connection. The user can initiate the request, which is then enforced on the network side in order to prevent CoS theft.

The subscriber has the ability to modify the CoS for both the traffic originating and terminating on the subscriber for any particular session. If the user intends to have better services, he or she request better service with the network. The network in turn will advice the new charging policy for the better service. Alternatively, the intelligent terminal may have the cost data to respond to the user's request for higher CoS directly. If the customer agrees upon the better CoS costs, the service quality (CoS) provided to the customer is improved. The intelligent terminal collects data associated with the upgrade in communication quality, such as session start time and stop time and the upgraded class, for example, for billing purposes. In order to support dynamic CoS, the subscriber or the intelligent terminal issues re-INVITE with new DSCP marking, and the response also contains the new DSCP marking. The network may snoop those SIP messages (or proxy those messages) to modify the DSCP marking, in accordance with the operator's policy and charging model.

FIG. 8 is a high-level message flow diagram of an embodiment of a process to provide content security in the P2P-based next generation network. Generally, the P2P-based next generation network described herein further extends the P2P network concept to the carriers to address the issue of security of the contents. In existing P2P-based carrier networks, the access user information is shared between users. It is therefore potentially possible to have users to use the user information for unintended purposes.

The basic assumption of a secure P2P-based next generation network is an established public key infrastructure. For any originator, its public key would be available to all the elements participating in the P2P operation. If the user's intelligent terminal does relay or originate the P2P content, the originator of the content needs to attach a digital signature using its private keys. The consumer of the P2P content needs to obtain the public key of the originator and verify the content. In this case, the originator needs to put its identification (e.g. URI) in the P2P content for verification purposes. Other mechanisms may also available to deal with the security issue but the public key infrastructure may be mature enough to be implemented. It should be noted that the subscriber to public key mapping can also be shared by the P2P network. But the originator has to be the provider's secure equipment and its public key can be obtained via any service provider's equipment (e.g. CBGF, etc).

FIG. 9 is a diagram of an embodiment of a service offering environment in the P2P-based next generation network. One of the key strength of P2P network is its capability to provide applications, with little modification in the core network, both from the logic point of view and from the data point of view. In contrast, for IMS-based networks, the data in HSS needs to be modified for any new applications for S-CSCF triggering purposes. In the P2P based next generation network architecture, if any new services are to be provided, the new application can be connected to the existing network as shown in FIG. 9. The xP2PF indicates that the entity can be either NP2PF or UP2PF.

In this environment, the services can be added or removed with little involvement in the networking equipment, both from logic (programming) point of view and from data (data fill) point of view. The service providers can be the same as that of the access network provider, of the core network provider, or of the 3rd party.

FIG. 10 is a block diagram of an embodiment of multi-registration of smart terminal nodes in the P2P-based next generation network. For intelligent terminals, it is also possible to register with multiple service providers. The capability of multiple registrations on the intelligent terminal will enable diverse business model which is not possible in the current application environment. It is also enable the service provider's to extend the usage base with minimum investment.

Emergency communication in P2P-based next generation network 10 can be achieved via direct connectivity between the intelligent terminal and the public safety access point (PSAP), with its IP address can be provided via DHCP or during initial network access (e.g., authentication phase). If the PSAP is time-division multiplexed (TDM) only, the IP address of the gateway, which is responsible for the IP to TDM internetworking, will be provided. In this case, the intelligent terminal contacts the IP address (the gateway controller) directly. It is up to the operator's policy whether such address is to be provided, and if such communication is to be performed (if the gate controlled by CBGF is to open).

Although embodiments of the present disclosure have been described in detail, those skilled in the art should understand that they may make various changes, substitutions and alterations herein without departing from the spirit and scope of the present disclosure. Accordingly, all such changes, substitutions and alterations are intended to be included within the scope of the present disclosure as defined in the following claims. In the claims, means-plus-function clauses are intended to cover the structures described herein as performing the recited function and not only structural equivalents, but also equivalent structures.

WHAT IS CLAIMED IS:

1. A peer-to-peer network comprising:
 - a plurality of intelligent terminal nodes, each intelligent terminal node being operable to establish, maintain, and tear-down communication sessions with another intelligent terminal node;
 - a plurality of network service nodes coupled to the plurality of intelligent terminal nodes, the plurality of network service nodes comprise at least one of the plurality of intelligent terminal nodes;
 - at least one user P2P function module operable to store, locate and distribute service resource information related to user policies; and
 - at least one network P2P function module operable to store, locate and distribute service resource information related to operator provider policies, and operable to exert stricter security control than the at least one user P2P function module.
2. The network of claim 1, further comprising a charging module coupled to the plurality of intelligent terminal nodes and operable to receive charging information for received services collected by the plurality of intelligent terminal nodes, and providing billing functionality for the received services.
3. The network of claim 2, wherein the charging module is operable to process costs associated with dynamic CoS service in a communication session between two intelligent terminal nodes.
4. The network of claim 1, further comprising a directory service module coupled to the plurality of intelligent terminal nodes and operable to look up and provide location of service resources to the plurality of intelligent terminal nodes.
5. The network of claim 1, further comprising an authentication module coupled to the plurality of intelligent terminal nodes and operable to authenticate an intelligent terminal node providing a service resource to another intelligent terminal node.
6. The network of claim 1, further comprising a media insertion module coupled to the plurality of intelligent terminal nodes and operable to insert media into a communication session between two intelligent terminal nodes.

7. The network of claim 1, further comprising:

at least one dumb terminal node; and

a terminal emulation module coupled to the at least one dumb terminal and operable to enable the at least one dumb terminal node to establish communication sessions with the plurality of intelligent terminal nodes.

8. The network of claim 1, further comprising a PSTN gateway coupled to the plurality of intelligent terminal nodes and operable to provide interface to a PSTN network.

9. The network of claim 1, further comprising a mobile circuit-switched gateway coupled to the plurality of intelligent terminal nodes and operable to provide interface to mobile circuit-switched networks.

10. The network of claim 1, further comprising an Internet gateway coupled to the plurality of intelligent terminal nodes and operable to provide interface to the Internet.

11. The network of claim 1, wherein each intelligent terminal node comprises a user SIP module and user policy module operable to control session-related information.

12. The network of claim 1, further comprising a session admission control module coupled to the plurality of intelligent terminal nodes and operable to maintain session state information.

13. The network of claim 1 further comprising a centralized policy control module coupled to the plurality of intelligent terminal nodes and operable to maintain and control provider policies.

14. A communication network comprising:

a plurality of intelligent terminal nodes, each intelligent terminal node being operable to establish, maintain, and tear-down communication sessions with another intelligent terminal node, and further collect charging information associated with the communication sessions;

a network service stratum coupled to the plurality of intelligent terminal nodes and operable to locate resource services, perform billing functions, and authenticate providers of resource services in the network; and

a network transport stratum operable to couple the plurality of intelligent terminal nodes to resource services in the network.

15. The network of claim 14, wherein the network service stratum comprises a charging module operable to process costs associated with resource services and dynamic CoS service in a communication session between two intelligent terminal nodes.

5 16. The network of claim 14, wherein the network service stratum comprises a directory service module coupled to the plurality of intelligent terminal nodes and operable to look up and provide location of service resources to the plurality of intelligent terminal nodes.

10 17. The network of claim 14, wherein the network service stratum comprises an authentication module coupled to the plurality of intelligent terminal nodes and operable to authenticate an intelligent terminal node providing a service resource to another intelligent terminal node.

15 18. The network of claim 14, wherein the network service stratum comprises a media insertion module coupled to the plurality of intelligent terminal nodes and operable to insert media into a communication session between two intelligent terminal nodes.

20 19. The network of claim 14, wherein the network service stratum comprises a terminal emulation module coupled to at least one dumb terminal in the network and operable to enable the at least one dumb terminal node to establish communication sessions with the plurality of intelligent terminal nodes.

25 20. A method of providing services in a peer-to-peer network, comprising:
authenticating a first intelligent terminal node as a service provider adapted to provide a service;
receiving a request for an identifier of the service provider from a second intelligent terminal node of the network;
looking up the requested identifier of the first intelligent terminal node and transmitting the requested identifier to the second intelligent terminal node;
30 enabling the second intelligent terminal node to initiate a communication session with the second intelligent node terminal;
receiving a request from the second intelligent terminal node to improve the quality of the communication session and enabling the requested improvement; and
receiving charging information related to charges for the communication session and the
35 session improvement and generating billing information in response to the charging information.

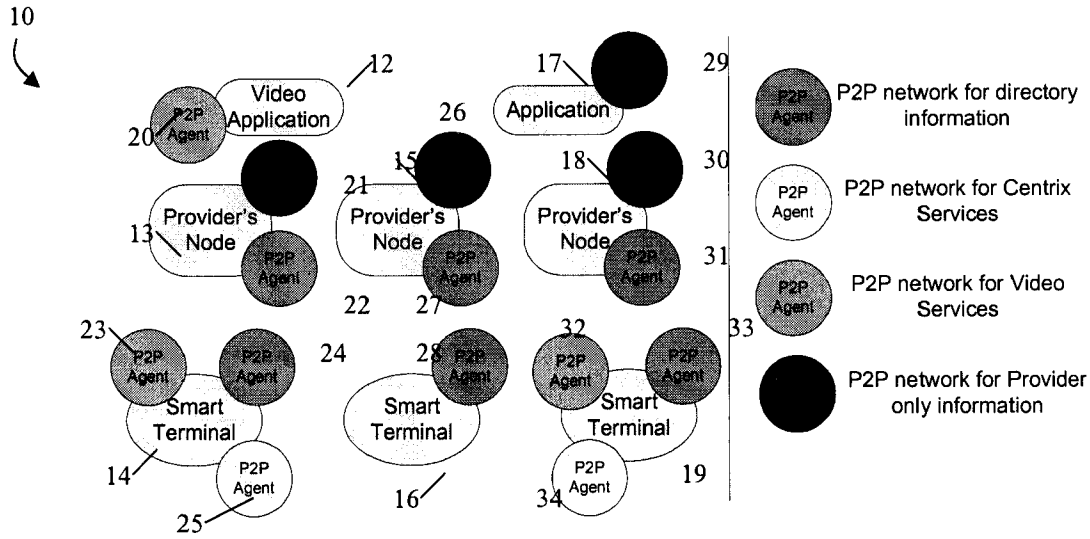


FIG. 1

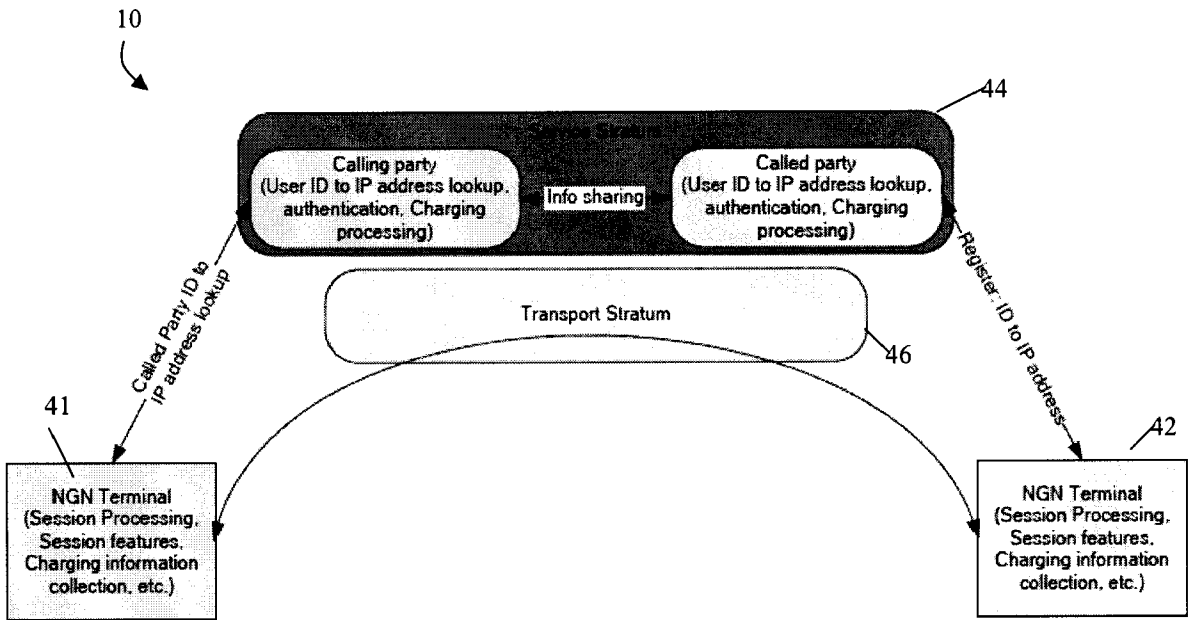


FIG. 2

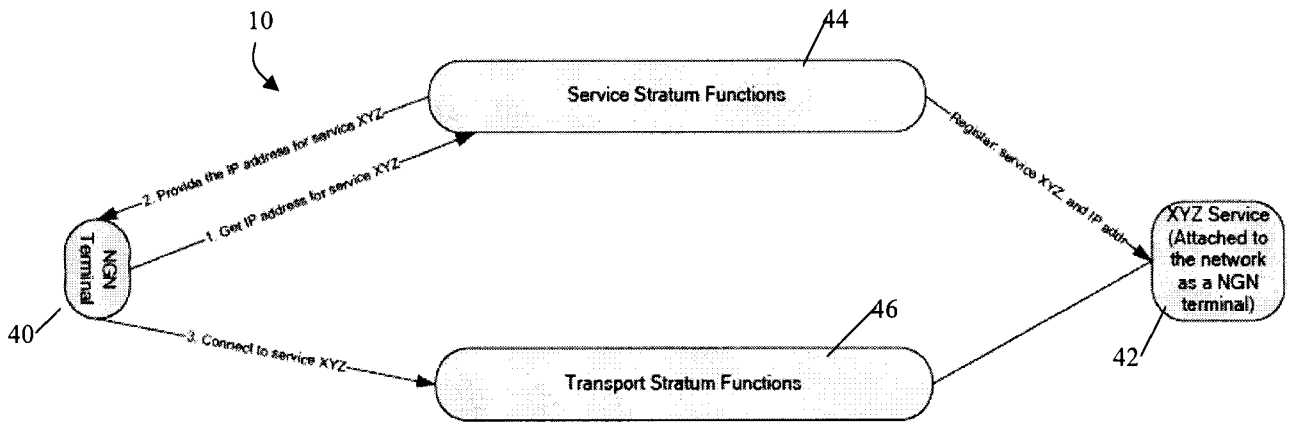


FIG. 3

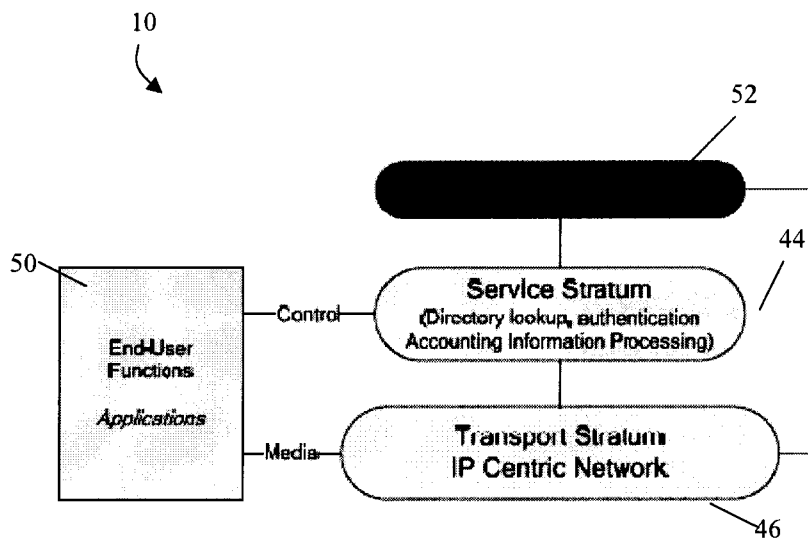


FIG. 4

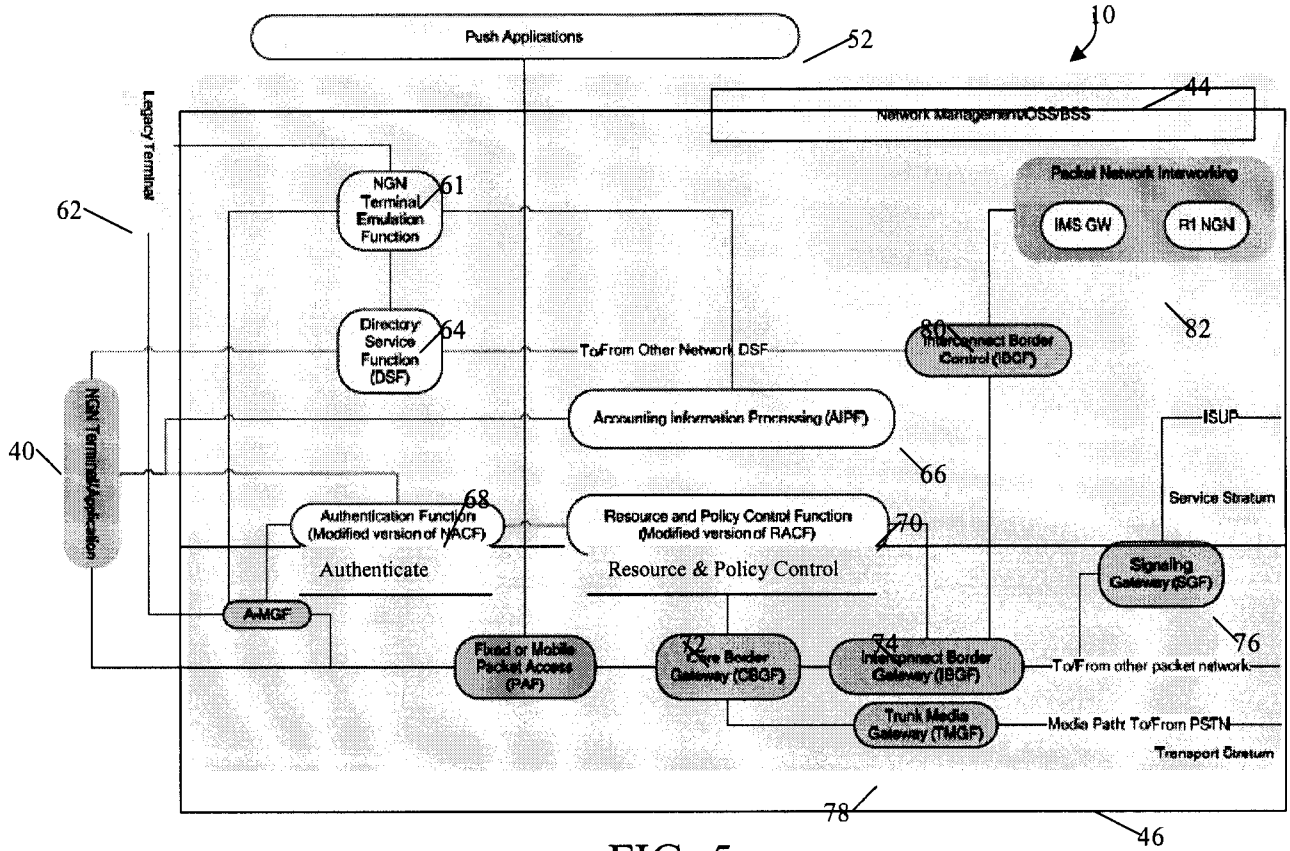


FIG. 5

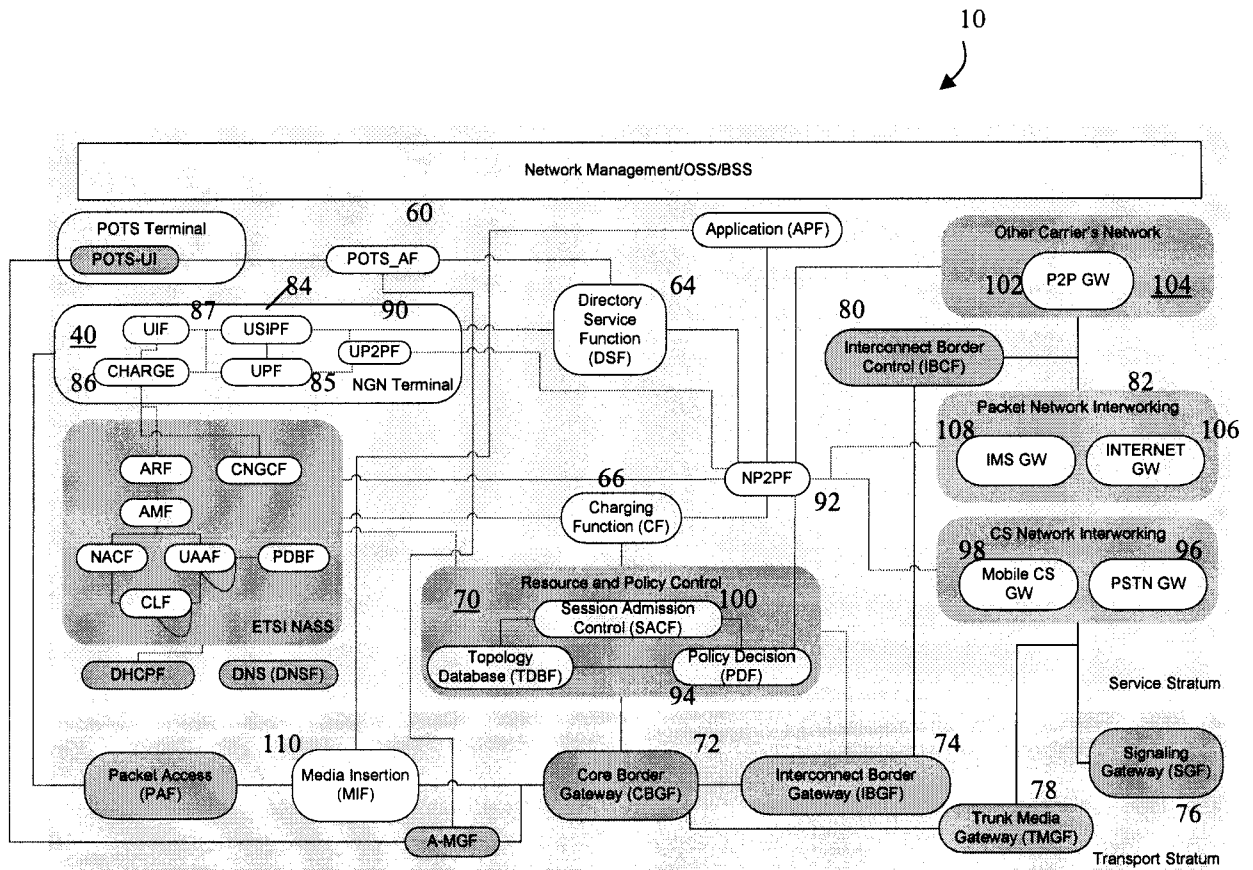


FIG. 6

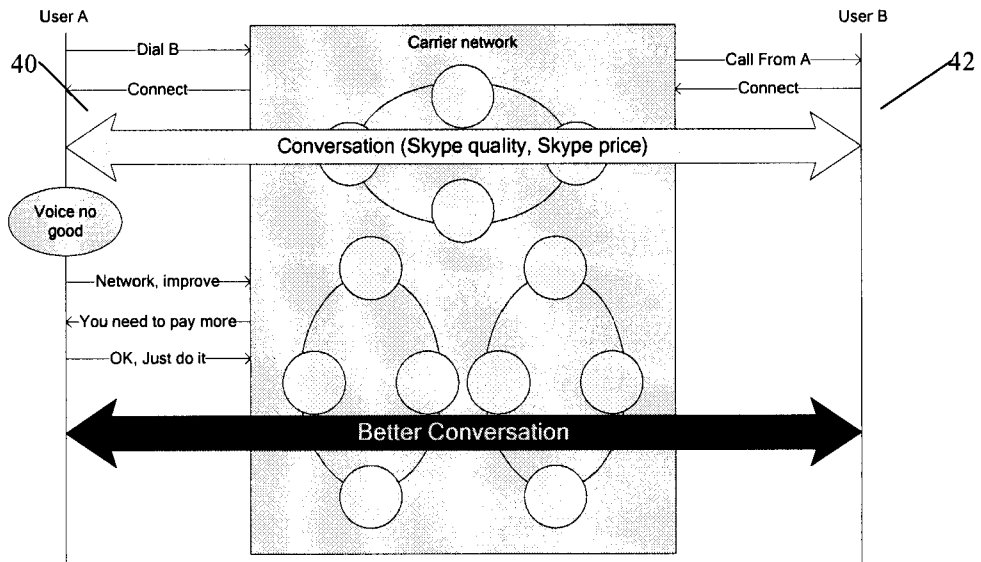


FIG. 7

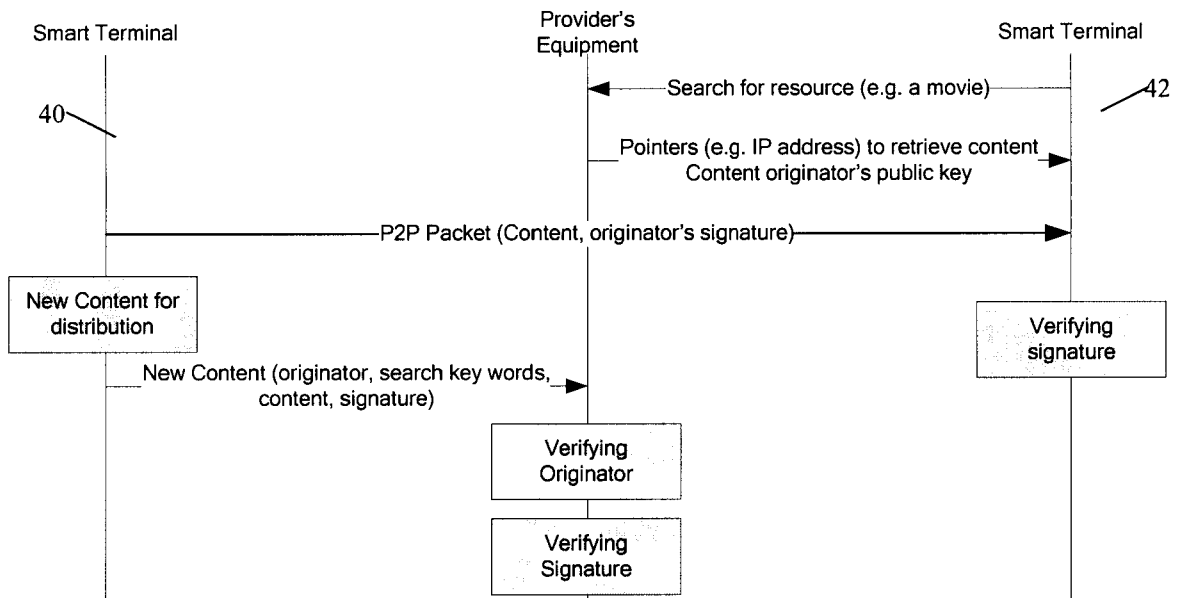


FIG. 8

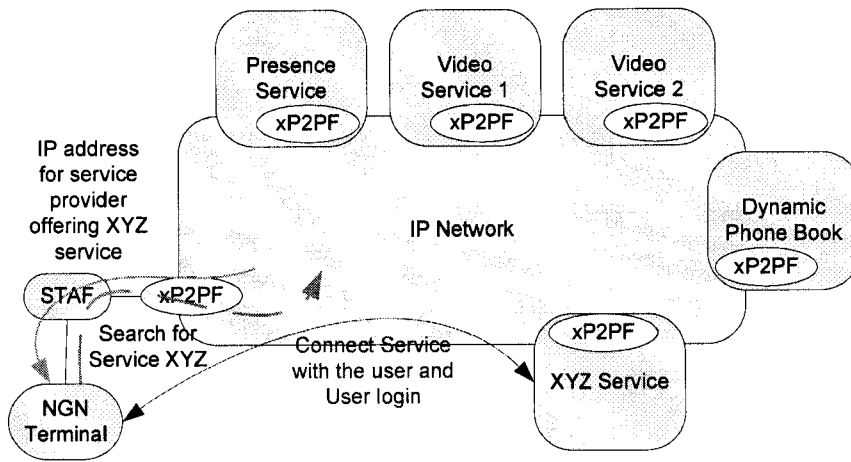


FIG. 9

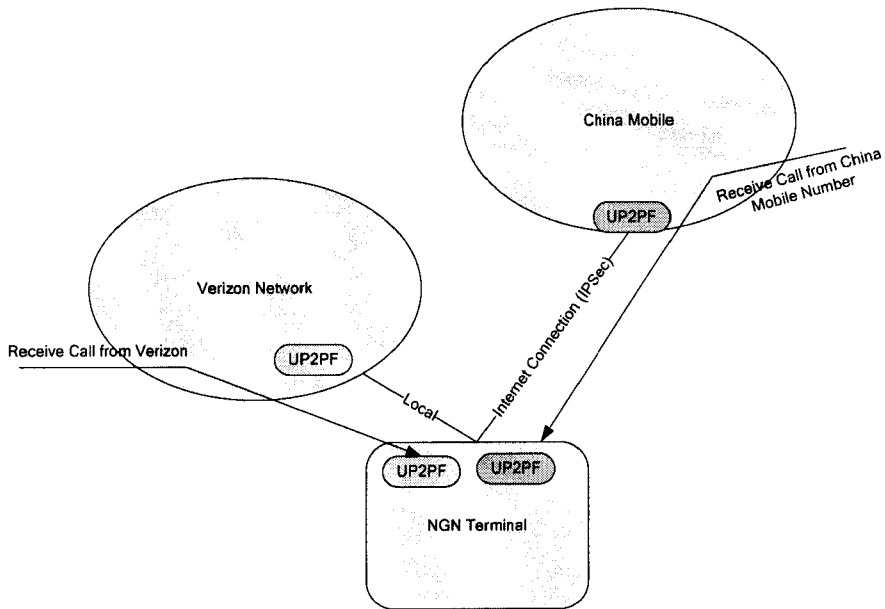


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/059411

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04L29/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	<p>US 2007/064702 A1 (BATES ANTHONY [US] ET AL) 22 March 2007 (2007-03-22)</p> <p>abstract paragraph [0039] - paragraph [0053] paragraph [0062] paragraph [0073] - paragraph [0074] paragraph [0083] paragraph [0113] - paragraph [0116] paragraph [0119] paragraph [0127] figures 1,2</p> <p align="center">----- -/--</p>	<p>1-13 14-20</p>

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

31 July 2008

Date of mailing of the international search report

08/08/2008

Name and mailing address of the ISA/
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Hes, Ronald

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2008/059411

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 718 006 A (HUWAEI TECHNOLOGY CO LTD [CN] HUAWEI TECH CO LTD [CN]) 2 November 2006 (2006-11-02)	14-19
A	paragraph [0002] - paragraph [0005] paragraph [0048] paragraph [0093] - paragraph [0099] claim 13 figures 1-4	1-13,20
X	US 6 728 267 B1 (GIESE PETER ARNOLD [CA] ET AL) 27 April 2004 (2004-04-27)	14-19
A	abstract column 5, line 19 - line 39 column 7, line 60 - column 8, line 56 column 13, line 42 - column 14, line 65 column 17, line 44 - column 18, line 12 figure 4	1-13,20
A	US 2004/064568 A1 (ARORA AKHIL K [US] ET AL) 1 April 2004 (2004-04-01) abstract paragraph [0127] - paragraph [0138] paragraph [0692] - paragraph [0699]	1-20
A	WO 2006/053580 A (NTT DOCOMO INC [JP]; KELLERER WOLFGANG [DE]; TARLANO ANTHONY [DE]; ZOE) 26 May 2006 (2006-05-26) page 2, line 32 - page 3, line 3 page 6, line 1 - line 18 page 25, line 29 - page 26, line 18	20
A	EP 1 505 798 A (TELIASONERA FINLAND OYJ [FI]) 9 February 2005 (2005-02-09) paragraph [0007] - paragraph [0063]	20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2008/059411
--

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007064702	A1	22-03-2007	NONE
EP 1718006	A	02-11-2006	AT 399420 T 15-07-2008 WO 2006026923 A1 16-03-2006 CN 1747467 A 15-03-2006
US 6728267	B1	27-04-2004	NONE
US 2004064568	A1	01-04-2004	NONE
WO 2006053580	A	26-05-2006	EP 1813074 A1 01-08-2007 JP 2008521078 T 19-06-2008
EP 1505798	A	09-02-2005	NONE