



AU9351840

(12) PATENT ABRIDGMENT (11) Document No. AU-B-51840/93
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 666052

(54) Title
FLUID PROBE WASHING APPARATUS AND METHOD

International Patent Classification(s)
(51)⁵ **B08B 009/02**
(51)⁶ **G01N 035/10**

(21) Application No. : **51840/93** (22) Application Date : **22.11.93**

(30) Priority Data

(31) Number (32) Date (33) Country
991785 17.12.92 US UNITED STATES OF AMERICA

(43) Publication Date : **30.06.94**

(44) Publication Date of Accepted Application : **25.01.96**

(71) Applicant(s)
BECKMAN INSTRUMENTS, INC.

(72) Inventor(s)
DUANE G. BARBER; DAVID E. DALKE

(74) Attorney or Agent
SHELSTON WATERS , Level 21, 60 Margaret Street, SYDNEY NSW 2000

(56) Prior Art Documents
US 4817443
US 4516437

(57) Claim

1. A probe washing apparatus, comprising:

a hollow probe having a tip and an exterior surface;

displacement means for moving the probe vertically;

a wash collar, the wash collar including a bore

through the wash collar adapted to receive the probe, the

bore being sized to define a gap between the outside

dimension of the probe and the inside dimension of the

bore;

means for fixing the wash collar laterally and

vertically with respect to the probe, the bore being

coaxially aligned with the probe for vertical

displacement of the probe through the bore;

vacuum means for applying a vacuum to the bore to

draw liquid out of the bore;

bore pumping means for pumping a wash liquid through the wash collar bore and; and

probe pumping means for pumping a wash liquid through the probe and out of the probe tip.

6. A method for using the apparatus of claim 1 including the steps of:

activating the vacuum means to apply a vacuum to the bore;

activating the probe pumping means to pump wash liquid through the probe and out of the probe tip;

deactivating the probe pumping means;

activating the bore pumping means for pumping wash liquid through the wash collar bore and around the exterior surface of the probe tip;

deactivating the bore pumping means; and

deactivating the vacuum means.

14. A probe assembly, comprising:

an arm;

means for displacing the arm laterally;

a hollow probe having a tip;

displacement means for moving the probe vertically;

a wash collar, the wash collar including a bore through the wash collar adapted to receive the probe;

means for fixing the wash collar laterally and vertically with respect to the probe, the bore being

(11) AU-B-51840/93
(10) 666052

- 3 -

coaxially aligned with the probe for vertical displacement of the probe through the bore;

vacuum means for applying a vacuum to the bore to draw liquid out of the bore;

bore pumping means for pumping a wash liquid through the wash collar bore; and

probe pumping means for pumping a wash liquid through the probe and out of the probe tip.

666052

AUSTRALIA

PATENTS ACT 1990

C O M P L E T E S P E C I F I C A T I O N

FOR A STANDARD PATENT

O R I G I N A L

••••• Name of Applicant: BECKMAN INSTRUMENTS, INC.
•••••
••••• Actual Inventor: Duane G. BARBER and David E. DALKE
•••••

••••• Address for Service: SHELSTON WATERS
55 Clarence Street
SYDNEY NSW 2000
•••••

••••• Invention Title: "FLUID PROBE WASHING APPARATUS AND METHOD"
•••••

•••••

The following statement is a full description of this invention,
including the best method of performing it known to us:-

FLUID PROBE WASHING APPARATUS AND METHOD

FIELD

The present invention is related to the field of
5 fluid probe handling devices and systems and more
particularly to apparatus and methods for washing fluid
handling probes. Although not to be limited to this
particular use, the present invention is useful in the
field of automated clinical chemistry analyzers.

10

BACKGROUND

Automated clinical chemistry analyzers are well
known in the art and are generally used for the automated
or semi-automated analysis of patient samples.
Typically, prepared patient samples, such as blood,
15 urine, spinal fluid and the like, are placed onto such an
analyzer in sample containers such as test tubes. The
analyzer pipettes a patient sample and one or more
reagents to a reaction cell or cuvette where a chemical
analysis of the sample is conducted, usually for a
20 particular analyte of interest, and the results of the
analysis are reported.

Automated pipettors are employed on such analyzers to transfer the patient samples and reagents as required for the specified analysis. Such pipettors can include a hollow probe having an open end or tip. The probe is, 5 for example, lowered into a sample container that holds a sample, a predetermined volume of sample is withdrawn from the sample container, and the probe is withdrawn from the sample container. The probe is moved, for example, to a position above a reaction cell, is again 10 lowered, and the sample held in the probe is expelled into the reaction cell. Similar actions may be used to pipette and deliver one or more reagents from reagent containers to the reaction cell, either with the same probe or with one or more reagent delivery probes.

15 To prepare such a probe for a subsequent delivery, the probe is washed to eliminate as much as possible any residue from the prior samples or reagents that were handled by the probe. Probe washing may be accomplished by, for example, lowering the probe tip into a wash cell 20 that contains a wash fluid such as water. The wash fluid washes the exterior of the probe tip, and the interior of the probe may be cleaned by aspirating and discharging the wash fluid or, alternatively, discharging a wash fluid through the probe into the wash cell.

A common problem with probe washing, however, is carryover, that is, the residual fluid or contaminants from a fluid that remain on or in or may be absorbed by the probe despite washing. This residue mixes with
5 subsequent sample or reagents drawn into the probe and can interfere with subsequent analyses.

Another problem with probe washing is the time needed to move the probe to a wash station and accomplish the probe washing. Substantial time can be required to
10 wash the probe. For example, if the probe has delivered a sample to a reaction cell, the probe must be raised, moved to a position over a wash cell, and lowered into the cell for washing. Once washing is done, the probe must again be raised and moved on to the next operation.

15 Still another drawback of prior systems is washing a probe that has been inadvertently inserted into, for example, a sample or reagent to a depth that conventional washing cups and cells can not clean. Probes often include or are provided externally with some form of
20 liquid level detection. This allows the probe to be inserted until the tip touches the surface of the liquid, where liquid contact is sensed. The probe may then be lowered an additional distance sufficient for the volume of liquid to be drawn into the probe or may be lowered as

liquid is drawn into the probe. In either instance, only a relatively short, predetermined portion of the outside of the probe tip is contaminated with the liquid. Thus, the probe tip can be cleaned in a conventional wash cell or cup that is required to clean only a short portion of the probe tip, reducing cleaning time and the volume of washing liquid required.

If the liquid level sensing used to detect the contact of the probe tip with the surface of the liquid should fail, however, the probe will be lowered some predetermined distance that may represent the maximum insertion distance permitted to avoid the probe tip striking the bottom of the liquid reservoir. If the vessel actually is full or substantially full of liquid, the entire length of the submerged probe exterior becomes contaminated with the liquid. This length may well exceed the probe length that can be accommodated by the washing cell or cup, requiring operator intervention to manually clean the probe and return the probe, and the automated analyzer in which the probe is used, to service.



SUMMARY OF THE INVENTION

It is an object of the invention, at least in the preferred embodiment, to overcome or substantially ameliorate at least one of the disadvantages of the prior art.

According to one aspect of the invention there is provided a probe washing apparatus, comprising:

a hollow probe having a tip and an exterior surface;

displacement means for moving the probe vertically;

a wash collar, the wash collar including a bore through the wash collar adapted to receive the probe, the bore being sized to define a gap between the outside dimension of the probe and the inside dimension of the bore;

means for fixing the wash collar laterally and vertically with respect to the probe, the bore being coaxially aligned with the probe for vertical displacement of the probe through the bore;

vacuum means for applying a vacuum to the bore to draw liquid out of the bore;

bore pumping means for pumping a wash liquid through the wash collar bore; and

probe pumping means for pumping a wash liquid through the probe and out of the probe tip.

The bore of the wash collar may further include an upper portion having a first diameter larger than the outside diameter of the probe and a central chamber portion having a diameter larger than the upper portion and including a port in fluid communication with the vacuum means.

A lower portion of the wash collar bore may include a portion having a tapered cross section, tapering from a larger diameter to a smaller diameter and proximate the central chamber portion.

- 5 The bore may further include a reduced portion between the lower portion and the central chamber having a diameter less than the largest diameter of the chamber portion, and selected such that liquid carried by the exterior of the probe wicks to the reduced portion as the
- 10 probe is drawn through the wash collar.

- The lower portion of the wash collar bore may include a port in fluid communication with the bore pumping means. The reduced portion is above the lower portion and the port such that the reduced portion itself
- 15 may be washed by the flow of wash liquid from the bore pumping means upwardly past the reduced portion and into the central chamber and out of the wash collar by way of the vacuum means.

- A method for using the wash collar of the present
- 20 invention includes activating the vacuum means to apply a vacuum to the bore, activating the probe pumping means to pump wash fluid through the probe and out of the probe tip, deactivating the probe pumping means, activating the

bore pumping means for pumping wash fluid through the wash collar bore and around the exterior of the probe tip, deactivating the bore pumping means, and deactivating the vacuum means. Preferably, the steps are performed sequentially.

The method may further include an initial step of positioning the probe tip within the wash collar bore.

The step of deactivating the probe pumping means may occur before the step of activating the bore pumping means. The step of deactivating the probe pumping means may occur after the step of activating the bore pumping means. The steps of activating and deactivating the probe pumping means may be timed to create a flow of wash fluid through the probe tip for between about one and two seconds. The steps of activating and deactivating the bore pumping means may be timed to create a flow of wash fluid around the outside of the probe tip for less than about one second.

Advantageously, the probe and probe wash collar are preferably carried together and the coaxial alignment between the two is maintained by way of, for example, an arm or other suitable support, with the arm including means for displacing the arm and the probe and probe wash

collar laterally. The lateral displacement may be about
a central pivot point or may be linearally moveable or a
combination of pivotable and linearally moveable. Thus,
washing of the probe may be accomplished as the probe
5 moves from one station to another, decreasing wash time
and increasing system throughput.

Further, the wash collar and associated vacuum and
pump means may be activated as the probe is drawn up into
the wash collar, enabling the entire active length of the
10 probe, that is, the entire external length of the probe
that may be exposed to contaminating liquids, to be
cleaned as the probe is withdrawn.

Thus, the apparatus and method of the present
invention reduces carryover by thoroughly washing the
15 exterior and interior of the probe, decreases wash time
my providing the probe washing "on the fly" as the probe
moves from operation station to operation station, and
cleans the entire active length of the probe exterior to
overcome inadvertent contamination of the external
20 surface of the probe if a liquid level sensing or related
control apparatus should fail.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other advantages of the present invention will be apparent from the following drawings in which:

Figure 1 is a simplified perspective view of the apparatus of the present invention;

Figure 2 is a cross section view of the wash collar included in the apparatus of Figure 1; and

Figure 3 is a schematic diagram of the apparatus of the present invention as connected to a fluid system and control system.

DETAILED DESCRIPTION

With reference to Figure 1, a probe washing apparatus 10 in accordance with the present invention and that is adapted to perform the method of the present invention includes base plate 11 and a pivotable arm 12, the pivotable arm 12 supporting a probe assembly 14 and a wash collar 16. The base plate 11 includes suitable mounting holes 18 and a rotatable shaft 20 that may be rotated by means of a pulley 22. The pulley 22 may in turn be driven through a drive belt (not shown) by a motor (not shown).

The arm 12 is removably fixed at a first or pivot end of the arm 12 to the shaft 20 and carries the probe assembly 14 at a second or outer end of the arm 12. The arm 12 includes bottom and top horizontal members 24, 26, respectively, and first and second vertical members 28, 30, respectively.

The probe assembly 14 is disposed at the outer end of the arm 12. The probe assembly 14 includes a hollow, fluid-carrying probe 36 that is fixed at its upper end to a moveable block 38. The block is in turn threaded to a threaded vertical shaft 40 and a guide bar 42 on the opposite side of the shaft 40 from the probe 36. The threaded shaft 40 is journaled at its upper and lower ends for rotation and is fixed to a pulley 44 above the top horizontal member 26. The threaded shaft 40 may be rotated by means of a motor 46 disposed at the pivot end of the arm 12, the motor operatively connected by means of a pulley 48 and a flexible belt 50 to the pulley 44.

The wash collar 16 is fixed to the bottom horizontal member 24 at the outer end of the arm 12 and is aligned with and receives the probe 36. The probe 36 passes freely through the wash collar 16. A lower open tip 56 of the probe may be aligned (as is described below with respect to the operation of the apparatus 10 and the

method of the present invention), for example above a
test tube 58 that may contain a sample 59 to be tested, a
reagent container 60 from which reagent 61 may be
withdrawn, and a reaction cuvette 62 into which sample 59
5 and reagent 61 may be expelled for reaction and
measurement. The test tube 58, reagent container 60 and
reaction cuvette 62 may all be of conventional design and
may be on, for example, wheels, belts, or may be
stationary, depending on the particular design of an
10 analyzer in which the apparatus 10 of the present
invention may be used.

With reference to Figure 2, the wash collar 16 is
illustrated with the probe 36 in a retracted or "up"
position. The wash collar 16 includes a body 70 formed
15 from, for example, PEEK (polyether-ether-ketone). A bore
72 is formed vertically through the wash collar 16, the
bore including an upper portion 74, a washing or central
chamber 76, a restricted or reduced portion 78, a tapered
portion 80, and a lower portion 82, respectively, top to
20 bottom, as seem in Figure 2. The upper portion 74 has
cylindrical side walls and has an inside diameter
slightly larger than the outer diameter of the probe 36.
The central chamber 76 is enlarged with respect to the
upper portion 74. The central chamber 76 includes upper
25 and lower tapered walls 77A and 77B, respectively. A

port 84 is formed into the side wall of the chamber 76 between the upper and lower tapered walls 77A and 77B and is connected by a suitable fitting 86 to a length of tubing 88 which is in turn connected to a controllable
5 vacuum source as described with reference to Figure 3 below.

Immediately below the chamber 76 is the reduced portion 78 which has the same diameter as the upper portion 74. The tapered portion 80 tapers outwardly from
10 the diameter of the reduced portion 78 to the lower portion 82, the lower portion having a diameter approximately the same or slightly less than the diameter of the chamber 76. A wash liquid port 90 is formed through the wall of the wash collar 16, intersecting the
15 bore 72 immediately above (as seen with respect to Figure 2) the intersection of the tapered portion 80 and lower portion 82. The port 90 is connected by a fitting 92 to a length of tubing 94 which is in turn connected to a source of wash liquid as described with reference to
20 Figure 3 below.

The upper portion 74, central chamber 76, reduced portion 78, tapered portion 80 and lower portion 82 are all coaxial and all but the tapered portion have cylindrical side walls. The bore 72 throughout its

length is sized to freely receive the probe 36 and provide annular spaces or gaps between the portions of the bore 72 and the exterior surface of the probe 36 that may be received within the bore 72. The bore 72 and
5 ports 84, 90 may be formed by, for example, drilling. An insert 96 may be fixed within the body 70 to define the upper portion 74 and the upper tapered wall 77A of the central chamber 76.

As seen with reference to Figure 2, the probe 36
10 includes an outer shell 100 and an inner fluid carrying conduit 102. The shell 100 and conduit 102 and both preferably metal and are separated by an insulating compound (not shown). The outer shell 100 and inner fluid carrying conduit 102 are electrically connected to
15 a liquid level detection device (not shown) which may detect the contact of the probe tip 56 with the surface of a liquid by sensing, for example, increased conductivity between the shell 100 and conduit 102. Such a liquid level detection device may be of conventional
20 design and is well known in the art.

The apparatus of the present invention may be integrated into and controlled by the fluid and control system of Figure 3. The inner liquid carrying conduit 102 of the probe 36 is connected via tubing 110 to an

automated syringe 112 and a solenoid controlled valve 114. Preferably, the tubing 110 is formed into a coil 115 proximate the top of the probe 36, the coil providing turbulence as liquid flows through the probe 36 to thus
5 generate a mixing action in such liquid flow. The automated syringe 112 is conventional in design and includes a piston 116 operable in a chamber 118, the piston 116 being connected to and operated by a motor 120. The valve 114 controls the flow of a wash liquid
10 from a pressurized wash liquid reservoir 124. The tubing 94 from the wash liquid port 90 in the wash collar 16 is connected to a solenoid controlled valve 122 which controls the flow of a wash liquid from the reservoir 124. The reservoir may be pressurized by way of a
15 regulated air pump 125. The tubing 88 connected to the vacuum port 84 in the wash collar 16 is connected via a solenoid controlled valve 126 to a waste reservoir 128 to which is applied a regulated vacuum from a vacuum pump 130.

20 As described above with respect to Figure 1, the motor 46 is actuated to displace the probe 36 vertically, either up or down, and a motor 132 pivots the arm 12 via the shaft 20. The valve 114, motor 120, valve 122, valve 126, motor 46 and motor 132 are all controlled by a
25 controller 134 which may be of conventional design and

which is programmed to control the operation of the system in accordance with the method of the present invention. The outer shell 100 and inner fluid carrying conduit 102 are electrically connected to the controller
5 which includes level sensing circuitry such as that described above.

In operation, the initial condition of the apparatus
10 is with the probe 36 in the retracted or up position as shown in Figure 2. In such a position, a probe tip length 104 is within the central chamber 76. The initial condition of the apparatus also preferably includes the arm 12 positioned with the probe aligned vertically over, for example, the test tube 58 which contains a volume of liquid sample 59. The motor 46 is operated to lower the
15 probe 36 toward the sample 59. When the tip 56 of the probe 36 contacts the surface of the sample 59 and the level sensing circuitry within the controller 134 senses the surface of the sample 59, the motor 46 is turned off and motor 120 is energized to draw sample 59 into the
20 probe 36 through the tip 56. The probe 36 is inserted into the sample 59 a distance that is less than the length 104 of the probe 36 within the central chamber 76 when the probe 36 is in its retracted or up position. This can be accomplished, for example, if the volume of
25 sample drawn into the probe 36 lowers the sample level

within the test tube 58 less than such distance.
Alternatively, if more sample is required, the motor 46
may be controlled to lower the probe 36 slightly as the
sample is aspirated into the probe 36, essentially
5 following the level of the sample 59 down.

When a predetermined volume of sample has been
aspirated, the motor 120 is turned off and motor 46 is
operated to raise the probe 36 to the up or retracted
position with the tip 56 positioned as shown in Figure 2
10 within the wash collar 16. The motor 132 is activated to
reposition the arm 12 and probe 36 with the probe 36
aligned, for example, above the cuvette 62. The motor 132
is turned off and motor 46 is controlled to lower the
probe 36 to a position with the tip 56 above the cuvette
15 62, and the motor 120 is controlled to expel the sample
within the probe 36 into the cuvette 62. When the sample
has been expelled, the motor 120 is turned off and the
motor 46 is controlled to raise the probe 36 into its
retracted position. The motor 132 is again controlled to
20 pivot the arm 12 toward, for example, the reagent
container 60.

As the arm 12 is moving toward the reagent
container, the probe is washed within the wash collar.
More particularly, the vacuum valve 126 is energized to

draw air into the wash collar 16 through the lower portion 82 and, to a substantially lesser extent, through the small annular space between the probe 36 and the upper portion 74. The valve 114 is energized to flow
5 pressurized wash liquid through the probe 36 and discharge the wash liquid through the probe tip 56, washing the inside of the probe 36 and swirling the expelled wash liquid about the exterior of the probe tip 56 and the length 104 of the probe 36 within the central
10 chamber 76. The wash liquid is drawn out of the central chamber by the air flow created by the vacuum applied to the vacuum port 84.

After a length of time of between about one and two seconds, and preferably about 1.4 seconds in the
15 embodiment disclosed herein, the valve 114 is closed and the external wash fluid valve 122 is opened to flow wash liquid into the tapered portion 80. This wash liquid is drawn upwardly through the tapered portion 80, past the reduced portion 78 and into the central chamber, drawing
20 the wash liquid and around the tip of the probe 36 and the length 104 of the probe 36 within the central chamber 76, washing the exterior of the probe of any contaminants remaining after the internal wash is completed.

The valve 122 is held open to supply wash liquid through the wash liquid port 90 for about one second, and preferably in the embodiment disclosed herein, for about 0.6 second. The vacuum valve 126 is closed about one to
5 two seconds after the last wash liquid is flowed into the central chamber 76, and preferably in the disclosed embodiment, about 1.5 seconds.

The internal probe wash and external probe wash accomplished by the opening and closing of valves 114 and
10 122 may also be accomplished such that an overlap of the washing liquid flow times occurs. Thus, instead of the valve 114 closing before the valve 122 is opened, the valve 122 may first be opened to initiate the flow of external wash liquid and then the internal wash liquid
15 valve 114 may then be closed. In either case, that is, where there is no overlap in time of the internal wash flow from valve 114 and then from valve 122, or where there is such an overlap in time, the external wash valve 122 preferably closes last, allowing external wash liquid
20 to flow around the outside length 104 of the probe 36 within the central chamber 76 to thus finish the external cleaning of the probe 36.

It is to be understood that this probe cleaning cycle may be performed while the arm 12 is moving from a

position over the cuvette 62 to a position with the probe
36 over the reagent container 60, thus allowing for probe
cleaning "on the fly" rather than interrupting the arm 12
movement to wash the probe 36 at a separate wash station
5 as would otherwise be required in a prior art system.
The wash sequence in the embodiment disclosed herein
lasts approximately 2.3 seconds overall.

The probe washing cycle just described may also be
performed before the probe 36 is used, for example, to
10 pick up sample 59 or reagent 61, if the probe 36 has been
idle for more than about fifteen seconds. Such a
cleaning allows liquid carried within the probe that may
leach contaminants out or off of the internal surface of
the fluid carrying conduit 102 to be washed out of the
15 probe 36, further reducing carryover and contamination
between uses of the probe 36.

Another aspect of the method of the present
invention is a washing cycle that may be conducted to
clean the probe 36 if the liquid level sensing fails. In
20 such an instance, the probe may be inserted into sample
or reagent to a depth that exceeds the length 104 of the
probe that is within the central chamber 76 during the
normal cleaning cycle described above.

For example, the liquid level sensing may fail when the probe 36 is lowered into the reagent container 60. With no reagent 61 level feedback to the controller 134, the probe 36 is inserted into the reagent container 60 to a predetermined distance, for example, representing the maximum insertion depth allowed without running the probe tip 56 into the bottom of the reagent container 60. However, this allows the probe 36 to be coated, or potentially coated, a distance up the exterior of the probe greater than normal cycle cleaning length 104.

If the controller 134 detects such a condition, that is, no liquid level is detected before the probe 36 is fully inserted into the reagent container 60, the controller conducts a level sense failure (i.e., extended probe exterior length) cleaning procedure. In such a procedure, the vacuum valve 126 is opened and the external wash valve 122 is opened, flowing wash liquid into the collar 16 and around the exterior of the probe 36 as the probe 36 extends through the wash collar 16 as shown by the phantom lines 140 of the probe exterior in Figure 2. The motor 46 is controlled to raise the probe up at, for example, about one inch per second, washing the probe 36 exterior as it is raised to the retracted position with the tip 56 within the central chamber 76. The internal wash valve 114 is energized to turn on the

wash liquid through the interior of the probe 36. The internal wash lasts less than a second in the embodiment disclosed herein and more particularly may last about 0.5 second, the interior wash valve 114 is closing to end the internal wash after the internal wash time interval. The exterior wash valve 122 is closed less than one second later (in the preferred embodiment disclosed here, about 0.4 second later) and the vacuum valve 126 is closed less than two seconds after the external wash valve 122 closes. In the embodiment disclosed herein, the delay to the closing of the vacuum valve 126 is about 1.5 seconds.

In accordance with one aspect of the method of operation of the present invention, the probe may be washed after aspiration of a liquid, such as the sample 59 or reagent 61, but before the liquid is delivered via the probe 36 to, for example, the reaction cuvette 62. If a predetermined volume of sample 59 is drawn into the probe 36 as described above, the probe 36 is raised to the retracted position with the probe tip length 104 within the central chamber 76. The motor 120 is operated to withdraw the aspirated sample into the probe 36, leaving an air slug between the end of the aspirated sample within the probe 36 and the open end 56. The vacuum valve 126 is opened and then the external wash valve 122 is opened, providing an external wash of the

probe tip length 104. The external wash valve 122 is closed and the vacuum valve 126 is closed, preferably in that order, to end the external probe tip wash, and the probe 36 is then ready to dispense the aspirated sample.

5 The present invention provides significant flexibility to the designers of analytical instruments in that the probe tip can be washed any time the probe tip length 104 is within the central chamber 76. The probe tip washing can occur as the arm 12 is moving to position
10 the probe 36 for use rather than moving the probe 36 to a specific wash station location as is conventional in the prior art.

 It is to be appreciated that although the embodiment disclosed includes arm 12 that swings the probe 36 in an
15 arc above, for example, the reaction cuvette 62, test tube 58 and reagent container 60, the probe 36 and wash collar 16 may be carried by other forms of displacement mechanisms, such as those that carry the probe 36 and wash collar 16 along a linear, curvilinear or other
20 straight or curved paths.

 The present invention is not to be limited to the particular embodiment disclosed herein but is to be defined and interpreted only according to the full scope

- 23 -

of the appended claims hereto and all equivalents
thereof.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A probe washing apparatus, comprising:
 - a hollow probe having a tip and an exterior surface;
 - displacement means for moving the probe vertically;
 - 5 a wash collar, the wash collar including a bore through the wash collar adapted to receive the probe, the bore being sized to define a gap between the outside dimension of the probe and the inside dimension of the bore;
 - 10 means for fixing the wash collar laterally and vertically with respect to the probe, the bore being coaxially aligned with the probe for vertical displacement of the probe through the bore;
 - vacuum means for applying a vacuum to the bore to
 - 15 draw liquid out of the bore;
 - bore pumping means for pumping a wash liquid through the wash collar bore and; and
 - probe pumping means for pumping a wash liquid through the probe and out of the probe tip.
- 20 2. An apparatus as in claim 1 wherein the wash collar bore includes an upper portion having a first diameter larger than the outside diameter of the probe and a central chamber portion having a diameter larger than the

upper portion and including an port in fluid communication with the vacuum means.

3. An apparatus as in claim 2 wherein the wash collar bore further includes a lower portion having a cross
5 section tapering from a larger diameter to a smaller diameter proximate the central chamber portion, the bore further including a reduced portion between the lower portion and the central chamber having a diameter less than the largest diameter of the chamber portion.

10 4. An apparatus as in claim 3 wherein the diameter of the reduced portion is sized to wick liquid from the exterior surface of the probe.

5. An apparatus as in claim 2 wherein the lower portion
15 includes an port in fluid communication with the bore pumping means.

6. A method for using the apparatus of claim 1 including the steps of:

activating the vacuum means to apply a vacuum to the bore;

20 activating the probe pumping means to pump wash liquid through the probe and out of the probe tip;
deactivating the probe pumping means;

activating the bore pumping means for pumping wash liquid through the wash collar bore and around the exterior surface of the probe tip;

deactivating the bore pumping means; and

5 deactivating the vacuum means.

7. A method as in claim 6 wherein the method includes the initial step of positioning the probe tip within the wash collar bore.

8. A method as in claim 6 wherein the step of
10 deactivating the probe pumping means occurs before the step of activating the bore pumping means.

9. A method as in claim 6 wherein the step of deactivating the probe pumping means occurs after the step of activating the bore pumping means.

10. A method as in claim 6 wherein the steps of
15 activating and deactivating the probe pumping means are timed to create a flow of wash liquid through the probe tip for between about one and two seconds.

11. A method as in claim 6 wherein the steps of
20 activating and deactivating the bore pumping means are

timed to create a flow of wash liquid around the exterior surface of the probe tip for less than about one second.

12. A method as in claim 11 wherein the step of deactivating the vacuum means includes deactivating the vacuum means after the bore pumping means has been
5 deactivated for at least one second.

13. A method as in claim 12 wherein the step of deactivating the vacuum means includes deactivating the vacuum means after the bore pumping means has been
10 deactivated for more than one second and less than two seconds.

14. A probe assembly, comprising:
an arm;
means for displacing the arm laterally;
15 a hollow probe having a tip;
displacement means for moving the probe vertically;
a wash collar, the wash collar including a bore through the wash collar adapted to receive the probe;
means for fixing the wash collar laterally and
20 vertically with respect to the probe, the bore being coaxially aligned with the probe for vertical displacement of the probe through the bore;

vacuum means for applying a vacuum to the bore to draw liquid out of the bore;

bore pumping means for pumping a wash liquid through the wash collar bore; and

5 probe pumping means for pumping a wash liquid through the probe and out of the probe tip.

15. An apparatus as in claim 12 wherein the bore is sized to define a gap between the outside dimension of the probe and the inside dimension of the bore.

10 16. An apparatus as in claim 15 wherein the wash collar bore includes an upper portion having a first diameter larger than the outside diameter of the probe and a central chamber portion having a diameter larger than the upper portion and including an port in liquid

15 communication with the vacuum means.

17. A method of washing the probe of claim 1 when the probe is displaced vertically downwardly, including the steps of:

activating the vacuum means to apply a vacuum to the
20 bore;

activating the bore pumping means for pumping wash liquid through the wash collar bore and around the exterior of the probe;

raising the probe until and tip of the probe is
disposed within the bore;

activating the probe pumping means to pump wash
liquid through the probe and out of the probe tip;

5 deactivating the probe pumping means;
 deactivating the bore pumping means; and
 deactivating the vacuum means.

18. A method as in claim 17 wherein the step of raising
the probe includes raising the probe at about one inch
10 per second.

19. A method as in claim 17 wherein the step of
deactivating the bore pumping means includes deactivating
the bore pumping means not more than one second after
deactivating the probe pumping means.

15 20. A method as in claim 19 wherein the step of
deactivating the vacuum means includes deactivating the
vacuum means between one and two seconds after
deactivating the bore pumping means.

21. A method as in claim 17 wherein the steps are
20 performed sequentially.

22. An apparatus as in claim 2 wherein the bore pumping means includes pipettor means for aspirating and discharging liquid into and from the probe.

23. A method for using the apparatus of claim 22

5 including the steps of:

activating the pipettor means to aspirate a liquid into the probe;

retracting the probe such that the probe tip is within the central chamber;

10 activating the pipettor means to aspirate the liquid into the probe to leave an air slug between the open tip of the probe and aspirated liquid;

activating the vacuum means to apply a vacuum to the bore;

15 activating the bore pumping means for pumping wash liquid through the wash collar bore and around the exterior of the probe tip;

deactivating the bore pumping means; and

deactivating the vacuum means.

20 24. A probe washing apparatus including:

a hollow probe having a tip;

displacement means for moving the probe vertically;

a wash collar, the wash collar including a bore through the wash collar adapted to receive the probe, the

bore being sized to define a gap between the outside dimension of the probe and the inside dimension of the bore, the wash collar bore including an upper portion having a first diameter larger than the outside diameter of the probe and a central chamber portion having a diameter larger than the upper portion and including an orifice;

means for fixing the wash collar laterally and vertically with respect to the probe, the bore being coaxially aligned with the probe for vertical displacement of the probe through the bore;

vacuum means for applying a vacuum to the central chamber orifice to draw liquid out of the bore;

bore pumping means for pumping a wash liquid through the wash collar bore;

probe pumping means for pumping a wash liquid through the probe and out of the probe tip; and

controller means for controlling the apparatus according to the following steps and wherein the steps

are preformed sequentially:

(a) positioning the probe tip within the central chamber;

(b) activating the vacuum means to apply a vacuum to the bore;

(c) activating the probe pumping means to pump wash liquid through the probe and out of the probe tip;

- (d) deactivating the probe pumping means;
- (e) activating the bore pumping means for pumping wash liquid through the wash collar bore and around the exterior of the probe tip;
- 5 (f) deactivating the bore pumping means; and
- (g) deactivating the vacuum means.

25. An apparatus as in claim 24 wherein the apparatus further includes means for laterally displacing the fixing means, wash collar and probe.

- 10 26. An apparatus as in claim 25 wherein the fixing means includes a pivotable arm and the means for laterally displacing includes means for pivoting the arm.

27. A probe washing apparatus substantially as herein described with reference to any one of the accompanying
15 drawings.

28. A probe assembly substantially as herein described with reference to any one of the accompanying drawings.

DATED this 22nd Day of November, 1993

BECKMAN INSTRUMENTS, INC.

Attorney: LEON K. ALLEN
Fellow Institute of Patent Attorneys of Australia
of SHELSTON WAITTS

ABSTRACT

A probe washing apparatus (10) including a probe (36) having a tip (56) and a wash collar (16) having a bore (72) coaxially aligned with the probe (36), the wash collar (16) including ports (84) for applying a vacuum and a wash liquid to the wash collar bore (72.) The probe (36) may be displaced vertically with respect to the wash collar (16) to aspirate and dispense liquids, and the wash collar (16) and probe (36) are displaced together laterally. The steps of washing the probe tip (56) include raising the probe (36) to a position with the probe tip (56) within the bore (72), applying vacuum to the bore (72), flushing the interior of the probe (36), and flushing the exterior of the probe (36).

51840/93

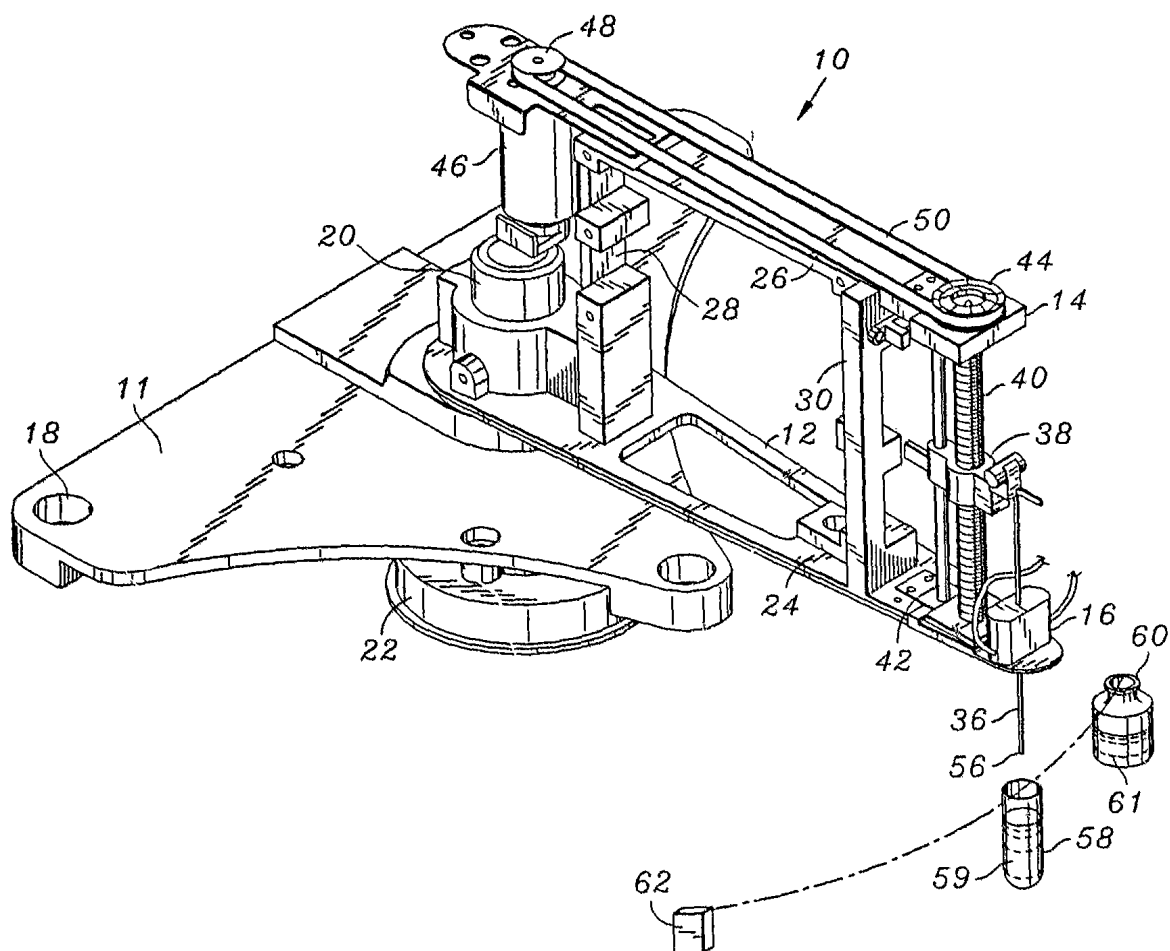
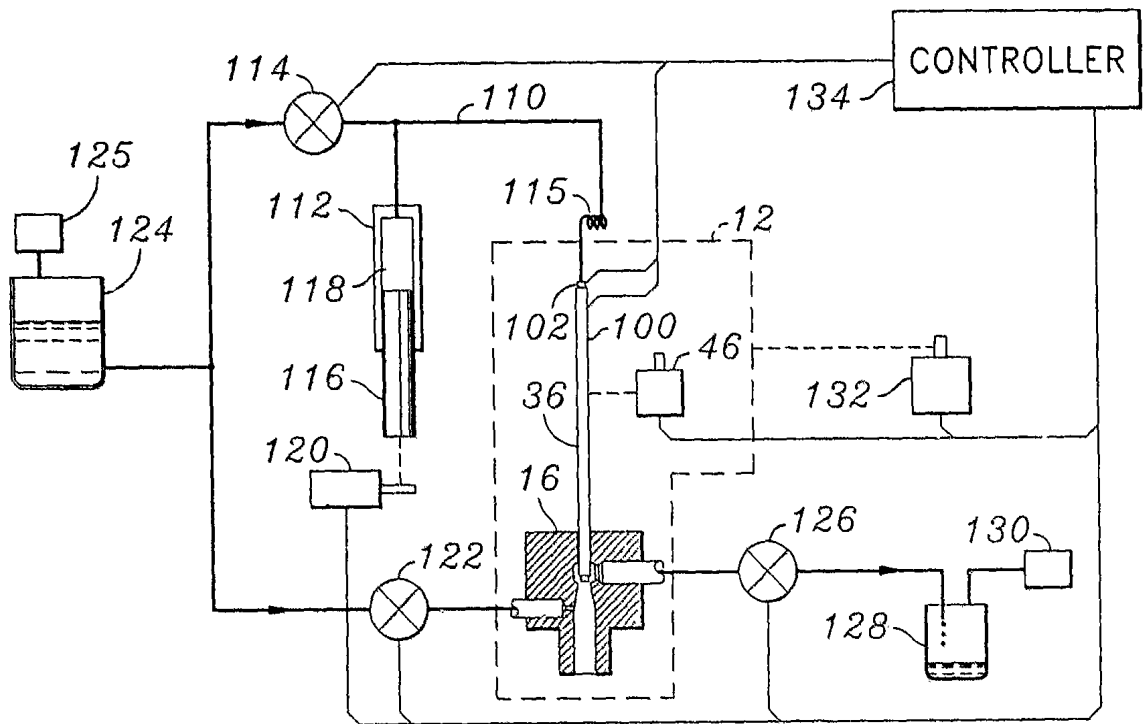


FIG. 1



*FIG. 3*