



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 217 184 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
26.06.2002 Bulletin 2002/26

(51) Int Cl.7: **F01N 1/24**

(21) Application number: **00127435.6**

(22) Date of filing: **14.12.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Nakagawa, Yukihiro**
Kasugai-shi (JP)

(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing.
Tiedtke-Bühling-Kinne & Partner GbR,
TBK-Patent,
Bavariaring 4
80336 München (DE)


(71) Applicants:
• **Nakagawa Sangyo Co., Ltd.**
Nishikasugai-gun, Aichi-ken (JP)
• **TOYOTA JIDOSHA KABUSHIKI KAISHA**
Aichi-ken 471-8571 (JP)

(54) **Sound absorbing material, muffler using the sound absorbing material, and method for forming sound absorbing layer thereof**

(57) In order to provide a sound absorbing material superior in acid resistance, alkali resistance and sound absorbing quality and a sound absorbing layer using this sound absorbing material, multiple pieces of basalt yarn (1a) obtained by dissolving basalt to be continuous fib-

ers are bundled by a fiber bundling agent to acquire a bundled material (1), and the bundled material (1) is fibrillated to obtain a bulky sound absorbing material (2). Moreover, the sound absorbing material (2) is arranged on the outer periphery of a perforated pipe (4) constituting a muffler to form a sound absorbing layer (6).

FIG. 1G

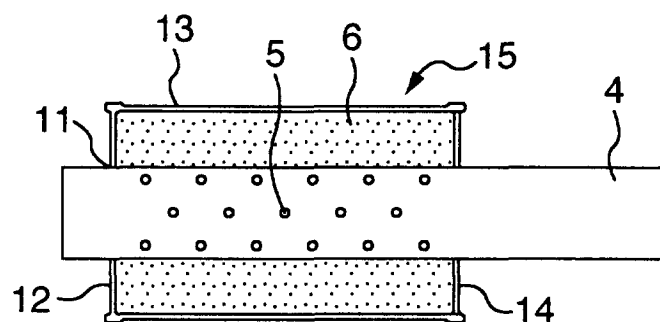

EP 1 217 184 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a sound absorbing material used for a muffler of an internal combustion engine, a muffler using this sound absorbing material, and a method for forming a sound absorbing layer of the muffler.

RELATED ART

[0002] A muffler aiming at sound reduction of exhaust gas is arranged in an exhaust system of an internal combustion engine of an automobile.

[0003] A muffler uses a sound absorbing material for preventing high frequency sound, and that sound absorbing material is mainly made of glass fiber.

[0004] As to arrangement of the muffler, a sub muffler and a pre muffler are arranged on the downstream side of an exhaust emission purifier using a catalyst, and a main muffler is arranged on the downstream side. Such a sub muffler and a pre muffler may be positioned at a short distance from the exhaust emission purifier, and, in such a case, a high temperature of the exhaust gas or large pulsation may influence on the sub muffler or the pre muffler.

[0005] In the related art, therefore, it is general that stainless wool is wound around a porous exhaust tube of the sub muffler or the pre muffler and a sound absorbing material such as glass fiber is wound around the outer periphery thereof or internally filled.

[0006] Although the glass fiber used as a sound absorbing material accomplishes the quality which can withstand use in various temperature ranges, the resistance property with respect to acid things or alkaline things included in the exhaust gas is insufficient. The glass fiber may be, therefore, degraded/broken and emitted into the air together with the exhaust gas.

SUMMARY OF THE INVENTION

[0007] In view of the above-described problems, an object of the present invention is to provide a sound absorbing material which is superior in acid resistance, alkali resistance and sound absorbing qualities, a muffler using this sound absorbing material, and a method for forming a sound absorbing layer of the muffler.

[0008] To achieve this aim, a first aspect according to the present invention provides a sound absorbing material, wherein multiple pieces of basalt yarn obtained by dissolving basalt to be tuned into continuous fibers are bundled to be a bundled material by using a fiber bundling agent and the bundled material is fibrillated to be bulky.

[0009] A second aspect according to the present invention provides a muffler, wherein multiple pieces of basalt yarn obtained by dissolving basalt to be continuous

fibers are bundled as a bundled material by using a fiber bundling agent, and a sound absorbing material obtained by fibrillating the bundled material to be bulky is provided on the outer peripheral portion of a perforated pipe.

[0010] A third aspect according to the present invention relates to a method for forming a sound absorbing layer using the above-described sound absorbing material, comprising the steps of: bundling multiple pieces of basalt yarn obtained by dissolving basalt to be continuous fibers as a bundled material by using a fiber bundling agent; forming a bulky sound absorbing material by fibrillating this bundled material; and forming a sound absorbing layer by arranging the sound absorbing material on the outer peripheral portion of a perforated pipe which constitutes the muffler.

[0011] Further, with respect to the third aspect, in the step for forming the fibrillated sound absorbing material, the bundled material may be supplied in a nozzle, compressed air may be blown into the nozzle and the bundled material may be unraveled by this compressed air to continuously form the fibrillated sound absorbing material by using the nozzle.

[0012] Furthermore, with respect to the present invention, in the step for arranging the fibrillated sound absorbing material on the outer peripheral portion of the perforated pipe, the sound absorbing material may be supplied on the outer periphery of the perforated pipe while rotating the perforated pipe around its axis so that the sound absorbing material is wound around the perforated pipe.

[0013] Moreover, with respect to the present invention, when supplying the fibrillated sound absorbing material on the outer peripheral portion of the perforated pipe, the sound absorbing material may be supplied to the perforated pipe while giving tension to the sound absorbing material by a tension roller.

[0014] A fourth aspect according to the present invention provides a method for forming a sound absorbing layer, comprising the steps of: bundling multiple pieces of basalt yarn obtained by dissolving basalt to be continuous fibers as a bundled material by a fiber bundling agent; forming a bulky sound absorbing material by fibrillating the bundled material; and forming a sound absorbing layer by inserting and filling the sound absorbing material into a space between an outer pipe and a perforated pipe constituting a muffler.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015]

Figs. 1A to 1G are views showing an embodiment of a sound absorbing material and a method for forming the sound absorbing material according to the present invention, each of which illustrates each process;

Fig. 2 is a view showing a method for making a bun-

dled material into a bulky fiber bundle in the embodiment in Figs. 1A to 1G;

Fig. 3 is a view showing an example of the process for supplying a sound absorbing material in a sound absorbing material forming process into a perforated pipe according to the present invention;

Fig. 4 is a view showing an example of another forming method in a sound absorbing layer forming method according to the present invention; and

Fig. 5 is a cross-sectional view showing another example of the sound absorbing layer according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0016] With respect to a sound absorbing material according to the present invention, basalt which is a natural mineral substance is dissolved to be continuous fibrous basalt yarn, and a fiber bundling agent is added to a bundle of multiple pieces of the basalt yarn 1a to obtain a long bundled material 1 as shown in Fig. 1A, and the bundled material 1 is bulked to obtain a fiber bundle type sound absorbing material 2 as shown in Fig. 1B.

[0017] Although a fiber diameter of one piece of the continuous fiber basalt yarn 1a can be set to any desired value, the diameter of 9 μ to 24 μ is ideal. Further, although a number of pieces of the basalt yarn 1a used in the bundled material 1 can be set to any desired value, 1000 to 4000 pieces are used for example.

[0018] In addition, as a method for making the bundled material 1 into the bulky fiber bundle, for example, the bundled material 1 is supplied into a nozzle 31 by a feed roller 32 and a pinch roller 33 and compressed air is blown into the nozzle 31, as shown in Fig. 2. The bundled material 1 is unraveled into filaments to be continuously fed by the nozzle 31, thereby continuously manufacturing the sound absorbing material 2 fibrillated into a bulky state.

[0019] The sound absorbing material 2 is wound around a perforated pipe of the muffler.

[0020] In the first place, as described above, the sound absorbing material 2 continuously formed into a long shape is stocked in a stocker 3 as shown in Fig. 1C. Here, a bundle of the sound absorbing material 2 is in the fibrillated state and stocked in a sizable amount.

[0021] Next, the sound absorbing material 2 stocked in the stocker 3 is drawn from the stocker 3 and wound around the outer peripheral surface of a perforated pipe constituting a muffler, e.g., an inner pipe 4 as shown in Fig. 1D. Small holes 5 are formed in the inner pipe 4, and the sound absorbing material 2 is wound in an area where the small holes 5 are formed. Further, as a winding method, the sound absorbing material 2 is reciprocated in the axial direction of the inner pipe 4 by a traverse mechanism and the like while rotating the inner pipe 4 around an axis thereof by appropriate rotating

means so that the sound absorbing material is wound. A winding amount of the sound absorbing material is set to a desired value, and the sound absorbing material 2 is wound once or multiple times in accordance with a reciprocation amount of a bundle of the sound absorbing material 2.

[0022] It is to be noted that a bundle of the sound absorbing material 2 may be wound as described above but two, three or multiple bundles of the sound absorbing material 2 may be simultaneously wound according to productivity.

[0023] Fig. 1E shows the state where the sound absorbing material 2 is wound as described above, and this winding forms a sound absorbing layer 6 of the bulky basalt yarn.

[0024] Additionally, as a method for supplying the sound absorbing material 2 in the stocker 3 into the inner pipe 4 as mentioned above, the sound absorbing material 2 is pulled out from the stocker 3 by supply rollers 7 and 8 and the drawn sound absorbing material 2 is inserted between tension rollers 9 and 10 so that the end of the sound absorbing material 2 is supplied to and wound around the inner pipe 4, for example, as shown in Fig. 3. In this manner, by providing the tension rollers 9 and 10, the tension adjustment of the tension rollers 9 and 10 can control the density and the weight of the sound absorbing material 2 to be wound around the inner pipe 4.

[0025] It is to be noted that the tension rollers 9 and 10 may not be used according to the density required for the sound absorbing layer 6. That is, only the friction of the sound absorbing material 2 and a member for supplying the sound absorbing material 2 may be used.

[0026] After forming the sound absorbing layer 6 on the inner pipe 4 as shown in Fig. 1E, the inner pipe 4 on which the sound absorbing layer 6 is formed is inserted into an outer pipe 13 having at one end an end plate 12 in which an inner pipe insertion hole 11 is formed, from an opening at the other end thereof as shown in Fig. 1F. At this time, the sound absorbing layer 6 has the external diameter which can be fully fitted to the inner surface of the outer pipe 13.

[0027] After the inner pipe 4 and the sound absorbing layer 6 are inserted into the outer pipe 13 as shown in Fig. 1G, the other end plate 14 is fixed to the outer pipe 13 as illustrated in Fig. 1G, thereby finishing the muffler 15.

[0028] Although the above embodiment is an example where the present invention is applied to the inner pipe, the present invention can be similarly applied in a case of providing the above mentioned sound absorbing layer 6 on any other perforated pipe, e.g., a perforated portion of an outlet pipe and the like.

[0029] As to filling the sound absorbing material 2 into the muffler, as shown in Fig. 4, insertion holes 22 may be formed to the end plate 21 of the outer pipe 20 constituting the muffler and the sound absorbing material 2 may be inserted into and filling in a space 24 between

the outer pipe 20 and the perforated pipe 23 from the insertion holes 22, thereby forming the sound absorbing layer by the sound absorbing material 2.

[0030] Moreover, as shown in Fig. 5, after the stainless wool 30 may be wound around the outer periphery of the perforated pipe 4, the sound absorbing material 2 may be wound around the outer periphery of the stainless wool 30 to form the sound absorbing layer 6. Similarly as the above, the sound absorbing material 2 is obtained by bundling multiple pieces of the basalt yarn 1a and making the bundled material bulky to be a fiber bundle, and the method for winding this sound absorbing material 2 is similar to the above.

[0031] As described above, since the sound absorbing material according to the first aspect of the present invention is constituted by the basalt yarn obtained by dissolving the basalt to be the continuous fiber, it can not be absorbed into the perforated pipe by an exhaust flow to be emitted into the air like the discontinuous short fiber. Further, the sound absorbing material is superior in acid resistance and alkali resistance and can not be degraded and broken by an acid substance or an alkali substance in the exhaust air to be emitted into the air like the glass wool in the related art. In addition, since the basalt yarn is bundled and the bundled material is fibrillated to be bulky, the sound absorbing property can be improved.

[0032] According to the second aspect of the present invention, by providing the sound absorbing material on the outer peripheral portion of the perforated pipe, the muffler having the above-described effect can be obtained.

[0033] According to the method for forming the sound absorbing layer in the third aspect of the present invention, the sound absorbing layer having the effect using the basalt yarn mentioned above can be formed. Further, since the sound absorbing material consisting of the fiber bundle obtained by making multiple pieces of the basalt yarn bulky is provided on the outer periphery of the perforated pipe to form the sound absorbing layer, the density of the entire sound absorbing layer can be more equalized than that obtained by filling the discontinuous short fiber in the muffler in the related art, thereby improving the sound absorbing performance.

[0034] In the step for forming the fibrillated sound absorbing material according to the third aspect, the bundled material is supplied into the nozzle while blowing the compressed air into the nozzle, and the bundled material is unraveled by the compressed air to form the continuously fibrillated sound absorbing material from the nozzle, thereby readily and continuously performing the above fibrillation.

[0035] Moreover, according to the present invention, in the third aspect or the above description, the step for arranging the fibrillated sound absorbing material on the outer peripheral portion of the perforated pipe can facilitate winding the sound absorbing material around the perforated pipe by supplying the sound absorbing ma-

terial to the outer periphery of the perforated pipe while rotating the perforated pipe around the axis thereof and winding the sound absorbing material around the perforated pipe.

[0036] When supplying the fibrillated sound absorbing material to the outer peripheral portion of the perforated pipe, the sound absorbing material can be supplied to the perforated pipe while applying tension to the sound absorbing material by the tension roller so that the tension can be adjusted during supply of the sound absorbing material, which can readily adjust the density of the sound absorbing layer to be formed.

[0037] As the fourth aspect according to the present invention, even if the sound absorbing material is inserted and filled into the muffler, the same effect as the third aspect can be obtained.

[0038] In order to provide a sound absorbing material superior in acid resistance, alkali resistance and sound absorbing quality and a sound absorbing layer using this sound absorbing material, multiple pieces of basalt yarn (1a) obtained by dissolving basalt to be continuous fibers are bundled by a fiber bundling agent to acquire a bundled material (1), and the bundled material (1) is fibrillated to obtain a bulky sound absorbing material (2). Moreover, the sound absorbing material (2) is arranged on the outer periphery of a perforated pipe (4) constituting a muffler to form a sound absorbing layer (6).

Claims

1. A sound absorbing material, wherein multiple pieces of basalt yarn (1a) obtained by dissolving basalt to be continuous fibers are bundled by a fiber bundling agent to acquire a bundled material (1) and said bundled material (1) is fibrillated to be bulky.
2. A muffler, wherein multiple pieces of basalt yarn (1a) obtained by dissolving basalt to be continuous fibers are bundled by a fiber bundling agent to acquire a bundled material (1) and a sound absorbing material (2) obtained by fibrillating said bundled material (1) to be bulky is provided on an outer peripheral portion of a perforated pipe (4, 23).
3. A method for forming a sound absorbing layer, comprising the steps of:

bundling multiple pieces of basalt yarn (1a) obtained by dissolving basalt to be continuous fibers by a fiber bundling agent to acquire a bundled material (1);
fibrillating said bundled material (1) to be bulky to form a sound absorbing material (2); and
arranging said sound absorbing material (2) on an outer peripheral portion of a perforated pipe (4, 23) constituting a muffler to form a sound absorbing layer (6).

4. The method for forming a sound absorbing layer according to claim 3, wherein, in said step of forming said fibrillated sound absorbing material (2), said bundled material (1) is supplied into a nozzle (3) while blowing compressed air into said nozzle (3) and said bundled material (1) is unraveled by said compressed air to form a continuously fibrillated sound absorbing material (2) from said nozzle (3). 5
5. The method for forming a sound absorbing layer according to claim 3 or 4, wherein, in said step of arranging said fibrillated sound absorbing material (2) on an outer peripheral portion of a perforated pipe (4), said sound absorbing material (2) is supplied to an outer periphery of said perforated pipe (4) while rotating said perforated pipe (4) around an axis thereof and said sound absorbing material (2) is wound around said perforated pipe (4). 10 15
6. The method for forming a sound absorbing layer according to claim 5, wherein, when supplying said fibrillated sound absorbing material (2) on an outer peripheral portion of said perforated pipe (4), said sound absorbing material (2) is supplied to said perforated pipe (4) while a tension roller (9, 10) gives tension to said sound absorbing material (2). 20 25
7. A method for forming a sound absorbing layer, wherein multiple pieces of basalt yarn (1a) obtained by dissolving basalt to be continuous fibers are bundled by a fiber bundling agent to acquire a bundled material (1), a sound absorbing material (2) is formed by fibrillating said bundled material (1) to be bulky, and said sound absorbing material (2) is inserted and filled into a space between an outer pipe (20) and a perforated pipe (23) constituting a muffler to form a sound absorbing layer (6). 30 35

40

45

50

55

FIG. 1A




FIG. 1D

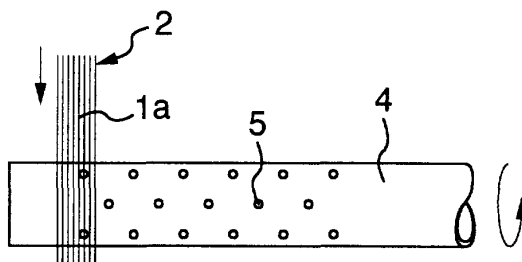


FIG. 1E

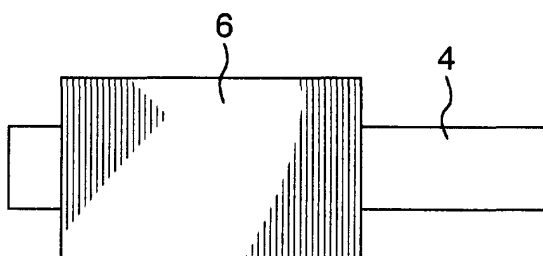


FIG. 1B




FIG. 1F

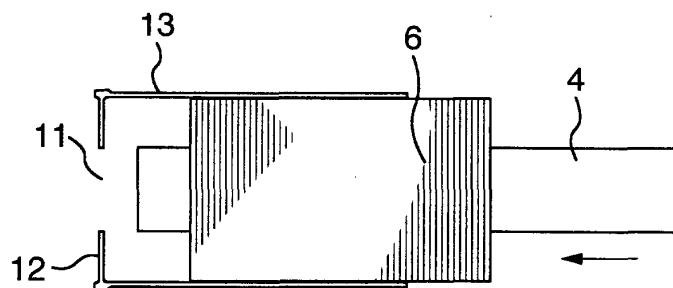


FIG. 1C




FIG. 1G

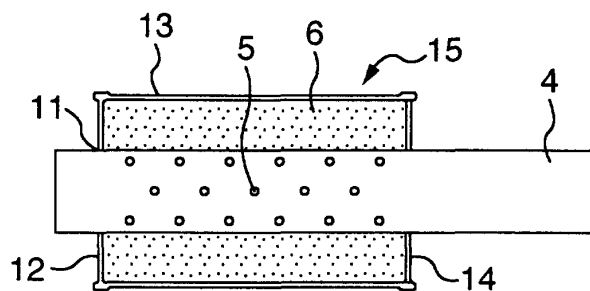


FIG. 2

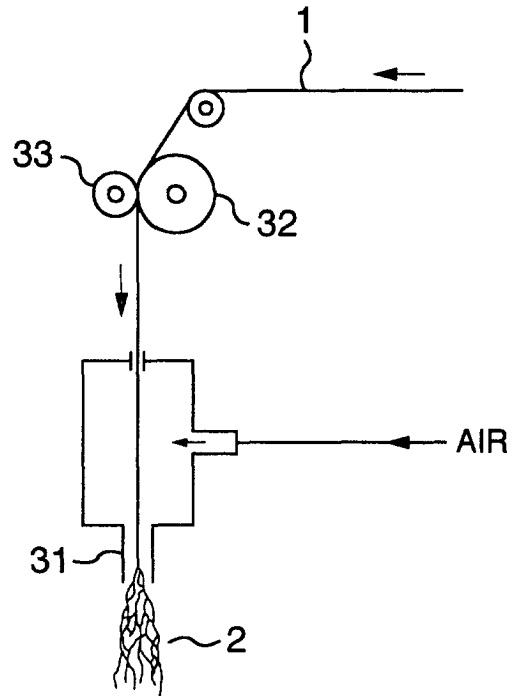


FIG. 3

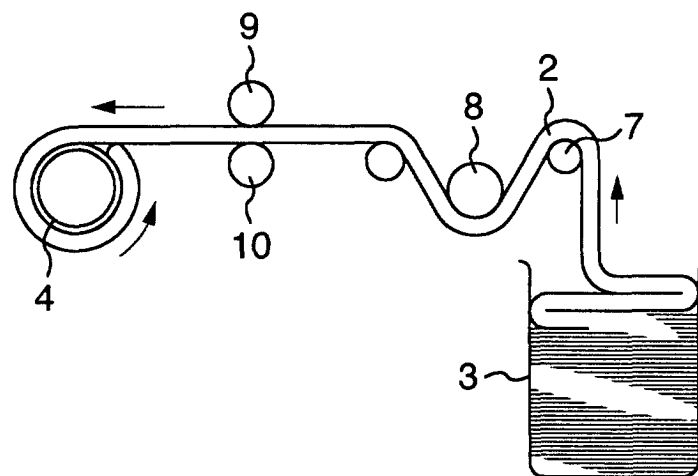


FIG. 4


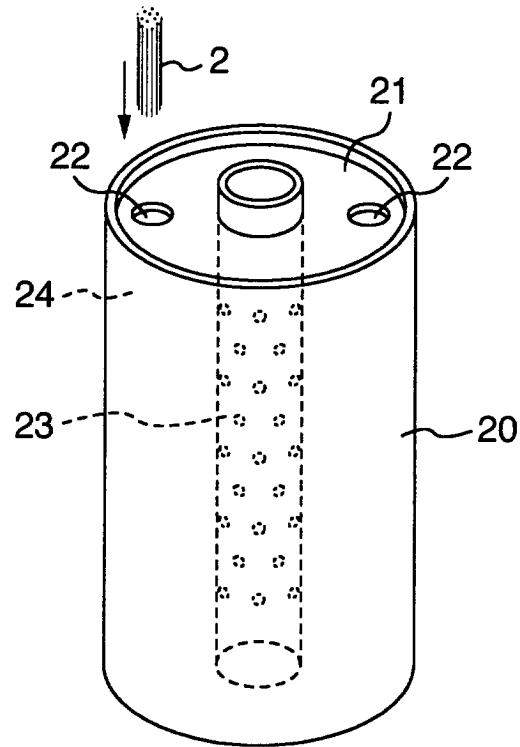


FIG. 5



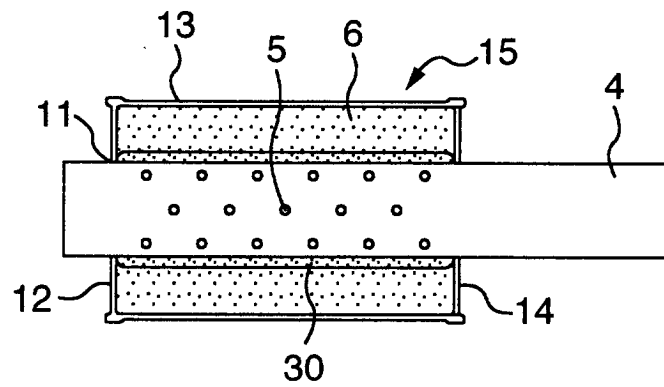

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 12 7435

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 153 100 A (UNIPART GROUP LTD) 28 August 1985 (1985-08-28) * page 1, line 3 - page 1, line 9 * * page 2, line 11 - page 2, line 18 * * page 4, line 7 - page 4, line 14 * * page 5, line 11 - page 5, line 16; figure 1 *	1-3,7	F01N1/24
X	US 6 094 817 A (MILLER JAMES M ET AL) 1 August 2000 (2000-08-01) * column 1, line 63 - column 2, line 38 * * column 3, line 7 - column 4, line 44; figure 3 *	1-5,7	
A	EP 0 074 220 A (LANCASTER GLASS FIBRE) 16 March 1983 (1983-03-16) * page 2, line 15 - page 3, line 9; figures 1-3 *	1-7	
A	US 4 569 471 A (INGEMANSSON BENGT-ERIK ET AL) 11 February 1986 (1986-02-11) * claims 1,2; figure 1 *	2-4,6	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	US 4 774 985 A (BROADBELT KEITH ET AL) 4 October 1988 (1988-10-04) * column 3, line 14 - column 4, line 26 * * column 6, line 58 - column 7, line 6; figure 5 *	1-3,7	F01N B65B
A	US 5 912 441 A (WOERNER SIEGFRIED) 15 June 1999 (1999-06-15) * column 1, line 30 - column 2, line 7; figure 1 *	1,2	
A	EP 0 714 087 A (EBERSPAECHER J) 29 May 1996 (1996-05-29) * abstract; claims 1,5 *	2	
		-/--	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 8 March 2001	Examiner Tatus, W
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 12 7435

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 98 24615 A (OWENS CORNING FIBERGLASS CORP ;KIRK SIMON R (US)) 11 June 1998 (1998-06-11) * page 9, line 30 - page 10, line 4 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 8 March 2001	Examiner Tatus, W
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 12 7435

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-03-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0153100 A	28-08-1985	GB 2162577 A	05-02-1986
		CA 1262711 A	07-11-1989
		DE 3563089 D	07-07-1988
		JP 60237113 A	26-11-1985
US 6094817 A	01-08-2000	NONE	
EP 0074220 A	16-03-1983	GB 2106591 A, B	13-04-1983
US 4569471 A	11-02-1986	SE 445942 B	28-07-1986
		AT 27336 T	15-06-1987
		CA 1229307 A	17-11-1987
		CA 1222135 C	26-05-1987
		DE 3371667 D	25-06-1987
		DK 151083 A, B,	07-10-1983
		EP 0091413 A	12-10-1983
		ES 279295 U	16-02-1985
		ES 521228 D	01-10-1984
		ES 8500383 A	01-01-1985
		ES 532493 D	01-04-1985
		ES 8504324 A	01-07-1985
		JP 1765794 C	11-06-1993
		JP 4056319 B	08-09-1992
		JP 58198094 A	17-11-1983
US 4774985 A	04-10-1988	NO 831201 A, B,	07-10-1983
		SE 8202197 A	07-10-1983
US 4774985 A	04-10-1988	AU 582555 B	06-04-1989
		AU 3545984 A	23-05-1985
		BR 8405864 A	17-09-1985
		CA 1238613 A	28-06-1988
		DE 3476241 D	23-02-1989
		EP 0146249 A	26-06-1985
		ES 537713 D	01-02-1986
		ES 8604670 A	01-07-1986
		GB 2149851 A, B	19-06-1985
		JP 4049951 B	12-08-1992
		JP 60125895 A	05-07-1985
US 5912441 A	15-06-1999	MX 163173 B	30-09-1991
EP 0714087 A	29-05-1996	DE 19627079 A	08-01-1998
		EP 0816649 A	07-01-1998
EP 0714087 A	29-05-1996	DE 9419022 U	26-01-1995
WO 9824615 A	11-06-1998	AU 5894998 A	29-06-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 12 7435

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-03-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9824615 A		EP 1021289 A	26-07-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82