




(86) Date de dépôt PCT/PCT Filing Date: 2000/10/20
 (87) Date publication PCT/PCT Publication Date: 2001/05/03
 (45) Date de délivrance/Issue Date: 2011/01/04
 (85) Entrée phase nationale/National Entry: 2002/04/23
 (86) N° demande PCT/PCT Application No.: AU 2000/001273
 (87) N° publication PCT/PCT Publication No.: 2001/031517
 (30) Priorité/Priority: 1999/10/25 (AU PQ 3632)

(51) Cl.Int./Int.Cl. *G06K 9/18* (2006.01),
B41J 13/10 (2006.01), *B41J 2/175* (2006.01),
B41J 2/21 (2006.01), *B42C 9/00* (2006.01),
H04N 1/32 (2006.01), *H04N 1/327* (2006.01)
 (72) Inventeurs/Inventors:
 SILVERBROOK, KIA, AU;
 LAPSTUN, PAUL, AU
 (73) Propriétaire/Owner:
 SILVERBROOK RESEARCH PTY LTD, AU
 (74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : PROCÉDE ET SYSTÈME DE PUBLICITE
 (54) Title: METHOD AND SYSTEM FOR ADVERTISING

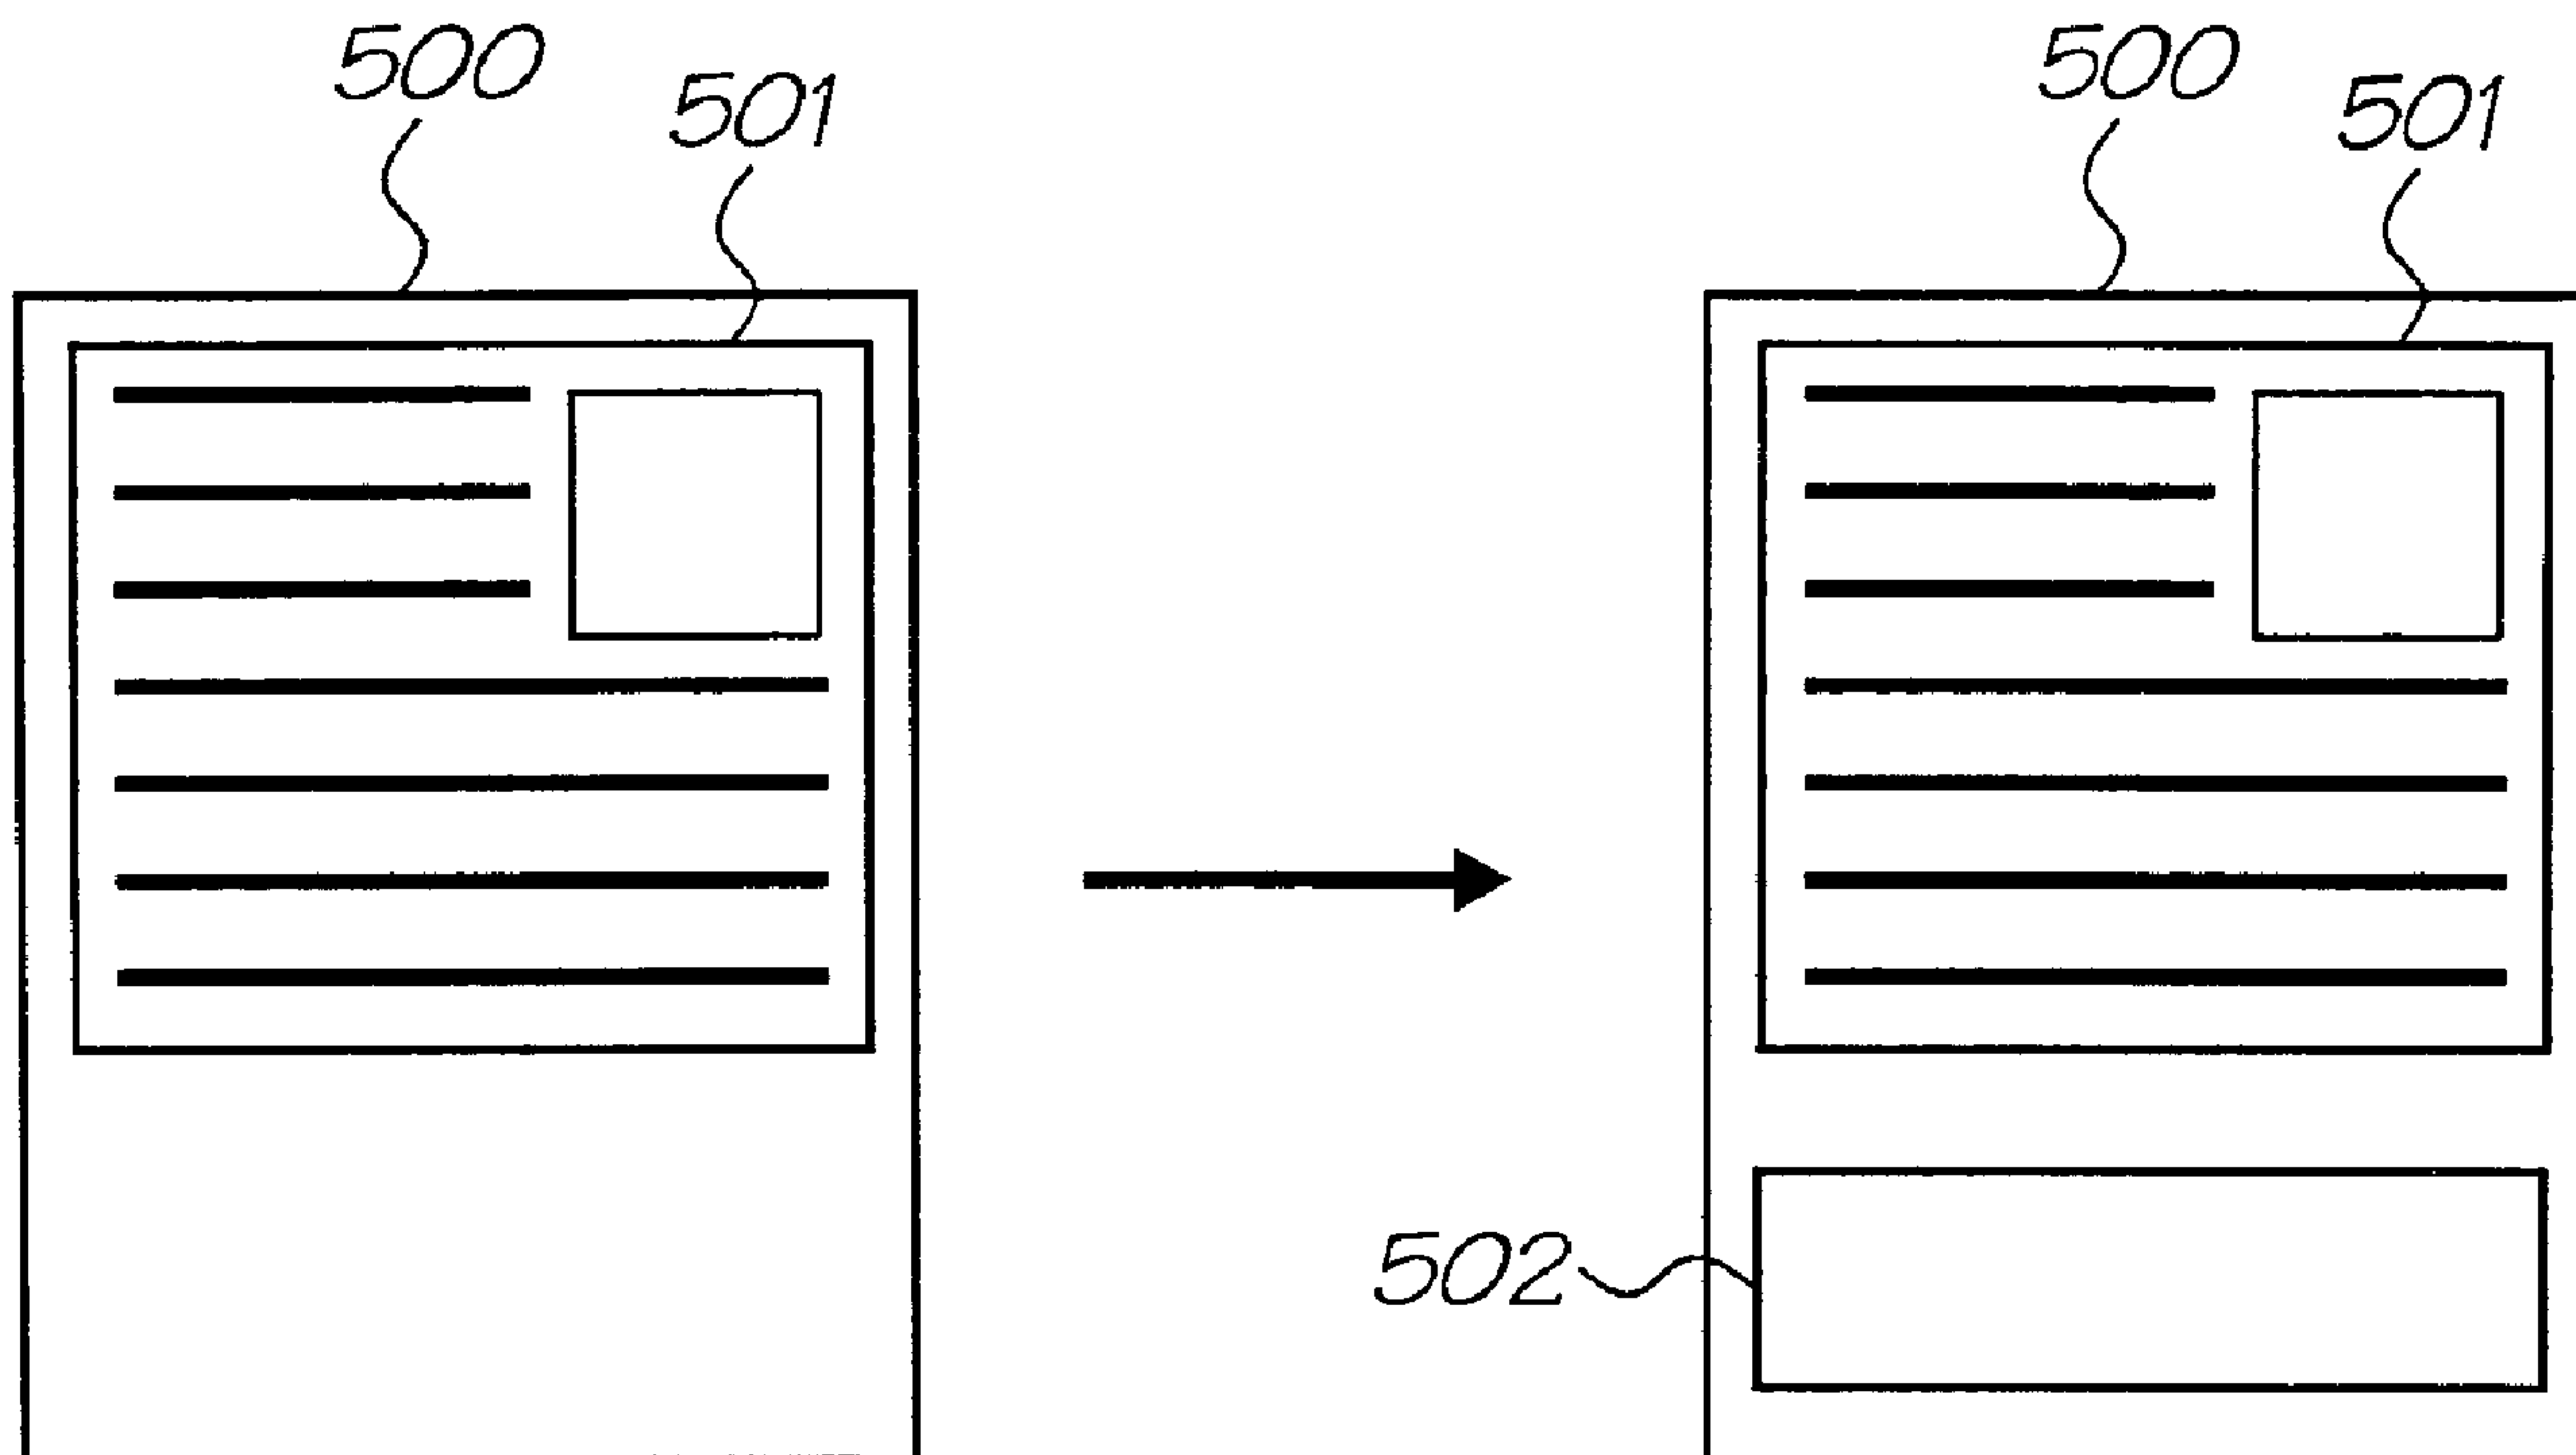

(57) Abrégé/Abstract:

The invention concerns a method and system for producing a document containing user requested information, identifying an advertising space, outside an area of the document to be occupied by the information, and printing the document with advertising material in the space.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
3 May 2001 (03.05.2001)

PCT

(10) International Publication Number
WO 01/31517 A1

- (51) International Patent Classification⁷: G06F 17/60, G06K 9/18
- (74) Agent: SILVERBROOK, Kia; Silverbrook Research Pty Ltd, 393 Darling Street, Balmain, NSW 2041⁴ (AU).
- (21) International Application Number: PCT/AU00/01273
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 20 October 2000 (20.10.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: PQ 3632 25 October 1999 (25.10.1999) AU
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): SILVERBROOK RESEARCH PTY LTD [AU/AU]; 393 Darling Street, Balmain, NSW 2041 (AU).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): SILVERBROOK, Kia [AU/AU]; Silverbrook Research Pty Ltd, 393 Darling Street, Balmain, NSW 2041⁴ (AU). LAPSTUN, Paul [NO/AU]; 13 Duke Avenue, Rodd Point, NSW 2046 (AU).
- Published:**
— *With international search report.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND SYSTEM FOR ADVERTISING

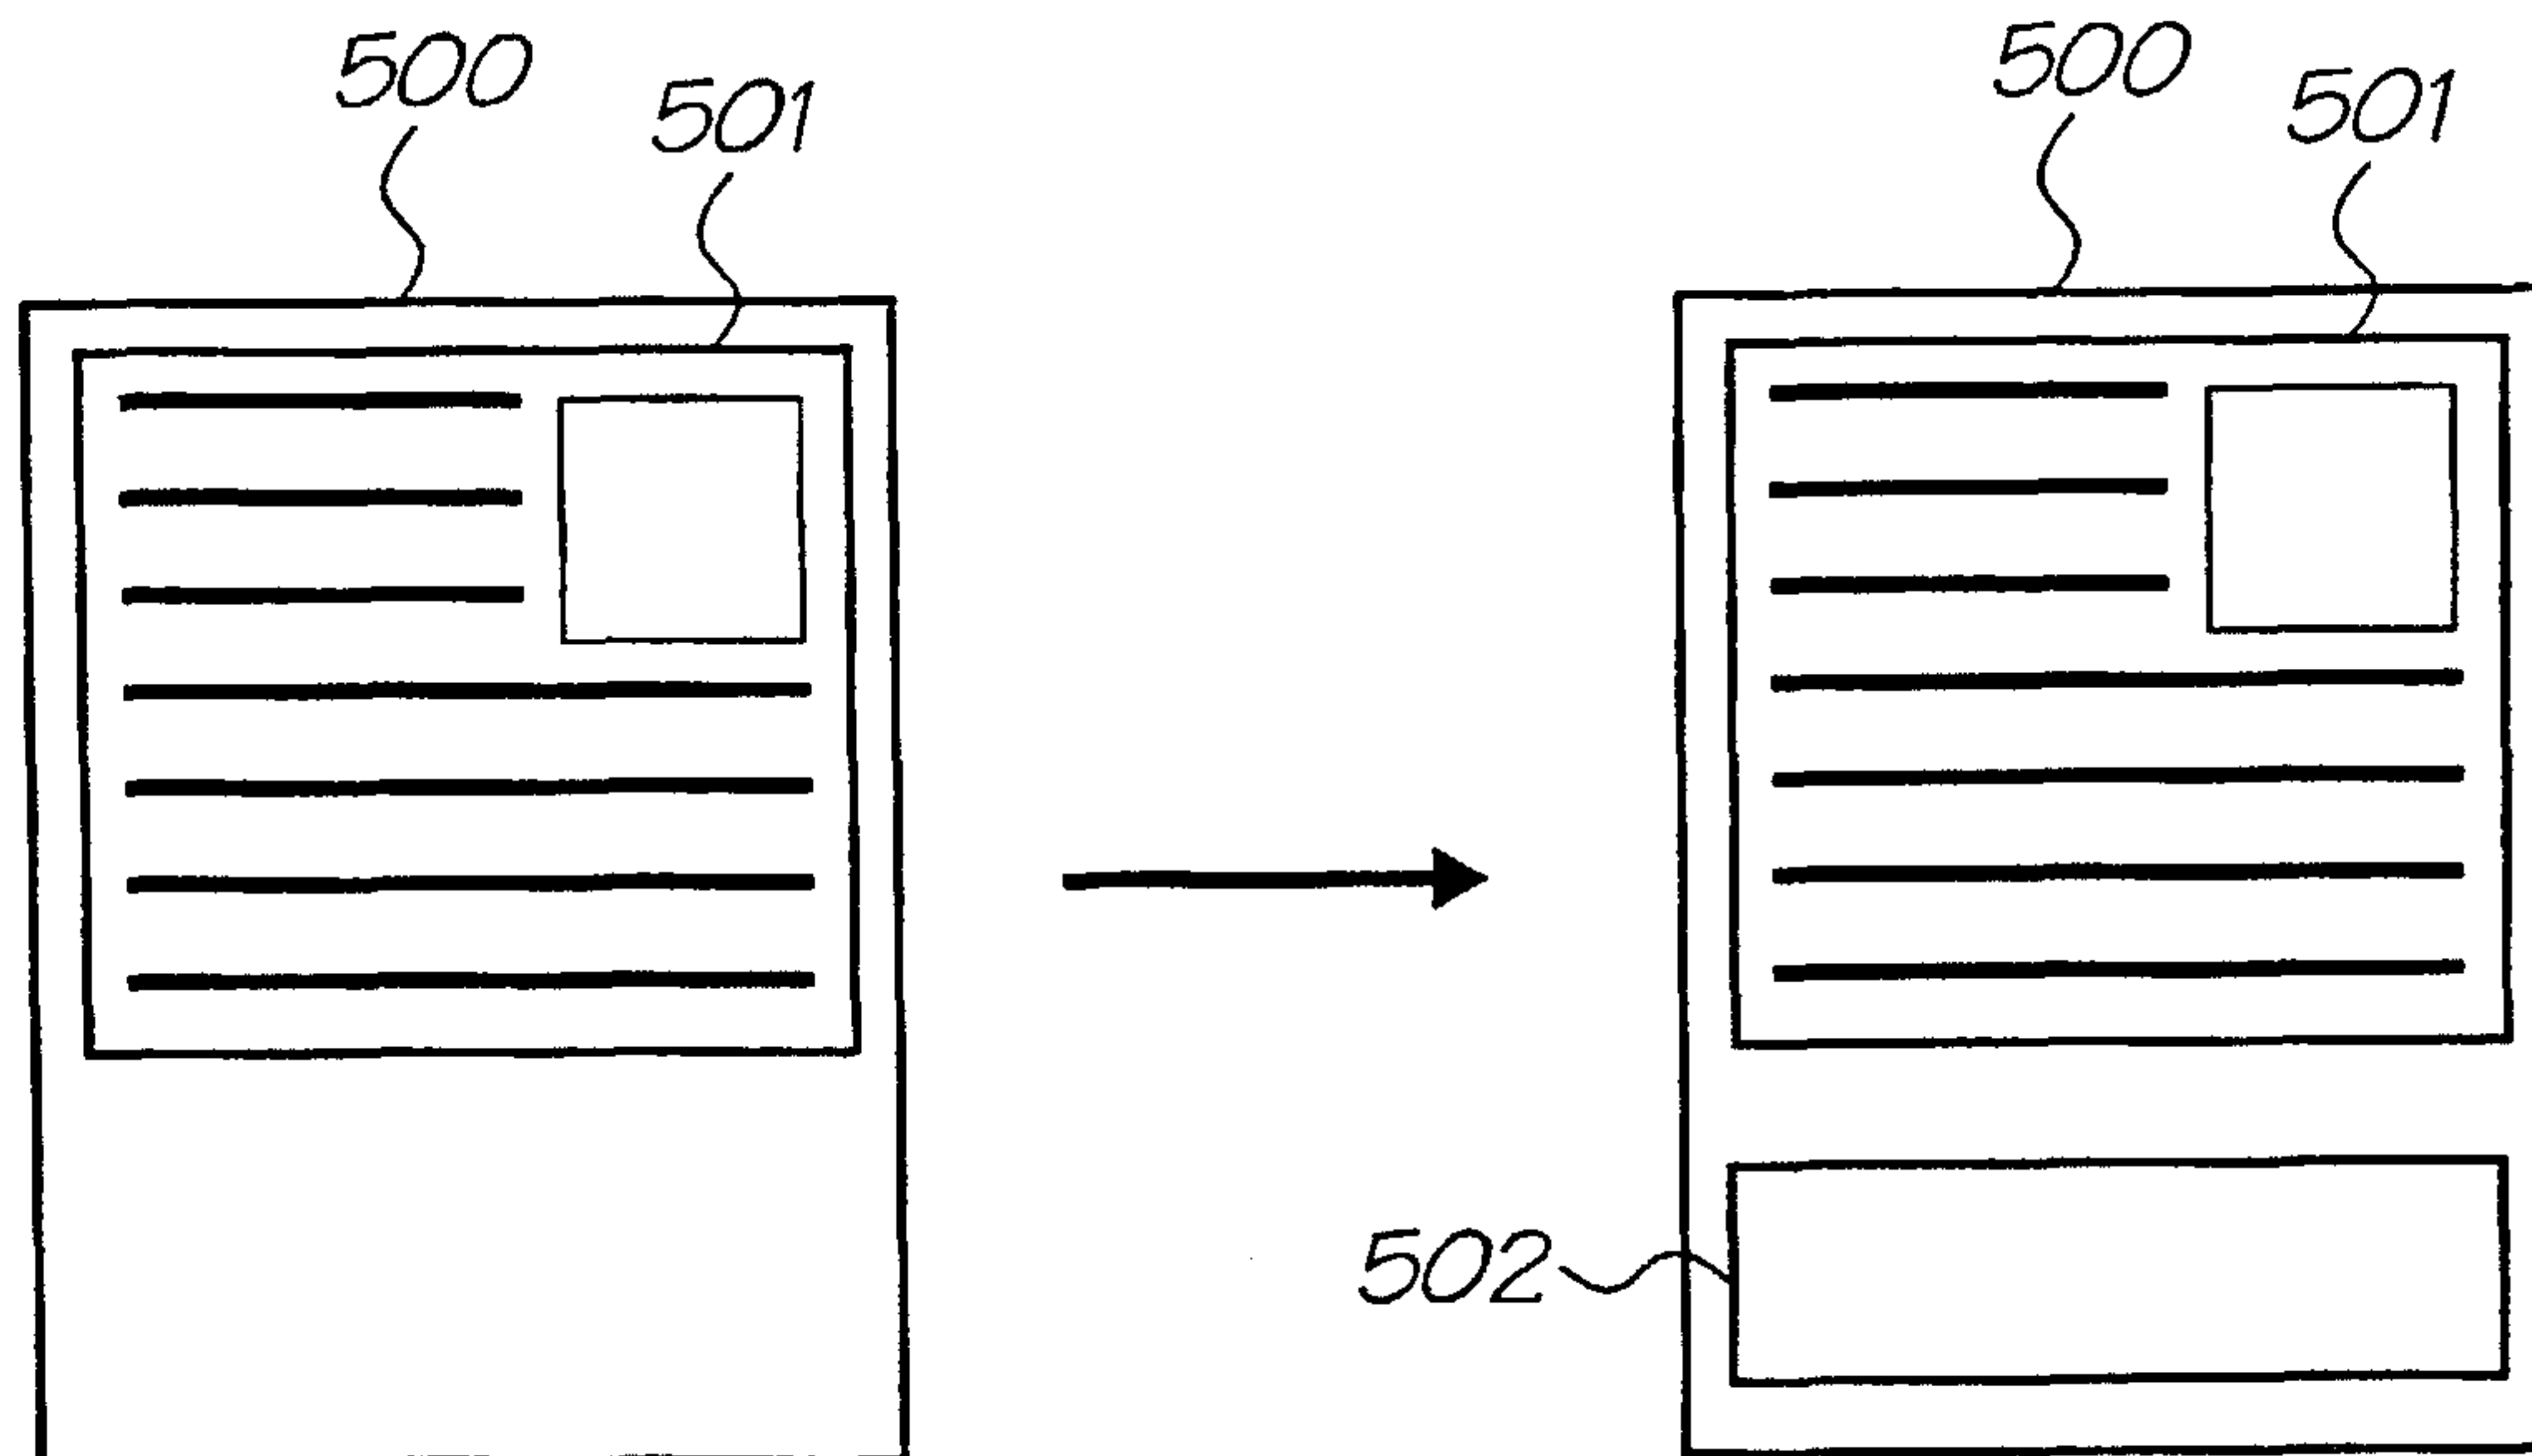

(57) Abstract: The invention concerns a method and system for producing a document containing user requested information, identifying an advertising space, outside an area of the document to be occupied by the information, and printing the document with advertising material in the space.

WO 01/31517 A1

METHOD AND SYSTEM FOR ADVERTISING**FIELD OF INVENTION**

The present invention relates generally to electronically delivered printed documents and, more particularly, to a method and system for the automatic placement of advertising in otherwise
5 empty space in such printed documents.

CO-PENDING APPLICATIONS

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention simultaneously with the present invention:

10	WO 2001/031517	WO 2001/031576	WO 2001/031520	WO 2001/031519
	WO 2001/031571	WO 2001/041099	WO 2001/031518	WO 2001/031521
	WO 2001/030589	WO 2001/031559	WO 2001/041003	WO 2001/039984
	WO 2001/030590	WO 2001/030591	WO 2002/034530	WO 2002/034533
	WO 2002/034549			

15 Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 15 September 2000: WO 2001/022357 WO 2001/022207 and WO 2001/022208.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on
20 30 June 2000:

	WO 2001/003433	WO 2001/003014	WO 2001/003013	WO 2001/002940
	WO 2001/002995	WO 2001/002939	WO 2001/003015	WO 2001/003016
	WO 2001/003017	WO 2001/003012	WO 2001/003018	WO 2001/003019
	WO 2001/003020	WO 2001/002977	WO 2001/003021	WO 2001/003022
25	WO 2001/002947	WO 2001/002946	WO 2001/002948	WO 2001/002905
	WO 2002/002338	WO 2002/004219	WO 2002/002339 and	WO 2002/003321

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on
30 24 May 2000:

	WO 2000/072241	WO 2000/072242	WO 2000/072202	WO 2000/072232
	WO 2000/072233	WO 2000/072234	WO 2000/072235	WO 2000/072138
	WO 2000/072124	WO 2000/072192	WO 2000/072243	WO 2000/072236

	WO 2000/072244	WO 2000/072576	WO 2000/072237	WO 2000/072125
	WO 2000/072247	WO 2000/071353	WO 2000/072248	WO 2000/072245
	WO 2000/072203	WO 2000/072204	WO 2000/072499	WO 2000/072505
	WO 2000/072136	WO 2000/072503	WO 2000/071355	WO 2000/071356
5	WO 2000/071362	WO 2000/071354	WO 2000/071357	WO 2000/071455
	WO 2000/071348	WO 2000/071350	WO 2000/072137	WO 2000/072126
	WO 2000/072127	WO 2000/072286	WO 2000/072128	WO 2000/072129
	WO 2000/072230	WO 2000/072238	WO 2000/072287	WO 2000/072249
	WO 2000/072130	WO 2000/072250	WO 2000/072110	WO 2000/072131
10	WO 2000/072132	WO 2000/072133	WO 2000/072134	WO 2000/072246
	WO 2000/072135	WO 2001/089839	WO 2001/089840	WO 2001/002177
	WO 2001/002176	WO 2001/002289	WO 2001/002181	WO 2001/002287
	WO 2001/002288	WO 2001/089987	WO 2001/089845	WO 2001/089846
	WO 2001/089842	WO 2001/089844	WO 2001/089849	WO 2001/089847
15	WO 2001/089848	WO 2001/089836	WO 2001/089837	WO 2001/089851
	WO 2001/089838 and WO 2001/089850			

BACKGROUND

Advertising has traditionally been distributed in printed publications, and typically placed to exploit the editorial context, the locality of the publication's distribution, and the demographic of its readership.

In more recent times advertising has been distributed as part of Web pages. The Web page advertising space is typically specifically allocated for, and dedicated to, advertising. Advertisements typically are often customised and targeted based on the page being viewed or the search being carried out by the user. If the user is registered with the site the advertising may be targeted to the user's demographic based on the user's known profile.

SUMMARY OF INVENTION

It is an objective of the present invention to provide a new method and system for advertising.

In a first aspect, the present invention provides a method of producing a document by formatting user requested information in the document so as to include one user interactive element, to allow the user to effect a response to the information, using a sensing device for transmitting response data back to a computer system, including:

identifying an advertising space, outside an area of the document to be occupied by the

information; and

printing the document with advertising material in the space.

Preferably, the advertising space is determined to be on a reverse side of the document relative to the user requested information.

5 Preferably also, the information is formatted at a publication server of the computer system and the method includes the publication server monitoring the said area and, once the space is identified, receiving the advertising material from an advertising server, for inclusion in the document.

10 Preferably also, the document is printed with coded data, for sensing by the sensing device, indicative of an identity of the document and of the at least one interactive element. Preferably also, the document is printed on a surface defining structure at the same time as the coded data is printed on the surfaces. Preferably also, the method includes including retaining a retrievable record of the printed document, the document being retrievable using the identity data as contained in the coded data.

15 Preferably also, wherein the sensing device includes an identification code specific to a particular user and the method includes monitoring use of the sensing device in the computer system.

In a second aspect, the present invention provides a system for producing a document, including :

20 a computer system for formatting user requested information in the document so as to include at least one user interactive element, to allow the user to effect a response to the information, using a sensing device for transmitting response data back to the computer system, wherein the computer system is arranged to identify an advertising space, outside an area of the document to be occupied by the information and to effect printing of the document with advertising
25 material in said space.

Preferably, the system includes a printer adapted to print on both sides of the document, in order to print the advertising material on a reverse side of the document, relative to the user requested information.

30 Preferably also, the computer system includes a publication server for formatting the document and an advertising server for providing the advertising material, wherein the publication server monitors said area and receives advertising material from the advertising server, for inclusion in the document.

Preferably also, the document includes coded data indicative of an identity of the document and of the at least one interactive element. Preferably also, the printer is arranged to print the coded data at the same time as printing the document on a surface defining structure. Preferably also, wherein the coded data is substantially invisible in the visible spectrum. Preferably also, the system includes a database for keeping a retrievable record of each document generated, each document being retrievable by using its identity, as included in the coded data.

Accordingly, the present invention provides a method and system which utilizes one or more forms capable of interacting with a computer system. Whilst the novel method and system of the present invention may be used in conjunction with a single computer system, in a particularly preferred form it is designed to operate over a computer network, such as the Internet.

BRIEF DESCRIPTION OF DRAWINGS

Preferred and other embodiments of the invention will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

Figure 1 is a schematic of a the relationship between a sample printed netpage and its online page description;

Figure 2 is a schematic view of a interaction between a netpage pen, a netpage printer, a netpage page server, and a netpage application server;

Figure 3 is a schematic view of a high-level structure of a printed netpage and its online page description;

Figure 4a is a plan view showing a structure of a netpage tag;

Figure 4b is a plan view showing a relationship between a set of the tags shown in Figure 4a and a field of view of a netpage sensing device in the form of a netpage pen;

Figure 5a is a plan view showing an alternative structure of a netpage tag;

Figure 5b is a plan view showing a relationship between a set of the tags shown in Figure 5a and a field of view of a netpage sensing device in the form of a netpage pen;

Figure 5c is a plan view showing an arrangement of nine of the tags shown in Figure 5a where targets are shared between adjacent tags;

Figure 5d is a plan view showing the interleaving and rotation of the symbols of the four codewords of the tag shown in Figure 5a;

Figure 6 is a example of an advertisement placed within free space on a page; and

Figure 7 is an example of an advertisement placed on the reverse-side of a page.

DETAILED DESCRIPTION OF PREFERRED AND OTHER EMBODIMENTS

Note: Memjet™ is a trademark of Silverbrook Research Pty Ltd, Australia.

In the preferred embodiment, the invention is configured to work with the netpage
5 networked computer system, a summary of which is given below and a detailed description of
which is given in our earlier applications, including in particular applications PCT/AU00/00569
(docket no. NPT002), PCT/AU00/00565 (docket no. NPS001), PCT/AU00/00561 (docket no.
NPP003), PCT/AU00/00519 (docket no. NPA002) and PCT/AU00/00578 (docket no. IJ52). It will
10 be appreciated that not every implementation will necessarily embody all or even most of the
specific details and extensions described in these applications in relation to the basic system.
However, the system is described in its most complete form to assist in understanding the context
in which the preferred embodiments and aspects of the present invention operate.

In brief summary, the preferred form of the netpage system employs a computer interface
in the form of a mapped surface, that is, a physical surface which contains references to a map of
15 the surface maintained in a computer system. The map references can be queried by an appropriate
sensing device. Depending upon the specific implementation, the map references may be encoded
visibly or invisibly, and defined in such a way that a local query on the mapped surface yields an
unambiguous map reference both within the map and among different maps. The computer system
can contain information about features on the mapped surface, and such information can be
20 retrieved based on map references supplied by a sensing device used with the mapped surface. The
information thus retrieved can take the form of actions which are initiated by the computer system
on behalf of the operator in response to the operator's interaction with the surface features.

In its preferred form, the netpage system relies on the production of, and human
interaction with, netpages. These are pages of text, graphics and images printed on ordinary paper
25 or other media, but which

work like interactive web pages. Information is encoded on each page using ink which is
substantially invisible to the unaided human eye. The ink, however, and thereby the coded data, can
be sensed by an optically imaging pen and transmitted to the netpage system.

In the preferred form, active buttons and hyperlinks on each page can be clicked with the
30 pen to request information from the network or to signal preferences to a network server. In one
embodiment, text written by hand on a netpage is automatically recognized and converted to
computer text in the netpage system, allowing forms to be filled in. In other embodiments,

signatures recorded on a netpage are automatically verified, allowing e-commerce transactions to be securely authorized.

As illustrated in Figure 1, a printed netpage 1 can represent a interactive form which can be filled in by the user both physically, on the printed page, and “electronically”, via communication between the pen and the netpage system. The example shows a “Request” form containing name and address fields and a submit button. The netpage consists of graphic data 2 printed using visible ink, and coded data 3 printed as a collection of tags 4 using invisible ink. The corresponding page description 5, stored on the netpage network, describes the individual elements of the netpage. In particular it describes the type and spatial extent (zone) of each interactive element (i.e. text field or button in the example), to allow the netpage system to correctly interpret input via the netpage. The submit button 6, for example, has a zone 7 which corresponds to the spatial extent of the corresponding graphic 8.

As illustrated in Figure 2, the netpage pen 101, a preferred form of which is described in our earlier application PCT/AU00/00565 (docket no. NPS001), works in conjunction with a netpage printer 601, an Internet-connected printing appliance for home, office or mobile use. The pen is wireless and communicates securely with the netpage printer via a short-range radio link 9.

The netpage printer 601, preferred forms of which are described in our earlier application PCT/AU00/00561 (docket no. NPP003) and our co-filed application PCT/AU00/01281 (docket no. NPS024), is able to deliver, periodically or on demand, personalized newspapers, magazines, catalogs, brochures and other publications, all printed at high quality as interactive netpages. Unlike a personal computer, the netpage printer is an appliance which can be, for example, wall-mounted adjacent to an area where the morning news is first consumed, such as in a user’s kitchen, near a breakfast table, or near the household’s point of departure for the day. It also comes in tabletop, desktop, portable and miniature versions.

Netpages printed at their point of consumption combine the ease-of-use of paper with the timeliness and interactivity of an interactive medium.

As shown in Figure 2, the netpage pen 101 interacts with the coded data on a printed netpage 1 and communicates, via a short-range radio link 9, the interaction to a netpage printer. The printer 601 sends the interaction to the relevant netpage page server 10 for interpretation. In appropriate circumstances, the page server sends a corresponding message to application computer software running on a netpage application server 13. The application server may in turn send a response which is printed on the originating printer.

The netpage system is made considerably more convenient in the preferred embodiment

by being used in conjunction with high-speed microelectromechanical system (MEMS) based inkjet (Memjet™) printers, described in our earlier application PCT/AU00/00578 (docket no. IJ52). In the preferred form of this technology, relatively high-speed and high-quality printing is made more affordable to consumers. In its preferred form, a netpage publication has the physical characteristics
5 of a traditional newsmagazine, such as a set of letter-size glossy pages printed in full color on both sides, bound together for easy navigation and comfortable handling.

The netpage printer exploits the growing availability of broadband Internet access. The netpage printer can also operate with slower connections, but with longer delivery times and lower image quality. The netpage system can also be enabled using existing consumer inkjet and laser
10 printers, although the system will operate more slowly and will therefore be less acceptable from a consumer's point of view. In other embodiments, the netpage system is hosted on a private intranet. In still other embodiments, the netpage system is hosted on a single computer or computer-enabled device, such as a printer.

Netpage publication servers 14 on the netpage network are configured to deliver print-quality publications to netpage printers. Periodical publications are delivered automatically to
15 subscribing netpage printers via pointcasting and multicasting Internet protocols. Personalized publications are filtered and formatted according to individual user profiles.

A netpage printer can be configured to support any number of pens, and a pen can work with any number of netpage printers. In the preferred implementation, each netpage pen has a
20 unique identifier. A household may have a collection of colored netpage pens, one assigned to each member of the family. This allows each user to maintain a distinct profile with respect to a netpage publication server or application server.

A netpage pen can also be registered with a netpage registration server 11 and linked to one or more payment card accounts. This allows e-commerce payments to be securely authorized
25 using the netpage pen. The netpage registration server compares the signature captured by the netpage pen with a previously registered signature, allowing it to authenticate the user's identity to an e-commerce server. Other biometrics can also be used to verify identity. A version of the netpage pen includes fingerprint scanning, verified in a similar way by the netpage registration server.

30 Although a netpage printer may deliver periodicals such as the morning newspaper without user intervention, it can be configured never to deliver unsolicited junk mail. In its preferred form, it only delivers periodicals from subscribed or otherwise authorized sources. In this respect, the netpage printer is unlike a fax machine or e-mail account which is visible to any junk

mailer who knows the telephone number or e-mail address.

Each object model in the system is described using a Unified Modeling Language (UML) class diagram. A class diagram consists of a set of object classes connected by relationships, and two kinds of relationships are of interest here: associations and generalizations. An association represents some kind of relationship between objects, i.e. between instances of classes. A generalization relates actual classes, and can be understood in the following way: if a class is thought of as the set of all objects of that class, and class A is a generalization of class B, then B is simply a subset of A. Each class is drawn as a rectangle labelled with the name of the class. It contains a list of the attributes of the class, separated from the name by a horizontal line, and a list of the operations of the class, separated from the attribute list by a horizontal line. In the class diagrams which follow, however, operations are never modelled. An association is drawn as a line joining two classes, optionally labelled at either end with the multiplicity of the association. The default multiplicity is one. An asterisk (*) indicates a multiplicity of "many", i.e. zero or more. Each association is optionally labelled with its name, and is also optionally labelled at either end with the role of the corresponding class. An open diamond indicates an aggregation association ("is-part-of"), and is drawn at the aggregator end of the association line. A generalization relationship ("is-a") is drawn as a solid line joining two classes, with an arrow (in the form of an open triangle) at the generalization end. When a class diagram is broken up into multiple diagrams, any class which is duplicated is shown with a dashed outline in all but the main diagram which defines it. It is shown with attributes only where it is defined.

Netpages are the foundation on which a netpage network is built. They provide a paper-based user interface to published information and interactive services. A netpage consists of a printed page (or other surface region) invisibly tagged with references to an online description of the page. The online page description is maintained persistently by a netpage page server. The page description describes the visible layout and content of the page, including text, graphics and images. It also describes the input elements on the page, including buttons, hyperlinks, and input fields. A netpage allows markings made with a netpage pen on its surface to be simultaneously captured and processed by the netpage system.

Multiple netpages can share the same page description. However, to allow input through otherwise identical pages to be distinguished, each netpage is assigned a unique page identifier. This page ID has sufficient precision to distinguish between a very large number of netpages.

Each reference to the page description is encoded in a printed tag. The tag identifies the unique page on which it appears, and thereby indirectly identifies the page description. The tag also

identifies its own position on the page. Characteristics of the tags are described in more detail below.

Tags are printed in infrared-absorptive ink on any substrate which is infrared-reflective, such as ordinary paper. Near-infrared wavelengths are invisible to the human eye but are easily
5 sensed by a solid-state image sensor with an appropriate filter.

A tag is sensed by an area image sensor in the netpage pen, and the tag data is transmitted to the netpage system via the nearest netpage printer. The pen is wireless and communicates with the netpage printer via a short-range radio link. Tags are sufficiently small and densely arranged that the pen can reliably image at least one tag even on a single click on the page. It is important
10 that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless. Tags are error-correctably encoded to make them partially tolerant to surface damage.

The netpage page server maintains a unique page instance for each printed netpage, allowing it to maintain a distinct set of user-supplied values for input fields in the page description
15 for each printed netpage.

The relationship between the page description, the page instance, and the printed netpage is shown in Figure 3. The printed netpage may be part of a printed netpage document 45. The page instance is associated with both the netpage printer which printed it and, if known, the netpage user who requested it.

20 In a preferred form, each tag identifies the region in which it appears, and the location of that tag within the region. A tag may also contain flags which relate to the region as a whole or to the tag. One or more flag bits may, for example, signal a tag sensing device to provide feedback indicative of a function associated with the immediate area of the tag, without the sensing device having to refer to a description of the region. A netpage pen may, for example, illuminate an
25 "active area" LED when in the zone of a hyperlink.

In a preferred embodiment, each tag contains an easily recognized invariant structure which aids initial detection, and which assists in minimizing the effect of any warp induced by the surface or by the sensing process. The tags preferably tile the entire page, and are sufficiently small and densely arranged that the pen can reliably image at least one tag even on a single click on the
30 page. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless.

In a preferred embodiment, the region to which a tag refers coincides with an entire page,

and the region ID encoded in the tag is therefore synonymous with the page ID of the page on which the tag appears. In other embodiments, the region to which a tag refers can be an arbitrary subregion of a page or other surface. For example, it can coincide with the zone of an interactive element, in which case the region ID can directly identify the interactive element.

5 Each tag typically contains 16 bits of tag ID, at least 90 bits of region ID, and a number of flag bits. Assuming a maximum tag density of 64 per square inch, a 16-bit tag ID supports a region size of up to 1024 square inches. Larger regions can be mapped continuously without increasing the tag ID precision simply by using abutting regions and maps. The distinction between a region ID and a tag ID is mostly one of convenience. For most purposes the
10 concatenation of the two can be considered as a globally unique tag ID. Conversely, it may also be convenient to introduce structure into the tag ID, for example to define the x and y coordinates of the tag. A 90-bit region ID allows 2^{90} ($\sim 10^{27}$ or a thousand trillion trillion) different regions to be uniquely identified. Tags may also contain type information, and a region may be tagged with a mixture of tag types. For example, a region may be tagged with one set of tags encoding x
15 coordinates and another set, interleaved with the first, encoding y coordinates.

In one embodiment, 120 bits of tag data are redundantly encoded using a (15, 5) Reed-Solomon code. This yields 360 encoded bits consisting of 6 codewords of 15 4-bit symbols each. The (15, 5) code allows up to 5 symbol errors to be corrected per codeword, i.e. it is tolerant of a symbol error rate of up to 33% per codeword. Each 4-bit symbol is represented in a spatially
20 coherent way in the tag, and the symbols of the six codewords are interleaved spatially within the tag. This ensures that a burst error (an error affecting multiple spatially adjacent bits) damages a minimum number of symbols overall and a minimum number of symbols in any one codeword, thus maximising the likelihood that the burst error can be fully corrected.

Any suitable error-correcting code can be used in place of a (15, 5) Reed-Solomon
25 code, for example a Reed-Solomon code with more or less redundancy, with the same or different symbol and codeword sizes; another block code; or a different kind of code, such as a convolutional code (see, for example, Stephen B. Wicker, Error Control Systems for Digital Communication and Storage, Prentice-Hall 1995).

One embodiment of the physical representation of the tag, shown in Figure 4a and
30 described in our earlier application PCT/AU00/00569 (docket no. NPT002), includes fixed target structures 15, 16, 17 and variable data areas 18. The fixed target structures allow a sensing device such as the netpage pen to detect the tag and infer its three-dimensional orientation relative to the sensor. The data areas contain representations of the individual bits of the encoded tag data. To

maximise its size, each data bit is represented by a radial wedge in the form of an area bounded by two radial lines and two concentric circular arcs. Each wedge has a minimum dimension of 8 dots at 1600 dpi and is designed so that its base (its inner arc), is at least equal to this minimum dimension. The height of the wedge in the radial direction is always equal to the minimum dimension. Each 4-bit data symbol is represented by an array of 2×2 wedges. The fifteen 4-bit data symbols of each of the six codewords are allocated to the four concentric symbol rings 18a to 18d in interleaved fashion. Symbols are allocated alternately in circular progression around the tag. The interleaving is designed to maximise the average spatial distance between any two symbols of the same codeword.

10 In order to support “single-click” interaction with a tagged region via a sensing device, the sensing device must be able to see at least one entire tag in its field of view no matter where in the region or at what orientation it is positioned. The required diameter of the field of view of the sensing device is therefore a function of the size and spacing of the tags. Assuming a circular tag shape, the minimum diameter of the sensor field of view 193 is obtained when the tags are tiled on
15 a equilateral triangular grid, as shown in Figure 4b.

The tag structure just described is designed to allow both regular tilings of planar surfaces and irregular tilings of non-planar surfaces. Regular tilings are not, in general, possible on non-planar surfaces. In the more usual case of planar surfaces where regular tilings of tags are possible, i.e. surfaces such as sheets of paper and the like, more efficient tag structures can be used
20 which exploit the regular nature of the tiling.

An alternative tag structure more suited to a regular tiling is shown in Figure 5a. The tag 4 is square and has four perspective targets 17. It is similar in structure to tags described by Bennett et al. in US Patent 5,051,746. The tag represents sixty 4-bit Reed-Solomon symbols 47, for a total of 240 bits. The tag represents each one bit as a dot 48, and each zero bit by the absence of the
25 corresponding dot. The perspective targets are designed to be shared between adjacent tags, as shown in Figures 5b and 5c. Figure 5b shows a square tiling of 16 tags and the corresponding minimum field of view 193, which must span the diagonals of two tags. Figure 5c shows a square tiling of nine tags, containing all one bits for illustration purposes.

Using a (15, 7) Reed-Solomon code, 112 bits of tag data are redundantly encoded to
30 produce 240 encoded bits. The four codewords are interleaved spatially within the tag to maximize resilience to burst errors. Assuming a 16-bit tag ID as before, this allows a region ID of up to 92 bits. The data-bearing dots 48 of the tag are designed to not overlap their neighbors, so that groups of tags cannot produce structures which resemble targets. This also saves ink. The perspective

targets therefore allow detection of the tag, so further targets are not required.

Although the tag may contain an orientation feature to allow disambiguation of the four possible orientations of the tag relative to the sensor, it is also possible to embed orientation data in the tag data. For example, the four codewords can be arranged so that each tag orientation contains one codeword placed at that orientation, as shown in Figure 5d, where each symbol is labelled with the number of its codeword (1-4) and the position of the symbol within the codeword (A-O). Tag decoding then consists of decoding one codeword at each orientation. Each codeword can either contain a single bit indicating whether it is the first codeword, or two bits indicating which codeword it is. The latter approach has the advantage that if, say, the data content of only one codeword is required, then at most two codewords need to be decoded to obtain the desired data. This may be the case if the region ID is not expected to change within a stroke and is thus only decoded at the start of a stroke. Within a stroke only the codeword containing the tag ID is then desired. Furthermore, since the rotation of the sensing device changes slowly and predictably within a stroke, only one codeword typically needs to be decoded per frame.

It is possible to dispense with perspective targets altogether and instead rely on the data representation being self-registering. In this case each bit value (or multi-bit value) is typically represented by an explicit glyph, i.e. no bit value is represented by the absence of a glyph. This ensures that the data grid is well-populated, and thus allows the grid to be reliably identified and its perspective distortion detected and subsequently corrected during data sampling. To allow tag boundaries to be detected, each tag data must contain a marker pattern, and these must be redundantly encoded to allow reliable detection. The overhead of such marker patterns is similar to the overhead of explicit perspective targets. One such scheme uses dots positioned at various points relative to grid vertices to represent different glyphs and hence different multi-bit values (see Anoto Technology Description, Anoto April 2000).

Decoding a tag results in a region ID, a tag ID, and a tag-relative pen transform. Before the tag ID and the tag-relative pen location can be translated into an absolute location within the tagged region, the location of the tag within the region must be known. This is given by a tag map, a function which maps each tag ID in a tagged region to a corresponding location. A tag map reflects the scheme used to tile the surface region with tags, and this can vary according to surface type. When multiple tagged regions share the same tiling scheme and the same tag numbering scheme, they can also share the same tag map. The tag map for a region must be retrievable via the region ID. Thus, given a region ID, a tag ID and a pen transform, the tag map can be retrieved, the tag ID can be translated into an absolute tag location within the region, and the tag-relative pen location can be added to the tag location to yield an absolute pen location within the region.

The tag ID may have a structure which assists translation through the tag map. It may, for example, encoded cartesian coordinates or polar coordinates, depending on the surface type on which it appears. The tag ID structure is dictated by and known to the tag map, and tag IDs associated with different tag maps may therefore have different structures.

5 Two distinct surface coding schemes are of interest, both of which use the tag structure described earlier in this section. The preferred coding scheme uses "location-indicating" tags as already discussed. An alternative coding scheme uses "object-indicating" (or "function-indicating") tags.

10 A location-indicating tag contains a tag ID which, when translated through the tag map associated with the tagged region, yields a unique tag location within the region. The tag-relative location of the pen is added to this tag location to yield the location of the pen within the region. This in turn is used to determine the location of the pen relative to a user interface element in the page description associated with the region. Not only is the user interface element itself identified, but a location relative to the user interface element is identified. Location-indicating tags therefore
15 trivially support the capture of an absolute pen path in the zone of a particular user interface element.

An object-indicating (or function-indicating) tag contains a tag ID which directly identifies a user interface element in the page description associated with the region (or equivalently, a function). All the tags in the zone of the user interface element identify the user
20 interface element, making them all identical and therefore indistinguishable. Object-indicating tags do not, therefore, support the capture of an absolute pen path. They do, however, support the capture of a relative pen path. So long as the position sampling frequency exceeds twice the encountered tag frequency, the displacement from one sampled pen position to the next within a stroke can be unambiguously determined. As an alternative, the netpage pen 101 can contain a pair
25 or motion-sensing accelerometers, as described in our earlier application PCT/AU00/00565 (docket no. NPS001).

30 With either tagging scheme, the tags function in cooperation with associated visual elements on the netpage as user interactive elements in that a user can interact with the printed page using an appropriate sensing device in order for tag data to be read by the sensing device and for an appropriate response to be generated in the netpage system.

PERSONALIZED PUBLICATION MODEL

In the following description, news is used as a canonical publication example to illustrate personalization mechanisms in the netpage system. Although news is often used in the limited

sense of newspaper and newsmagazine news, the intended scope in the present context is wider.

In the netpage system, the editorial content and the advertising content of a news publication are personalized using different mechanisms. The editorial content is personalized according to the reader's explicitly stated and implicitly captured interest profile. The advertising content is personalized according to the reader's locality and demographic.

EDITORIAL PERSONALIZATION

A subscriber can draw on two kinds of news sources: those that deliver news publications, and those that deliver news streams. While news publications are aggregated and edited by the publisher, news streams are aggregated either by a news publisher or by a specialized news aggregator. News publications typically correspond to traditional newspapers and newsmagazines, while news streams can be many and varied: a "raw" news feed from a news service, a cartoon strip, a freelance writer's column, a friend's bulletin board, or the reader's own e-mail.

The netpage publication server supports the publication of edited news publications as well as the aggregation of multiple news streams. By handling the aggregation and hence the formatting of news streams selected directly by the reader, the server is able to place advertising on pages over which it otherwise has no editorial control.

The subscriber builds a daily newspaper by selecting one or more contributing news publications, and creating a personalized version of each. The resulting daily editions are printed and bound together into a single newspaper. The various members of a household typically express their different interests and tastes by selecting different daily publications and then customizing them.

For each publication, the reader optionally selects specific sections. Some sections appear daily, while others appear weekly. The daily sections available from The New York Times online, for example, include "Page One Plus", "National", "International", "Opinion", "Business", "Arts/Living", "Technology", and "Sports". The set of available sections is specific to a publication, as is the default subset.

The reader can extend the daily newspaper by creating custom sections, each one drawing on any number of news streams. Custom sections might be created for e-mail and friends' announcements ("Personal"), or for monitoring news feeds for specific topics ("Alerts" or "Clippings").

For each section, the reader optionally specifies its size, either qualitatively (e.g. short,

medium, or long), or numerically (i.e. as a limit on its number of pages), and the desired proportion of advertising, either qualitatively (e.g. high, normal, low, none), or numerically (i.e. as a percentage).

The reader also optionally expresses a preference for a large number of shorter articles or
5 a small number of longer articles. Each article is ideally written (or edited) in both short and long forms to support this preference.

An article may also be written (or edited) in different versions to match the expected sophistication of the reader, for example to provide children's and adults' versions. The appropriate version is selected according to the reader's age. The reader can specify a "reading age" which
10 takes precedence over their biological age.

The articles which make up each section are selected and prioritized by the editors, and each is assigned a useful lifetime. By default they are delivered to all relevant subscribers, in priority order, subject to space constraints in the subscribers' editions.

In sections where it is appropriate, the reader may optionally enable collaborative
15 filtering. This is then applied to articles which have a sufficiently long lifetime. Each article which qualifies for collaborative filtering is printed with rating buttons at the end of the article. The buttons can provide an easy choice (e.g. "liked" and "disliked"), making it more likely that readers will bother to rate the article.

Articles with high priorities and short lifetimes are therefore effectively considered
20 essential reading by the editors and are delivered to most relevant subscribers.

The reader optionally specifies a serendipity factor, either qualitatively (e.g. do or don't
surprise me), or numerically. A high serendipity factor lowers the threshold used for matching during collaborative filtering. A high factor makes it more likely that the corresponding section will be filled to the reader's specified capacity. A different serendipity factor can be specified for
25 different days of the week.

The reader also optionally specifies topics of particular interest within a section, and this modifies the priorities assigned by the editors.

The speed of the reader's Internet connection affects the quality at which images can be delivered. The reader optionally specifies a preference for fewer images or smaller images or both.
30 If the number or size of images is not reduced, then images may be delivered at lower quality (i.e. at lower resolution or with greater compression).

At a global level, the reader specifies how quantities, dates, times and monetary values

are localized. This involves specifying whether units are imperial or metric, a local timezone and time format, and a local currency, and whether the localization consist of in situ translation or annotation. These preferences are derived from the reader's locality by default.

To reduce reading difficulties caused by poor eyesight, the reader optionally specifies a
5 global preference for a larger presentation. Both text and images are scaled accordingly, and less information is accommodated on each page.

The language in which a news publication is published, and its corresponding text encoding, is a property of the publication and not a preference expressed by the user. However, the netpage system can be configured to provide automatic translation services in various guises.

10 ADVERTISING LOCALIZATION AND TARGETING

The personalization of the editorial content directly affects the advertising content, because advertising is typically placed to exploit the editorial context. Travel ads, for example, are more likely to appear in a travel section than elsewhere. The value of the editorial content to an advertiser (and therefore to the publisher) lies in its ability to attract large numbers of readers with
15 the right demographics.

Effective advertising is placed on the basis of locality and demographics. Locality determines proximity to particular services, retailers etc., and particular interests and concerns associated with the local community and environment. Demographics determine general interests and preoccupations as well as likely spending patterns.

20 A news publisher's most profitable product is advertising "space", a multi-dimensional entity determined by the publication's geographic coverage, the size of its readership, its readership demographics, and the page area available for advertising.

In the netpage system, the netpage publication server computes the approximate multi-dimensional size of a publication's saleable advertising space on a per-section basis, taking into
25 account the publication's geographic coverage, the section's readership, the size of each reader's section edition, each reader's advertising proportion, and each reader's demographic.

In comparison with other media, the netpage system allows the advertising space to be defined in greater detail, and allows smaller pieces of it to be sold separately. It therefore allows it to be sold at closer to its true value.

30 For example, the same advertising "slot" can be sold in varying proportions to several advertisers, with individual readers' pages randomly receiving the advertisement of one advertiser or another, overall preserving the proportion of space sold to each advertiser.

The netpage system allows advertising to be linked directly to detailed product information and online purchasing. It therefore raises the intrinsic value of the advertising space.

Because personalization and localization are handled automatically by netpage publication servers, an advertising aggregator can provide arbitrarily broad coverage of both
5 geography and demographics. The subsequent disaggregation is efficient because it is automatic. This makes it more cost-effective for publishers to deal with advertising aggregators than to directly capture advertising. Even though the advertising aggregator is taking a proportion of advertising revenue, publishers may find the change profit-neutral because of the greater efficiency of aggregation. The advertising aggregator acts as an intermediary between advertisers and
10 publishers, and may place the same advertisement in multiple publications.

It is worth noting that ad placement in a netpage publication can be more complex than ad placement in the publication's traditional counterpart, because the publication's advertising space is more complex. While ignoring the full complexities of negotiations between advertisers, advertising aggregators and publishers, the preferred form of the netpage system provides some
15 automated support for these negotiations, including support for automated auctions of advertising space. Automation is particularly desirable for the placement of advertisements which generate small amounts of income, such as small or highly localized advertisements.

Once placement has been negotiated, the aggregator captures and edits the advertisement and records it on a netpage ad server. Correspondingly, the publisher records the ad placement on
20 the relevant netpage publication server. When the netpage publication server lays out each user's personalized publication, it picks the relevant advertisements from the netpage ad server.

INTERSTITIAL ADVERTISING

The netpage system provides a mechanism whereby advertising can be placed automatically in otherwise empty space in a document. A typical netpage interaction sequence is
25 likely to print many single pages where the reverse side of the page is empty.

Advertising can be placed in space within a document, particularly the reverse side of a netpage sheet where the reverse side is otherwise empty. The advertising is non-intrusive, and although it may not be seen immediately, it persists on the page and may be seen later.

With reference to Figure 6, a document page 500 may have page content 501 at the top of
30 the page and empty space at the bottom of the page. Figure 6 illustrates an example of the placement of an advertisement 502 in empty space on the same page of the document.

With reference to Figure 7, a document page 503 may have page content 504 filling the

front page, and may be blank on the reverse side 505 of the page. Figure 7 illustrates an example of the placement of an advertisement 506 on the otherwise empty reverse side of a document.

The advertising can be placed in personalized publications, or any netpage document, as long as there is space available. However, as usual, this advertising is the most effective when
5 targeted to the user, i.e. demographically based.

Ownership of this "interstitial" advertising space can lie with the application provider that provides the document content, or with the infrastructure provider involved in document delivery, such as the printer provider. In any case the advertising can be chosen in various ways to relate to the content of the page or document.

10 CONCLUSION

The present invention has been described with reference to a preferred embodiment and number of specific alternative embodiments. However, it will be appreciated by those skilled in the relevant fields that a number of other embodiments, differing from those specifically described, will also fall within the spirit and scope of the present invention. Accordingly, it will be understood
15 that the invention is not intended to be limited to the specific embodiments described in the present specification, including documents as appropriate. The scope of the invention is only limited by the attached claims.

CLAIMS

1. A method of producing a document by formatting user requested information in the document so as to include one user interactive element, to allow the user to effect a response to the information, using a sensing device for transmitting response data back to a computer system, including:

identifying an advertising space, outside an area of the document to be occupied by the information; and

printing the document with advertising material in the space.

2. A method as claimed in claim 1, wherein the advertising space is determined to be on a reverse side of the document relative to the user requested information.

3. A method as claimed in claim 1 or 2 wherein the information is formatted at a publication server of the computer system and the method includes the publication server monitoring the said area and, once the space is identified, receiving the advertising material from an advertising server, for inclusion in the document.

4. A method as claimed in claim 1, wherein the document is printed with coded data, for sensing by the sensing device, indicative of an identity of the document and of the at least one interactive element.

5. A method as claimed in claim 4, wherein the document is printed on a surface defining structure at the same time as the coded data is printed on the surfaces.

6. A method as claimed in claim 5, which includes printing the coded data to be substantially invisible in the visible spectrum.

7. A method as claimed in claim 4, including retaining a retrievable record of the printed document, the document being retrievable using the identity data as contained in the coded data.

8. A method as claimed in claim 1, wherein the sensing device includes an identification code specific to a particular user and the method includes monitoring use of the sensing device in the computer system.

9. A system for producing a document, including :

a computer system for formatting user requested information in the document so as to include at least one user interactive element, to allow the user to effect a response to the

information, using a sensing device for transmitting response data back to the computer system, wherein the computer system is arranged to identify an advertising space, outside an area of the document to be occupied by the information and to effect printing of the document with advertising material in said space.

5 10. A system as claimed in claim 9, further including a printer adapted to print on both sides of the document, in order to print the advertising material on a reverse side of the document, relative to the user requested information.

10 11. A system as claimed in claim 9, wherein the computer system includes a publication server for formatting the document and an advertising server for providing the advertising material, wherein the publication server monitors said area and receives advertising material from the advertising server, for inclusion in the document.

12. A system as claimed in claim 9, wherein the document includes coded data indicative of an identity of the document and of the at least one interactive element.

15 13. A system as claimed in claim 12, wherein the printer is arranged to print the coded data at the same time as printing the document on a surface defining structure.

14. A system as claimed in claim 12, wherein the coded data is substantially invisible in the visible spectrum.

20 15. A system as claimed in claim 12, including a database for keeping a retrievable record of each document generated, each document being retrievable by using its identity, as included in the coded data.

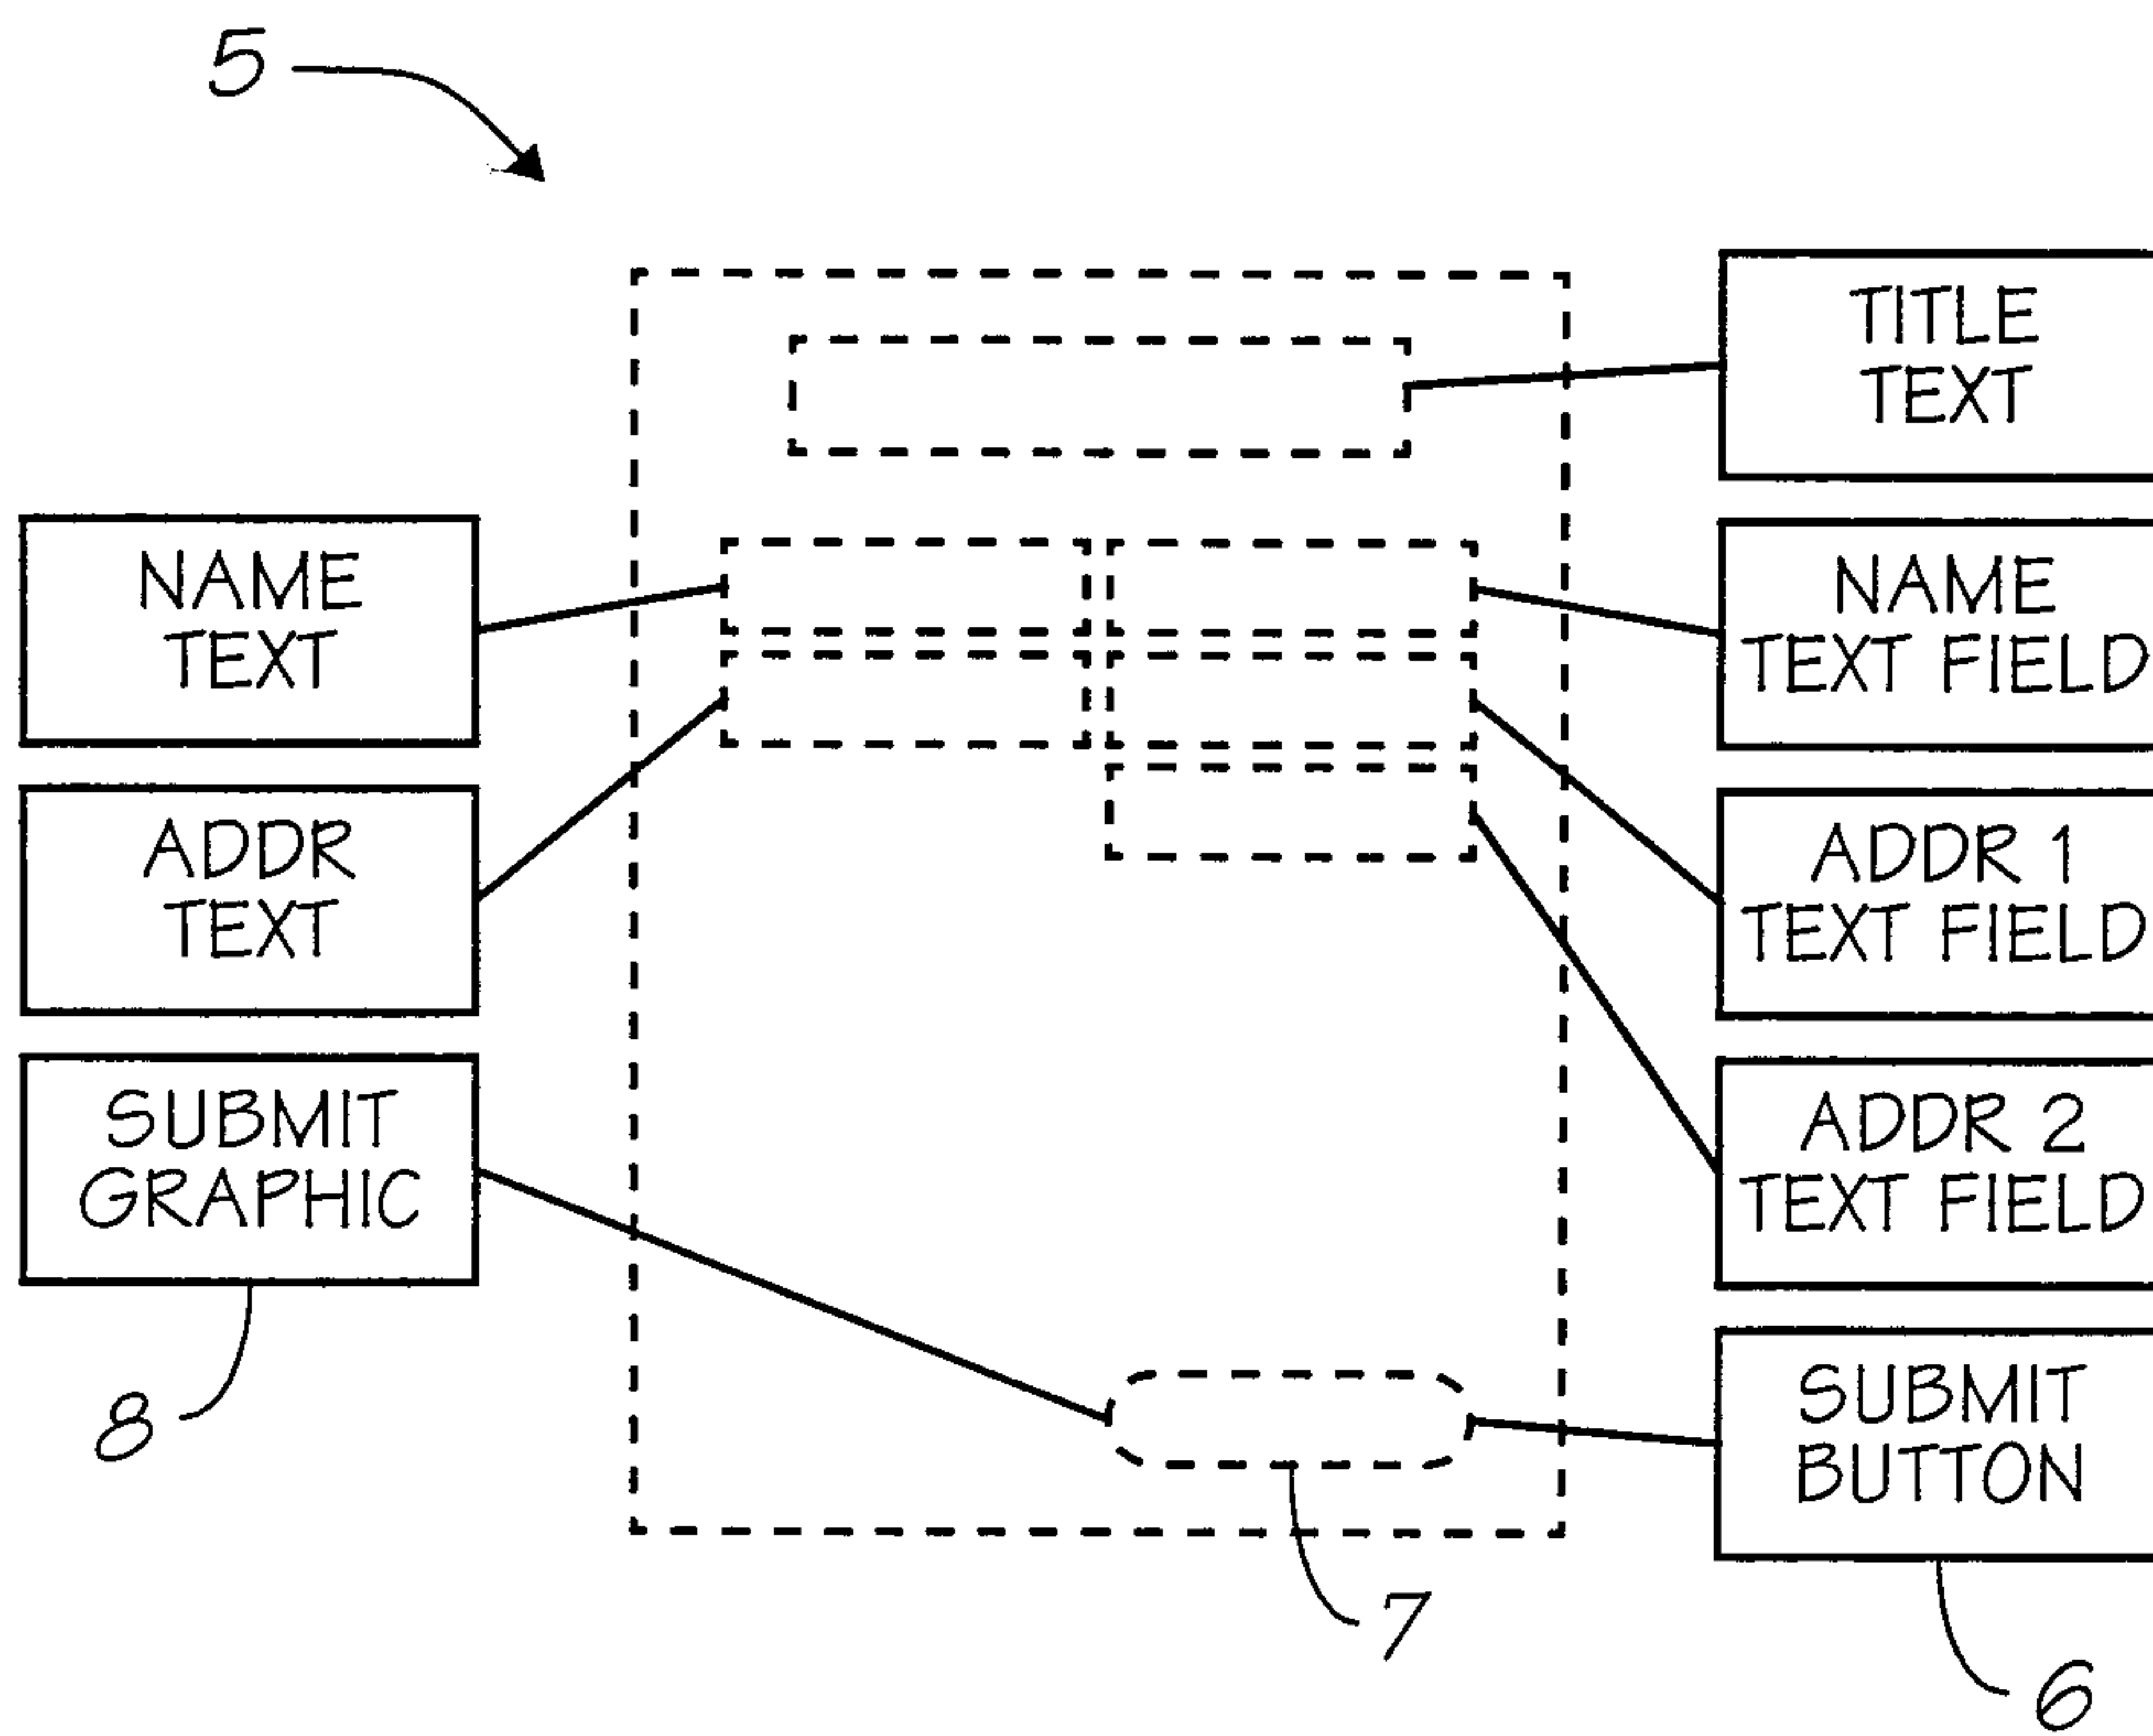
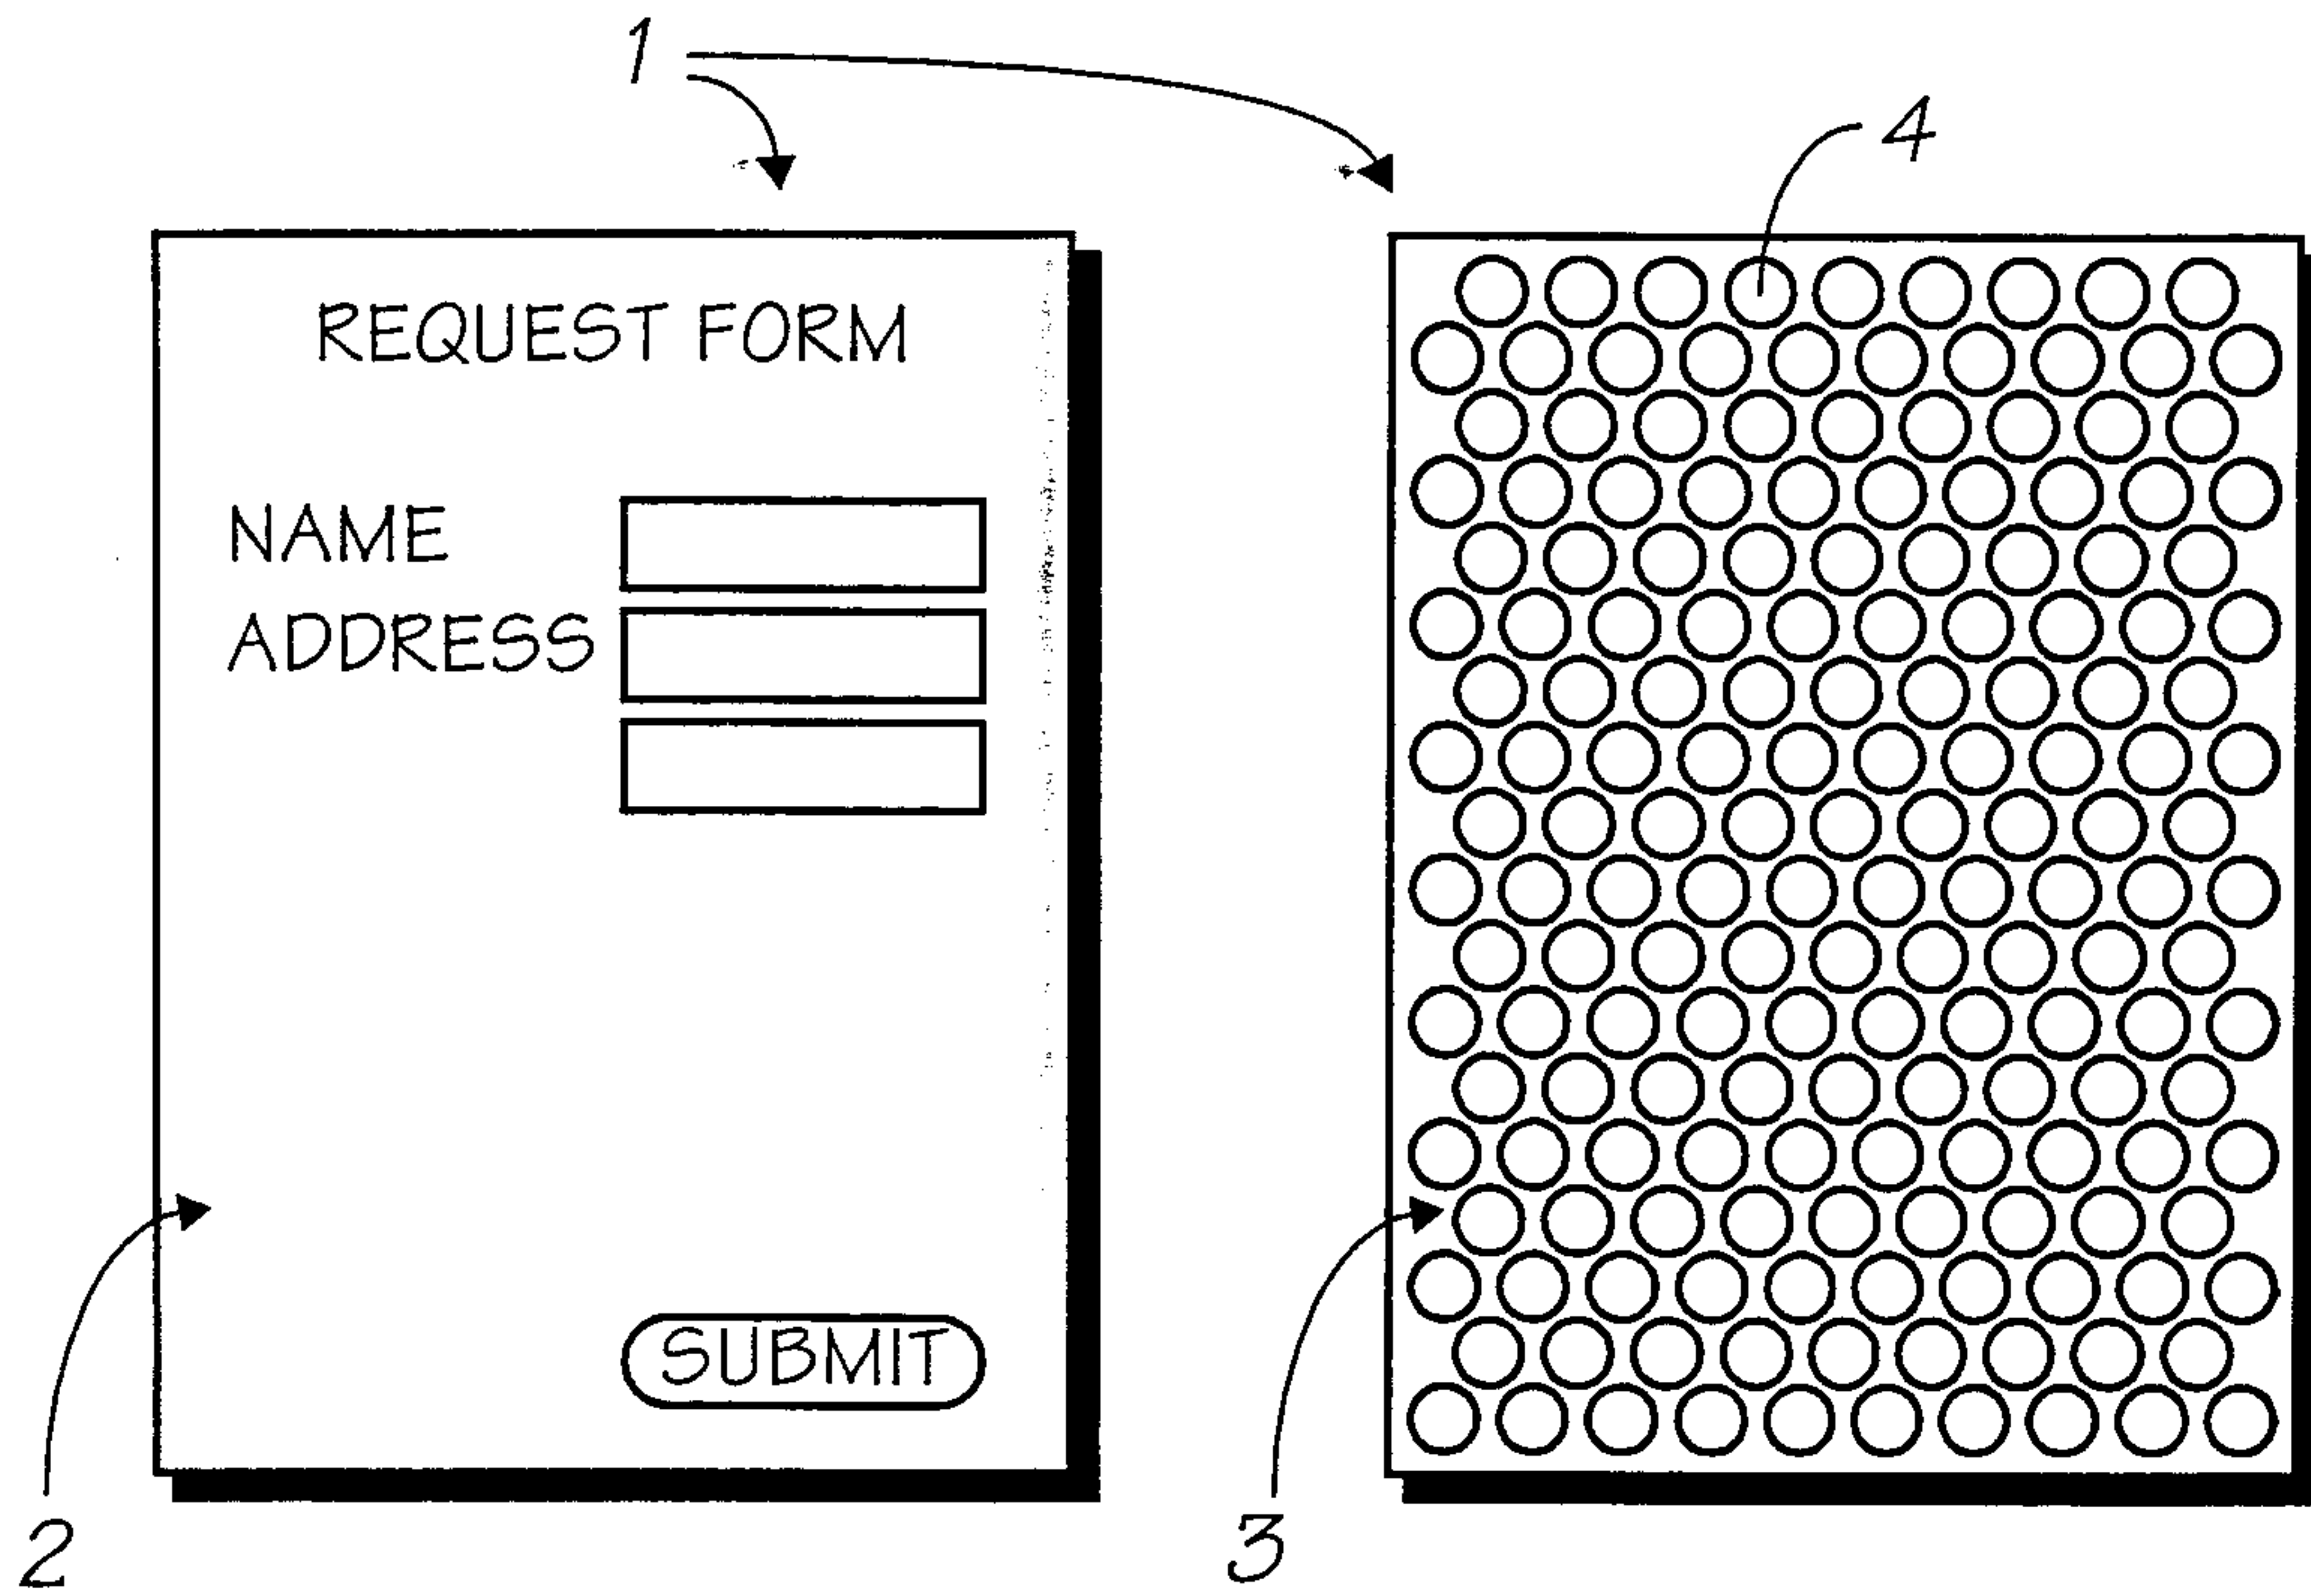


FIG. 1

2/8

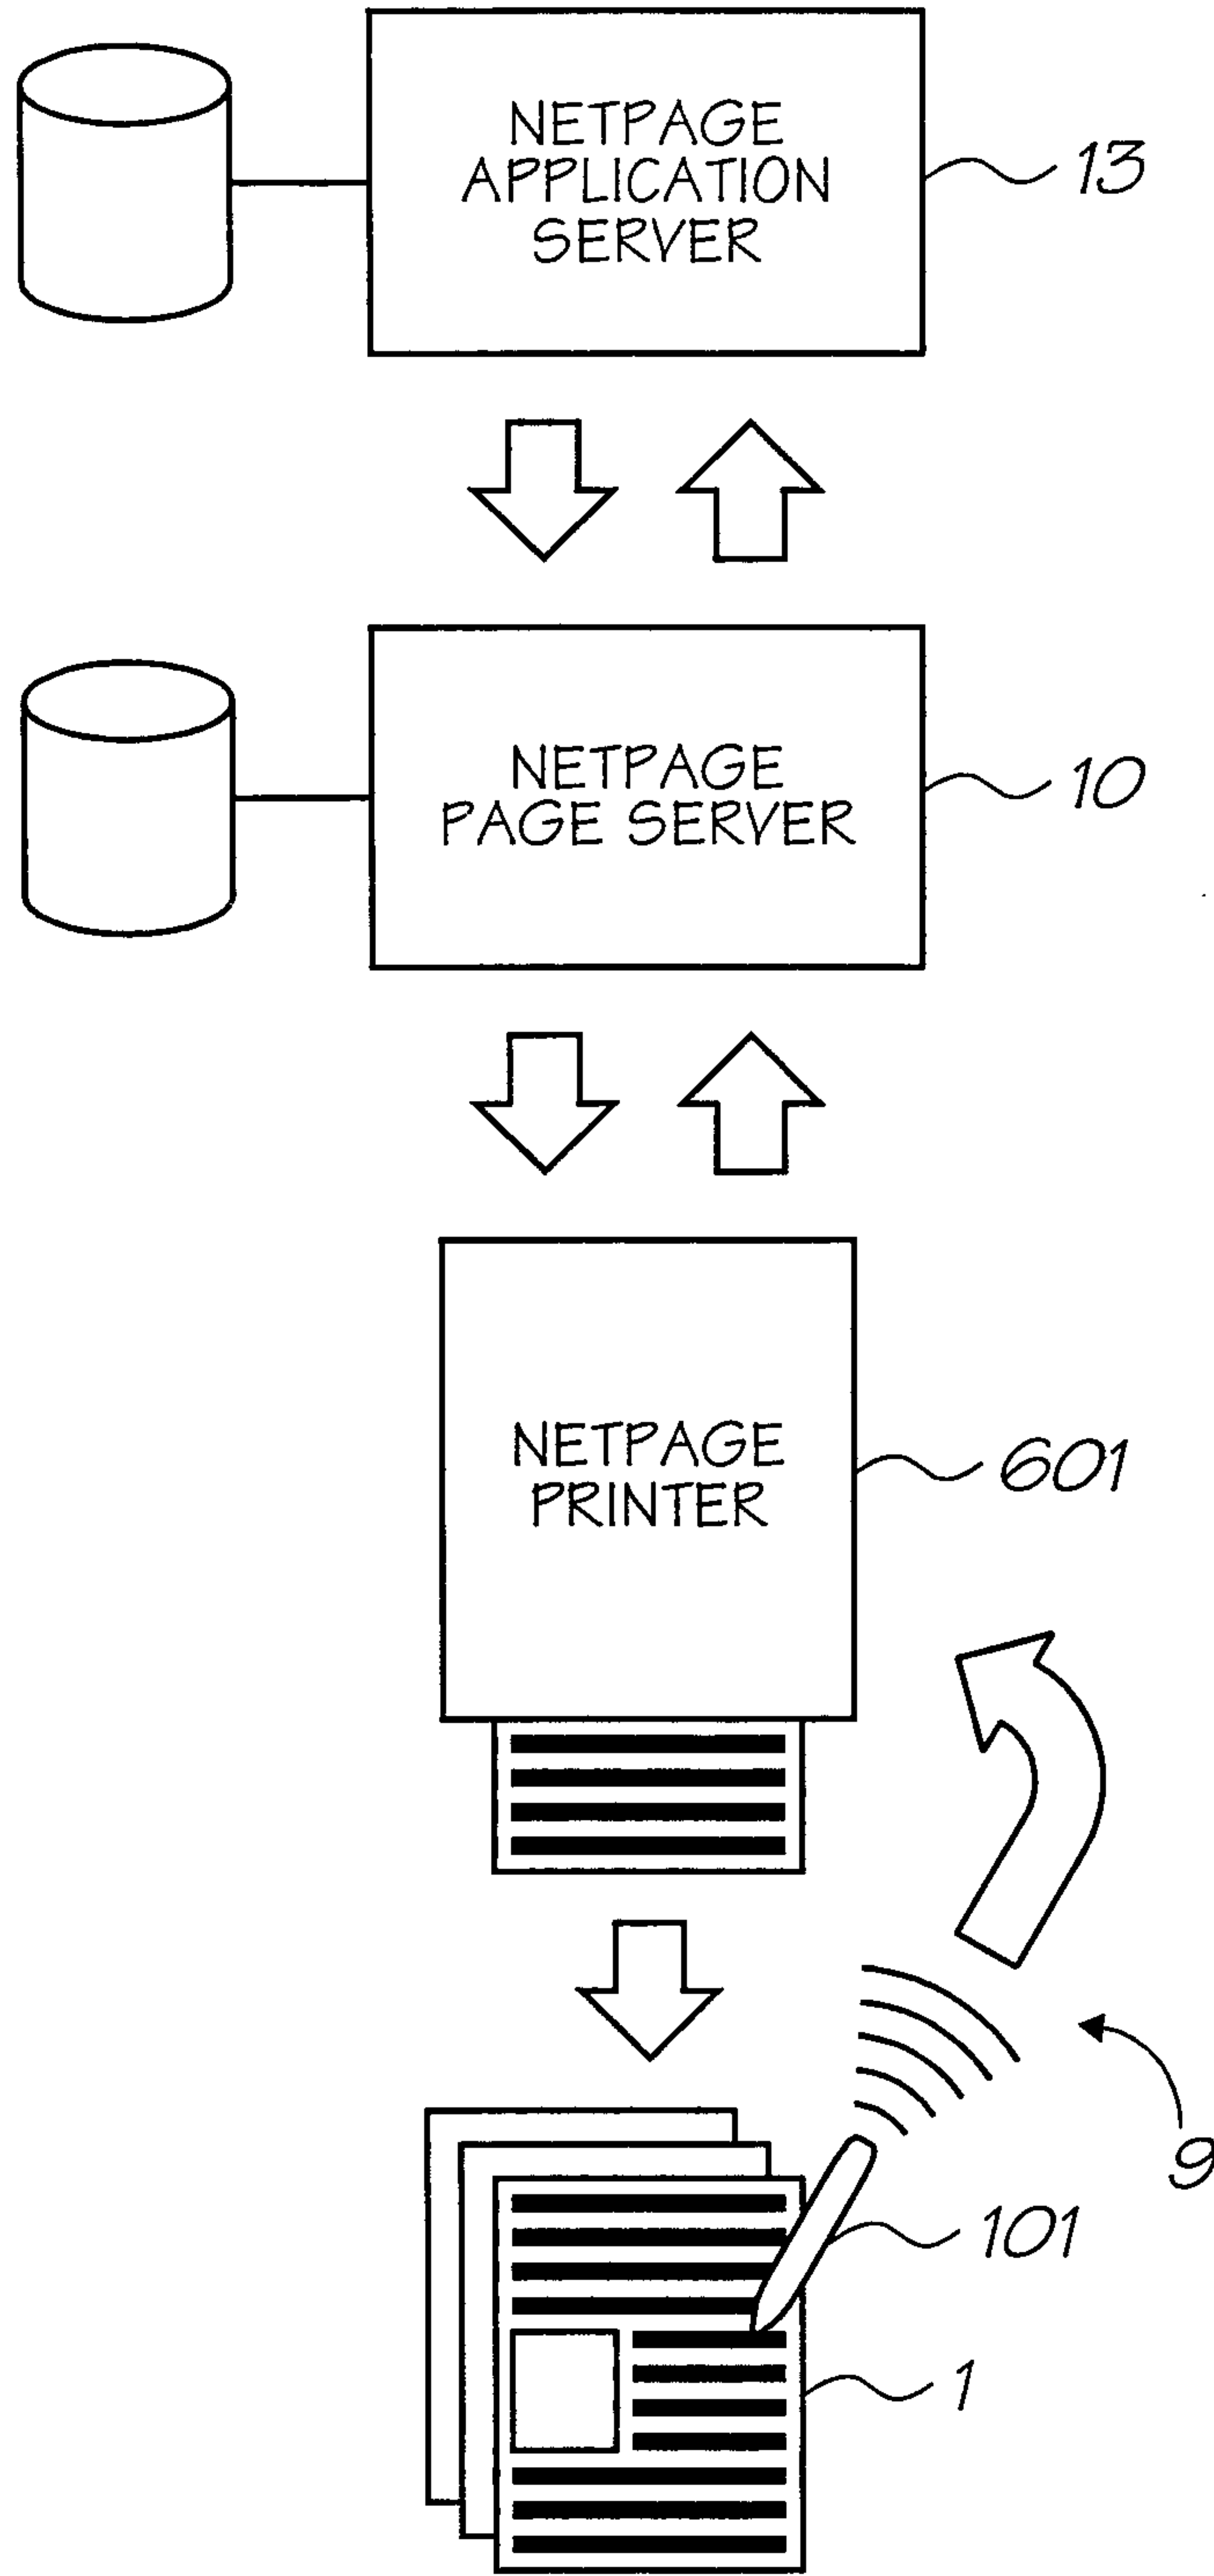


FIG. 2

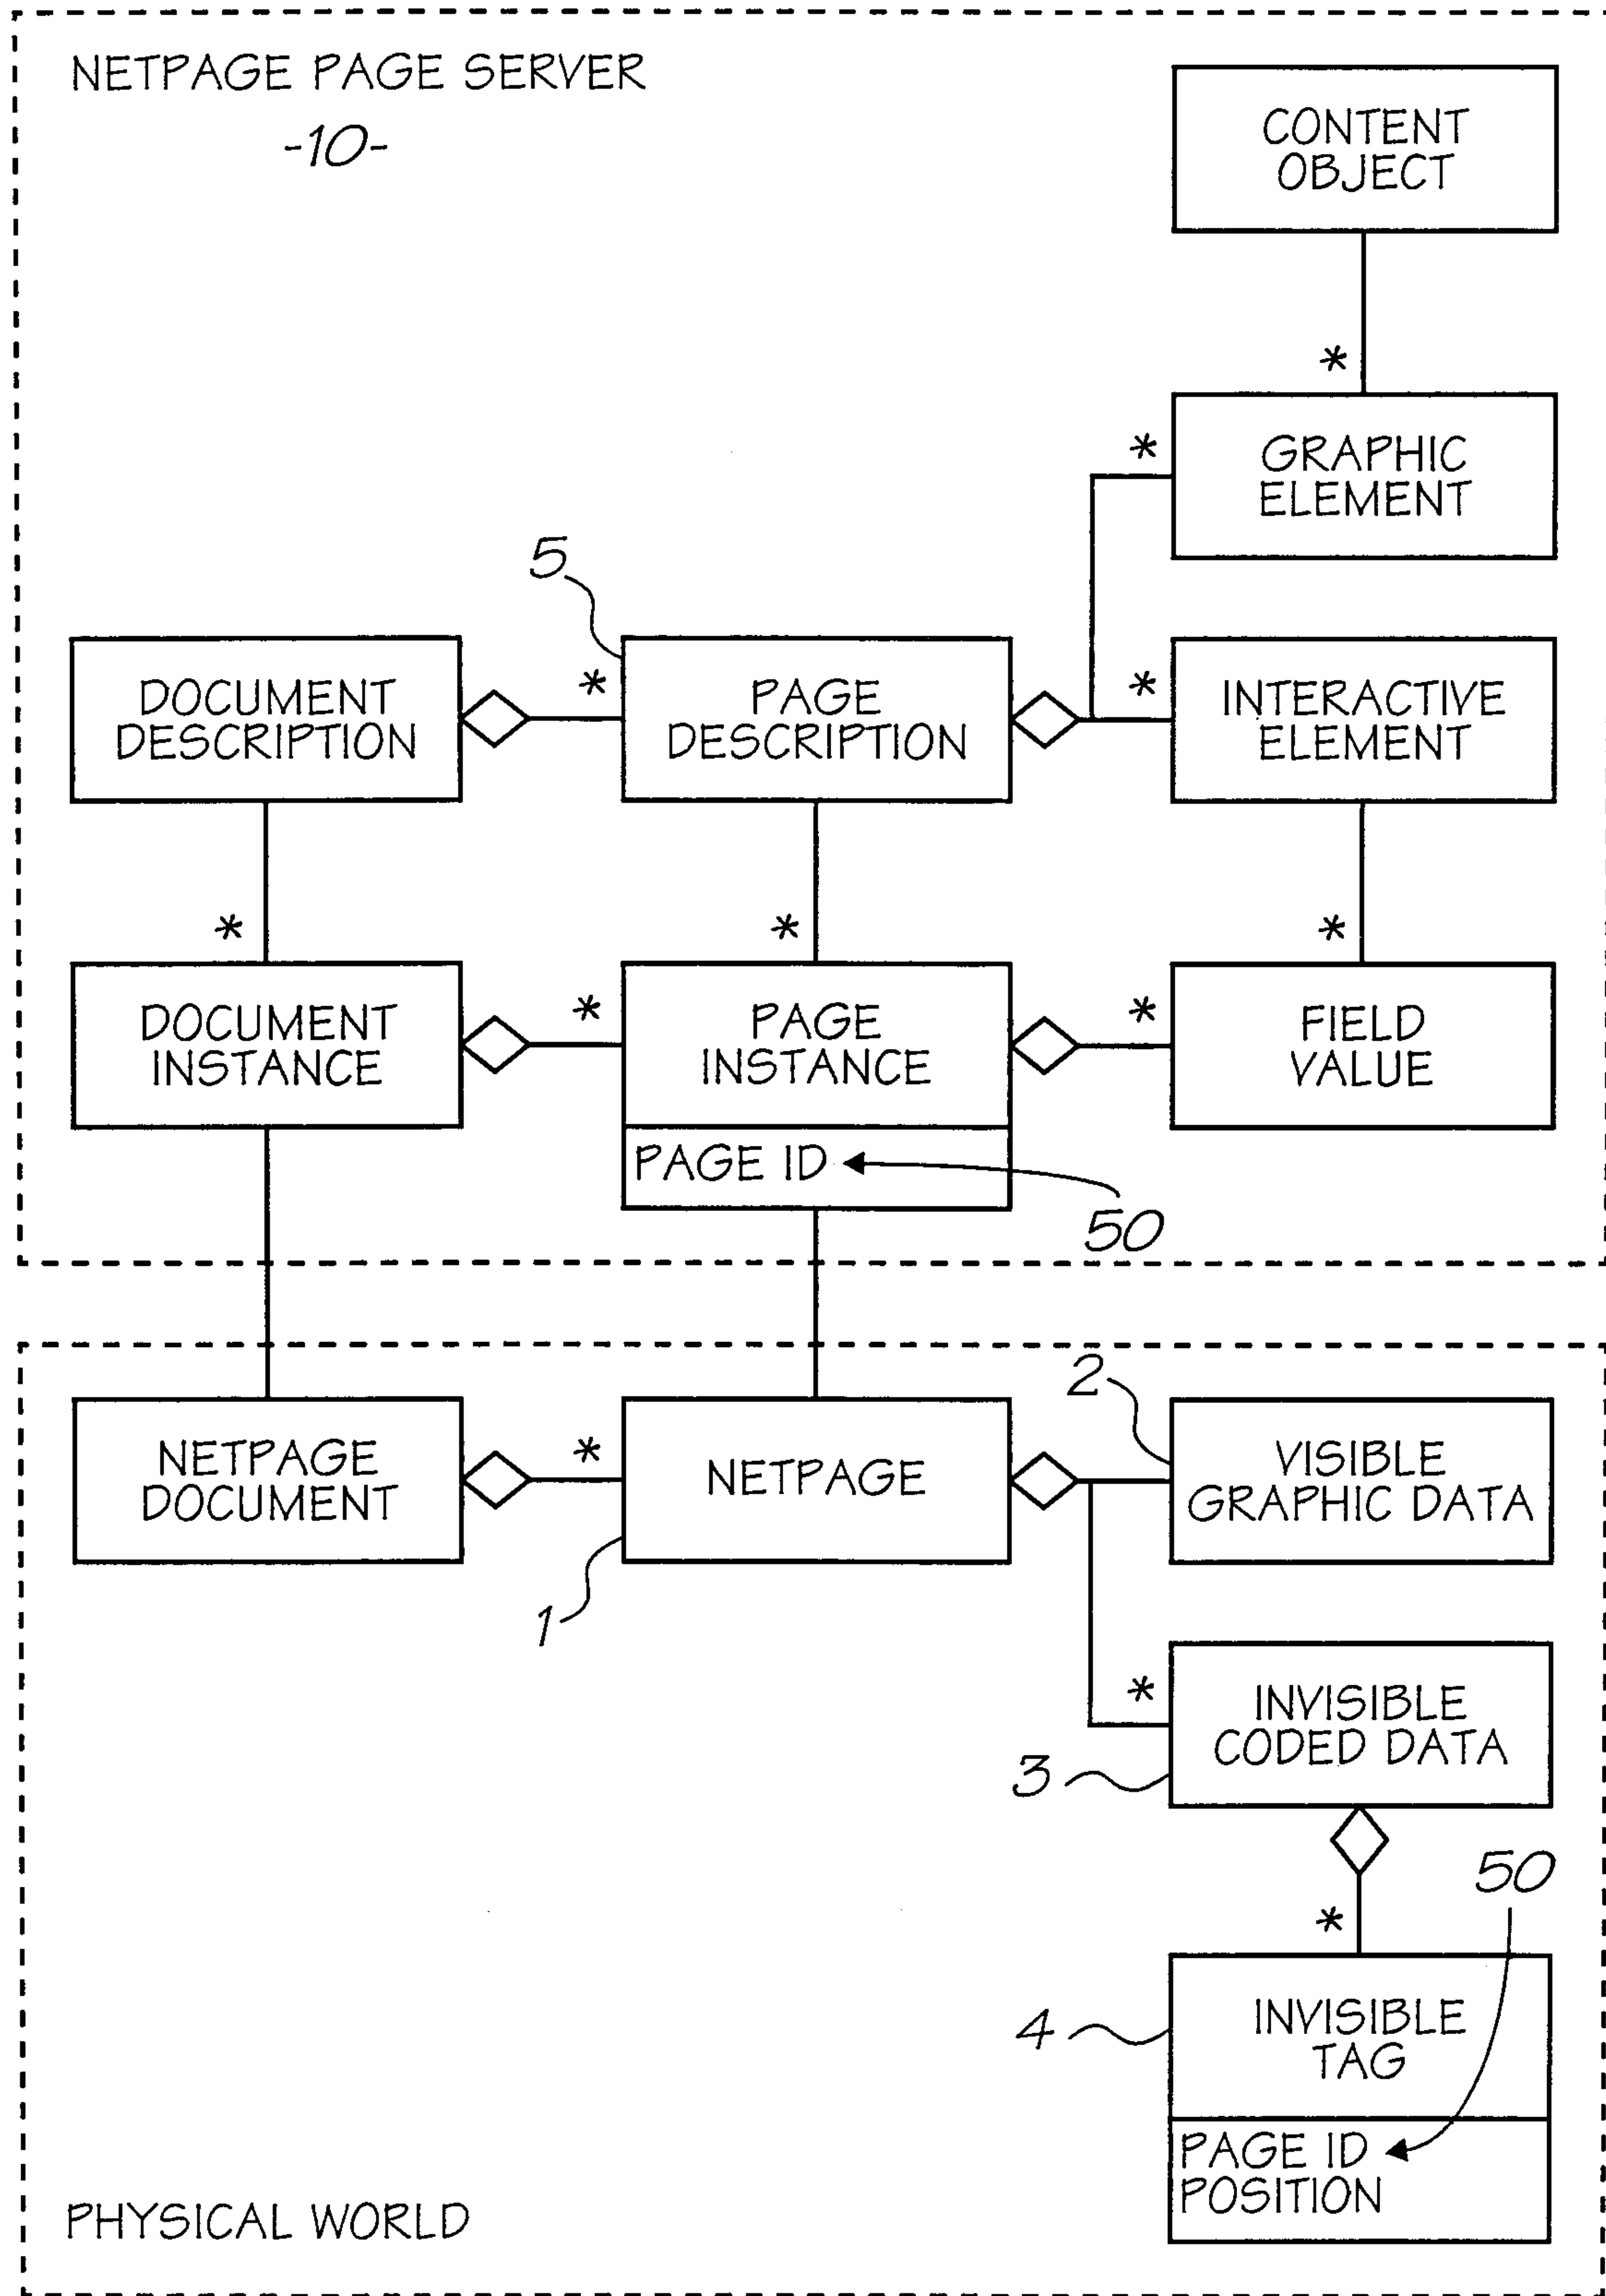


FIG. 3

4/8

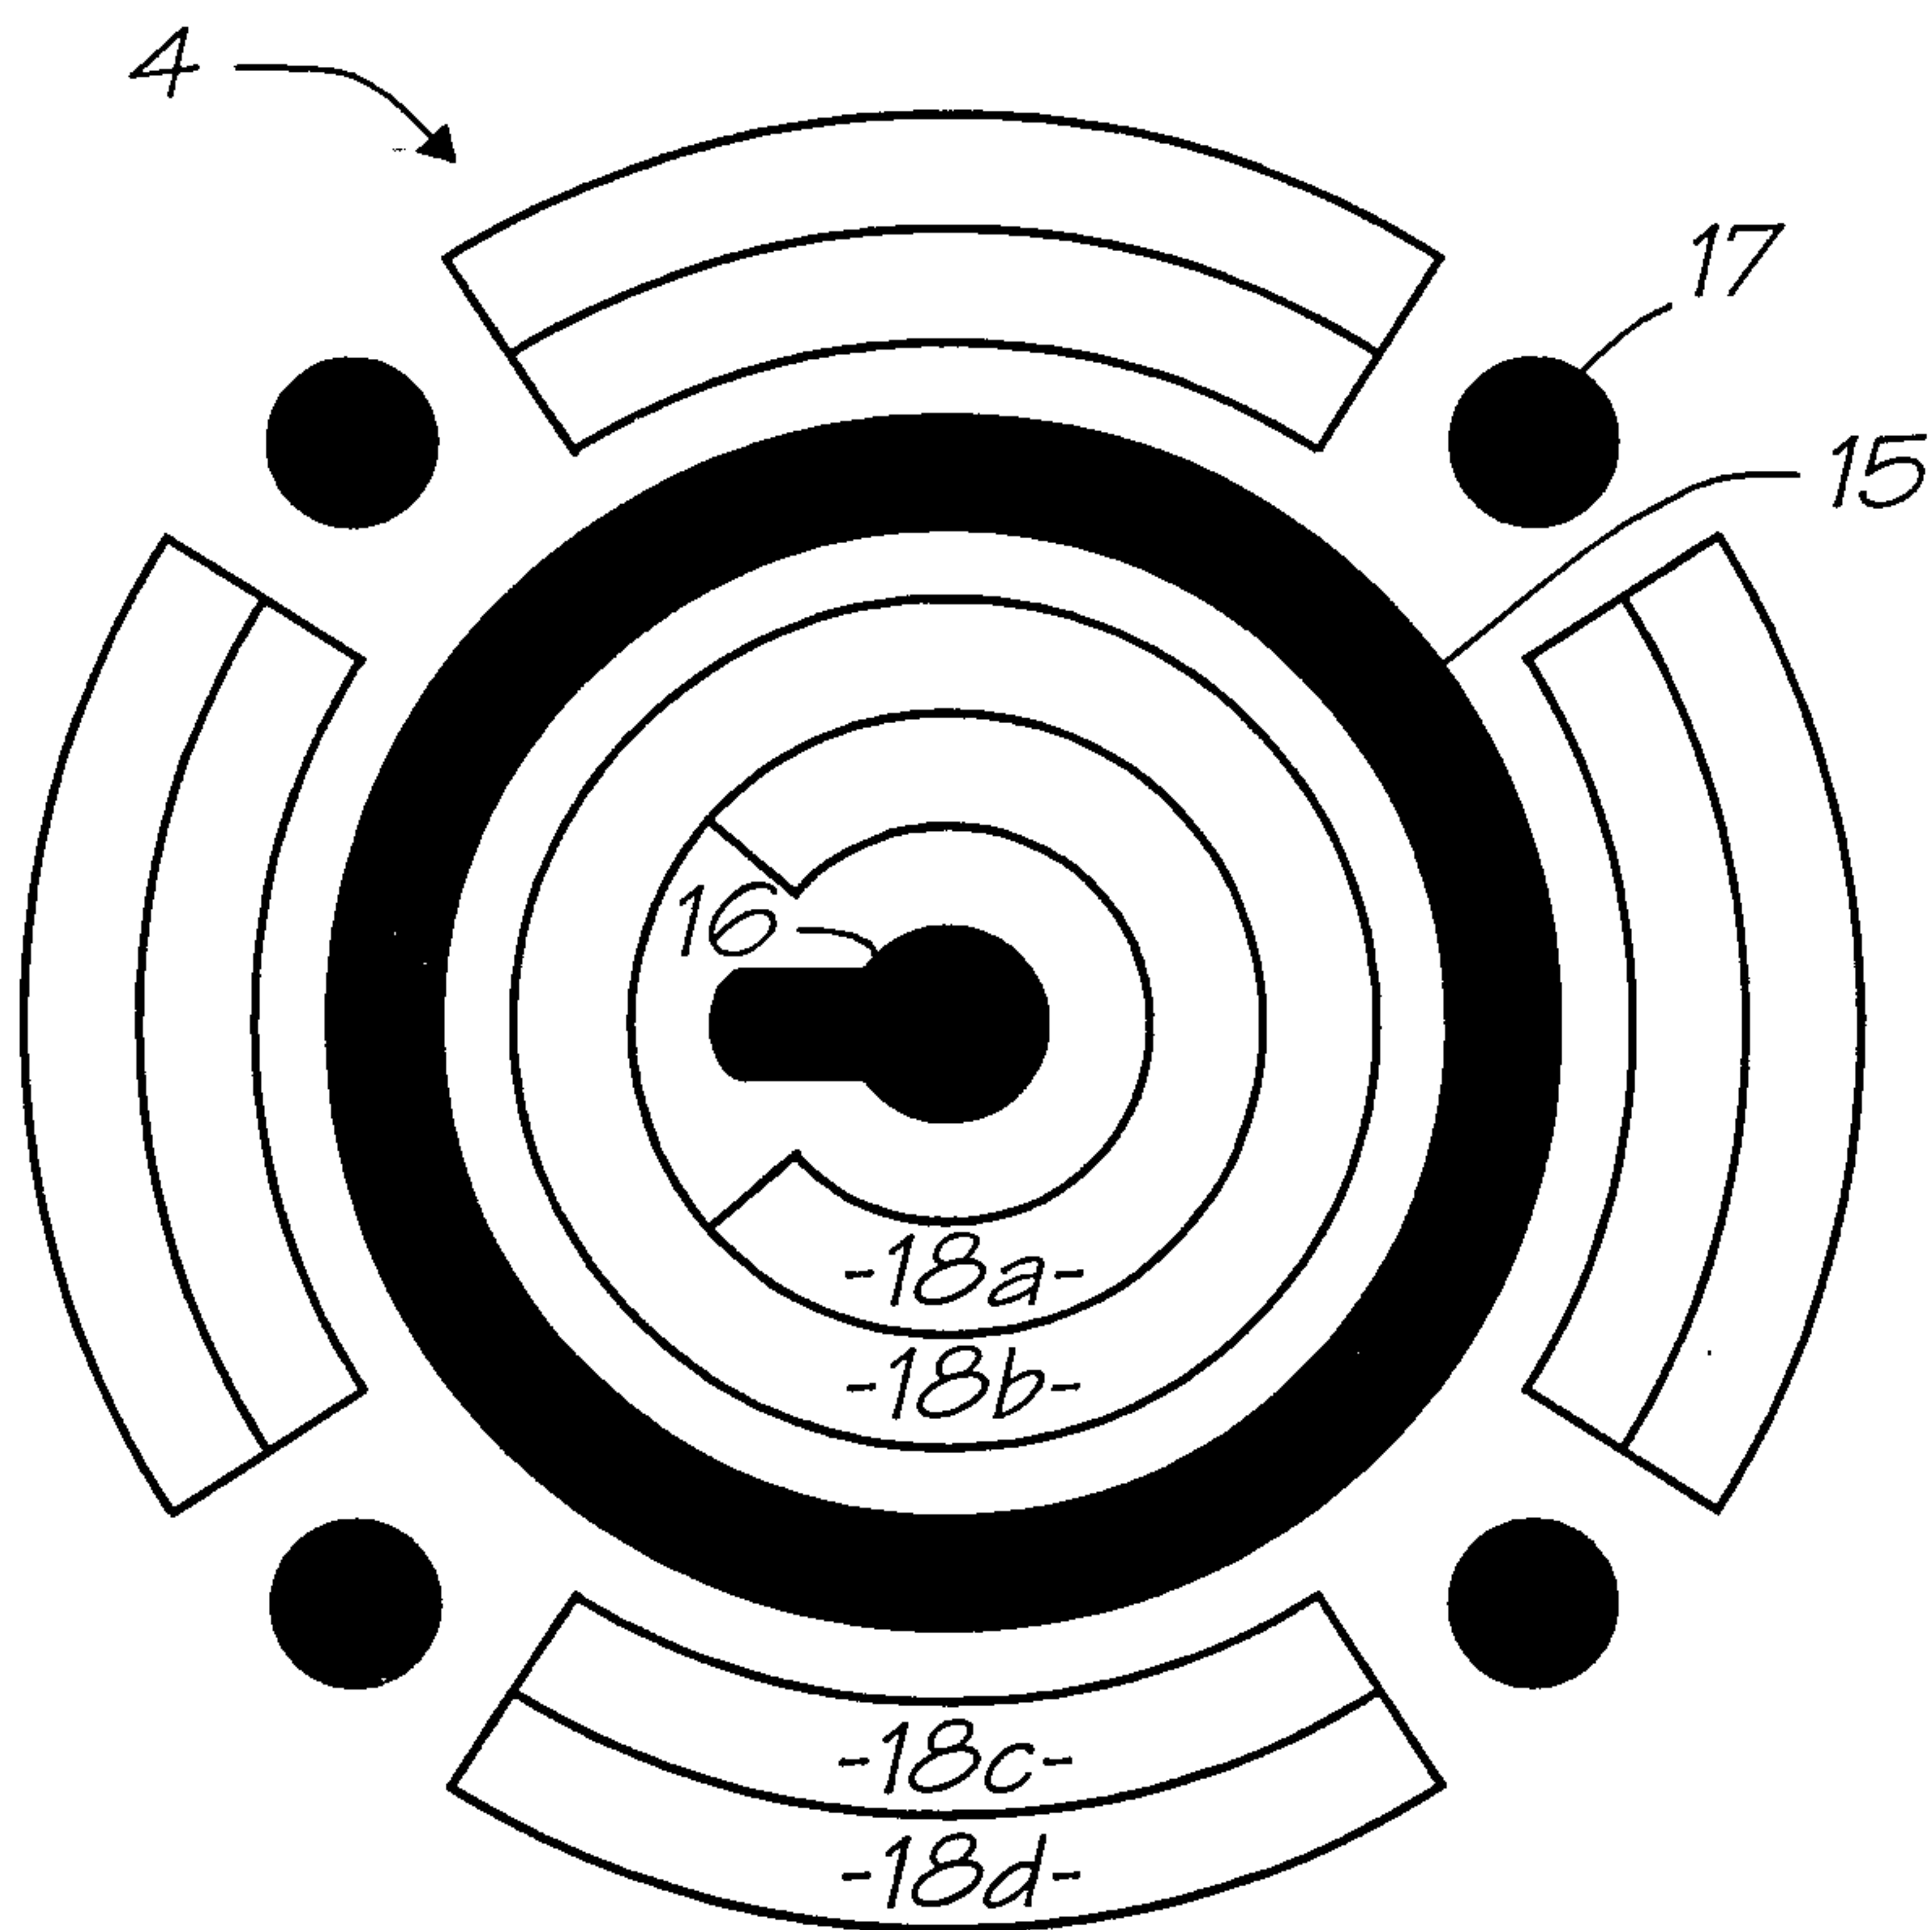


FIG. 4a

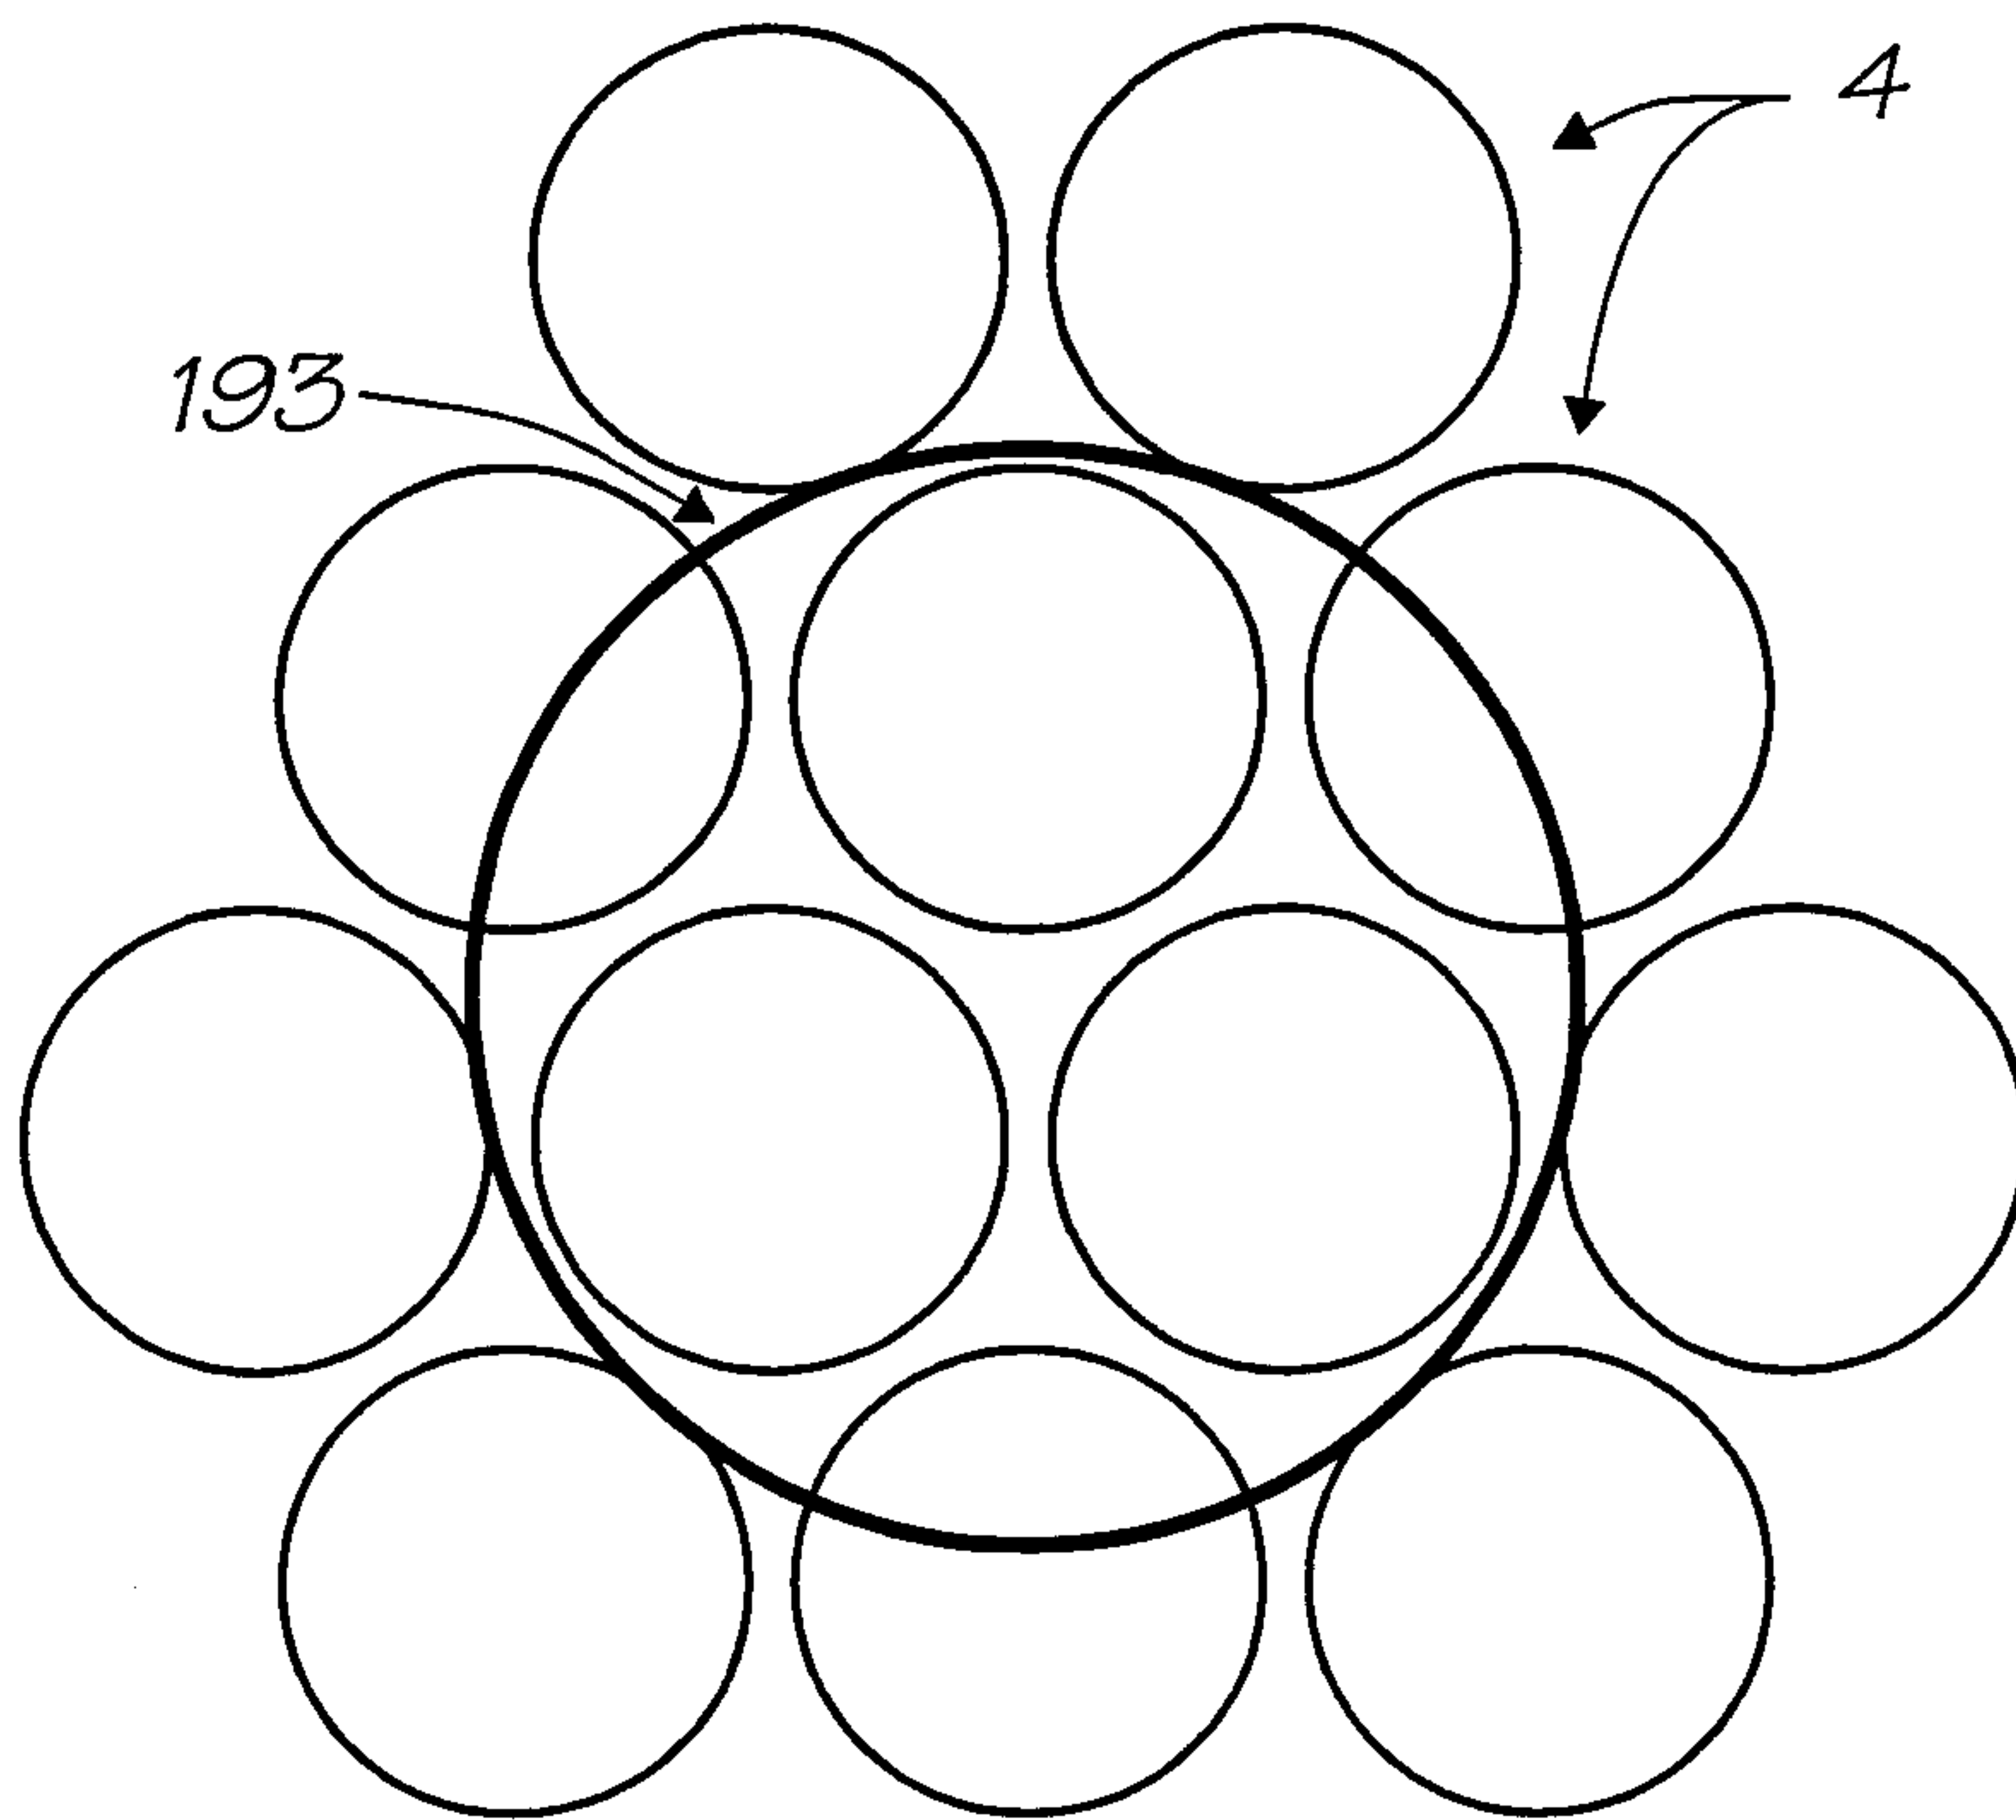


FIG. 4b

5/8

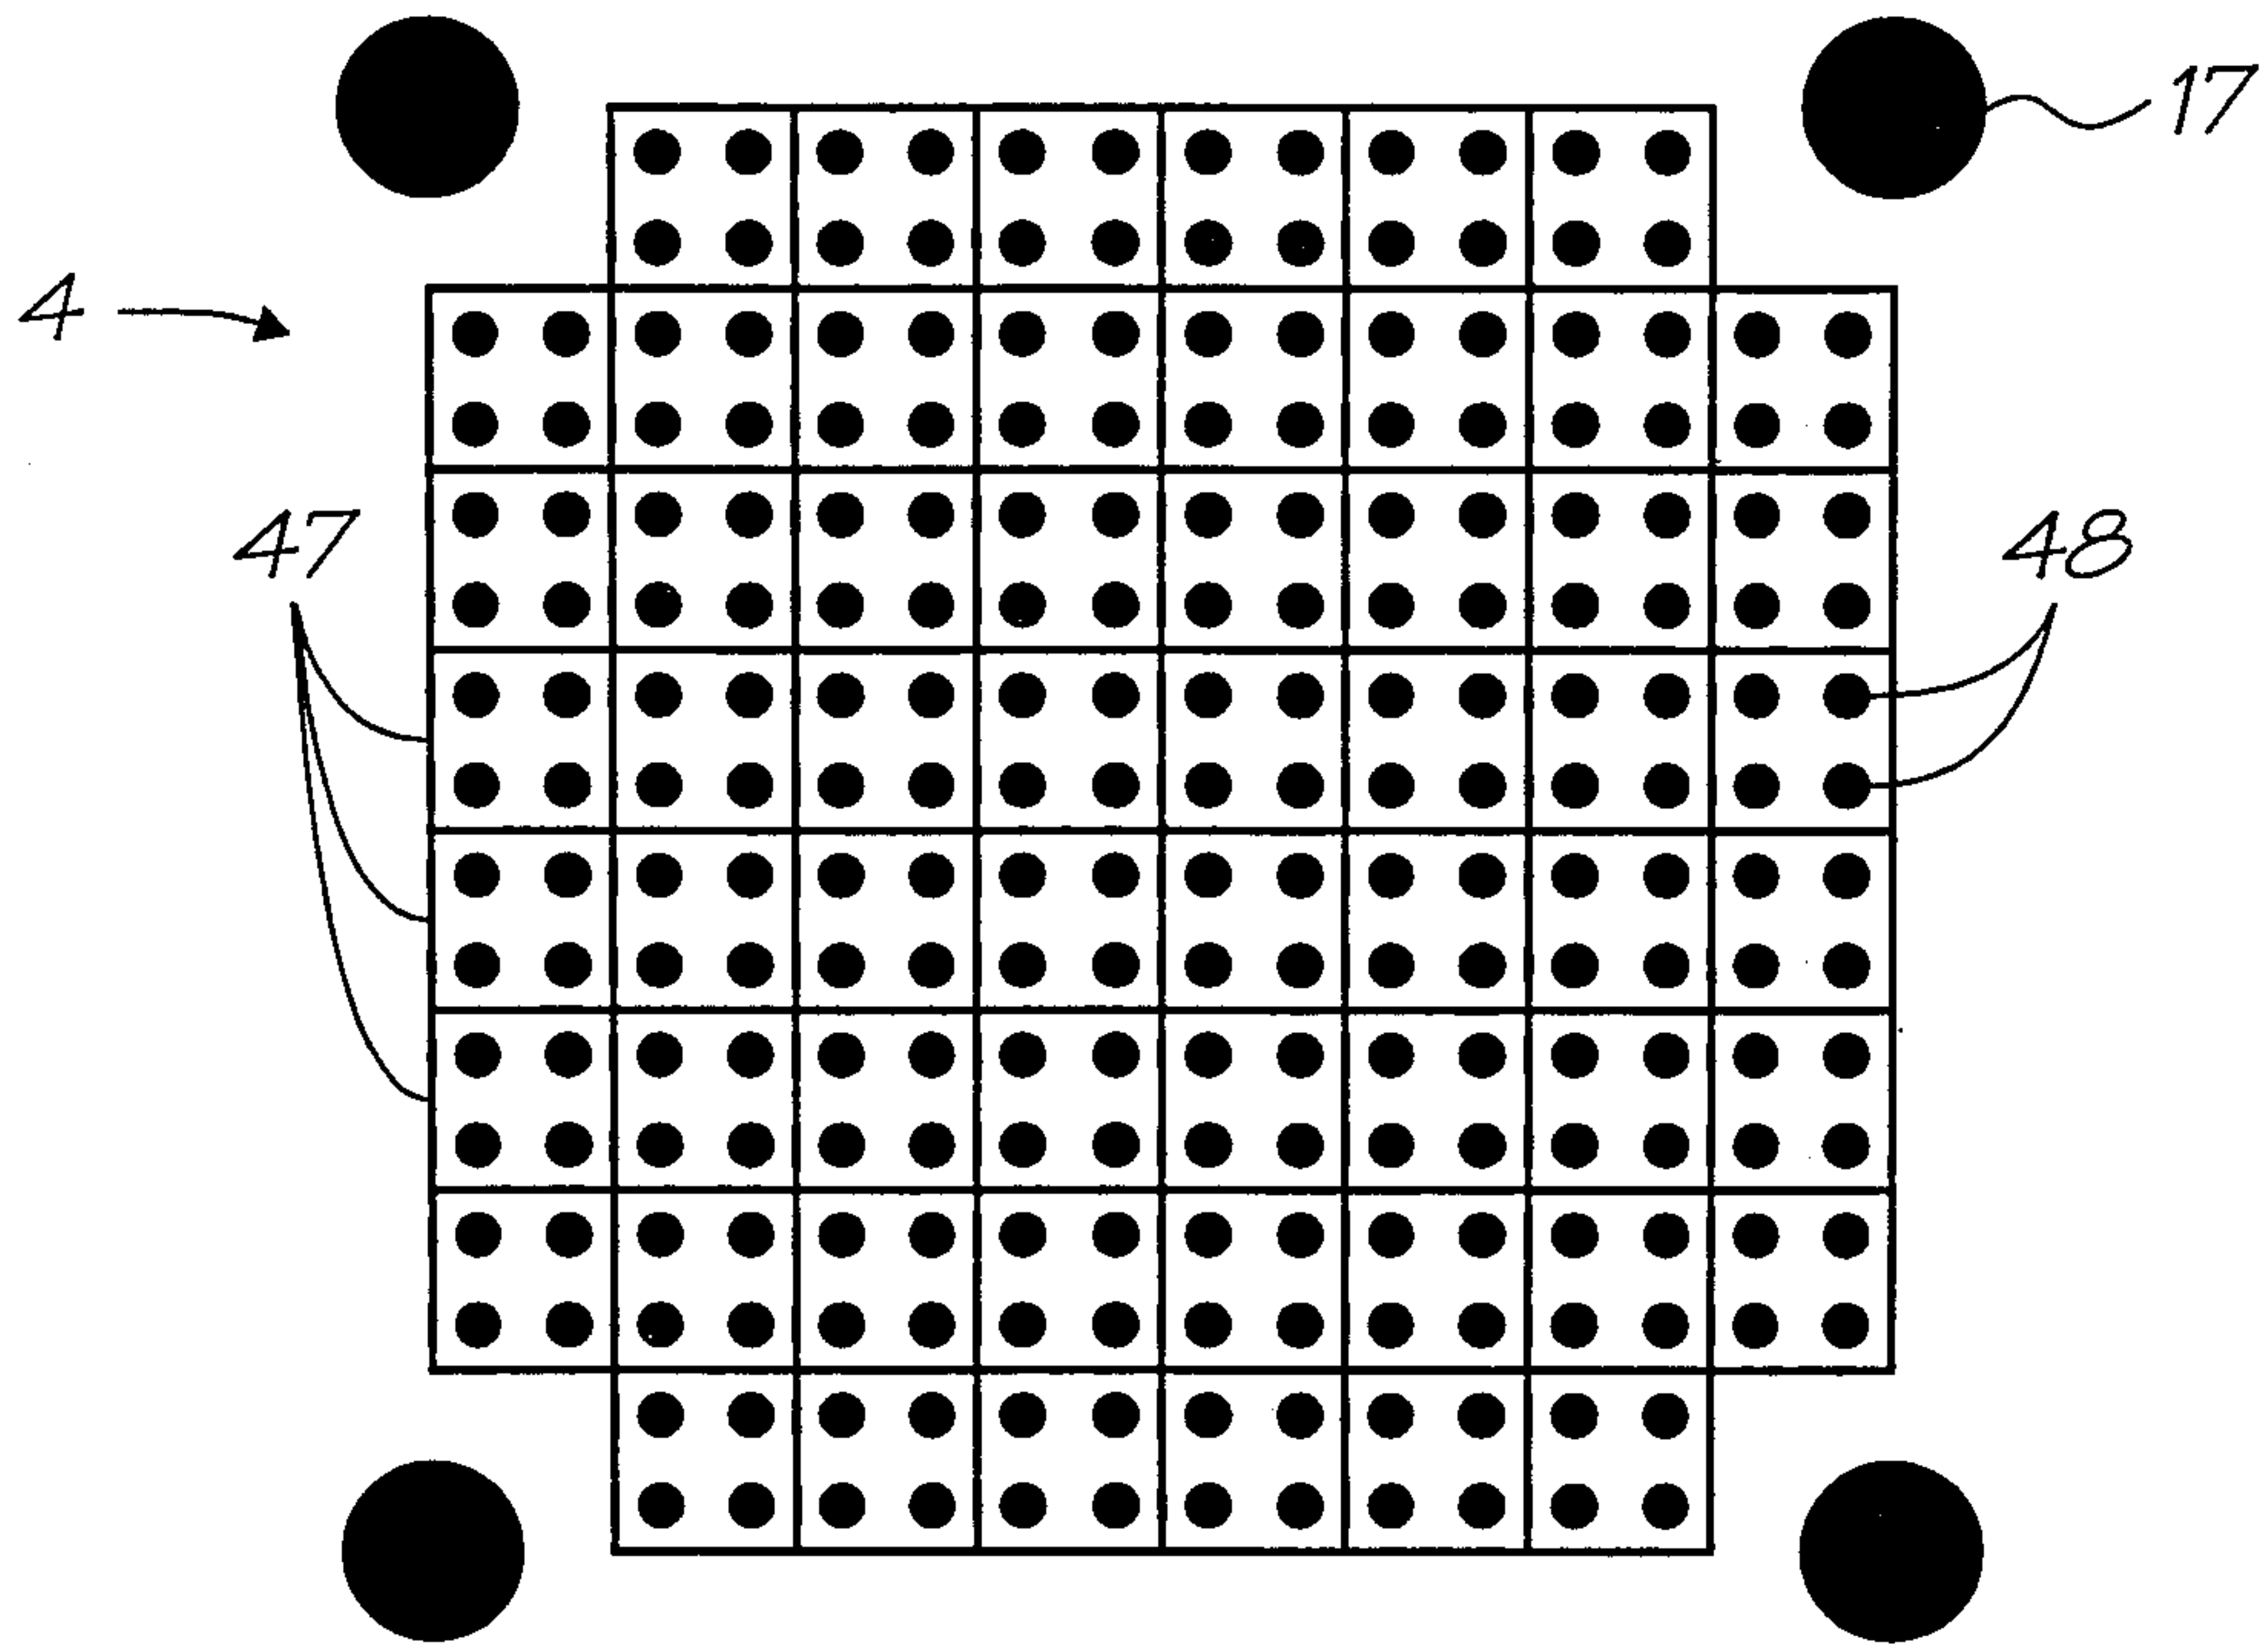


FIG. 5a

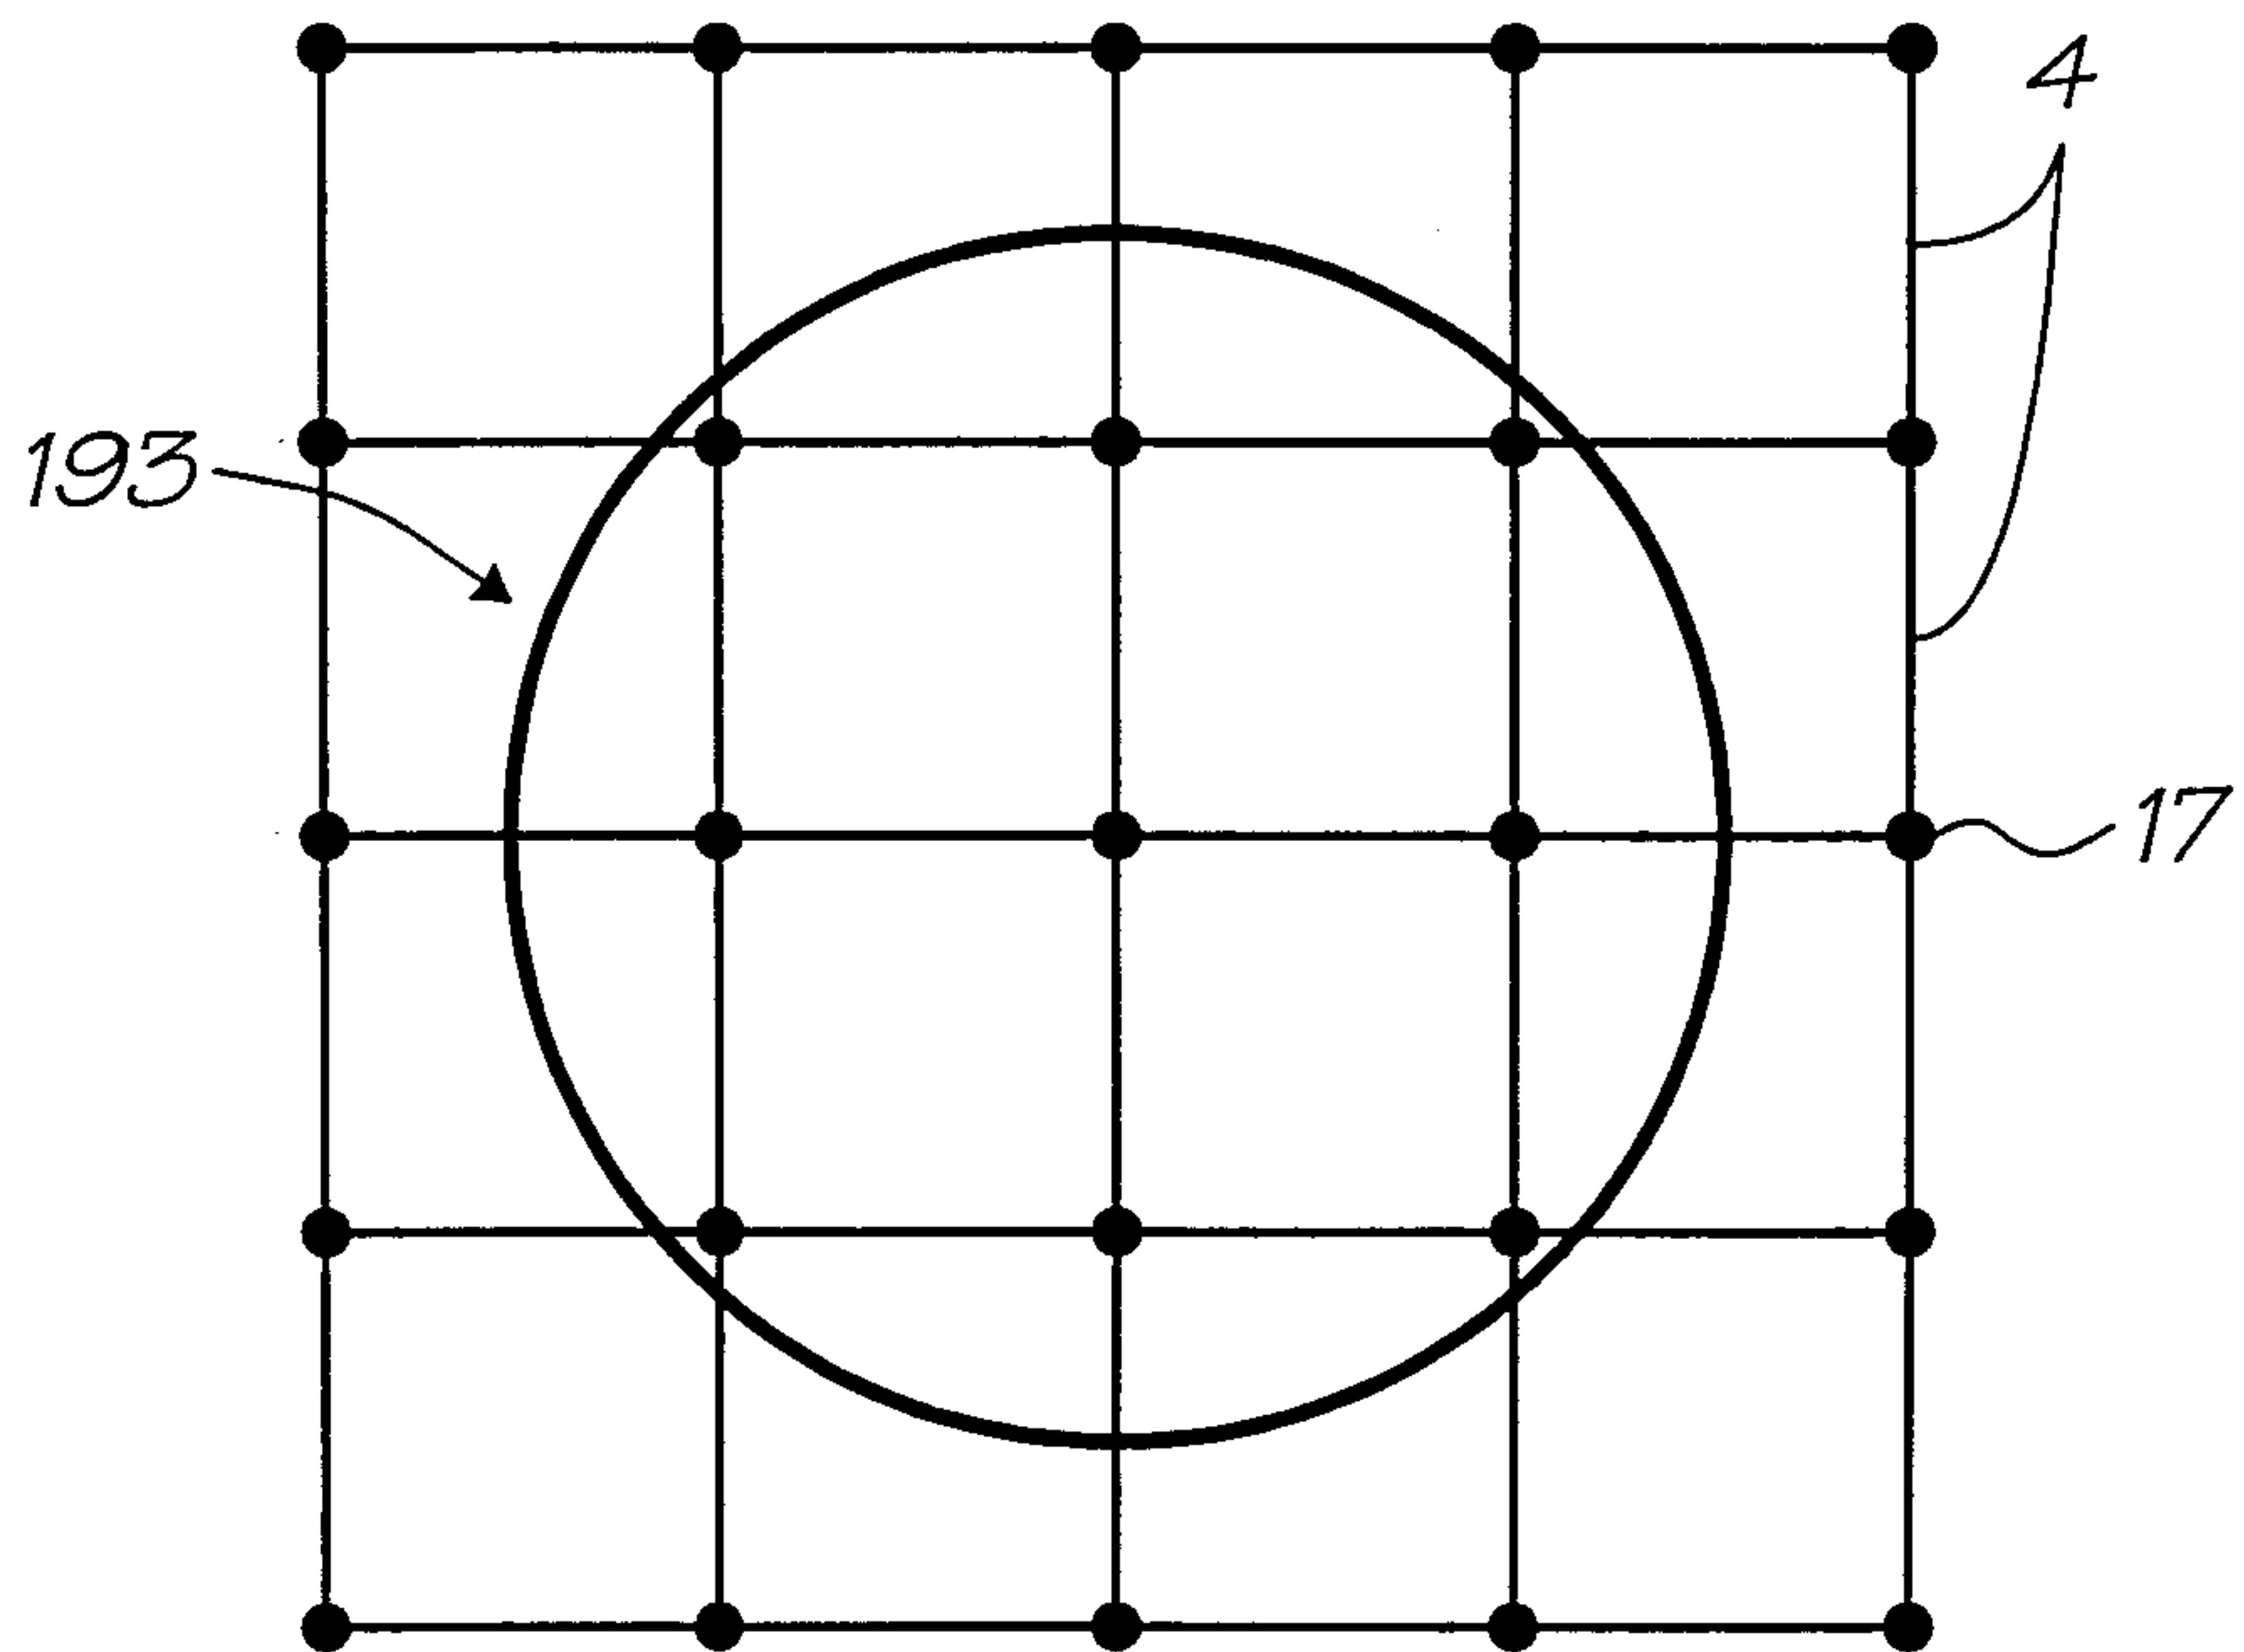


FIG. 5b

6/8

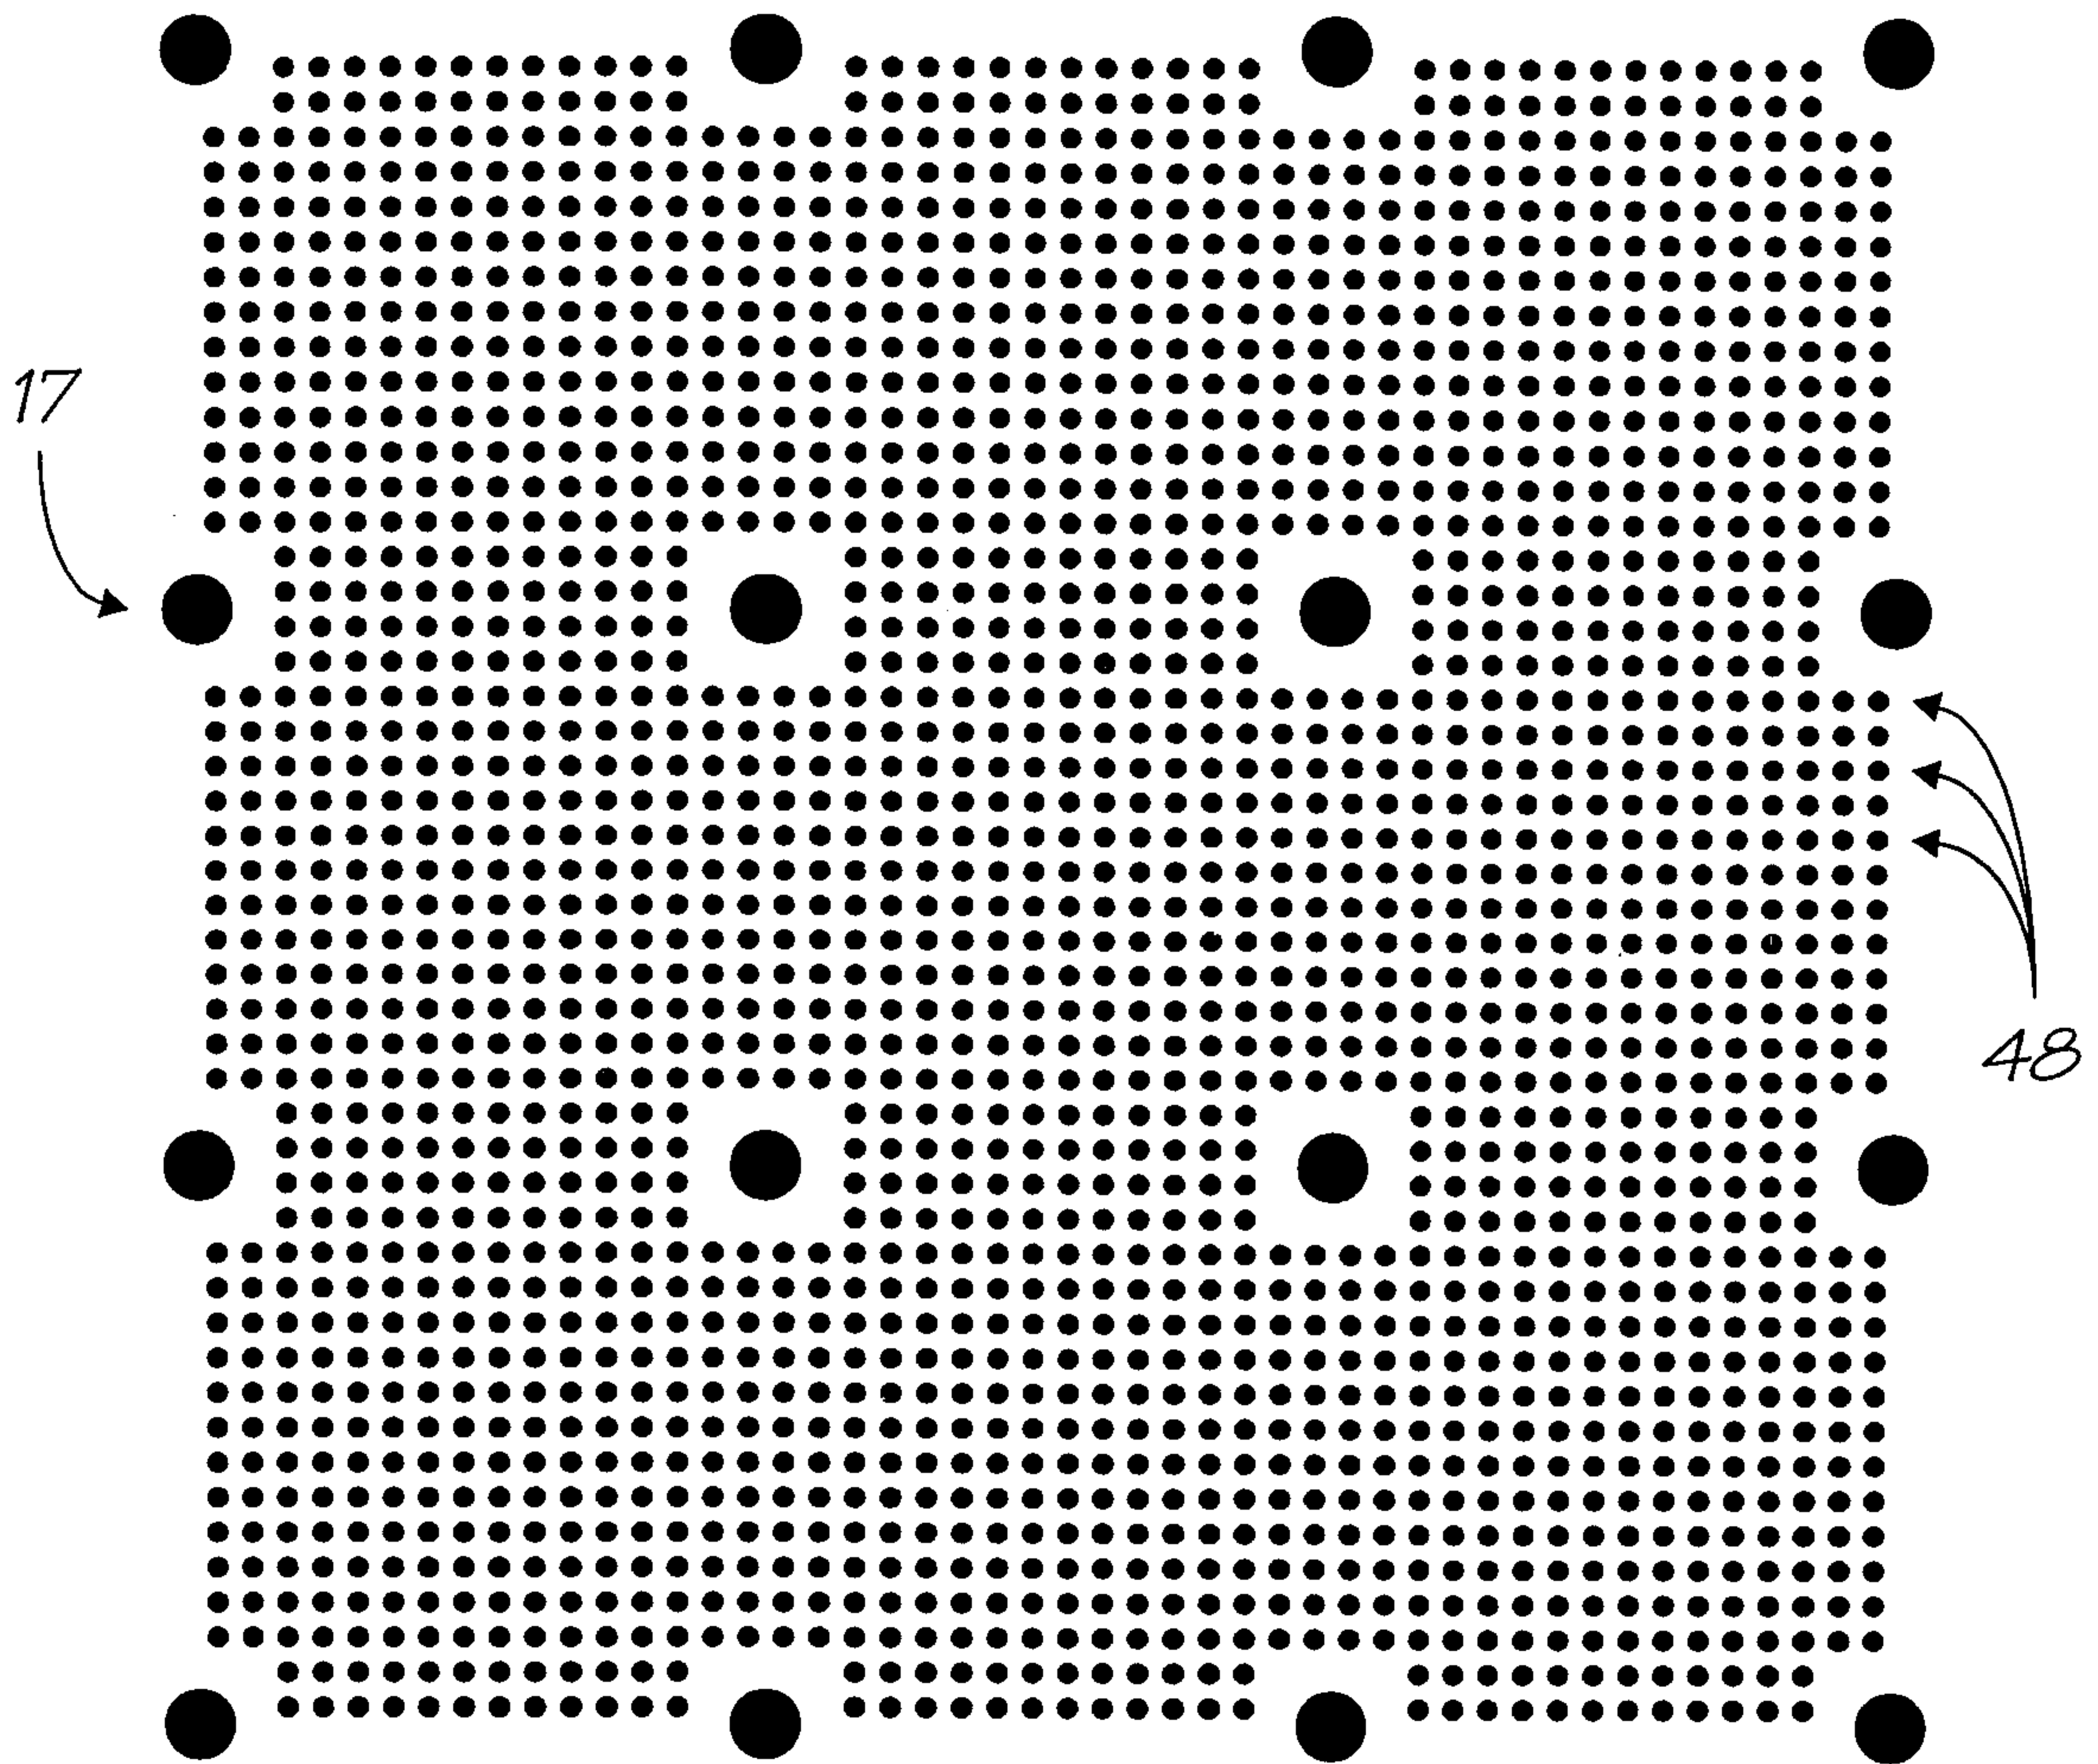


FIG. 5c

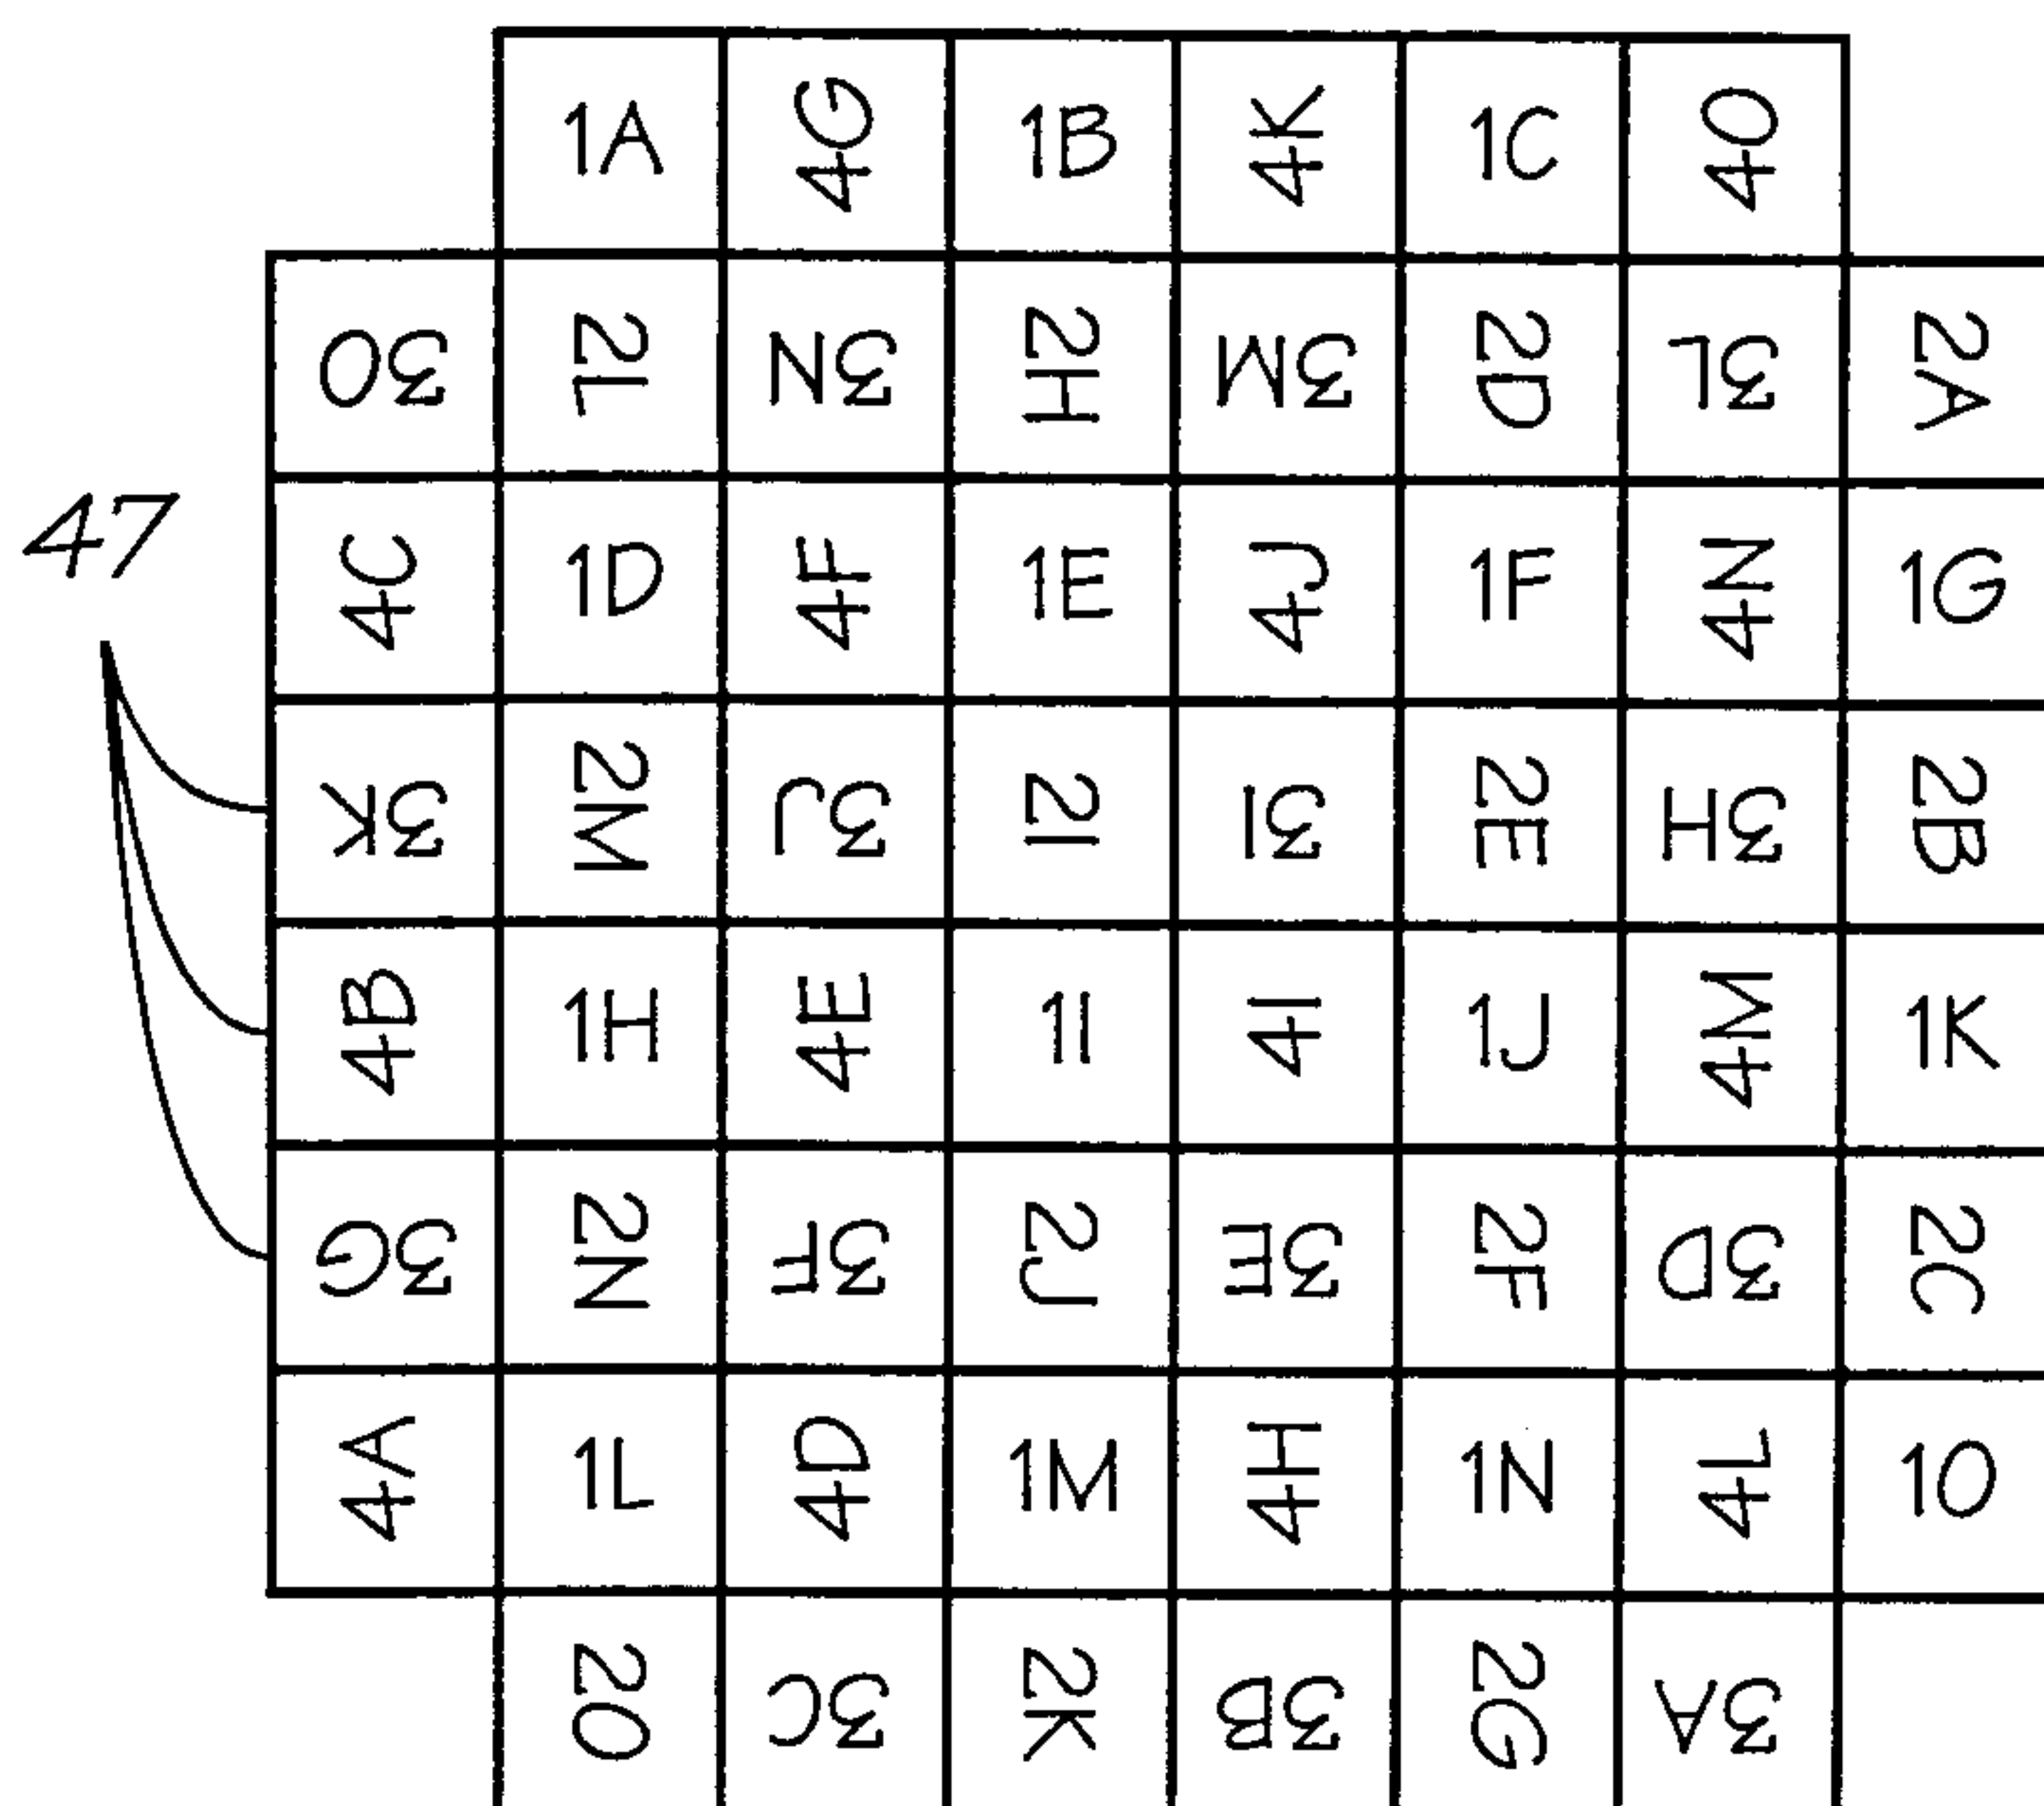


FIG. 5d

7/8

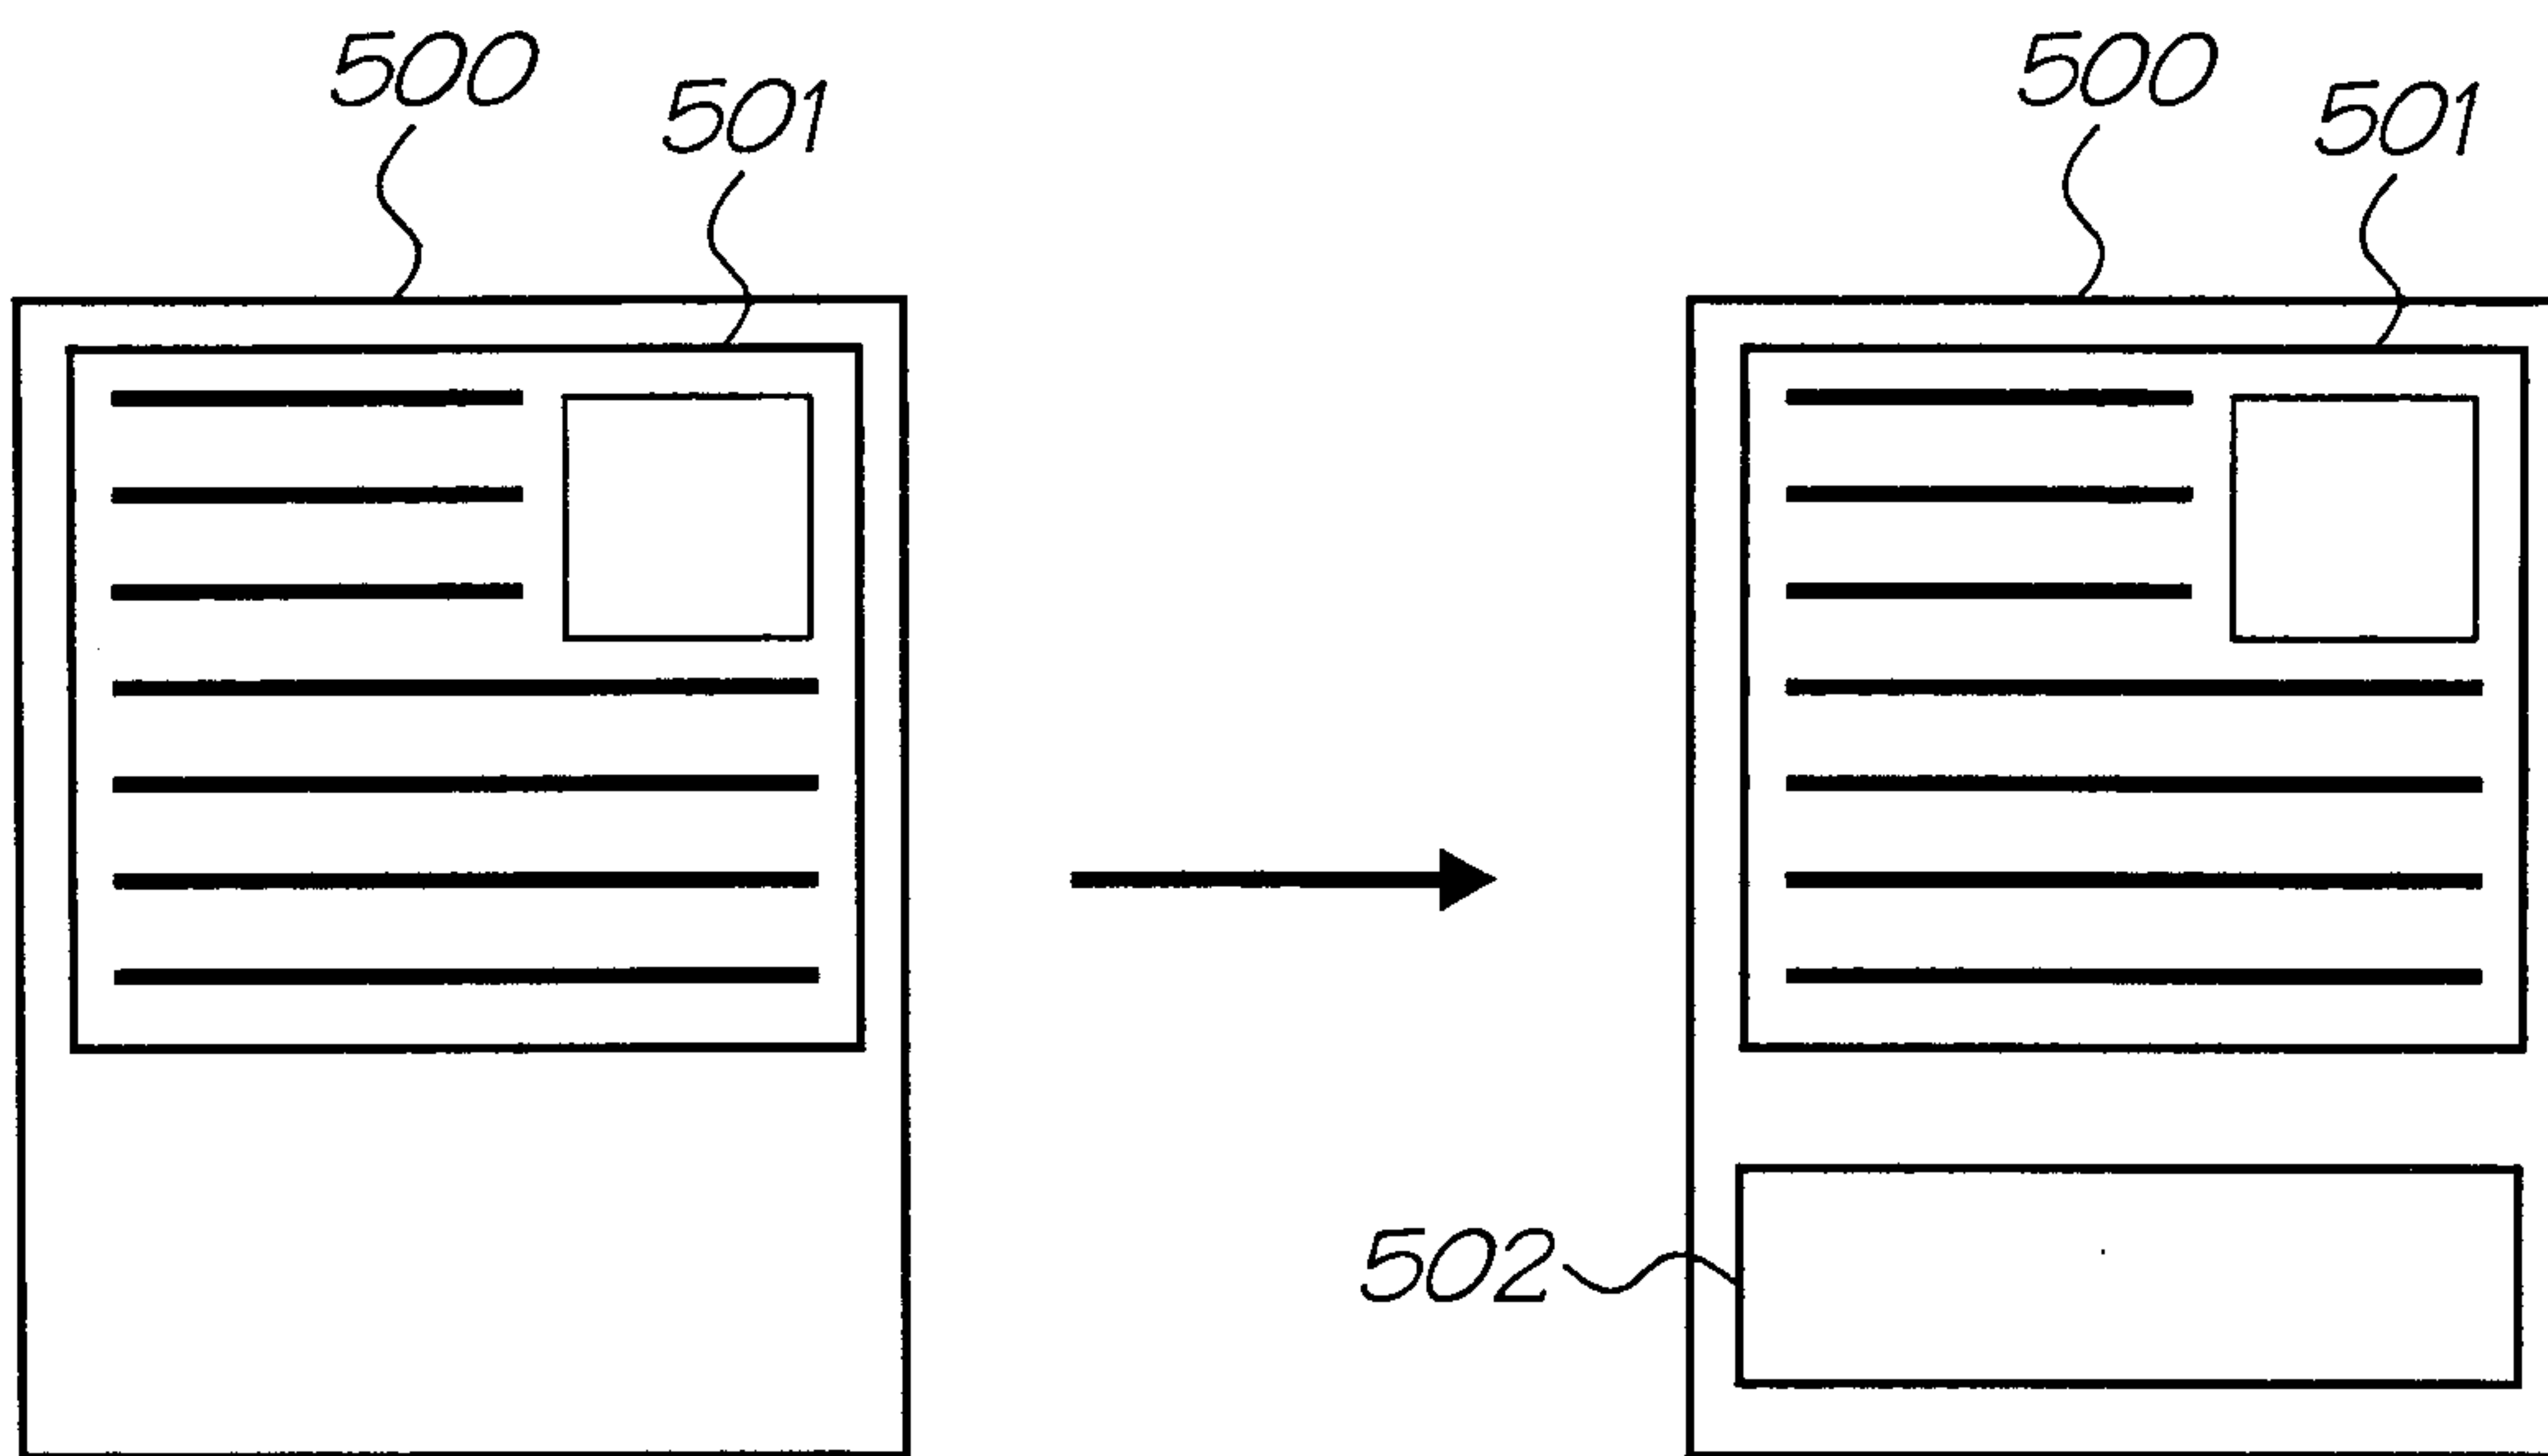


FIG. 6

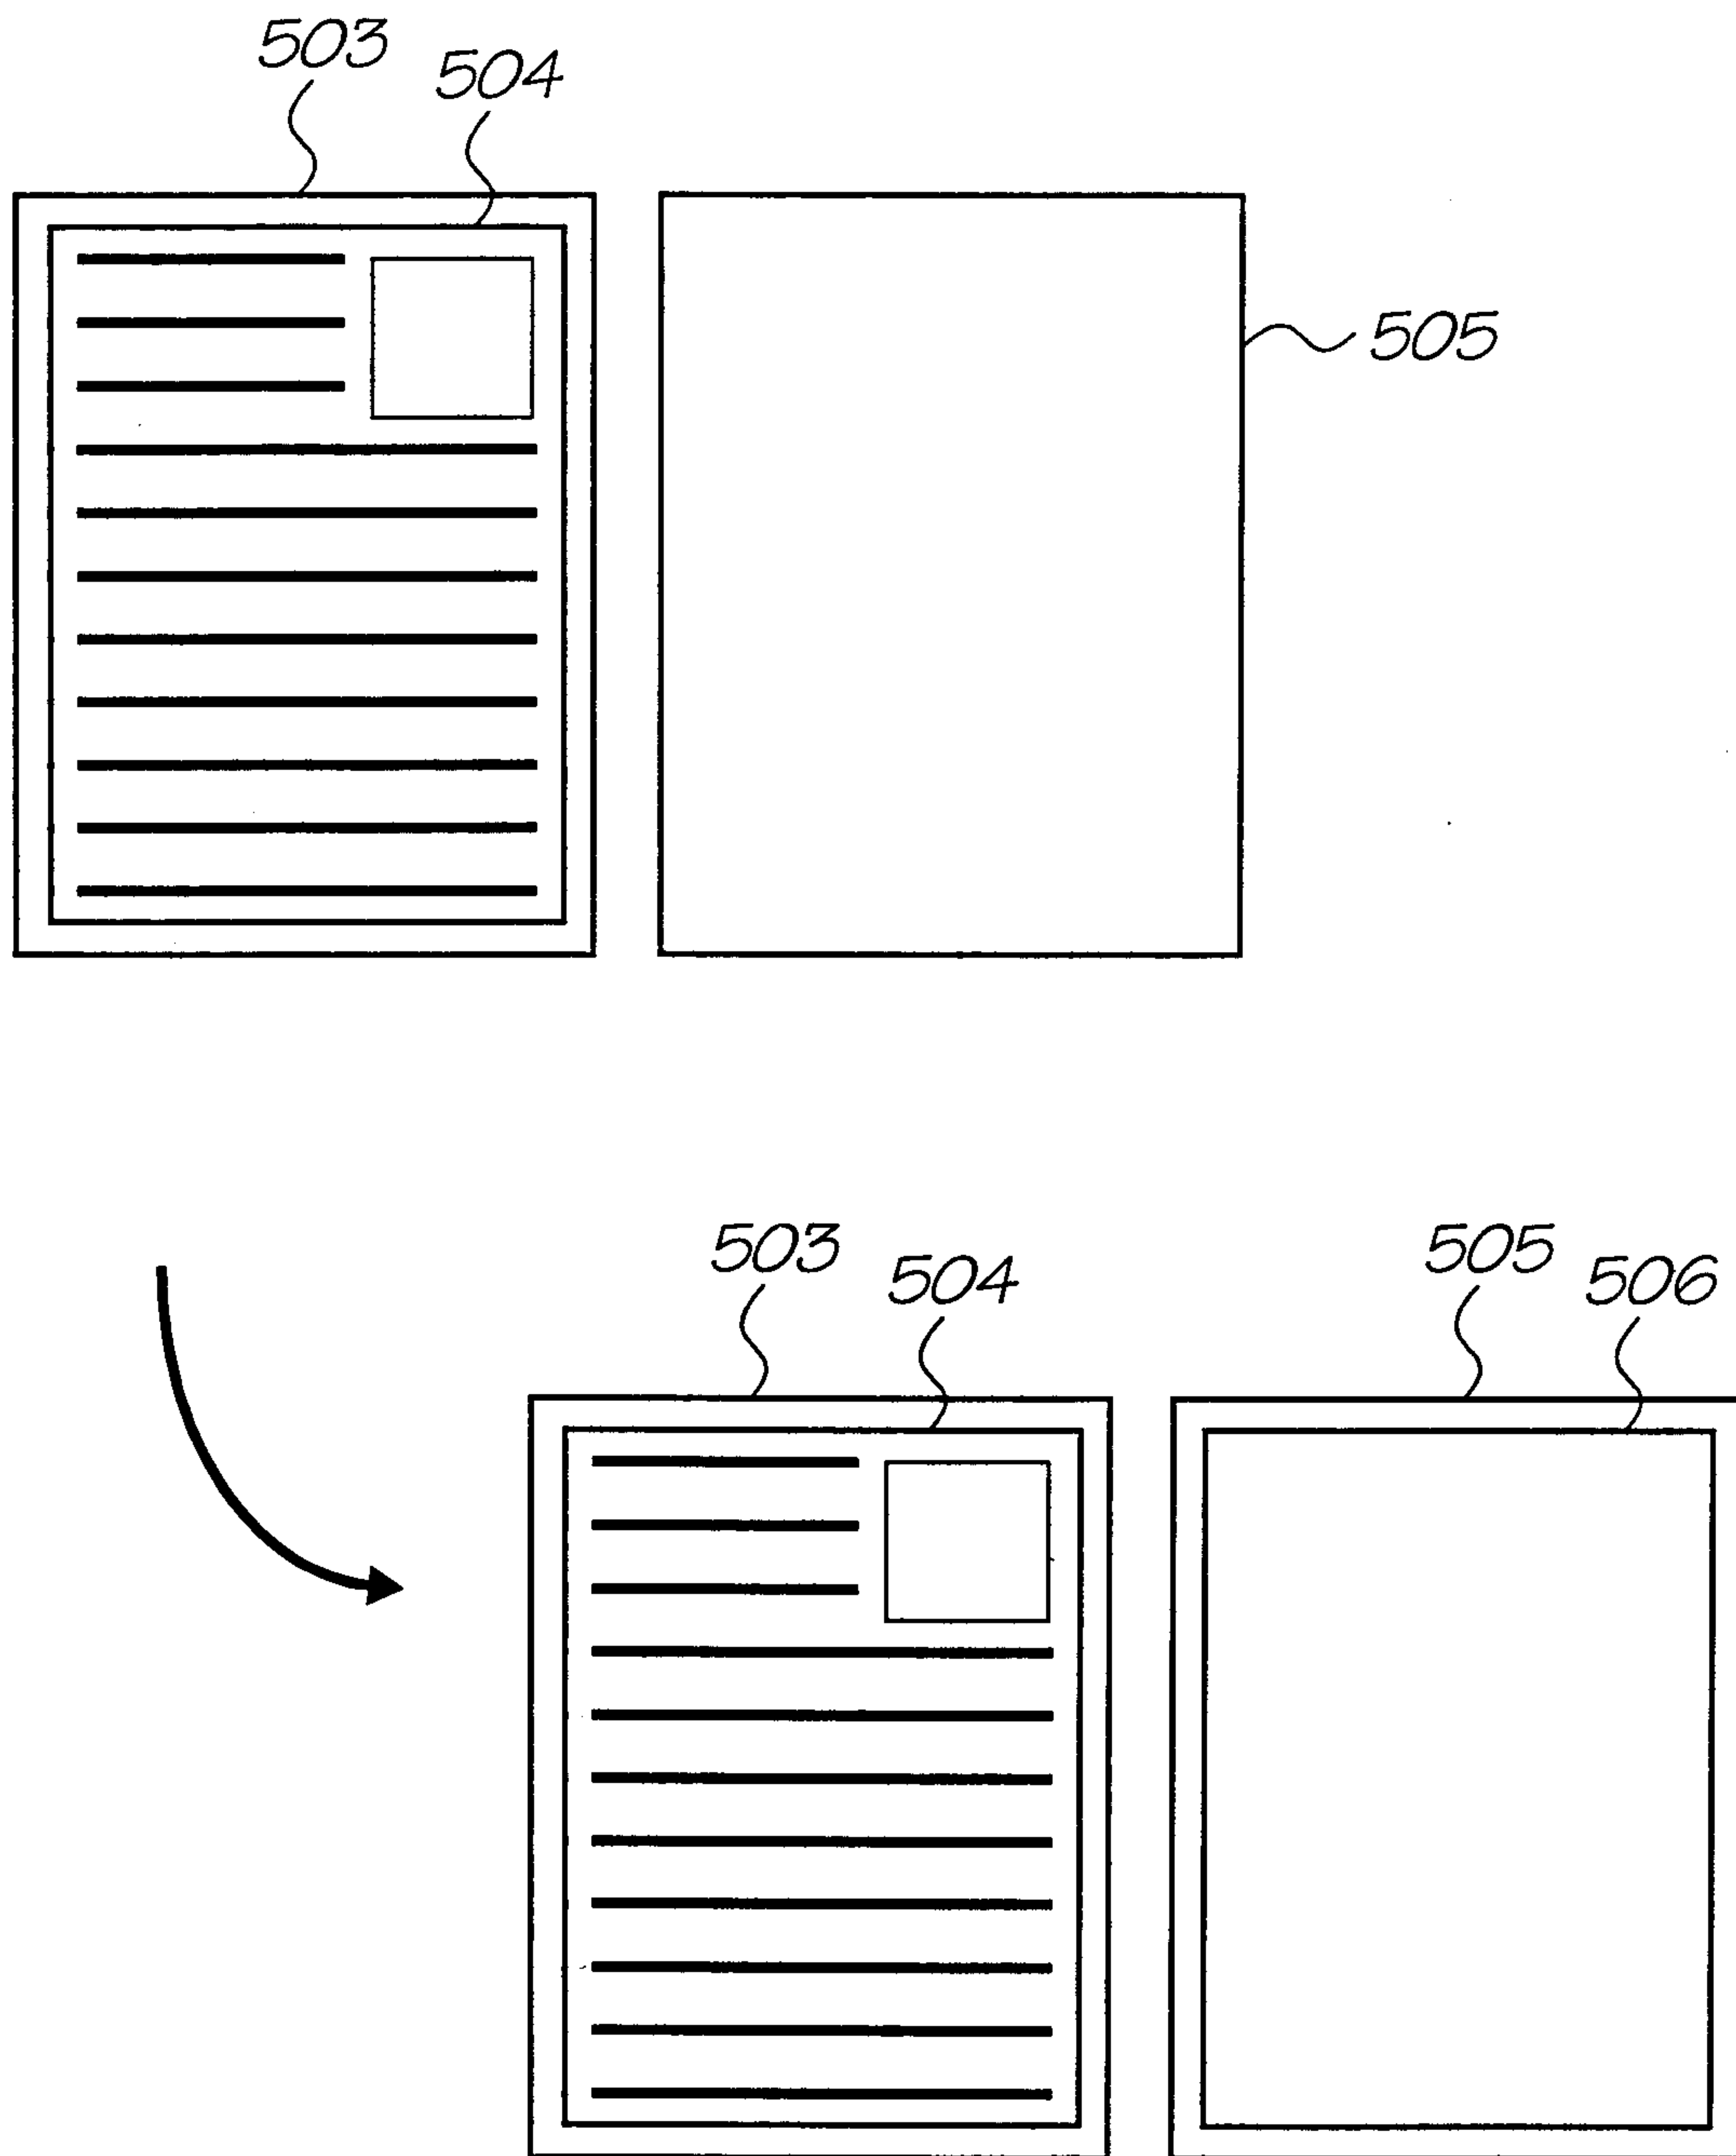


FIG. 7

