

(19)



(11)

EP 3 645 074 B2

(12)

NEW EUROPEAN PATENT SPECIFICATION

After opposition procedure

(45) Date of publication and mention of the opposition decision:
17.04.2024 Bulletin 2024/16

(51) International Patent Classification (IPC):
A61M 3/02 ^(2006.01)

(45) Mention of the grant of the patent:
11.08.2021 Bulletin 2021/32

(52) Cooperative Patent Classification (CPC):
A61M 3/0262; A61M 3/0279; A61M 3/0245;
 A61M 2205/0222; A61M 2205/071

(21) Application number: **18742916.2**

(86) International application number:
PCT/DK2018/050169

(22) Date of filing: **28.06.2018**

(87) International publication number:
WO 2019/001674 (03.01.2019 Gazette 2019/01)

(54) **AN ENEMA DEVICE AND A METHOD OF REFILLING SAID DEVICE WITH AN ENEMA**

EINLAUFVORRICHTUNG UND VERFAHREN ZUM NACHFÜLLEN DER BESAGTEN VORRICHTUNG MIT EINEM EINLAUFMITTEL

UN DISPOSITIF DE LAVEMENT ET UN PROCEDE DE REMPLISSAGE DUDIT DISPOSITIF AVEC UN LIQUIDE DE LAVEMENT

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventors:
 • **HAGEN, Thit Rose**
 4000 Roskilde (DK)
 • **DUQUE, Ana Latorre**
 44550 Alcorisa (ES)

(30) Priority: **30.06.2017 DK PA201770531**

(74) Representative: **Holme Patent A/S**
Valbygårdsvej 33
2500 Valby (DK)

(43) Date of publication of application:
06.05.2020 Bulletin 2020/19

(60) Divisional application:
21190272.1 / 3 954 408

(56) References cited:
NL-A- 294 492 US-A- 818 814
US-A- 3 398 743 US-A- 5 497 944
US-A1- 2012 310 174

(73) Proprietor: **Qufora A/S**
3450 Allerød (DK)

EP 3 645 074 B2

Description

[0001] The present invention relates to an enema device comprising a flexible delivery container and an applicator nozzle.

[0002] Administering an enema is a common medical procedure whereby fluid is injected into the rectum and lower intestine of a patient in order to induce bowel movement. The need for such a procedure typically arises in patients suffering from certain physical ailments in which voluntary bowel control is impaired or when the bowel needs to be cleaned before e.g. a colonoscopy or a surgical operation.

[0003] Medical equipment currently exists in the art for administering an enema to patients in need of this procedure. At least one type of equipment consists of an enema squeeze bottle filled with the fluid intended to induce bowel movement, which is capped by a short applicator nozzle to be inserted into the patient's rectum. The applicator nozzle of this type of conventional enema application device often causes discomfort and irritation when being inserted.

[0004] Furthermore, the force required to squeeze the liquid from an enema dispenser affects the ease with which a user may administer the liquid. The self-administration of a conventional enema may be especially difficult for patients have poor dexterity, e.g. due to the squeeze force required to deliver a complete dose of the enema liquid.

[0005] Although it would be advantageous to decrease the amount of squeeze force required to administer an enema, such a modification may adversely affect other desirable features of the device. In particular, it is desirable to prevent any reflux of liquid back into the delivery container after the enema liquid has been delivered, and it is desirable to prevent leakage of the enema liquid from the dispenser prior to use. A simple reduction in the resistance to flow of the liquid through the device may compromise these features.

[0006] Moreover, enemas are often administered to a patient at home when the need for medical assistance does not necessitate a doctor or another health care assistant.

[0007] However, it is often difficult for the patient to administer the enema to him or herself since the applicator nozzle not only must be inserted into a sensitive area, but the administration position is also inconvenient for the user making it is difficult for the patient to administer the liquid while steadily holding the enema in the required area. Often the patient is assisted by another individual; however, assistance may not always be available, if, for instance, the patient lives alone. Thus, there is also a need for an enema device that can be effectively self-administered.

[0008] Such an enema device is e.g. known from WO2010122537, disclosing a device which can be used for administering an enema. Said enema device ensures that uncontrolled flow of liquid into or out of the device is

prevented by using two one-way valves, one for delivering the liquid and one for refilling the device. As the device is compact the device can easily be held in a single hand making the device suitable for home-administration of an enema. A device with several valves is disclosed in US3398743.

[0009] The enema is administered by squeezing the delivery container, and after releasing the compression force, the container may either be re-inflated by drawing surrounding air into the container via a first one-way valve, or the container may be re-loaded with enema by drawing enema into the container.

[0010] The latter will ensure that the device can be used for several administrations as needed by the user, however studies and user feed-back have an that most users does not have the strength to provide a constant pressure on the delivery container. Accordingly, the user will first administer a small amount of enema, then release the pressure on said container and after a short period administering a further small amount of enema. However, when pressure is released on the delivery container, air will unintentionally be drawn into the container and mixed with the enema. Air will then be delivered to the colon when the next dosage of enema is administered. This will cause uncomfortable distending of the colon causing pain and cramps. Thus, in order to avoid intake of air, the user will have apply a constant pressure to the delivery container during the administering procedure, which may be difficult for users/patients having weak fingers, e.g. due to arthritis or the like.

[0011] Furthermore, as air is drawn into the container, expelling of the enema becomes increasingly more difficult. Due to density differences between air and the enema, the device has to be oriented correctly, in order to prevent or reduce administration of air. However, ensuring such an orientation is almost impossible as the enema often is administered on the toilet or in the bed, where the user's/patient's position prevents such an orientation.

[0012] Since administration of air will cause discomfort several reloadings of the container with enema are often required in order to deliver an effective dosage of enema and at the same time prevent delivery of air. However, reloading of the container requires easy access to the enema. If the enema for instance is tap water, a user sitting on the toilet, may use the sink as a enema reservoir, however, often the toilet and the sink are to far apart for this to be manageable. Thus, the user has to have a reservoir of enema nearby in order to provide easy reloading, making the reloading both difficult and troublesome.

[0013] Thus, there is a demand for a new enema device, which is simple and easy to use and which solves the limitations and disadvantages of the prior art.

[0014] It is therefore a first aspect of the present invention to provide a handheld enema device that safely and effectively can administer an enema to a patient without causing discomfort.

[0015] It is a second aspect of the present invention to

provide an enema device where the liquid is easier to administer, and where air effectively is prevented from being mixed with the enema.

[0016] It is a third aspect of the present invention to provide an enema device in which an effective dosage of enema can be administered without required reloading of the delivery container.

[0017] It is a fourth aspect of the present invention to provide an enema device that prevents reflux of liquid into the container after use and/or prevents leakage of the fluid prior to use.

[0018] In a fifth aspect according to the present invention is provided an enema device that is inexpensive to manufacture and is simple and reliable to use.

[0019] In a sixth aspect according to the present invention is provided an enema device that is relatively small and easy to operate, especially by one hand.

[0020] In a seventh aspect according to the present invention is provided an enema device arranged to deliver an enema to a patient sitting on the toilet, without requiring reloading with enema.

[0021] The novel and unique whereby these and further aspects are achieved is the fact that the enema device comprises a delivery container and an applicator nozzle, and wherein said delivery container comprises two cavities, an outer cavity defined by a squeezable external body, and an inner cavity defined by an inner flexible bladder, and wherein one of said cavities is communicating with an outlet for dispersing the enema through the applicator nozzle and the other cavity is communicating with the surroundings via an air inlet.

[0022] Thereby is provided a simple, inexpensive and essentially maintenance free enema device which can be used for administering enema. The device according to the invention will not only effectively prevent air from being mixed with the enema, but also ensure that the user easily can expel the enema, as the container will be perceived as full of enema, at all times.

[0023] In order to ensure that the enema is administered with a relatively high patient compliance, the enema device according to the invention comprises an applicator nozzle preferably arranged for alleviating the physical discomfort and pain that the patient may experience during insertion of the applicator nozzle.

[0024] In a first embodiment according to the present invention the outer cavity is communicating with the outlet, and the inner cavity is communicating with the surroundings. The enema is accordingly accommodated/placed in the outer cavity (the enema cavity) thus, when the user squeezes the container the enema will be expelled from the outer cavity through the applicator nozzle via the outlet.

[0025] When the user during the administration procedure releases the compression force on the container, air will be drawn into the inner flexible bladder via the air inlet. Since the inner and outer cavity cannot communicate with each other, air in the inner cavity is effectively prevented from being mixed with the enema in the outer

cavity. Accordingly, air cannot be administered into the patient's colon and unnecessary discomfort caused by distending of the colon by air, is effectively prevented.

[0026] Drawing air into the inner cavity, i.e. the flexible bladder (air cavity) further has the advantage that the size of said bladder increases, causing a change in the respective sizes of the cavities, i.e. when the size of the flexible inner cavity (containing air) increases as air is drawn into said cavity, the size of the outer cavity (containing enema) is reduced. Thus, the air in the inner cavity will function as a displacement fluid, forcing the enema in the outer cavity towards the outlet. In this way the enema device will always be perceived as "full of enema" by the user until the desired dosage, or the entire enema content, has been expelled from the device.

[0027] Thereby the unique construction of the enema device according to the present invention ensures that the user can release the pressure on the container during the administration procedure without having to worry about air being mixed with the enema. Furthermore, as air is drawn into the flexible bladder the size of the enema cavity is reduced whereby enema easily can be expelled from the device by squeezing the delivery container. Thereby is provided an enema device which is highly suitable for self-administration, as the effort required to expel the enema liquid is significantly reduced compared to the known enema devices.

[0028] In a second embodiment according to the present invention, the placement of the enema and air is reversed, i.e. the enema is placed in the flexible bladder, becoming the enema cavity, and which accordingly will be communicating with the outlet. Air will be drawn into the outer cavity (air cavity) through the air inlet. Thus, when air is drawn into the outer cavity, the size of the inner cavity containing the enema will be reduced, ensuring that enema always will be placed at the outlet, such that the container will be considered full of enema during use.

[0029] The respective cavity accommodating the enema may, as discussed above, be either the inner or the outer cavity, depending on the embodiment. The same applies for the cavity accommodating air as the displacement fluid, which will be the cavity not containing the enema. However, the enema will be accommodated in the cavity communicating with the outlet and air will be accommodated in the cavity communicating with the air inlet. Accordingly, the obtained results and respective changes in sizes of the cavities are the same for the two embodiments. The air cavity will become larger during intake of air, making the enema cavity smaller, whereby the enema is displaced towards the outlet. In this way the enema device according to the invention, will, as long as enema is present in said device, be perceived as full of enema, irrespectively of the actual content of enema.

[0030] When the entire content of enema has been expelled from the delivery container, the air cavity will preferably fill out the main, or the entire, inner volume of the squeezable external body. As the air in said cavity neither

can be removed from the delivery container nor be compressed, emptying the enema completely can be felt by the user as a change in the hardness of the delivery container, thereby providing a simple indication to the user, that the entire dosage of enema has been administered.

[0031] In a preferred embodiment the enema device according to the invention has a size and dimension which ensures that the cavity accommodating the enema, can accommodate at least an effective dosage of enema, preferably slightly more.

[0032] Within the context of the present invention the term "an effective dosage of enema" means the amount of enema which is required and/or sufficient for stimulating stool evacuation in the patient. Even though an effective dosage is individual, among others depending on the age of patient (e.g. child vs. adult) administration of enemas is well known in the art, and a person skilled in the art will have no problem of establishing an effective dosage of enema.

[0033] In one embodiment, the enema device can accommodate at least about 90 ml of enema, and preferably at least about 130 ml which is slightly more than a conventional enema dosage for most adults. As the required amount of enema is individual, the enema device may in some preferred embodiments accommodate about 150 ml, however the dimensions of said enema device may be adjusted to accommodate a higher or lower amount of enema, within the content of the present invention.

[0034] Using an enema device arranged for accommodating an effective dosage of enema, ensures that the user can administer a full and effective dosage of enema, without having to reload the device, and without having to worry about air being mixed with the enema. Accordingly, the patient/user can release the pressure on the delivery container as many times as desired, and the administration of the enema can take as long as the patient need or require without compromising the function of the enema device according to the invention, whereby a high patient compliance is provided.

[0035] In a preferred embodiment, a first non-return valve is placed in communication with the outlet. Thus, when the patient/user released the compression force on the delivery container, the first non-return valve will effectively prevent backflow of liquid and faeces from the colon and/or rectum into the enema device. Accordingly, any contamination of the delivery container and its remaining content, which may occur during and/or after administration of the enema to a patient is precluded.

[0036] In a similar manner the air inlet may be placed in communication with a second non-return valve, in order to ensure that air cannot escape the air cavity during the administration process.

[0037] Such non-return valves are well known in the art, and may be any valve capable of provide the desired properties to the device according to the invention e.g. swing valves, ball valves, diaphragm valves, butterfly valves, and the like.

[0038] As the applicator nozzle is inserted in the rectum

during the administering procedure, it is preferred that the air inlet is placed/located on the enema device at a position distinct/separate from the outlet/applicator nozzle, such that that air can be drawn into the air cavity during use. In a preferred embodiment the air inlet is placed opposite the outlet/applicator nozzle, as this ensures that the air inlet always is free to communicate with the surrounding air, even during administration of the enema. However other suitable positions for the air inlet is also contemplated within the scope of the present invention e.g. in the side of the delivery container.

[0039] In order to facilitate refilling and re-use of the enema device according to the invention, it is preferred that the enema device can be restored to an initial position, i.e. a position where the enema device is ready for a new enema administration procedure. It is in this respect preferred, that the enema device is arranged for deflating the air cavity, such that said device can be re-used, and that the enema device is arranged for being opened and closed, in order to allow an easy refilling of the enema cavity with enema.

[0040] In order to ensure that the enema device according to the invention can be opened and closed, it is preferred that said enema device comprises a closure member which is arranged for being releasably attached to the delivery container, e.g. by means of a first coupling unit. Said first coupling unit may e.g. comprise a first coupling part placed on the closure member and a second coupling part attached to the delivery container. The first coupling unit may be any conventional coupling unit that provides a fluid tight seal between the respective parts, and ensures that the enema device can be opened and closed by either opening or removing the closure member. Such coupling units are known in the art and includes threaded coupling unit, snap-fit coupling units, closable lids, hinged closable lids, etc.

[0041] In a simple embodiment the outlet is placed in the closure member, and the closure member is arranged such that when the closure member is opened/removed there is only access to the cavity communicating with the outlet, i.e. the cavity for the enema, whereby an easy manual refilling of enema is possible. Thus, with the closure member is opened/removed there is no access to the cavity communicating with the surroundings via the air inlet.

[0042] It is furthermore preferred that the enema device is arranged for releasing the air in the air cavity to the surroundings when the closure member is opened/removed from the delivery container. The air may preferably be released through a release valve and there can be a physical connection between the release valve and the closure member thus, when the closure member is removed/opened, said physical connection will activate the release valve. Said release valve is preferably placed near the second non-return valve, i.e. near the air inlet as this will provide a simple construction.

[0043] In a preferred embodiment the air inlet and the release valve is combined in a dual function valve. Said

dual function valve is arranged as a non-return valve when the closure member closes the delivery container, i.e. when the enema device is ready for the administration procedure, however when the closure member is removed from the delivery container, i.e. when pressure in the enema cavity is reduced, the dual function valve is arranged for allowing air to flow in the opposite direction, deflating the air cavity.

[0044] Thus, when air is drawn into the air cavity, the dual function valve function as a non-return valve preventing air drawn into the air cavity from escaping unintentionally during the administration procedure, and when the closure member is removed from the delivery container, the pressure inside the enema cavity drops whereby the dual function valve will allow the air in the air cavity from escaping through the air inlet, i.e. the valve allows air to flow in the opposite direction. Preferred examples of such a dual function valve is one or more of a diaphragm valve, a lip valve; a duck bill valve, an umbrella valve, and/or a dome valve. In a preferred embodiment the dual function valve is a combination valve, e.g. a umbrella/duckbill combination valve.

[0045] After the air cavity has been emptied, the user can easily refill the enema cavity with enema, and refit the closure member on the delivery container, whereby the enema device according to the invention is ready for the next enema administration.

[0046] The closure member may in one embodiment be made of a rigid material, e.g. polypropylene or polyvinyl chloride, thereby ensuring that the applicator nozzle can be releasably attached to the closure member in communication with the outlet. Said applicator nozzle may be attached to the closure member in any conventional and convenient way, e.g. using a snap-fit, or the like.

[0047] In order to ensure a fluid tight seal between the closure member and the delivery container, said closure member may preferably be attached to the delivery container via an intermediate member. Said intermediate member is preferably also made of a rigid material, and may be permanently connected to the delivery container.

[0048] The outer cavity is preferably arranged as a hand held pump and is accordingly made of a resilient deformable material with a memory, e.g. silicone. This means that the user can apply pressure on the outer cavity, forcing enema out through the outlet, and when the pressure is released on the outer cavity, the outer cavity will return to the original shape.

[0049] The inner flexible bladder defining the inner cavity is preferably made of a material arranged for expanding/unfolding and collapsing in response to the amount of fluid (air or enema) placed in said cavity, prevents any exchange of fluid between the inner and outer cavity, and does not react with the enema and air.

[0050] Preferred materials meeting the above definitions are film and/or sheets, e.g. polymer films made of polyethylene, polypropylene, silicone, nitrile, isoprene and/or laminates containing one or more of these. How-

ever other suitable materials are also contemplated within the scope of the present invention.

[0051] In order to facilitate an ergonomic handling of the device according to the invention the delivery container may have a shape arranged to fit into the user's hand, e.g. an elongated spherical shape, a bulb shape or the like. This will not only ensure a pleasant and comfortable fit in the hand but will also reduce the necessary force needed to compress the container as well as reducing any awkward postures.

[0052] It is furthermore preferred that the enema device according to the invention is small and compact, i.e. that the parts of the enema device is closely packed or joined in order to ensure that the device take up as little spatial space or volume as possible. This will not only ensure that the device can be handheld and easily operated e.g. with a single hand, but also that the enema device easily can be fitted into a hand bag or the like.

[0053] The term "enema" covers any liquid, which is capable of promoting bowel movement when introduced into the rectum and colon, such as an enema liquid. Examples of enema liquids include water; hypertonic aqueous salt solutions; solutions or suspensions of cathartic agents, such as bisacodyl or phenolphthalein; and mineral oil. Other liquids capable of promoting bowel movements are well known in the art, and are also contemplated within the scope of the present invention. It is however preferred that the enema has a low viscosity that ensures that the enema easily can be distributed evenly in the colon, e.g. a viscosity corresponding to or being close to the viscosity of water. Gels or liquids having a high viscosity i.e. they cannot flow easily, is accordingly not preferred.

[0054] The applicator nozzle may have any shape so long as the nozzle is able to perform the function of administering the enema to the patient's rectum and/or colon. In a preferred embodiment the applicator nozzle has a mainly frustoconical shape whose outside diameter progressively decreases from its proximal end to its distal as said shape automatically will ensure a tight fit with the anal opening.

[0055] The applicator nozzle can furthermore be modified in size, shape and possibly other physical properties such as flexibility, rigidity and pliancy to become a plug that accommodates forming a sealing fit with the anal opening. For example, if at least the nozzle is somewhat pliable, it will conform to the shape of the patient's rectum and aid in alleviating the physical discomfort and pain that the patient may experience during insertion of the nozzle.

[0056] The nozzle can furthermore be provided with e.g. a pointed blunt tip in order to further reduce said discomfort, a lubricant or an activated hydrophilic coating in order to aid the insertion of the nozzle in the rectum by reducing frictional force.

[0057] The applicator nozzle can preferably be disposable in order to reduce contamination of the surroundings e.g. by providing a nozzle, which can be flushed down the toilet after use. This will also make the device more

convenient and hygienic in use, however said nozzle may also, if desired, be arranged for being reused after being cleaned and/or sterilised. In any case it is preferred that the applicator nozzle is made of a hypoallergenic material that is non-reactive with the patient's tissue.

[0058] The invention also relates to a method of refilling the enema device according to the present invention with an enema. The method comprising the following steps:

- a) opening the delivery container,
- b) deflating the cavity communicating with the air inlet,
- c) refilling the cavity communicating with the outlet with an enema, and
- d) closing the delivery container.

[0059] It is preferred that the delivery container is opened by opening the closure member, and that air in the air cavity automatically is expelled to the surroundings when the closure member is opened/removed from the delivery container.

[0060] The device according to the invention is not only relatively small, having in a preferred embodiment a total length in assembled state of less than 25 cm, preferably less than 15 cm, but also has a simple and user-friendly design, making it extremely easy to operate with a single hand ensuring that the device can be unassistedly used in privacy.

[0061] The invention will be explained in greater detail below, describing only exemplary embodiments of the enema device with reference to the drawing, in which

Fig. 1 shows a perspective view of a first embodiment of an enema device according to the present invention,

Fig 2, is a sectional view of the first embodiment of an enema device according to the invention,

Fig. 3a-3d schematically illustrates the administration procedure using the first embodiment of the enema device according to the invention,

Fig 4. is a sectional view of a second embodiment of an enema device according to the invention, and

Fig. 5a-5d schematically illustrates the administration procedure using the second embodiment of the enema device according to the invention.

[0062] The invention is described below with the assumption that the device according to the present invention is substantially bulb shaped in order to provide a convenient grip for the user. This assumption is not to be construed as limiting, and other shapes e.g. elongated, circular, oval or the like, is also contemplated within the scope of the invention, it is however preferred that the device has a size which facilitates administration by a

single hand.

[0063] Fig 1. is a schematic view of a first embodiment of the enema device 1 according to the invention. Said device consist basically of a enema delivery container 2, having a substantially bulb shape, an applicator nozzle 3 and a closure member 4. The applicator nozzle 3 has an exit opening 5 through which the enema can be expelled when pressure is applied to the delivery container 2.

[0064] A sectional view of said first embodiment 1 is shown in fig. 2 wherein the delivery container 2 comprises two cavities, an outer cavity 6 being defined by an squeezable external body 7, and an inner cavity 8 being defined by an inner flexible bladder 9. The outer cavity 6 is in flow communicating with the exit opening 5 via an outlet 10, Thus enema placed in said outer cavity 6 can easily be expelled through the exit opening 5 when pressure/compression force is placed on the delivery container 2 via the squeezable external body 7.

[0065] The outlet 10 is a first non-return valve 11 placed in the closure member 4, and said non-return valve 11 will effectively prevent backflow of liquid and faeces from the colon and/or rectum into the enema device 1 when pressure is released on the squeezable external body 7. Accordingly, any contamination of the delivery container 2 and it's remaining content, which may occur during and/or after administration of the enema to a patient, is prevented.

[0066] In a similar manner the inner cavity 8 is communicating with the surroundings via an air inlet 12, in the form of a second non-return valve 13, which in the embodiment shown may be a combination valve, such as a umbrella/duckbill combination valve. Said second non-return valve will allow air to be drawn into the inner cavity 8 when pressure is released on the squeezable external body 7, and prevent air from escaping unintentionally during the administration process, i.e. when pressure is applied to the delivery container.

[0067] The flexible inner bladder 9 is securely attached to the delivery container 2 in such a manner that the inner cavity 8 defined by said bladder 9 can communicate with the air inlet, but that flow communication between the two cavities 6,8 is effectively prevented. Thus the flexible inner bladder may be attached to a part of inner surface of the squeezable external body 7 by glue, a welding or a connector member, preferably only in the lower part of the delivery container.

[0068] Drawing air into the inner cavity 8 has the advantage that the size of the flexible bladder 9 increases, causing a change in the respective sizes of the cavities, i.e. when the size of the flexible bladder increases as air is drawn into said cavity, the size of the outer cavity 6 containing enema is reduced. In this way the enema device will always be perceived as "full of enema" by the user until the desired dosage or the entire enema content has been expelled from the device.

[0069] The closure member 4 is releasable attached to the delivery container 2 via an intermediate member

14, and by means of a first coupling unit 15. In the embodiment shown in the figures the coupling unit is in the form of a snap fit, comprising a first coupling part 16, placed on the closure member, and a second coupling part 17, placed on the intermediate member 14. A person skilled in the art will understand that the shown coupling unit 15 is one of many possibilities of removing and remounting the closure member 4, and that others, e.g. threaded coupling units and hinged lids with snap-fittings, also are contemplated within the scope of the present invention.

[0070] Said first and second coupling parts 16,17 are arranged for engaging each other in order to lock the closure member 4 and the intermediate member 14 in a closed position, and for being released when e.g. a twisting action is applied on the outer surface 18 of the closure member 4 in relation to the delivery container 2. When such an action is provided, the first and second coupling parts 16,17 will disengage each other, facilitating removal of the closing member 4 from the delivery container 2. The closing member 4 can then easily be remounted by simply clicking the closing member 4 back in place, upon which the first and second coupling parts 16,17 will engage and close the delivery container 2.

[0071] In order to prevent enema contained in the outer cavity 6 from escaping the cavity 6 unintentionally, it is preferred that a liquid tight seal between the first and second coupling parts 16,17 is provided. Sealing rings (not shown) or the like, may be used, if necessary, in order to ensure that said seal is obtained.

[0072] The intermediate member is permanently and securely connected to the squeezable external body 7, e.g. using a glue, welding or similar means, thereby providing a reliable and durable construction, in which the closing member 4 in a simple manner can be removed from and remounted on the delivery container 2.

[0073] In the embodiment shown in the figures, the applicator nozzle 3 is removably connected to the delivery container 2 by means of a second coupling unit 19. This ensures that the applicator nozzle 3 can be removed after use and then be either cleaned, sterilised or simply discarded.

[0074] The second coupling unit 19 consists of a female coupling part 20 located in the closure member 4 and arranged for engaging a male coupling part 21 placed on the applicator nozzle 4. In the embodiment shown the male coupling part 21 is a short flexible tube 22, extending via an inner tube 23 in the applicator nozzle 4, to the exit opening 5. The female coupling part 20 is made of a rigid material, such that a liquid tight seal is provided between the two parts 20 and 21 when they are engaging. The male coupling part 21 has a tapered end for facilitating a simple engagement with the female part 20 when the male coupling part 21 is inserted into and retracted from the female coupling part 20.

[0075] The applicator nozzle further comprises an annular, substantially frustoconical extension 24, which not only provides a comfortable design for the user and a

tight fit with the anal opening during the administration proceedings, but also a stop for limiting the extension of the male coupling part 21 into the female coupling part 20 when the two parts are connected. Thereby is an especially simple and inexpensive design of the enema device according to the invention obtained.

[0076] In order to provide a comfortable design without any sharp edges, the outer edge 25 of the frustoconical structure 24, flushes into the outer surface 18 of the closure member 4, which again flushes into the outer surface of the delivery container 2, as shown in the drawings.

[0077] Fig. 3 schematically illustrates the administration procedure using the first embodiment 1 of the enema device according to the invention.

[0078] In a first embodiment 1 according to the present invention the enema is placed in the outer cavity 6 which is communicating with the outlet 10, and air can be drawn into the inner cavity 8 through the air inlet 12.

[0079] In order to initiate the administration procedure, the applicator nozzle 3 is placed in the patient's anal opening and it is ensured that the nozzle 3 provides a tight fit with the opening.

[0080] Compression force is then applied to the delivery container 2 by squeezing the hand holding the delivery container 2. The enema is allowed to flow through the outlet, into the tube 23 and out of the exit opening 5 in the applicator nozzle 3, resulting in the enema being injected into the rectum and colon.

[0081] When the user during the administration procedure releases the compression force on the squeezable external body 7, said body will resume its original shape, and air will be drawn into the inner flexible bladder 9 via the air inlet 12. Fig. 3a shows the enema device 1 after a small amount of enema has been expelled and a corresponding amount of air has been introduced into the flexible inner bladder 9.

[0082] After each squeezing and subsequent release action more and more air will be drawn into the inner cavity 8, gradually increasing the size of the flexible bladder 9 and simultaneously reducing the size of the outer enema container cavity 6, as shown in fig. 3a, 3b and 3c. Thus, the air in the inner cavity 8 will function as a displacement fluid, forcing the enema in the outer cavity 6 towards the outlet 10, and the enema device 1 will always be perceived as "full" by the user, until the desired dosage of enema has been administered, or the entire enema content, as shown in fig. 3d has been expelled from the device 1.

[0083] As the outer cavity with the enema gradually is reduced, the user can easier expel the enema from the device according to the present invention, compared to the known enema devices. Furthermore, since the inner 8 and outer cavity 6 cannot communicate with each other, air in the inner cavity 8 is effectively prevented from being mixed with the enema in the outer cavity 6. Accordingly, air cannot be administered into the patient's colon and unnecessary discomfort caused by distending of the colon by air, is effectively prevented.

[0084] After the liquid is administrated into the rectum and/or colon the enema device 1 is removed from the anal opening, and the applicator nozzle 3 can be detached from the delivery container 2 and either be discarded or cleaned for later use.

[0085] Fig. 4 shows a second embodiment 1' according to the present invention, this embodiment corresponds to the embodiments in fig. 1 - 3, and for like parts the same reference numbers are used.

[0086] The second embodiment 1' differ from the first embodiment in that the cavities for accommodating the enema and air is reversed.

[0087] In the second embodiment the delivery container 2 also comprises two cavities, an outer cavity 6' and an inner cavity 8'. Said outer cavity 6' is being defined by a squeezable external body 7' arranged in communication with the air inlet, and said inner cavity 8' is defined by an inner flexible bladder 9' being in flow communicating with the exit opening 5 via an outlet 10.

[0088] Enema is accommodated in the inner flexible bladder 9' and will, when pressure/compression force is placed on the delivery container 2 via the squeezable external body 7' be expelled through the exit opening 5, in a manner similar to the first embodiment 1, as shown in fig. 5a - 5d.

[0089] In short, fig. 5a shows the second embodiment 1' of the enema device according to the invention in an initial position, i.e. where the device 1' is fully loaded with the enema and ready to be used. Compression force is then applied to the delivery container 2 whereby enema flows through the outlet 10, and out of the exit opening 5 in the applicator nozzle 3.

[0090] When the compression force on the squeezable external body 7' is released, said body will resumes its original shape, and air will be drawn into the outer cavity 6' via the air inlet 12.

[0091] Fig. 5b shows the enema device 1' after a small amount of enema has been expelled and a corresponding amount of air has been introduced into the outer cavity 6'. After each squeezing and subsequent release action more and more air will be drawn into the outer cavity 6', gradually reducing the size of the flexible bladder 9', as shown in fig. 5b, 5c, 5d.

[0092] Thus, just as for the first embodiment 1, the air will function as a displacement fluid, forcing the enema in the flexible bladder 9' towards the outlet 10, thereby ensuring that the enema device 1' will be considered full whereby the user easily can expel the enema.

[0093] As for the first embodiment 1, the flexible inner bladder 9' of the second embodiment 1' is also securely attached to the delivery container 2 such that the inner cavity 8' communicate with the outlet 10, but that flow communication between the two cavities 6',8' is effectively prevented, also when the closure member 4, is detached from the delivery container 2. As shown e.g. in fig. 4, the flexible inner bladder 9' is securely attached to an upper part of the inner surface of the squeezable external body 7.

[0094] After use, the enema device can be restored to it's initial position by deflating the air cavity 8, 6' and refilling the enema cavity 6, 8' with enema.

[0095] This is obtained in the embodiments shown 1, and 1' by removing the closure member 4 providing an opening into the cavity in communication with the outlet i.e. the enema cavity whereby an easy manual refilling of enema into said cavity is possible. Simultaneously the pressure inside the enema cavity 6, 8' will drop whereby the combination valve 13 will release air from the air cavity 8, 6' deflating the air cavity.

[0096] After the air cavity 8, 6' has been emptied, the user can easily refill the enema cavity 6,8' with enema, and remount the closure member on the delivery container, whereby the enema device according to the invention is ready for the next enema administration.

[0097] In the embodiments shown 1, 1', the closure member 4 is removed by applying a twisting action on the outer surface 18 of the closure member 4 whereby the first and second coupling parts 16,17 are disengaged and the closure member 4 can be removed. The closing member 4 can then easily be remounted by simply clicking the closing member 4 back in placed, upon which the first and second coupling parts 16,17 will engage and close the delivery container 2.

[0098] It should be noted that the closure member may be releasable attached to the delivery container by other suitable means, and said opening/removal and remounting procedure may be adjusted accordingly.

[0099] Since the device according to the invention are relatively small and intended for use with a single hand, it can used equally well for both home-administrations of enema or for the use in medical or hospital facilities where larger irrigations/ enema devices are too troublesome and complicated to use.

[0100] A person skilled in the art will understand that the enema device accordingly to the invention can be combined with electronical means arranged to automatically expel the enema from said device, e.g. electronic pumping means.

[0101] Modifications and combinations of the above principles and designs are foreseen within the scope of the present invention.

Claims

1. An enema device (1;1') comprising a delivery container (2) and an applicator nozzle (3), wherein said delivery container (2) comprises two cavities (6,8;6',8'), an outer cavity (6;6') defined by a squeezable external body (7;7'), and an inner cavity (8;8') defined by an inner flexible bladder (9;9'), and wherein one of said cavities (6;8') is communicating with an outlet (10) for dispersing the enema through the applicator nozzle (3) and the other cavity (8;6') is communicating with the surroundings via an air inlet (12).

2. An enema device (1;1') according to claim 1, wherein the enema is accommodated in the outer cavity (6), said outer cavity (6) is communicating with the outlet (10), and the inner cavity (8) is communicating with the surroundings via the air inlet (12).
3. An enema device (1;1') according to claim 1, wherein enema is accommodated in the inner cavity (8'), said inner cavity (8') is communicating with the outlet (19), the outer cavity (6') is communicating with the surroundings via the air inlet (12).
4. An enema device (1;1') according to any of the claims 1 - 3, wherein the inner (8;8') and outer cavity (6;6') are not in flow communication.
5. An enema device (1;1') according to any of the preceding claims, wherein a first non-return valve (11) is placed in communication with the outlet (10), and/or a second non-return valve (13) is placed in communication with the air inlet (12).
6. An enema device (1;1') according to any of the preceding claims, wherein the air inlet (12) is placed in the enema device (1;1') at a position separate from the applicator nozzle (3), preferably opposite the applicator nozzle (3).
7. An enema device (1;1') according to any of the preceding claims, wherein the enema device (1;1') is arranged for deflating the cavity (8;6') communicating with the air inlet (12).
8. An enema device (1;1') according to any of the preceding claims, wherein the enema device (1;1') is arranged for being opened and closed.
9. An enema device (1;1') according to any of the preceding claims, wherein the enema device (1;1') comprises a closure member (4) arranged for being releasable attached to the delivery container (2), e.g. by means of a first coupling unit (15).
10. An enema device (1;1') according to claim 9, wherein the outlet (10) is placed in the closure member (4), and that the enema device (1;1') is arranged such that when the closure member (4) is opened/removed there is only access to the cavity (6;8') communicating with the outlet (10).
11. An enema device (1;1') according to claim 9 or 10, wherein the enema device (1;1') is arranged for releasing the air in the cavity (8;6') communicating with the air inlet (10), to the surroundings when the closure member (4) is opened/removed from the delivery container (2).
12. An enema device (1;1') according to any of the claims 9 - 11, wherein the closure member (4) is made of a rigid material, and releasable attached to the delivery container (2) via an intermediate member (14).
13. An enema device (1;1') according to any of the preceding claims, wherein the delivery container (2) has a shape arranged to fit into the users hand, e.g. an elongated spherical shape, an oval shape or a bulb shape.
14. A method of refilling the enema device (1;1') according to any of the claims 1 - 13, with an enema, said method comprises the following consecutive steps:
- opening the delivery container (2),
 - deflating the cavity (8;6') communicating with the air inlet (12),
 - refilling the cavity (6;8') communicating with the outlet (10) with an enema, and
 - closing the delivery container (2).
15. The method according to claim 14, wherein air in the cavity (8;6') communicating with the air inlet (12) automatically is expelled to the surroundings when the closure member (4) is opened/removed from the delivery container (2).

Patentansprüche

1. Klistiervorrichtung (1; 1'), umfassend einen Abgabebehälter (2) und eine Applikatordüse (3), wobei der Abgabebehälter (2) zwei Hohlräume (6, 8; 6', 8') umfasst, einen äußeren Hohlraum (6; 6'), definiert durch einen zusammendrückbaren äußeren Körper (7; 7'), und einen inneren Hohlraum (8; 8'), definiert durch eine innere flexible Blase (9; 9'), und wobei einer der Hohlräume (6; 8') mit einem Auslass (10) zum Verteilen des Einlaufs durch die Applikatordüse (3) in Verbindung steht und der andere Hohlraum (8; 6') über einen Lufteinlass (12) mit der Umgebung in Verbindung steht.
2. Klistiervorrichtung (1; 1') nach Anspruch 1, wobei der Einlauf in dem äußeren Hohlraum (6) untergebracht ist, der äußere Hohlraum (6) mit dem Auslass (10) in Verbindung steht und der innere Hohlraum (8) über den Lufteinlass (12) mit der Umgebung in Verbindung steht.
3. Klistiervorrichtung (1; 1') nach Anspruch 1, wobei der Einlauf in dem inneren Hohlraum (8') untergebracht ist, der innere Hohlraum (8') mit dem Auslass (19) in Verbindung steht, der äußere Hohlraum (6') über den Lufteinlass (12) mit der Umgebung in Verbindung steht.
4. Klistiervorrichtung (1; 1') nach einem der Ansprüche

- 1 bis 3, wobei der innere (8; 8') und der äußere Hohlraum (6; 6') nicht in Strömungsverbindung stehen.
5. Klistiervorrichtung (1; 1') nach einem der vorhergehenden Ansprüche, wobei ein erstes Rückschlagventil (11) mit dem Auslass (10) in Verbindung gebracht wird und/oder ein zweites Rückschlagventil (13) mit dem Lufteinlass (12) in Verbindung gebracht wird.
6. Klistiervorrichtung (1; 1') nach einem der vorhergehenden Ansprüche, wobei der Lufteinlass (12) in der Klistiervorrichtung (1; 1') an einer Position angeordnet ist, die von der Applikatordüse (3) getrennt ist, vorzugsweise gegenüber der Applikatordüse (3).
7. Klistiervorrichtung (1; 1') nach einem der vorhergehenden Ansprüche, wobei die Klistiervorrichtung (1; 1') zum Entleeren des mit der Lufteinlass (12) in Verbindung stehenden Hohlraums (8; 6') angeordnet ist.
8. Klistiervorrichtung (1; 1') nach einem der vorhergehenden Ansprüche, wobei die Klistiervorrichtung (1; 1') zum Öffnen und Schließen angeordnet ist.
9. Klistiervorrichtung (1; 1') nach einem der vorhergehenden Ansprüche, wobei die Klistiervorrichtung (1; 1') ein Verschlusselement (4) umfasst, das so angeordnet ist, dass es an dem Abgabebehälter (2) lösbar befestigt ist, z. B. mittels einer ersten Kopplungseinheit (15).
10. Klistiervorrichtung (1; 1') nach Anspruch 9, wobei der Auslass (10) in dem Verschlusselement (4) angeordnet ist und dass die Klistiervorrichtung (1; 1') so angeordnet ist, dass wenn das Verschlusselement (4) geöffnet/entfernt ist, es nur Zugang zum Hohlraum (6; 8') gibt, der mit dem Auslass (10) in Verbindung steht.
11. Klistiervorrichtung (1; 1') nach Anspruch 9 oder 10, wobei die Klistiervorrichtung (1; 1') zum Ablassen der Luft in dem Hohlraum (8; 6'), der mit dem Lufteinlass (10) in Verbindung steht, in die Umgebung angeordnet ist, wenn das Verschlusselement (4) aus dem Abgabebehälter (2) geöffnet/entfernt wird.
12. Klistiervorrichtung (1; 1') nach einem der Ansprüche 9 bis 11, wobei das Verschlusselement (4) aus einem starren Material besteht und über ein Zwischenelement (14) lösbar an dem Abgabebehälter (2) befestigt ist.
13. Klistiervorrichtung (1; 1') nach einem der vorhergehenden Ansprüche, wobei der Abgabebehälter (2) eine Form aufweist, die so angeordnet ist, dass sie in die Hand des Benutzers passt, z. B. eine längliche Kugelform, eine ovale Form oder eine Zwiebelform.

14. Verfahren zum Auffüllen der Klistiervorrichtung (1; 1') gemäß einem der Ansprüche 1 bis 13 mit einem Einlauf, wobei das Verfahren die folgenden aufeinanderfolgenden Schritte umfasst:
- Öffnen des Abgabebehälters (2),
 - Entleeren des Hohlraums (8; 6'), der mit dem Lufteinlass (12) in Verbindung steht,
 - Auffüllen des Hohlraums (6; 8'), der mit dem Auslass (10) in Verbindung steht, mit einem Einlauf, und
 - Schließen des Abgabebehälters (2).
15. Verfahren nach Anspruch 14, wobei Luft in dem Hohlraum (8; 6'), der mit dem Lufteinlass (12) in Verbindung steht, automatisch in die Umgebung ausgestoßen wird, wenn das Verschlusselement (4) aus dem Abgabebehälter (2) geöffnet/entfernt wird.

Revendications

1. Dispositif destiné à un lavement (1; 1') qui comprend un récipient (2) pour la distribution et un embout faisant office d'applicateur (3) ; dans lequel ledit récipient (2) pour la distribution comprend deux cavités (6, 8 ; 6', 8'), une cavité externe (6 ; 6') qui est définie par un corps externe (7 ; 7') qui peut être comprimé et une cavité interne (8 ; 8') qui est définie par une vessie interne flexible (9 ; 9') ; et dans lequel une desdites cavités (6 ; 8') est mise en communication avec une sortie (10) pour la dispersion du lavement à travers l'embout faisant office d'applicateur (3) et l'autre cavité (8 ; 6') est mise en communication avec le milieu environnant par l'intermédiaire d'une entrée pour l'air (12).
2. Dispositif destiné à un lavement (1 ; 1') selon la revendication 1, dans lequel le lavement est logé dans la cavité externe (6), ladite cavité externe (6) est mise en communication avec la sortie (10) et la cavité interne (8) est mise en communication avec le milieu environnant par l'intermédiaire de l'entrée pour l'air (12).
3. Dispositif destiné à un lavement (1 ; 1') selon la revendication 1, dans lequel le lavement est logé dans la cavité interne (8'), ladite cavité interne (8') est mise en communication avec la sortie (10), la cavité externe (6') est mise en communication avec le milieu environnant par l'intermédiaire de l'entrée pour l'air (12).
4. Dispositif destiné à un lavement (1 ; 1') selon l'une quelconque des revendications 1 à 3, dans lequel la cavité interne (8 ; 8') et la cavité externe (6 ; 6') ne sont pas mises en communication par écoulement.

5. Dispositif destiné à un lavement (1 ; 1') selon l'une quelconque des revendications précédentes, dans lequel une première soupape de non-retour (11) est mise en communication avec la sortie (10) et/ou une deuxième soupape de non-retour (13) est mise en communication avec l'entrée pour l'air (12). 5
6. Dispositif destiné à un lavement (1 ; 1') selon l'une quelconque des revendications précédentes, dans lequel l'entrée pour l'air (12) est placée dans le dispositif destiné à un lavement (1 ; 1') à un endroit qui est séparé de l'embout faisant office d'applicateur (3), de préférence à l'opposé de l'embout faisant office d'applicateur (3). 10
7. Dispositif destiné à un lavement (1 ; 1') selon l'une quelconque des revendications précédentes, dans lequel le dispositif destiné à un lavement (1 ; 1') est conçu pour dégonfler la cavité (8 ; 6') qui est mise en communication avec l'entrée pour l'air (12). 20
8. Dispositif destiné à un lavement (1 ; 1') selon l'une quelconque des revendications précédentes, dans lequel le dispositif destiné à un lavement (1 ; 1') est conçu pour être ouvert et fermé. 25
9. Dispositif destiné à un lavement (1 ; 1') selon l'une quelconque des revendications précédentes, dans lequel le dispositif destiné à un lavement (1 ; 1') comprend un élément de fermeture (4) qui est conçu pour venir se fixer de manière amovible au récipient (2) pour la distribution, par exemple au moyen d'une première unité d'accouplement (15). 30
10. Dispositif destiné à un lavement (1 ; 1') selon la revendication 9, dans lequel la sortie (10) est placée dans l'élément de fermeture (4) ; et en ce que le dispositif destiné à un lavement (1 ; 1') est conçu d'une manière telle que, lorsque l'élément de fermeture (4) est ouvert/retiré, on obtient uniquement un accès à la cavité (6 ; 8') qui est mise en communication avec la sortie (10). 40
11. Dispositif destiné à un lavement (1 ; 1') selon la revendication 9 ou 10, dans lequel le dispositif destiné à un lavement (1 ; 1') est conçu pour libérer l'air présent dans la cavité (8 ; 6') qui est mise en communication avec l'entrée pour l'air (10), en direction du milieu environnant lorsque l'élément de fermeture (4) est ouvert/retiré du récipient (2) pour la distribution. 50
12. Dispositif destiné à un lavement (1 ; 1') selon l'une quelconque des revendications 9 à 11, dans lequel l'élément de fermeture (4) est fabriqué à partir d'une matière rigide et est fixé de manière amovible au récipient (2) pour la distribution par le biais d'un élément intermédiaire (14). 55
13. Dispositif destiné à un lavement (1 ; 1') selon l'une quelconque des revendications précédentes, dans lequel le récipient (2) pour la distribution possède une configuration qui est conçue pour pouvoir être aisément saisie par la main de l'utilisateur, par exemple une configuration sphérique allongée, une configuration de forme ovale ou une configuration sous la forme d'une ampoule.
14. Procédé destiné au remplissage du dispositif destiné à un lavement (1 ; 1') selon l'une quelconque des revendications 1 à 13, avec un lavement, ledit procédé comprenant les étapes successives telles qu'indiquées ci-après, dans lesquelles :
- on ouvre le récipient (2) pour la distribution ;
 - on dégonfle la cavité (8 ; 6') qui est mise en communication avec l'entrée pour l'air (12) ;
 - on remplit la cavité (6 ; 8') qui est mise en communication avec la sortie (10) avec un lavement ; et
 - on ferme le récipient (2) pour la distribution.
15. Procédé selon la revendication 14, dans lequel l'air présent dans la cavité (8 ; 6') qui est mise en communication avec l'entrée pour l'air (12) est expulsé de manière automatique en direction du milieu environnant lorsque l'élément de fermeture (4) est ouvert/retiré du récipient (2) pour la distribution.

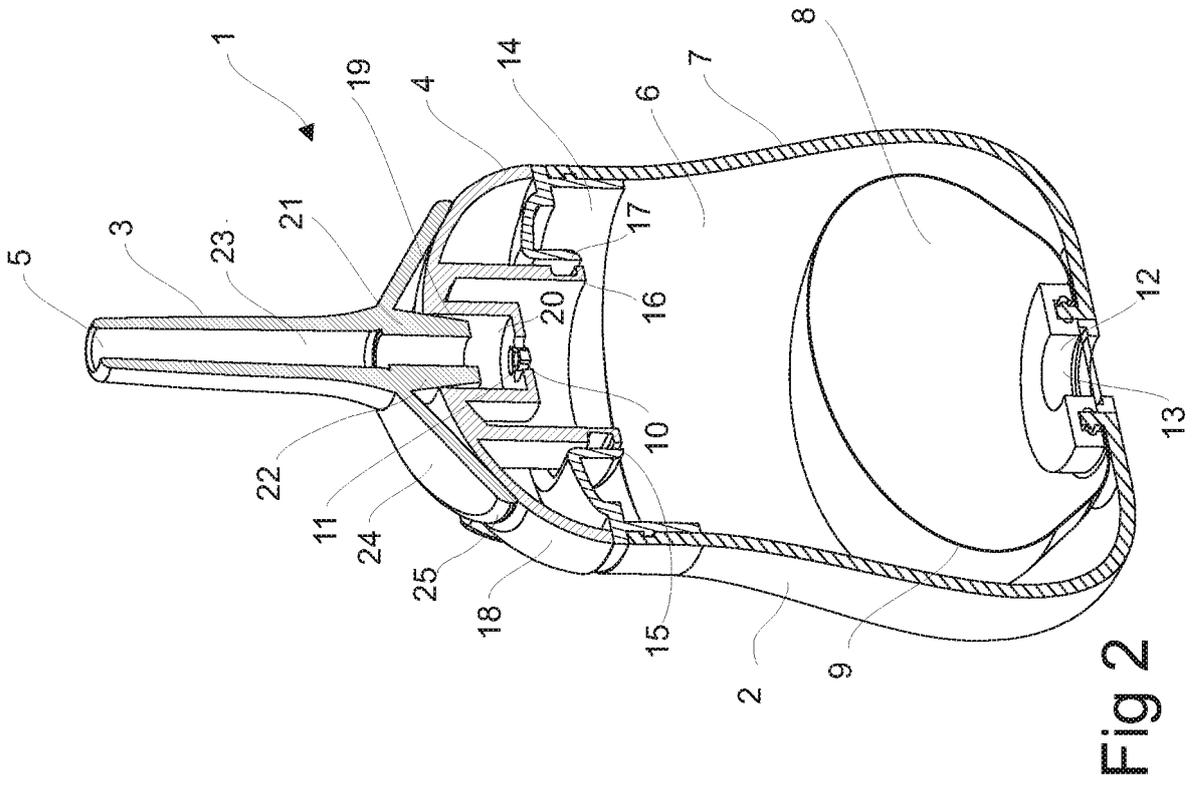


Fig 2

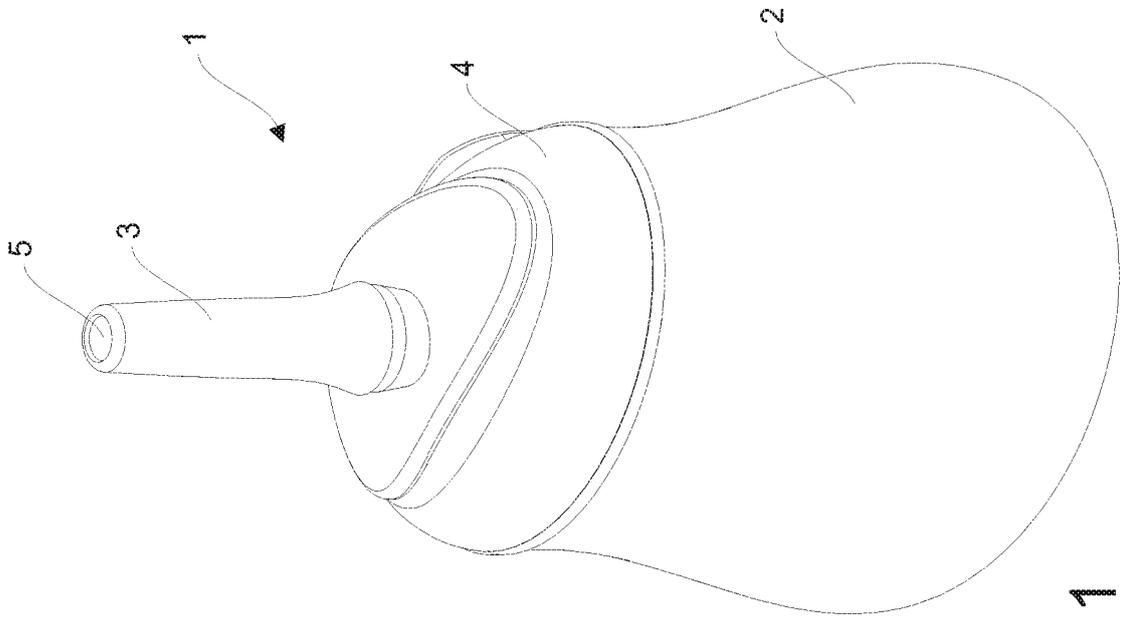


Fig 1

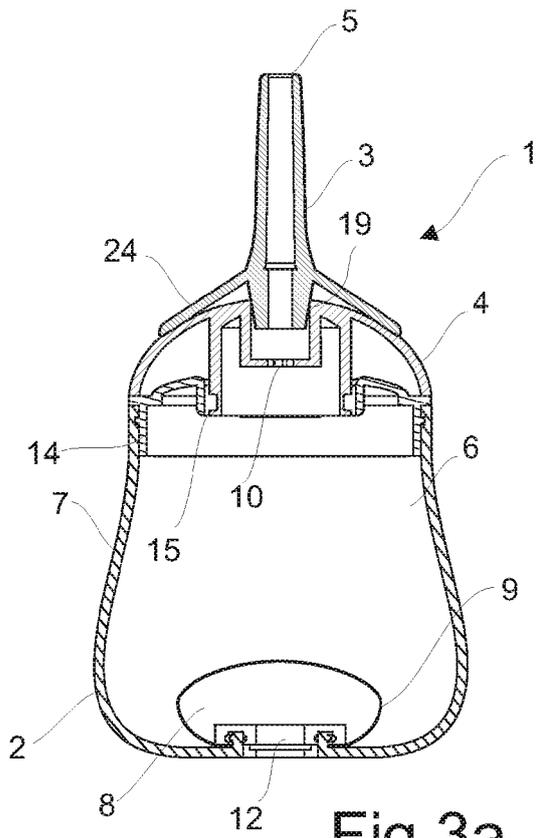


Fig 3a

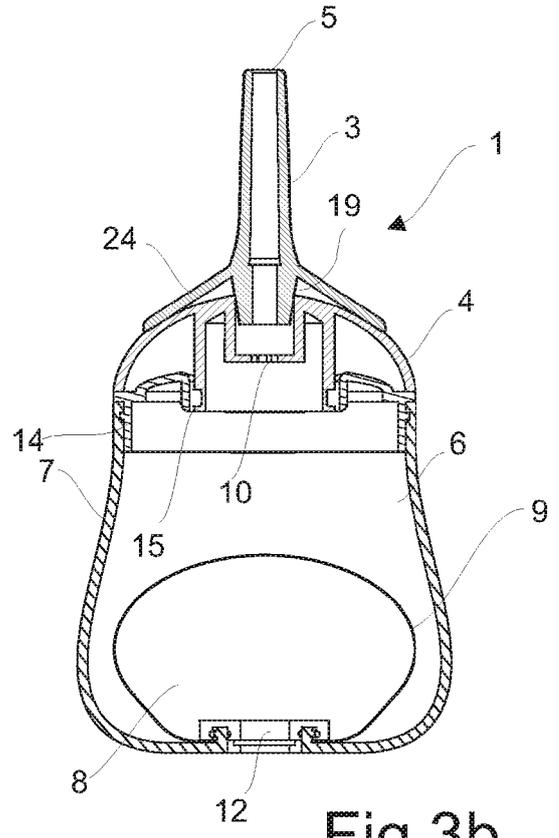


Fig 3b

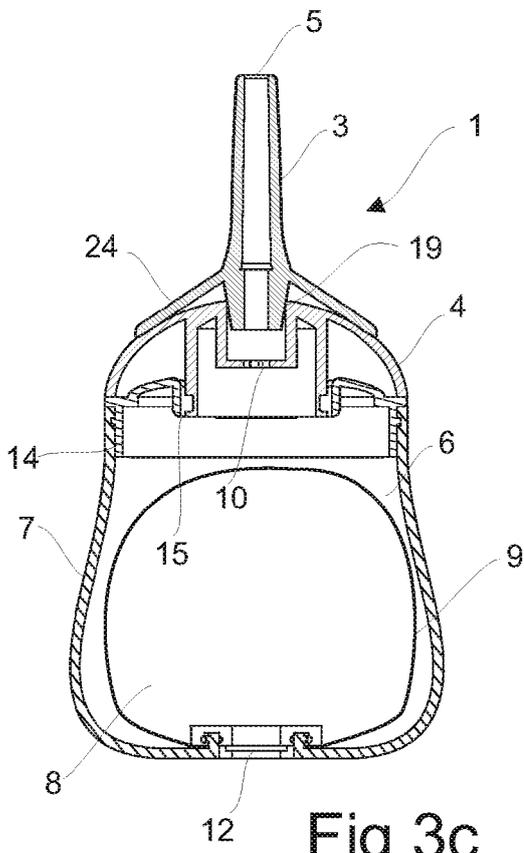


Fig 3c





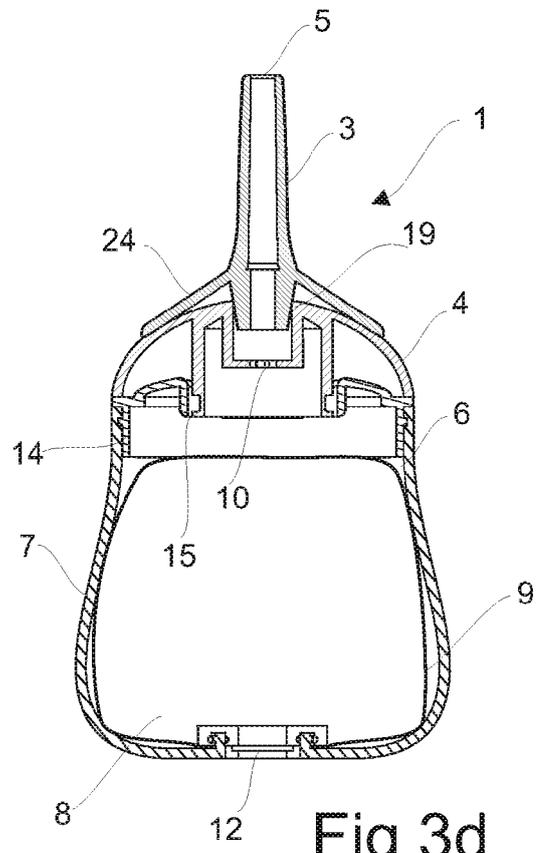


Fig 3d

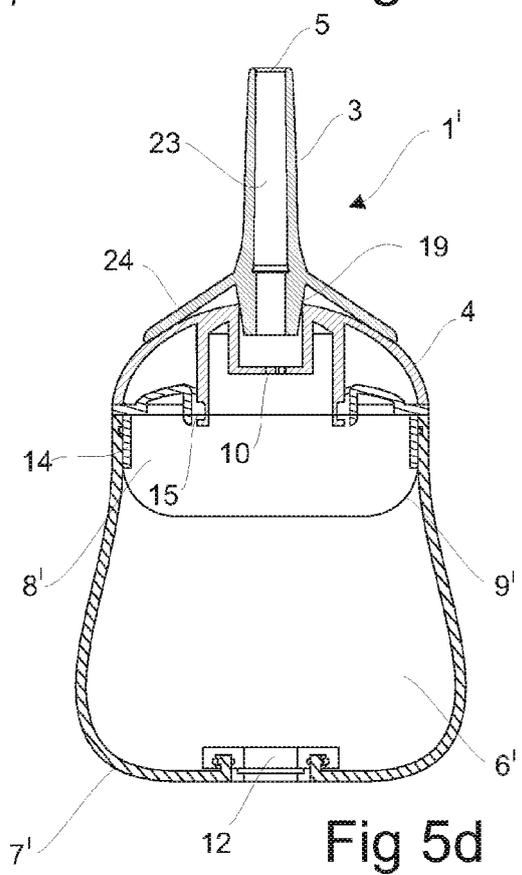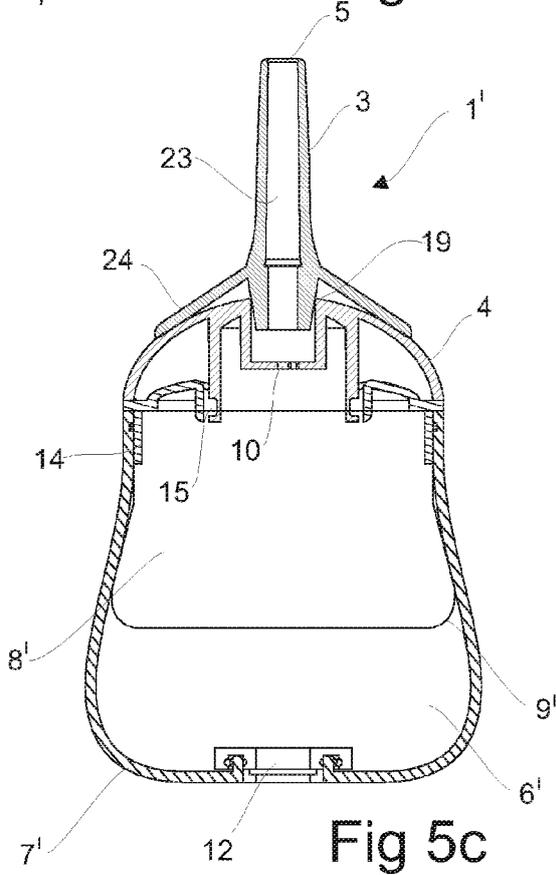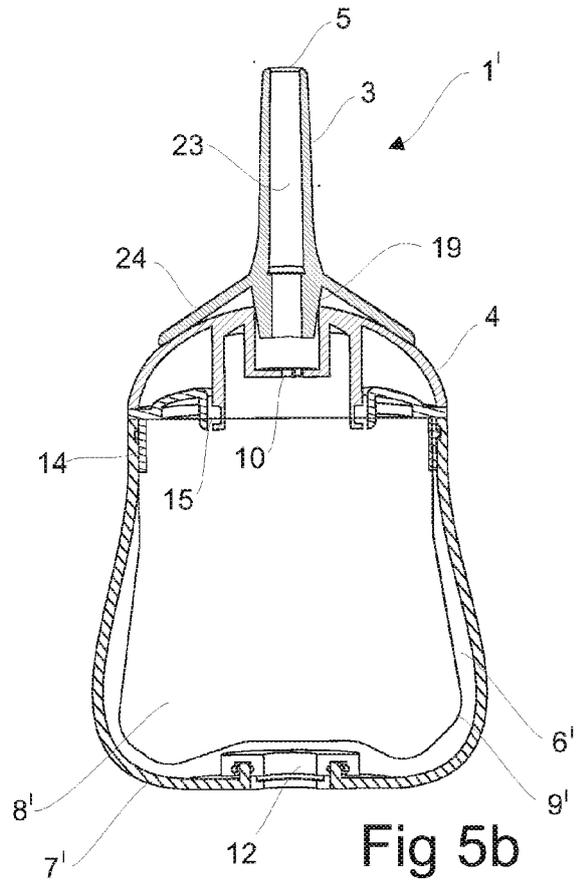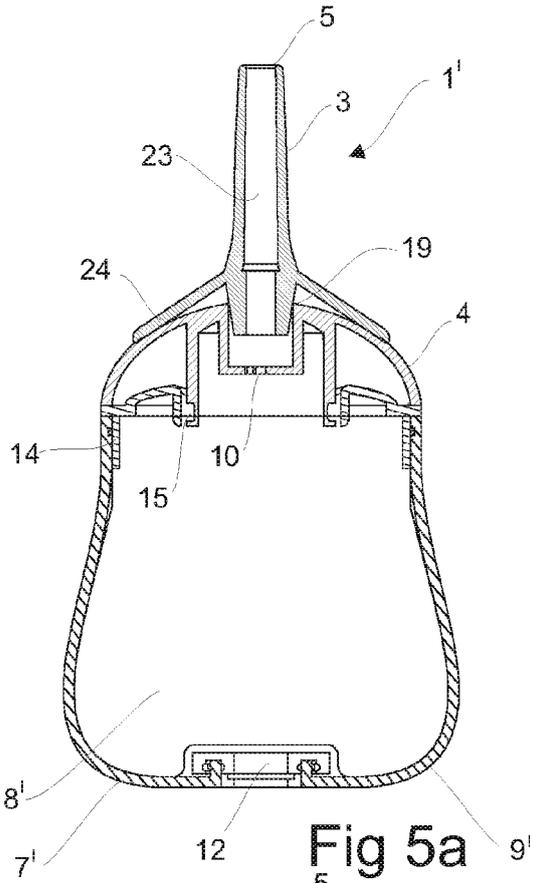

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2010122537 A [0008]
- US 3398743 A [0008]