

(12) **PATENTANSØGNING**

Patent- og
Varemærkestyrelsen

(51) Int.Cl.⁸: **B 29 D 31/512 (2006.01)**

(21) Patentansøgning nr: **PA 2009 00467**

(22) Indleveringsdag: **2009-04-07**

(24) Løbedag: **2007-10-09**

(41) Alm. tilgængelig: **2009-04-07**

(86) International ansøgning nr: **PCT/CN2007/002901**

(86) International indleveringsdag: **2007-10-09**

(85) Videreførelsesdag: **2009-04-07**

(30) Prioritet: **2006-10-10 US 60/851.827**

(71) Ansøger: **Chen Ming-Te, No. 2, Lane 334, San-Fon Road, Fon-Chou City, Taichung Hsien, Taiwan**


(72) Opfinder: **Chen Chuang-Chuan, No.51, Sec. 4, Jhong Sing Rd., WuGu Township, 24842 Taipei Country, Taiwan**

(74) Fuldmægtig: **Zacco Denmark A/S, Hans Bekkevolds Allé 7, 2900 Hellerup, Danmark**

(54) Benævnelse: **Mold for making shoes**

(57) Sammendrag:

A mold assembly for making shoes includes a bottom mold having a cavity defined in a top thereof, two side molds movably connected to two sides of the bottom mold and a top mold removably located on a top of the bottom mold, two respective top
5 surfaces of the two side molds have two positioning plates. Each positioning plate has a recess defined in an inner side thereof and the recess includes patterns defined therein. The positioning plates are snugly engaged with outside of the top mold so that rubber injected into the cavity does not leak from the gap between the top mold and the side molds.

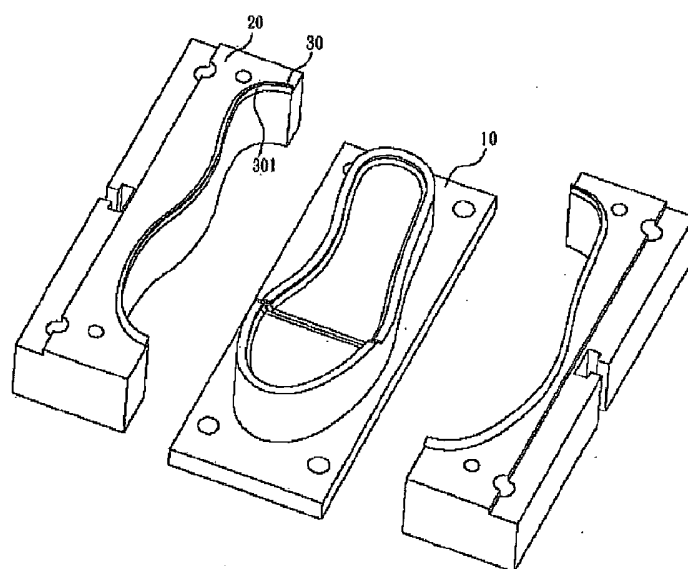

WHAT IS CLAIMED IS:

1. A mold assembly for making shoes, comprising:

a bottom mold having a cavity defined in a top thereof;

two side molds movably connected to two sides of the bottom mold,

5 two respective top surfaces of the two side molds have two positioning plates,
and each positioning plate having a recess defined in an inner side thereof and
the recess having patterns defined therein.

2. The mold assembly for making shoes according to claim 1, the connect
mold between positioning plates and side mold including extend directly and
10 install separately.

3. The mold assembly for making shoes according to claim 1, the positioning
plates can be replace another set so as to have different patterns.

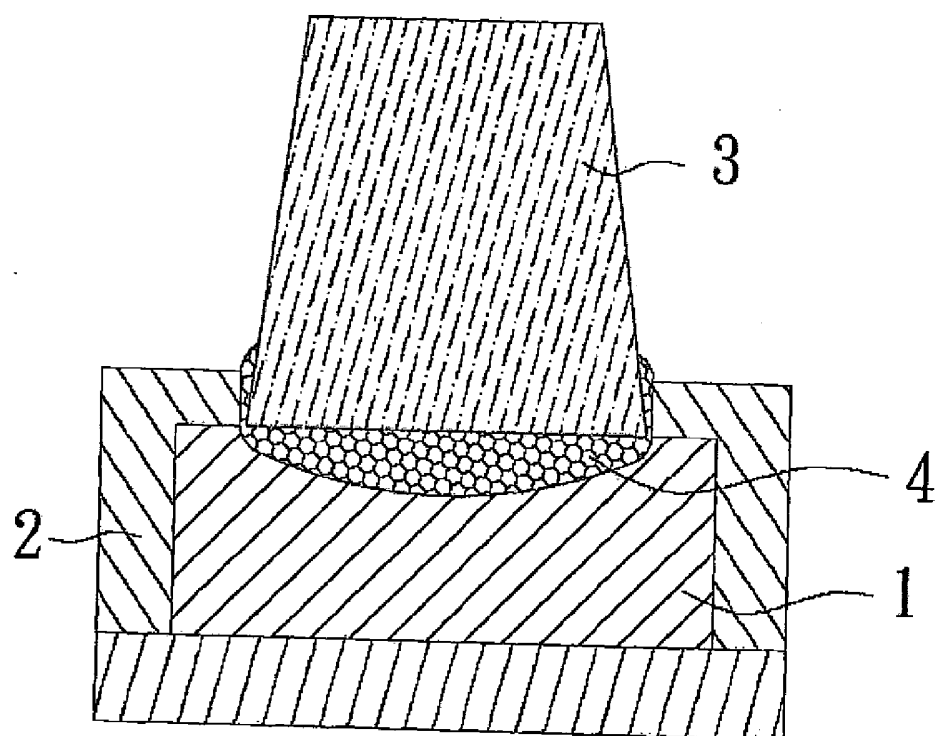


图 1

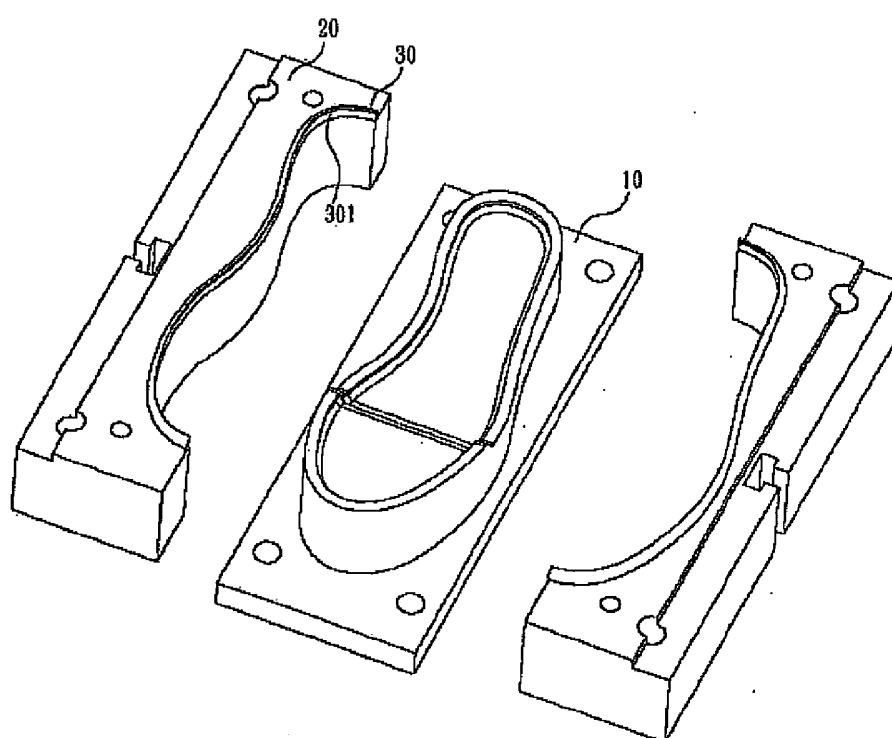


图 2

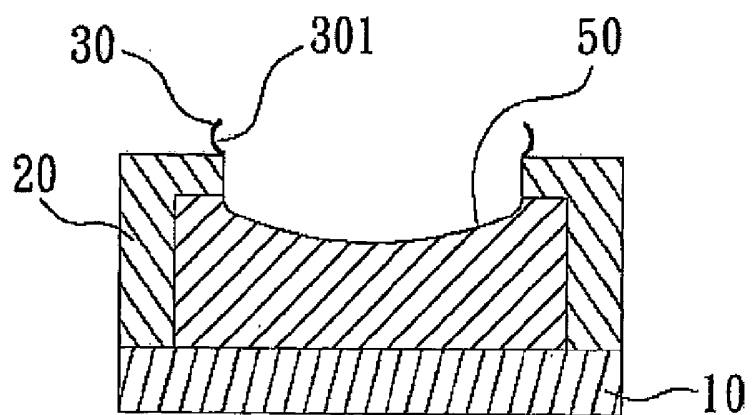


图 3

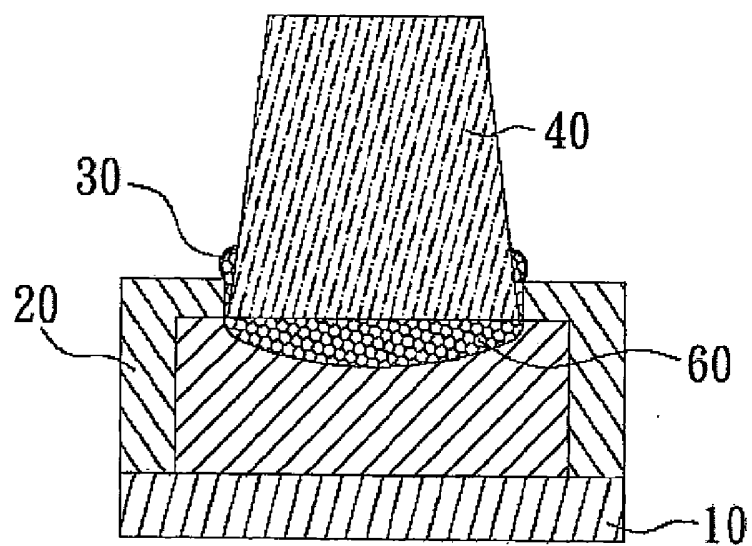


图 4

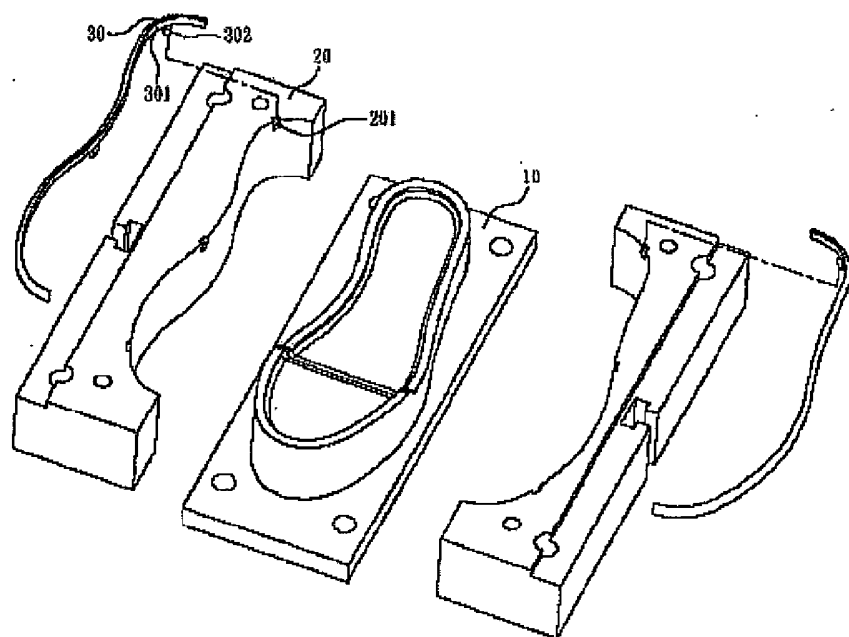


图 5