



(86) Date de dépôt PCT/PCT Filing Date: 2012/11/04

(87) Date publication PCT/PCT Publication Date: 2013/05/10

(45) Date de délivrance/Issue Date: 2017/04/25

(85) Entrée phase nationale/National Entry: 2014/04/29

(86) N° demande PCT/PCT Application No.: US 2012/063474

(87) N° publication PCT/PCT Publication No.: 2013/067470

(30) Priorité/Priority: 2011/11/04 (US61/628,725)

(51) Cl.Int./Int.Cl. *A45C 7/00* (2006.01)

(72) Inventeurs/Inventors:

HOGAN, DONALD, US;
RADA, GEORGENE, US;
LOVERSO, JESSICA, US;
DIERKES, MATTHEW, US;
KRULIK, RICHARD, US


(73) Propriétaire/Owner:

BRIGGS & RILEY TRAVELWARE LLC, US

(74) Agent: SHAPIRO COHEN LLP

(54) Titre : SYSTÈME D'EXPANSION DE TYPE A CLIQUET POUR BAGAGES

(54) Title: RATCHET-TYPE EXPANSION SYSTEM FOR LUGGAGE

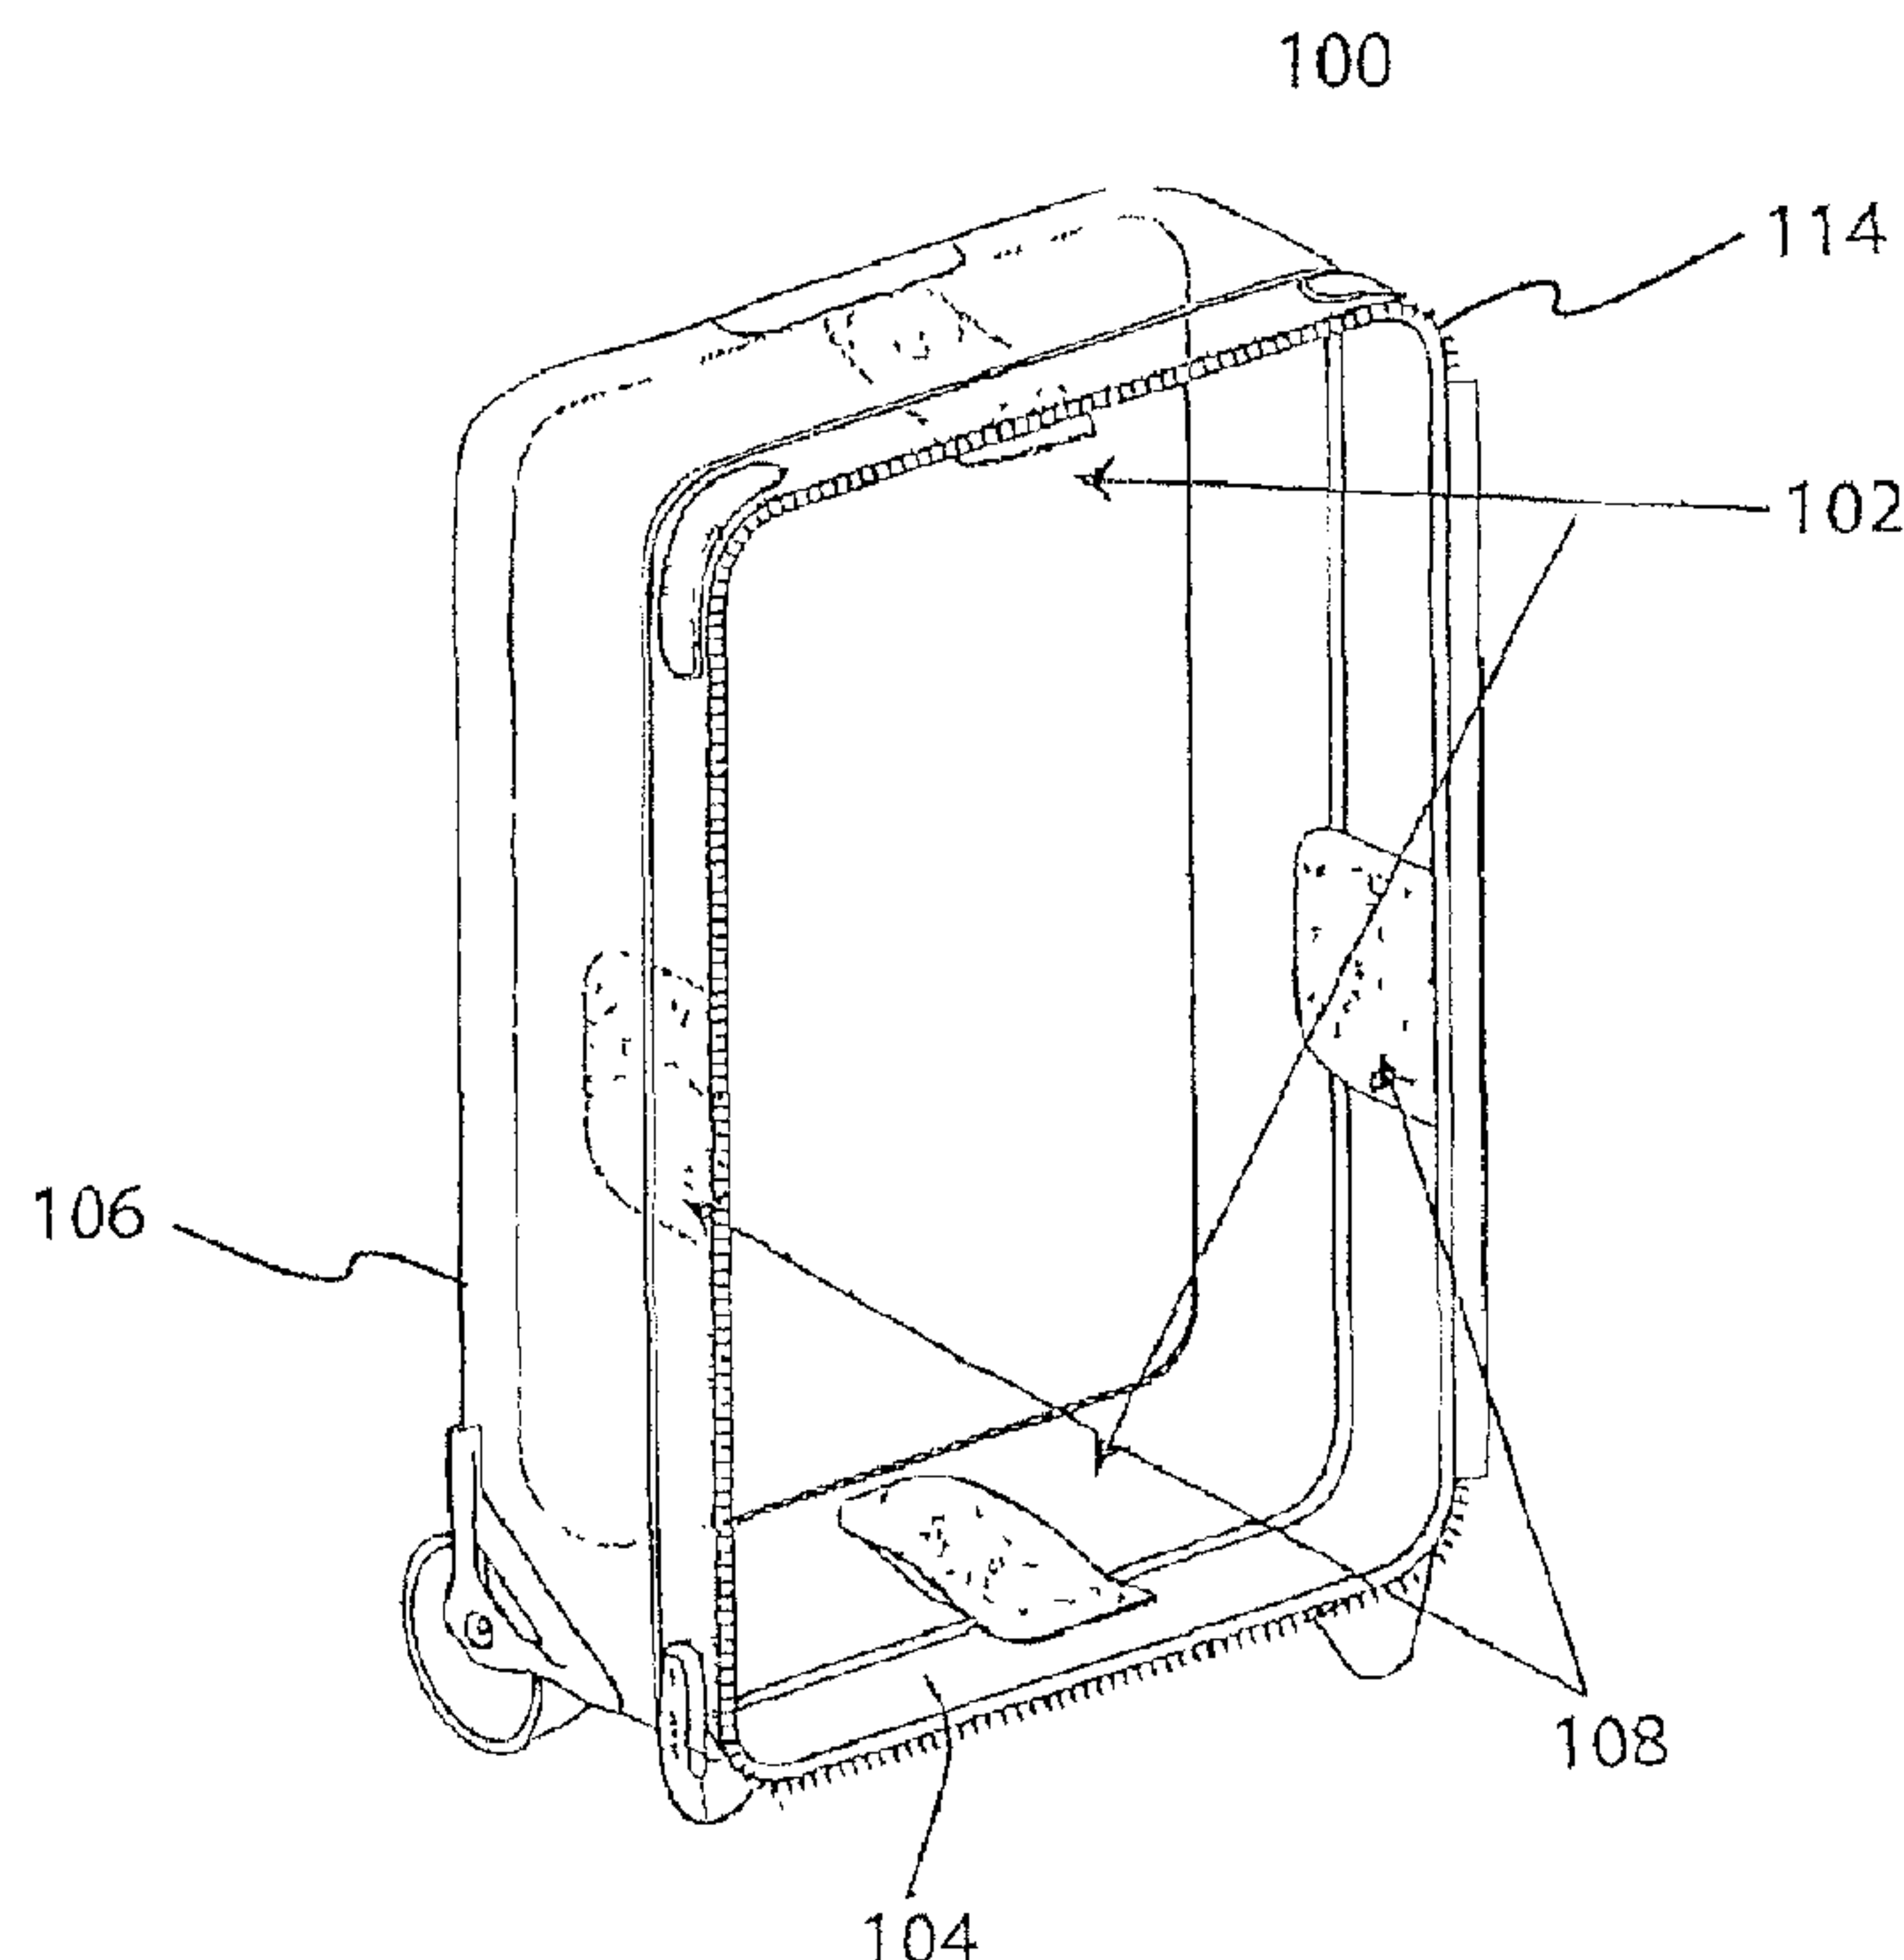

(57) Abrégé/Abstract:

The article of luggage includes a luggage main body having a bottom surface and a cavity formed to receive articles for packing; an expansion body having a perimeter defining a cavity; a foldable gusset joining the luggage main body to the expansion body; and an expansion and locking device disposed internally at opposite ends of the article of luggage. The expansion and locking device is configured to allow free movement of the expansion body in a compression direction towards the luggage main body and configured to allow locking movement of the expansion body in an expanding direction away from the luggage main body. One expansion and locking device is preferably attached to two or more walls of the luggage. After finishing packing, the luggage is closed and the user pushes the expanding member towards the base member, ratcheting the pawl past the ratchet teeth to collapse the luggage.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
10 May 2013 (10.05.2013)



(10) International Publication Number
WO 2013/067470 A1

(51) International Patent Classification:
A45C 7/00 (2006.01)

(21) International Application Number:

PCT/US2012/063474

(22) International Filing Date:

4 November 2012 (04.11.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/628,725 4 November 2011 (04.11.2011) US

(72) Inventors; and

(71) Applicants : **HOGAN, Donald** [US/US]; 965 Summit Ave., Jersey City, New Jersey 07307 (US). **RADA, Georgene** [US/US]; 245 Scudder Ave. #4, Northport, New York 11768 (US). **LOVERSO, Jessica** [US/US]; 12 Shore Lane, Apt. #1, Bayshore, New York 11706 (US). **DI-ERKES, Matthew** [US/US]; 70 Chelsea Drive, Mount Sinai, New York 11766 (US). **KRULIK, Richard** [US/US]; 6 Amanda Court, Northport, New York 11768 (US).


(74) Agent: **GROLZ, Edward W.**; Scully, Scott, Murphy & Presser, 400 Garden City Plaza, Suite 300, Garden City, New York 11530 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: RATCHET-TYPE EXPANSION SYSTEM FOR LUGGAGE

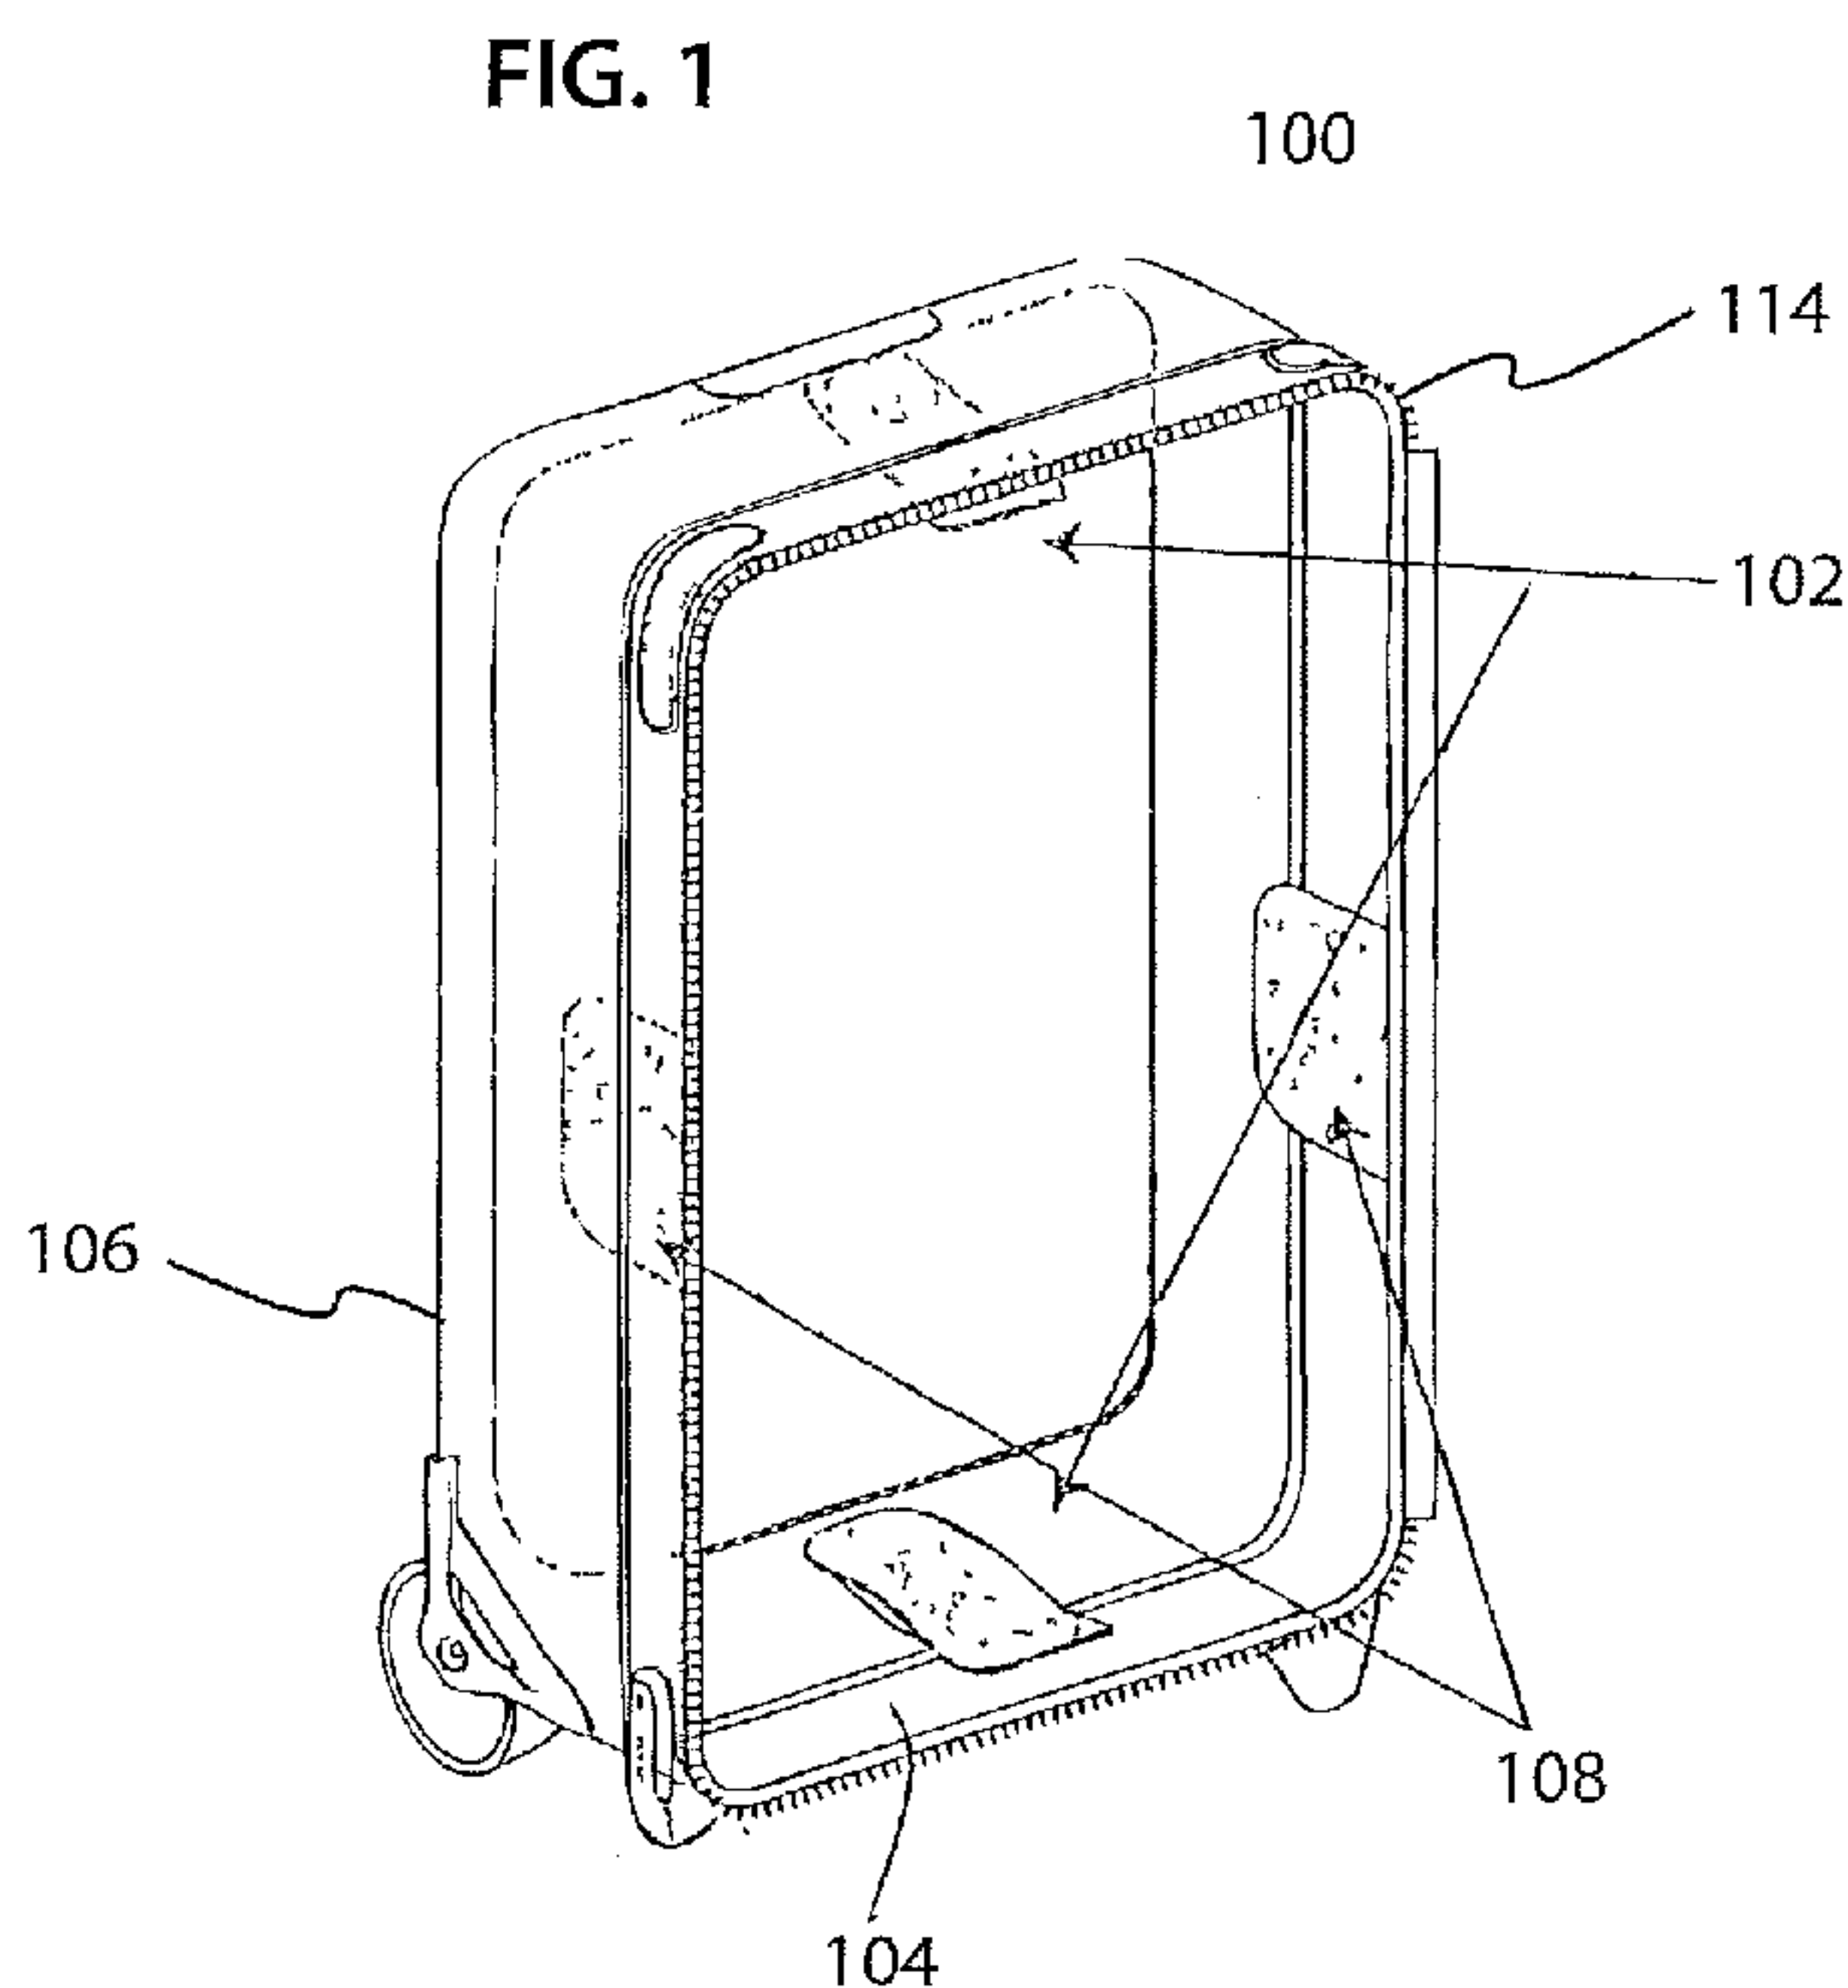

(57) Abstract: The article of luggage includes a luggage main body having a bottom surface and a cavity formed to receive articles for packing; an expansion body having a perimeter defining a cavity; a foldable gusset joining the luggage main body to the expansion body; and an expansion and locking device disposed internally at opposite ends of the article of luggage. The expansion and locking device is configured to allow free movement of the expansion body in a compression direction towards the luggage main body and configured to allow locking movement of the expansion body in an expanding direction away from the luggage main body. One expansion and locking device is preferably attached to two or more walls of the luggage. After finishing packing, the luggage is closed and the user pushes the expanding member towards the base member, ratcheting the pawl past the ratchet teeth to collapse the luggage.

WO 2013/067470 A1



Published:

— *with international search report (Art. 21(3))*

RATCHET-TYPE EXPANSION SYSTEM FOR LUGGAGE

BACKGROUND OF THE INVENTION

[0001] Field of the Invention

[0002] The present invention relates to luggage expansion systems which readily accommodate the needs of travelers to selectively increase or decrease the luggage capacity as needed, and as well, facilitates packing the article of luggage in the most compact fashion.

Description of the Related Art

[0003] Due to limitations in space when traveling, especially on airlines, travelers are limited to a single checked piece of luggage which must conform to particular size restrictions.

Similarly, a traveler is limited to a single carry-on luggage that must conform to even stricter size limitations since the carry-on must fit within overhead storage compartments.

[0004] Travelers are also in need of enough volume within the luggage to carry all necessary clothing and other items. Many conventional luggage have expandable sections that can be expanded by unzipping the section. With the expandable section unzipped, the traveler realizes additional storage space within the luggage. Once fully packed, the expandable section can be rezippped to compress the clothing and other articles packed in the luggage.

[0005] However, the conventional expandable luggage is often quite difficult to rezip when the luggage is fully packed, because the articles inside the luggage resist being compressed.

SUMMARY OF THE INVENTION

[0006] The present invention is directed to improvements in luggage expansion systems of the type shown and described in commonly assigned US Patent Nos. 6,575,272 and 7,426,985. Present day expandable luggage provides two alternative configurations, one in the collapsed condition, and the other in the extended condition. The present invention provides a ratchet-type expansion system for luggage, wherein upon completion of packing by the user, the user can compress the upper end portion of the luggage and lock it in place to take up any unused space therewithin, resulting in a fully and tightly packed article of luggage which is uniquely compact.

[0007] The ratchet device which forms part of the present invention allows free movement in one direction, i.e., the collapsing direction, while permitting movement in the opposite direction, i.e., the expanding direction, by a manual release mechanism which forms part of the device.

[0008] The invention relates to a ratchet-type expansion system including a ratchet expansion and locking device for luggage, and luggage incorporating such ratchet expansion device. The device includes a base section having a plurality of ratchet teeth, i.e., preferably nine such teeth, and an opposed pawl section preferably having three such pawls, which are respectively dimensioned and shaped to slide over the ratchet teeth in the luggage

collapsing direction, and to prevent movement in the opposite - or expanding - direction, except when a latch is lifted to release the pawls from the ratchet teeth. Any number of ratchet teeth and pawls can be used. Alternative embodiments are also disclosed.

[0009] In one alternative embodiment a pivotal lever rocker arm is provided for the pawl section having a single pawl tooth at the free end of the arm.

[0010] In another embodiment, each device includes dual spaced apart toothed sections, each such section associated with its own pawl section. The device spans over a relatively larger distance.

[0011] In an embodiment of the present invention, the article of luggage includes a luggage main body having a bottom surface and a cavity formed to receive articles for packing; an expansion body having a perimeter defining a cavity; a foldable gusset joining the luggage main body to the expansion body, the foldable gusset allowing the expansion body to move away and towards the luggage main body to vary a size of a volume formed by the cavity of the luggage main body and the cavity of the expansion body; and an expansion and locking device disposed internally at opposite ends of the article of luggage, the expansion and locking device being configured to allow free movement of the expansion body in a compression direction towards the luggage main body and configured to allow locking movement of the expansion body in an expanding direction away from the luggage main body.

[0012] The expansion and locking device is a ratcheting assembly having a set of parallel teeth affixed to one of the luggage main body or the expansion body; a pawl configured to engage and disengage from the set of parallel teeth by actuation of a lever, the pawl being affixed to the other of the luggage main body or the expansion body; and a biasing

member configured to maintain the pawl in an engaged state with the parallel teeth in the absence of an actuating force applied to the lever.

[0013] Additionally, the ratcheting assembly includes a holding assembly having a housing on which the lever is provided, the housing having an elongated opening formed on a surface orthogonal to the lever; and a double column of parallel teeth disposed on a sliding member dimensioned for slideable insertion into the elongated opening, the parallel teeth engaging the pawl inside the housing of the holding assembly.

[0013.1] According to an aspect of the present invention, there is provided an article of luggage having an expansion capability, the article of luggage comprising:

- a luggage main body having a bottom surface and a cavity formed to receive articles for packing;

- an expansion body having a perimeter defining a cavity;

- a foldable gusset joining the luggage main body to the expansion body, the foldable gusset allowing the expansion body to move away and towards the luggage main body to vary a size of a volume formed by the cavity of the luggage main body and the cavity of the expansion body;

- an openable cover attached to the expansion body; and

an expansion and locking device disposed internally at opposite ends of the article of luggage, the expansion and locking device being configured to allow free movement of the expansion body in a compression direction towards the luggage main body and configured to allow locking movement of the expansion body in an expanding direction away from the luggage main body, wherein the expansion and locking device is a ratcheting assembly comprising:

a sliding assembly having a set of parallel teeth, the sliding assembly affixed to one of the luggage main body or the expansion body;

a holding assembly main body affixed to the other of the luggage main body or the expansion body and affixed in line with the sliding assembly, wherein the holding assembly main body has a receiving opening into which the sliding assembly is insertable; and

a latch structure coupled to the holding assembly main body by a biasing member, the latch structure having disposed on its underside a pawl, the pawl configured to engage and disengage from the set of parallel teeth, the biasing member configured to maintain the pawl in an engaged state with the parallel teeth in the absence of an actuating force applied normal to the surface of the latch structure, the holding assembly main body affixed to the other of the luggage main body or the expansion body.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The present invention will be described hereinbelow with reference to the drawings, wherein:

[0015] FIG. 1 illustrates a perspective view of an internal area of a luggage in accordance with the present invention;

[0016] FIG. 2 illustrates a perspective view of an external area of a luggage in an expanded configuration in accordance with the present invention;

[0017] FIG. 3 illustrates a perspective view of an external area of a luggage in a compressed configuration in accordance with the present invention;

[0018] FIG. 4a – 9 illustrate embodiments of a ratchet assembly the luggage in accordance with the present invention;

DETAILED DESCRIPTION OF THE INVENTION

[0019] Referring to the drawings, FIG. 1 provides an internal view of an article of luggage 100, and incorporating an expansion and locking device 102, also referred to herein as a ratcheting assembly, according to the present invention, respectively mounted at opposing inner walls of the luggage 100. The luggage 100 is formed of a luggage main body 106

coupled to an expansion body 104 by a foldable gusset 110, shown in FIG. 2. An openable cover 112 is attached to the expansion body 104 and is sealable by way of engagement of two halves of a zipper 114 provided on at least a majority of the perimeter of the cover 112 and expansion body 104.

[0020] Additionally, guide panels 108 are provide on the inside of the luggage 100 at orthogonal sides with respect to the expansion and locking device 102. The guide panels 108 are affixed to one of the luggage main body 106 or the expansion body 104, and slideably contacts the other one of the luggage main body 106 or the expansion body 104. The guide panels 108 provide lateral rigidity to the luggage when in an expanded configuration.

[0021] Referring to FIG. 2 and 3, the luggage 100 is shown in an expanded state as shown by the extended aspect of the foldable gusset 110. FIG. 3 shows the luggage 100 in a compressed state in which the foldable gusset 110 is contracted bringing the luggage main body 106 and the expansion body into closer proximity.

[0022] FIGS. 4a, 4b, 5a and 5b show an embodiment of the expansion and locking device 102 in detail. The expansion and locking device 102 is formed of a holding assembly 402 (shown in FIG. 4a and 5a) and a sliding assembly 404 (shown in FIG. 4b and 5b) that is insertable into a receiving opening 406 formed on a surface of the holding assembly main body 420. The sliding assembly 404 includes a set of parallel teeth 408 configured to lockingly interfere with a pawl 502 (shown in FIG. 5a) of the holding assembly 402. For example, the parallel teeth 408 are configured to have a surface with a mild angle in the compression direction and a nearly 90° angle formed in the expansion direction.

[0023] Additionally, travel limiting slots 410 are provided on the sliding member 406, which limit the extent of travel by the sliding assembly 404 when the travel limiting slots 410 are engage with tabs 504 (shown in FIG. 5a) of the holding assembly 402.

[0024] It is noted that the pawl 502 and the tabs 504 are disposed on an underside of the holding assembly 402, and more specifically, on the underside of a latch structure 412 of the holding assembly 402. The latch structure 412 is coupled to the holding assembly main body 420 of the holding assembly 402 by a biasing member 422 integrally formed therebetween. The biasing member 422 may be formed of a live spring, coil spring or other deformable structure that provides a rest state in which the latch 412 maintains a holding force between the pawl 502 and the parallel teeth 408. The biasing member 422 allows the latch to maintain engaging force between the pawl 502 and one of the parallel teeth 408 of the sliding member 406. Additionally, when a force normal to the surface of the latch is applied to the latch as indicated by arrow F, the biasing member allows the latch structure 412 to disengage the locking member 502 from the parallel teeth 408.

[0025] The sliding member 406 is attached, by means of screws, bolts, or other fixing means, to a portion of the expansion body 104, and the holding assembly 402 is similarly affixed on a portion of the luggage main body 106 in line with the sliding member 406. In an embodiment of the present invention, two expansion and locking device 102 are provided at opposite sides of the luggage 100. However, in an alternative embodiment, one expansion and locking device 102 may be provided at each of the four sides of the luggage 100.

[0026] In an alternative embodiment, the sliding member 406 is attached by means of screws bolts or other fixing means to a portion of the luggage main body 106, and the holding

assembly 402 is similarly affixed on a portion of the expansion body 104 in line with the sliding member 406.

[0027] FIGS. 6a and 6b show a side view of an embodiment of the expansion and locking device 102 of the present invention. In the present embodiment, a lever 604 is provided at a first end, which facilitates engagement and disengagement of a pawl 602 disposed at an opposite end of the holding assembly with a set of parallel teeth 608. A biasing member formed as a coil spring 606 is provided at a pivot point of the holding assembly.

[0028] In the present embodiment, the holding assembly is attached to the expansion body 104 and the set of parallel teeth 608 are disposed on the luggage main body 106. When force is applied to the lever 604 in a manner to cause the rotation of the holding assembly in the direction indicated by arrow A, the pawl 602 is disengaged from the set of parallel teeth as indicated by the dashed line representation of the holding assembly. In this configuration, the holding assembly and the expansion body 104 to which it is attached are free to move along the set of parallel teeth 608 as indicated by arrow Y of FIG. 6b. when the force applied at the lever 604 is removed, the holding assembly, under the force provided by the coil spring 606, re-engages the pawl 602 with the set of parallel teeth 608 as indicated by the arrow X.

[0029] In the engaged configuration, the holding assembly is free to move in the direction opposite to the arrow Y. However, the holding assembly is prevented from moving in the direction indicated by the arrow Y. In this way, the expansion body 104 and the luggage main body 106 can be compressed, but cannot be expanded. The ratcheting system provided by the present invention allows the luggage to be fully expanded by actuating the lever when the luggage is being packed. Once packed and closed, the luggage can be easily compressed by applying even force on the luggage.

[0030] FIG. 7 shows another embodiment of the expansion and locking device 102. Similar to the embodiment shown in FIG. 6a, a lever 702 is provided at a first end, which facilitates engagement and disengagement of a pawl 704 disposed at an opposite end of the holding assembly with a set of parallel teeth 706. However, in the present embodiment, the biasing member is formed of a live spring member 708 provided at a pivot point of the holding assembly. The live spring 708 is formed of a material that flexes when sufficient force is applied but returns to its original shape once the deforming force is removed.

[0031] FIG. 8 shows an embodiment that is similar to the embodiment shown in FIG. 7. In the present embodiment, a lever 804 is provided at a first end, which facilitates engagement and disengagement of a pawl 806 disposed at an opposite end of the holding assembly with a set of parallel teeth 808. In addition, the present embodiment is provided with a locking mechanism 802 which is engaged by rotating the locking mechanism as indicated by the arrows. When moved to the locked position, the locking mechanism 802 prevents the lever 804 from disengaging the pawl 806 by way of an accidental application of force to the lever 804. Conversely, when the locking mechanism is rotated to the unlocked position, a force applied to the lever 804 in a manner described above, with respect to FIG. 6a, causes the pawl to disengage from the set of parallel teeth 808.

[0032] In addition to the biasing members disclosed with respect to FIGS. 4a through 8, alternative biasing members can be employed. For example, a rubber member maybe disposed and molded onto a portion of a lever having a pawl disposed there on, and a base surface of the holding assembly. The underlying support structure for the expansion and locking device having rubber molded thereon is shown in FIG. 9. The rubber member is not shown in order to show the supporting structure of the present embodiment. The

holding assembly 14 includes a tab 16 integrally formed with one or more pawls on a bottom surface (not shown). The pawl is configured to engage with the plurality of parallel teeth 18 formed on a sliding member 12. The holding assembly is biased to provide engaging force between the pawl and the teeth 18 in a rest state, i.e., when no external force is applied to the tab 16. The indented region 22 of the holding assembly 14 are configured to receive and bond with a rubber compound forming the rubber member.

[0033] Additionally, travel limiting slots 20 are provided on the sliding member 12 as described in previous embodiments. Tabs or pins (not shown) disposed on the underside of the holding assembly 14 align with the travel limiting slots 20 and extend into the travel limiting slots 20, thus preventing the sliding member 12 from sliding beyond a predetermined range. Furthermore, the travel limiting slots 20, so configured, prevent the sliding member 12 from disengaging from the holding assembly 14.

[0034] The rubber member is of adequate thickness and resilience to require a predetermine amount of force to disengage the pawl disposed on the lever. The elastic nature of rubber allows the lever to return to an engaged rest state when the force is removed. To strengthen the bond between the surfaces of the holding assembly, through holes can be formed on the surface of the holding assembly, which allows the rubber to flow through during the molding process. In one embodiment, the rubber has a Shore A hardness value of between 60 and 65.

[0035] Acrylonitrile butadiene styrene (ABS Plastic) can be used to form the lever and pawl of the holding assembly and the set of parallel teeth. Alternatively, the components of the expansion and locking device 102 may be fabricated from metal or a combination of materials.

[0036] Although the preferred embodiments show the ratchet member attached to the fixed base of the luggage and the pawl section attached to the movable part, the sections may be structured and arranged to be attached in any order, i.e., the reverse of the order described herein, for example.

What is claimed is:

1. An article of luggage having an expansion capability, the article of luggage comprising:
 - a luggage main body having a bottom surface and a cavity formed to receive articles for packing;
 - an expansion body having a perimeter defining a cavity;
 - a foldable gusset joining the luggage main body to the expansion body, the foldable gusset allowing the expansion body to move away and towards the luggage main body to vary a size of a volume formed by the cavity of the luggage main body and the cavity of the expansion body;
 - an openable cover attached to the expansion body; and
 - an expansion and locking device disposed internally at opposite ends of the article of luggage, the expansion and locking device being configured to allow free movement of the expansion body in a compression direction towards the luggage main body and configured to allow locking movement of the expansion body in an expanding direction away from the luggage main body, wherein the expansion and locking device is a ratcheting assembly comprising:
 - a sliding assembly having a set of parallel teeth, the sliding assembly affixed to one of the luggage main body or the expansion body;
 - a holding assembly main body affixed to the other of the luggage main body or the expansion body and affixed in line with the sliding assembly, wherein the holding assembly main body has a receiving opening into which the sliding assembly is insertable; and
 - a latch structure coupled to the holding assembly main body by a biasing member, the latch structure having disposed on its underside a pawl, the pawl configured to engage and disengage from the set of parallel teeth, the biasing member configured to maintain the pawl in an engaged state with the parallel teeth in the absence of an actuating force applied normal to the surface of the latch structure, the holding assembly main body affixed to the other of the luggage main body or the expansion body.

2. The article of luggage as in claim 1, wherein the biasing member is a coil spring.
3. The article of luggage as in claim 1, wherein the biasing member is a live spring.
4. The article of luggage as in claim 1, wherein the biasing member is formed of a rubber member.

FIG. 1

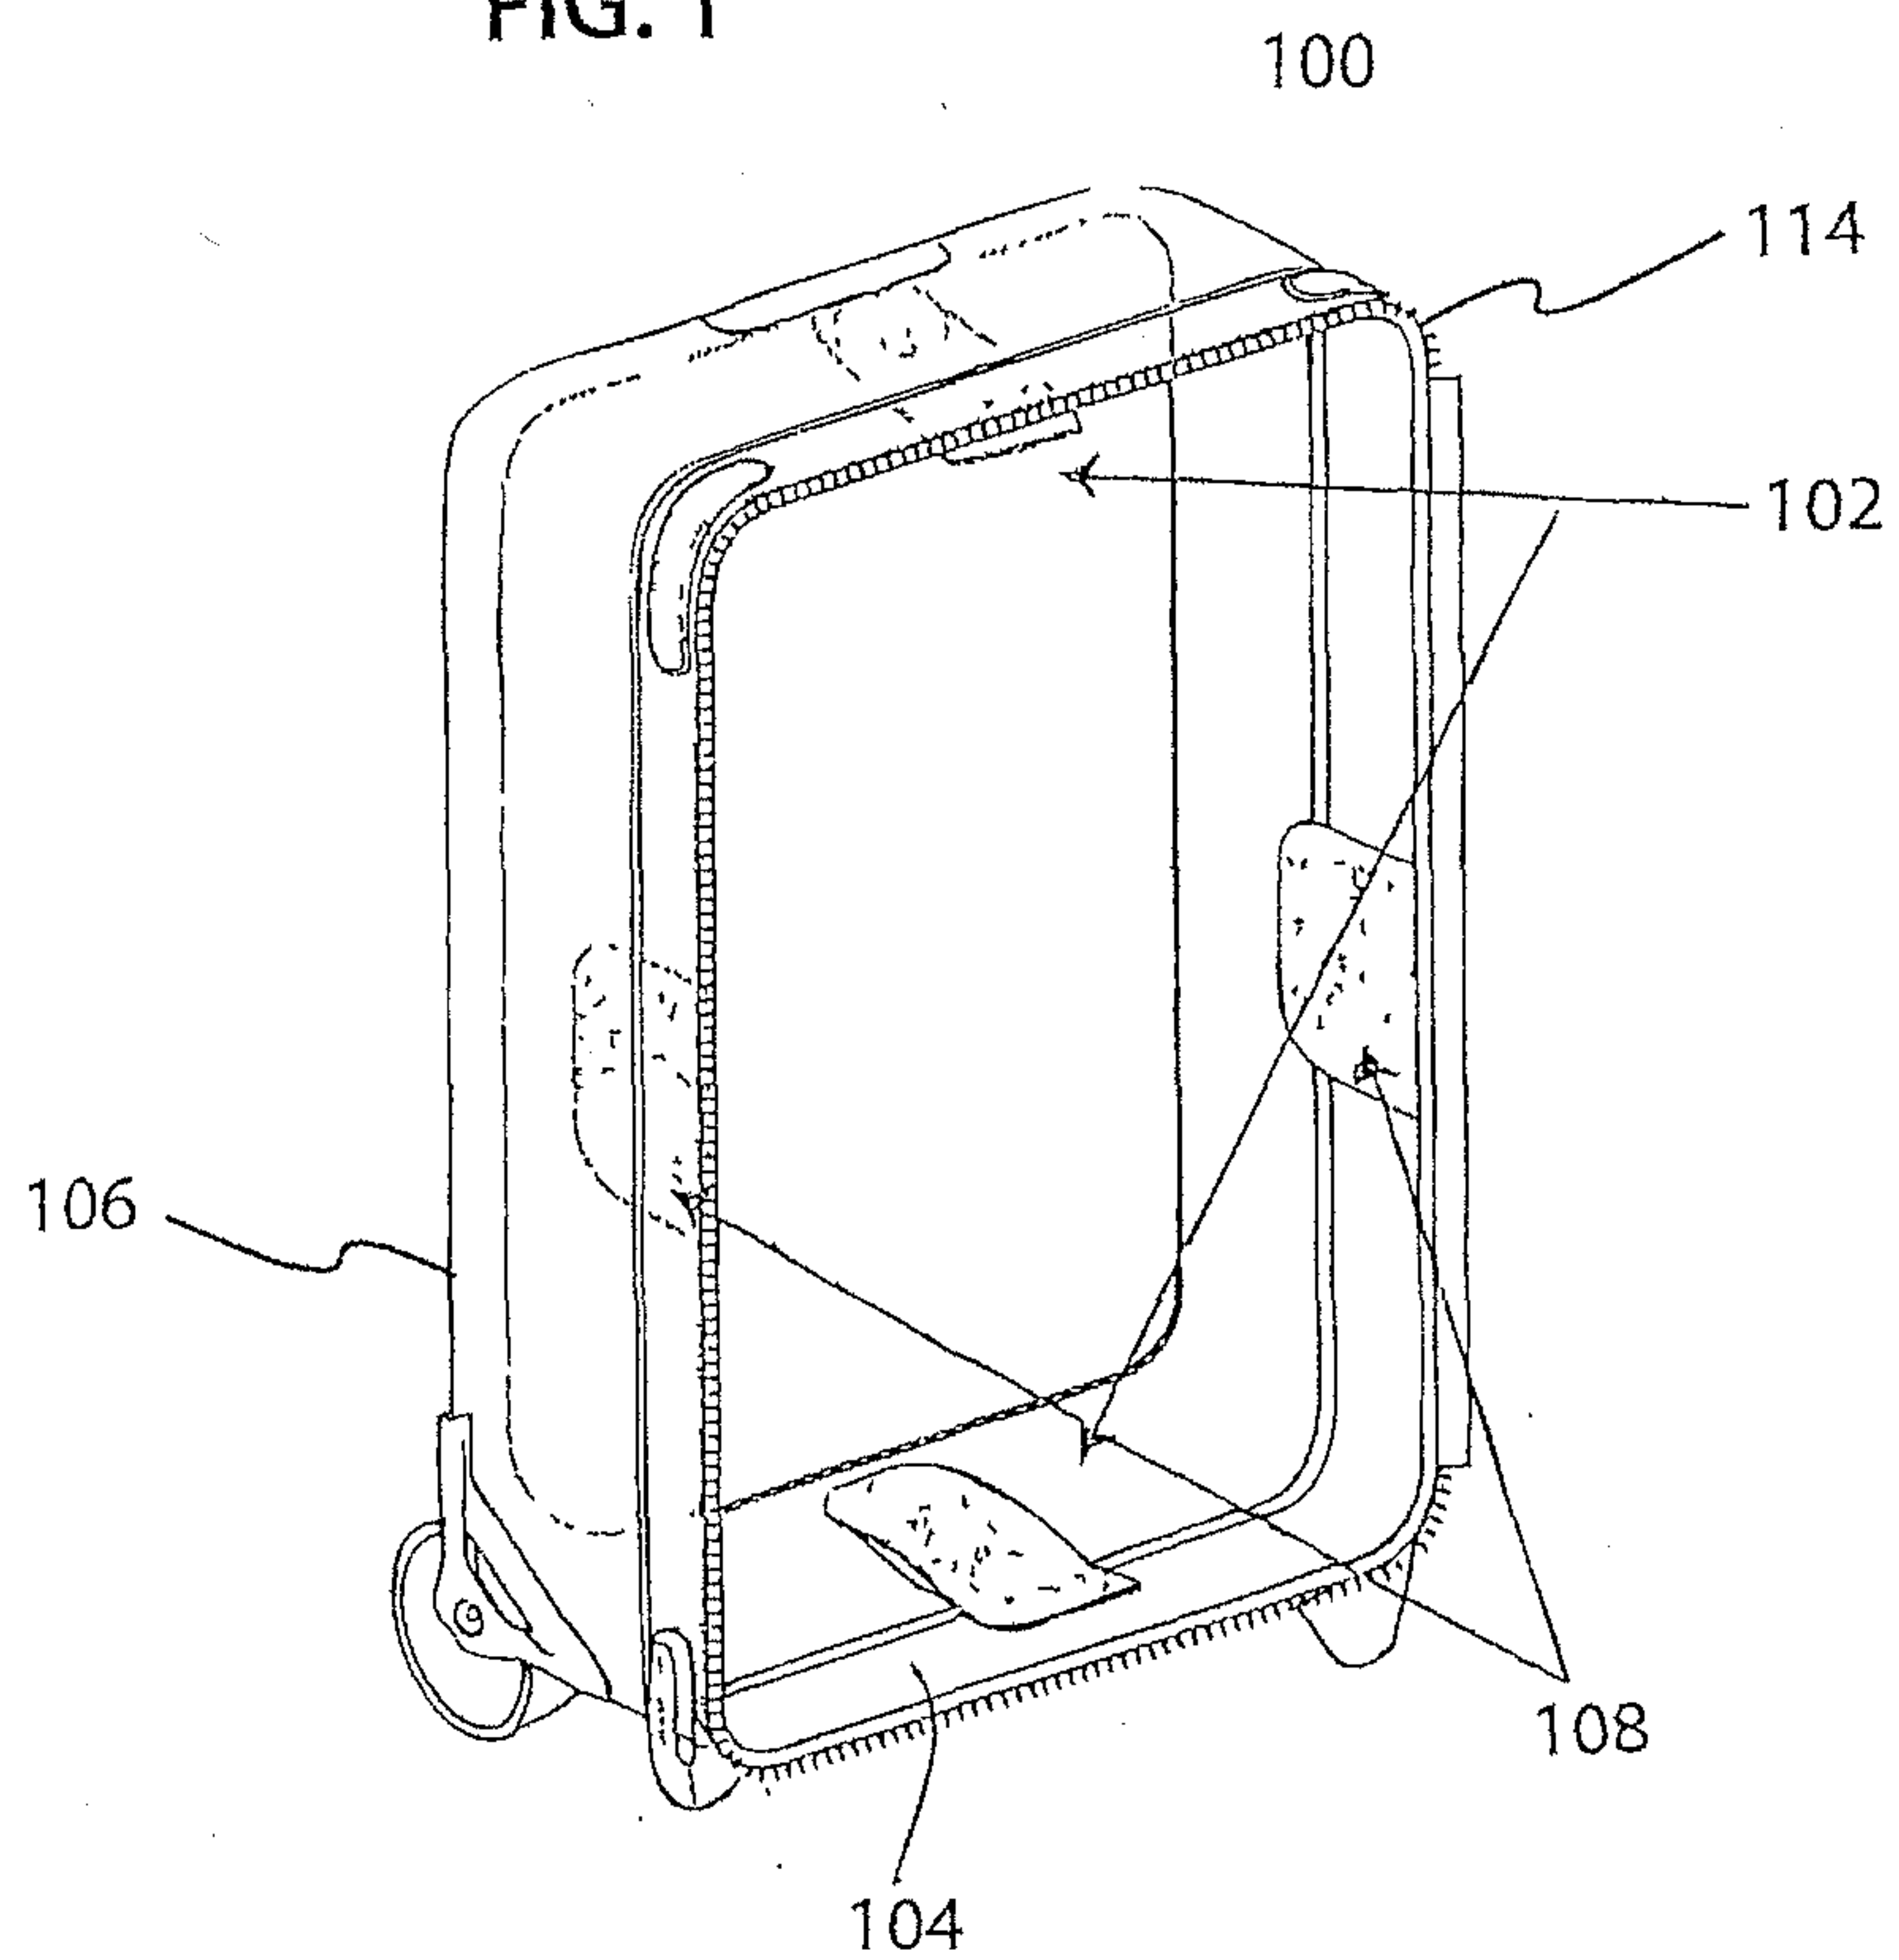


FIG. 2

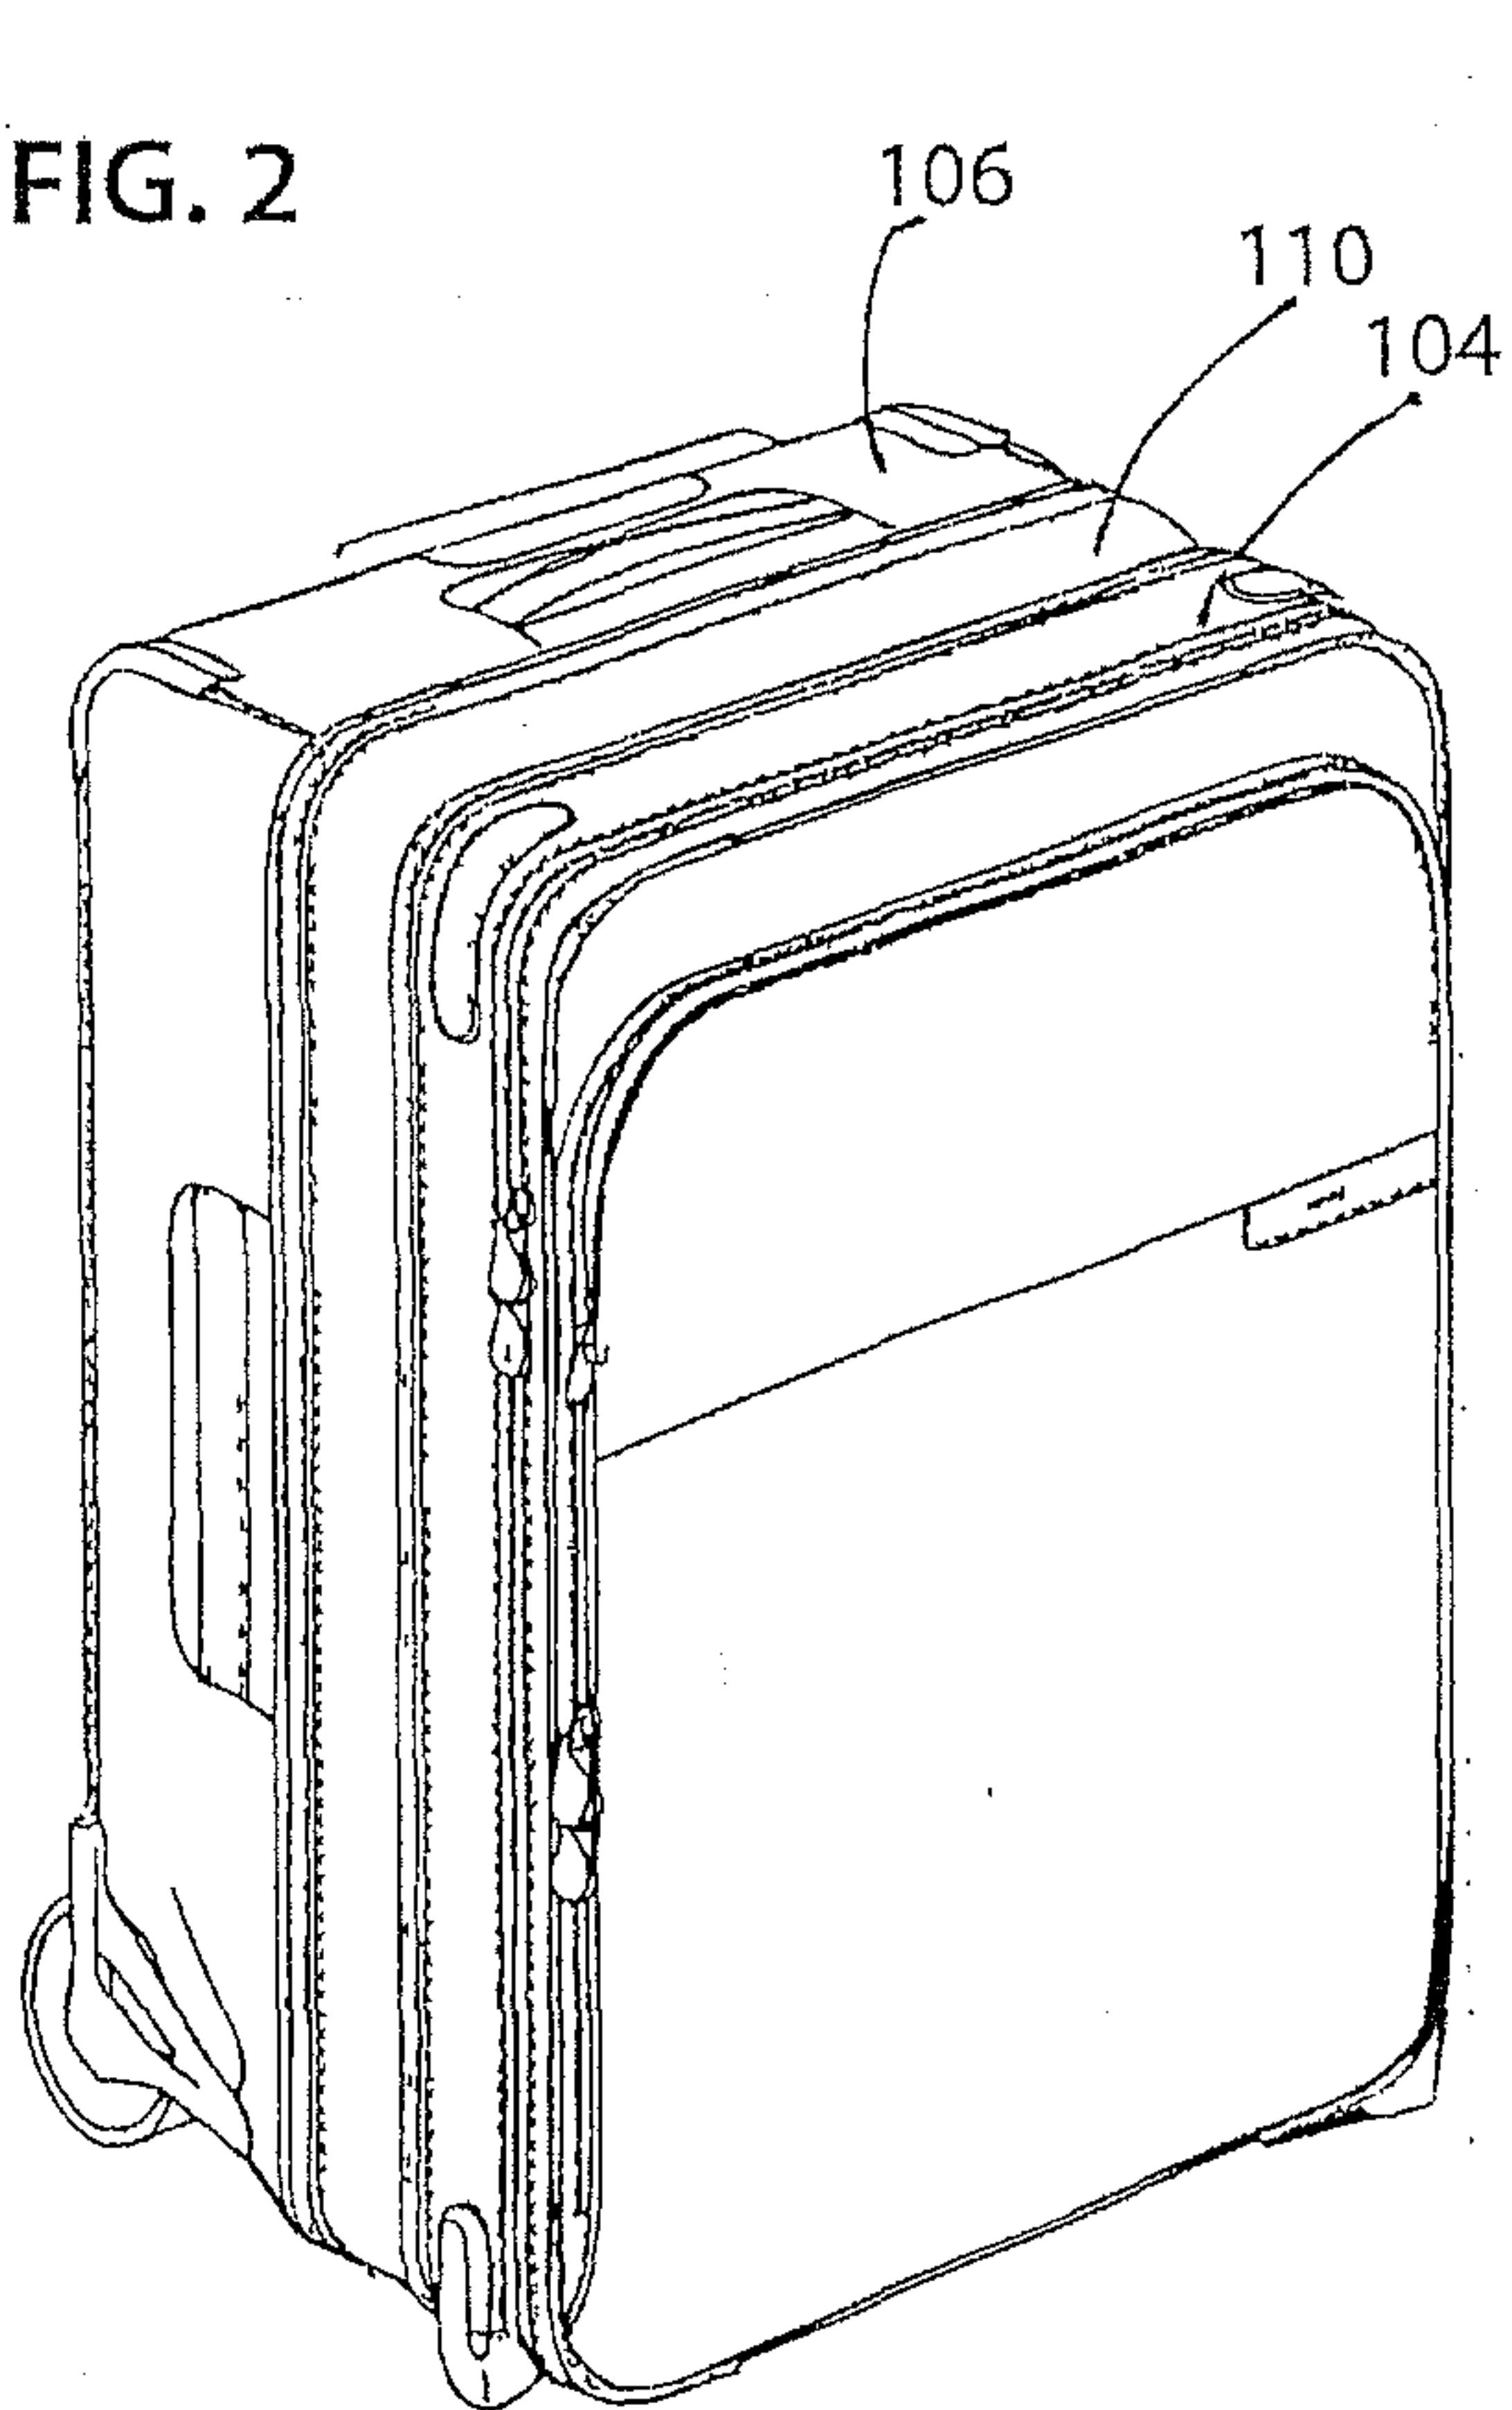
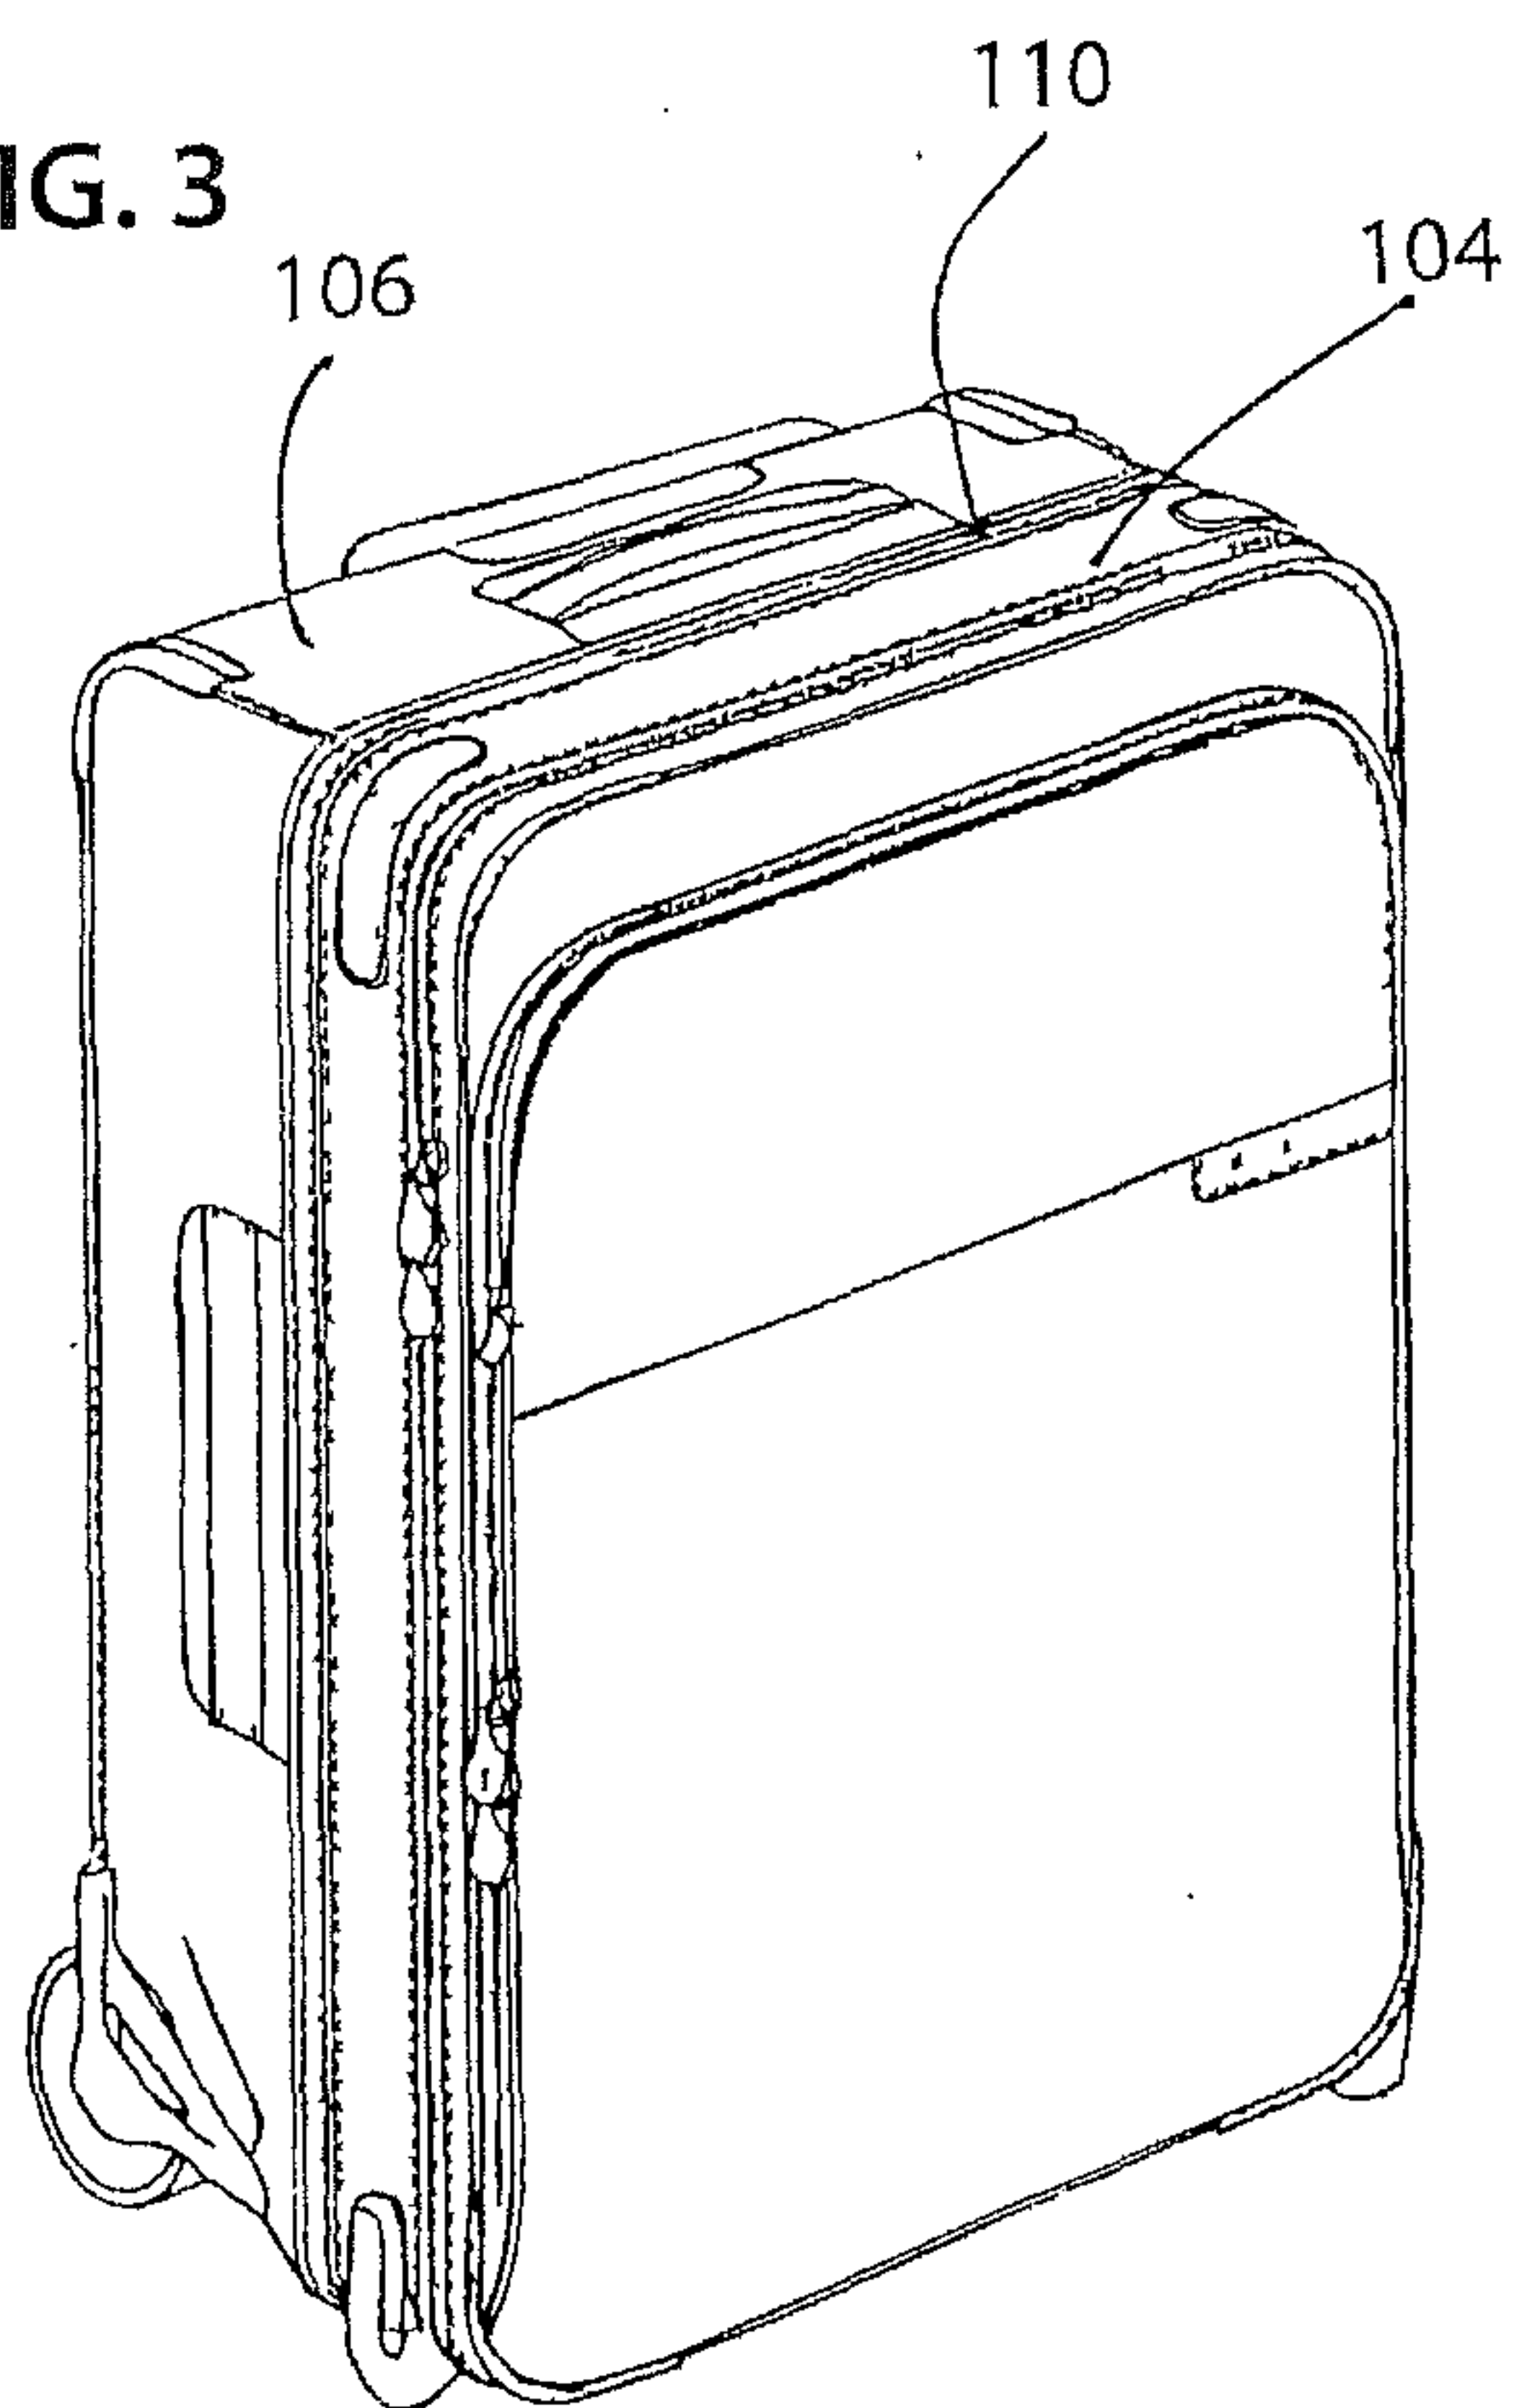


FIG. 3



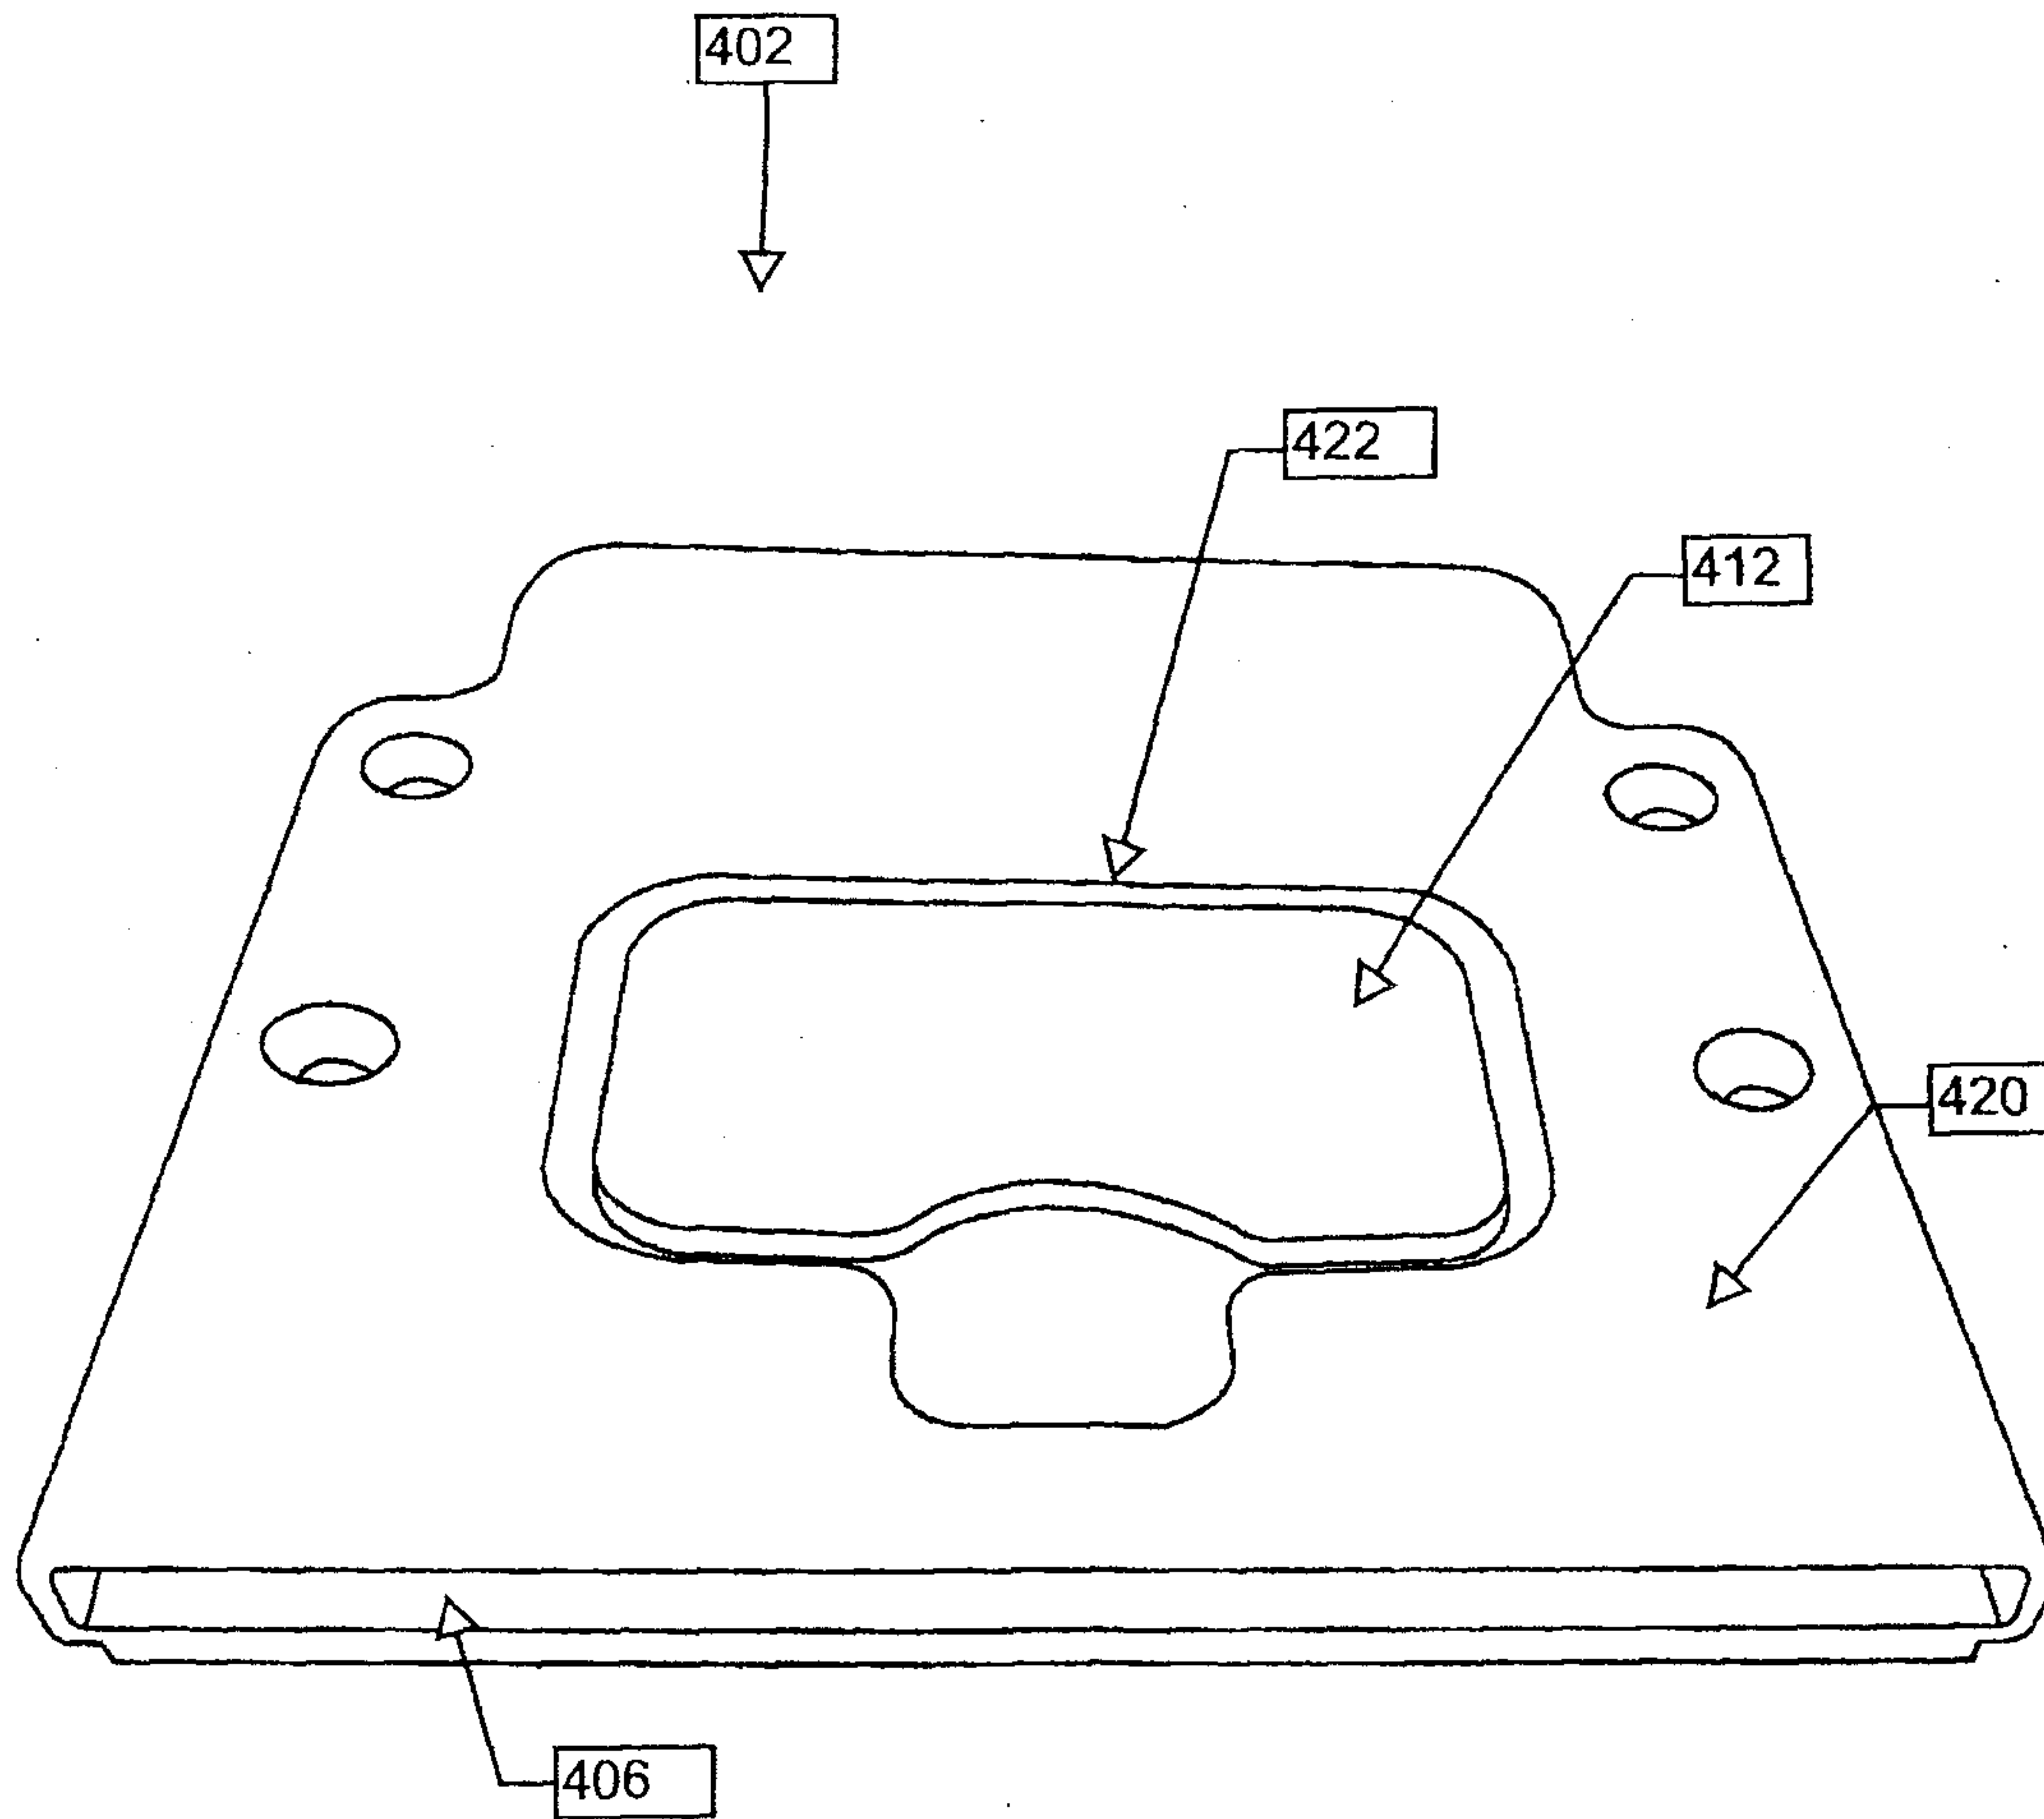


FIG. 4a

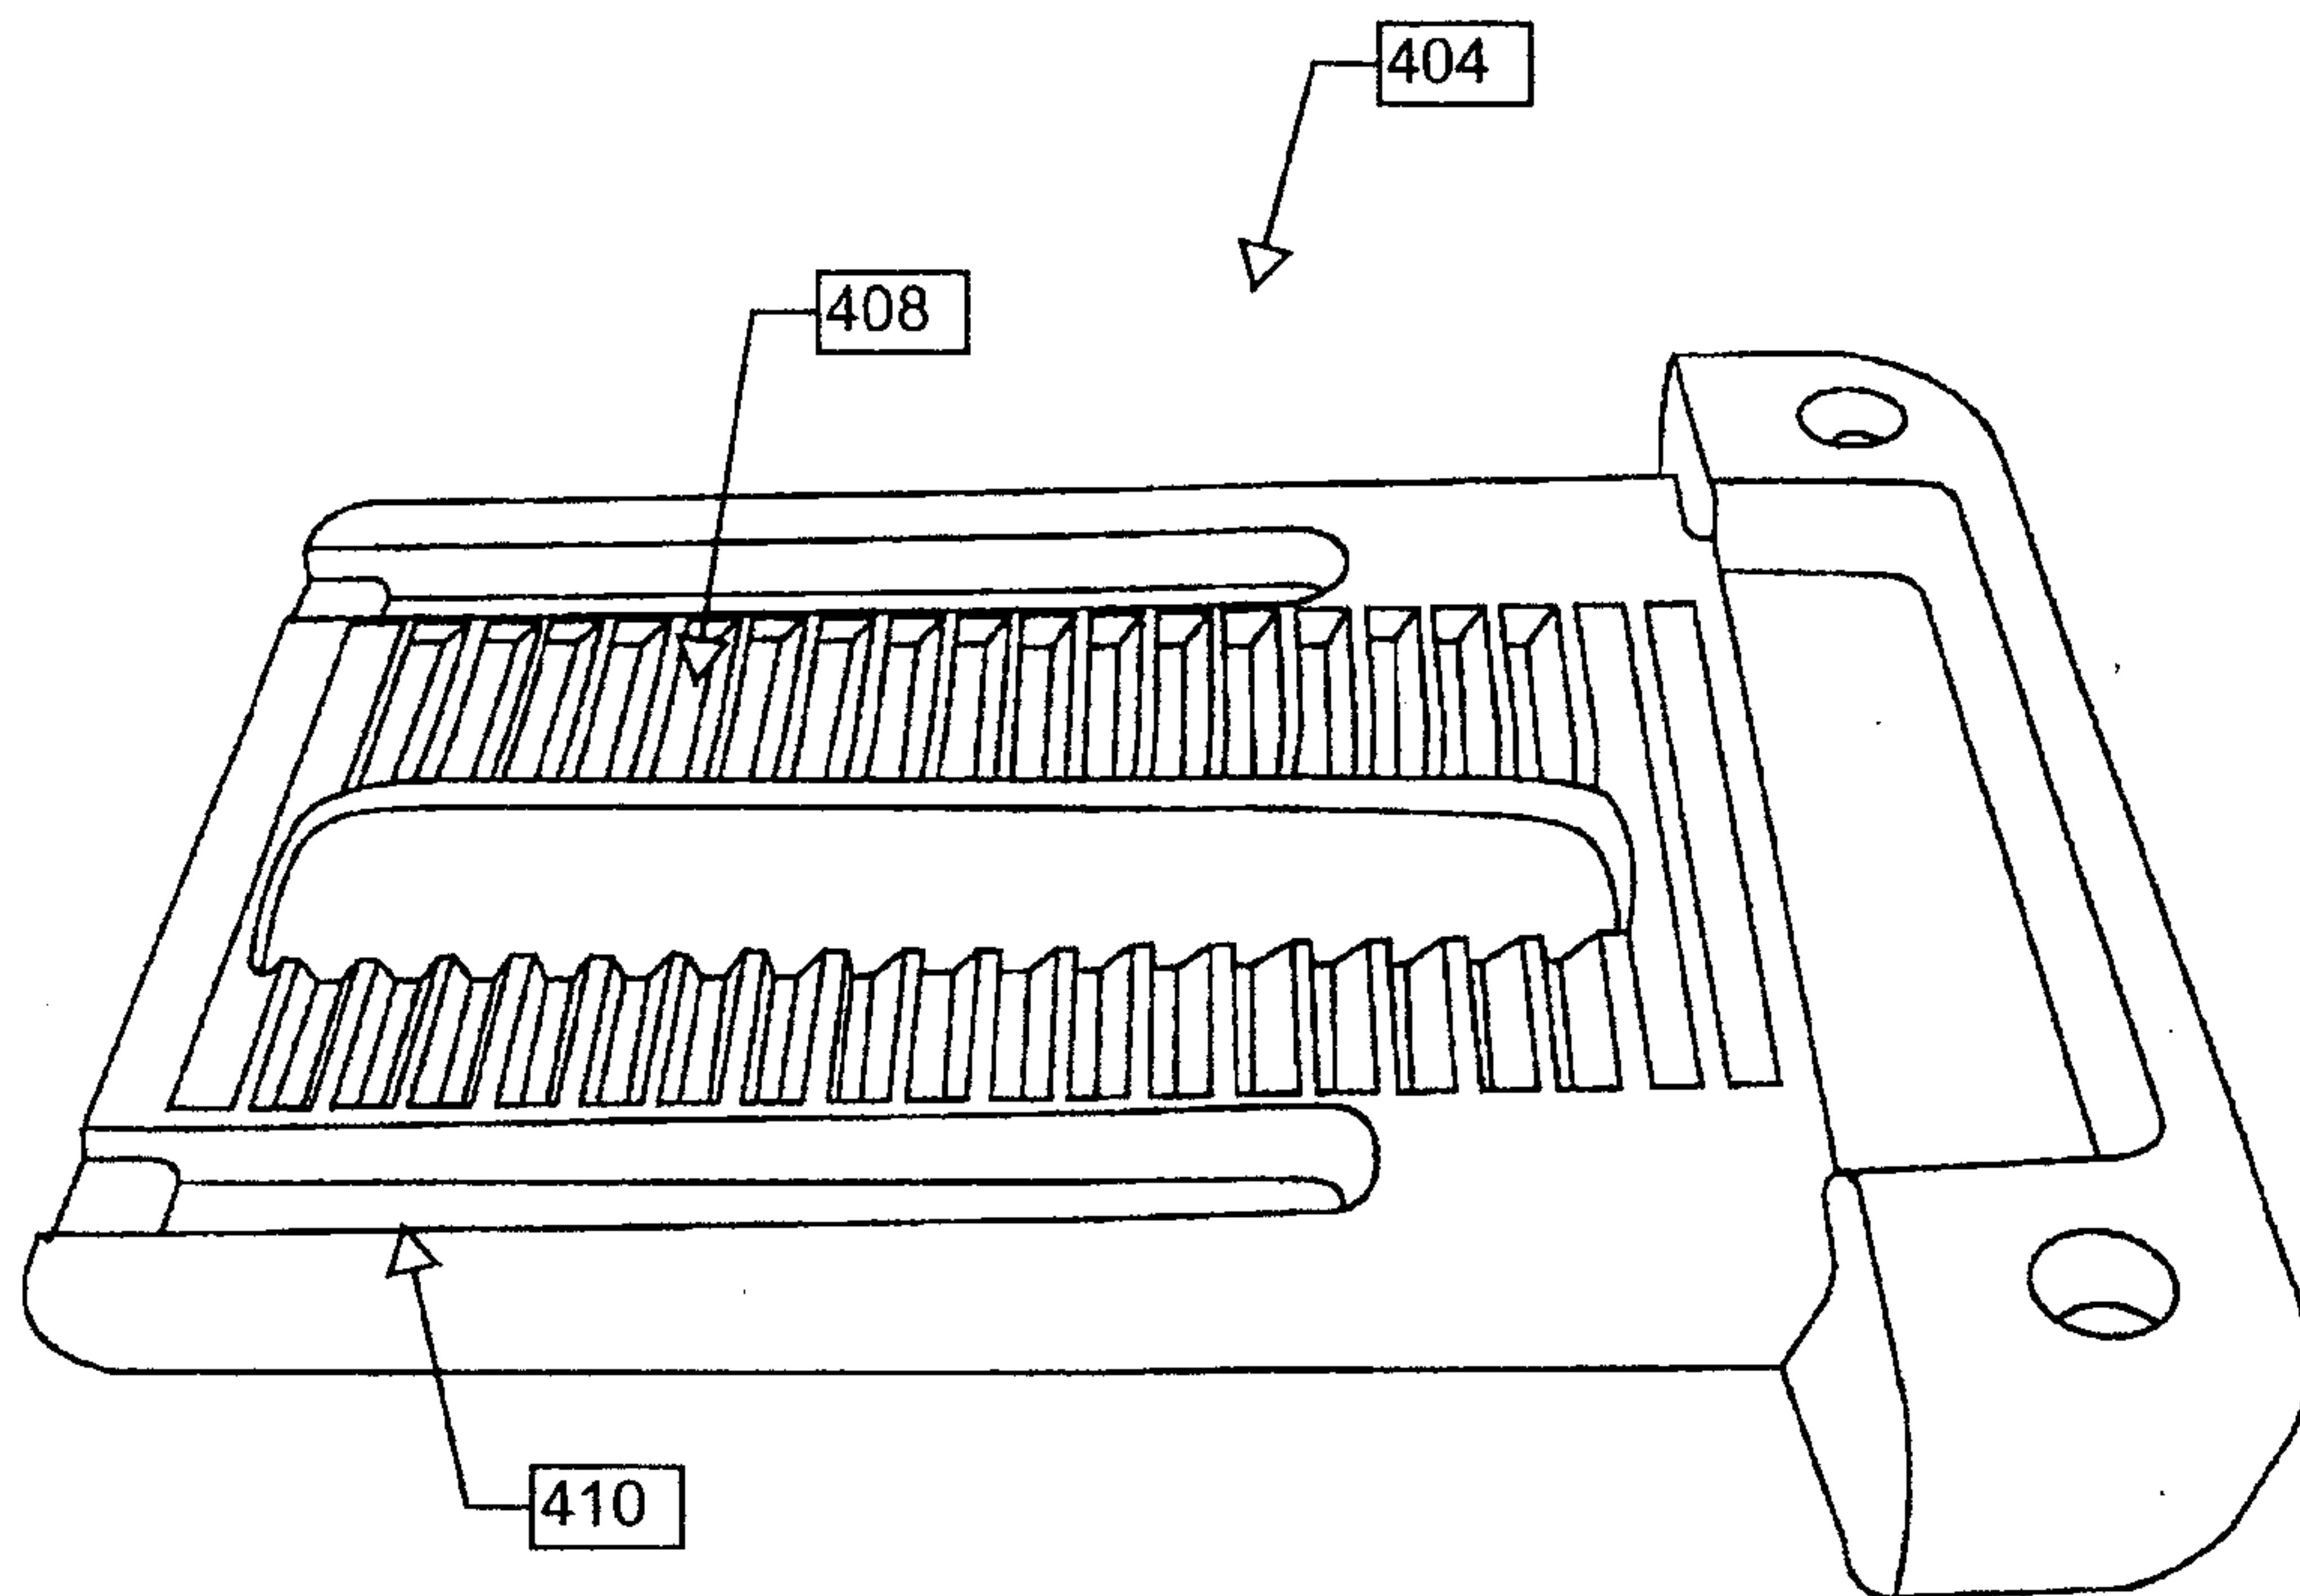


FIG. 4b

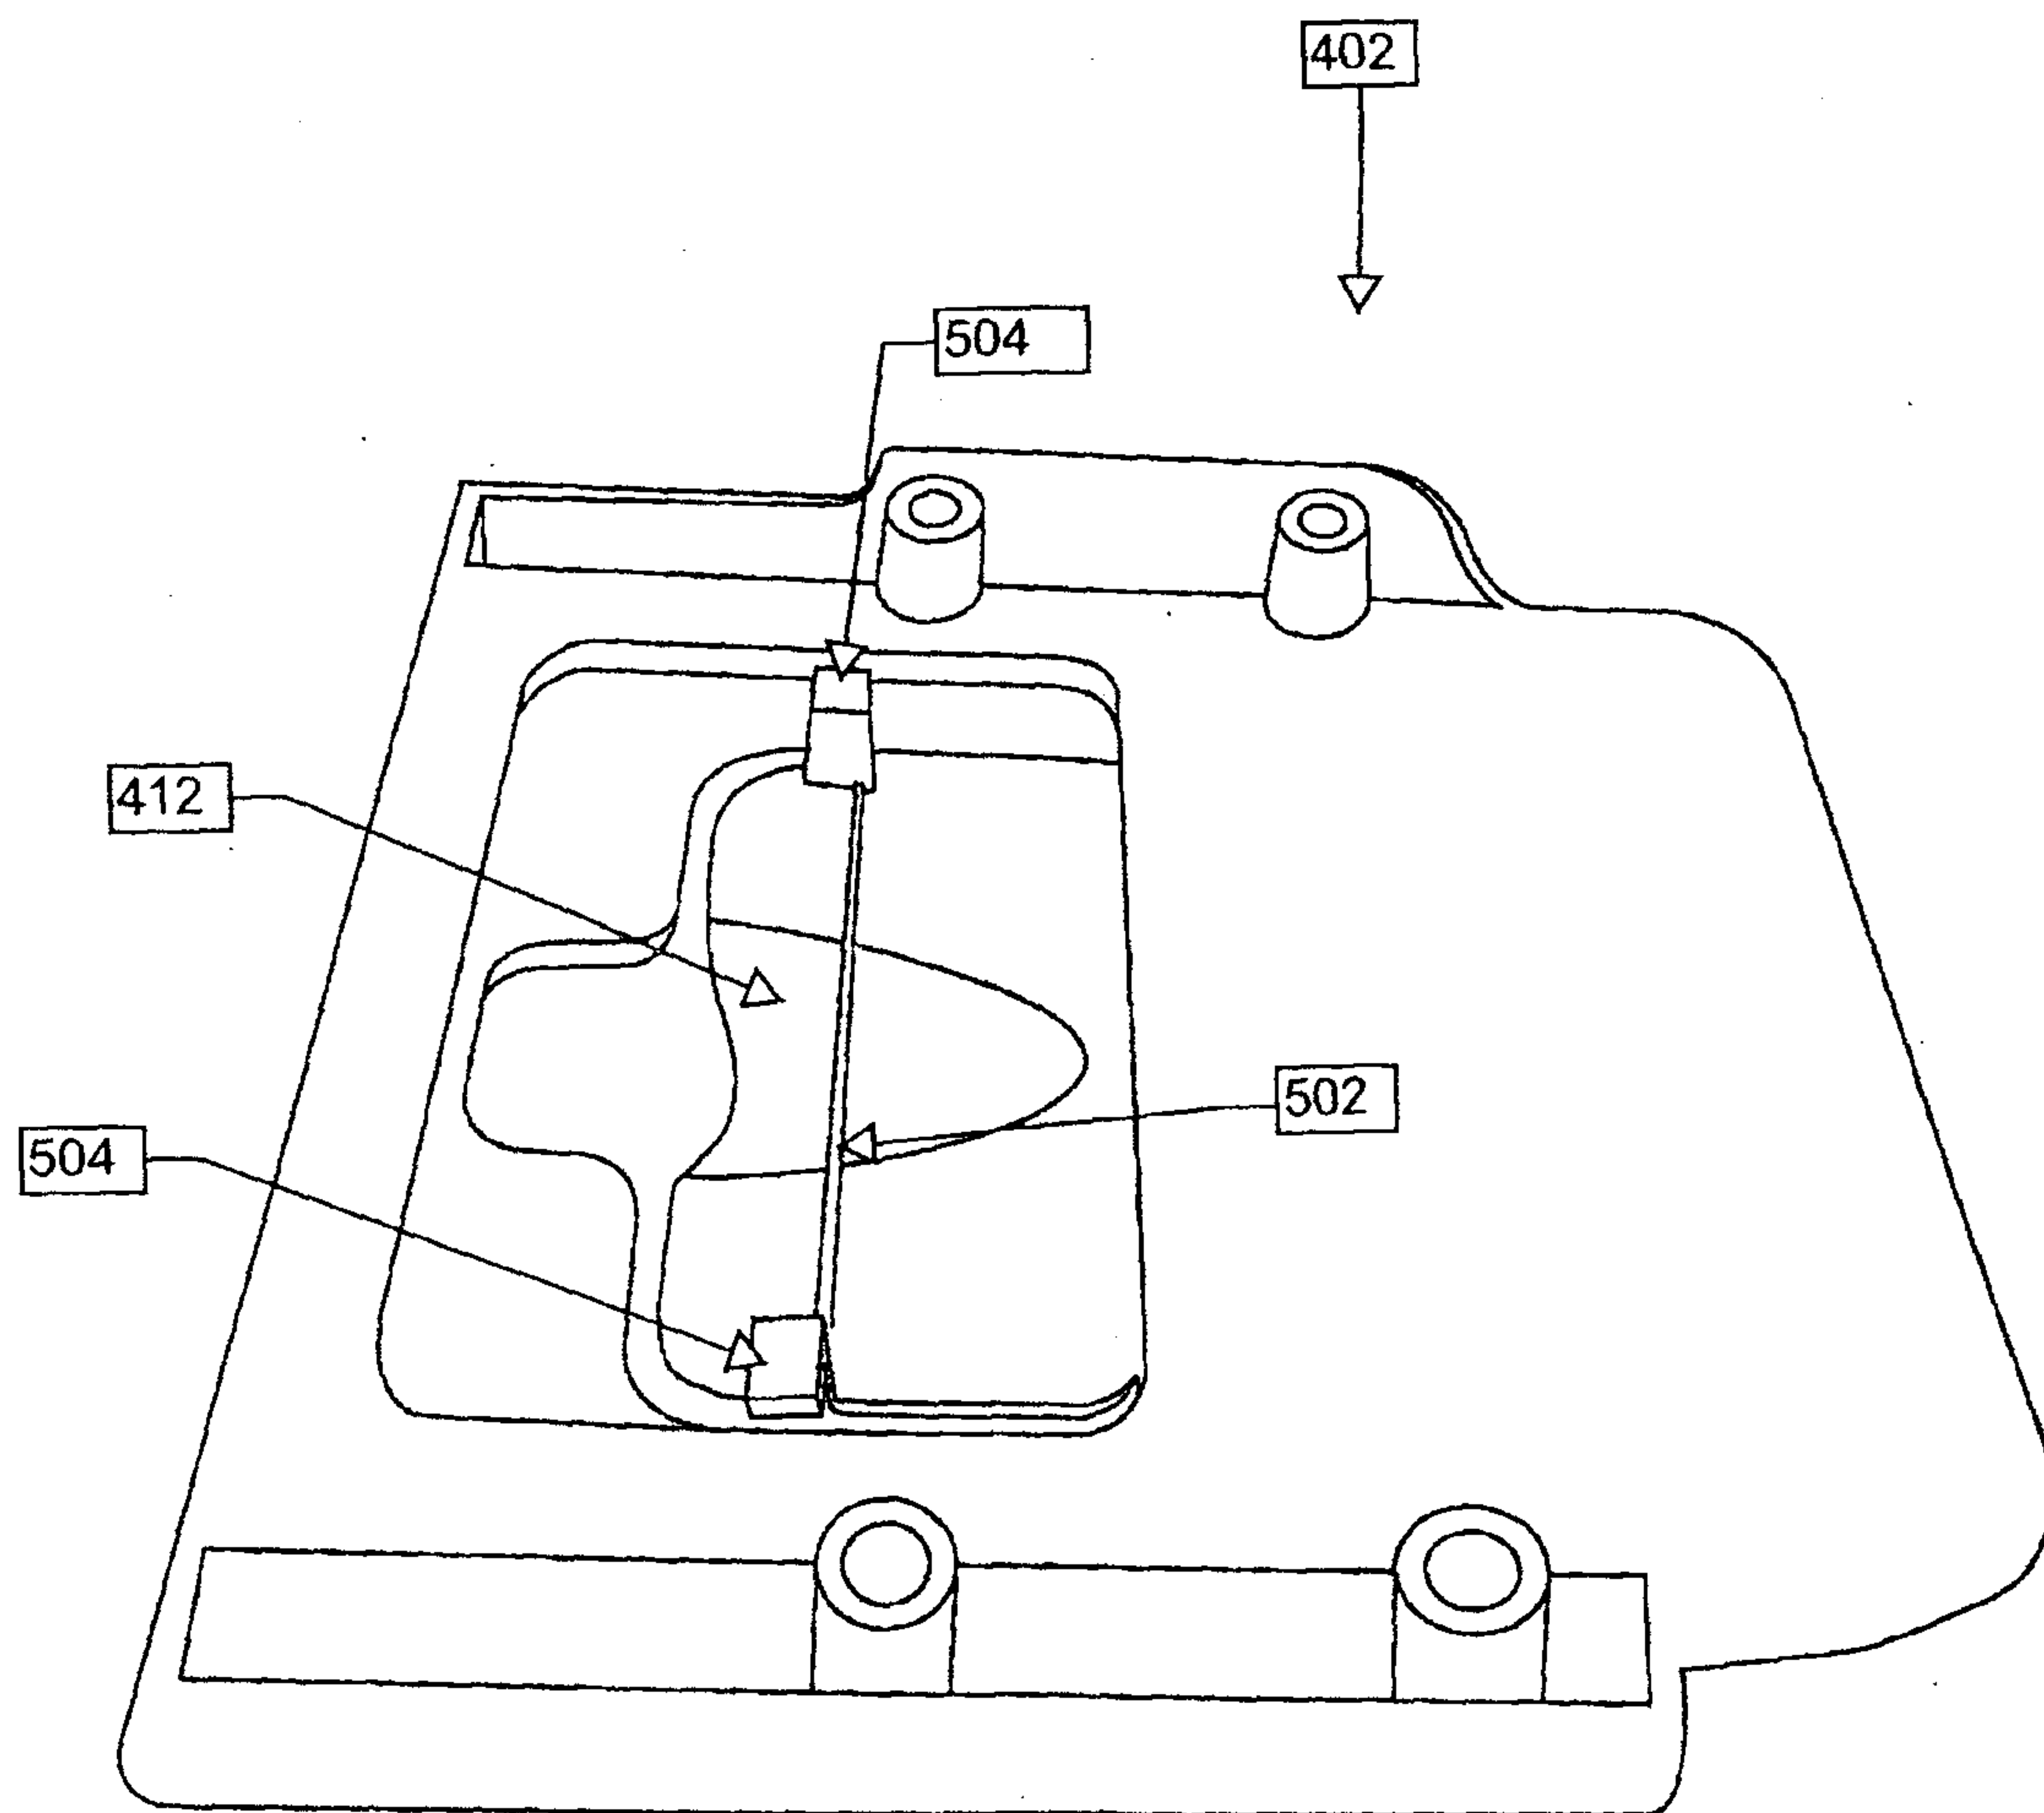


FIG. 5a

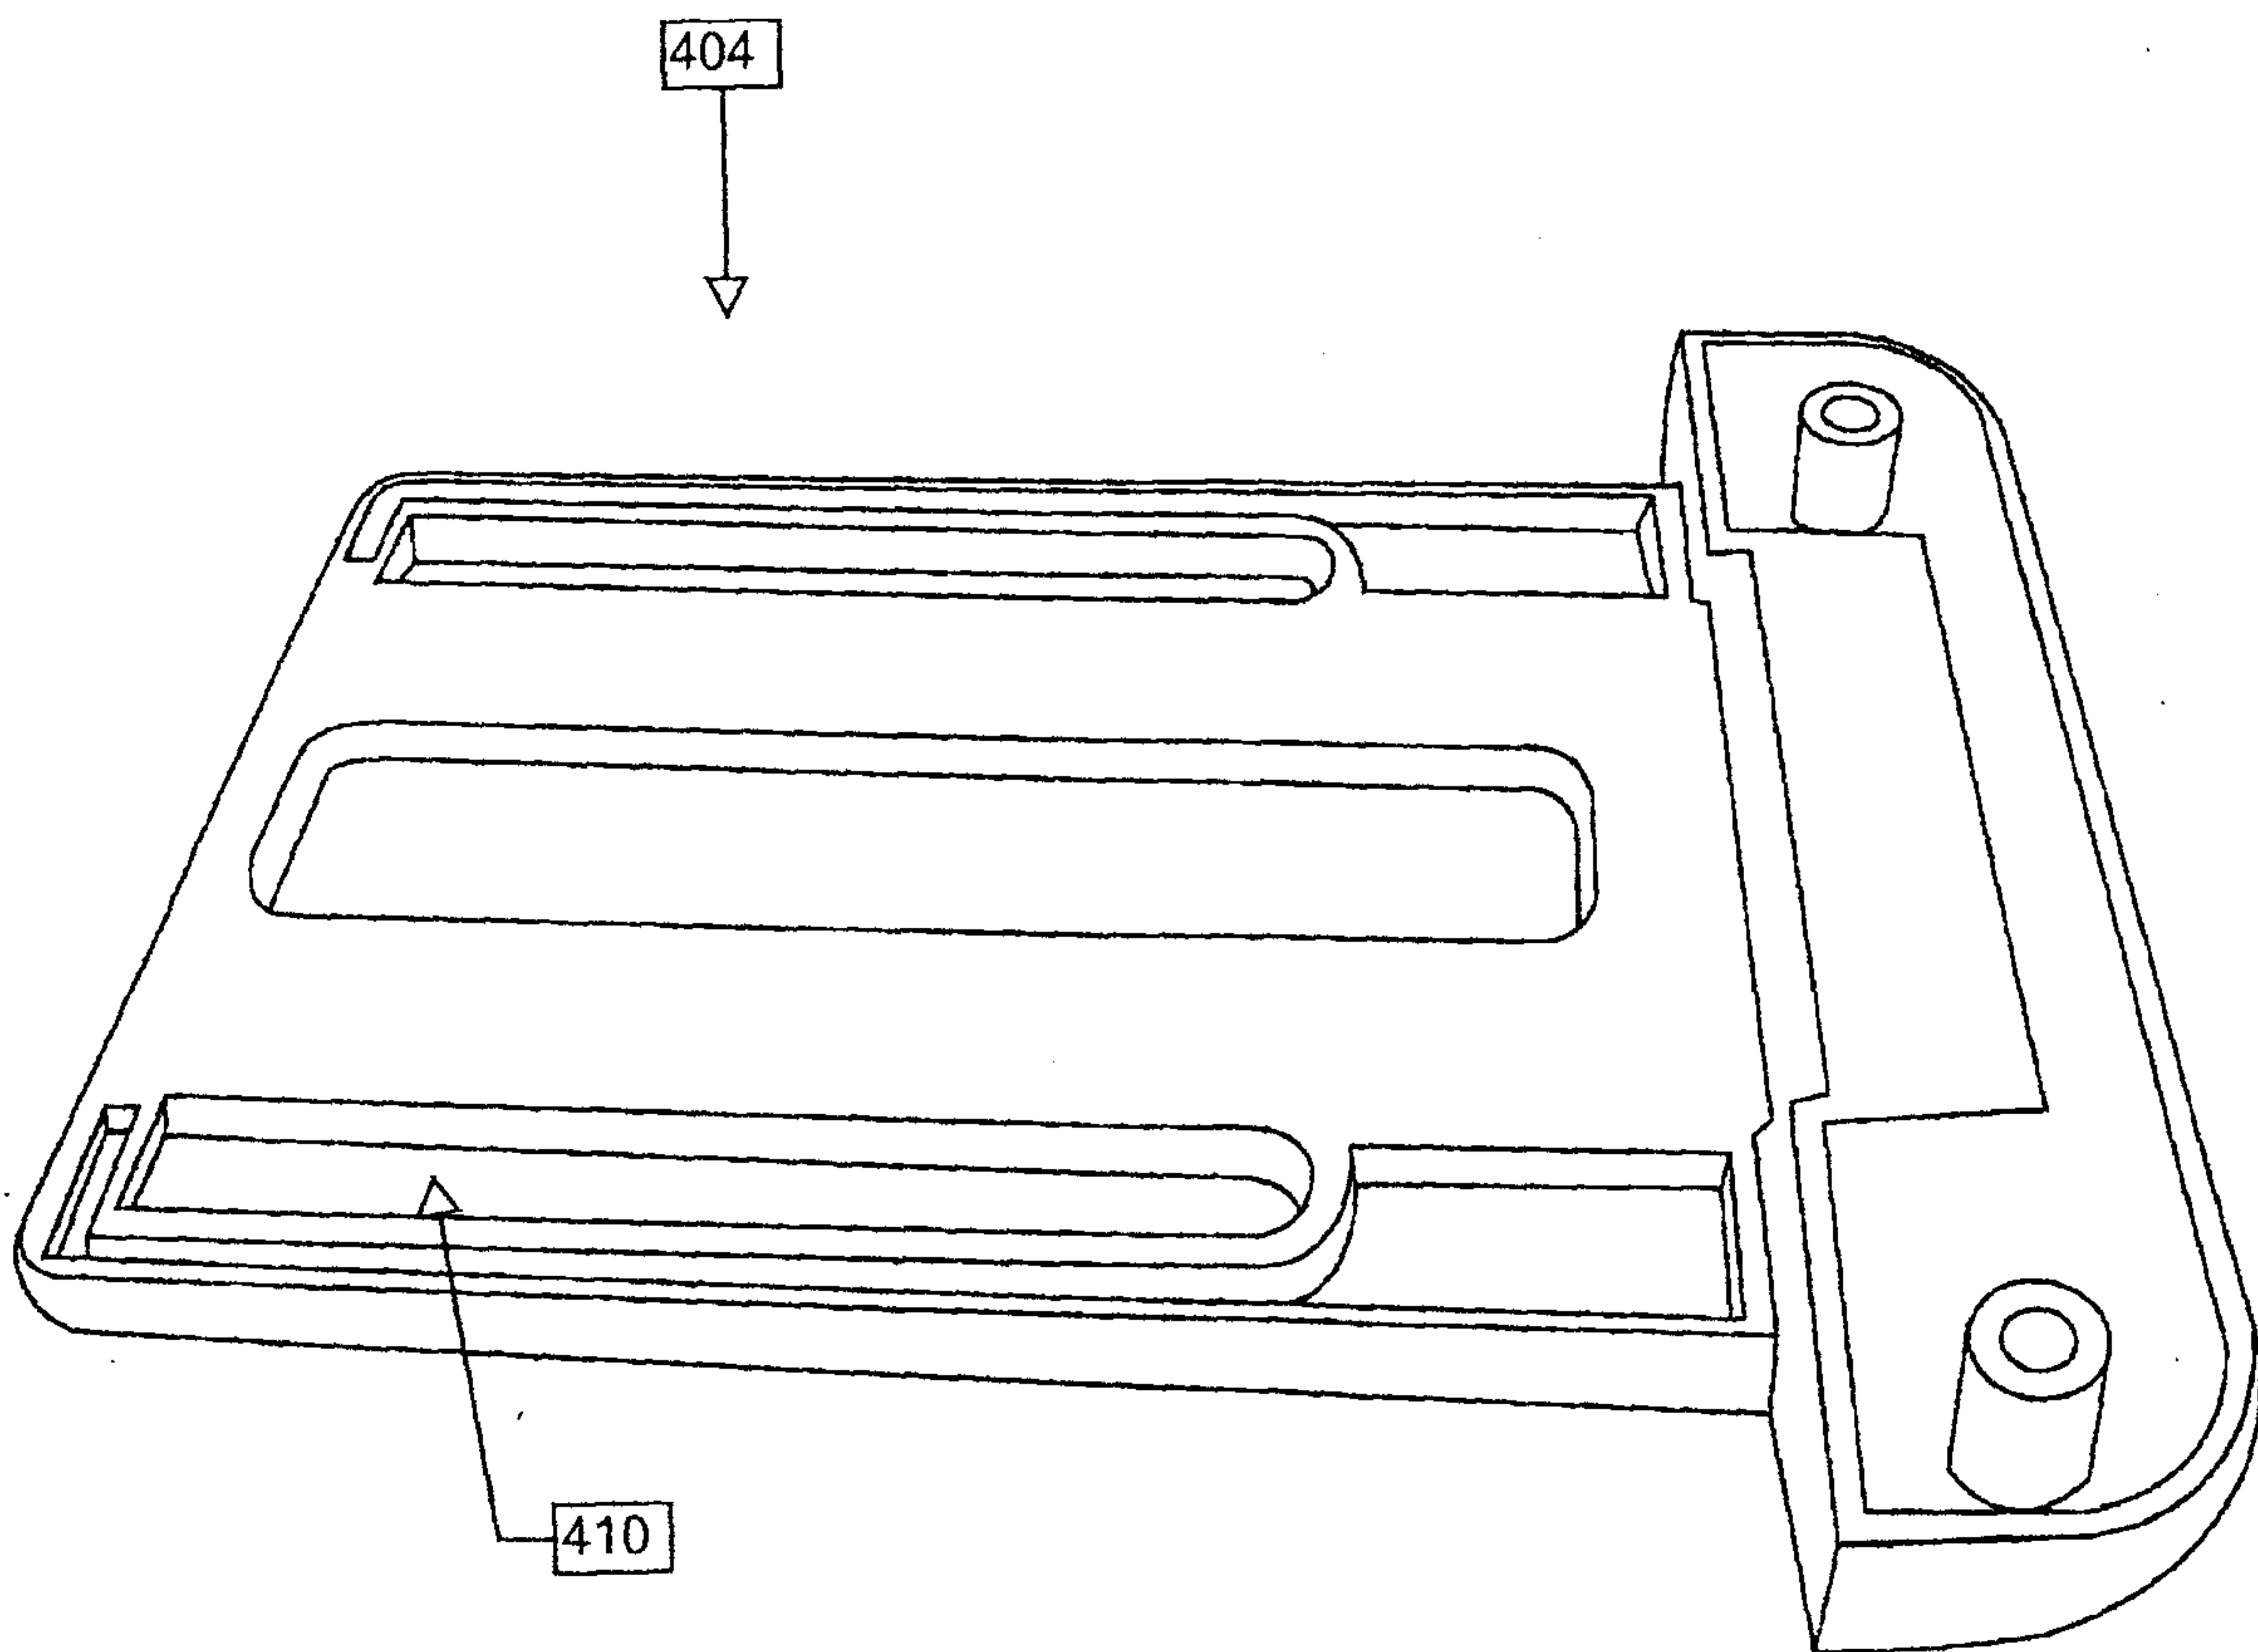


FIG. 5b

FIG. 6a

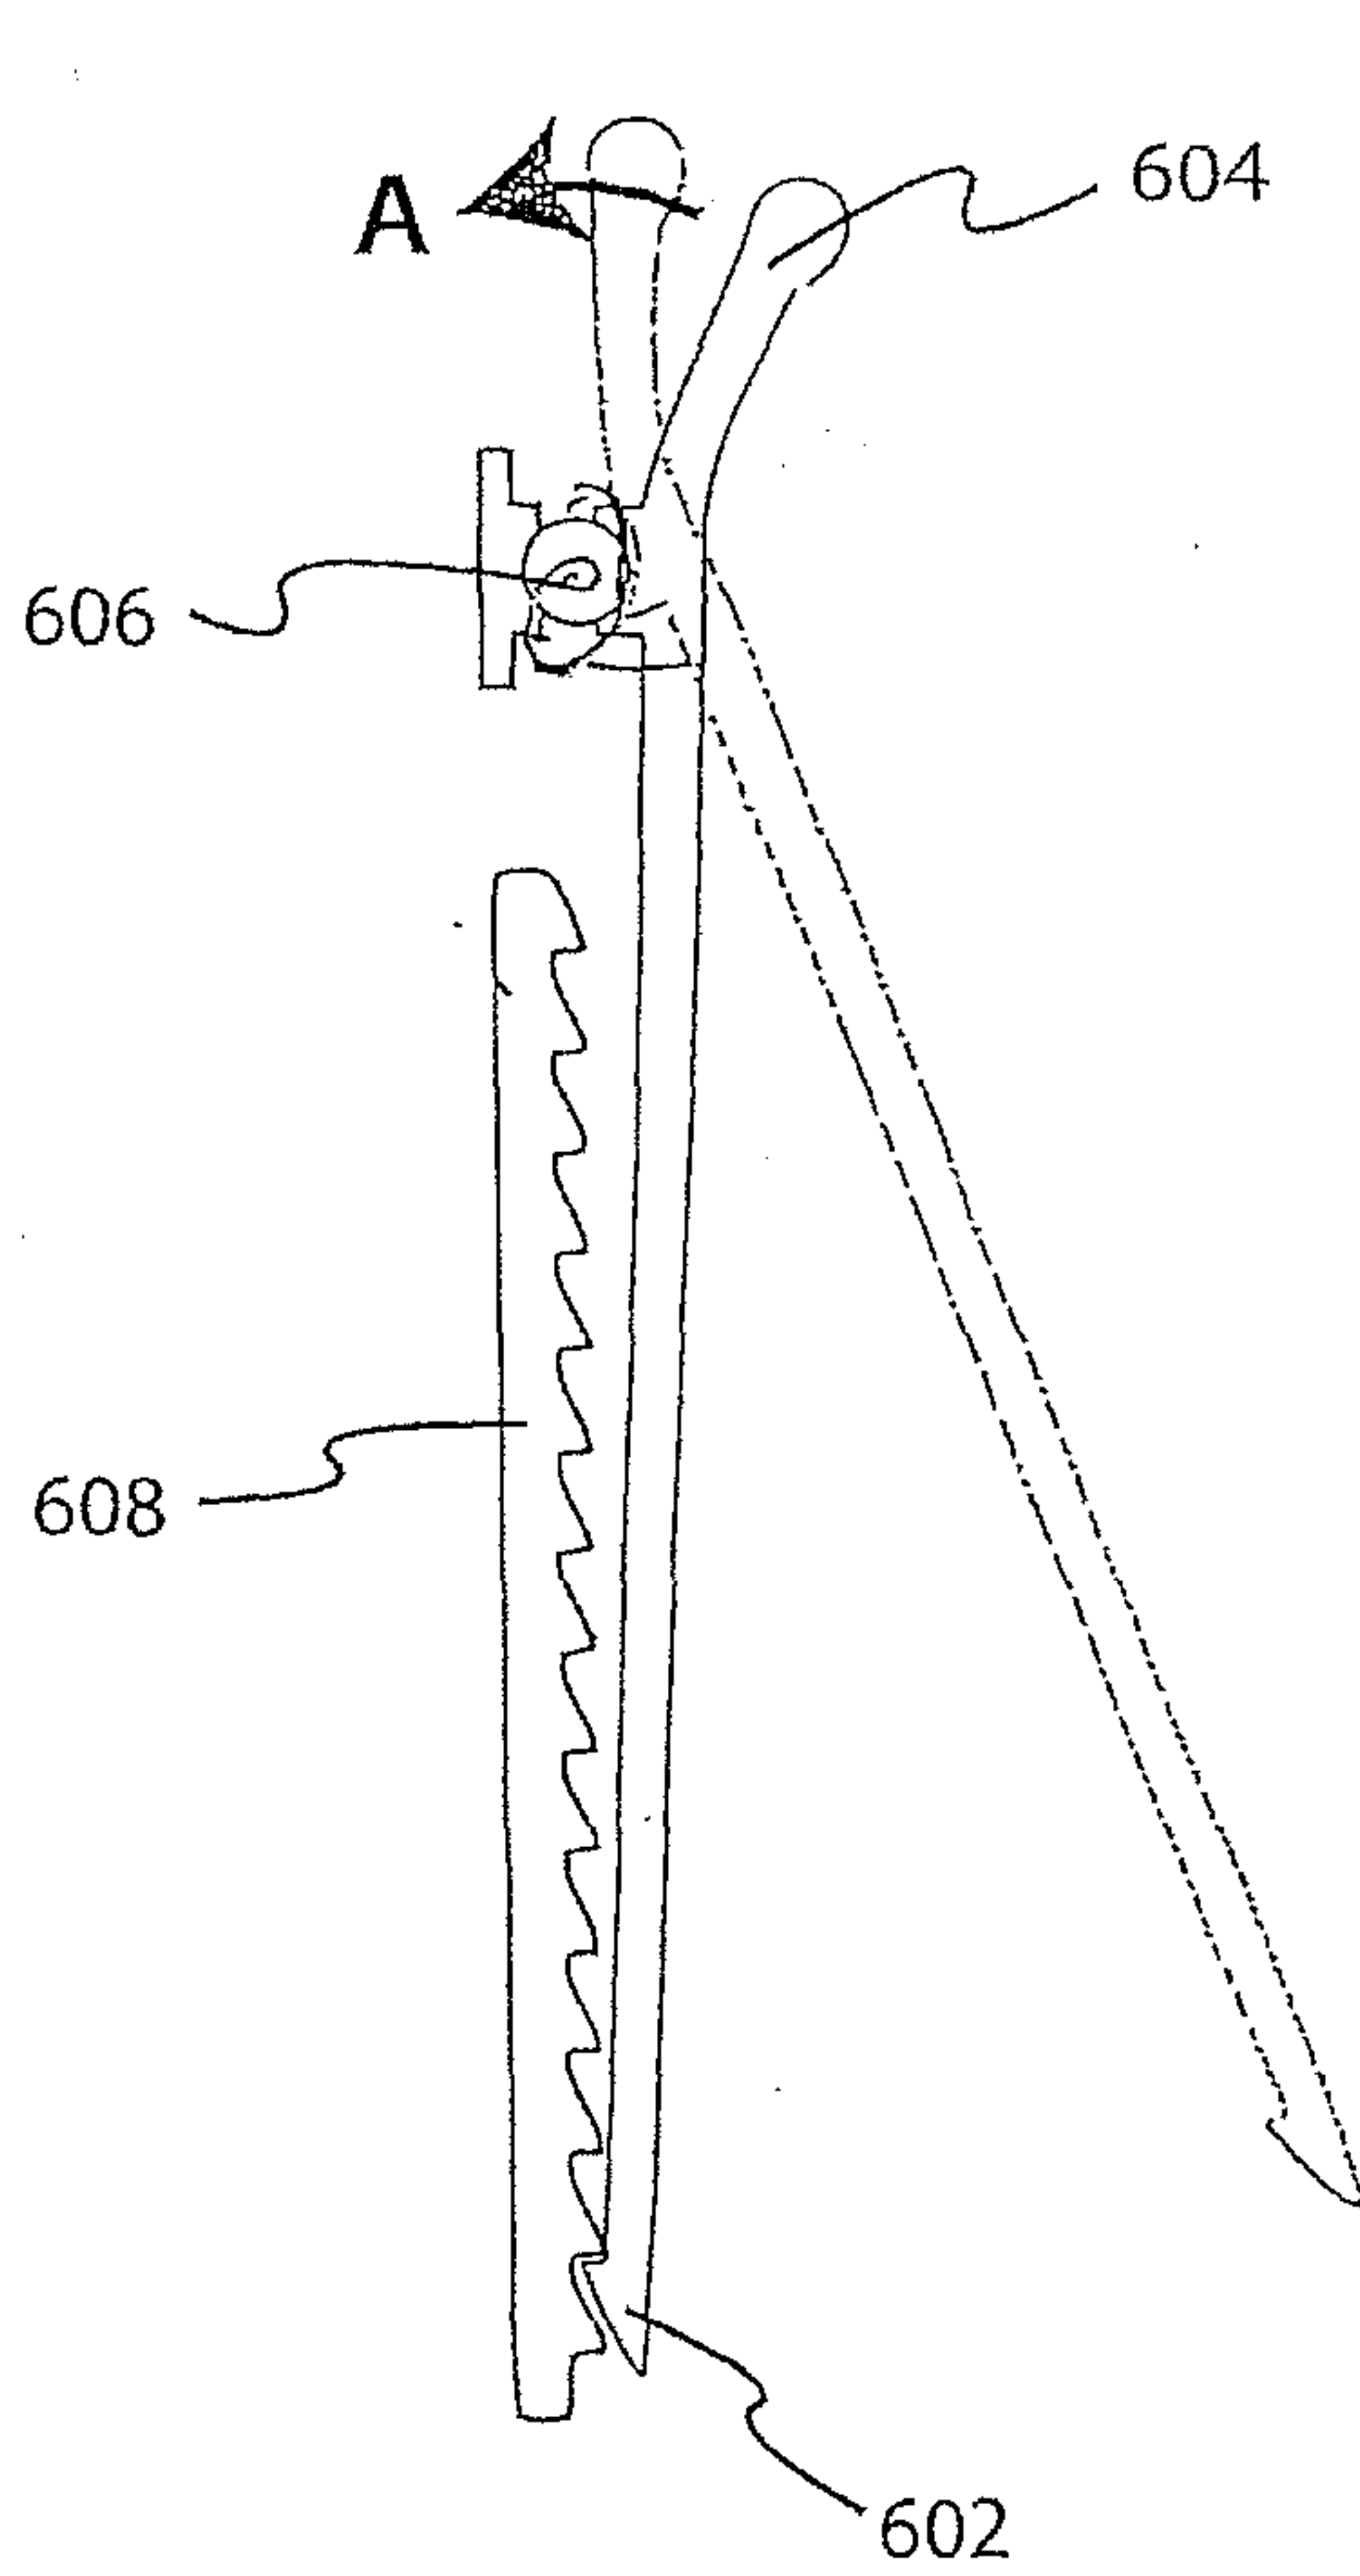


FIG. 6b

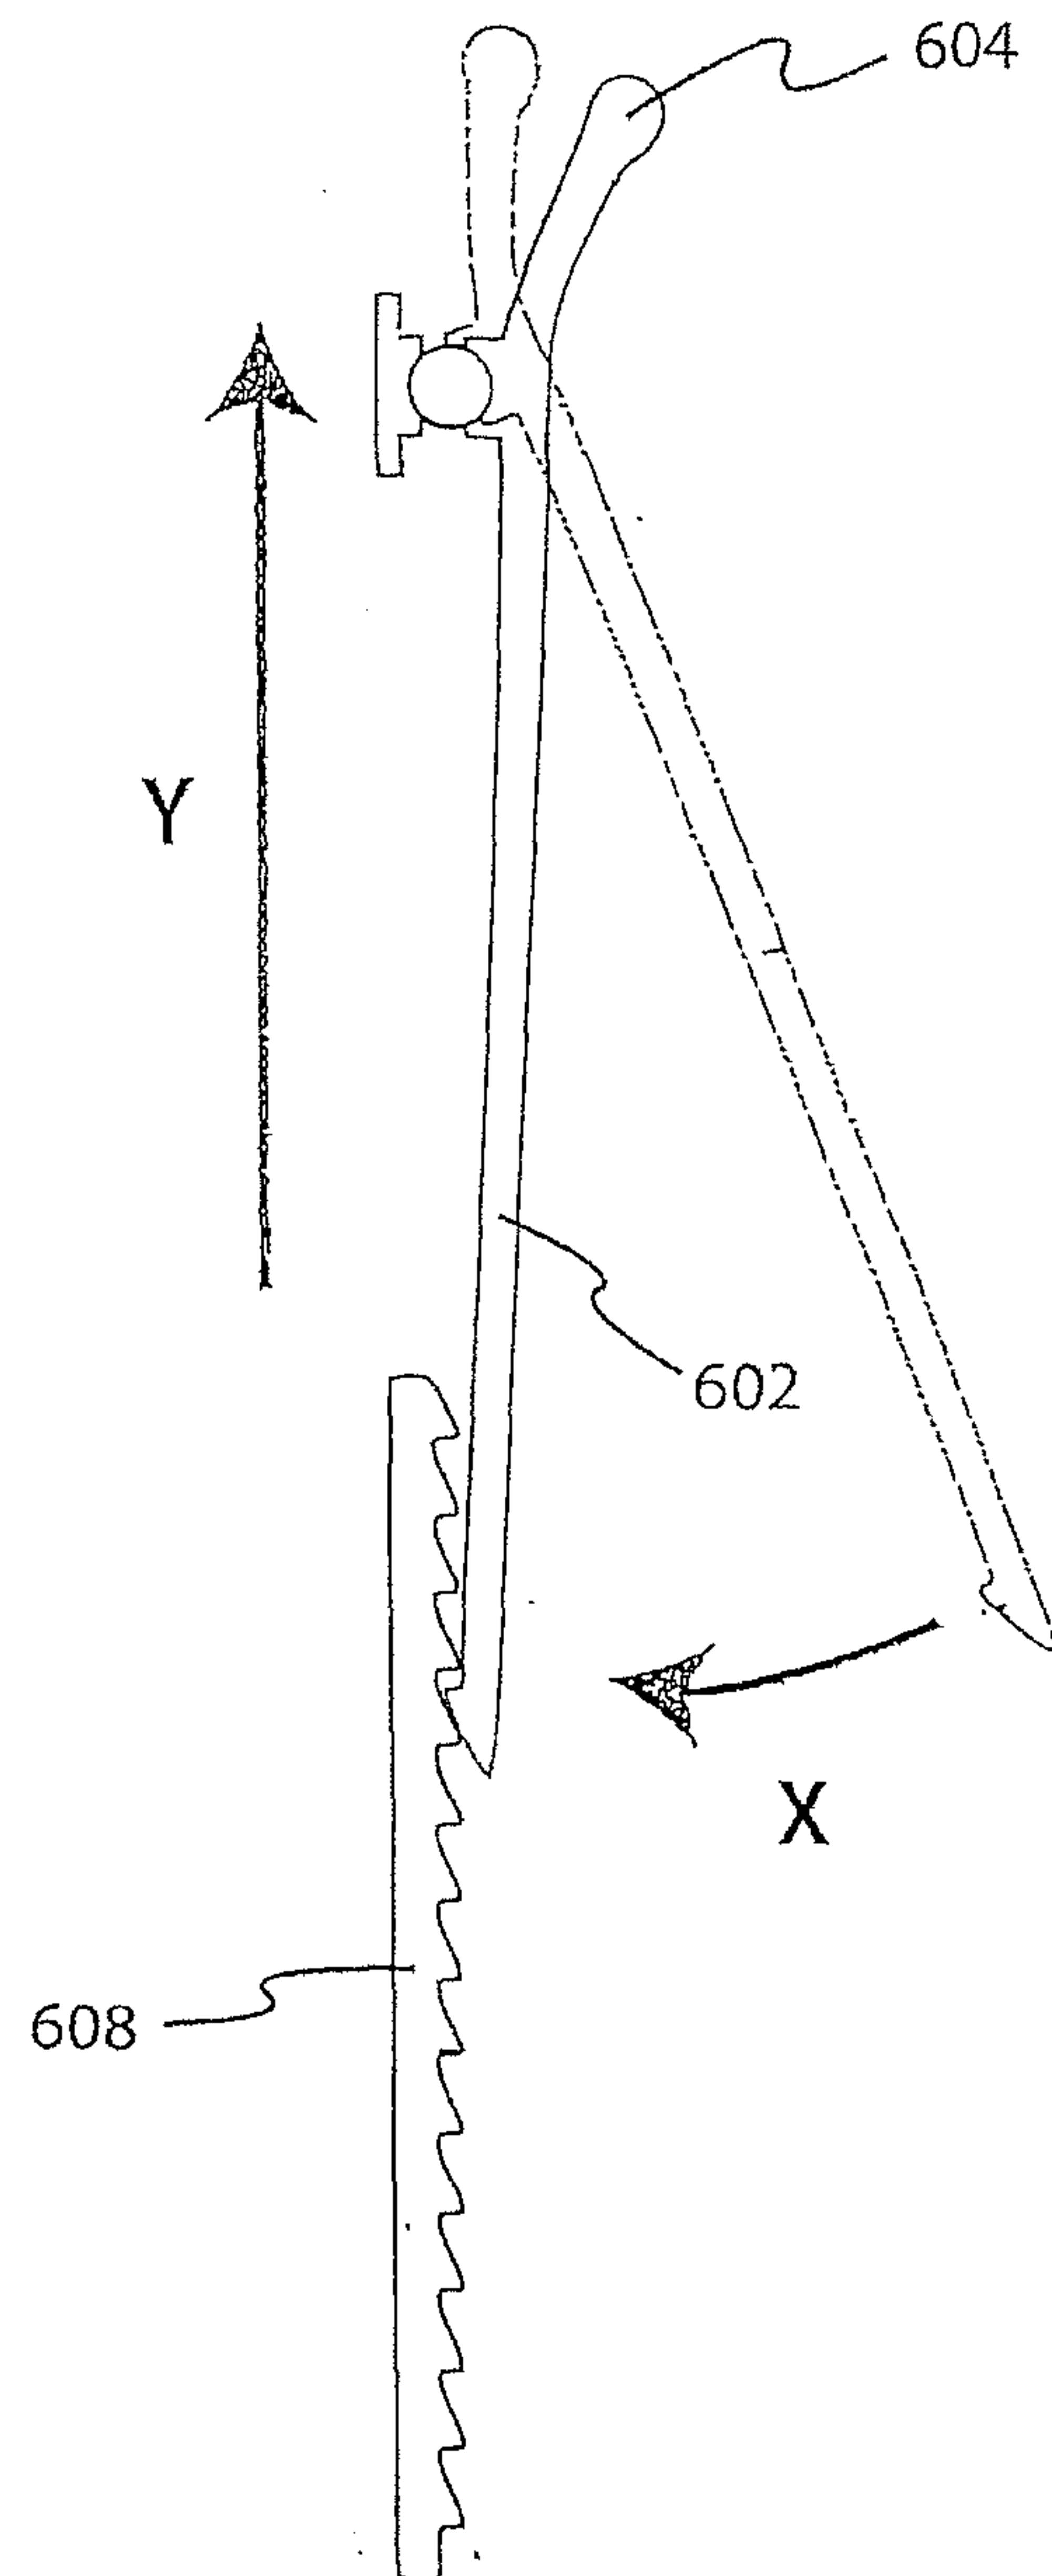


FIG. 7

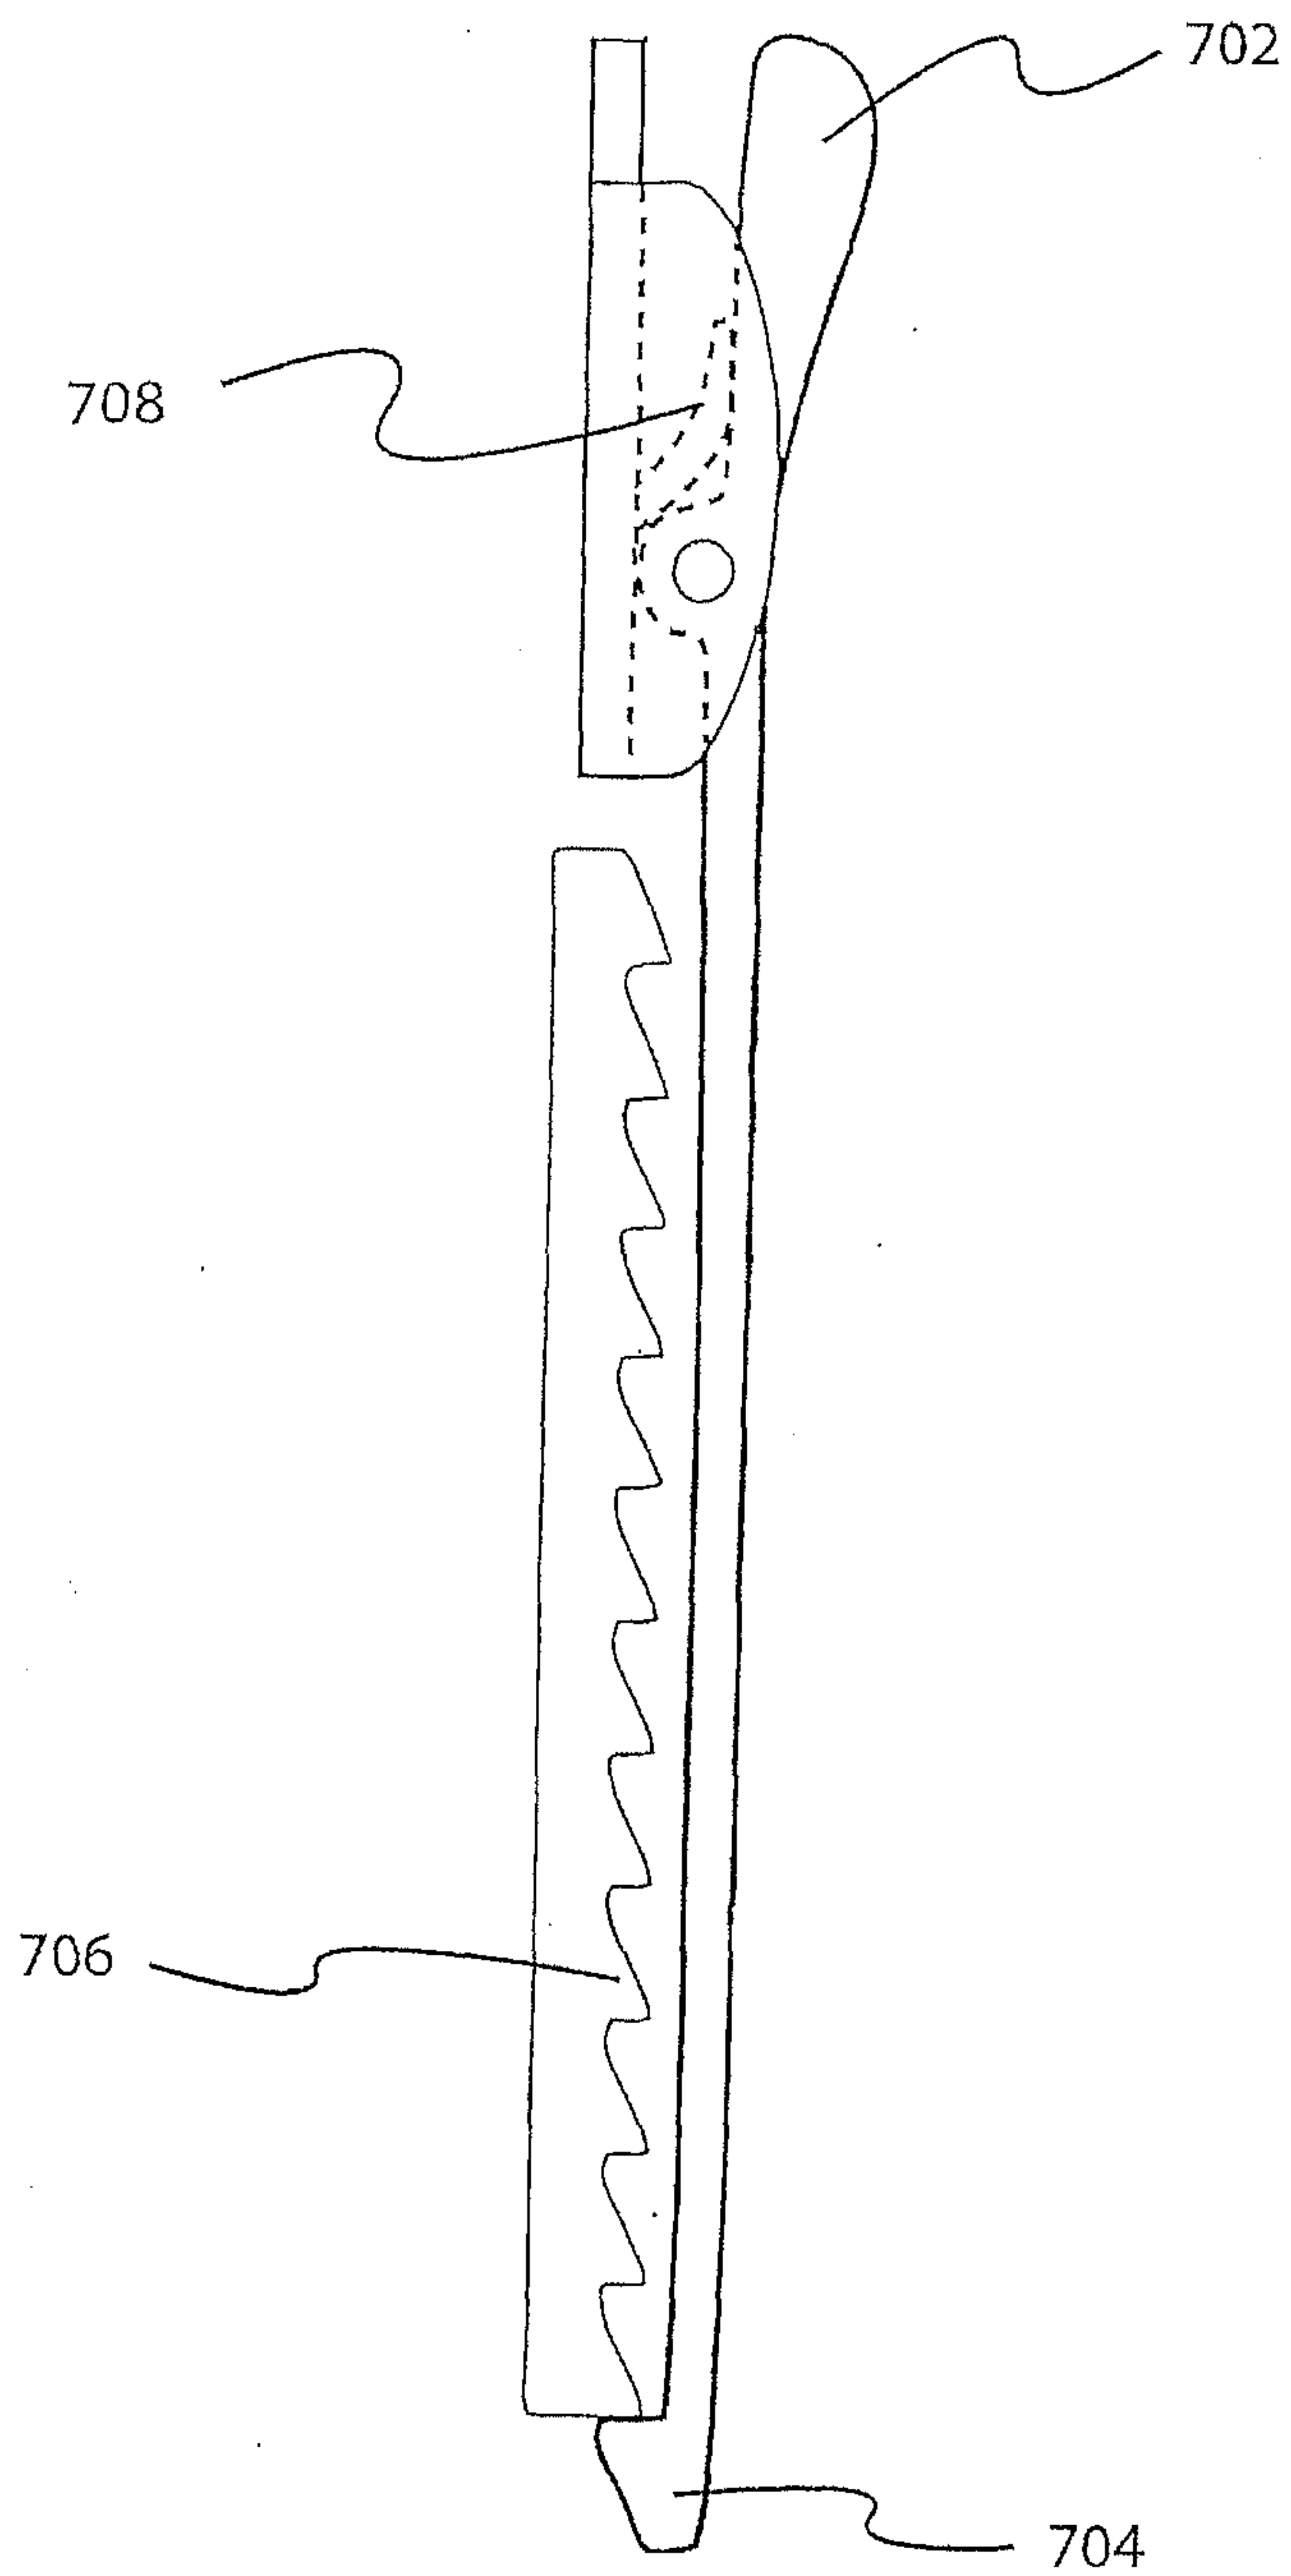


FIG. 8

