

CONVENTION

AUSTRALIA

Patents Act

APPLICATION FOR A STANDARD PATENT

I/We American National Can Company

of 1275 King Street,
P.O. Box 2600,
Greenwich,
Connecticut,
UNITED STATES OF AMERICA.

626276

hereby apply for the grant of a standard patent for an invention
entitled:

NOVEL EXTRUSION APPARATUS, METHODS, AND RELATED FILMS AND
PACKAGES

which is described in the accompanying complete specification.

Details of basic application

Number of basic application: 140,096

Convention country in which
basic application was filed: UNITED STATES OF AMERICA

Date of basic application : 31 December 1987


Address for Service:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Dated: 27 October 1988

PHILLIPS ORMONDE & FITZPATRICK
Attorneys for:
American National Can Company

By:



Our Ref : 111826
POF Code: 81711/81711

AUSTRALIA

Patents Act

DECLARATION FOR A PATENT APPLICATION

▼ INSTRUCTIONS

- (a) Insert "Convention" if applicable
(b) Insert FULL name(s) of applicant(s)

In support of the ^(a) convention application made by
(b)

AMERICAN NATIONAL CAN COMPANY

- (c) Insert "of addition" if applicable
(d) Insert TITLE of invention

(hereinafter called "applicant(s)" for a patent ^(c) for an
invention entitled ^(d)

NOVEL EXTRUSION APPARATUS, METHODS, AND RELATED FILMS AND PACKAGES

Robert A. Stenzel, Assistant Secretary of

- (e) Insert FULL name(s) AND address(es) of declarant(s)
(See headnote*)

I/We ^(e) American National Can Company
8770 West Bryn Mawr Avenue
Chicago, Illinois, 60631
United States of America

do solemnly and sincerely declare as follows:

1. ~~I am/We are the applicant(s).~~
(or, in the case of an application by a body, corporate)
1. I am/We are authorized to make this declaration on behalf of the applicant(s).
2. ~~I am/We are the actual inventor(s) of the invention.~~
(or, where the applicant(s) is/are not the actual inventor(s))
2. ^(f) Robert John Blemberg: 2500 Honey Lou Court, Apt. 102,
Appleton, Wisconsin 54915, United States of America

- (f) Insert FULL name(s) AND address(es) of actual inventor(s)

- (g) Recite how applicant(s) derive(s) title from actual inventor(s)
(See headnote**)

is/~~are~~ the actual inventor(s) of the invention and the facts upon which the applicant(s)
is/~~are~~ entitled to make the application are as follows:

(g)

The applicant is the assignee of the invention from the said actual inventors.

(Note: Paragraphs 3 and 4 apply only to Convention applications)

- (h) Insert country, filing date, and basic applicant(s) for title/or EACH basic application

3. The basic application(s) for patent or similar protection on which the application is based is/~~are~~ identified by country, filing date, and basic applicant(s) as follows:

(h)

United States of America
31 December, 1987
Robert John Blemberg

4. The basic application(s) referred to in paragraph 3 hereof was/~~were~~ the first application(s) made in a Convention country in respect of the invention the subject of the application.

- (k) Insert PLACE of signing

- (l) Insert DATE of signing

- (m) Signature(s) of declarant(s)

Note: No legalization or other witness required

Declared at ^(k) Chicago, Illinois, U.S.A.

Dated ^(l) January 30, 1989

(m) Robert A. Stenzel

Robert A. Stenzel
Assistant Secretary

To: The Commissioner of Patents

(12) PATENT ABRIDGMENT (11) Document No. AU-B-27473/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 626276

(54) Title
NOVEL EXTRUSION APPARATUS, METHODS, AND RELATED FILMS AND PACKAGES

International Patent Classification(s)
(51)⁴ B29C 047/26 B29C 047/06 B32B 001/08 B32B 027/30
B32B 031/30 B65D 030/08 B65D 065/40
(51)⁵ B29C 047/28

(21) Application No. : 27473/88 (22) Application Date : 23.12.88

(30) Priority Data

(31) Number (32) Date (33) Country
14009S 31.12.87 US UNITED STATES OF AMERICA

(43) Publication Date : 20.07.89

(44) Publication Date of Accepted Application : 30.07.92

(71) Applicant(s)
AMERICAN NATIONAL CAN COMPANY.

(72) Inventor(s)
ROBERT JOHN BLEMBERG

(74) Attorney or Agent
PHILLIPS ORMONDE & FITZPATRICK, 367 Collins Street, MELBOURNE VIC 3000

(56) Prior Art Documents
US 4042662
GB 2032837
GB 1436907

(57) Claim

1. A multiple layer tubular film having a first layer, said first layer having a first pair of opposing surfaces, and a second layer on a respective one of said opposing surfaces, said tubular film comprising a weld line extending sequentially through said first and second layers in a continuous path and at a minimum angle greater than 45 degrees to said surfaces.

2. A multiple layer tubular film as in Claim 1, said second layer being disposed outwardly of said first layer in said film, and including a third polymeric layer, said second layer being between said first layer and said third layer, said third layer having a second pair of opposing surfaces, said third layer being devoid of any weld line which (i) is disposed at a minimum angle greater than 45 degrees to either surface of said second pair of surfaces and (ii) is located within 2 centimeters of said weld line through said first and second layers.

(11) AU-B-27473/88

-2-

(10) 626276

11. A multiple layer tubular film comprising no seams and no joints along the longitudinal direction thereof, but including a longitudinally extending weld line, said weld line approaching surfaces of respective layers through which it extends at an angle greater than 45 degrees with said surfaces, said tubular film comprising at least one layer of vinylidene chloride copolymer and having a circumference of at least 80 centimeters.

AUSTRALIA

Patent Act

626276

C O M P L E T E S P E C I F I C A T I O N

(ORIGINAL)

Class

Int. Class

Application Number:

Lodged:

Complete Specification Lodged:

Accepted:

Published:

Priority:

Related Art:

APPLICANT'S REF: Docket 14749

Name(s) of Applicant(s): AMERICAN NATIONAL CAN COMPANY

Address(es) of Applicant(s): 8770 West Bryn Mawr Avenue
Chicago, Illinois 60631
UNITED STATES OF AMERICA

Address for Service is: PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
MELBOURNE, Australia 3000

Complete Specification for the invention entitled:

NOVEL EXTRUSION APPARATUS, METHODS, AND RELATED FILMS AND PACKAGES

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

BACKGROUND OF THE INVENTION

This invention relates to novel methods for coextruding multiple layer polymeric films. It also relates to the apparatus used in the novel methods, to the novel films made therewith, and to packages made from those films.

Referring especially to the problem addressed in inventing the invention herein, vinylidene chloride copolymers (VDC) are preferred for their barrier properties to transmission of moisture vapor and oxygen. The extrusion of VDC copolymers to form tubular films has conventionally been practiced with annular dies having crosshead type mandrels. Spiral type mandrels are not generally used with VDC copolymers because the dwell time is desirably minimized when extruding VDC, and low shear areas are desirably eliminated, to prevent, or delay, the degradation of the VDC copolymers.

It is commonly known that the extrusion of VDC copolymers is accompanied by a plurality of problems relating to the sensitivity of VDC copolymer to the combination of high temperature, and time for which the copolymer must be maintained at that elevated temperature, in the extrusion process.

One problem is that the VDC copolymer sometimes gets into the fit area above the conventionally used crosshead groove, degrades, and washes back out as carbon. The wash out typically is most evident along the weld line of the extruded film. A second problem is that carbon may also

form in all areas where the VDC copolymer contacts the metal in the die. With respect to this second problem, the build-up of carbon eventually becomes generally thick enough over a large enough portion of the die surfaces to affect the distribution of the VDC copolymer around the circumference of the die. In addition, bits of the formed carbon may wash out of the die in the extrudate, contaminating the film being fabricated.

10 These and other sources of problems with the extrusion of the VDC copolymer indicate, and conventional practice verifies, that commercial operation of a VDC copolymer extrusion process can function for only a limited time, such as a few days, between shutdowns for cleaning of the die. Further, this sensitivity of VDC copolymer to the time during which it is held at elevated temperature has resulted in the development of only limited-size commercial dies for fabrication of tubular films, with typical die sizes being less than 25 cm. circumference. Of course, the larger the die circumference, the greater the amount of time that the
20 polymer spends at the elevated temperature as it travels around the circumference of the crosshead mandrel in the process of being fabricated into a film. Thus processes for fabrication of films greater than 25 cm. in diameter, and containing the VDC copolymer, are generally carried out in a slot die of the cast extrusion type; and such processes are not available in tubular form, or in a form derived from a tubularly extruded film. While recent developments indicate that die circumferences up to 79.8 cm. have been developed,

as in 4,379,117, Baird et al, such dies at present have limited applicability and are not in wide-spread use.

With the circumference of the die opening thus being limited to no more than 80 cm. in known use, and it is usually no more than 40 cm., the typical blown up diameter of a tubularly extruded film will generally not exceed twice that size, namely about 150-160 cm., usually no more than about 70-75 cm. Those dimensions relate to unoriented films as they are fabricated in blown film processes or tubular water quench processes. Where the tube is subsequently molecularly oriented, the tube diameter may be as great as about 300-320 cm., but is usually no more than about 150-160 cm.

It is an object of this invention to provide a method for fabricating tubular multiple layer films containing a layer of VDC copolymer which ^{at least reduces} ~~overcomes~~ the above problems.

~~It is further an object to overcome especially the problem of the VDC copolymer getting into the fit area above the crosshead groove.~~

It is still another object to overcome, in large part, the formation of carbon from VDC copolymer in the die.

Still another object is to reduce the fraction of the internal surface area of the die which is exposed to the VDC copolymer.

It is another object of the invention to provide ~~apparatus compatible with the novel methods.~~



SUMMARY OF THE INVENTION

According to the present invention, there is provided a multiple layer tubular film having a first
5 layer, said first layer having a first pair of opposing surfaces, and a second layer on a respective one of said opposing surfaces, said tubular film comprising a weld line extending sequentially through said first and second layers in a continuous path and at a minimum angle greater
10 than 45 degrees to said surfaces.

The present invention also provides a multiple layer tubular film comprising no seams and no joints along the longitudinal direction thereof, but including a longitudinally extending weld line, said weld line
15 approaching surfaces of respective layers through which it extends at an angle greater than 45 degrees with said surfaces, said tubular film comprising at least one layer of vinylidene chloride copolymer and having a circumference of at least 80 centimeters.

20

25

30

35



Accordingly, the
~~closed herein. The~~ film has a first layer having a pair of
opposing surfaces, and a second, and optionally a third
layer on respective ones of the opposing surfaces. The
tubular film comprises a weld line extending sequentially
through the second, first, and, as applies, third layers in
a continuous path at an angle greater than 45 degrees,
usually approaching 90 degrees, to the surfaces of the first
layer. That single weld line extends in an uninterrupted
path through all the layers in a generally singular direc-
tion.

10

Considering the second layer as the outer layer in a
tube having the 3 layers in the structure, a fourth layer is
preferably included wherein the second layer is between the
first layer and the fourth layer. Considering the fourth
layer as having a second pair of opposing surfaces, the
fourth layer is devoid of any weld line which is both dis-
posed at an angle greater than 45 degrees to either of its
second pair of surfaces and located within 2 cm., preferably
1 cm., of the weld line which extends through the second,
first, and third layers.

20

In those embodiments which experience greatest benefits
from the technical value of this invention, the first layer
comprises at least 25% by weight VDC copolymer, and both the
second and third layers are essentially free from VDC
copolymer. The second and third layers, of course, comprise
polymeric compositions compatible with coextrusion with VDC
copolymer.

The films of the invention can readily be made into
packages.



BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 shows a typical conventional crosshead mandrel of the prior art and indicates the typical leakage of polymer into the fitment area above the crosshead groove.

FIGURE 2 shows a general layout of a portion of the apparatus typically used in this invention, including a coextrusion feedblock, parts of a die assembly (shown enlarged) having a crosshead type mandrel with an adapting zone, and means for conveying the polymer from the feedblock to the die.

10 FIGURE 3 shows a cross section of the exit stream in the conveying means as taken at 3-3 of FIGURE 2.

FIGURE 4 shows a cross section of the exit stream taken at 4-4 of FIGURE 2, as it is passing through the adapting zone of the invention.

FIGURE 5 shows a cross section of the 3 layer polymer composite in the crosshead groove and in the area of the annular die channel downstream from, and adjacent, the groove, as taken at 5-5 of FIGURE 2.




20 FIGURE 6 shows a cross section of a typical tubularly shaped film of the invention, taken at 6-6 of FIGURE 2, and made with method and apparatus of the invention.

FIGURE 7 represents a prior art film wherein only the VDC copolymer layer has a weld line with an angle of greater than 45 degrees with respect to the surfaces of that respective layer.



FIGURE 8 shows a typical 3 layer film of the invention having fourth and fifth layers coextruded therewith to form a 5 layer film.

FIGURE 9 shows a pictorial view of a typical pouch type package made with films of the invention.



DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

Preferred embodiments of the invention include the use of VDC copolymer in at least one layer. VDC copolymers suitable for use in those preferred embodiments are prepared utilizing such comonomers as methyl, ethyl, isobutyl, butyl, octyl, and 2-ethylhexyl acrylates and methacrylates; phenyl methacrylate; cyclohexyl methacrylate, p-cyclohexylphenyl methacrylate, chloroethyl methacrylate, 2-nitro-2-methylpropyl methacrylate, and the corresponding esters of acrylic acid; methyl alpha-chloroacrylate, octyl alpha-chloroacrylate, methyl isopropenyl ketone, acrylonitrile, methacrylonitrile, methyl vinyl ketone, vinyl chloride, vinyl acetate, vinyl propionate, vinyl chloroacetate, vinyl bromide, styrene, vinyl naphthalene, ethyl vinyl ether, N-vinyl phthalimide, N-vinyl succinimide, N-vinyl carbazole, isopropenyl acetate, acrylamide, methacrylamide or monoalkyl substitution products thereof, phenyl vinyl ketone, diethyl fumarate, diethyl maleate, methylene diethyl malonate, dichlorovinylidene fluoride, dimethyl itaconate, diethyl itaconate, dibutyl itaconate, vinyl pyridine, maleic anhydride, and allyl glycidyl ether. Preferred comonomers are acrylonitrile, methyl acrylate, and vinyl chloride.

The tubular extrusion of VDC copolymers has traditionally been performed using a crosshead type mandrel. Spiral type mandrels are preferred for other types of polymers. But they are generally not used with VDC copolymer because the dwell time of the VDC copolymer in the die must be

10
20
30
40
50
60
70
80
90
100
110
120
130
140
150
160
170
180
190
200
210
220
230
240
250
260
270
280
290
300
310
320
330
340
350
360
370
380
390
400
410
420
430
440
450
460
470
480
490
500
510
520
530
540
550
560
570
580
590
600
610
620
630
640
650
660
670
680
690
700
710
720
730
740
750
760
770
780
790
800
810
820
830
840
850
860
870
880
890
900
910
920
930
940
950
960
970
980
990
1000

cc
10/17/50

minimized, and low shear areas are also minimized, in order to prevent (and particularly to delay) the generation and accumulation of degraded components of the VDC copolymer in the extrusion apparatus, and especially in the extrusion die. Spiral type mandrels are not well suited to minimizing the dwell time and the low shear areas.

Various crosshead mandrel designs are available for use in extrusion processing of VDC copolymer. (A conventional crosshead type mandrel is illustrated in FIGURE 1.) They typically suffer from one or more of a plurality of problems addressed in this invention.

First, the VDC copolymers tend to get into the fitment area 12 above the crosshead groove 14, degrade, and wash back out as carbon into the groove 14, and into channel 13, especially along the weld line of the film. The stippled area 16 above crosshead groove 14 in FIGURE 1 indicates generally the area of flow of the polymer which unintentionally leaks into the fitment area. The fitment area 12 is generally defined herein as the area above groove 14 and between mandrel 11 and the outer containing wall 19. The dashed arrows through stippled area 16 indicate generally the typical direction of leakage of the polymer in the fitment area. The solid arrows show the primary direction of flow of polymer through the die. The problem of leakage into the fitment area can be addressed by providing close tolerances between the outside of mandrel 11 and the inside of the containing wall 19. Alternatively, mandrel 11 and the outer containing wall 19 may be cooperatively tapered to

provide a tighter fit. A shrink fitting arrangement can also be used. Both the taper fit and shrink fit techniques are, however, susceptible to accelerated wear and subsequent failure.

10 Another problem is that carbon also generally forms in all areas where the VDC copolymer contacts metal in the die. The carbon eventually becomes thick enough to affect the distribution of the polymer around the die, as well as affecting the flow rate and the associated back pressure at the extruder. The build-up of carbon is usually experienced as a progressive function related to the time during which the die is in use. The die generally must be shut down, disassembled, and cleaned after a running period of only a few days, typically 7-10 days.

...
...
...20 The problems discussed above have generally been associated with the contact between the VDC copolymer and the die metal. The above problems have been attenuated in conventional practice, for cast extruded film and sheet formed from that film, by completely encapsulating the VDC copolymer with another material (typically ethylene vinyl acetate or ethylene methyl acrylate). After the VDC copolymer has been encapsulated in the enclosing polymer (for example EVA), the encapsulated combination is then fed to a conventional cast extrusion die, such as a T-die or a coat hanger die, which forms the extruded stream, through a long slender slot, into a flat sheet of film, which is typically cast onto a metal roll for cooling.

cc

10 An hypothetical problem in this type of film fabrication is that the edges of the film, being totally encapsulated, do not contain any VDC copolymer. If these edge portions of the film were anticipated for being used, the lack of VDC copolymer in the edge portions would be a very real problem. However, since edge portions of the film are removed by conventional edge trimming in a cast extrusion process, these areas of the film are typically not used and thus the hypothetical problem is eliminated in the normal processing.

The inventor herein, being familiar with the use of the recited total encapsulation process in fabricating VDC copolymer films using a cast extrusion process, considered adaptation of total encapsulation for use in fabricating tubular films. But such total encapsulation of the VDC copolymer before entering an annular die would result in an area of the film, extending the full length of the film, along the crosshead weld line of the film, which would be devoid of the VDC copolymer. Since VDC copolymer is generally used because of its excellent barrier properties, either barrier to oxygen permeation or barrier to water vapor permeation, such a gap in the protection, particularly for a tubularly shaped package, is unacceptable. While such a process could be used with a trimming away of the area which is devoid of the VDC copolymer and a rejoining of the edges by means of a seam or a joint, such a process would be expensive, would necessarily open the tube, and would be disadvantageous as compared to other extrusion processes

cc

desired for forming a tube. Total encapsulation would also preclude conventional die oscillation for the purpose of controlling thickness variations. Yet the encapsulation concept provides for a significant advantage in the length of the processing run in that the frequency of the shut down of the process for cleaning of the die is greatly reduced.

Thus the inventor searched diligently for a method of extrusion processing VDC copolymer through an annular die to form a tubular product without the typical association of the rapid build up of carbon in the die.

This build up of carbon in the die is well recognized in the industry. It is known that the tubularly extruded film must be watched carefully in order to detect the black particles of carbon contained in the film as it is extruded from the die when the die is in the latter stages of a processing cycle. When the amount of carbon contained in the extrudate exceeds the desired acceptable amount, the process is shut down for cleaning of the die.

It is known to combine a plurality of polymers in a conventional "non-vinylidene chloride copolymer" feedblock to sandwich a first layer "B" between 2 layers of another material "A" and feed this combination into a T-style, or coat hanger style, die for forming a flat sheet of film, such as in the conventional cast extrusion process. In such a conventional feedblock, all of the layers A/B/A extend to the opposing outer surfaces of the exit stream. A cross section of the polymer structure which serves as the exit stream of such a feedblock is seen in FIGURE 3. While such



a structure is advantageous for use in cast extrusion of films which do not contain the VDC copolymer, it is not known to find use, in cast extrusion processes, with those films which do contain the VDC copolymer, because of the contact between the VDC copolymer and the surfaces of the die into which the exit stream is fed from the feedblock. Such a process would be less desirable than the process which uses the total encapsulation process as earlier described above. Thus the use of such feedblocks has been

10 limited to those processes associated with a sheet type extrusion, such as cast extrusion, and within that context, to those film structures which do not use VDC copolymers.

In preferred embodiments of this invention, an inner layer of a VDC copolymer-containing composition is sandwiched between two outer layers of non-VDC copolymer materials, in a coextrusion feedblock which is typical of that used for forming non-tubular structures which do not contain VDC copolymer. The sandwich is fed into a crosshead type mandrel where it is fabricated into a tubular film. In more

20 broadly conceived embodiments of the invention, the inner layer need not contain VDC copolymer. These embodiments find their primary advantage in that the equipment combination described herein can be used to fabricate films having more layers than the tubular die has annular openings, irrespective of whether the film being fabricated contains VDC copolymer. If the film does contain VDC copolymer, then the advantages specifically related to that combination are also obtained, in addition.



Referring now to FIGURE 2, and representing the apparatus of the invention, block 20 represents a typical non-VDC copolymer coextrusion feedblock, well known in the art. A conduit 22, such as a rectangular pipe, extends between feedblock 20 and annular die 10, which includes crosshead mandrel 11. For sake of clarity, the die components shown include mandrel 11 and containing wall 19. Other die components, not shown, are conventional, or are readily adapted to accommodate the modifications to the die 10 which are disclosed herein for mandrel 11 and containing wall 19.

Feed streams A and B represent in-feed streams of the molten polymers A and B into the feedblock 20, which are received by the feedblock 20 at orifices 21. The feedblock 20 may, of course, receive more than 2 streams, and combine them into the respective layers. It is further acceptable that layers A on either side of layer B, as seen at 24 in FIGURE 3, may have different compositions, each from the other.

Polymers A and B are combined into a multiple layer structure in feedblock 20, and the exit stream is conveyed by conduit 22 to die 10, where it is conveyed to crosshead mandrel 11. FIGURE 3 shows the exit stream 24 in cross section in the conduit, disclosing its overall configuration. As seen in FIGURE 3, layer B is sandwiched between the two outer, and preferably thinner, layers A. It is also seen in FIGURE 3 that the interior layer B extends to opposing outer surfaces 25 of the exit stream 24. The outer layers A also extend to the opposing outer surfaces of the

exit stream, as well as providing the upper and lower surfaces 27 which are in contact with the conduit 22.


Since the primary purpose of the outer layers A in the preferred embodiments of the invention is to reduce the area of contact between VDC copolymer, as in inner layer B and the interior surfaces of the die, layers A need be only thick enough to prevent contact between the VDC copolymer and the respective adjacent die surfaces. Thus layers A in the extruded film 32 may be as thin as .025 mm. thick, preferably at least .05 mm. Layers A may, of course, be thicker, to the attainment of other properties or functions. Layers A may, advantageously, be used as adhesive layers between layer B and adjoining inner and/or outer layers which may be combined with the exit stream 24 in die 10. Overall, the combined thicknesses of the two layers A in the A/B/A structure of film 32 is usually between 2% and 80%, preferably between 5% and 50%, most preferably between 5% and 30%, of the thickness of the A/B/A structure. The percentage may be lower than 2% when thick structures are being fabricated, for example greater than .250 mm. thick overall.

In some embodiments, the composition of layer B does not necessarily include VDC copolymer, in which case one of the layers A may be omitted; and in any event layer B may be quite thin, such as an adhesive layer which may be as thin as .003 mm. In such embodiments, the invention may be thought of as a means for extruding a multiple layer tubular film through an annular die having fewer annular layer

openings for extruding the extrudate than there are layers in the film. For example, using the invention, and a three layer feedblock, a 3-layer tubular film may be fabricated in, and extruded from, a single layer annular die, as illustrated in FIGURES 3-7. It is seen that, irrespective of the composition of layer B, the die, including crosshead mandrel 11, forms the multiple layer exit stream 24 into a film 32 having the same number of layers as the exit stream.

10 Referring especially now to FIGURE 2, mandrel 11 includes an adapting zone 26 between the location where stream 24 enters mandrel 11 and the crosshead groove 14. Adapting zone 26 causes the stream 24 to change directions between the location where it enters mandrel 11 and the location where it enters the crosshead groove 14. As seen in FIGURE 2, the flow of the exit stream 24 changes from a first direction as it approaches mandrel 11 to a second direction in the adapting zone 26, and is further adapted and changes directions again, especially through the use of channel 13, whereby the exit stream is fabricated into a film and conveyed from the channel 13 to the external annular opening 31 in the die in a third definable direction generally depicted by the solid arrows projecting downwardly from groove 14. The second and third directions of flow of the polymer in the exemplary A/B/A structure are, in many cases, closer to alignment with each other than are the first and third directions of flow. It is entirely acceptable that the second and third directions may be the same. And in some embodiments, they are. Most of the polymer

20



does, of course, flow circumferentially around the die, as in groove 14, between its flowings in the second and third directions.

00 11
00 11
00 11
00 11
00 11

11
11
11
11

00 11
00 11
00 11
00 11

00 11
00 11
00 11
00 11
00 11



The first change in direction, from the first direction to the second direction, is illustrated in the cross sections of the 3-layer polymer stream as depicted in FIGURES 3 and 4, and with relation to the location of the cross sections 3-3 and 4-4 in FIGURE 2. Indeed it is seen from comparing FIGURES 3 and 4 that the cross sections are identical, with the only change being the direction of flow of the stream at the locus where the cross section is shown. The cross-sections may, of course, be different, in that the cross-section at 4-4 of FIGURE 2 may represent a wider and thinner cross-section for beginning the formation of the rectangular exit stream into the thinner polymer stream required for forcing the polymer through the film-forming channel 13.

As the multiple layer polymer stream flows through crosshead groove 14, and thence downwardly through the channel 13 formed between mandrel 11 and outer container wall 19, the A/B/A structure is thinned and distributed over the entire circumference of the mandrel below crosshead groove 14. The cross section at 5-5 in FIGURE 2 is shown in detail in FIGURE 5, along with an accompanying illustration of the relationship of the layers to the surfaces of the die parts; and especially groove 14 and the fitment area 12. As seen in FIGURE 5, the layer B is essentially encapsulated between the 2 "A" layers such that there is minimal contact between the layer B and the die surfaces. Indeed, contact between layer B and the die in the illustrated embodiment is indicated only at the top 33 of crosshead groove 14. It is

further noted that the material of layer A on the edge of the stream 24 is the primary material which is susceptible in this process, of leaking into the fitment area 12, and especially the stippled area 16, as seen in FIGURES 2 and 5.

Applicant contemplates that mechanical modifications to the die, especially to mandrel 11 and containing wall 19, may be practiced, toward the goal of reducing or eliminating polymer leakage into fitment area 12. The general direction of flow of the polymer leakage in fitment area 12 is depicted by the dashed arrows in stippled area 16 of FIGURE 2. And applicant recognizes that such improvements in die design may be successful in reducing or eliminating such leakage in newly-fabricated dies. However, applicant contemplates that the effectiveness of such measures will be transitory, and that, even those dies which do not exhibit leakage when new, will eventually experience such leakage as the dies wear with extended use. When the leakage does occur, the attendant VDC copolymer degradation results if the polymer leaking into the fitment area is VDC copolymer. If, however, the VDC copolymer covering principles of this invention are being used, the polymer leaking into the fitment area 12 is that of a layer "A" whose composition has been chosen such that it is functionally free from VDC copolymer, whereby degradation of VDC copolymer is not a problem. In such case, the polymer leakage into fitment area 12 is of minimal consequence in that the materials contemplated for use in layers "A" are those which do not degrade significantly during the extrusion process. Thus;

10

20

cc

the practice of the invention makes the process of extruding VDC copolymer, using the covering layers "A", more tolerant of polymer leakage into the fitment area, where the composition of layer "A" does not functionally incorporate the temperature sensitive VDC copolymer problem. As a result, tolerances in the die specifications may be somewhat relaxed, with attendant reduction in die cost. And since moderate polymer leakage in the fitment area, which may be associated with die wear, is not especially detrimental to the extrusion process in this invention, die life may be extended beyond the previously normal wear which would have made the die unserviceable (absent the practice of the invention) due to fitment leakage resulting from die wear, and the associated carbon particles in the extruded film.

So the hardware and process improvements of the invention provide a resulting process combination which is more tolerant of leakage into the fitment area in addition to sharply reducing the surface area of contact between VDC copolymer and the die surfaces. This is just one of the benefits of the invention. Others are described elsewhere in this teaching.

Having thus described the operation of the tubular die in combination with the non-VDC copolymer coextrusion feedblock, which feedblock was previously used to feed a T-die or a coat hanger die for cast extrusion of flat sheet film, it is seen that the use of such a combination of equipments is advantageous for adaptation to a coextrusion process including a VDC copolymer layer. The non-VDC copolymer

layer A encloses most (i.e. greater than 75%, especially greater than 90%) of the surfaces of VDC copolymer layer B, such that the surface area of contact between the VDC copolymer and the respective surfaces of the die is usually extremely limited. With the surface area of contact so limited, the problem associated with extended contact between the VDC copolymer and major surface areas of the die is thereby attenuated, such that the extrusion processing of VDC copolymer in annular dies is facilitated and made possible for extended periods of time.

Another problem associated with tubular extrusion of VDC copolymer, and directly related to its time-related sensitivity to the high temperature required for extrusion processing it, is that the size of tubular dies has conventionally been limited in order to limit the length of the die path, and thus the time of exposure of VDC copolymer to the elevated temperature. Thus the conventional tubular extrusion processing of VDC copolymers has been limited to dies having a circumference of no more than 80 cm., typically no more than 25 cm. Using the apparatus and methods of the invention, this limitation of the time-temperature relationship of the VDC copolymer, and its associated degradation of polymer with the production of carbon particles, has been attenuated. It is now possible to use tubular dies of sizes which are more conventionally associated with non-VDC copolymer extrusion processes. Such dies typically run up to 250 cm. in circumference, and in some cases greater, such as up to 350 cm. or more.

However, even die circumferences in the range of 50-60 cm. are indeed an improvement over the typical commercially practiced art, which, it is believed, is usually limited to about 40 cm., more or less. Die circumferences in the range of 90 cm., yes, 125-150 cm, and even up to the maximum circumferences now practiced in the art will be generally susceptible to conventional development with respect to their adaptation to VDC copolymer extrusion in light of the instant disclosure. While larger sizes are contemplated as being possible for use without necessarily degrading the VDC copolymer by virtue of the high temperature and the residence time in the die, to the point where using such equipment would be unacceptable, other limitations on the die size enter into play when these larger size dies are considered. Such issues related with those larger sizes, and their adaptations, to the extent they are not related to the time-temperature sensitivity of VDC copolymer, form no part of this invention.

FIGURES 6 and 8 represent, in exaggerated thicknesses with respect to their diameters, tubular films 32 representative of films made using this invention. Film 32 comprises a central layer B enclosed on both sides by inner and outer layers A. Layers A and B in FIGURES 6 and 8 correspond to layers A and B in cross-section 24 in FIGURES 3 and 4. The cross-section of the film in FIGURES 6 and 8, is, of course, thinner than the cross-section of the stream 24 in the conduit 22 and the adapting zone 26 of the mandrel.

A significant feature of the films of this invention is the weld line 34 shown in FIGURES 6 and 8. It is normal for VDC copolymers to exhibit a weld line through the VDC copolymer layer, as seen in FIGURE 7, as a result of having been coextruded through a crosshead type mandrel. The weld line typically is formed at a location 180 degrees around the circumference of mandrel from the location where the stream entered the mandrel. The weld line approaches the layer surfaces at a minimum angle of at least 45 degrees, typically about 90 degrees. With respect to FIGURE 2, and the films of the invention, the entrance to the mandrel is associated with the adapting zone 26, and so the weld line in the film is associated with the left side of the mandrel as seen in FIGURE 2.

The weld line 34 in films of the invention approaches each of the layer surfaces at a minimum angle of at least 45 degrees, typically about 90 degrees, as shown in FIGURE 6. The term "minimum angle" is defined as that smallest measurable angle between the weld line and the respective surface, adjacent that respective surface.

In a typical film of the prior art seen in FIGURE 7, only the VDC copolymer layer has been processed through a crosshead type mandrel. The inner and outer layers in prior art structures have typically been processed through a different type of mandrel, such as a spiral mandrel, which does not create a weld line at a minimum angle of at least 45 degrees, especially a perpendicular angle to the surfaces of the film. Rather, the spiral type mandrel provides weld lines which approach the surfaces of the related layers at

lines which approach the surfaces of the related layers at angles substantially less than 45 degrees to those surfaces. Typical spiral weld lines, formed through a spiral mandrel, are seen at 36PA in FIGURE 7. As seen in FIGURE 7, only the VDC copolymer layer 38PA exhibits the weld line having an angle greater than 45 degrees to the surfaces of the associated layer 38PA. In some embodiments, not shown, the weld line 34PA diverges from the essentially perpendicular angle shown, but it is nevertheless greater than 45 degrees as measured from the surfaces of the related layer. Referring to spiral weld lines 36PA as seen in FIGURE 7, those weld lines approach the surfaces of the related layers at angles of less than 45 degrees. FIGURES 7 and 8 are film cross-sections. They do not have the normal cross-section hatching, as that would obscure the spiral weld lines 36PA, 44 and 46.

A typical film of the invention, and represented by FIGURE 6, is of the order of .05 mm. to .10 mm. thick. Films as thin as .03 mm. are contemplated, and films up to about 0.5 mm. are commonly extruded by the tubular process. Thicker films may also be fabricated, but are generally less preferred.

Referring now to FIGURE 8, the basic 3 layer structure 32 as seen in FIGURE 6, is represented with further fourth and fifth layers 40 and 42 combined with 3 layers A, B, A, of the structure 32. The 5 layer structure seen in FIGURE 8 is preferably fabricated by a coextrusion or extrusion coating process. Indeed, the 3 layer combination 32, which

is fabricated by the use of the crosshead mandrel 11 in combination with the feedblock 20, may readily be combined in an otherwise conventional die with one or more other layers in fabrication of a tube having more than the 3 layers which are illustrated as being fabricated by mandrel 11. It is specifically noted in FIGURE 8 that weld line 34 extends through the 3 layer substructure A/B/A, at an angle essentially perpendicular to the surfaces of the respective layers, and does not extend through layers 40 and 42.

10 Rather, layers 40 and 42 are represented as having spiral weld lines 44 and 46, which approach the associated surfaces of their respective layers at angles substantially less than 45 degrees.

Where layers 40 and 42 are coextruded with the A/B/A structure, mandrel 10 as seen in FIGURE 2 will desirably have second and third orifices located inwardly and outwardly of orifice 31 for fabrication of layers 42 and 40 respectively. In such case, the outer surface of containing wall 19 could form the inner surface of the outer orifice, and could accordingly include therein spiral grooves such as
20 are associated with spiral mandrels.

Within the definition of this invention, it is acceptable for layers 40 and 42 to have weld lines approaching the respective layer surfaces at angles greater than 45 degrees so long as those weld lines are displaced angularly from the weld line 34.

The films of the invention are susceptible to being fabricated into packages according to conventional practice

used for otherwise conventional films containing VDC copolymer, or other polymers as herein disclosed. Typical of such packages is pouch 48 which may be fabricated by forming a seal 50 at one end of a length of the tube structure fabricated by a film-forming method of the invention.

It is seen that the apparatus and methods of the invention have been disclosed with respect to the advantages gained in their use in fabricating films containing one or more layers of VDC copolymer. The processes and apparatus

10

are also advantageously used as a means of combining a plurality of polymer compositions ahead of an annular die. Advantageously, the feedblock 20 can be used as a means of fabricating, for example, a 3 layer polymer flow stream as at 24, which is used in conjunction with a single mandrel as at 11, in fabrication of a 3 layer structure in tubular form. An advantage of this process, even without using VDC copolymer in the composition of the film, is the ability to fabricate a 3 layer structure in a single tubular channel 13 of a tubular die, illustrated in part at 10 in FIGURE 2. To

20

the extent the die is capable of combining additional layers with the structure fabricated in the crosshead mandrel 11, a 3 layer die, for example, may be used in fabrication of a 5 layer film.

As illustration of a more simple embodiment of the invention, a 2-layer tubular film may be fabricated with a single layer die by combining two compositions in a 2-layer feedblock and passing them through the corresponding mandrel 11, to form a 2-layer substructure. While such a practice

will not provide the "A"-layer shielding function described above for a VDC copolymer layer, such a practice is entirely satisfactory where layer shielding is not an issue, such as in a structure devoid of VDC copolymer.

Broadly speaking, then, the invention provides the capability to fabricate a tubular film in a coextrusion die and wherein the film extruded from the die contains more layers than there are annular openings in the die, with each layer extending the full circumference of the film tube.

10 The ability to join the edges of the individual layers at the weld line is a function of each of the layers extending to the edge surfaces of the polymer stream fabricated from the exit stream; each layer extending to the edges 25 of the exit stream being illustrated in FIGURE 3. Absent that ability, and as occurs with total encapsulation, the weld line contains only the outer "A" layers. To the extent the "B" layer is required for the proper functioning of the film, such tubularly fabricated films are deficient in performance. Once the film is formed, such deficiency can
20 only be rectified by opening the tube along the weld line and removing the strip which is devoid of "B"-layer material. While the tube may again be reformed, as by a longitudinal joint or seam, after removing the offending strip, such processes are less economical than use of a directly fabricated film having acceptable properties at the time it is tubularly fabricated. Further, such a reformed tube may

be deficient in certain measures of strength, and may be less desirable in appearance than a tube having no such seam or joint.

Since conventional coextrusion feedblocks are readily available, and are fairly economical, as compared to a separate tubular die for fabrication of the same number of layers, the method of the invention provides an economical way to upgrade a 3 layer die for fabrication of a 5 layer film. It also provides the capability, with only the inclusion or exclusion of the feedblock, to use the same equipment for fabrication of both 3 layer films and 5 layer films.

It is known that conventional feedblocks may fabricate exit streams having more than 3 layers. Similarly, the feedblocks used in the invention herein may be selected/ designed to fabricate a conventionally desired number of layers into the exit stream 24 for feeding to the crosshead mandrel 11. Thus the feedblock could fabricate 5 layers, for example, or 7 layers, or more. The difficulty of controlling the number of layers, of course, increases conventionally with respect to the number of layers being fabricated.

A specific use contemplated for the methods and apparatus of the invention is the positioning of adhesive layers A on either side of a core layer B for fabrication into a 3 layer structure as in crosshead mandrel 11 and wherein inner and outer fourth and fifth layers are positioned on either side of the adhesive layers in a typical 3 layer die. With respect to structures using VDC copolymer,

and wherein the adhesive material is an ethylene vinyl acetate (EVA), a structure of the following nature may typically be fabricated.

LLDPE/EVA/VDC-CP/EVA/LLDPE

LLDPE = Linear low density polyethylene copolymer.

In the above structure the VDC-CP typically comprises 10%-40% of a film which is .05 - .10 mm. thick. The EVA layers typically comprise 5 - 10% of the thickness. The balance of the thickness may be distributed between the 2 LLDPE layers as desired.

Where the barrier material selected for layer "B" is ethylene vinyl alcohol copolymer (EVOH), the structural equivalent of the above VDC structure is

LLDPE/ADH/EVOH/ADH/LLDPE.

ADH = Adhesive.

Adhesives useful in the fabrication of EVOH films are conventionally known. Typical of these are the Plexars from Chemplex Co., the Admers from Mitsui Petrochemical, and the Bynels from DuPont.

By way of example of a similar 7-layer film which may be fabricated, with the 5 interior layers having been pre-formed into a 5-layer exit stream in the feedblock as at 20, there is seen the structure

LLDPE/EVA/adh/EVOH/adh/EVA/LLDPE.

Other structures and compositions, and combinations thereof, will now be obvious to those skilled in the art; as the invention is susceptible to a variety of specific adaptations of the apparatus, the methods and the produced film structures.

10 The films fabricated in tubular form according to the invention may, for example, be subjected to subsequent extrusion processing steps and additional film converting processes which are common to the art. Exemplary of the extrusion processing step is extrusion coating and coextrusion coating of tubular films as is well known. Exemplary of additional converting process steps are the steps of irradiating the films, heat setting the films, and the like.

20 With respect to the outer fourth and fifth layers disclosed above, there may be any number of materials substituted for the LLDPE. Typical of such polymers are polypropylene homopolymers and copolymers, polyethylenes including low density, medium density, and high density, polyethylenes and ethylene copolymers including EVA, ionomers, and vinyl alcohol copolymers such as EVOH. The above listing is only exemplary in that the invention may extend to any material which can be coextruded with any other material in a typical extrusion operation.

The apparatus and methods of the invention are generally such that the several layers passing through feedblock 20, conduit 22, and mandrel 11 are in contact with each other at the associated elevated temperatures for a greater length of time than is normal in some conventional coextru-

sion processes. This greater length of time is seen as being instrumental in the advantageous development of additional bonding strength between the related layers at their corresponding interfaces.

10 With respect to extrusion of VDC copolymer, the reduction in the surface area of contact between the VDC-copolymer and the die, as illustrated in FIGURE 5, reduces the amount of catalysis occurring at the common interface between VDC-copolymer and the die surfaces. Thus the rate of degradation of VDC copolymer is reduced. Likewise, the associated build-up of carbon in the die is attenuated. Accordingly, using this invention, VDC-copolymer extrusion processes can be operated continuously, in normal specification ranges, for extended periods of time between shut-downs for die cleaning. Typical time periods run at least 2 weeks, and are contemplated to run at least a month, and perhaps as long as conventional non-VDC-copolymer extrusions.

20 While the invention has been disclosed with respect to the advantages of using the apparatus and processes of the invention with films containing a layer of about 100% VDC copolymer, layers containing a blend of, for example, as little as at least 25%, especially at least 50%, VDC copolymer will exhibit problems of degradation and carbon formation, similar to those discussed herein, absent the use of the principles of the invention disclosed herein. Thus those films containing at least 25% VDC copolymer in one or more layers, can benefit from the shielding of a respective layer from contact with die surfaces as in the invention



herein. Accordingly, compositions containing at least 25%, preferably at least 50%, VDC copolymer, in one or more layers, are included within the meaning of the term "VDC copolymer" as used herein.

10 In addition to its applicability with respect to films, this invention can also be used in fabrication of tubes and bottles, as packages. In fabrication of tubes, the extrudate may generally be extruded in the form of a continuous tube having the desired cross-section of layers in essentially the desired thicknesses. Generally the thicknesses of such tubes is about 0.30 mm. to about 0.61 mm., preferably about 0.40 mm. to about 0.46 mm.

In fabrication of bottles, a tubular parison is first extruded having a thickness of about 0.76 mm. to about 5 mm., typically about 2.3 mm. The sidewall thickness of bottles then blown from such a parison is typically about 0.40 mm. to about 1.3 mm., commonly about 0.8 mm.

20 While the invention has been described above with respect to its preferred embodiments, it will be understood that the invention is capable of numerous rearrangements, modifications, and alterations, and all such arrangements, modifications, and alterations are intended to be within the scope of the appended claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A multiple layer tubular film having a first layer, said first layer having a first pair of opposing surfaces, and a second layer on a respective one of said opposing surfaces, said tubular film comprising a weld line extending sequentially through said first and second layers in a continuous path and at a minimum angle greater than 45 degrees to said surfaces.

2. A multiple layer tubular film as in Claim 1, said second layer being disposed outwardly of said first layer in said film, and including a third polymeric layer, said second layer being between said first layer and said third layer, said third layer having a second pair of opposing surfaces, said third layer being devoid of any weld line which (i) is disposed at a minimum angle greater than 45 degrees to either surface of said second pair of surfaces and (ii) is located within 2 centimeters of said weld line through said first and second layers.

3. A multiple layer film as in Claim 1 and including a third and a fourth layer on the other one of said first pair of opposing surfaces of said first layer, said weld line extending through said first and second layers, and further extending sequentially through said third layer.

4. A multiple layer film as in Claim 2 and including a fourth layer on the other one of said first pair of opposing surfaces of said first layer, said fourth layer having a third pair of opposing surfaces and being devoid of any weld line which is (i) disposed at a minimum angle greater than 45 degrees from said third pair of surfaces and (ii) located within 2 centimeters of said weld line through said first and second layers.

5. A multiple layer tubular film as in any one of Claims 1 to 4, said first layer comprising vinylidene chloride copolymer, said second and third layers being



essentially free from vinylidene chloride copolymer and comprising polymeric compositions compatible with coextrusion with vinylidene chloride copolymer.

5 6. A multiple layer tubular film as in Claim 1, said film further comprising a third layer on the other one of said first pair of opposing surfaces, said first layer comprising a vinylidene chloride copolymer, said second and third layers comprising ethylene vinyl acetate
10 copolymer.

7. A multiple layer tubular film as in Claim 6, said second layer being disposed outwardly of said first layer in said film, and including a fourth polymeric layer, said
15 second layer being between said first layer and said fourth layer, said fourth layer having a second pair of opposing surfaces, said fourth layer being devoid of any weld line which is (i) disposed at a minimum angle greater than 45 degrees to either surface of said second pair of
20 surfaces and (ii) located within 2 centimeters of said weld line through said second, first, and third layers.

8. A multiple layer tubular film as in Claim 6 or Claim 7, said first layer comprising vinylidene chloride
25 copolymer, said second and third layers being essentially free from vinylidene chloride copolymer and comprising polymeric compositions compatible with coextrusion with vinylidene chloride copolymer.

9. A multiple layer film as in Claim 6 or Claim 8 when
30 appended to Claim 6 and including fourth and fifth layers, respectively, on opposing surfaces of said second and third layers, the compositions of said fourth and fifth layers being selected from the group consisting of linear
35 low density polyethylene, propylene polymers and copolymers, ethylene polymers and copolymers, ionomers, and vinyl alcohol polymers and copolymers.

10. A multiple layer tubular film as in Claim 9, said

fourth and fifth layers comprising linear low density polyethylene.

5 11. A multiple layer tubular film comprising no seams and no joints along the longitudinal direction thereof, but including a longitudinally extending weld line, said weld line approaching surfaces of respective layers through which it extends at an angle greater than 45 degrees with said surfaces, said tubular film comprising
10 at least one layer of vinylidene chloride copolymer and having a circumference of at least 80 centimeters.

12. A multiple layer tubular film as in Claim 11, said film being unoriented and having a circumference of at
15 least 100 centimeters.

13. A multiple layer tubular film as in Claim 11, said film being molecularly oriented and having a circumference
20 of at least 140 centimeters.

14. A package made with a multiple layer film of Claim 1 or Claim 11.

15. A multiple layer tubular film according to Claim 1,
25 substantially as herein described with reference to the accompanying drawings.

30 DATED: 8 May 1992
PHILLIPS ORMONDE & FITZPATRICK
Attorneys for:
AMERICAN NATIONAL CAN COMPANY

David B. Fitzpatrick

35

34812

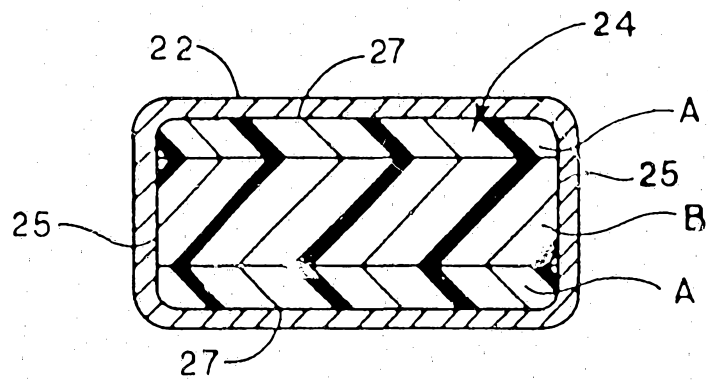


FIG. 3

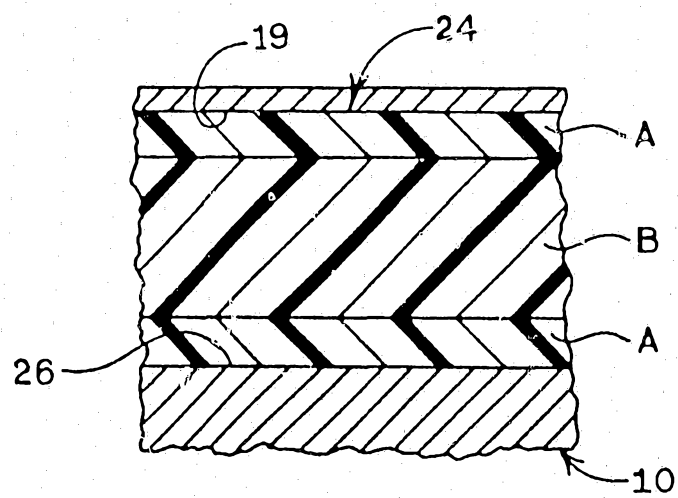


FIG. 4

27473/88

FIG. 5

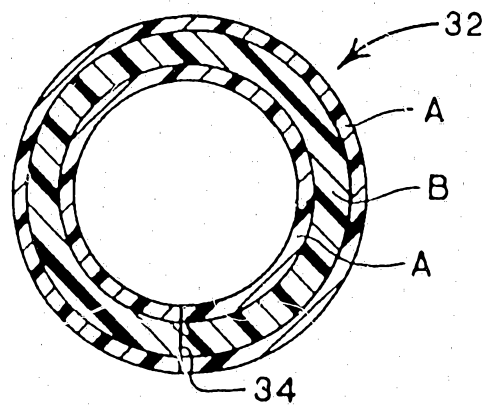
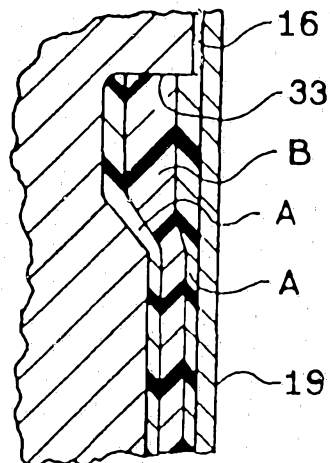
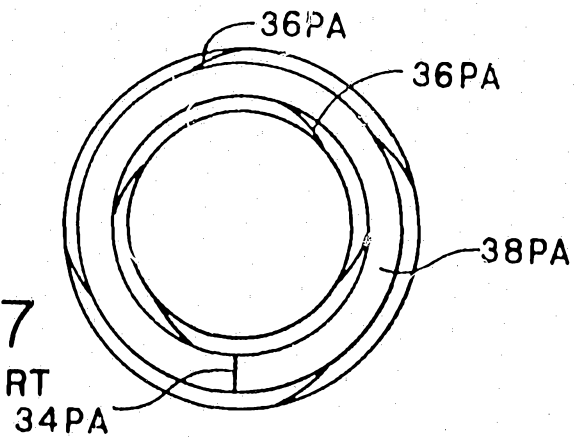


FIG. 6

FIG. 7
PRIOR ART



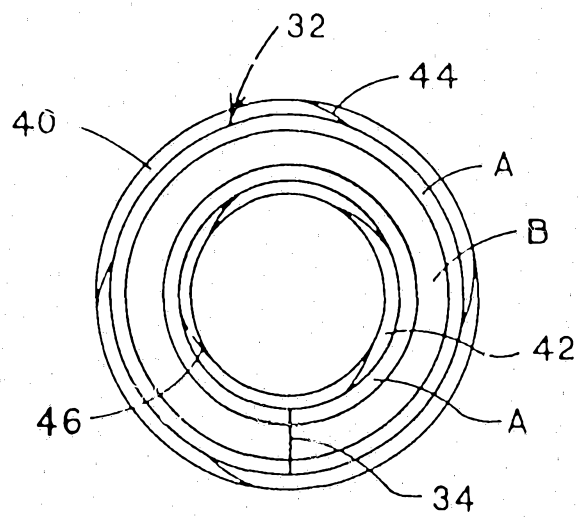


FIG. 8

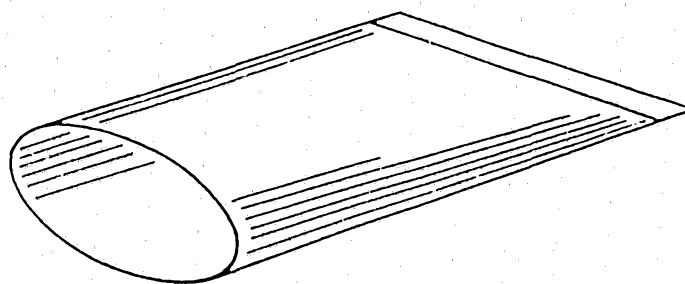


FIG. 9