

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/043073 A1


- (51) International Patent Classification⁷: H04N 7/66, H03M 13/25, H04L 27/02
- (74) Common Representative: KONINKLIJKE PHILIPS ELECTRONICS N.V.; c/o Michael E. Belk, P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).
- (21) International Application Number: PCT/IB2003/004776
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 27 October 2003 (27.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/423,616 4 November 2002 (04.11.2002) US
60/482,952 27 June 2003 (27.06.2003) US
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): BIRRU, Dagnachew [US/US]; P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH,

[Continued on next page]

(54) Title: CONFIGURATION FOR IMPLEMENTING ENHANCED VSB ON THE STUDIO SIDE

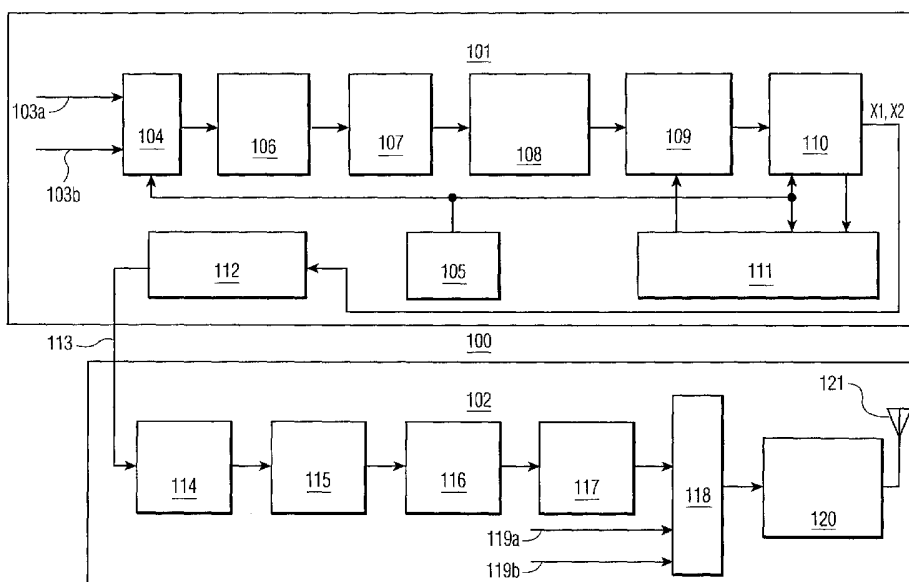

(57) Abstract: Enhancements allowing multiplexing of normal and robust data in wireless digital video transmissions using vestigial sideband modulation are implemented as an enhanced vestigial sideband encoder on the studio side and a standard vestigial sideband modulator at the transmitter. The enhanced encoder conventionally processes multiplexed data into encoded packets, with backwards compatible parity data supplied for normal data, then deinterleaves the processed data, removes a trailing portion from each packet, and derandomizes the remainder before forwarding the processed encoded data as MPEG compliant packets to the standard modulator for VSB modulation and transmission.

WO 2004/043073 A1



CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE,

DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONFIGURATION FOR IMPLEMENTING ENHANCED
VSB ON THE STUDIO SIDE

[0001] This application claims the benefit of the filing date of provisional U.S. patent
5 application serial no. 60/423,616 filed November 4, 2002.

[0002] The present invention relates generally to digital video broadcast and, more particularly, backwards compatible enhanced digital video broadcast.

[0003] Various proposals have been made for backwards-compatible enhancements to the vestigial sideband (VSB) modulation digital video broadcast standards promulgated by the
10 Advanced Television Standards Committee (ATSC). One such proposal allows transmission of robustly coded information multiplexed with standard VSB information. FIGURE 4 is a simplified high-level block diagram of the proposed system. The transmission system 400 includes data inputs 401a and 401b receiving the normal and robust data, respectively. The received normal and robust data are switched by multiplexer 402
15 under the control of control unit 403 based on a field sync signal, then randomized by a conventional VSB data randomizer 404. The randomized data stream is then Reed-Solomon coded by coder 405, and the coded data is processed into packets and interleaved by packet formatter 406 and interleaver 407, after which the interleaved data is trellis coded by encoder 408, also controlled by control unit 403.

[0004] A parity byte generator 409 operates in conjunction with trellis encoder 408 to
20 generate parity data for interleaver 407. The encoded data from trellis encoder 408 is switched by multiplexer 410 with field sync and segment sync signals received on synchronization inputs 411a and 411b, respectively. The resulting data is combined with a pilot signal, modulated and up-converted by signal transmission module 412 and
25 transmitted from antenna 413 over the satellite or terrestrial transmission channel.

[0005] System 400 requires adaptation of the encoder at the transmitter side. If the enhancements proposed could be implemented on the studio side, the encoder at the transmitter side could remain an existing VSB encoder, with only minor changes. There is, therefore, a need in the art for enhancing VSB transmission systems to allow multiplexing
30 of standard and robust data while utilizing an existing encoder on the transmitter side.

[0006] To address the above-discussed deficiencies of the prior art, it is a primary object of the present invention to provide, for use in a wireless digital video broadcast or other

transmission system, enhancements allowing multiplexing of normal and robust data using vestigial sideband modulation that are implemented as an enhanced vestigial sideband encoder on the studio side and a standard vestigial sideband modulator at the transmitter. The enhanced encoder conventionally processes multiplexed data into encoded packets, with backwards compatible parity data supplied for normal data, then deinterleaves the processed data, removes a trailing portion from each packet, and derandomizes the remainder before forwarding the processed encoded data as MPEG compliant packets to the standard modulator for VSB modulation and transmission. Other technical advantages will be readily apparent to one skilled in the art from the following figures, description, and claims.

[0007] Before undertaking the DETAILED DESCRIPTION OF THE INVENTION below, it may be advantageous to set forth definitions of certain words or phrases used throughout this patent document: the terms "include" and "comprise," as well as derivatives thereof, mean inclusion without limitation; the term "or" is inclusive, meaning and/or; the phrases "associated with" and "associated therewith," as well as derivatives thereof, may mean to include, be included within, interconnect with, contain, be contained within, connect to or with, couple to or with, be communicable with, cooperate with, interleave, juxtapose, be proximate to, be bound to or with, have, have a property of, or the like; and the term "controller" means any device, system or part thereof that controls at least one operation, whether such a device is implemented in hardware, firmware, software or some combination of at least two of the same. It should be noted that the functionality associated with any particular controller may be centralized or distributed, whether locally or remotely. Definitions for certain words and phrases are provided throughout this patent document, and those of ordinary skill in the art will understand that such definitions apply in many, if not most, instances to prior as well as future uses of such defined words and phrases.

[0008] For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, wherein like numbers designate like objects, and in which:

[0009] FIGURE 1 a system for enhanced vestigial sideband transmission according to one embodiment of the present invention;

[0010] FIGURE 2 depicts in greater detail a post-processor for use in enhanced vestigial sideband transmission according to one embodiment of the present invention;

[0011] FIGURE 3 is a high level flowchart illustrating a process of backwards compatible multiplexed normal and robust digital video data processing for transmission using a standard vestigial sideband modulator according to one embodiment of the present invention; and

[0012] FIGURE 4 depicts a proposed enhancement to vestigial sideband decoding permitting multiplexing normal and robust data.

[0013] FIGURES 1 through 3, discussed below, and the various embodiments used to describe the principles of the present invention in this patent document are by way of illustration only and should not be construed in any way to limit the scope of the invention. Those skilled in the art will understand that the principles of the present invention may be implemented in any suitably arranged device.

[0014] FIGURE 1 depicts a system for enhanced vestigial sideband transmission according to one embodiment of the present invention. Transmission system 100 includes two basic components: an enhanced VSB encoder 101 and a standard VSB encoder/modulator 102. The enhanced VSB encoder 101, which is implemented on the studio side, includes data inputs 103a and 103b receiving the normal and robust data, respectively. The received normal and robust data are switched by multiplexer 104 under the control of control unit 105 based on the field sync signal, then randomized by data randomizer 106. The randomized data stream is then Reed-Solomon (RS) coded by RS encoder 107, and the coded data is processed into packets and interleaved by packet formatter 108 and interleaver 109. The interleaved data is trellis coded by encoder 110, also controlled by control unit 105. Parity byte generator 111 operates in conjunction with trellis encoder 110 to generate parity information for use by interleaver 109.

[0015] Transmission system 100 includes a post-processor 112 receiving the trellis coded data for further processing as described in further detail below. The output of post-processor 112 is Motion Pictures Expert Group (MPEG) compliant packets transmitted at approximately 19.3 mega-bits per second (Mb/s) over any convenient link 113, such as a Studio-to-Transmitter Link (STL), to standard VSB encoder 102 implemented at the transmitter.

[0016] Within standard VSB encoder 102, received packets are sequentially processed by data randomizer 114, RS encoder 115, interleaver 116, and trellis encoder 117. The trellis-encoded data is switched by multiplexer 118 with the field sync and segment sync signals received on synchronization inputs 119a and 119b, respectively, with the resulting
5 multiplexed data combined with a pilot signal, modulated, and up-converted to the radio frequency (RF) by signal transmission module 120 and then transmitted from antenna 121 over a wireless communications channel to a receiver (not shown).

[0017] The processing from multiplexer 104 through trellis encoder 110 in transmission system 100 is identical to the corresponding processing performed in system 400 of
10 FIGURE 4. Similarly, the processing performed by standard VSB encoder/modulator 102 is identical to conventional processing performed in accordance with the ATSC VSB standard. However, minor modification of the overall processing is required. Specifically, the trellis encoders 110 and 117, the data randomizer 114 within the standard VSB encoder 102, and the main interleaver 109 and 116 in both encoders 101 and 102 need to be
15 synchronized. In addition, parameter signaling data needs to be inserted in the reserved bits of the field sync signal, and the parameter bits and synchronization information need to be transmitted from the studio to the transmitter via some convenient link.

[0018] FIGURE 2 depicts in greater detail a post-processor for use in enhanced vestigial sideband transmission according to one embodiment of the present invention. Post-processor 112 converts trellis encoded data into MPEG-2 compliant packets on the studio
20 side. Post-processor 112, receives the bit X1, X2 output by trellis encoder 110 with the enhanced VSB encoder 101. The processing performed by post-processor 112 is similar to the forward error correction (FEC) or backend portion of a standard VSB decoder, with some modification. Specifically, the post-processor 112 does not include a trellis decoder or Reed Solomon decoder. However, post-processor 112 includes all remaining blocks of
25 a standard VSB decoder, including a bit-to-byte converter and trellis deinterleaver 200 converting the output bits X1, X2 from trellis encoder 110 into bytes and deinterleaving and a (main) deinterleaver 201 performing standard deinterleaving on the data stream, as well as a de-randomizer 202.

[0019] The output of deinterleaver 201 contains 207 bytes per packet. Accordingly, unit
30 203 within post-processor 112 removes the 20 trailing bytes of each packet to obtain 187 bytes. For the normal data stream packets, the 20 removed bytes correspond to Reed

Solomon parity bytes. For the robust data stream packets, the 20 removed bytes contain actual encoded data. However, the removed 20 bytes of the encoded robust data stream packets is recovered by the Reed Solomon encoder on the transmitter side.

[0020] The 187 byte packets are de-randomized by a standard de-randomizer 202. Before transmission, an MPEG sync byte may be inserted to obtain 188 byte packets, using synchronization identical to that with a standard VSB backend unit.

[0021] FIGURE 3 is a high level flowchart illustrating a process of backwards compatible multiplexed normal and robust digital video data processing for transmission using a standard vestigial sideband modulator according to one embodiment of the present invention. The process 300 begins with initiation of multiplexed normal and robust digital video data transmission (step 301) utilizing an enhanced VSB encoder implemented at a studio. Normal and robust digital video data is multiplexed (step 302), alternately switching (from optional buffers) sufficient quantities of each type of data for formation of an MPEG-2 compliant packet so that alternate packets contain normal digital video data with intervening packets containing robust digital video data. Other patterns of packets may also be employed (e.g., every third packet contains robust data, etc.).

[0022] The switched data is processed according to conventional VSB encoding (step 303), including randomizing, Reed Solomon encoding, interleaving and packet formatting, trellis interleaving and trellis encoding the data. Parity data is generated and inserted in packets containing normal digital video data (step 304) for backwards compatibility. The packets containing encoded digital video data are then processed in preparation for transmission using a standard VSB modulator (step 305). Such processing includes: bit-to-byte conversion and trellis deinterleaving; "main" deinterleaving; removal of a trailing portion of each packet sufficient to form an MPEG compliant packet (i.e., removing 20 bytes in the exemplary embodiment, to form a 188 byte packet after insertion of a sync byte); and derandomizing. As noted above, the bytes removed are parity in packets containing normal data and encoded digital video information (recovered by the Reed Solomon encoder on the transmitter side) in packets containing robust data. In addition, parameter signaling bits are inserted in the reserved bits of the field sync and MPEG sync bytes are inserted in the packets.

[0023] The processed packets are then forwarded to a standard VSB modulator implemented at a transmitter (step 306), and processed according to standard VSB

modulation (step 307), including randomizing, Reed Solomon encoding (which recovers the robust data removed from each packet), interleaving and trellis encoding, then pilot insertion, VSB modulation and RF up-conversion. The process of steps 302-307 continues repetitively as long as digital video data remains to be transmitted, then becomes idle (step 5 308) when all normal and robust data has been transmitted.

[0024] The present invention allows normal and robust data to be multiplexed for backwards-compatible concurrent VSB transmission while implementing the enhancements at the studio (e.g. for a network news or other broadcast program) so that a standard VSB modulator at the transmitter (e.g., for a network affiliate station).

10 [0025] It is important to note that while the present invention has been described in the context of a fully functional system, those skilled in the art will appreciate that at least portions of the mechanism of the present invention are capable of being distributed in the form of a machine usable medium containing instructions in a variety of forms, and that the present invention applies equally regardless of the particular type of signal bearing 15 medium utilized to actually carry out the distribution. Examples of machine usable mediums include: nonvolatile, hard-coded type mediums such as read only memories (ROMs) or erasable, electrically programmable read only memories (EEPROMs), recordable type mediums such as floppy disks, hard disk drives and compact disc read only memories (CD-ROMs) or digital versatile discs (DVDs), and transmission type mediums 20 such as digital and analog communication links and frames or packets.

[0026] Although the present invention has been described in detail, those skilled in the art will understand that various changes, substitutions, variations, enhancements, nuances, gradations, lesser forms, alterations, revisions, improvements and knock-offs of the invention disclosed herein may be made without departing from the spirit and scope of the 25 invention in its broadest form.

CLAIMS:

1. A system 100 for multiplexed transmission of normal and robust digital
5 video data, comprising:
a multiplexer 104 switching between normal and robust data inputs 103a-103b;
one or more units 106-110 randomizing, formatting, interleaving and encoding data
from the multiplexer 104 into encoded data packets; and
a processing unit 112 deinterleaving encoded data packets produced by the one or
10 more units 106-110, removing a trailing portion from each encoded data packet, and
derandomizing a remaining portion of each encoded data packet.
2. The system 100 according to claim 1, wherein the multiplexer 104, the one
or more units 106-110, and the processing unit 112 form a portion of an enhanced vestigial
15 sideband (VSB) encoder 101, the one or more units 106-110 further comprising a data
randomizer 106, a Reed Solomon encoder 107, an interleaver and packet formatter 108, a
main interleaver 109 and a trellis encoder 110 each operating in sequence on data from the
multiplexer 104 to generate the encoded data packets.
- 20 3. The system 100 according to claim 2, further comprising:
a parity byte generator 111 operating in conjunction with the trellis encoder 110 to
generate parity bytes for normal data switched by the multiplexer 104.
4. The system 100 according to claim 1, wherein the processing unit 112
25 removes the trailing portion equal to a number of bytes required to form Motion Picture
Expert Group (MPEG) compliant packets.
5. The system 100 according to claim 4, wherein the removed trailing portion
comprises parity bytes for data packets containing normal data and encoded data for data
30 packets containing robust data.

6. The system 100 according to claim 1, wherein the processing unit 112 further comprises:

a bit-to-byte converter and trellis deinterleaver 200 and a main deinterleaver 201 operating sequentially on data packets received from the one or more units 106-110; and

5 a derandomizer 202 operating on data packets after removal of the trailing portion.

7. The system 100 according to claim 2, wherein the processing unit 112 forwards packets generated by the enhanced vestigial sideband encoder 101 to a standard vestigial sideband modulator 102.

10

8. The system 100 according to claim 7, wherein the standard vestigial sideband modulator 102 further comprises:

a data randomizer 114, a Reed Solomon encoder 115, an interleaver 116 and a trellis encoder 117 operating sequentially on data packets received from the enhanced vestigial sideband encoder 101;

15

a multiplexer 104 switching data packets generated by the standard vestigial sideband modulator 102 with synchronization signals 119a-119b; and

an antenna 121 transmitting signals corresponding to the switched data packets and synchronization signals.

20

9. A wireless transmission system including the system 100 according to claim 8, the wireless transmitter further comprising:

a data link 113 coupling the enhanced vestigial sideband encoder 101 and the standard vestigial sideband modulator 102,

25

wherein the antenna 121 transmits the signals over a wireless communications channel to a receiver.

10. The wireless transmission system according to claim 9, wherein the enhanced vestigial sideband encoder 101 is implemented within a studio and the standard vestigial sideband modulator 102 is implemented with a transmitter.

30

11. A method 300 of multiplexed transmission of normal and robust digital video data, comprising:
- switching between normal and robust data inputs 103a-103b;
 - randomizing, formatting, interleaving and encoding data from the normal and robust data inputs 103a-103b into encoded data packets; and
 - processing the encoded data packets by deinterleaving the encoded data packets, removing a trailing portion from each encoded data packet, and derandomizing a remaining portion of each encoded data packet.
12. The method 300 according to claim 11, wherein the switching, randomizing and processing are performed within a portion of an enhanced vestigial sideband (VSB) encoder 101 including a data randomizer 106, a Reed Solomon encoder 107, an interleaver and packet formatter 108, a main interleaver 109 and a trellis encoder 110 each operating in sequence on data from the normal and robust data inputs 103a-103b to generate the encoded data packets.
13. The method 300 according to claim 12, further comprising:
generating parity bytes for normal data switched from the normal data input 103a.
14. The method 300 according to claim 11, further comprising:
removing the trailing portion equal to a number of bytes required to form Motion Picture Expert Group (MPEG) compliant packets.
15. The method 300 according to claim 14, wherein the removed trailing portion comprises parity bytes for data packets containing normal data and encoded data for data packets containing robust data.
16. The method 300 according to claim 11, further comprising:
bit-to-byte converting and deinterleaving data packets received from the one or more units; and
derandomizing data packets after removal of the trailing portion.

17. The method 300 according to claim 12, further comprising:
forwarding packets generated by the enhanced vestigial sideband encoder 101 to a standard vestigial sideband modulator 102.
- 5 18. The method 300 according to claim 17, further comprising:
randomizing, Reed Solomon encoding, interleaving and trellis encoding data packets received at the standard vestigial sideband modulator 102 from the enhanced vestigial sideband encoder 101;
switching data packets generated by the standard vestigial sideband modulator 102
10 with synchronization signals; and
transmitting signals corresponding to the switched data packets and synchronization signals.
19. A system for multiplexed transmission of normal and robust digital video
15 data, comprising:
an enhanced vestigial sideband (VSB) encoder 101 having normal and robust data inputs 103a-103b and including:
a multiplexer 104 switching between the normal and robust data inputs
20 103a-103b;
a data randomizer 106, a Reed Solomon encoder 107, an interleaver and packet formatter 108, a main interleaver 109 and a trellis encoder 110 each operating in sequence on data from the multiplexer 104 to randomize, format, interleave and encode data from the multiplexer 104 and generate the encoded data packets; and
25 a processing unit 112 deinterleaving encoded data packets produced by the data randomizer 106, Reed Solomon encoder 107, interleaver and packet formatter 108, main interleaver 109 and trellis encoder 110, removing a trailing portion from each encoded data packet, and derandomizing a remaining portion of each encoded data packet; and
30 a standard vestigial sideband modulator 102 receiving data packets from the enhanced vestigial sideband encoder 101 and including:

a data randomizer 114, a Reed Solomon encoder 115, an interleaver 116 and a trellis encoder 117 operating sequentially on data packets received from the enhanced vestigial sideband encoder 101;

5 a multiplexer 118 switching data packets generated by the data randomizer 114, Reed Solomon encoder 115, interleaver 116 and trellis encoder 117 with synchronization signals 119a-119b; and

an antenna 121 transmitting signals corresponding to the switched data packets and synchronization signals.

10 20. The system according to claim 19, wherein the enhanced vestigial sideband encoder 101 is implemented within a studio and the standard vestigial sideband modulator 102 is implemented with a transmitter.

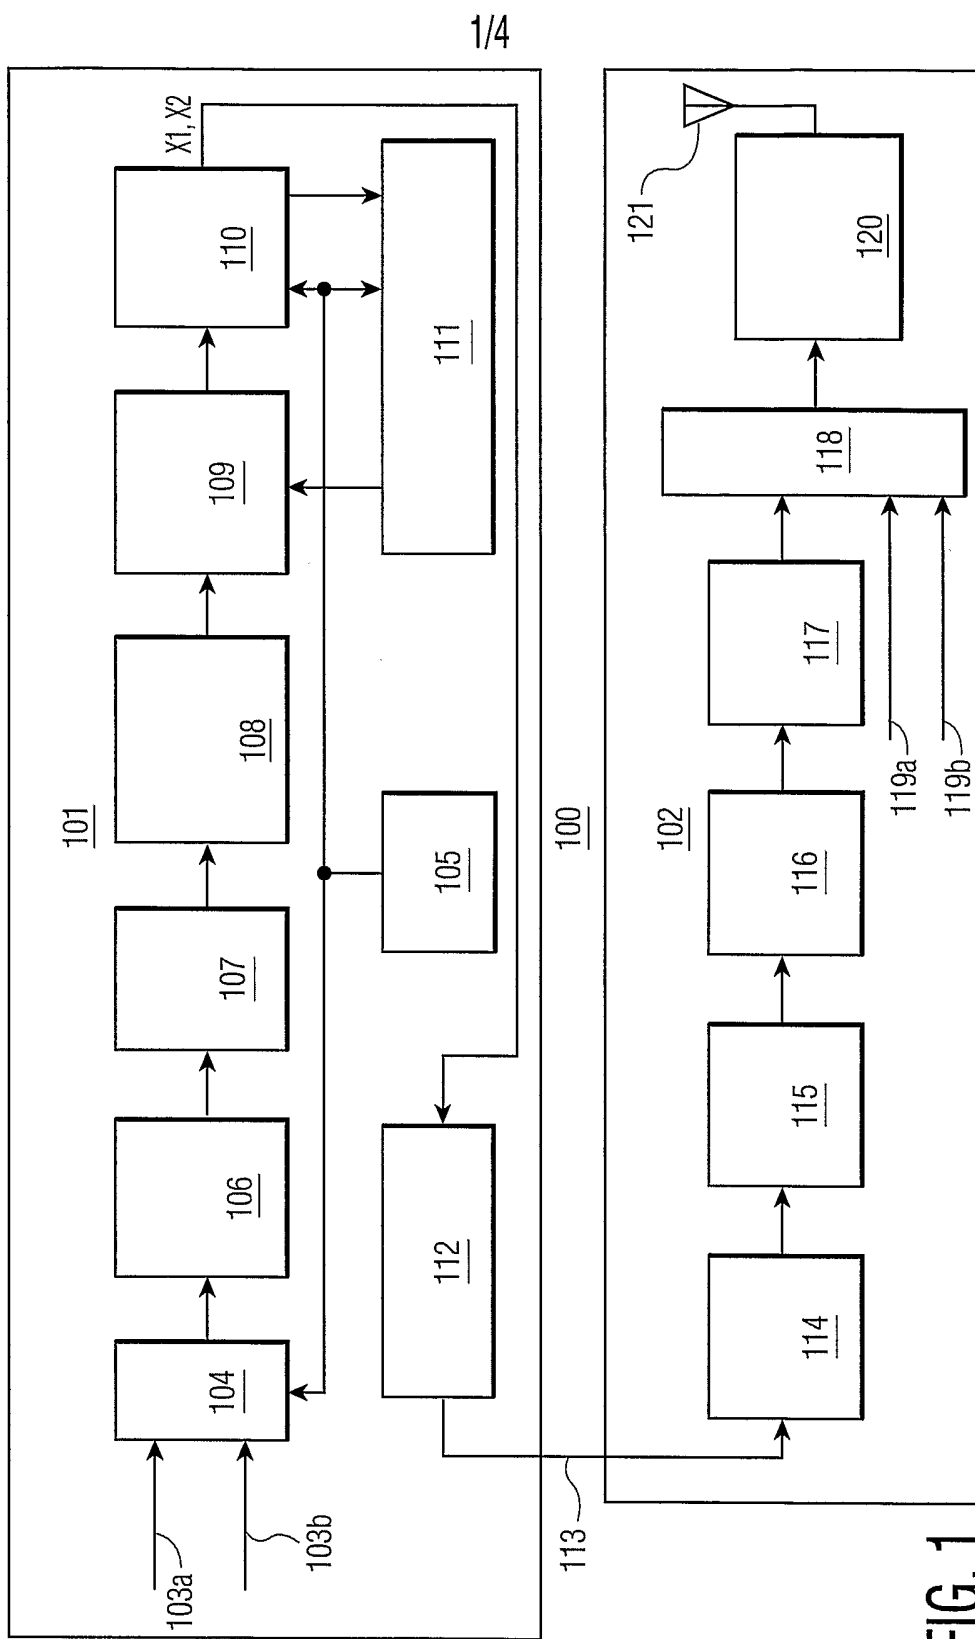


FIG. 1

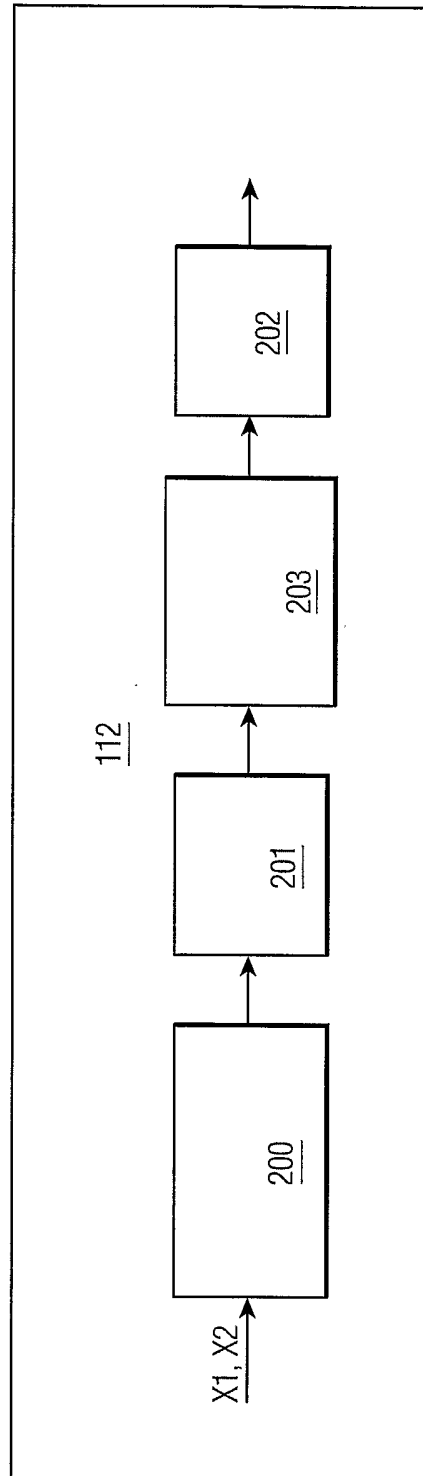


FIG. 2

3/4

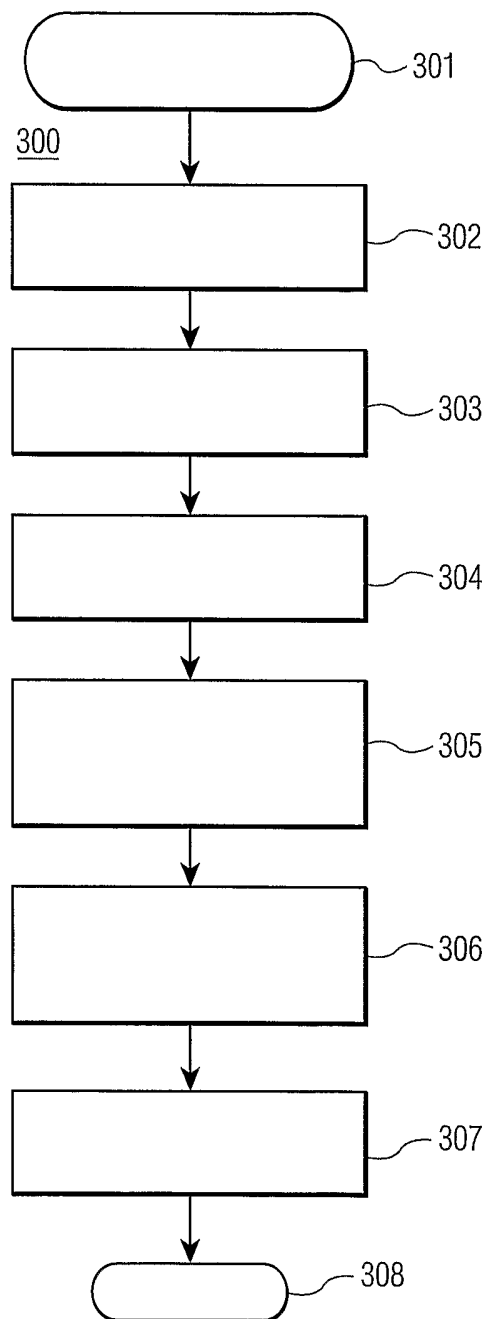


FIG. 3

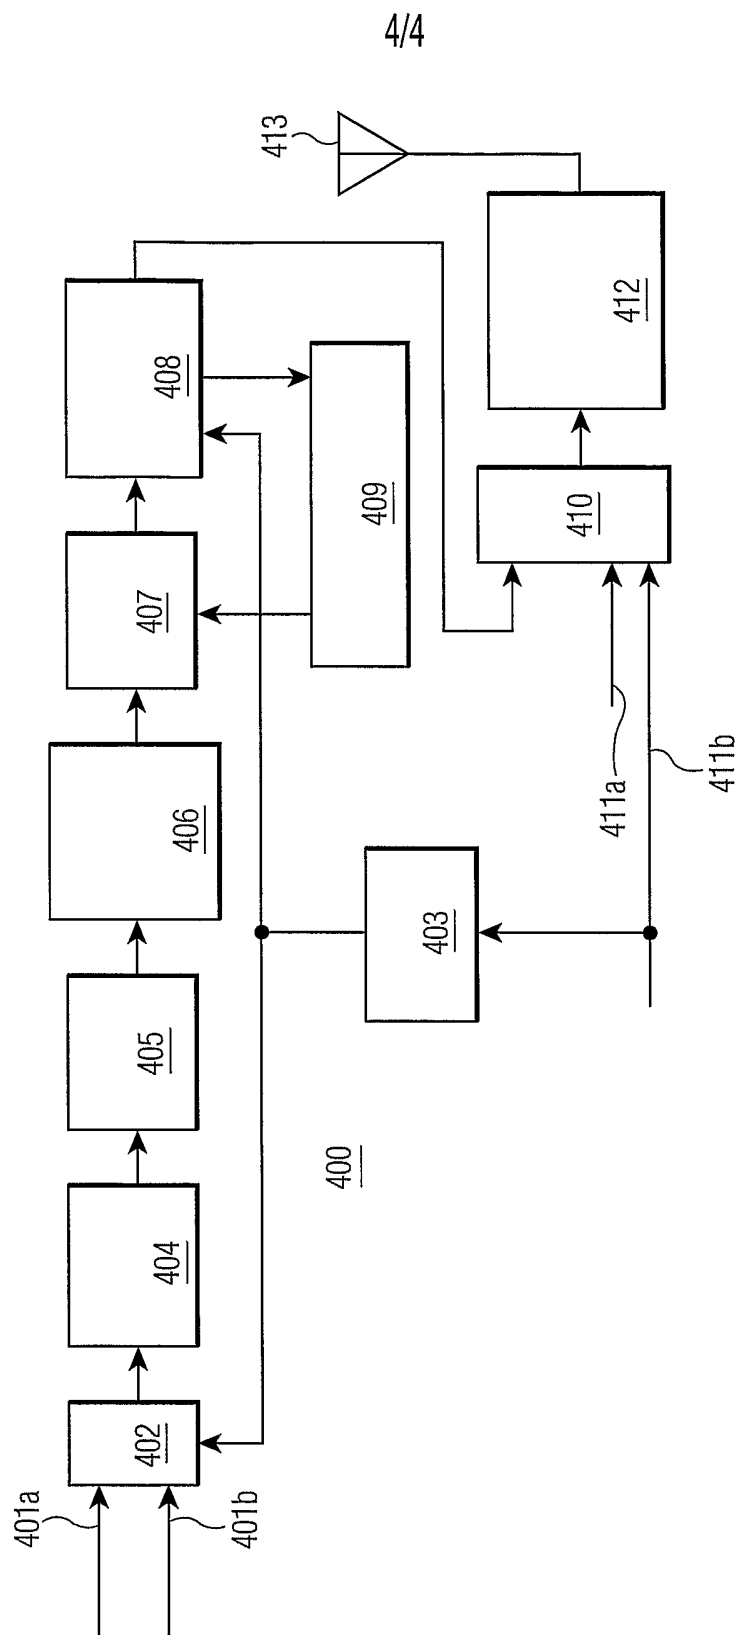


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 03/04776

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H04N7/66 H03M13/25 H04L27/02				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 H04N H03M H04L				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
P, X	US 2002/186780 A1 (GU YOUNG MO ET AL) 12 December 2002 (2002-12-12) abstract; figure 11 page 1, paragraph 5 -page 2, paragraph 15 page 5, paragraph 55 -page 5, paragraph 60 ---	1-20		
X	"ATSC standard: Digital Television Standard, Revision B, with Amendment 1 ANNEX C: SERVICE MULTIPLEX AND TRANSPORT SYSTEM CHARACTERISTICS (NORMATIVE)" ATSC STANDARD, 7 August 2001 (2001-08-07), XP002220868 Retrieved from the Internet: <URL:www.atsc.org/standards> 'retrieved on 2002-11-14! ---	1-6, 11-16		
A	page 50, line 1 -page 51, last line --- -/--	7-16		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.				
* Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family </td> </tr> </table>			*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family			
Date of the actual completion of the international search		Date of mailing of the international search report		
21 January 2004		11/02/2004		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Schoeyer, M		

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB03/04776

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/126222 A1 (GU YOUNG MO ET AL) 12 September 2002 (2002-09-12)	1-6, 11-16
A	page 1, paragraph 7 -page 2, paragraph 27; figures 3,8 ---	7-10, 17-20
A	WO 02 03678 A (HULYALKAR SAMIR N ;STROLLE CHRISTOPHER H (US); HAOSONG FU (US); SC) 10 January 2002 (2002-01-10) abstract page 1, line 1 -page 3, last paragraph page 5, paragraph 3 -page 5, last paragraph -----	1-20

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB⁰³/04776

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002186780 A1	12-12-2002	KR 2002094426 A	18-12-2002
		CN 1391382 A	15-01-2003
US 2002126222 A1	12-09-2002	KR 2002062076 A	25-07-2002
		BR 0109363 A	10-12-2002
		CA 2403133 A1	25-07-2002
		CN 1418433 T	14-05-2003
		WO 02058387 A1	25-07-2002
WO 0203678 A	10-01-2002	AU 7726201 A	14-01-2002
		BR 0112062 A	13-05-2003
		CA 2413229 A1	10-01-2002
		WO 0203678 A2	10-01-2002