




(86) Date de dépôt PCT/PCT Filing Date: 2010/11/10
(87) Date publication PCT/PCT Publication Date: 2011/05/19
(45) Date de délivrance/Issue Date: 2014/10/21
(85) Entrée phase nationale/National Entry: 2012/03/30
(86) N° demande PCT/PCT Application No.: CA 2010/001784
(87) N° publication PCT/PCT Publication No.: 2011/057398
(30) Priorité/Priority: 2009/11/13 (EP09175974.6)

(51) Cl.Int./Int.Cl. *H01Q 9/42* (2006.01),
H01Q 1/38 (2006.01), *H04B 7/12* (2006.01),
H04W 88/02 (2009.01)
(72) Inventeurs/Inventors:
RAO, QINJIANG, CA;
WANG, DONG, CA
(73) Propriétaire/Owner:
BLACKBERRY LIMITED, CA
(74) Agent: MOFFAT & CO.

(54) Titre : ANTENNE POUR COMMUNICATION MIMO MULTIMODE DANS DES DISPOSITIFS A MAIN
(54) Title: ANTENNA FOR MULTI MODE MIMO COMMUNICATION IN HANDHELD DEVICES

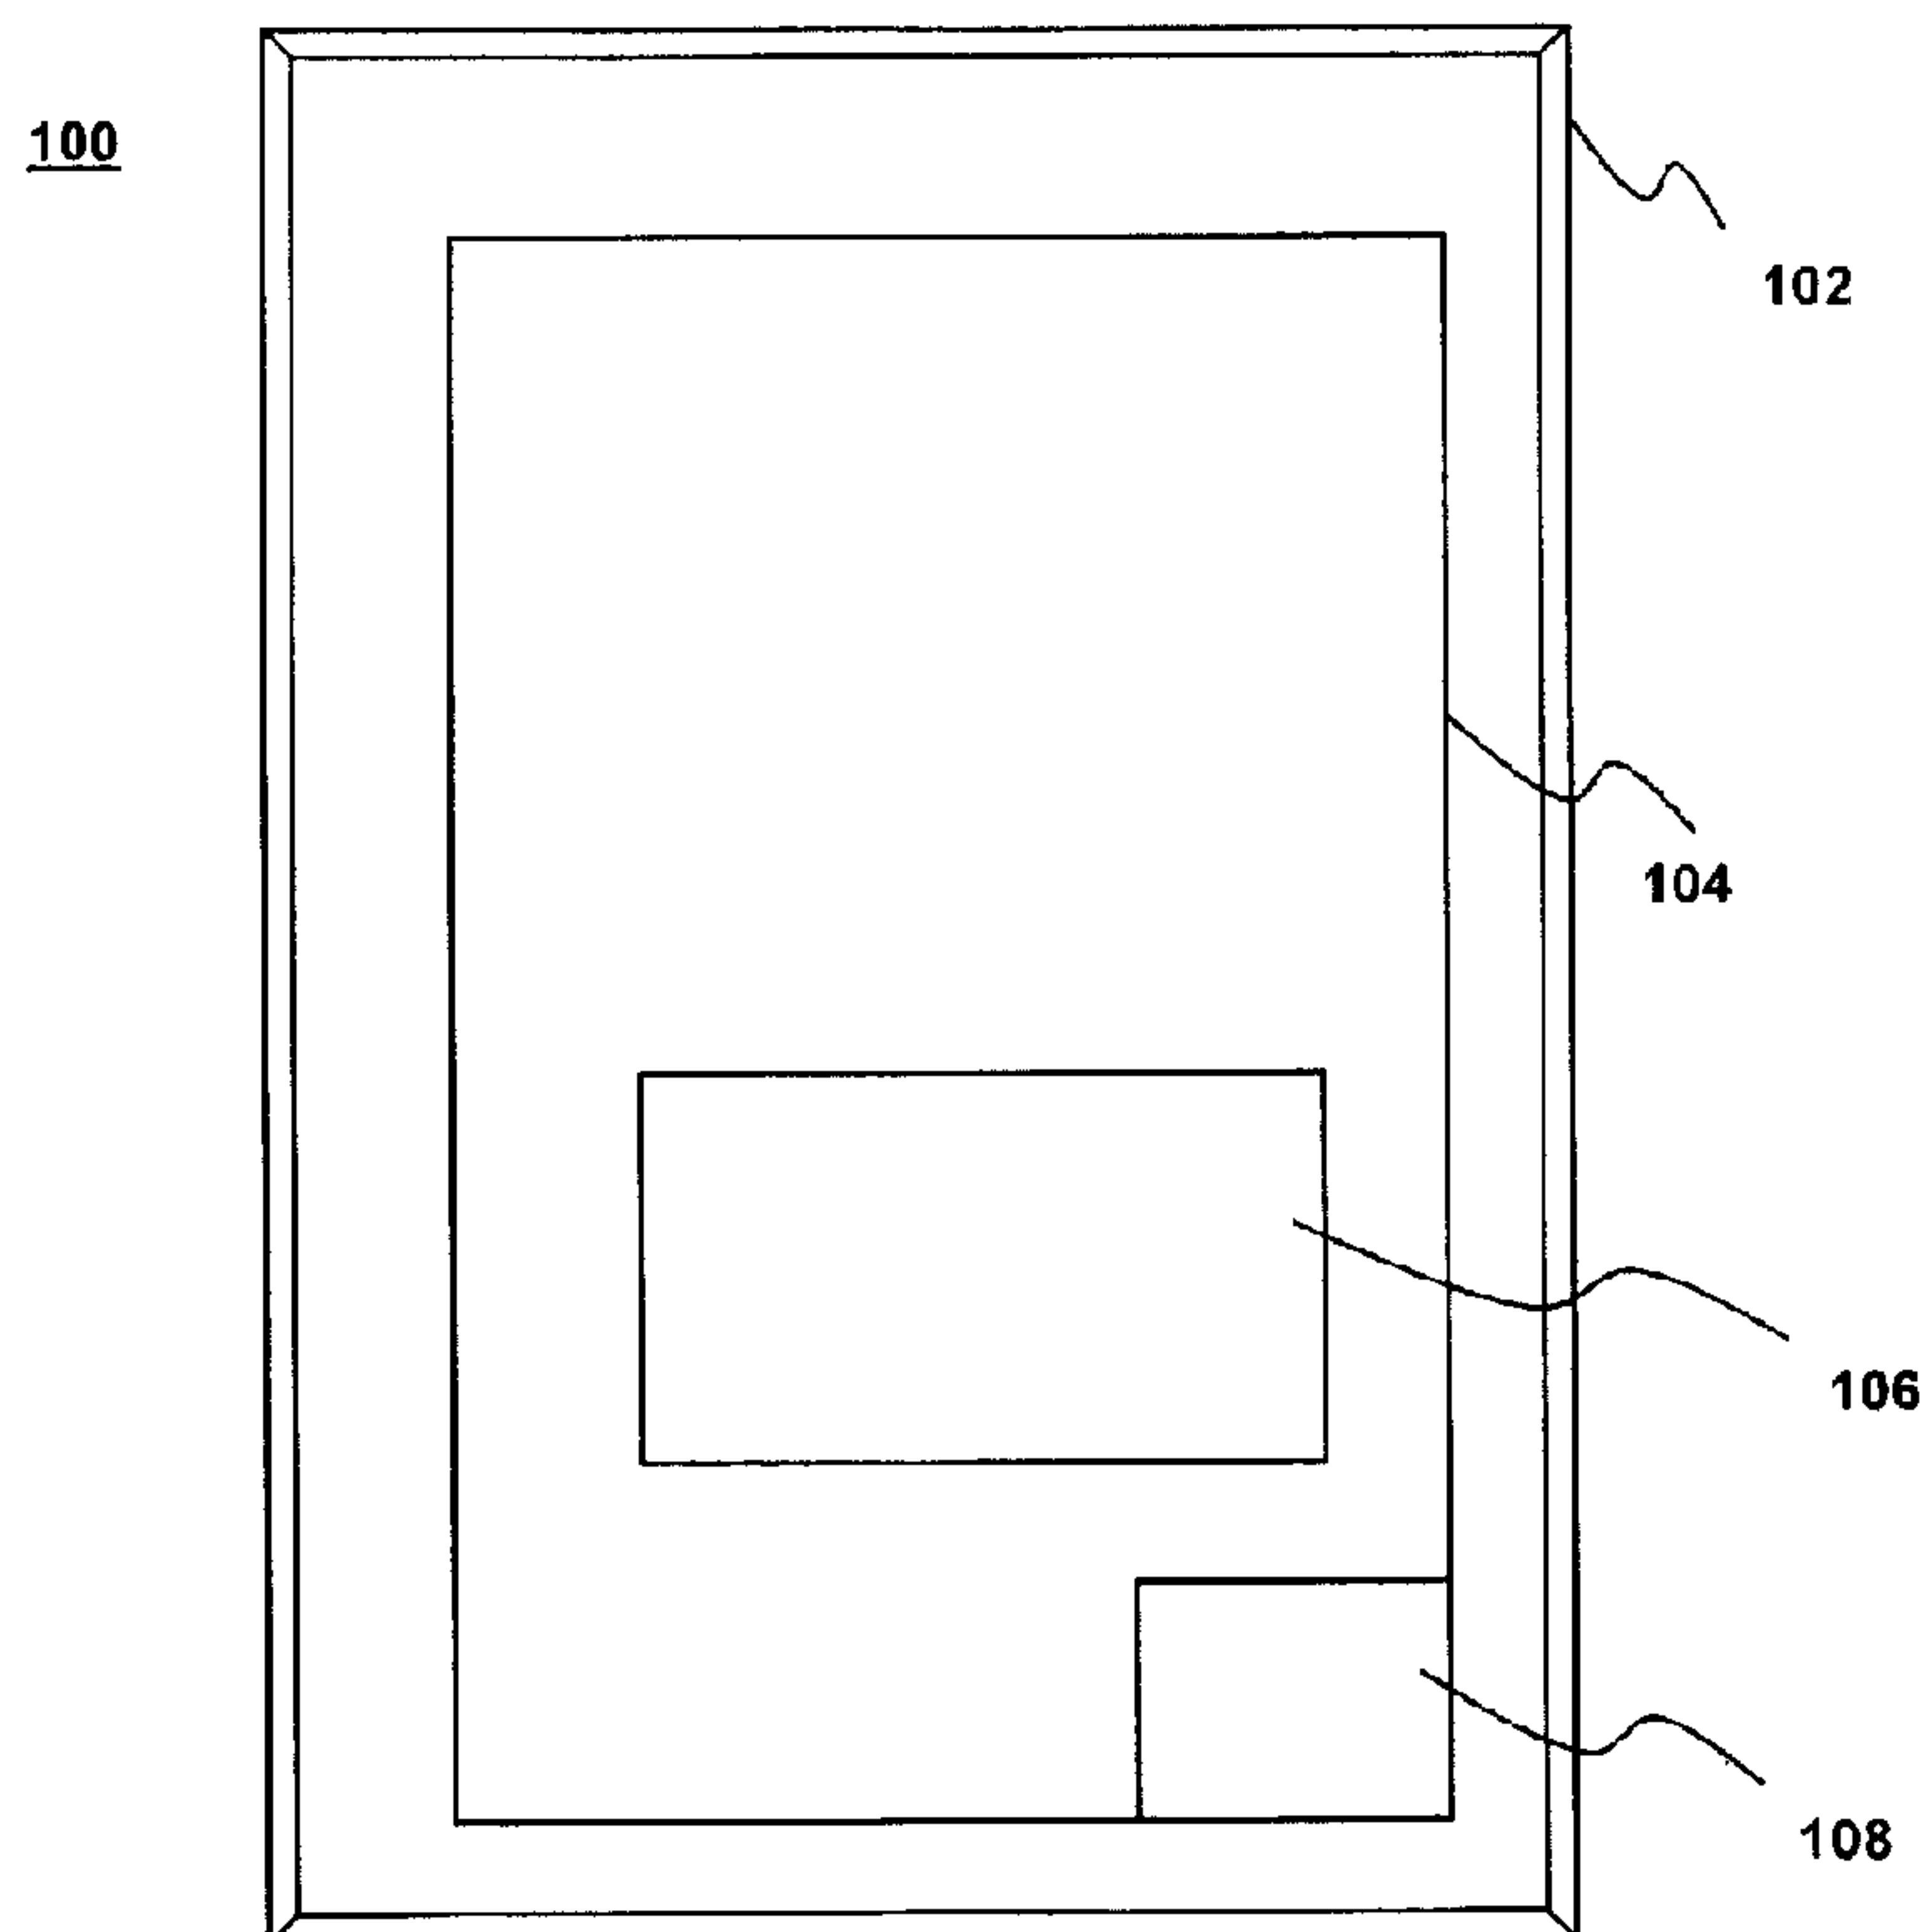

(57) **Abrégé/Abstract:**

A multi-band antenna comprising a dielectric substrate, a ground plane formed on a first area of the dielectric substrate, a radiation part arranged in a second area of the dielectric substrate where the ground surface is not formed, a feed section formed of a metallic trace and having one end connected to the radiation part and an opposite end disposed near an edge of the ground plane for forming a feed point and the radiation part having a pair of monopole antenna elements formed of conductive metallic traces; a first monopole antenna element for radiating at a first resonant frequency, and a second monopole antenna element for radiating at a second resonant frequency and the conductive metallic traces being folded to form a three dimensional structure, with at least a portion of said first monopole spaced from a plane of the substrate and said second monopole.

ABSTRACT

A multi-band antenna comprising a dielectric substrate, a ground plane formed on a first area of the dielectric substrate, a radiation part arranged in a second area of the dielectric substrate where the ground surface is not formed, a feed section formed of a metallic trace and having one end connected to the radiation part and an opposite end disposed near an edge of the ground plane for forming a feed point and the radiation part having a pair of monopole antenna elements formed of conductive metallic traces; a first monopole antenna element for radiating at a first resonant frequency, and a second monopole antenna element for radiating at a second resonant frequency and the conductive metallic traces being folded to form a three dimensional structure, with at least a portion of said first monopole spaced from a plane of the substrate and said second monopole.

ANTENNA FOR MULTI MODE MIMO COMMUNICATION IN HANDHELD DEVICES

FIELD OF THE DISCLOSURE

[0001] The present invention relates to the field of communications systems, and, more particularly, to antennas for mobile wireless communications devices and related methods.

BACKGROUND

[0002] Mobile devices are being required to support multiple applications, such as GSM, PSC, UMTS, WLAN, Wibro (Wireless broadband), and Bluetooth, and LTE, which in turn require multiple antennas, since one antenna cannot typically cover the bandwidth requirements of the multiple applications due to the physical limitations of an antenna described in "Physical Limitations of Antennas," IEEE Transactions on Antennas and Propagation, vol. 51, no. 8, pgs. 2116-2123, 2003. As a result, multiple antennas must now share the already limited space within the mobile device.

[0003] Furthermore, techniques such as multiple-input multiple-out (MIMO) have emerged, which significantly increase the performance of HSPA (high speed packet access) and LTE (long term evaluation) networks. This is usually accomplished by using multiple antennas arranged to have low correlation between two or more unique radio signals. In large devices, where space is less limited, this is easily accomplished by using spatial diversity (distance between antennas), or somehow by pattern diversity (difference between antenna aiming directions), and polarization diversity together. Unfortunately, the size of mobile wireless communications devices (e.g., cellular devices) continue to decrease and so too does the allowable space for the device antenna. As a result, having multiple antennas in a close proximity poses significant coupling and mode isolation problems; furthermore, the signals received by each of the antennas may be undesirably correlated. This noticeably disrupts MIMO performance.

[0004] Thus it can be seen that designers of antennas for mobile devices face significant challenges, particularly wherein the antennas may be capable of covering as many bands as possible while being small in size and still having a high performance.

[0005] One form of antenna commonly used in mobile devices is the monopole antenna. Compared to PIFA or IFA, a monopole can easier achieve large bandwidth because they may be arranged to radiate at two or more resonant frequencies (from its fundamental mode, second order and higher modes) Since a monopoles inherent dual mode characteristic makes it easy to achieve a frequency ratio of two-to-one of its upper and lower frequency band.

[0006] However using a single radiator for multi-order modes poses a difficulty, particularly if specific frequency bands are to be adjusted independently. Additionally, in a single radiator if one of the operating bands is required to be relatively wide the monopole may not cover all bands, such as GSM 900 (880 to 960 MHz) at a lower band and GSM1880/1900 and UMTS2100 (1710 to 2170 MHz) together at an upper band, unless additional parasitic branches are used to enhance the bandwidth and adjust the frequency ratio. However this introduces additional volume and potential higher-mode coupling among radiation elements.

[0007] Another disadvantage is that since a monopole is typically a quarter-wavelength of the fundamental mode, the size of the antenna is increased when it is designed to operate at lower resonant frequency bands.

[0008] Accordingly, it is desirable to have a monopole that may be arranged in a limited space.

SUMMARY

[0009] In accordance with a first aspect of the present matter there is provided a multi-band antenna comprising a dielectric substrate, a ground plane formed on a first area of the dielectric substrate, a radiation part arranged on a second area of the dielectric substrate where the ground surface is not formed, a feed section formed of a metallic trace and having one end connected to the radiation part and an opposite end disposed near an edge of the ground plane for forming a

feed point. The radiation part having a pair of monopole antenna elements formed of conductive metallic traces; a first monopole for radiating at a first resonant frequency, and a second monopole for radiating at a second resonant frequency and the conductive metallic traces being folded to form a three dimensional structure, with at least a portion of the first monopole spaced from a plane of the substrate and the second monopole.

[0010] There is further provided a patch element coupled to the second monopole and arranged in a spaced relationship to the first monopole, a width of the patch element for determining the resonant frequency of the second monopole antenna element, independently of the resonant frequency of the first monopole.

[0011] There is further provided a dielectric shell defining a generally rectangular shape having opposing top and bottom faces, opposing first and second end faces and opposing first and second side faces, the bottom face of the dielectric shell positioned in the second area of the substrate and the three dimensional structure of the metallic trace being formed around the dielectric shell.

[0012] In accordance with a further aspect there is provided a mobile wireless communication device comprising a housing, a dielectric substrate carried within the housing, wireless communication circuitry carried by the substrate within said housing, and a multi-band antenna coupled to the wireless communication circuitry and comprising a ground plane formed on a first area of the dielectric substrate, a radiation part arranged in a second area of the dielectric substrate where the ground surface is not formed, a feed section formed of a metallic trace and having one end connected to the radiation part and an opposite end disposed near an edge of the ground plane for forming a feed point; and the radiation part formed of conductive metallic traces; a first monopole for radiating at a first resonant frequency, and a second monopole for radiating at a second resonant frequency and the conductive metallic traces being folded to form a three dimensional structure, with at least a portion of the first monopole spaced from a plane of the substrate and the second monopole.

[0013] In accordance with a still further aspect there is provided a mobile wireless communication device comprising a housing, a dielectric substrate carried within said housing, wireless communication circuitry carried by the substrate, a ground plane formed on a first area of the dielectric substrate, a plurality multi-band antennas arranged in a second area of the dielectric substrate where the ground surface is not formed and coupled to said wireless communication circuitry, each of the multi-band antennas having a pair of monopole radiating elements including a patch element associated with respective ones of the multi-band antennas, a width of the patch element for determining a resonant frequency of its associated antenna.

[0014] There is further provided in the still further aspect a stub section coupled to the ground plane and extending into the second area, a stub size being selected for determining an operating frequency and isolation of the multi-band antennas.

[0015] In accordance with a still further aspect there is provided a method for implementing a multi-band antenna for use in a mobile device, the method comprising forming a ground plane in a first area of a dielectric substrate, the dielectric substrate for positioning within a housing of the mobile device; arranging a plurality of multi-band antennas in a second area of the dielectric substrate where the ground surface is not formed, the antennas for coupling to wireless communication circuitry, each of the multi-band antennas having a pair of monopole radiating elements including a patch element associated with respective ones of the multi-band antennas; and determining resonant frequency of respective antennas by adjusting a width of the patch element associated with that antenna.

[0016] In accordance with a still further aspect the method includes selecting a size of a stub section for extending the ground plane into the second area, for determining an operating frequency and isolation of the multi-band antennas.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The present disclosure will be better understood with reference to drawings in which:

FIG. 1 shows a schematic block diagram of a mobile wireless communications device in accordance with an exemplary embodiment including a monopole antenna;

FIGs. 2a-e show schematic diagrams of various aspects of an implementation of a multi-band three-dimensional (3D) folded monopole antenna assembly, according to an embodiment of the present matter;

FIG. 3 shows an unfolded two-dimensional (2D) view of the antenna of FIG. 2;

FIG. 4 shows a graph of a comparison of simulated reflection coefficients for the antenna of FIG. 2;

FIG. 5 shows a graph of reflection coefficients for the antenna of FIG. 2 for different patch widths;

FIG. 6 shows a graph of measured and simulated reflection coefficients for the antenna of FIG. 2;

FIGs. 7a-7d shows graphs of measured far-field radiation patterns at respective resonant frequencies of 900 MHz, 1800 MHz, 2.5 GHz and 5.5 GHz for the antenna of FIG. 2;

FIGs. 8a-b show schematic diagrams of respective top and bottom perspective views of an antenna according to another embodiment of the present matter;

FIGs. 9a-c show schematic diagrams of multi-port antenna configurations according to further embodiments of the present matter;

FIG. 10 shows graphs of measured S parameters, for the two-port antenna of FIG. 9a;

FIGs. 11a-b show schematic diagrams of various ground plane stub sizes for the two-port antenna of FIG. 9a;

FIGs. 12a-c show plots of measured S parameters, for the antenna configuration of FIG. 11a;

FIGs. 13a-c show plots of measured S parameters, for the antenna configuration of FIG. 11b;

FIGs. 14a-c show plots of measured S parameters, for the antenna configuration of FIG. 11c; and

FIG. 15 is a schematic diagram of components of a hand-held mobile wireless communications device.

DETAILED DESCRIPTION

[0018] In the following description like numerals refer to like structures illustrated in the drawings. For clarity a set of orthogonal axes **x-y-z** are shown in the drawings, where appropriate, to provide a frame of reference for describing the relative arrangement of the structures in the various drawings. The terms horizontal and vertical where used are for convenience of describing structures oriented with respect to the **x-y** plane and the **y-z** plane respectively, and are not meant to be limiting.

[0019] The present matter describes multi-band three-dimensional (3D) folded monopole antennas for use in mobile devices. More particularly the present matter describes a small compact multi-radiation element antenna that exhibits high mode isolation allowing it to cover several communication application frequency bands such as GSM 1900, UMTS2100, GPS, WALN in the 2GHz and higher range and the lower bands such as 1GHz and wherein the operational frequency bands of antenna elements can be adjusted independently i.e. the upper bands can be adjusted independently of the lower bands. In other words the high mode isolation allows the antenna to function at different operation frequencies.

[0020] Furthermore, the multi-radiation element antenna also exhibits high isolation between the radiation elements. In other words there are low couplings (or power transferred from one element to another) at the operation frequencies of the antenna.

[0021] Furthermore the present matter describes a multi antenna array comprised of two or more of the multi-radiation element antennas, wherein the antennas of the array also exhibit high isolation.

[0022] Referring to **FIG. 1** there is shown a mobile wireless communications device **100** including a housing **102**, a substrate **104** carried within the housing, the substrate **104** having a ground plane (not shown) on one side thereof, wireless communications circuitry **106** carried within the housing **102** and located over the substrate **104** and a multi-band folded monopole antenna assembly **108** coupled to the wireless communications circuitry **106**. By way of example, the wireless communications circuitry **106** may comprise cellular communications circuitry, e.g., a cellular transceiver. Other wireless communications circuitry, such as wireless local area network (WLAN) and satellite positioning (e.g., GPS) communications circuitry, may also be used.

[0023] Referring to **FIGs. 2a-e** there is shown various aspects of an implementation the multi-band three-dimensional (3D) folded monopole antenna assembly **108** according to an embodiment of the present matter. In these views it is assumed that major surfaces **105**, **107** of the substrate **104** lie in the **x-y** plane. The antenna assembly **108** comprises a radiation part comprised of pair of monopoles formed of conductive metallic strips **110** folded into a 3D rectangular structure and located substantially on a top surface **105** and to one corner of the substrate **104**, as shown in **FIG. 2a**, a feed section **112** also located on the top surface **105** of the substrate connects the monopoles to a feed point **114** for coupling RF signals to and from the monopoles via a 50Ω connector (not shown). Furthermore, as more clearly shown in the bottom perspective view of **FIG. 2b** a ground plane **116** is located on a bottom surface **107** in a first area **109** of the dielectric substrate **104**. As may be further seen from the figure, the radiation part is arranged in a second area **115** of the dielectric substrate where the ground plane is not formed. In an exemplary implementation the ground plane **116** is comprised of a metallic layer of polygonal shape having one edge delineating a boundary between the first area **109** and the second area **115**. In an exemplary implementation the ground plane is rectangular, having a width (w)

of 55mm and length (l) of 90mm and the substrate **104** is comprised of a 1.5 mm thick FR4 material with a dielectric constant of 4.4, having a width (W) of 55mm and length (L) of 105mm. The dimension of the substrate is usually constrained by the size of the mobile device housing.

[0024] The 3D geometrical configuration of the pair of folded monopoles is shown more clearly in **FIG. 2c** and **FIG. 2d**, and an unfolded two-dimensional (2D) view is shown in **FIG. 3**. The pair of folded monopoles comprise a first and second monopole antenna elements **monopole-1 202** and **monopole-2 204** formed of conductive metallic traces **110**, extending at right angles to each other, from the feed section **112**, the first monopole **monopole-1 202** for radiating at a first resonant frequency, and the second monopole **monopole-2 204** for radiating at a second resonant frequency higher than the first frequency, and a patch element **120** coupled to the second monopole for determining the resonant frequency of the second monopole antenna element **monopole-2 204**. In **FIGs. 2c** and **2d** the continuous metallic trace **110** is folded to take a generally rectangular shape and in an exemplary implementation is supported by a rectangular shaped dielectric shell **122** as shown more clearly in **FIG. 2e**. The dielectric shell **122** is mounted on a surface of the substrate **104** opposing the surface of the ground plane, referred to as the top surface **105** in **FIG. 2a**. For the purpose of the description following the faces of the dielectric are referred to as opposing top **124** and bottom **125** faces in an **x-y** plane, opposing first **126** and second **127** end faces in an **x-z** plane, and opposing first **128** and second **129** side faces in the **y-z** plane. It is to be noted that the bottom face **125** is formed by the substrate **104**.

[0025] As shown in **FIG. 3** the folds of the metallic trace are made along the dashed lines, representing fold lines. In an exemplary implementation the metallic trace **113** has a uniform width of 2mm and is folded such that first monopole antenna element **monopole-1 202** includes a continuous metallic trace comprised of the feed section **S0 112** extending from the feed point **114** to a first horizontal section **S1h** arranged along a lower portion of the first end face **126** of the dielectric shell **122** to form a first L shaped section comprising **S0** and **S1h** a first U-shaped section **S2** on the first side face **128**, a second U-shaped

section including a horizontal section **S3** extending along a lower portion of the second end face **127**, a third U-shaped section **S4** on the second side face **129** and ending in a second L-shaped section **S5** on the bottom face **125**. The second monopole **monopole-2 204** is composed of the feed section **S0**, a vertical section **S1v** extending vertically along the first end face **126** and the patch **P 120** formed on the top face **124**. It may be seen that the antenna is composed of three U-shaped sections formed generally of strips **S2**, **S3**, and **S4** and two L-shaped section formed of strips **S1** and **S5**.

[0026] As the total length and layout of each monopole antenna element determines the antenna's performance, the total length may be optimized taking into account the constraints on the volume for the antenna and the desired resonant frequency. The total length controls the fundamental resonating mode of the monopole elements, as will be appreciated by those skilled in the art. The modes at higher frequencies are generated at various portions of this length.

[0027] The 3D wrapping of the antenna controls the current distribution along the monopole length, and thus controls the electrical length(s) for the higher resonant frequency band(s) as well as antenna bandwidth, as will also be appreciated by those skilled in the art.

[0028] The initial electrical length of the first and second monopoles is set to a quarter of the wavelength of respective first and second resonant frequencies for the chosen fundamental modes. In an implementation the fundamental mode is set at 1 GHz for the first monopole and 2 GHz for the second monopole. The geometric parameters may be optimized by using electromagnetic simulators such as those based on Finite-difference time-domain (FDTD) computational electrodynamics modeling techniques, as is known in the art. An example of which is a commercially available program by CST.

[0029] The width **d** of the patch **120** varies the bandwidth and performance of the antenna. In an exemplary implementation the width **d** of the patch **120** is set to 2mm, identical to the width of the other strips. The dielectric shell has dimensions of 14mm in length (**l1**), 7mm in width (**w2**) and 7.5mm in height (**h**). It is to be noted that the dielectric shell is mounted to the top surface of the substrate and

thus the height of the dielectric shell is increased by 1.5 mm, the thickness of the substrate **104**. The lengths of the sections of metallic strips for the first monopole are as follows: **S0** = 3mm, **S1h** = 7mm, **S2** = [s21 =4mm, s22= 2.5mm, s23 =10mm, s24 =2.5mm, s25 =4mm], **S3** = 7mm, **S4** = [s41=40mm, s42= 2.5mm, s43= 12m, s44= 6mm], **S5**= [s51=5.5mm, s52=11mm]. The lengths of the sections of metallic strips for the second monopole are as follows: **S0** = 3mm, **S1v** = 7.5mm (the vertical section) and **P**=14mm. The above dimensions are for an exemplary embodiment; however, it will be appreciated by those skilled in the art that other dimensions and/or materials may be used in different embodiments.

[0030] Referring to **FIG. 4** there is shown a comparison of simulated reflection coefficients for the antenna, having dimensions as above, when **monopole-1 202** is excited on its own **402**; **monopole-2 204** is excited alone **404**, and the combined reflection coefficients when **monopole-1 202** and **monopole-2 204** are excited simultaneously **406**. As may be seen, when the two monopoles are excited at the same time, the antenna exhibits four resonant frequencies of 0.95 GHz (**408**), 2 GHz (**410**), 2.5 GHz (**412**) and 5.4 GHz (**414**). When compared to the reflection coefficients for the separately excited monopoles, the bandwidths and impedance matching at the frequencies of 0.95 GHz, 2 GHz and 5.4 GHz for the simultaneously excited monopoles are not significantly different. However at 2.5 GHz the bandwidth is significantly enhanced. Thus, it may be seen that one of the monopoles, in this case the first monopole **monopole-1 202**, determines the bandwidths and resonant frequencies at 0.95 GHz, 2 GHz and 5.4 GHz bands, whereas the other monopole, in this case the second monopole **monopole-2 204**, determines the bandwidth at the 2.5 GHz band.

[0031] Furthermore, by simulating surface current distributions (not shown) for the antenna, having dimensions as above, it was demonstrated that the first monopole **monopole-1 202** operates at its fundamental mode and the total length of the first monopole **monopole-1 202** is approximately a quarter wavelength. As operation frequency is increased to 2 GHz, it was verified that the first monopole **monopole-1 202** operates at the second-order mode of 2 GHz. At this frequency, the electrical length of the first monopole **monopole-1**

202 is a half wavelength. Furthermore, as the operation frequency is increased to 5.2 GHz, multiple null points appear for the current distributions on the first monopole **monopole-1 202**. Hence, the antenna works at the higher order mode and its electrical length is more than one wavelength. In the case of the second monopole **monopole-2** when it is excited alone at 2 GHz the currents also flow in a continuous direction, which means that the second monopole **monopole-2** operates at the fundamental mode and its length is a quarter wavelength. Finally, when the two monopoles were simultaneously excited at several frequencies the frequency bands of 1 GHz, 2 GHz and 5.5 GHz, the first monopole **monopole-1 202** had strong surface currents while the second monopole **monopole-2 204** exhibited weak surface currents. Accordingly, it can be inferred that the two monopoles have high-mode isolation, and that the first monopole **monopole-1 202** primarily determines these resonant frequencies. However, when the antenna operates at the 2.5 GHz band, the two monopoles exhibit strong surface currents, so they both have an influence in this band.

[0032] As mentioned earlier, the width **d** of the patch **120** changes the resonant frequency and bandwidth of the antenna. Accordingly, referring now to **FIG. 5** there is shown the reflection coefficients for the pair of monopole antennas **108** for different patch widths **d** i.e. **d** = 2mm (**502**), **d** = 4mm (**504**) and **d** = 6mm (**506**). It may be seen that in the frequency range from 2.2 to 4 GHz the plots of the reflection coefficients for the different widths **d** show changes in the resonant frequency and bandwidth, but for frequencies below 2 GHz there is little difference in the plots except for a slight adjustment in impedance matching. This is further evidence that the monopoles have high mode-isolation. This high mode-isolation, allows the lower and the upper bands of the antenna to be easily set by changing the geometric parameters of the first and second monopoles independently.

[0033] Another characteristic shown in **FIG. 5** is that even by changing the patch width **d** and thereby varying a resonant frequency range, the antenna continues to be useful in a number of applicable frequency bands. In the exemplary implementation this ranges from 2 GHz to 4 GHz, which covers frequency bands

applicable to GSM 1800/1900, UMTS2100, Blue-tooth 2.4 GHz, WiFi/LTE 2.6 GHz, WiMAX 3.3 to 3.8 GHz.

[0034] In applications requiring frequency agility RF-switches, such as RF-MEMS (Radio-Frequency Micro-Electro-Mechanical System), may be used to dynamically increase or decrease the patch **P** width **d** so that the antenna provides greater flexibility.

[0035] Referring to **FIG. 6** there is shown a comparison of a measured **602** and simulated **604** reflection coefficient S11 for an exemplary implementation, where the patch width **d** is 2 mm. It may be noted that for a 6 dB return loss the frequency range for the antenna is from 880 to 1000 MHz, which is within the frequency range for GSM 900 applications. Furthermore as shown in **FIG. 6** the impedance bandwidth of 10 dB return loss is from 1700 MHz to 2820 MHz, which covers multiple applications at GSM /1800/1900 and UMTS 2100, long term evolution (LTE) 2.1 and 2.6 GHz bands.

[0036] Referring, additionally to **FIGs. 7a-7d** there is shown a logarithmic polar plot of measured far-field radiation patterns at resonant frequencies of 900 MHz (**FIG. 7a**), 1800 MHz (**FIG. 7b**), 2.5 GHz (**FIG. 7c**) and 5.5 GHz (**FIG. 7d**) of the exemplary implementation at the three planes of XOZ, YOZ and XOY, where the values are in units of dBi of gain. The orientation of the antenna for these measurements are the same as that of **FIGs. 2a-d**. As may be seen from the radiation patterns the antenna peak gain ranges from -2 dBi to - 0.5 dBi at 900 MHz band, from 1.5 to 2.9 dBi at the middle frequency bands (1.7 to 2.17 GHz) and from 4 to 6 dBi at the high frequency band (4.9 to 6 GHz). These radiation patterns are omni-directional and dipole-like at 900 MHz (**FIG. 7a**), but the patterns are directive at 1800 MHz (**FIG. 7b**), 2.5 GHz (**FIG. 7c**) and 5.5 GHz (**FIG. 7d**). Moreover, the total antenna efficiency was measured, which is defined as the ratio of the radiated power to the total power delivered to the input terminal of the antenna, i.e. the efficiency includes the impacts from mismatching loss, dielectric loss, and conductor loss. The antenna **108** achieved an efficiency of 50-75 % from 824 MHz to 960MHz, an efficiency of 58-85% from 1.6 GHz to 2.2 GHz and an efficiency of 50-75% from 4.9 to 6 GHz.

[0037] Referring now to **FIG. 8a and 8b** there is shown respective top and bottom perspective views of the 3D geometrical configuration of a multi-band 3D folded monopole antenna **808** according to another embodiment of the present matter. As described earlier with respect to the antenna **108** shown in **FIGs. 2**, the antenna **808** is also located at a top of a PCB, having a feed point and feed section similar to antenna **108**. The antenna is positioned on the PCB and formed, in an exemplary embodiment, on a dielectric body **128** in a manner as previously described.

[0038] The antenna **808** also comprises two monopole antenna elements, **810** and **812** formed on the dielectric shell illustrated in **FIG 2e**. In the embodiment illustrated, the first monopole **810** is composed of a first folded monopole comprising a continuous metallic trace of uniform width comprising a feed section **S0'** extending from the feed point **114** to a vertical section and two roughly U-shaped sections **S1'**, **S2'** formed on a first side face of the dielectric body. The U-shaped sections **S1'**, **S2'** form a loop back to the feed section **S0'**. A second monopole **812** is composed of the feed section **S0'**, a section **S4'** extending vertically along the first end face, the top face, the second end face opposite the first end face of the dielectric body and ending in a patch **P'** formed on the bottom face of the substrate under the dielectric body. An L-shaped section **S5'** extends from the second end face section of the second monopole and is formed on the second side face opposite the first side face of the dielectric body. Also as described with the antenna **108** earlier, the patch **P'** in this embodiment is also spaced at distance h (the height of the dielectric body) from the first monopole. In this embodiment however one of the L-shaped sections (as described with respect to the embodiment of **FIG. 2**) is formed with the second monopole. The antenna response and performance are similar to the antenna **108** described earlier.

[0039] It may be seen from the above that there is described herein a compact 3D folded multi-band high mode-isolation, monopole antenna for handheld devices. The antenna has a simple structure and a small size combined with high-efficiency. As shown in the exemplary implementations, in addition to the

two bands at 900 MHz and 5.5 GHz, the exemplary antennas provide a number of resonant frequencies within a desirable bandwidth in the frequency range of 2 GHz to 4 GHz by adjusting the patch width. This is useful when finalizing antenna designs because antenna adjustments are generally required at a late stage of product development. Typically large adjustments in the antennas dimensions are not feasible since the antenna's overall size has been fixed at the production stage.

[0040] Furthermore the antenna of the present matter can be easily adapted for used in mobile devices for reception of two or more unique radio signals, which require relatively low correlation between each of the received signals.

[0041] Accordingly, referring now to **FIG. 9a** there is shown two-port antenna configurations **900**, as an example of a multi-port antenna, using a pair of folded monopole antennas **108** of the present matter. For simplicity and illustrative purposes the configuration of the antenna in **FIG. 9a** is shown with the ground plane and antenna elements and without the substrate and dielectric. The antenna arrangement **900** includes a rectangular ground plane **901** as described earlier and a first 3D folded monopole antenna **902** and second 3D folded monopole antenna **904**. The antennas are spaced apart and oriented 90 degrees with respect to each other in the second area **107** of the dielectric substrate where the ground plane **901** is not formed. A feed point **906** (port1) of the first antenna **902** is at one edge **905** of the ground plane **901** and a feed point **908** (port2) of the second antenna **904** is at a section of the ground plane **901**, which includes a section of metal that extends the ground plane, herein referred to as a stub **903**. In the illustrated implementation the stub **903** extends from the edge **905** of the ground plane into the second area **107** and between the spaced apart antennas to end in proximity to the feed point **908** of the second antenna **904**. In An exemplary implementation the stub **903** has a length of 17mm and a width of 10mm.

[0042] In **FIG. 9b**, there is shown the two-port configuration comprised of antennas **808** and in **FIG 9c** there is shown the two-port configuration comprised of antennas **808** and **108** for the respective ports. Multi-port configurations can

thus be built using one or more of the different pairs of monopole antennas described herein.

[0043] Referring to **FIG. 10** there is shown plots of measured S parameters (S11, S21 and S22), for the dual port antennas, where S11 and S22 are reflection parameters and S21 is an isolation or coupling parameter. It can be seen that the dual-port antenna operates over multiple application bands, such as GSM/900/1800/1900, UMTS 2100 MHz bands, LTE 2.1/2.6 bands and WLAN 2.45/5 GHz bands, and the isolation between the two ports are better than – 13 dB across all bands from 500 MHz to 6 GHz.

[0044] The isolation may be attributed to the two antennas having well implemented antenna diversities such as spatial, polarization and pattern diversity. Thus it may be seen that the diversity techniques applied to the pair of antennas result in high isolation (low coupling) between the two ports. For example, whereas the two monopole antenna elements of each antenna are arranged vertically with respect to each other for polarization and pattern diversities, each of the dual antennas are separated for spatial diversity.

[0045] Varying a size and arrangement of stub sections, such as stub section **903**, may change the response of the two-port antenna arrangement shown in **FIGs. 9a-c**. Referring to **FIGs. 11a-b** there is shown various stub sizes and arrangements for the two-port antenna **900**. For example, as shown in **FIG. 11a**, a section **1102** is added along the edge **905** of the ground plane **901**, to extend the ground plane under the second antenna **904**. In an exemplary embodiment the section **1102** has a width of 5 mm and length of 17mm and **FIGs. 12a-c** shown corresponding plots of measured S parameters (S11, S21 and S22, respectively), for the dual port antennas.

[0046] Similarly, **FIG. 11b** shows a further section **1104** added alongside one edge of the section **903** to extend the ground plane **901** between the antennas **902, 904**. In an exemplary embodiment the section **1104** has a width of 10 mm and length of 17mm and **FIGs. 13a-c** show corresponding plots of measured S parameters (S11, S21 and S22, respectively).

[0047] Still further, in **FIG. 11c** there is shown a section **1106** added alongside the section **1104** to extend the ground plane **901** further between the antennas **902, 904**. In an exemplary embodiment the section **1106** has a width of 10 mm and length of 17mm, adding a width of 20 mm to the section **903** and **FIGs. 14a-c** show corresponding plots of measured S parameters (S11, S21 and S22, respectively).

[0048] It may be seen from the S parameter plots in **FIGs. 12-14** that the size of the stub, such as stub **903** effects the operating frequency and isolation of the antennas **902, 904**. Thus the size of the stub may be varied in order to change the overall operating frequency of the dual antenna arrangement. Furthermore, this may be combined with varying the patch width **d** of each multi-band antenna to provide a greater degree of flexibility in the operating range of the dual antenna. Still further, because of the high mode isolation and low coupling between the antennas each antenna may be adjusted to operate in a particular frequency range without greatly affecting the other antenna. While the above embodiments have been described with respect to a dual antenna arrangement, arrangements with more than two antennas may also be implemented without departing from the scope of the present matter.

[0049] Exemplary components of a hand-held mobile wireless communications device **2200** in which one or more of the above-described folded monopole antennas **108** may be used are now described with reference to **FIG. 19**.

[0050] The mobile device of **FIG. 15** is not meant to be limiting, but merely provides an example of a mobile device that could be used in association with the present method and apparatus.

[0051] Mobile device **2200** is preferably a two-way wireless communication device having at least voice and data communication capabilities. Mobile device **2200** preferably has the capability to communicate with other computer systems on the Internet. Depending on the exact functionality provided, the mobile device may be referred to as a data messaging device, a two-way pager, a wireless e-mail device, a cellular telephone with data messaging capabilities, a wireless Internet appliance, or a data communication device, as examples.

[0052] Where mobile device **2200** is enabled for two-way communication, it will incorporate a communication subsystem **2211**, including a receiver **2212** and a transmitter **2214**, as well as associated components such as one or more, preferably embedded or internal, antenna elements **2216** and **2218**, local oscillators (LOs) **2213**, and a processing module such as a digital signal processor (DSP) **2220**. As will be apparent to those skilled in the field of communications, the particular design of the communication subsystem **2211** will be dependent upon the communication network in which the device is intended to operate.

[0053] Network access requirements will also vary depending upon the type of network **2219**. A GSM/UMTS device typically has a subscriber identity module (SIM) in order to get full service from the network. A cdma2000 device typically has such access credentials stored in its non-volatile memory or may use a removable user identity module (RUIM) in order to operate on a CDMA network. The SIM/RUIM interface **2244** is normally similar to a card-slot into which a SIM/RUIM card can be inserted and ejected like a diskette or PCMCIA card. The SIM/RUIM card can have approximately 64K of memory and hold many key configurations **2251**, and other information **2253** such as identification, and subscriber related information.

[0054] When required network registration or activation procedures have been completed, mobile device **2200** may send and receive communication signals over the network **2219**. As illustrated in **FIG. 15**, network **2219** can consist of multiple base stations communicating with the mobile device.

[0055] Signals received by antenna **2216** through communication network **2219** are input to receiver **2212**, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering, channel selection and the like, and in the example system shown in **FIG. 15**, analog to digital (A/D) conversion. A/D conversion of a received signal allows more complex communication functions such as demodulation and decoding to be performed in the DSP **2220**. In a similar manner, signals to be transmitted are processed, including modulation and encoding for example, by the DSP **2220** and input to

transmitter **2214** for digital to analog conversion, frequency up conversion, filtering, amplification and transmission over the communication network **2219** via antenna **2218**. The DSP **2220** not only processes communication signals, but also provides for receiver and transmitter control. For example, the gains applied to communication signals in receiver **2212** and transmitter **2214** may be adaptively controlled through automatic gain control algorithms implemented in the DSP **2220**.

[0056] Mobile device **2200** preferably includes a microprocessor **2238** which controls the overall operation of the device. Communication functions, including at least data and voice communications, are performed through communication subsystem **2211**. Microprocessor **2238** also interacts with further device subsystems such as the display **2222**, flash memory **2224**, random access memory (RAM) **2226**, auxiliary input/output (I/O) subsystems **2228**, serial port **2230**, two or more keyboards or keypads **2232**, speaker **2234**, microphone **2236**, other communication subsystem **2240** such as a short-range communications subsystem and any other device subsystems generally designated as **2242**. Serial port **2230** could include a USB port or other port known to those in the art.

[0057] Some of the subsystems shown in **FIG. 15** perform communication-related functions, whereas other subsystems may provide “resident” or on-device functions. Notably, some subsystems, such as keyboard **2232** and display **2222**, for example, may be used for both communication-related functions, such as entering a text message for transmission over a communication network, and device-resident functions such as a calculator or task list.

[0058] Operating system software used by the microprocessor **2238** is preferably stored in a persistent store such as flash memory **2224**, which may instead be a read-only memory (ROM) or similar storage element (not shown). Those skilled in the art will appreciate that the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile memory such as RAM **2226**. Received communication signals may also be stored in RAM **2226**.

[0059] As shown, flash memory **2224** can be segregated into different areas for both computer programs **2258** and program data storage **2250**, **2252**, **2254** and

2256. These different storage types indicate that each program can allocate a portion of flash memory **2224** for their own data storage requirements. Microprocessor **2238**, in addition to its operating system functions, preferably enables execution of software applications on the mobile device. A predetermined set of applications that control basic operations, including at least data and voice communication applications for example, will normally be installed on mobile device **2200** during manufacturing. Other applications could be installed subsequently or dynamically.

[0060] A preferred software application may be a personal information manager (PIM) application having the ability to organize and manage data items relating to the user of the mobile device such as, but not limited to, e-mail, calendar events, voice mails, appointments, and task items. Naturally, one or more memory stores would be available on the mobile device to facilitate storage of PIM data items. Such PIM application would preferably have the ability to send and receive data items, via the wireless network **2219**. In a preferred embodiment, the PIM data items are seamlessly integrated, synchronized and updated, via the wireless network **2219**, with the mobile device user's corresponding data items stored or associated with a host computer system. Further applications may also be loaded onto the mobile device **2200** through the network **2219**, an auxiliary I/O subsystem **2228**, serial port **2230**, short-range communications subsystem **2240** or any other suitable subsystem **2242**, and installed by a user in the RAM **2226** or preferably a non-volatile store (not shown) for execution by the microprocessor **2238**. Such flexibility in application installation increases the functionality of the device and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using the mobile device **2200**.

[0061] In a data communication mode, a received signal such as a text message or web page download will be processed by the communication subsystem **2211** and input to the microprocessor **2238**, which preferably further processes the

received signal for output to the display **2222**, or alternatively to an auxiliary I/O device **2228**.

[0062] A user of mobile device **2200** may also compose data items such as email messages for example, using the keyboard **2232**, which is preferably a complete alphanumeric keyboard or telephone-type keypad, in conjunction with the display **2222** and possibly an auxiliary I/O device **2228**. Such composed items may then be transmitted over a communication network through the communication subsystem **2211**.

[0063] For voice communications, overall operation of mobile device **2200** is similar, except that received signals would preferably be output to a speaker **2234** and a microphone **2236** would generate signals for transmission. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on mobile device **2200**. Although voice or audio signal output is preferably accomplished primarily through the speaker **2234**, display **2222** may also be used to provide an indication of the identity of a calling party, the duration of a voice call, or other voice call related information for example.

[0064] Serial port **2230** in **FIG. 15** would normally be implemented in a personal digital assistant (PDA)-type mobile device for which synchronization with a user's desktop computer (not shown) may be desirable, but is an optional device component. Such a port **2230** would enable a user to set preferences through an external device or software application and would extend the capabilities of mobile device **2200** by providing for information or software downloads to mobile device **2200** other than through a wireless communication network. The alternate download path may for example be used to load an encryption key onto the device through a direct and thus reliable and trusted connection to thereby enable secure device communication. As will be appreciated by those skilled in the art, serial port **2230** can further be used to connect the mobile device to a computer to act as a modem.

[0065] Other communications subsystems **2240**, such as a short-range communications subsystem, is a further optional component which may provide

for communication between mobile device **2200** and different systems or devices, which need not necessarily be similar devices. For example, the subsystem **2240** may include an infrared device and associated circuits and components or a Bluetooth™ communication module to provide for communication with similarly enabled systems and devices.

[0066] The embodiments described herein are examples of structures, systems or methods having elements corresponding to elements of the techniques of this application. This written description may enable those skilled in the art to make and use embodiments having alternative elements that likewise correspond to the elements of the techniques of this application. The intended scope of the techniques of this application thus includes other structures, systems or methods that do not differ from the techniques of this application as described herein, and further includes other structures, systems or methods with insubstantial differences from the techniques of this application as described herein.

CLAIMS:**1.** A multi-band antenna comprising:

a dielectric substrate;

a ground plane formed on a first area of the dielectric substrate;

a radiation part arranged in a second area of the dielectric substrate where the ground surface is not formed,

a feed section formed of a metallic trace and having one end connected to the radiation part and an opposite end disposed near an edge of the ground plane forming a feed point for direct connection to a feed;

the radiation part having a pair of monopole antenna elements formed of conductive metallic traces; a first monopole antenna element for radiating at a first resonant frequency, and a second monopole antenna element for radiating at a second resonant frequency and the conductive metallic traces being folded to form a three dimensional structure, with at least a portion of said second monopole spaced from a plane of the substrate and said first monopole; and a patch element extending a width of said second monopole the width of said patch element for determining the resonant frequency of the second monopole independently of the resonant frequency of the first monopole, wherein resonant frequencies at fundamental and higher modes of the antenna being determined solely by a length of the metallic traces and the width of said patch element.

2. The antenna as defined in claim 1, including a dielectric shell defining a generally rectangular shape having opposing top and bottom faces, opposing first and second end faces and opposing first and second side faces, the bottom face of said dielectric shell positioned in said second area of said substrate and said three dimensional structure of said metallic trace being formed around said dielectric shell.

3. The antenna as defined in claim 2, said patch element formed on the top surface of said shell.

4. The antenna as defined in claim 2, said patch element formed on the bottom surface of said shell.

5. A mobile wireless communication device comprising the multiband antenna of any one of claims 1 to 4.

6. The mobile wireless communication device of claim 5, including a cellular transceiver.

7. A mobile wireless communication device comprising:

a housing

a dielectric substrate carried within said housing;

wireless communication circuitry carried by said substrate; and

a plurality of multiband antennas of any one of claims 1 to 4.

8. The mobile wireless communication device of claim 7, including a stub section coupled to said ground plane and extending into said second area for determining an operating frequency of said multi-band antenna arrangement.

9. A method for implementing a multi-band antenna in a mobile device comprising:

forming a ground plane on a first area of a dielectric substrate;

arranging a radiation part in a second area of the dielectric substrate where the ground surface is not formed,

forming a feed section of a metallic trace having one end connected to the radiation part and an opposite end disposed near an edge of the ground plane to form a feed point for direct connection to a feed;

forming the radiation part having a pair of monopole antenna elements of conductive metallic traces, a first monopole antenna element for radiating at a first resonant frequency, and a second monopole antenna element for radiating at a second resonant frequency, the conductive metallic traces being folded to

form a three dimensional structure, with at least a portion of said second monopole spaced from a plane of the substrate and said first monopole; and

forming a patch element extending a width of said second monopole the width of said patch element for determining the resonant frequency of the second monopole independently of the resonant frequency of the first monopole, wherein resonant frequencies at fundamental and higher modes of the antenna being determined solely by a length of the metallic traces and the width of said patch element.

10. The method of claim 9, including positioning a plurality of said multiband antennas in said second area and selecting a size of a stub section for extending the ground plane into the second area, the stub size for determining an operating frequency and isolation between the multi-band antennas.

11. The method of claim 9, said three dimensional structure of said metallic trace being formed around a dielectric shell, the dielectric shell defining a generally rectangular shape having opposing top and bottom faces, opposing first and second end faces and opposing first and second side faces, the bottom face of said dielectric shell positioned in said second area of said substrate.

12. The method of claim 9 including forming said patch element on the top surface of said shell.

13. The method of claim 9 including forming said patch element on the bottom surface of said shell.

1/32

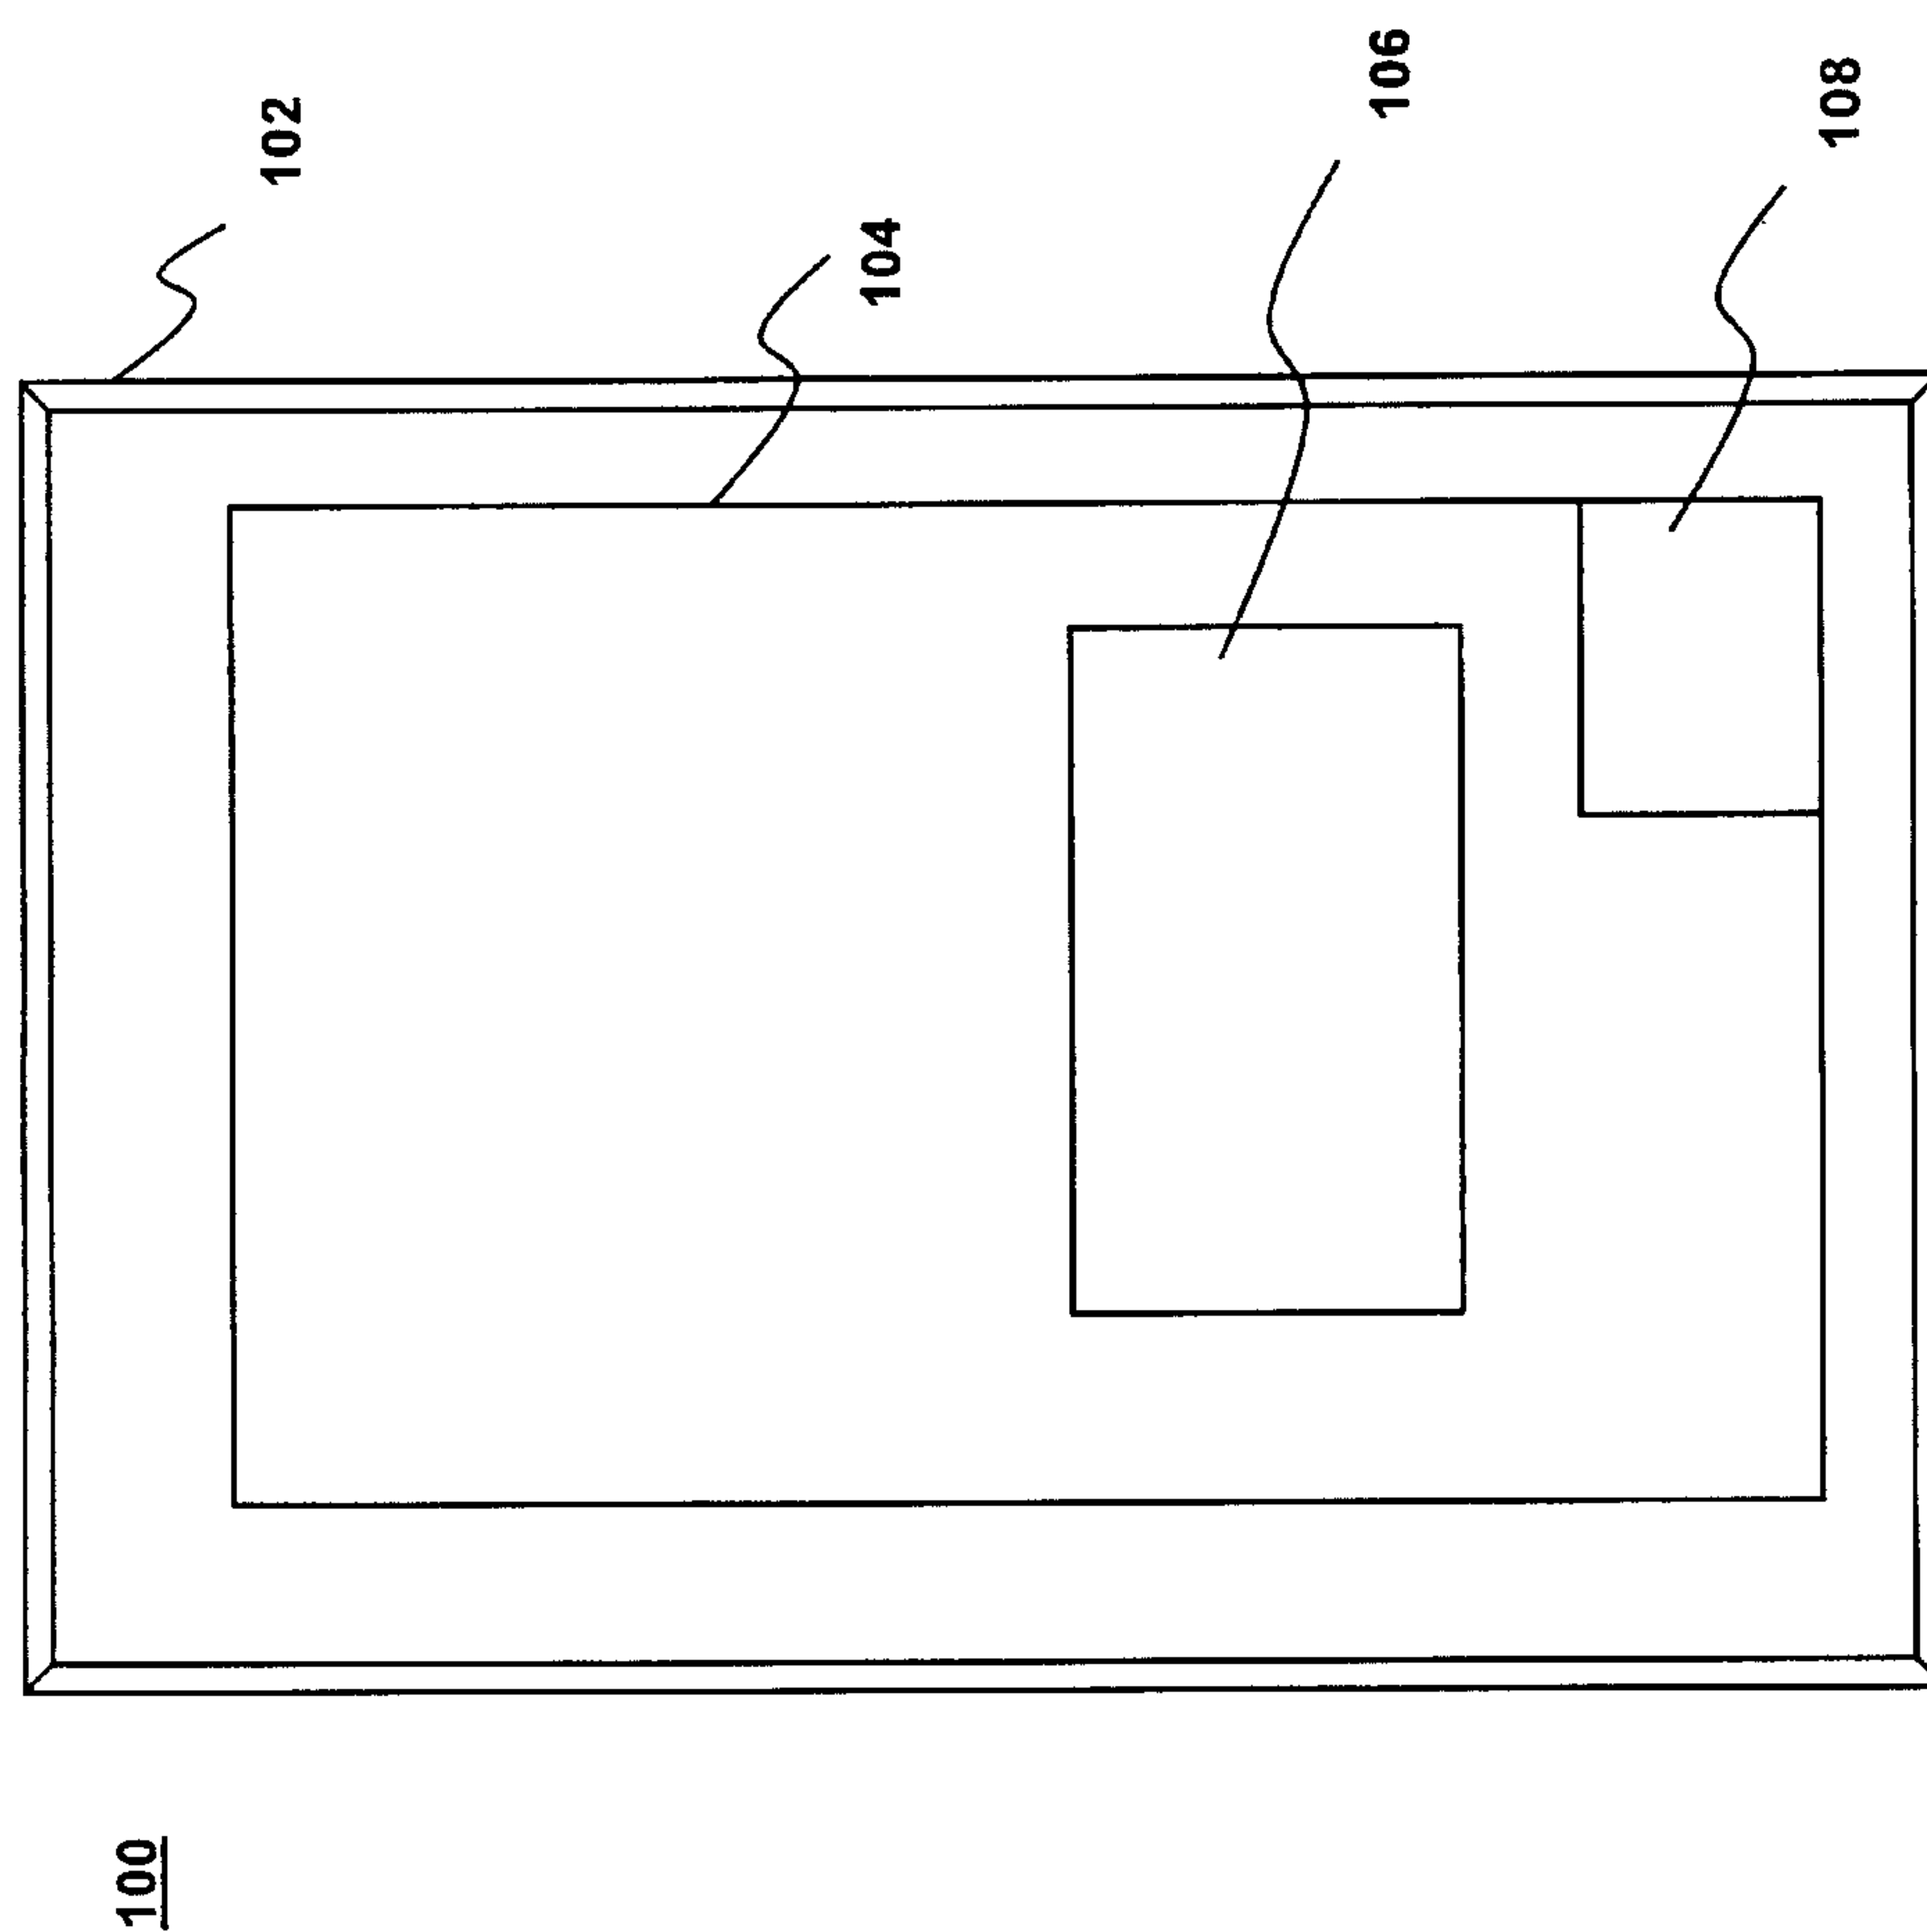
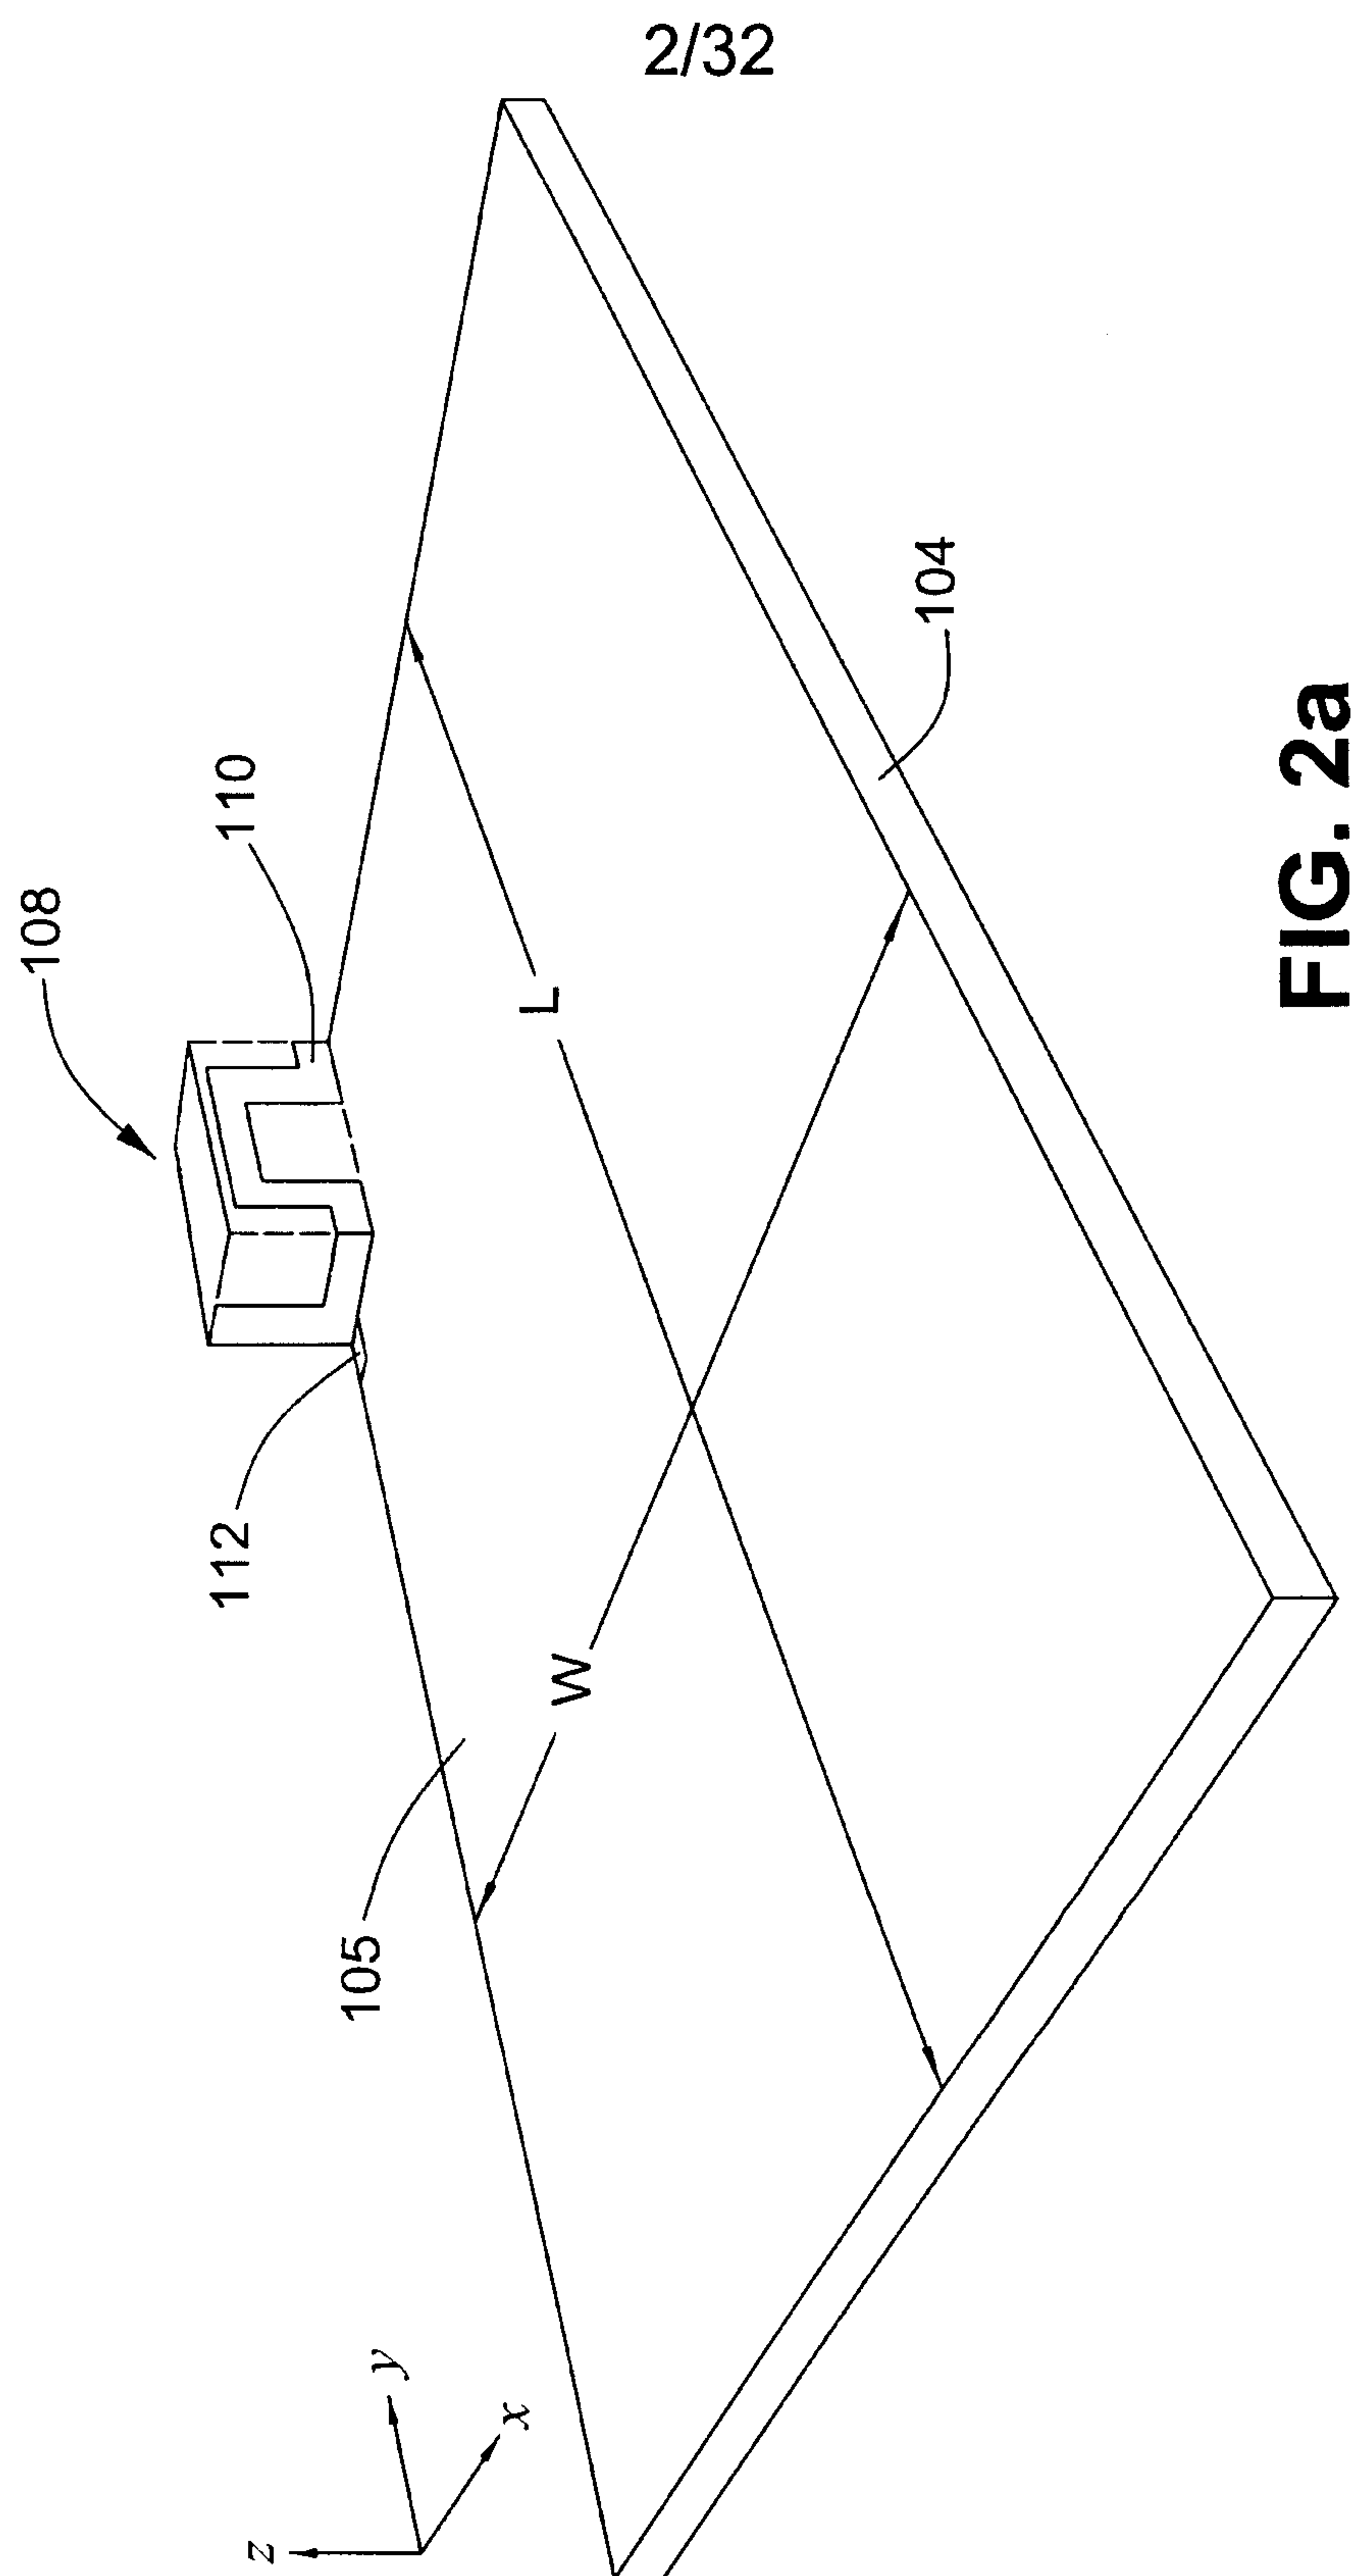
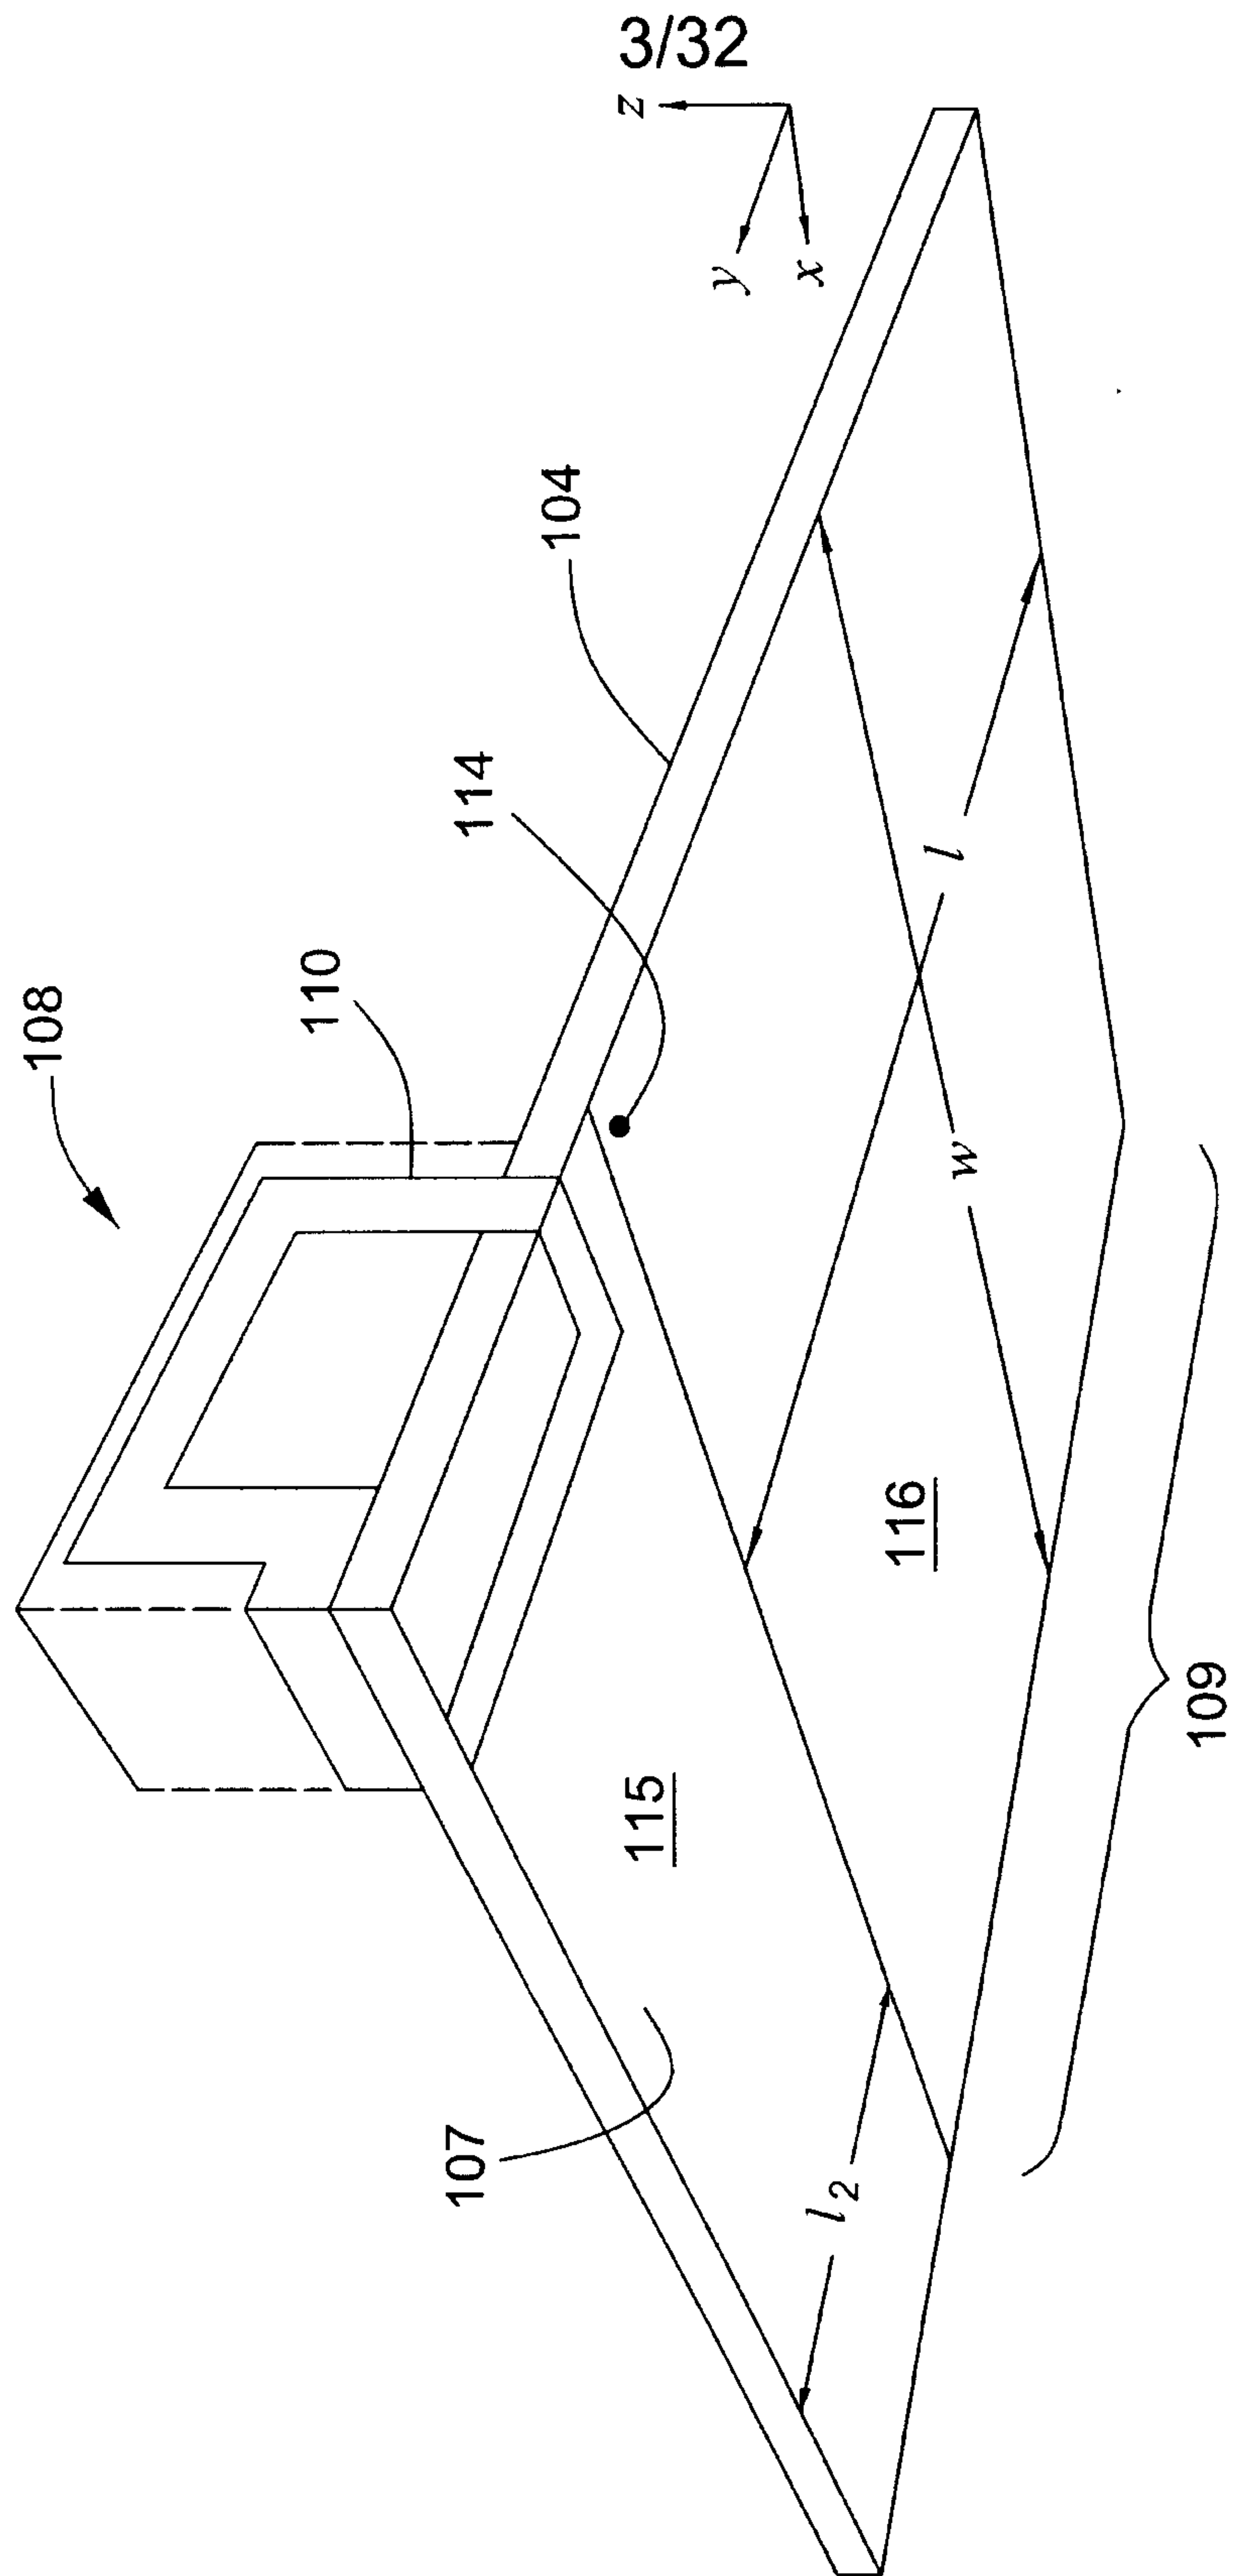
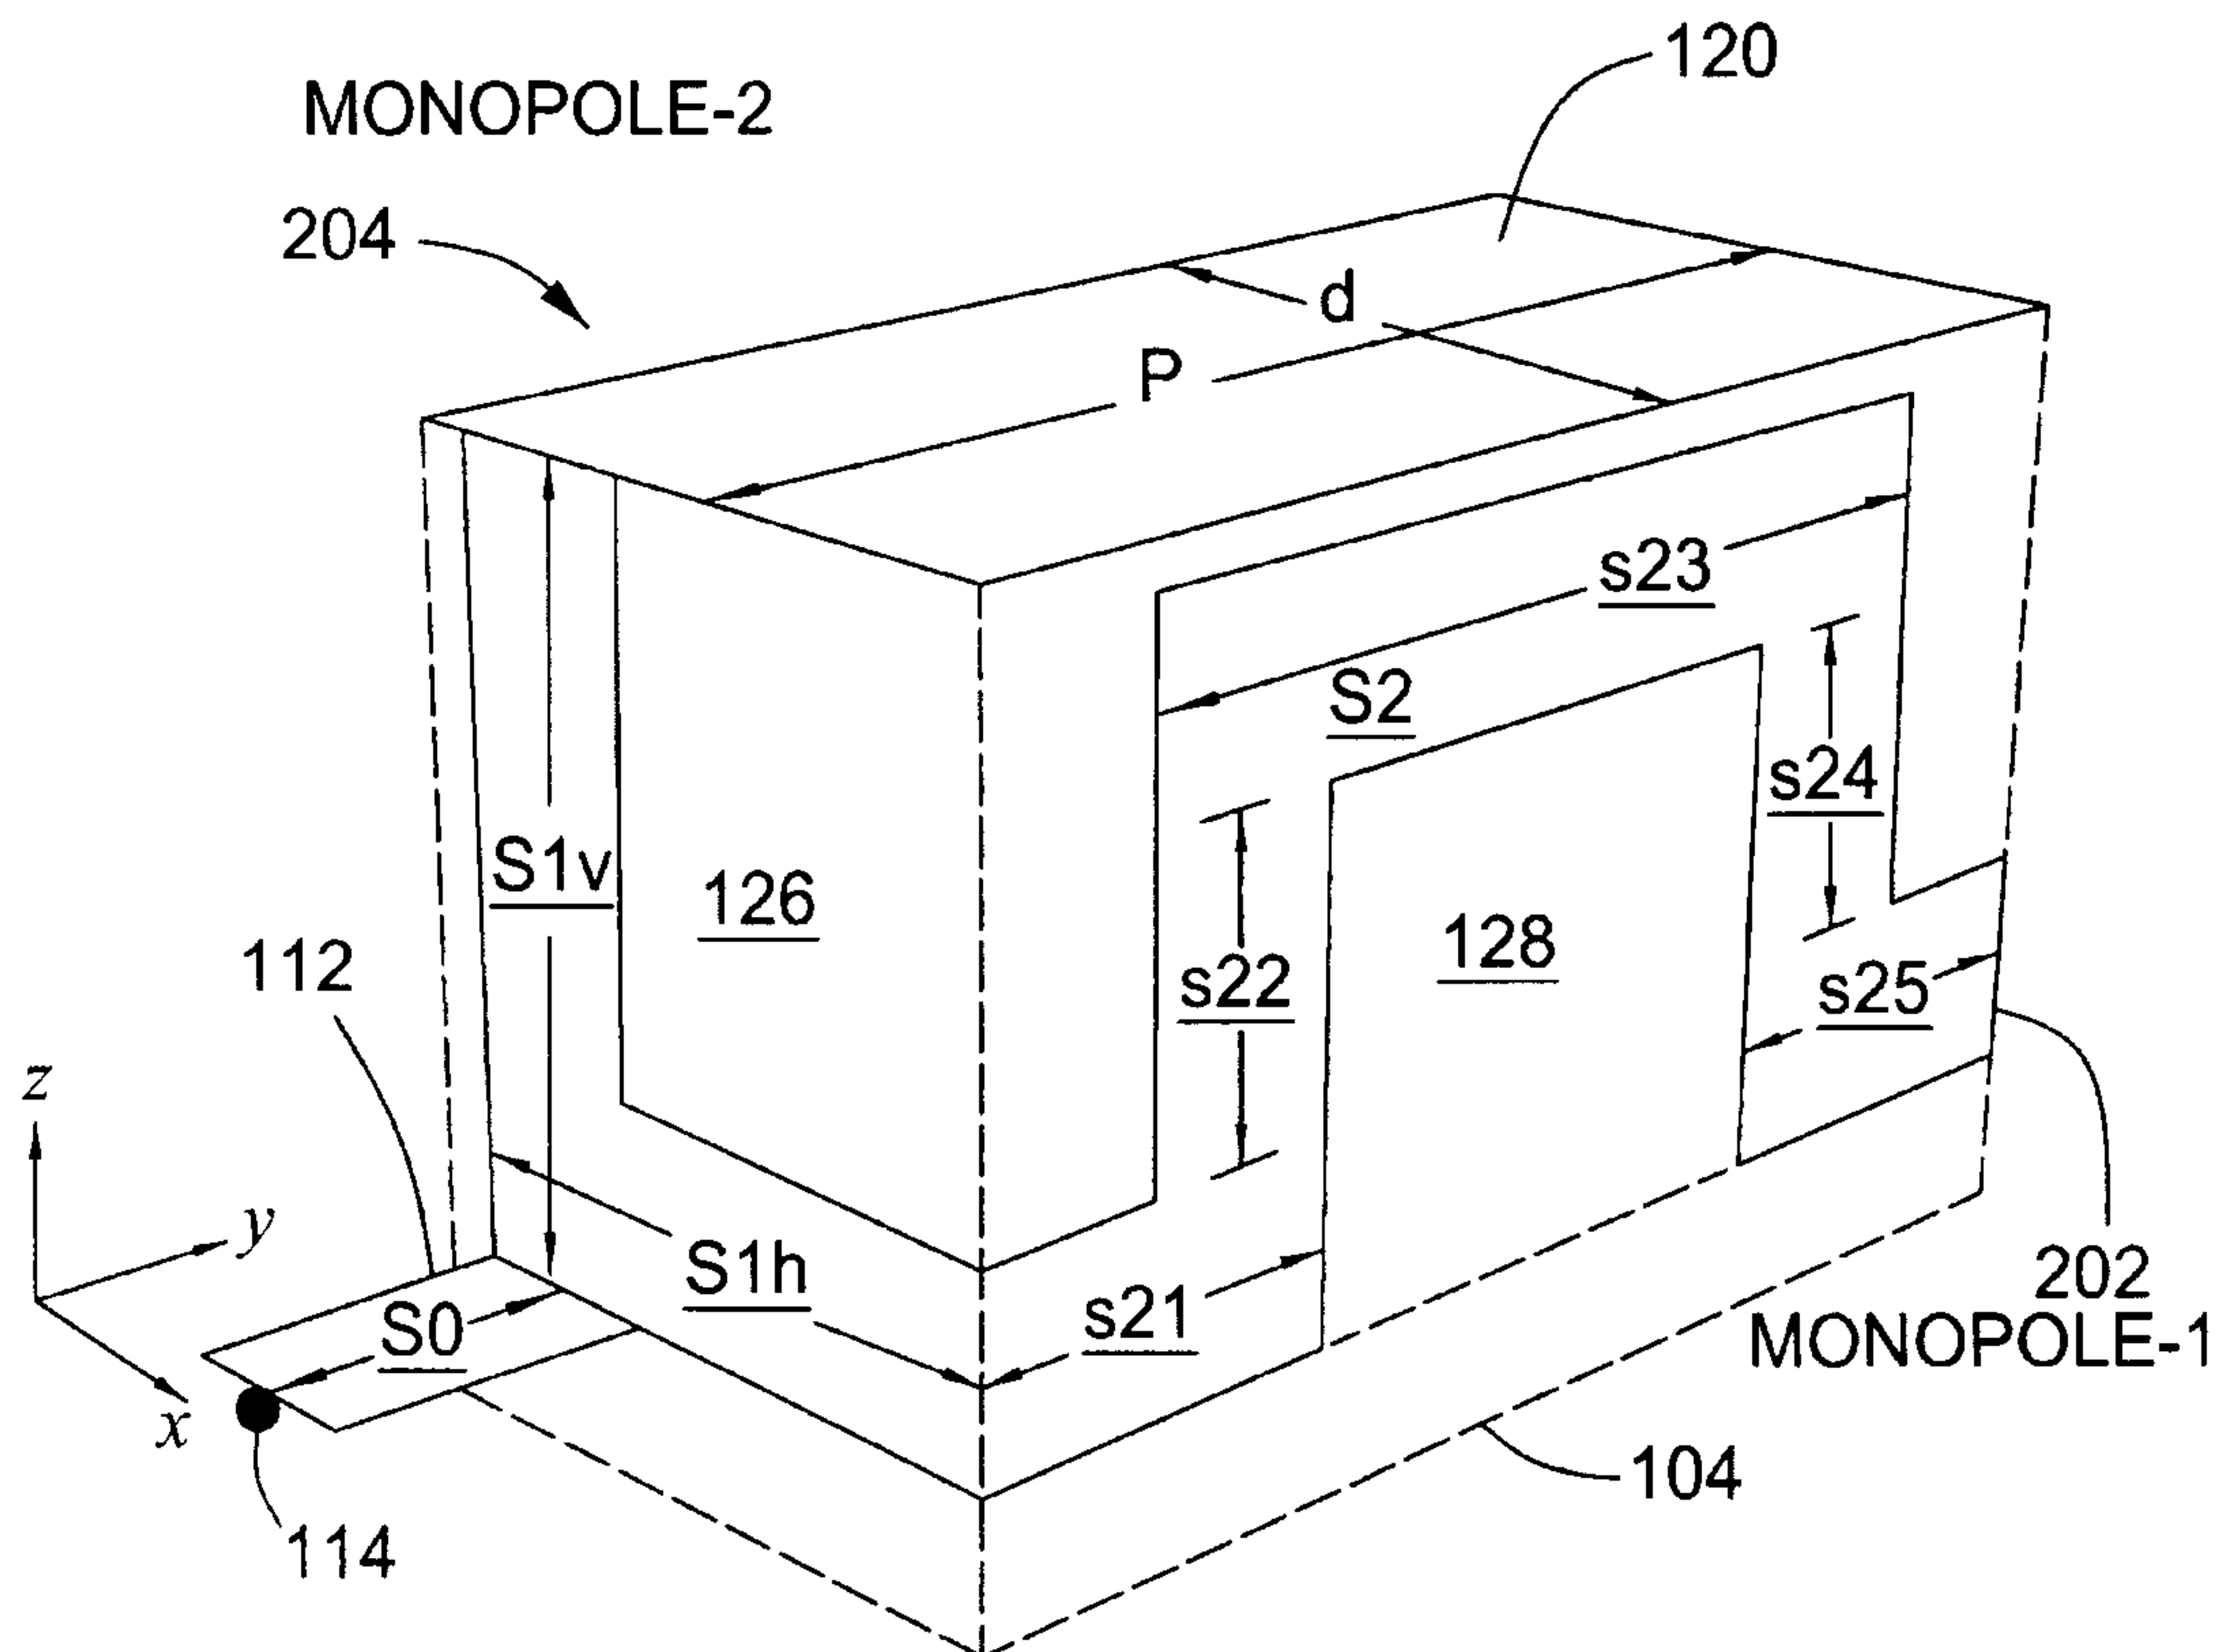


FIG. 1

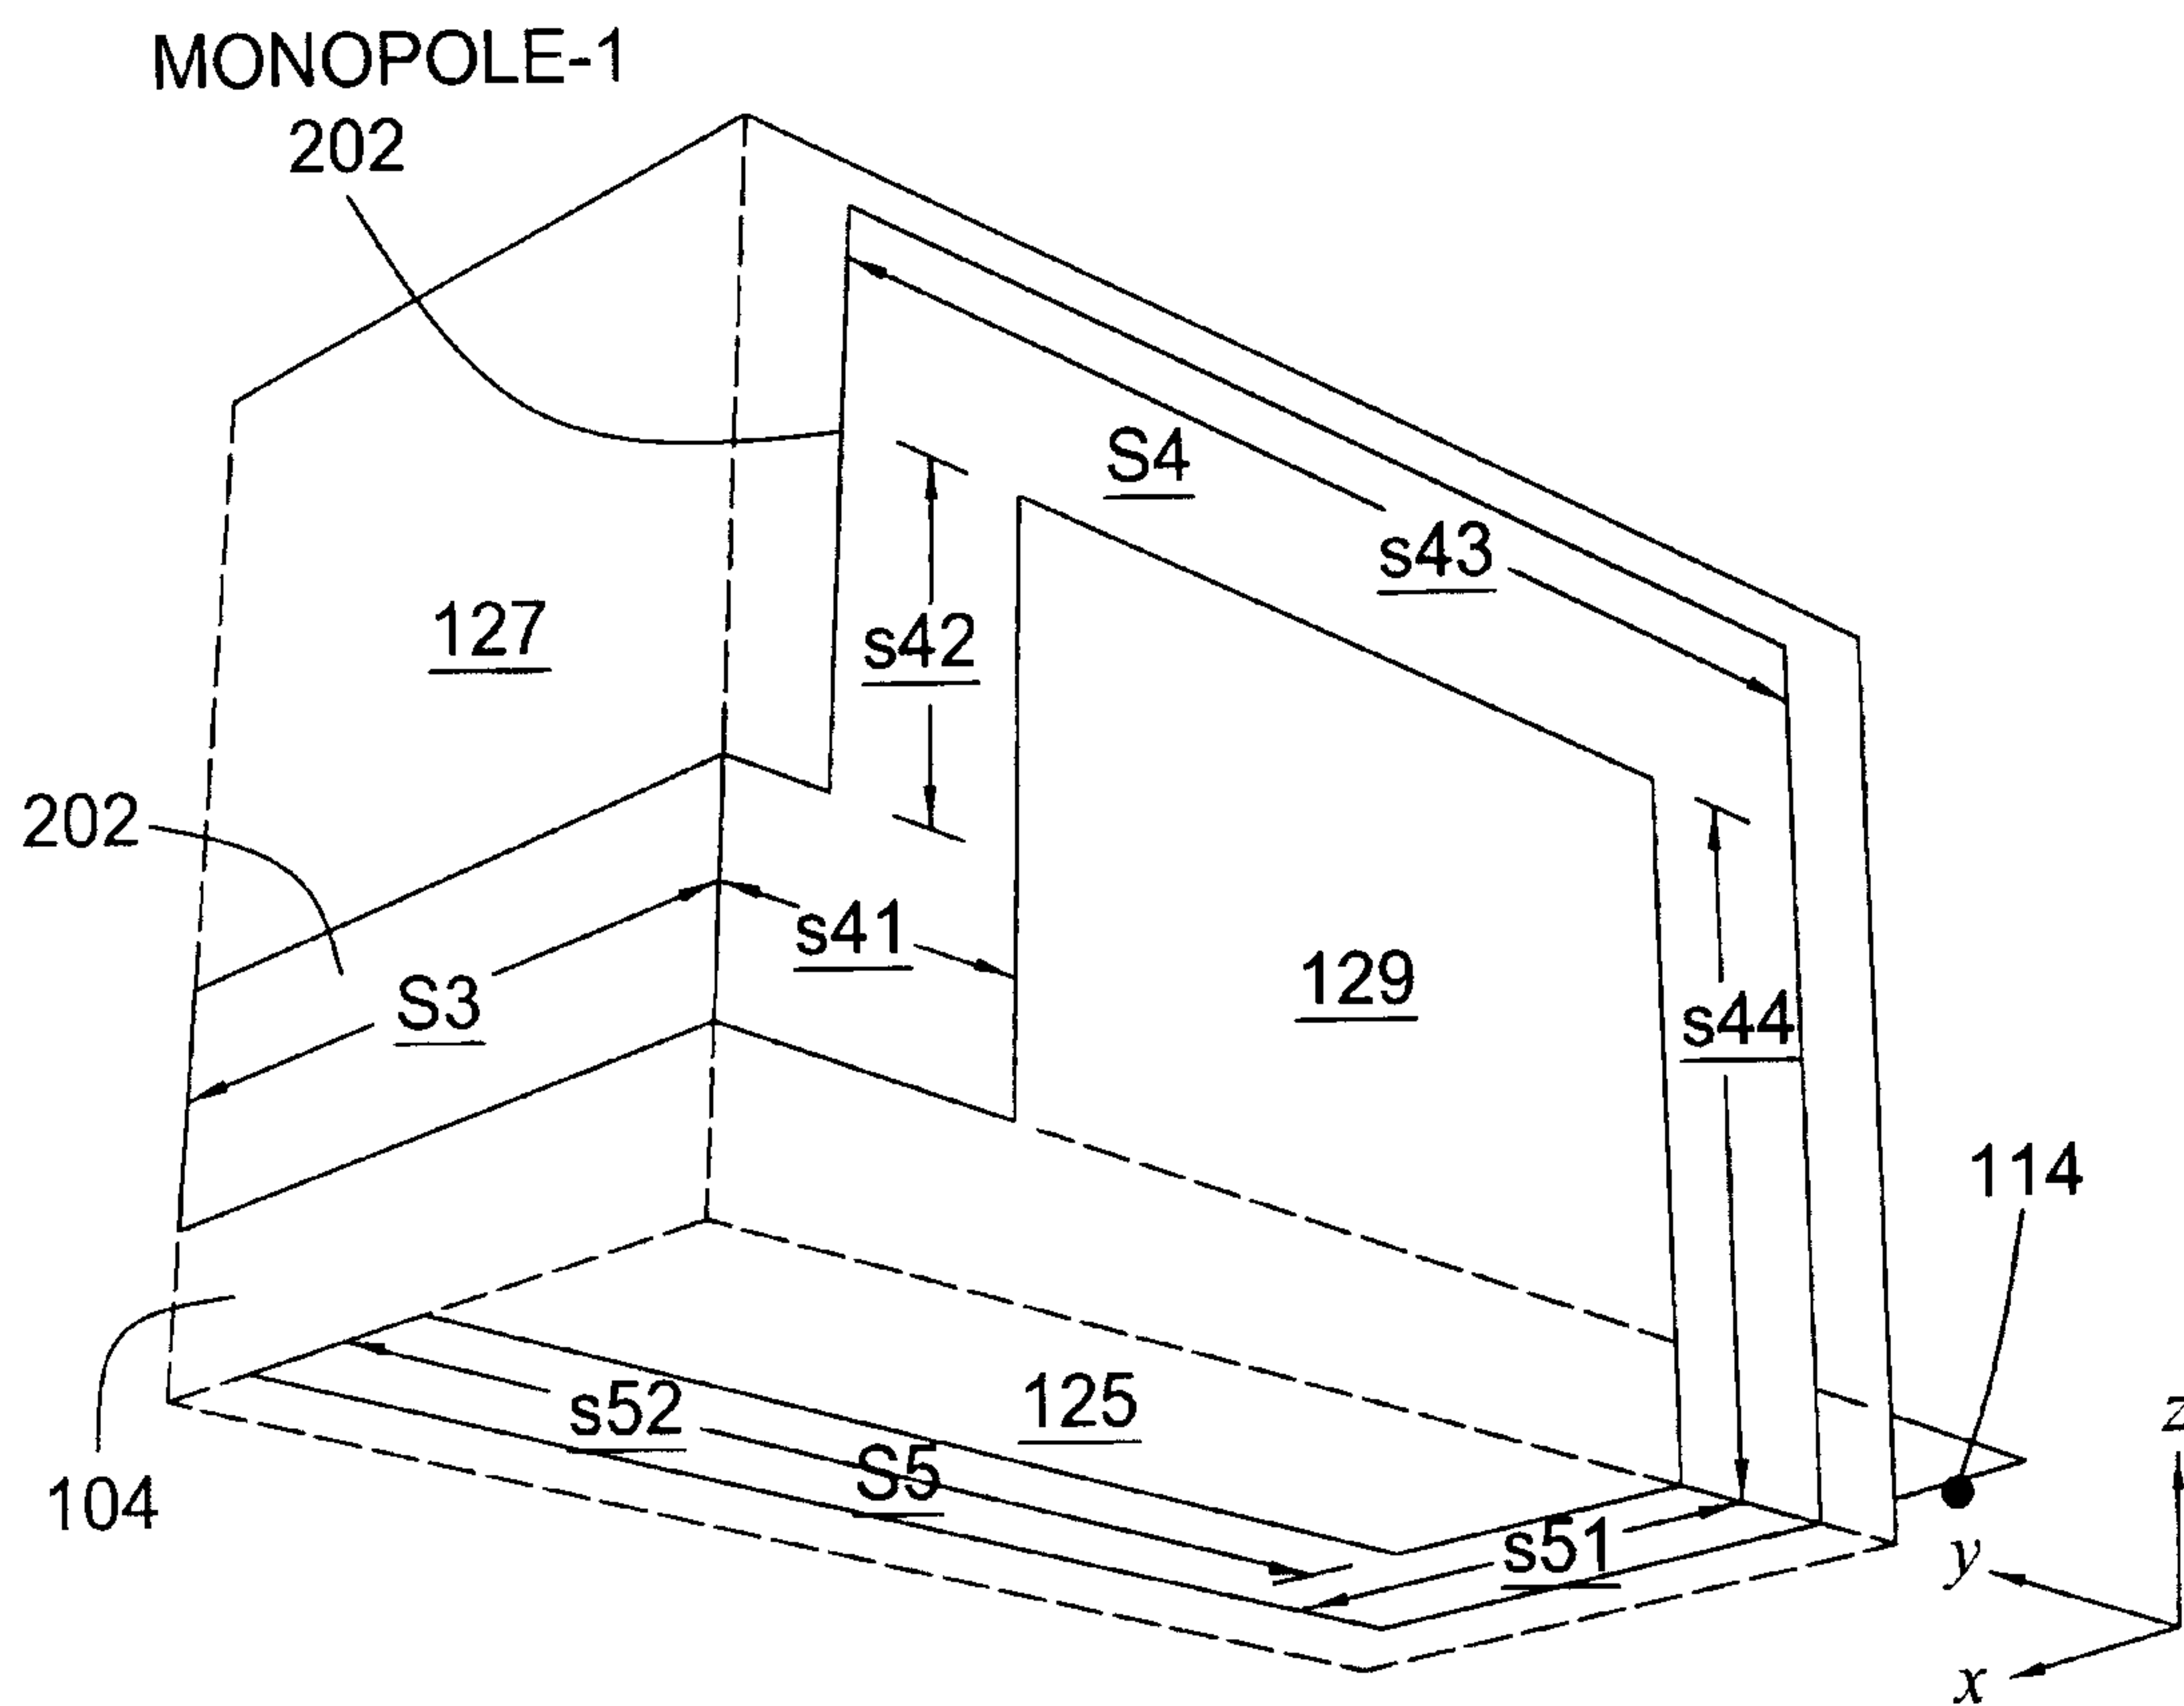


**FIG. 2b**

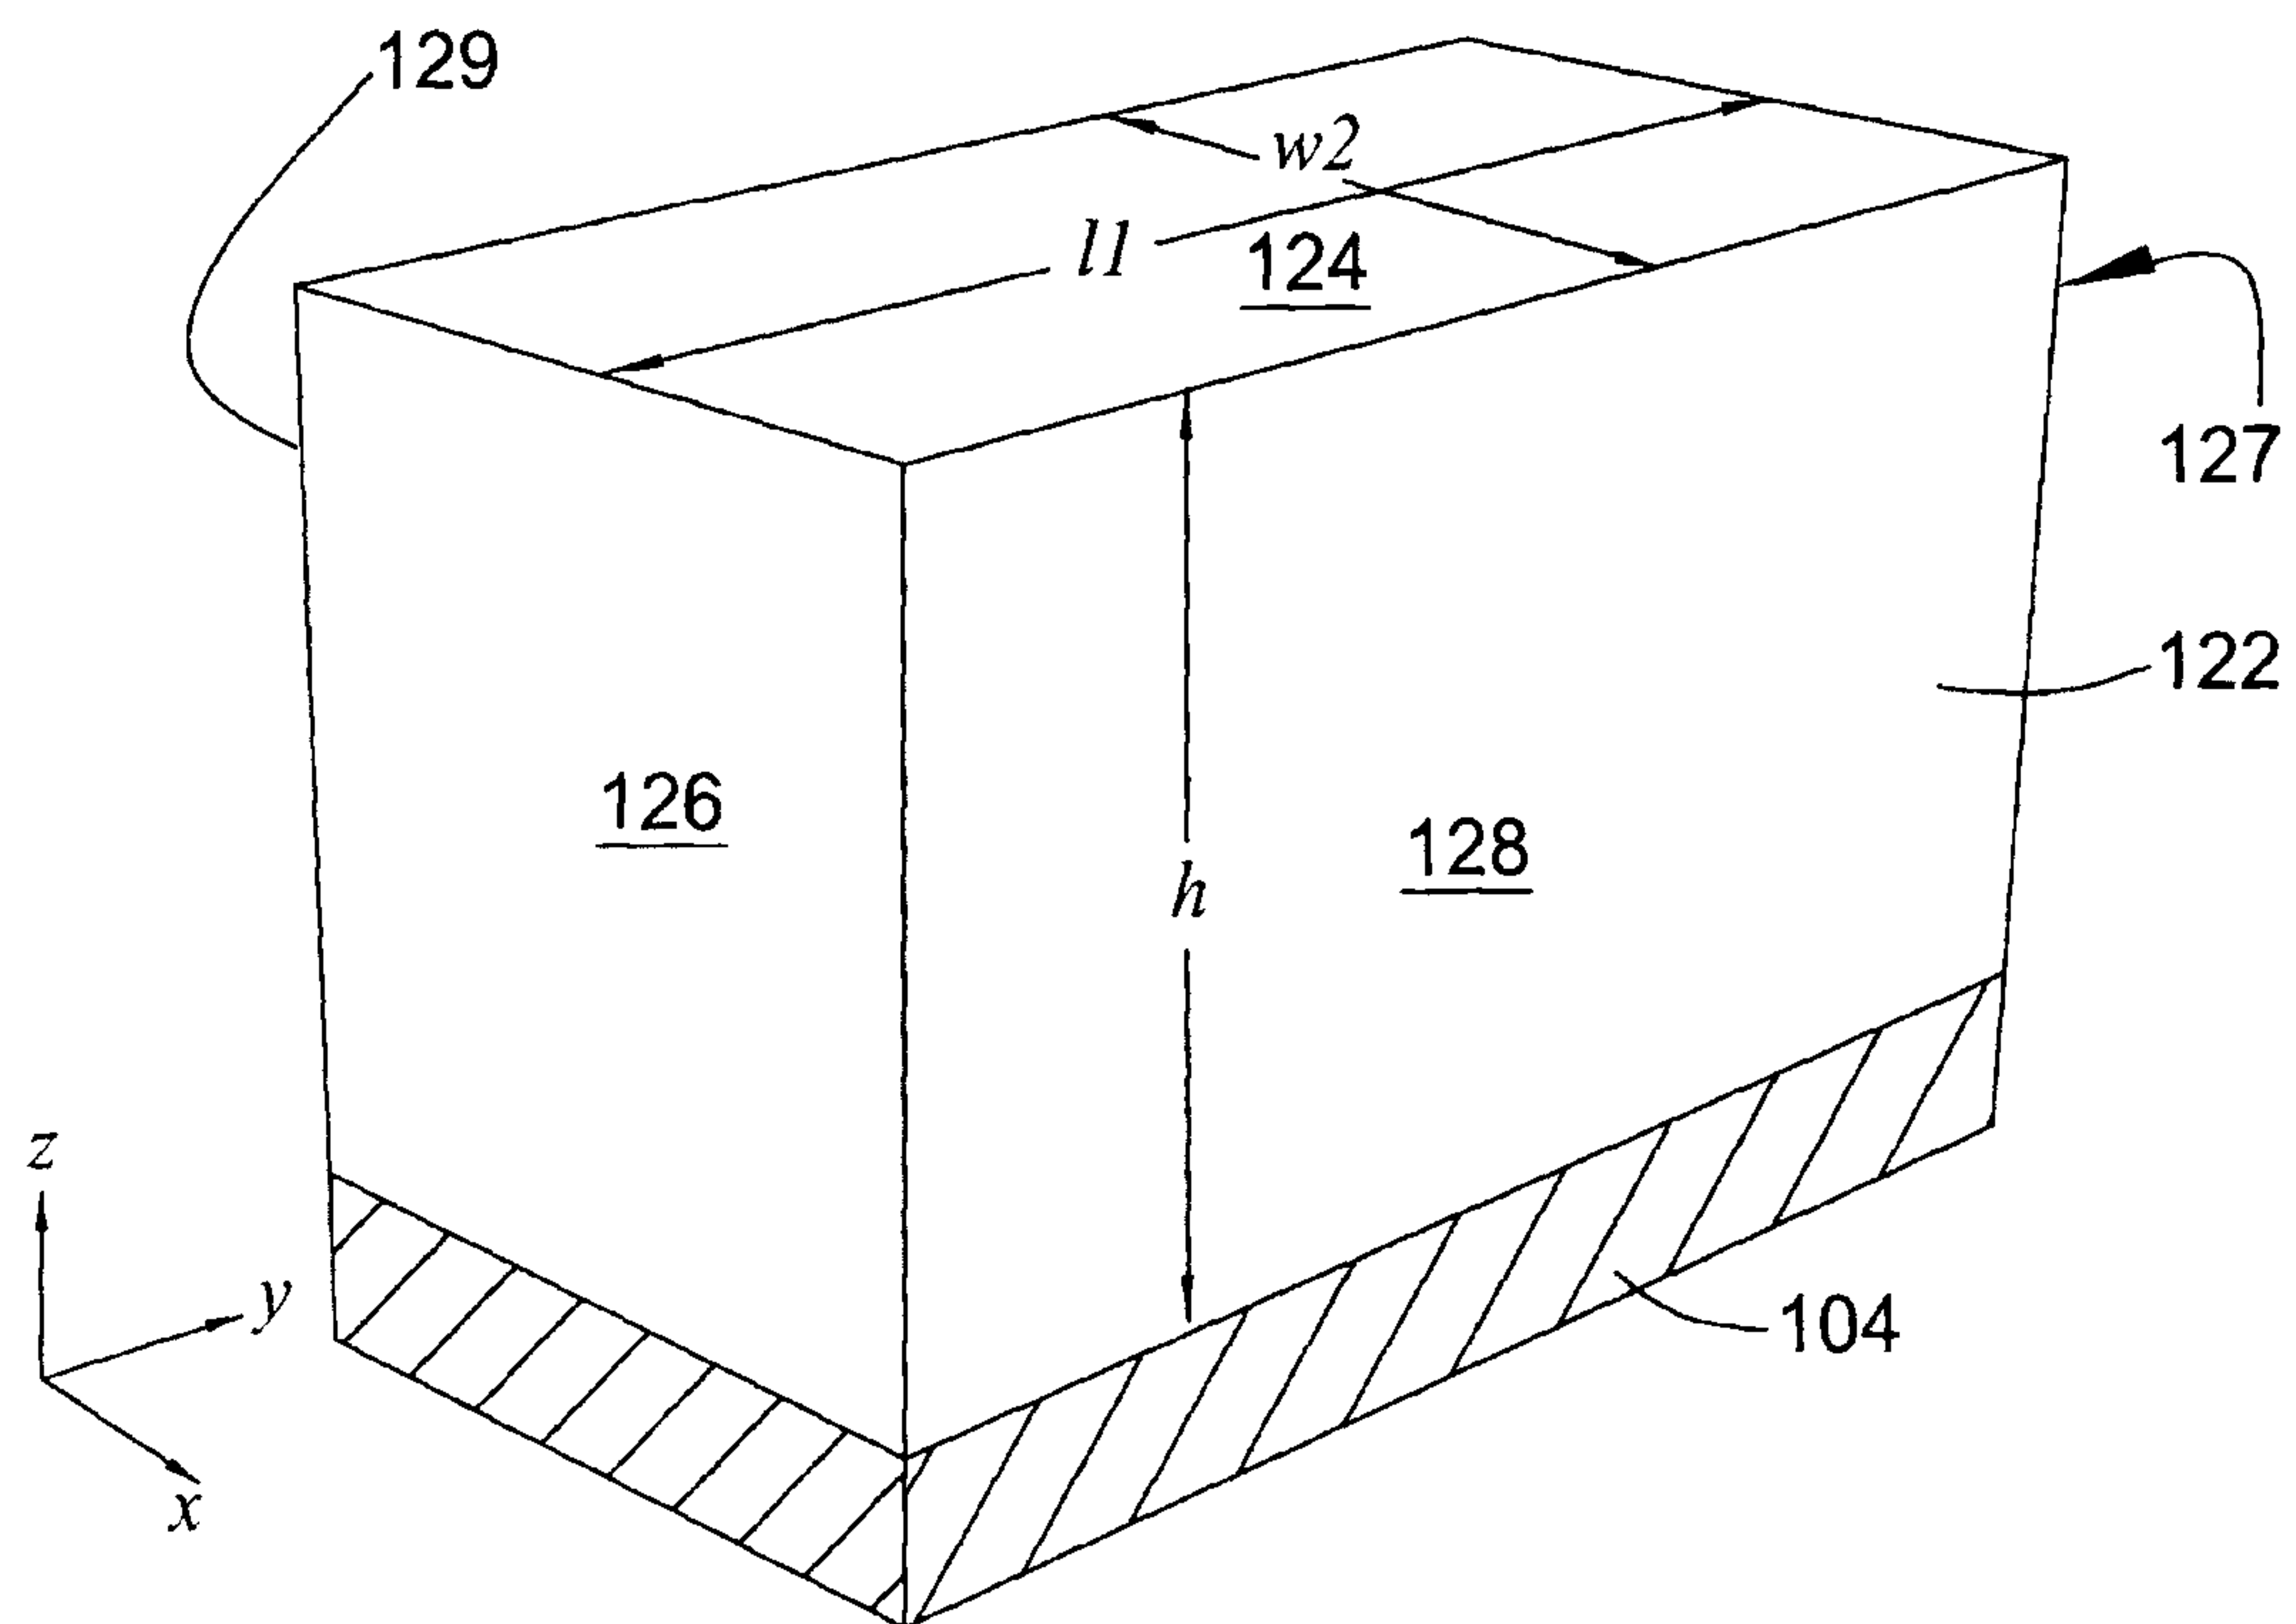
4/32

**FIG. 2c**

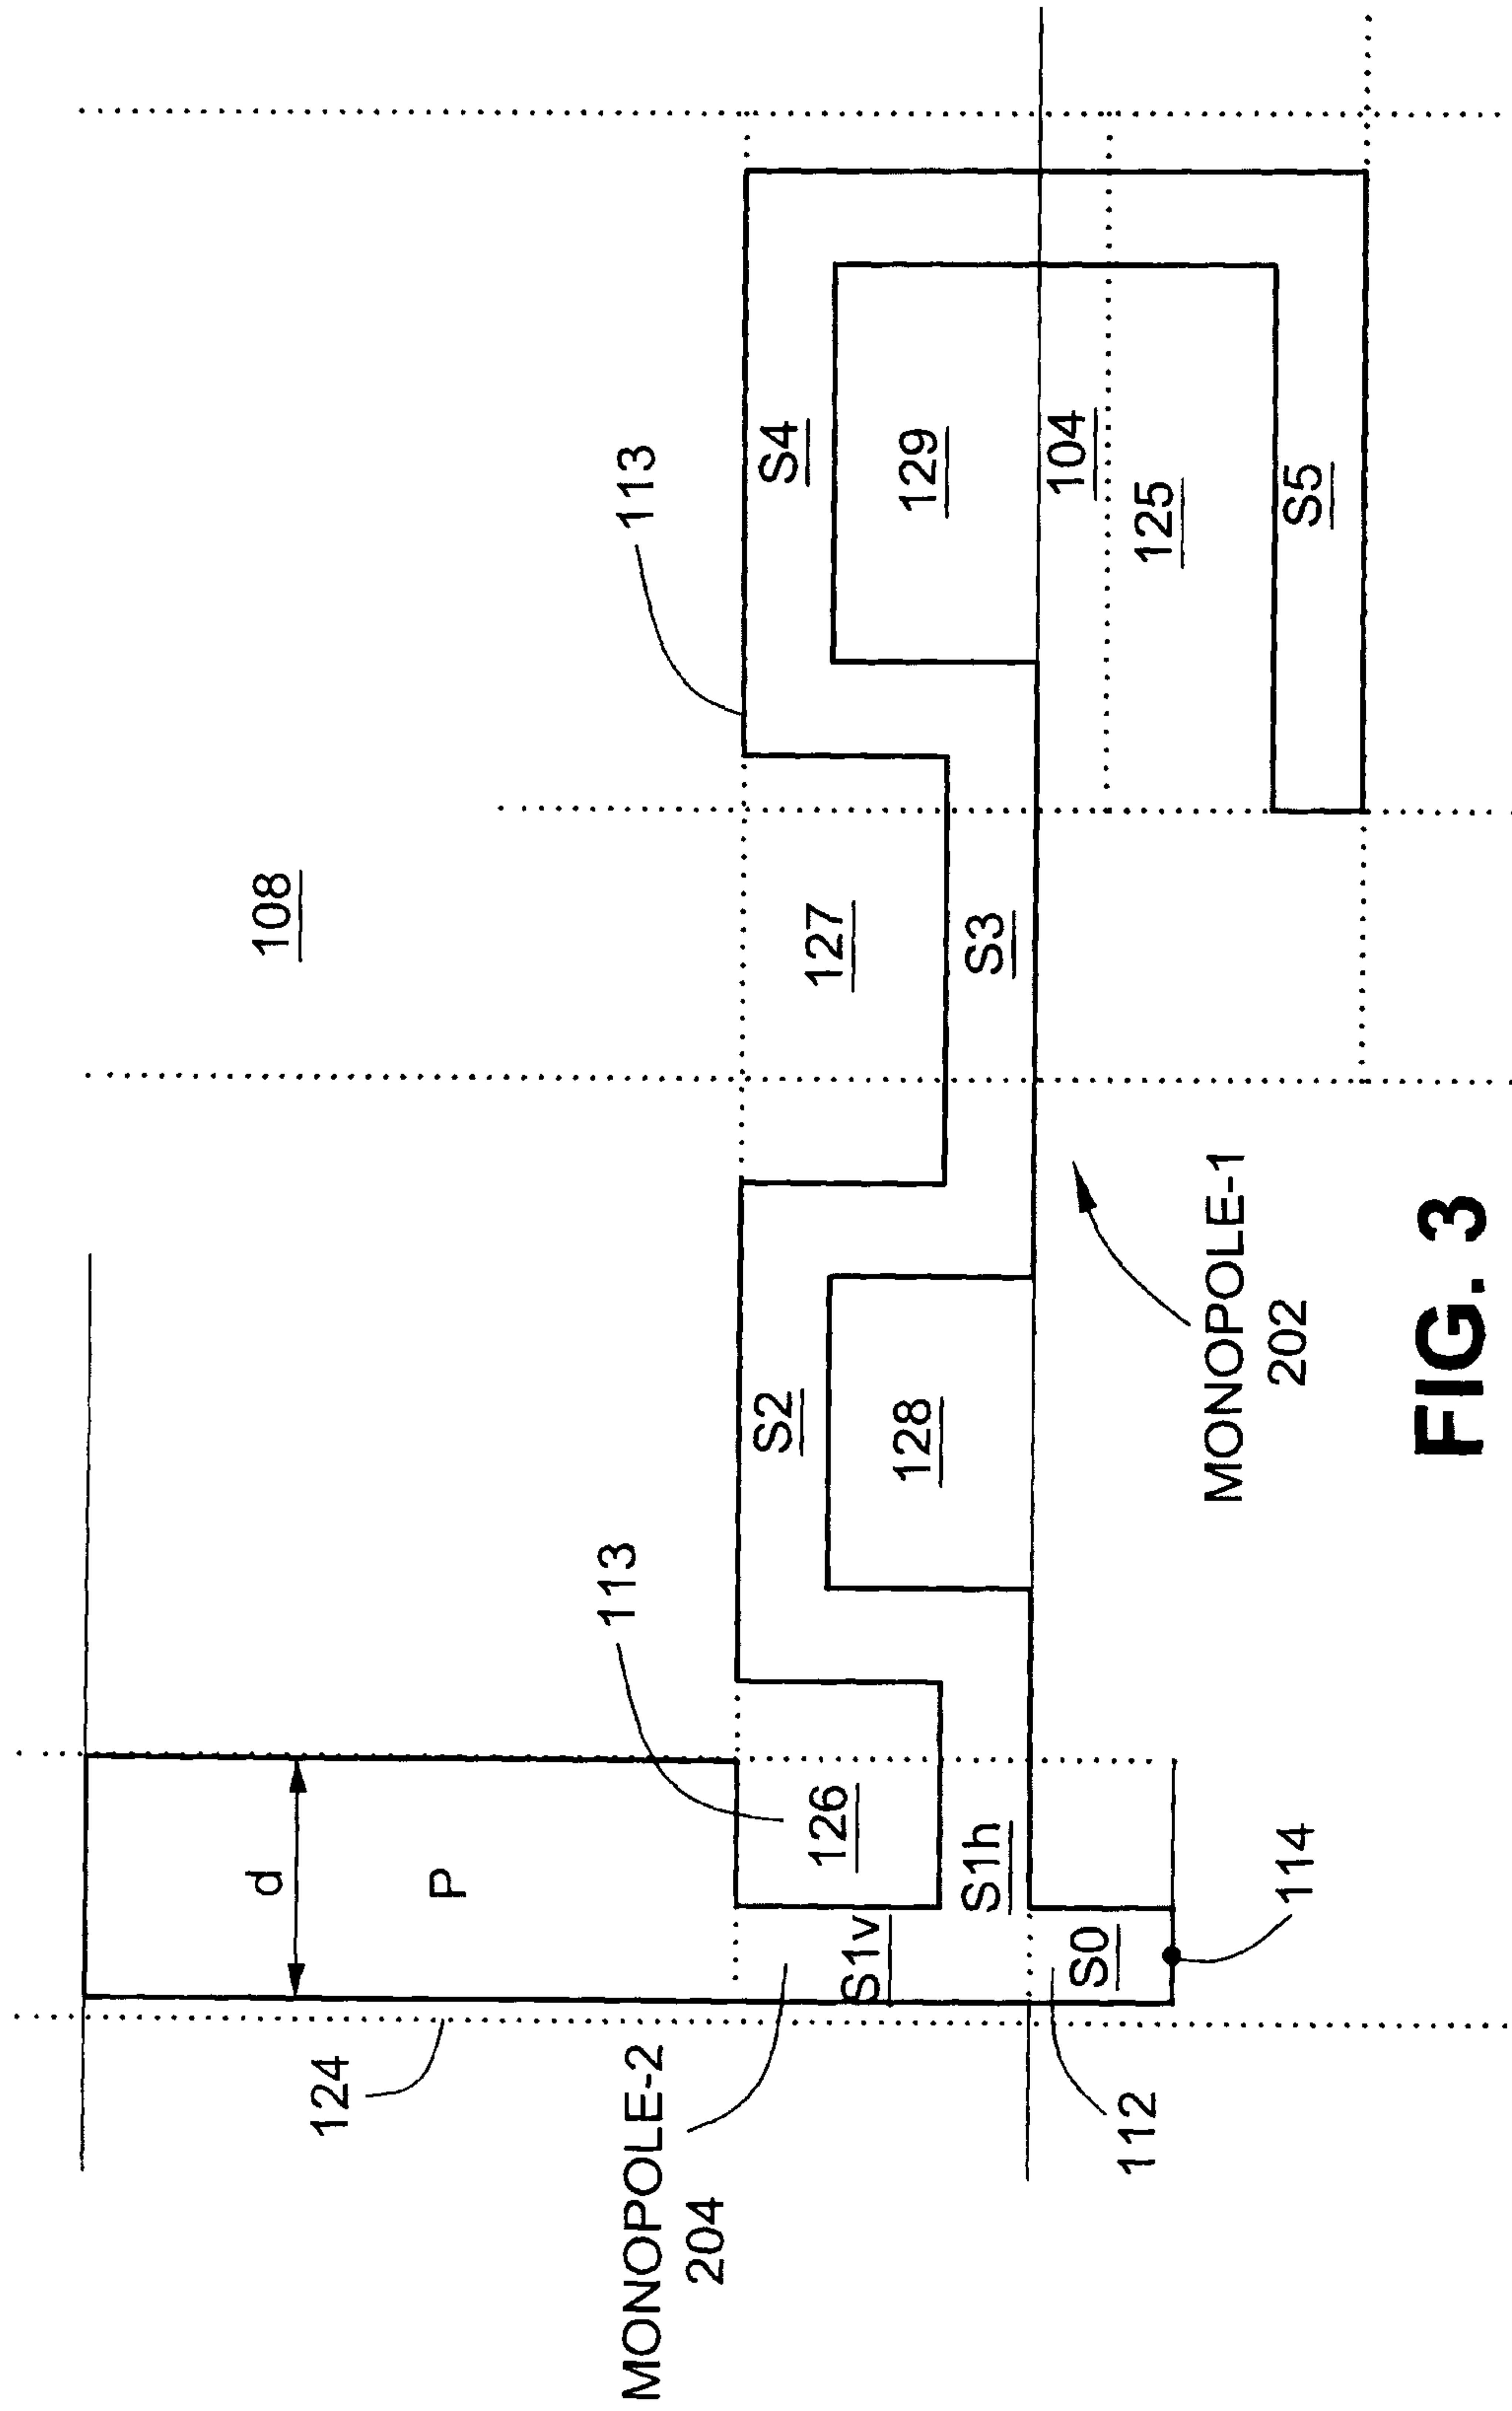
5/32

**FIG. 2d**

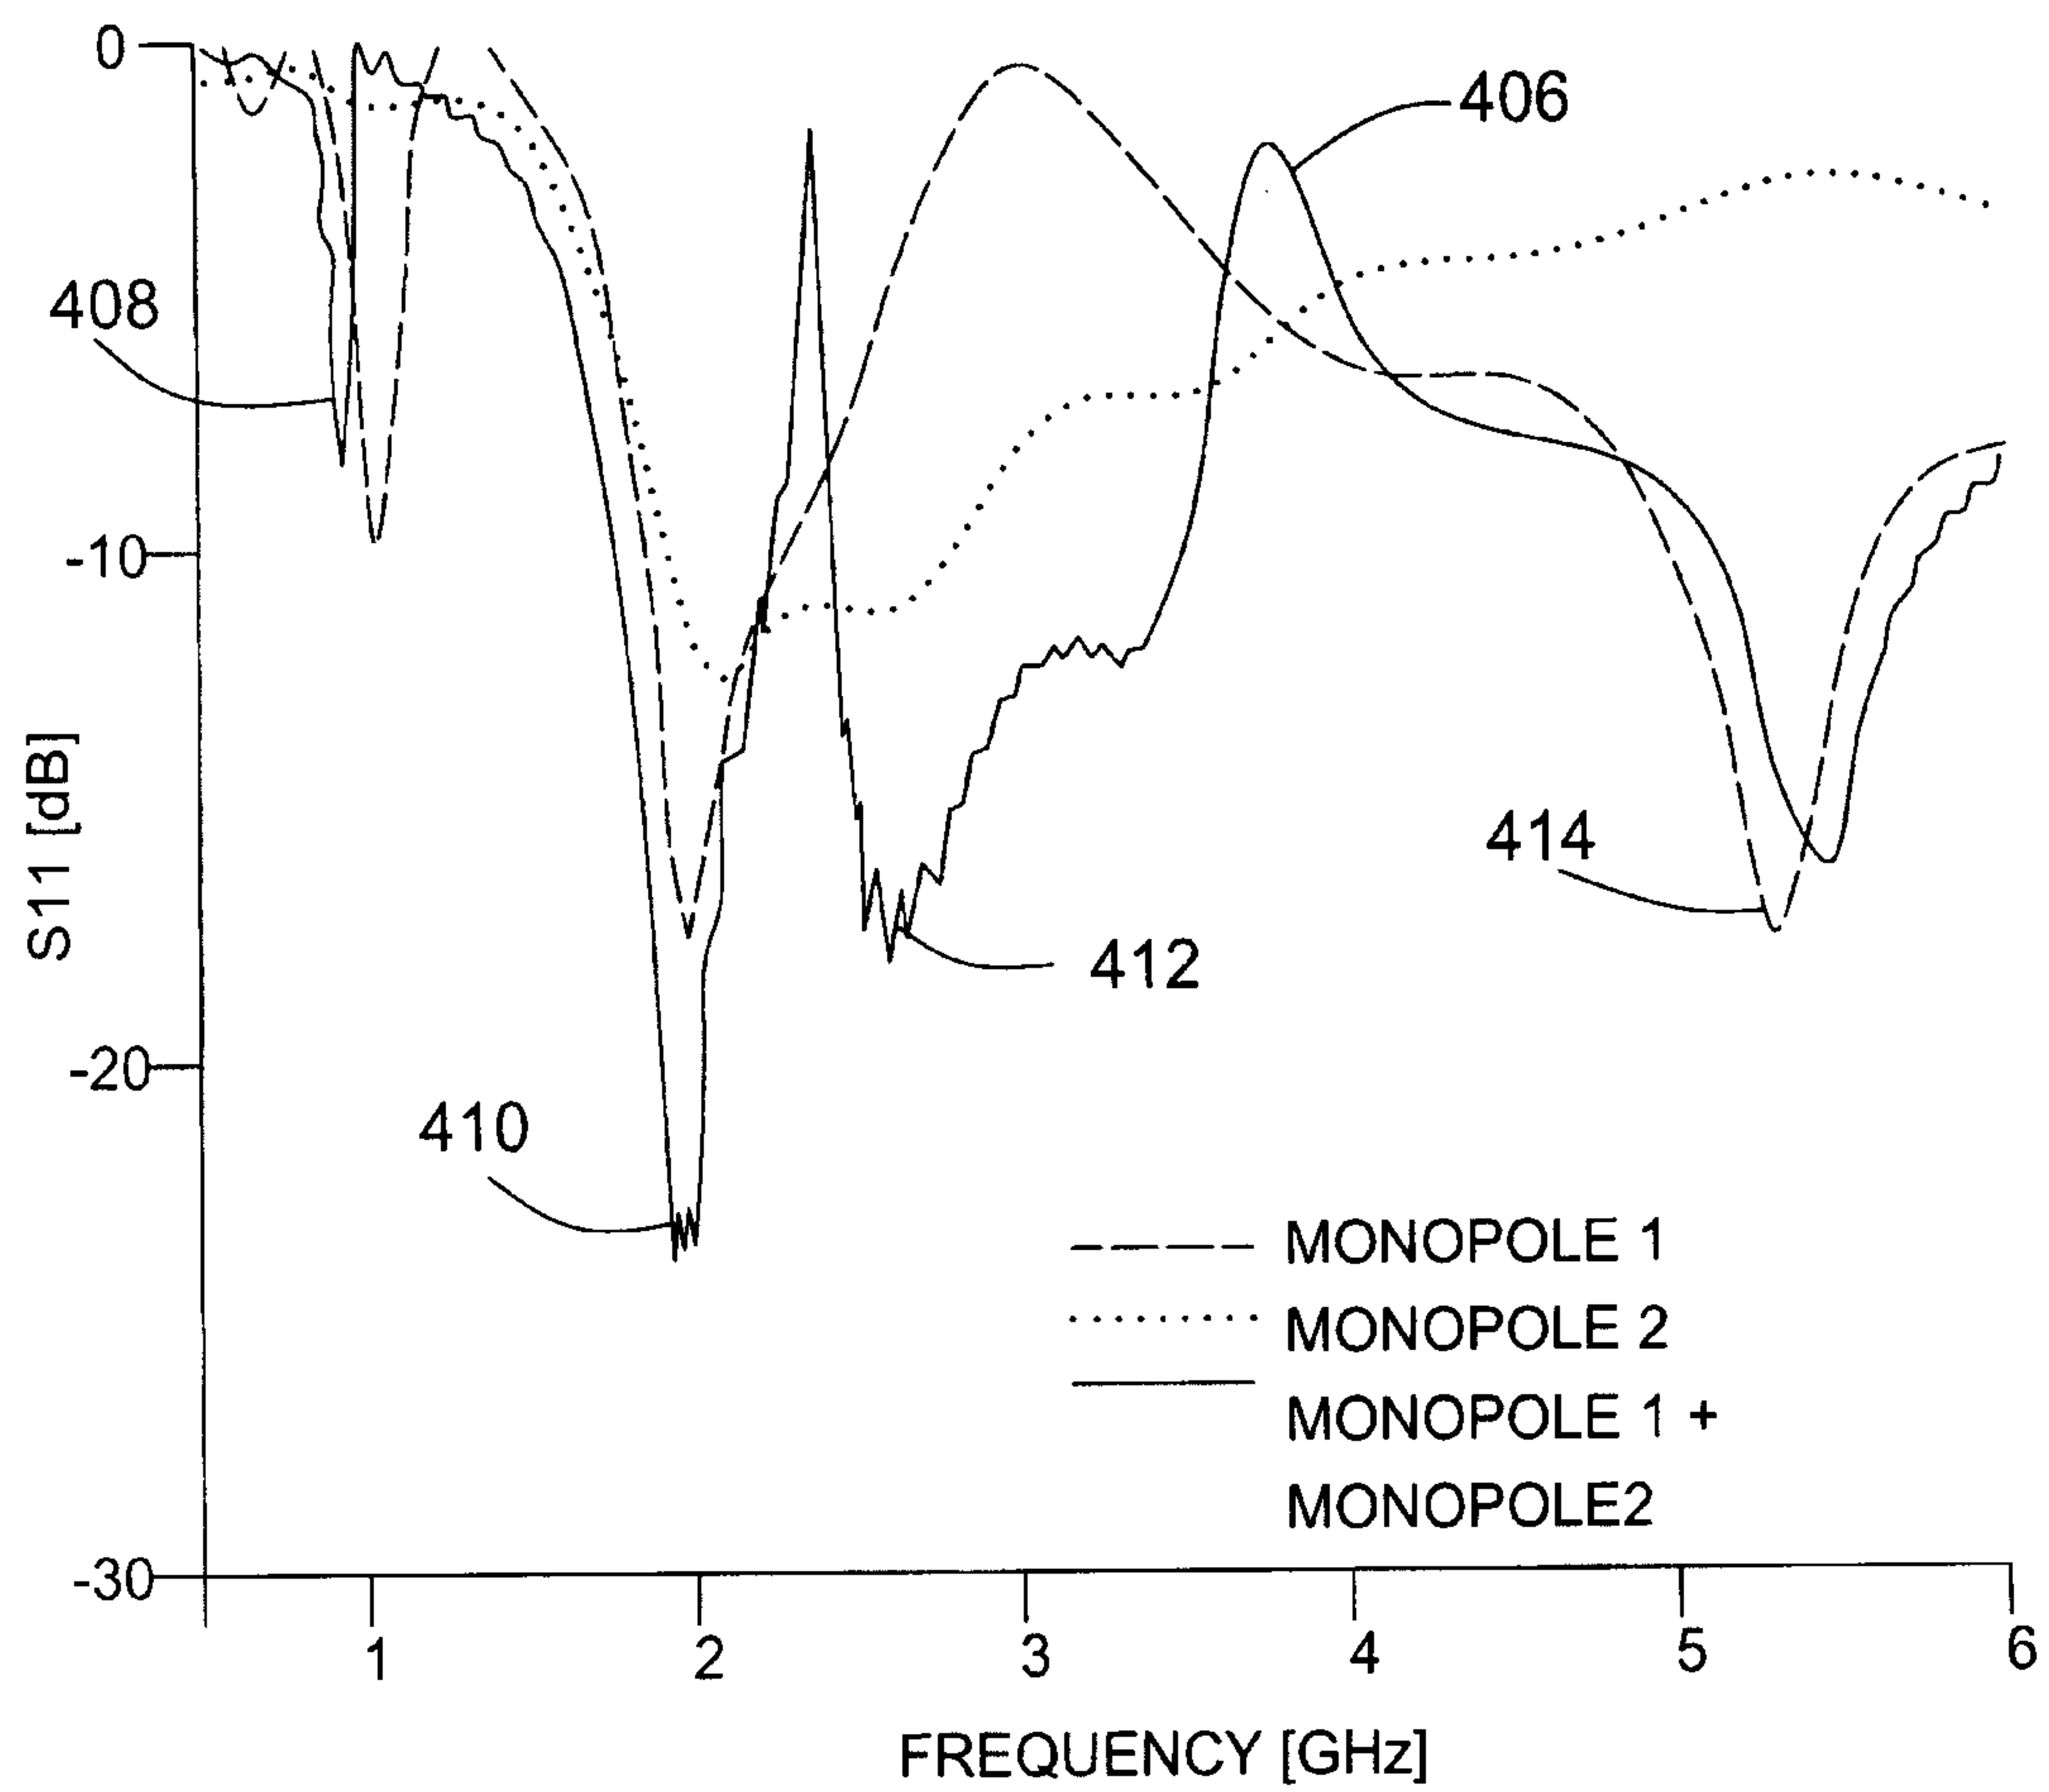
6/32

**FIG. 2e**

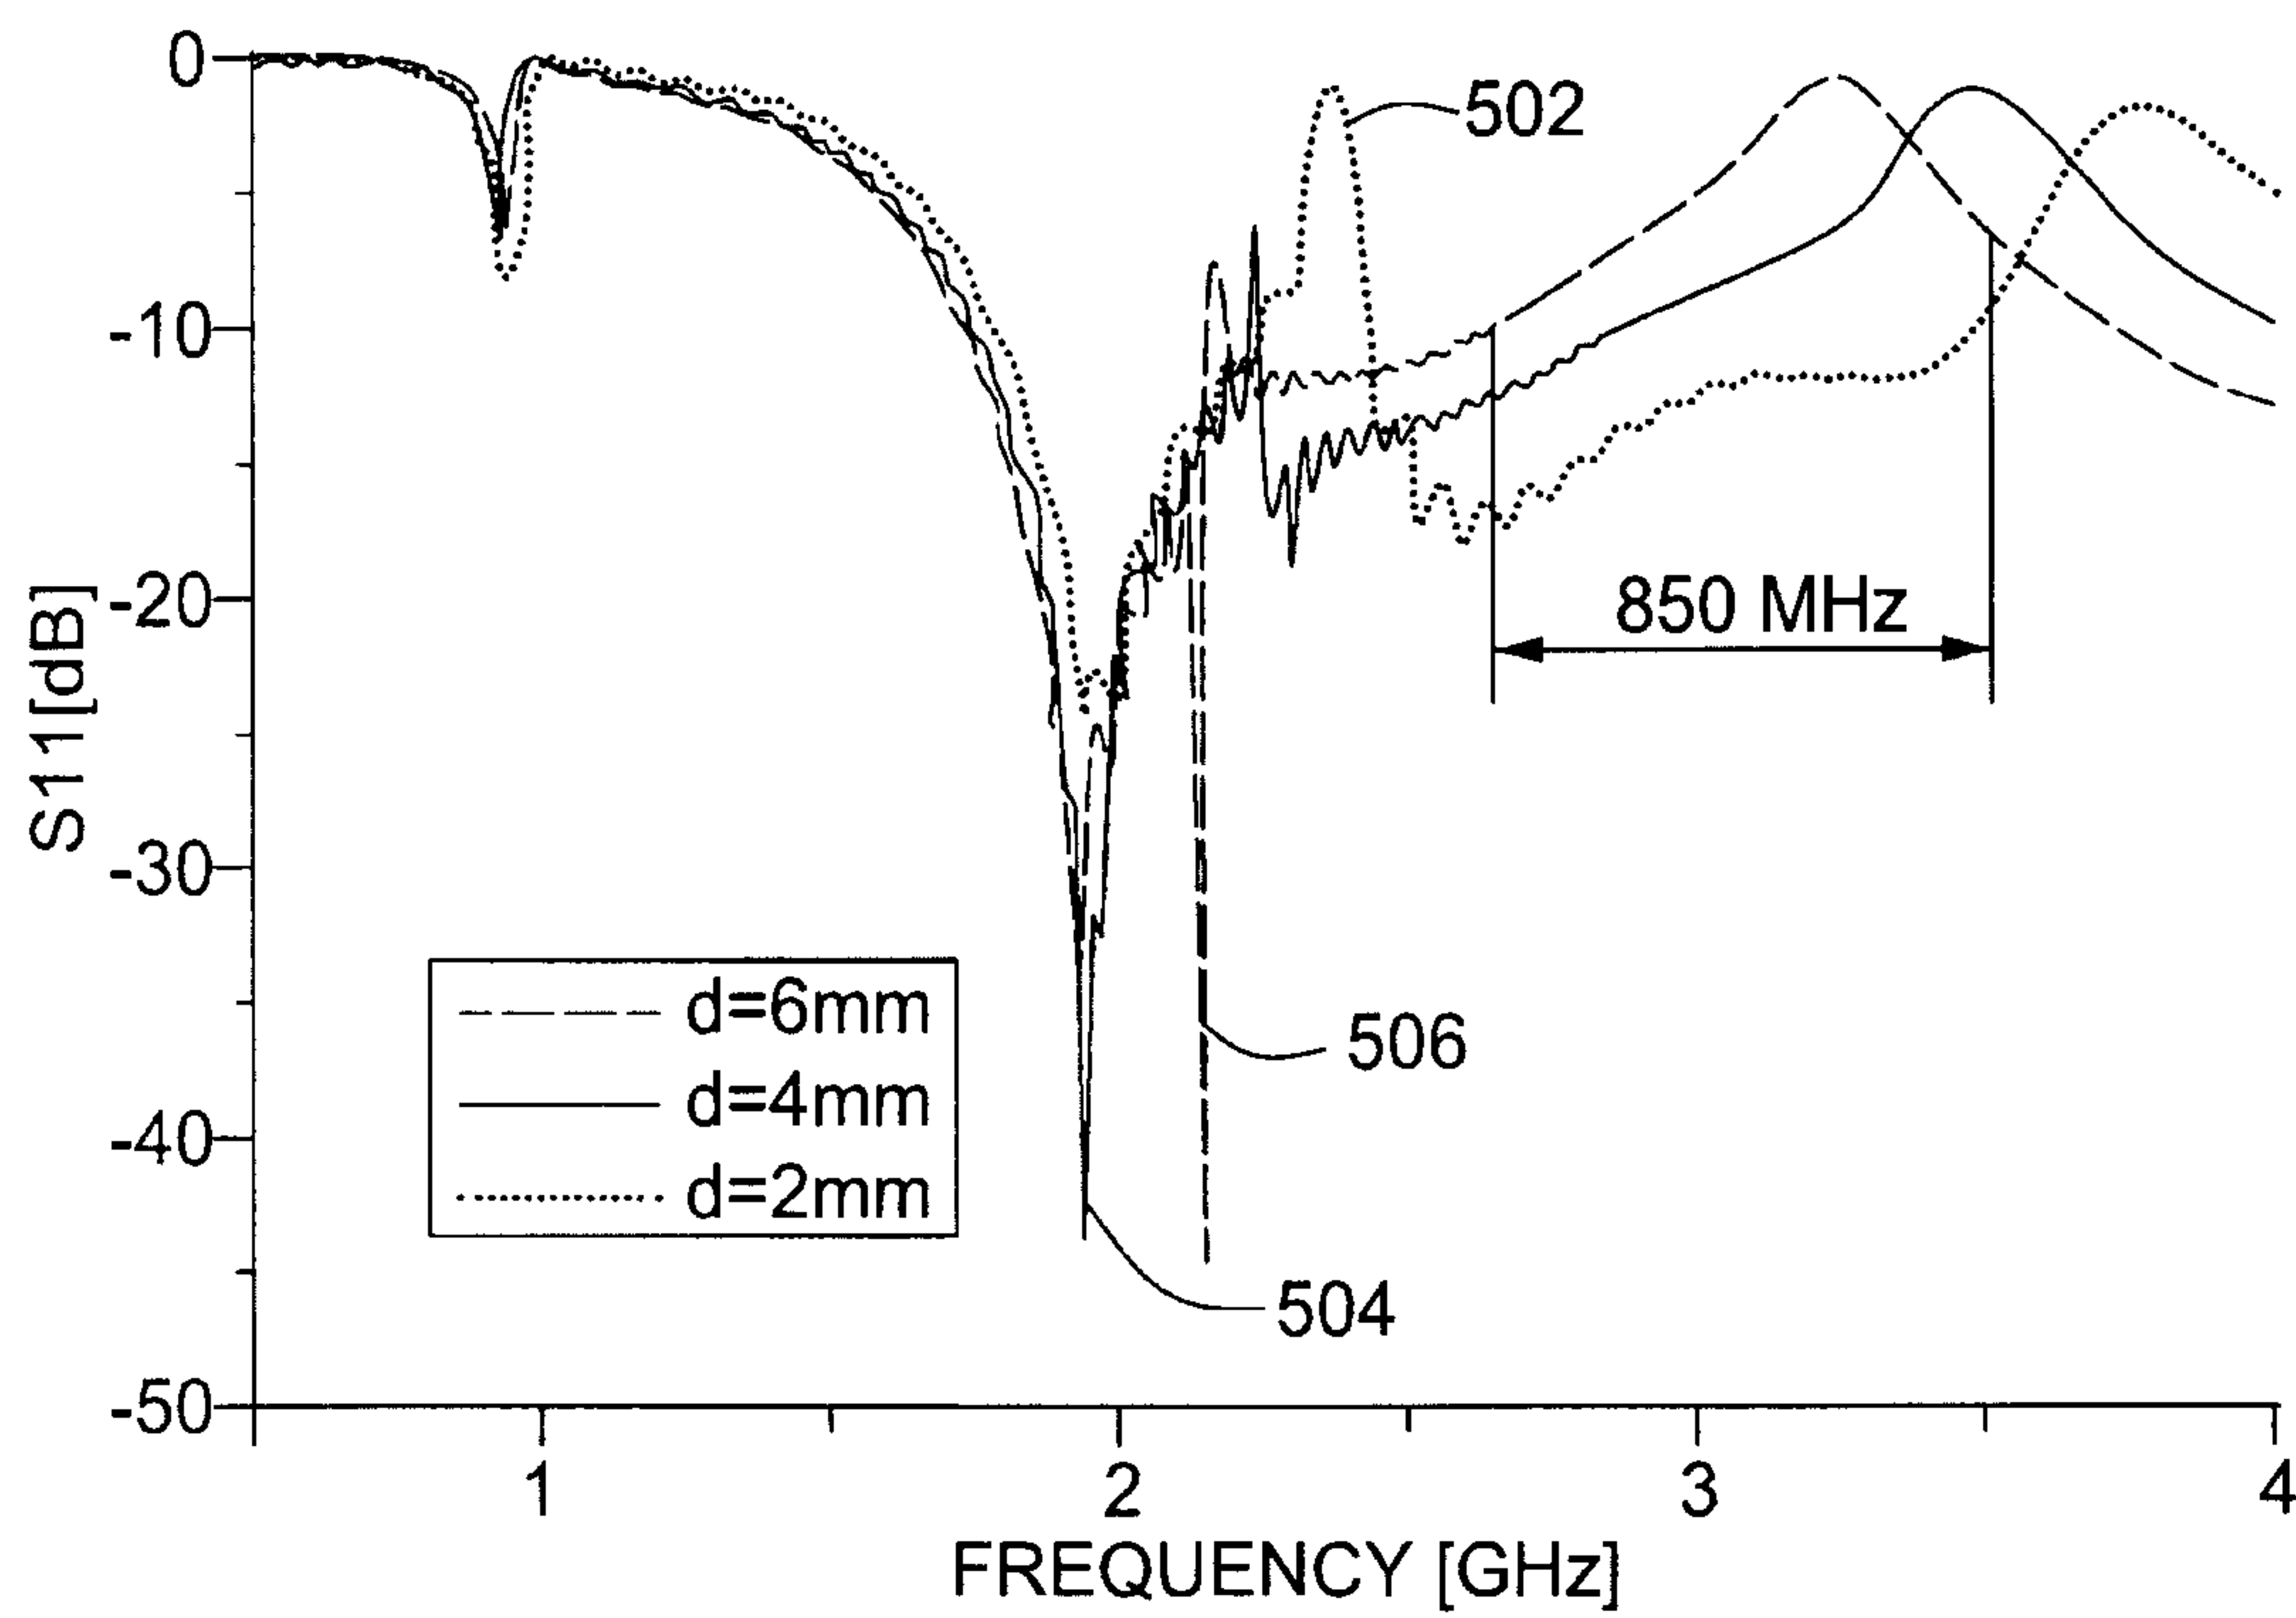
7/32

**FIG. 3**

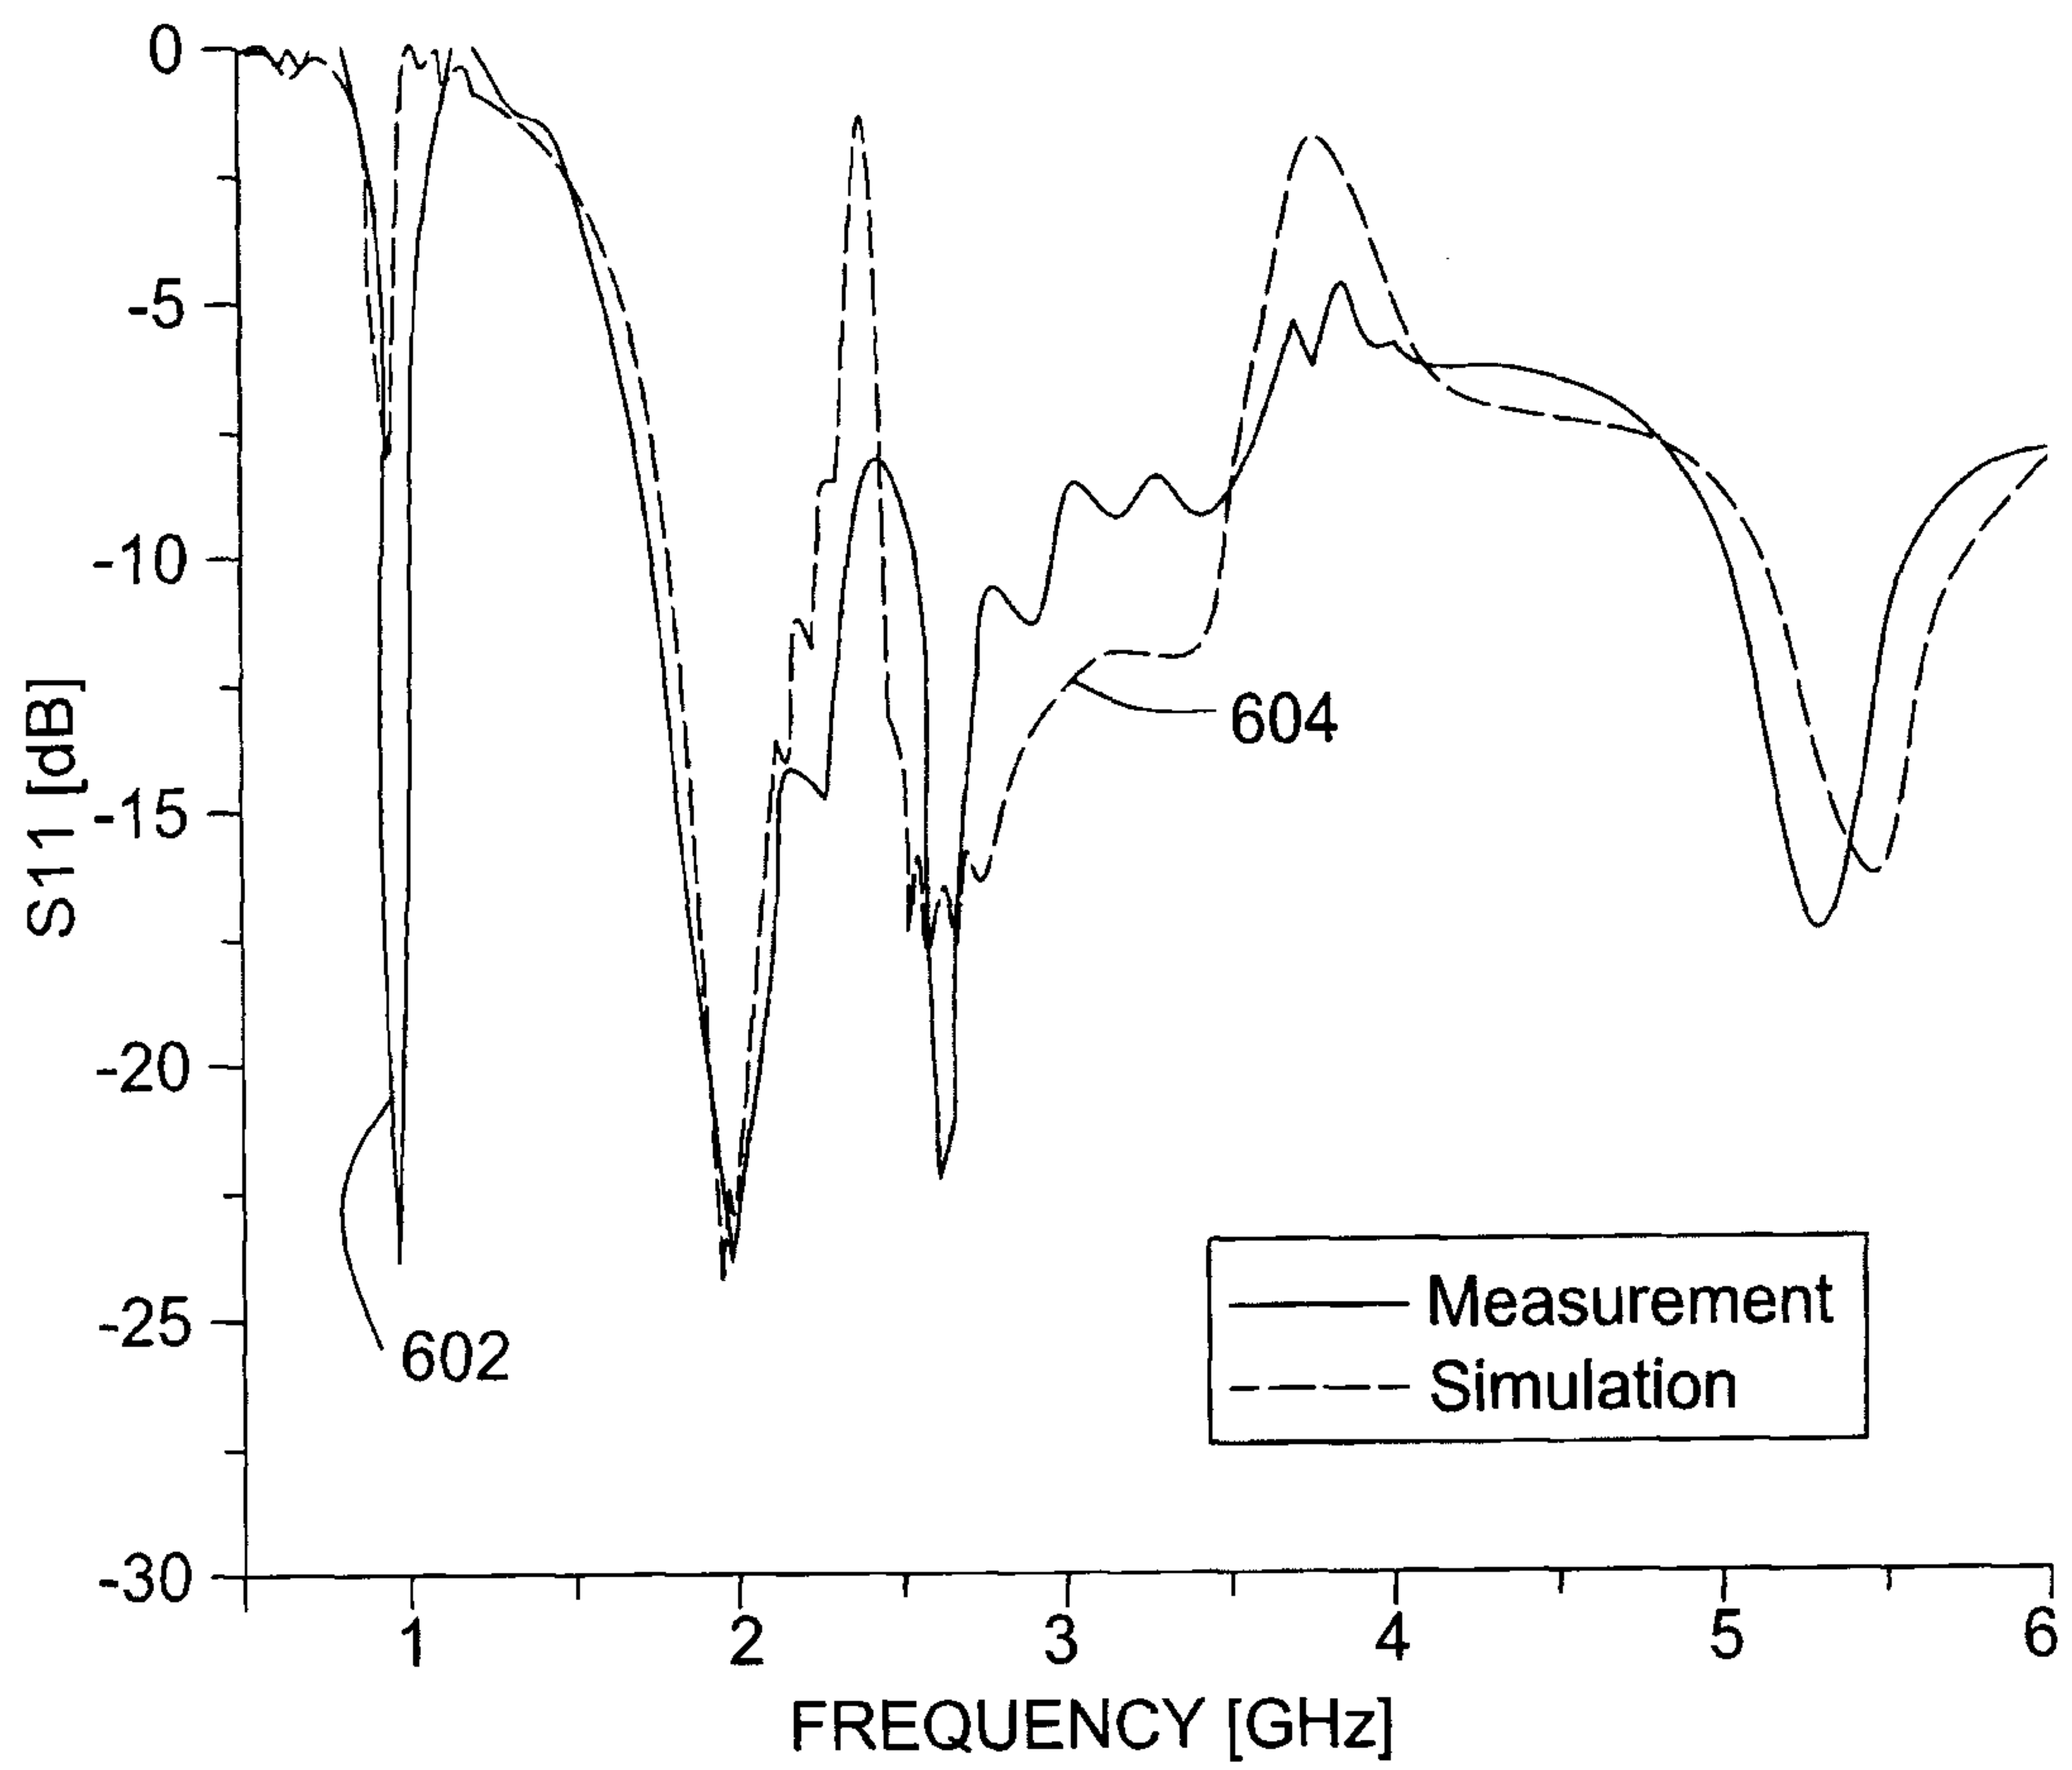
8/32

**FIG. 4**

9/32

**FIG. 5**

10/32

**FIG. 6**

11/32

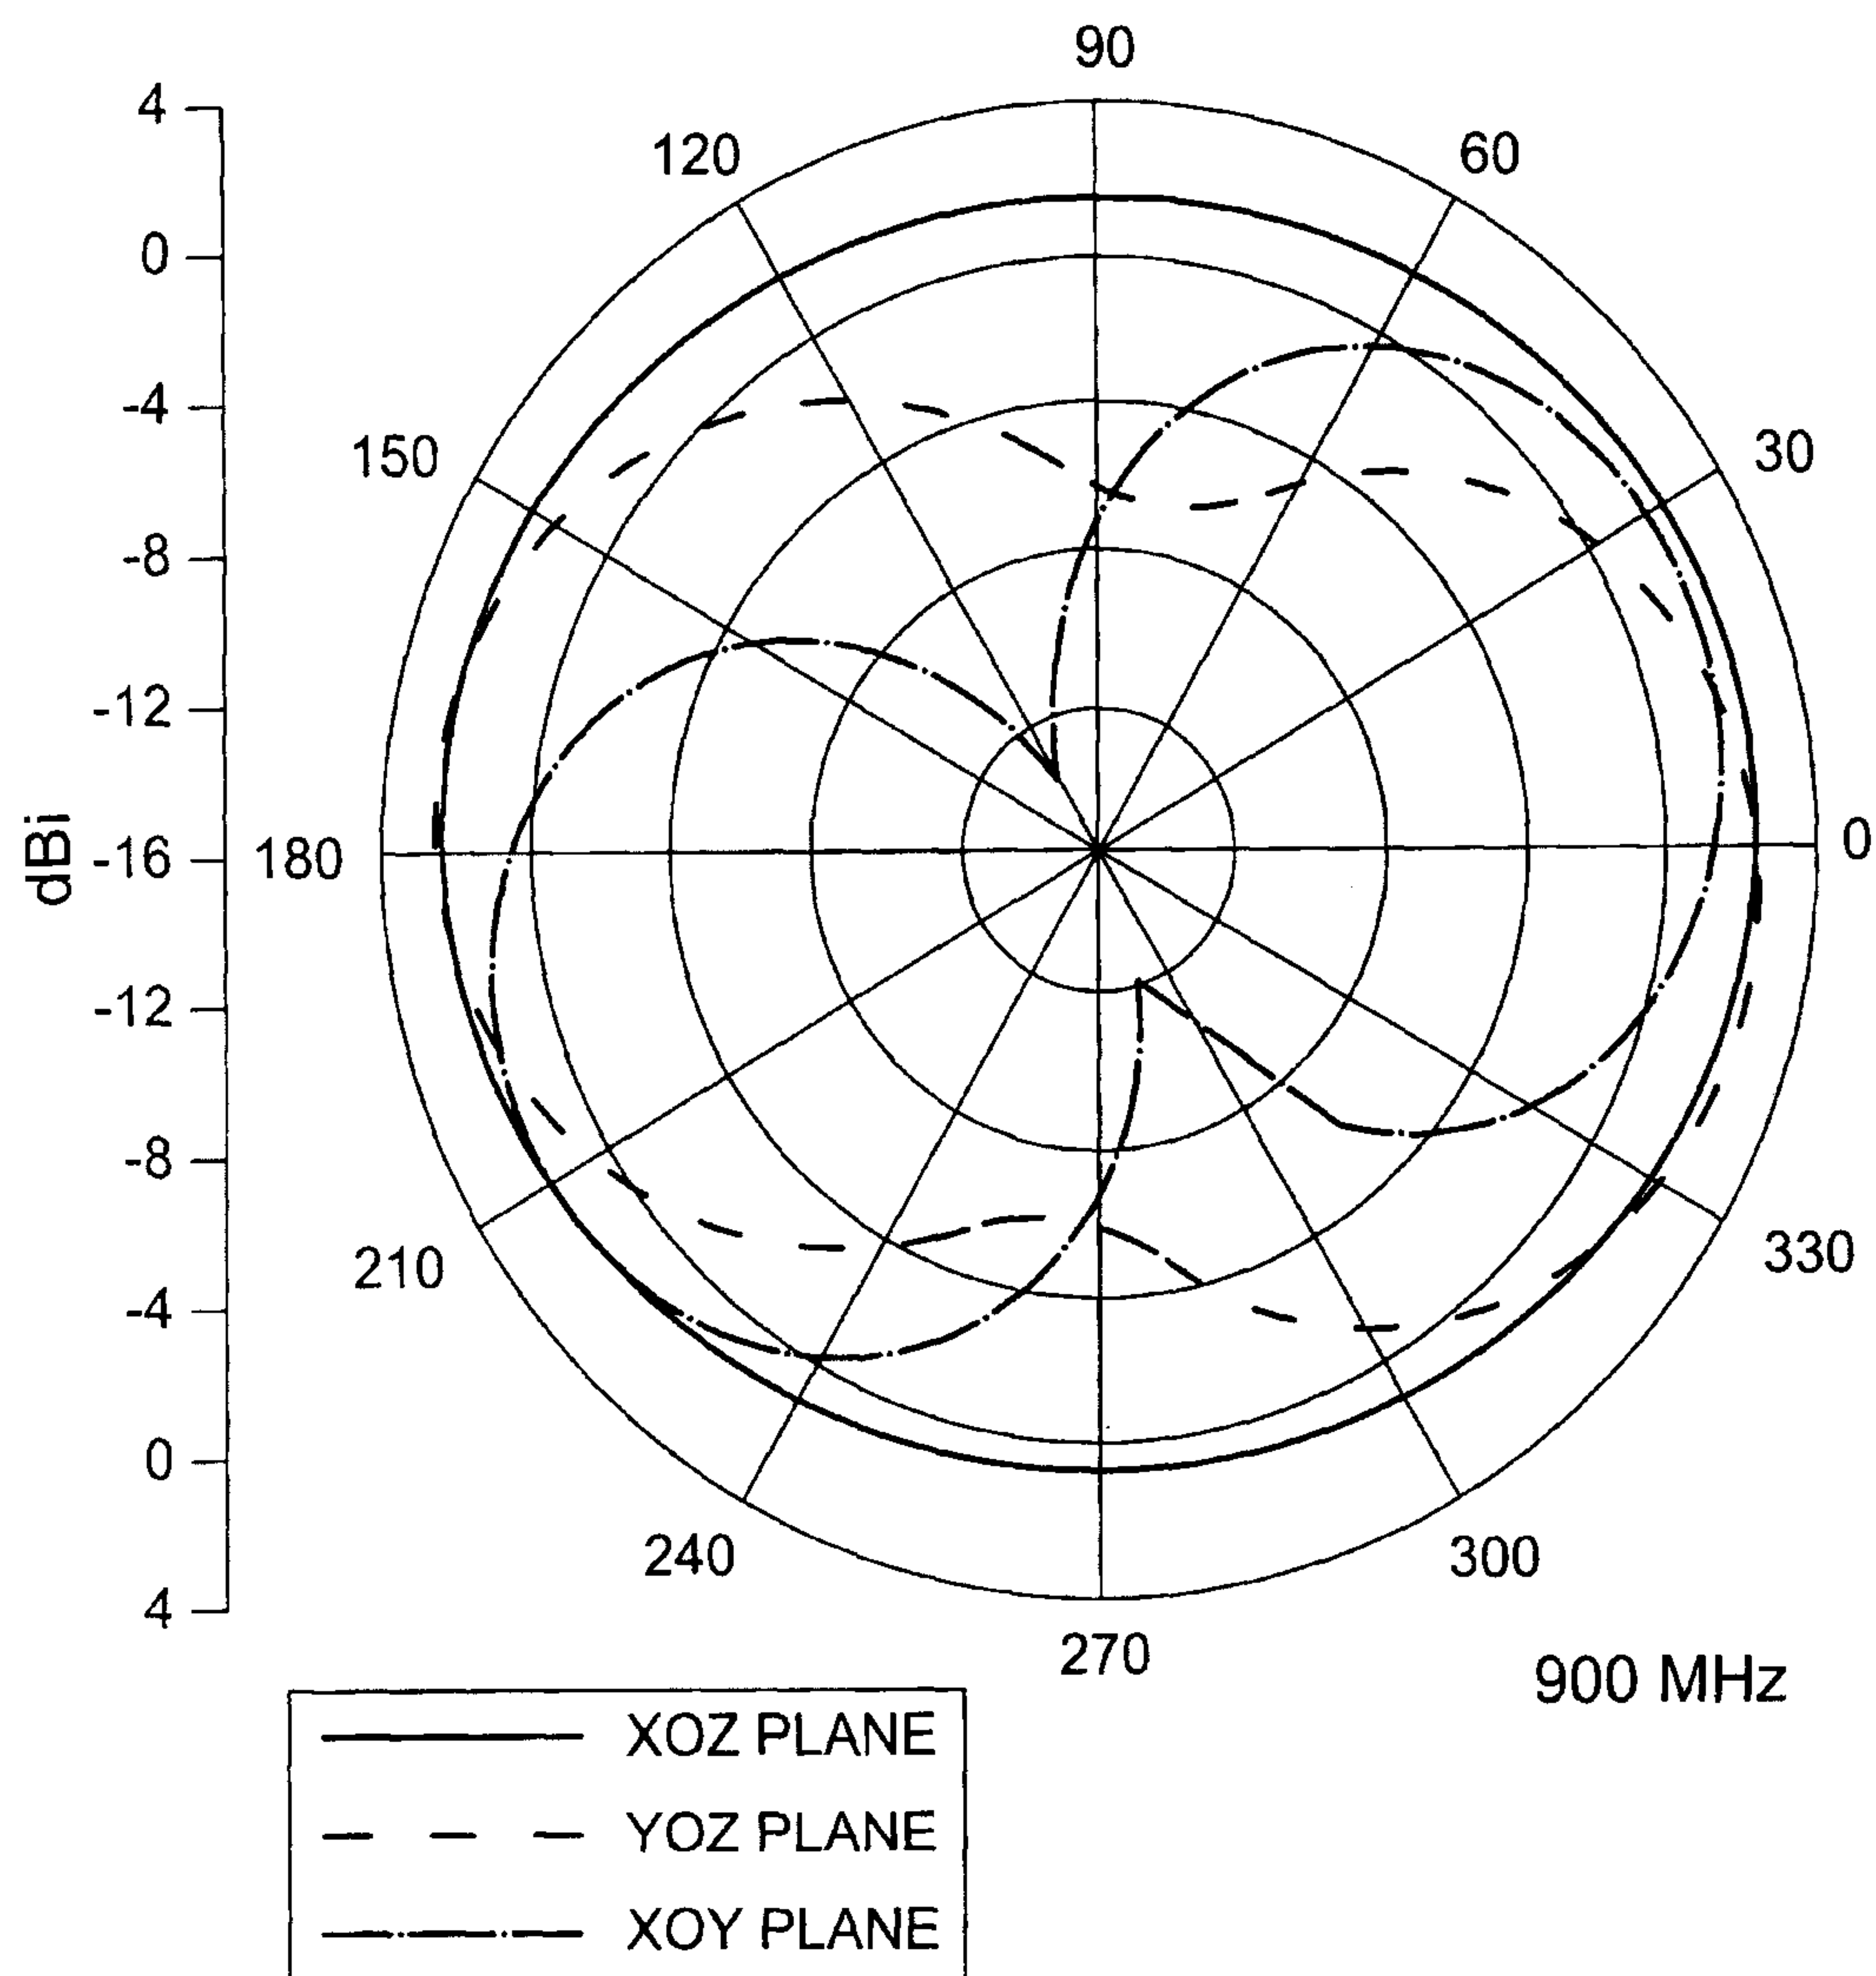


FIG. 7a

12/32

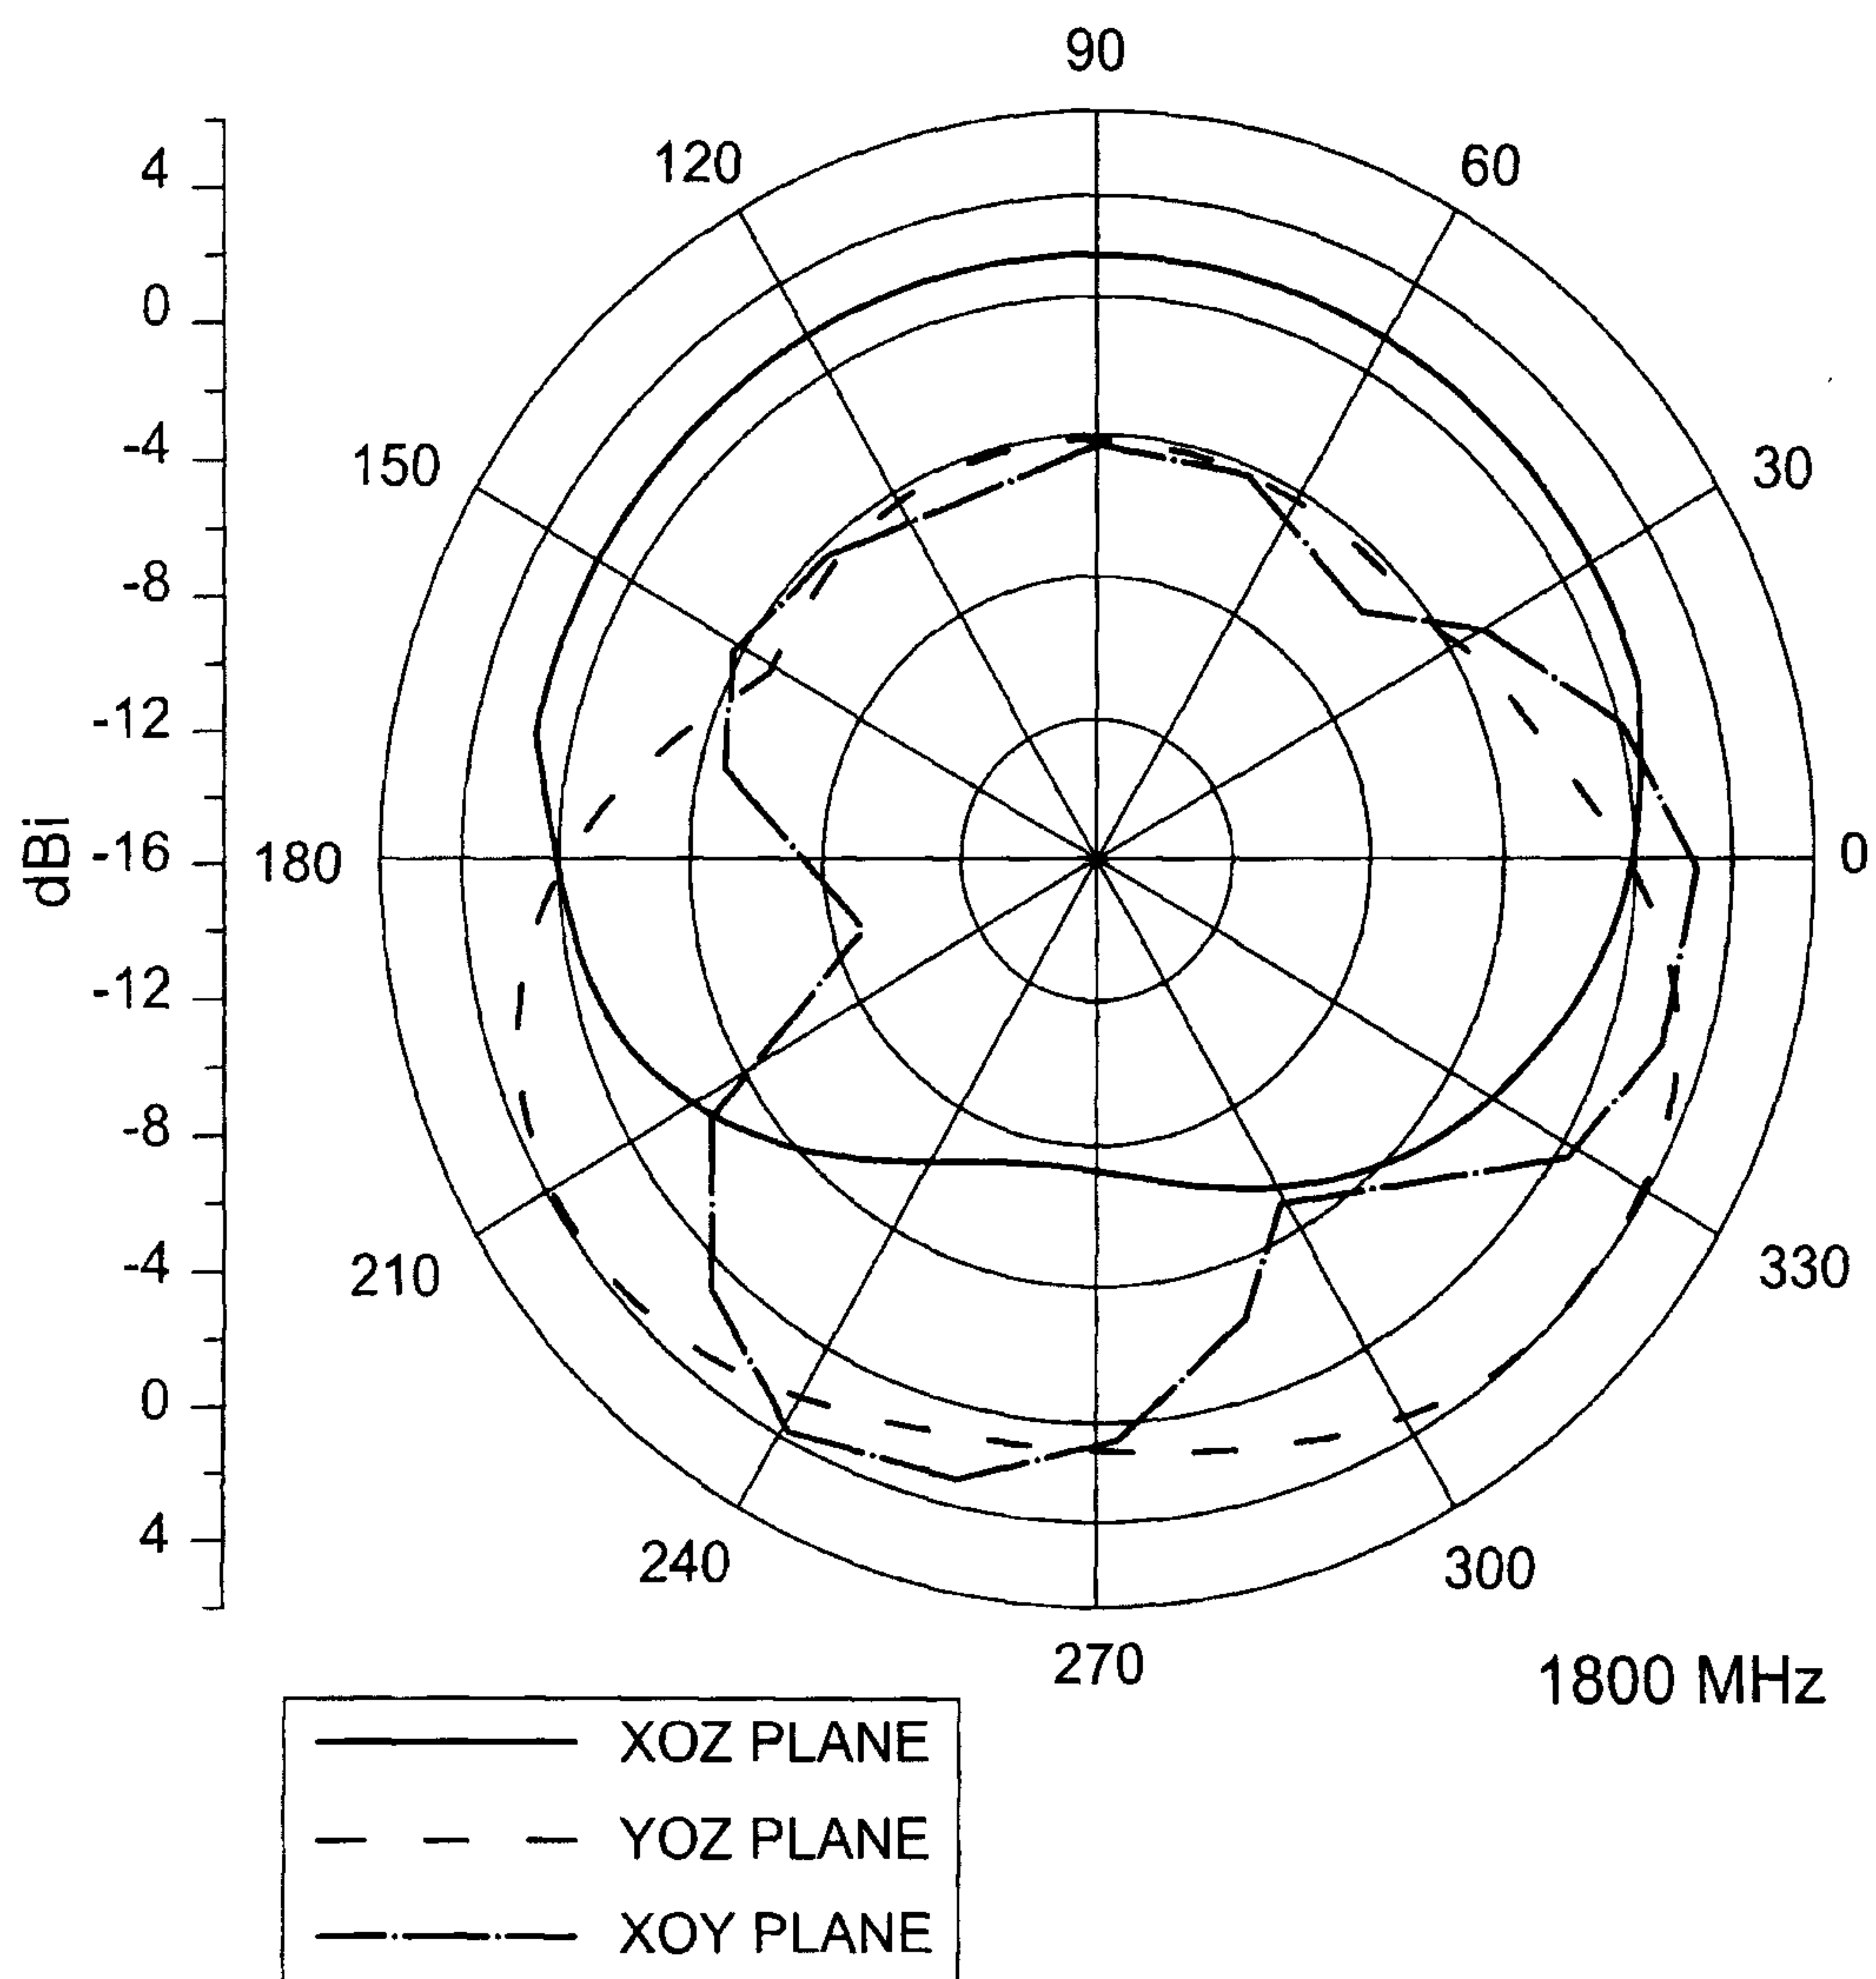


FIG. 7b

13/32

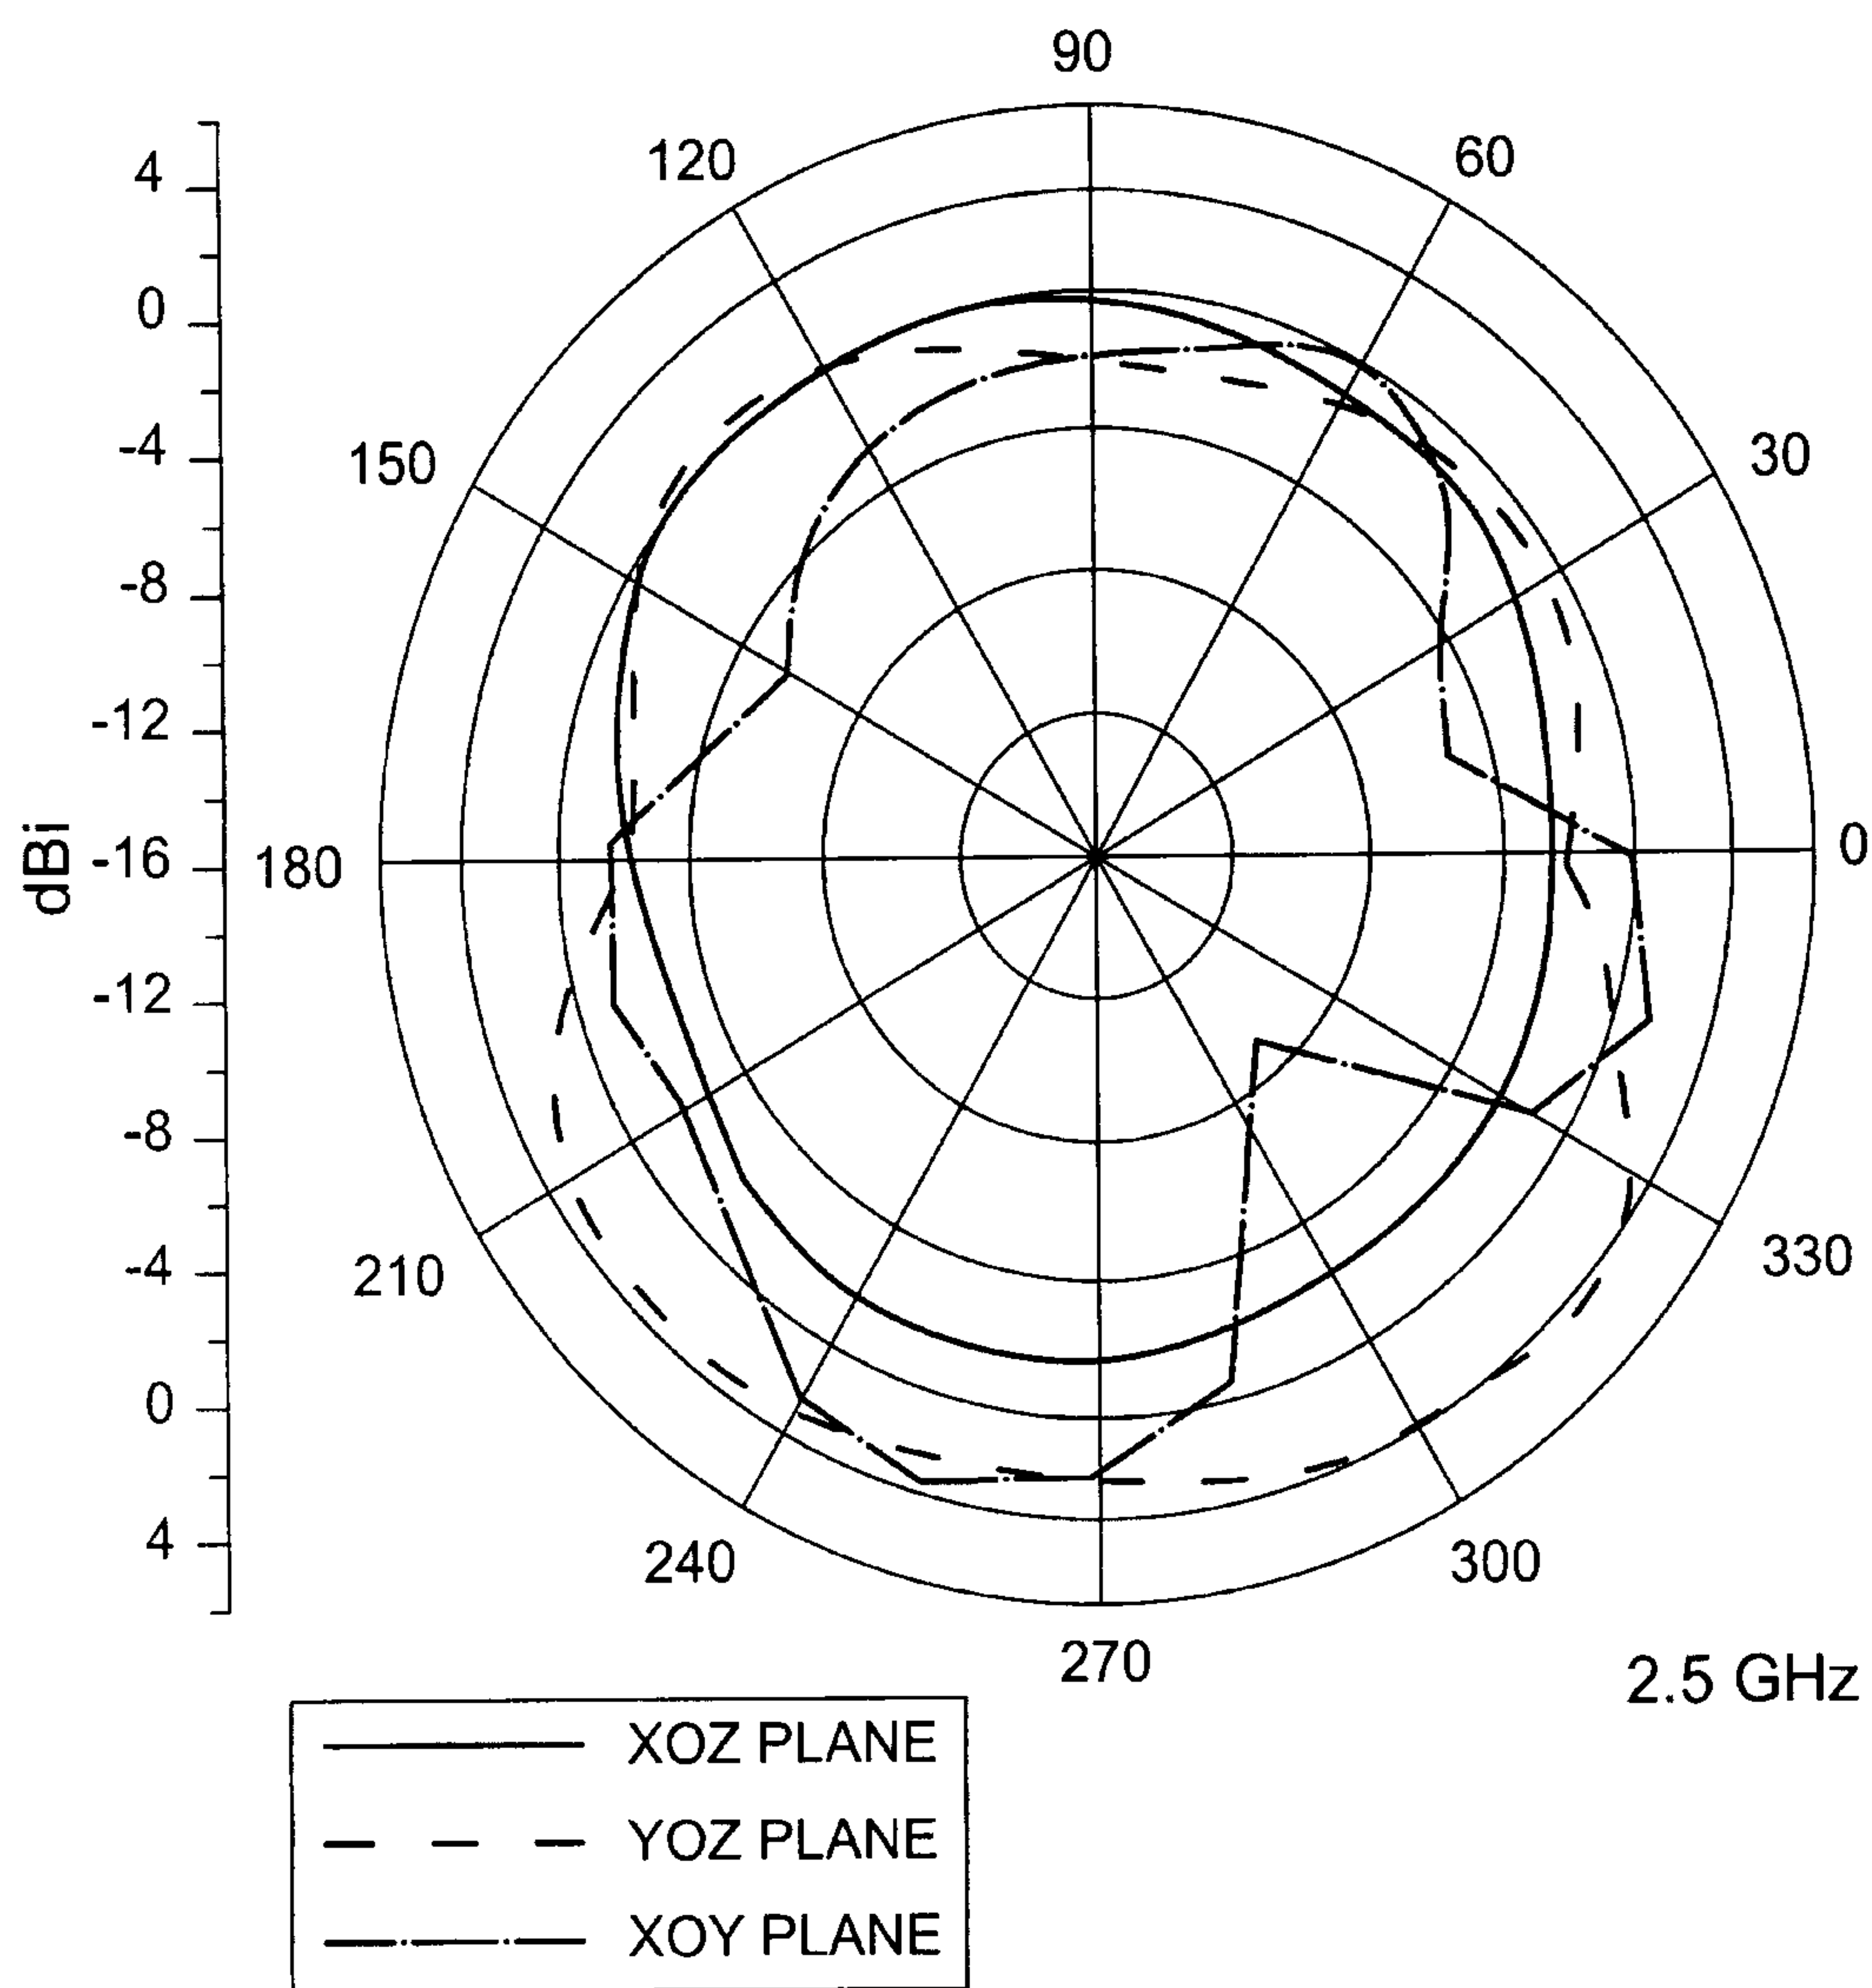


FIG. 7c

14/32

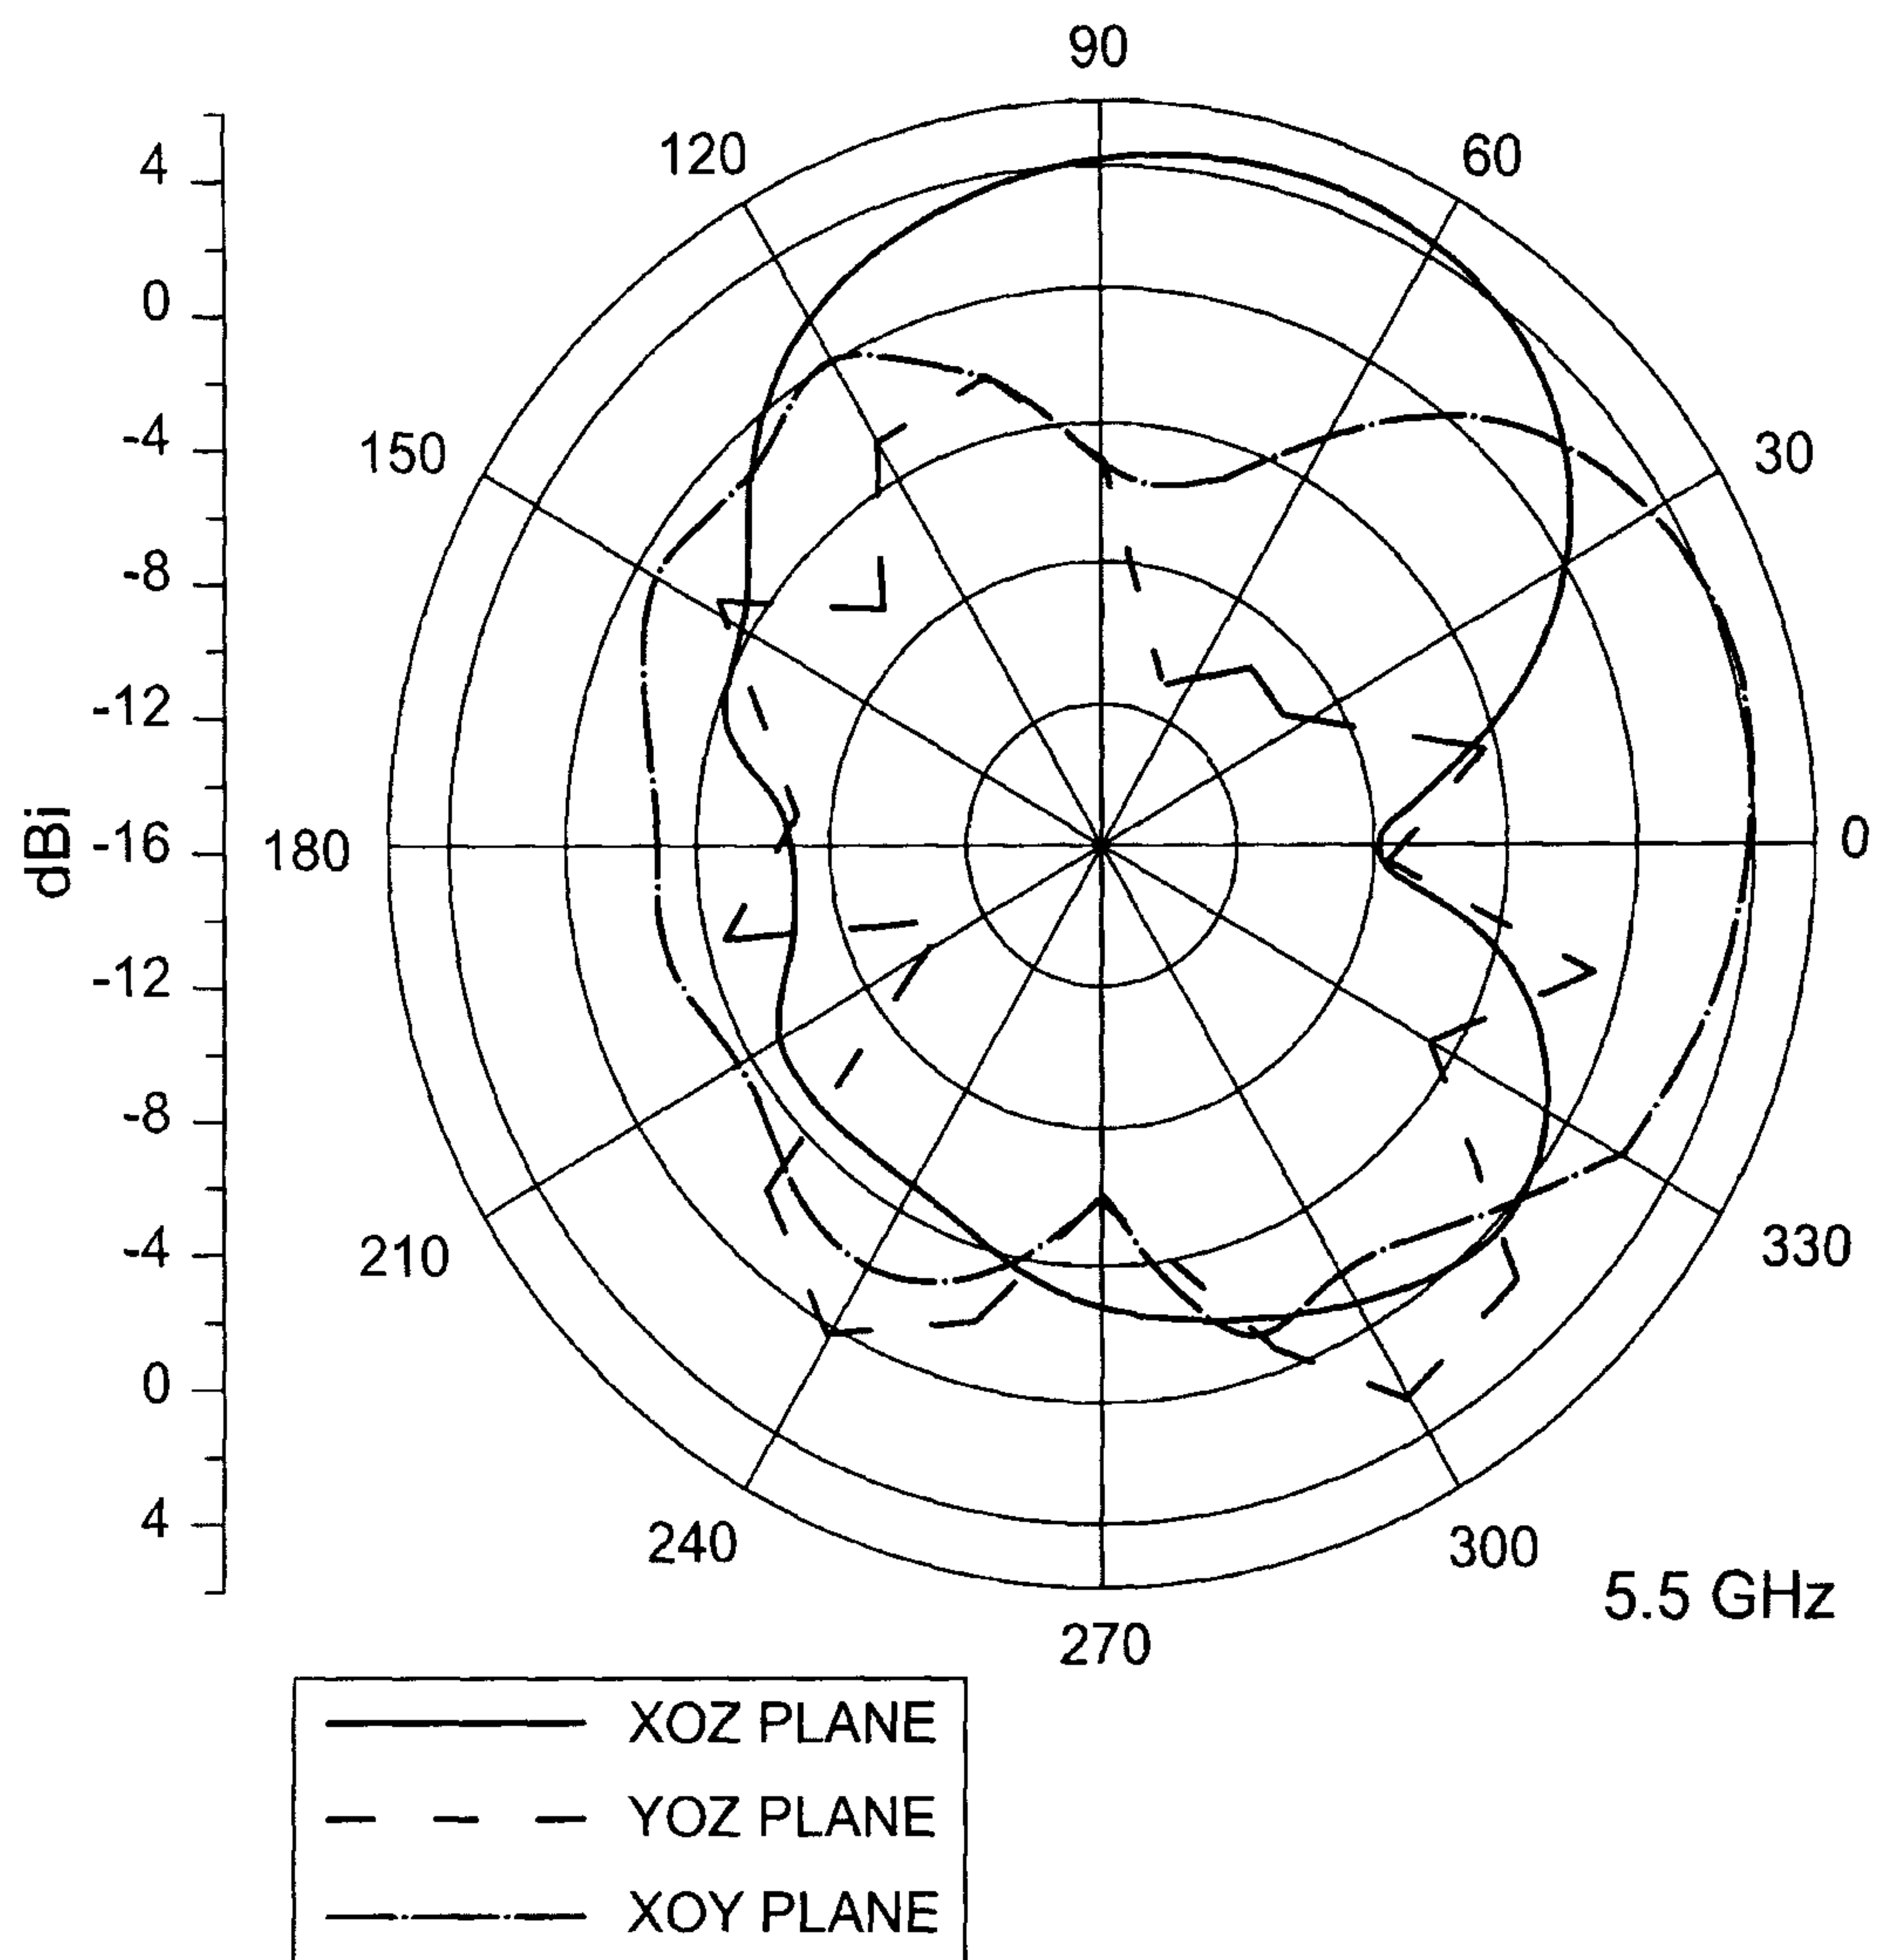
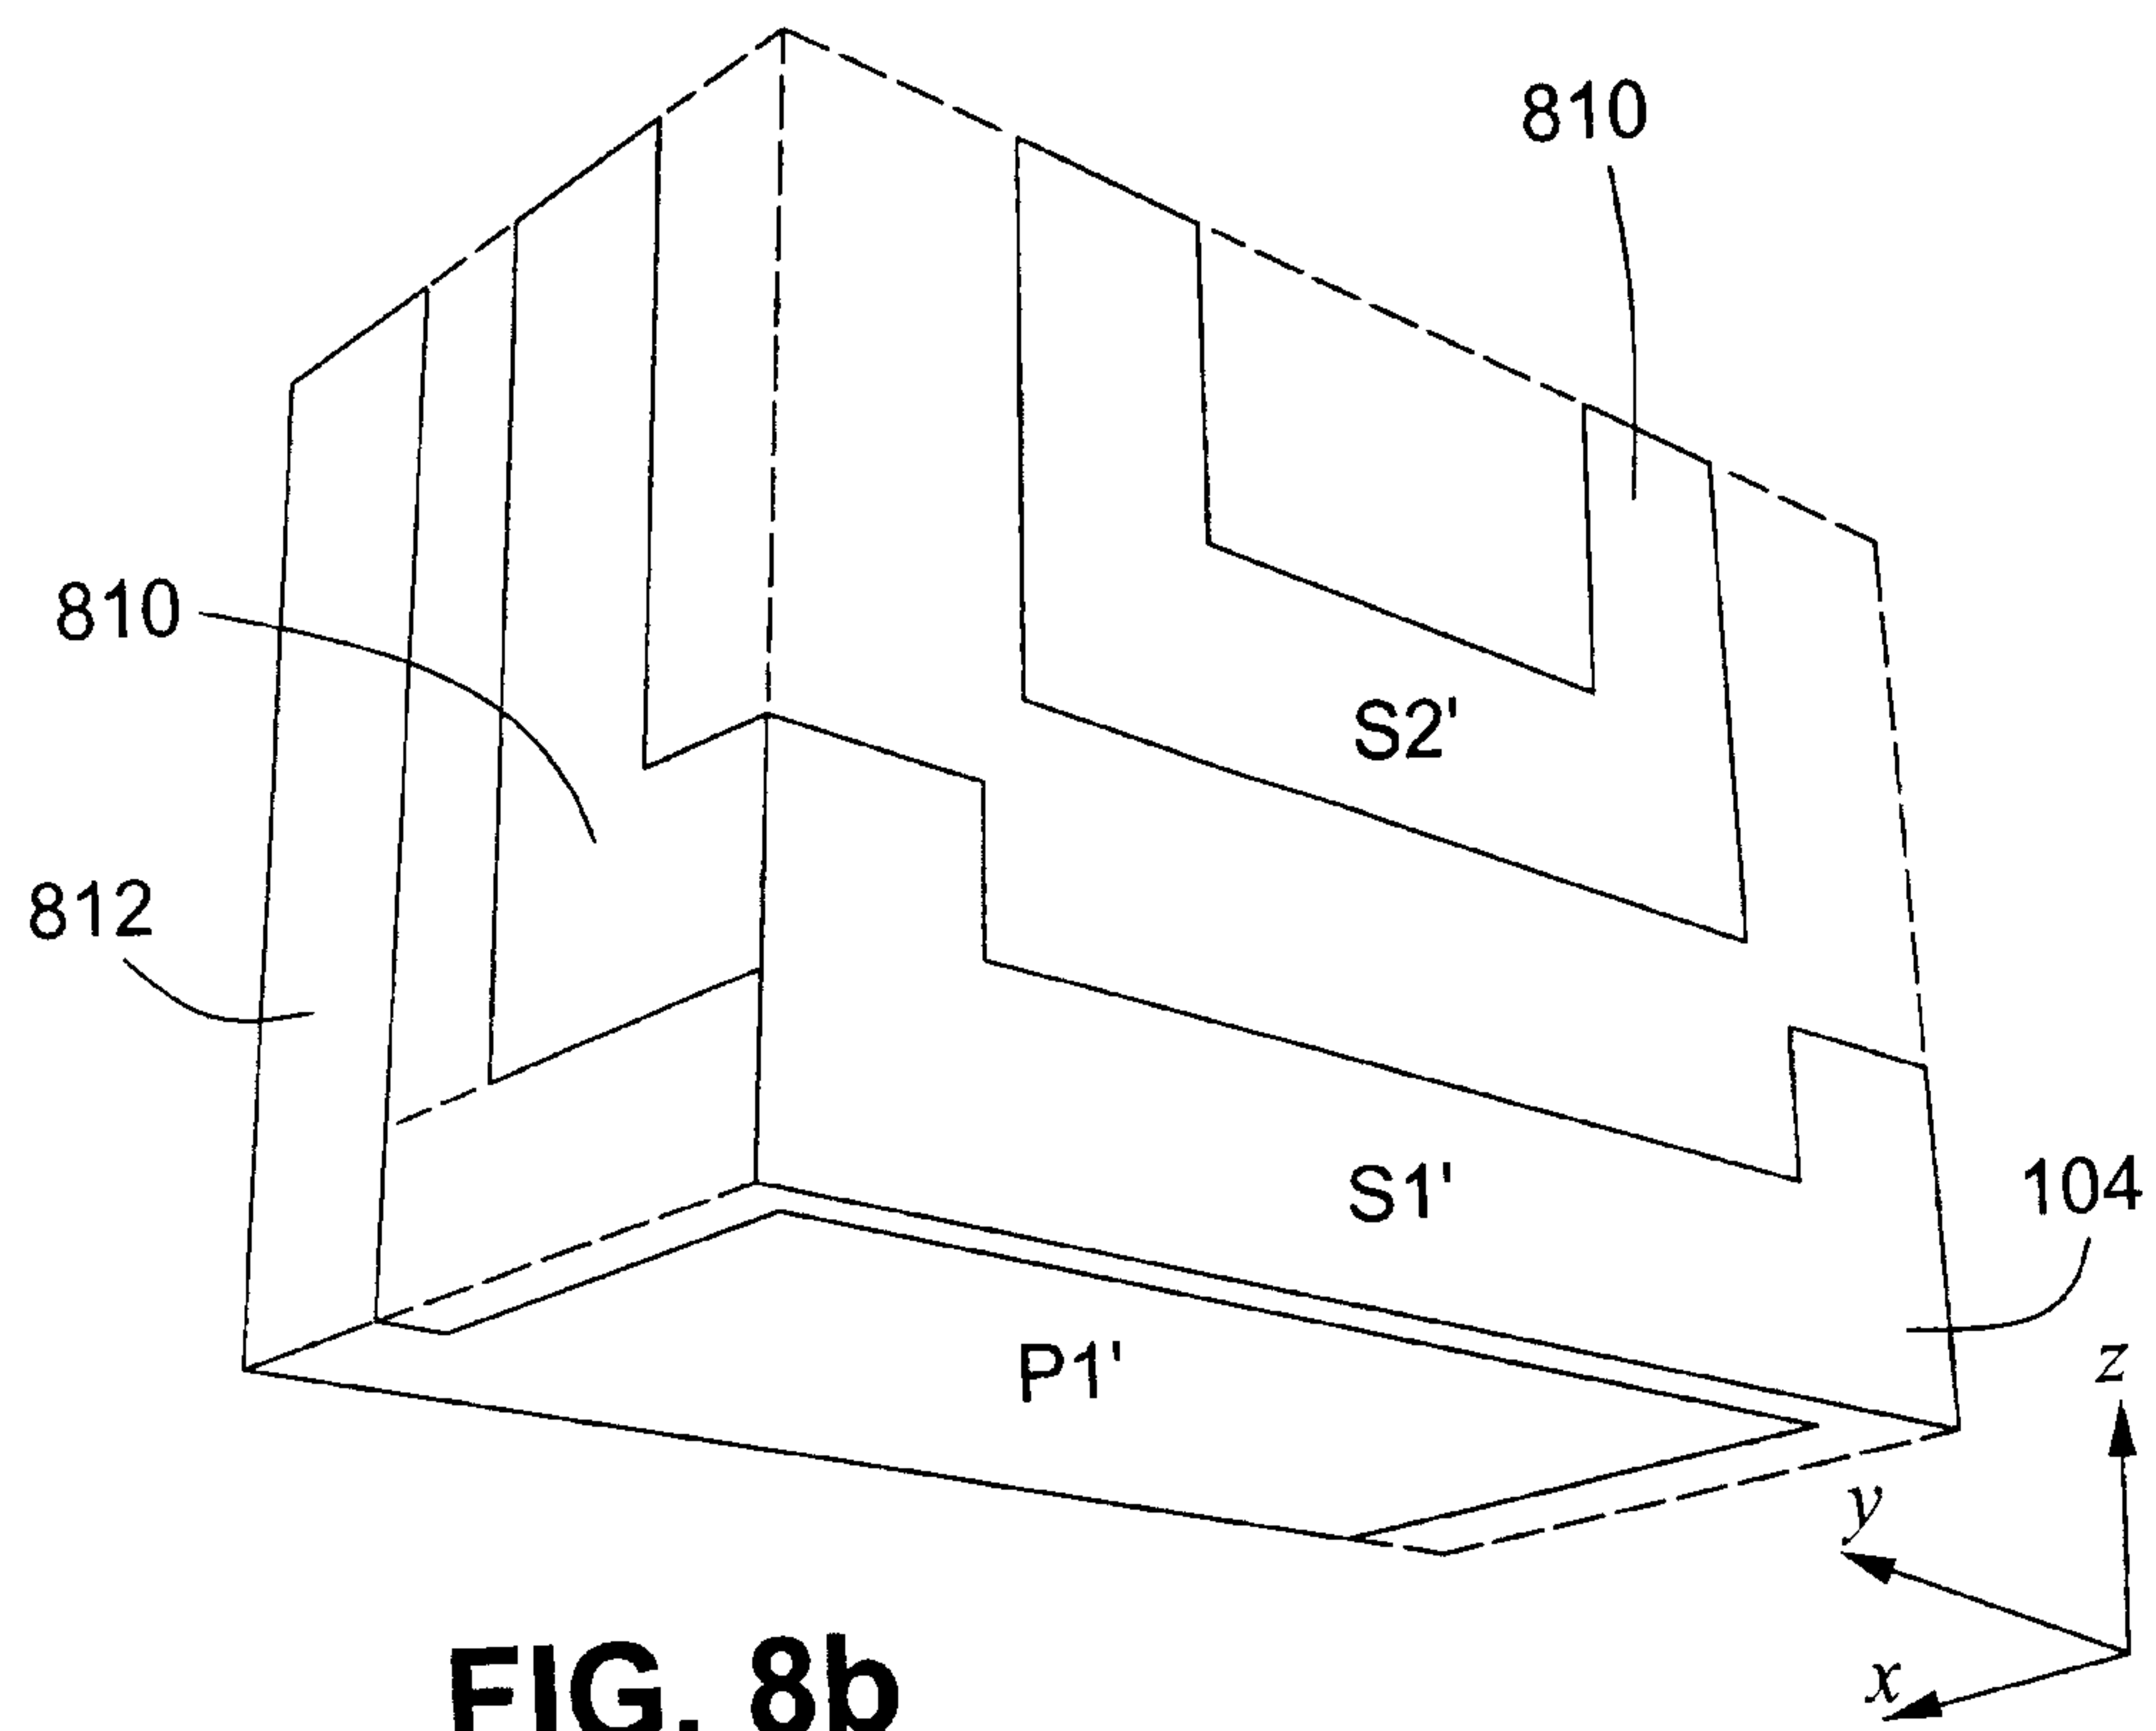
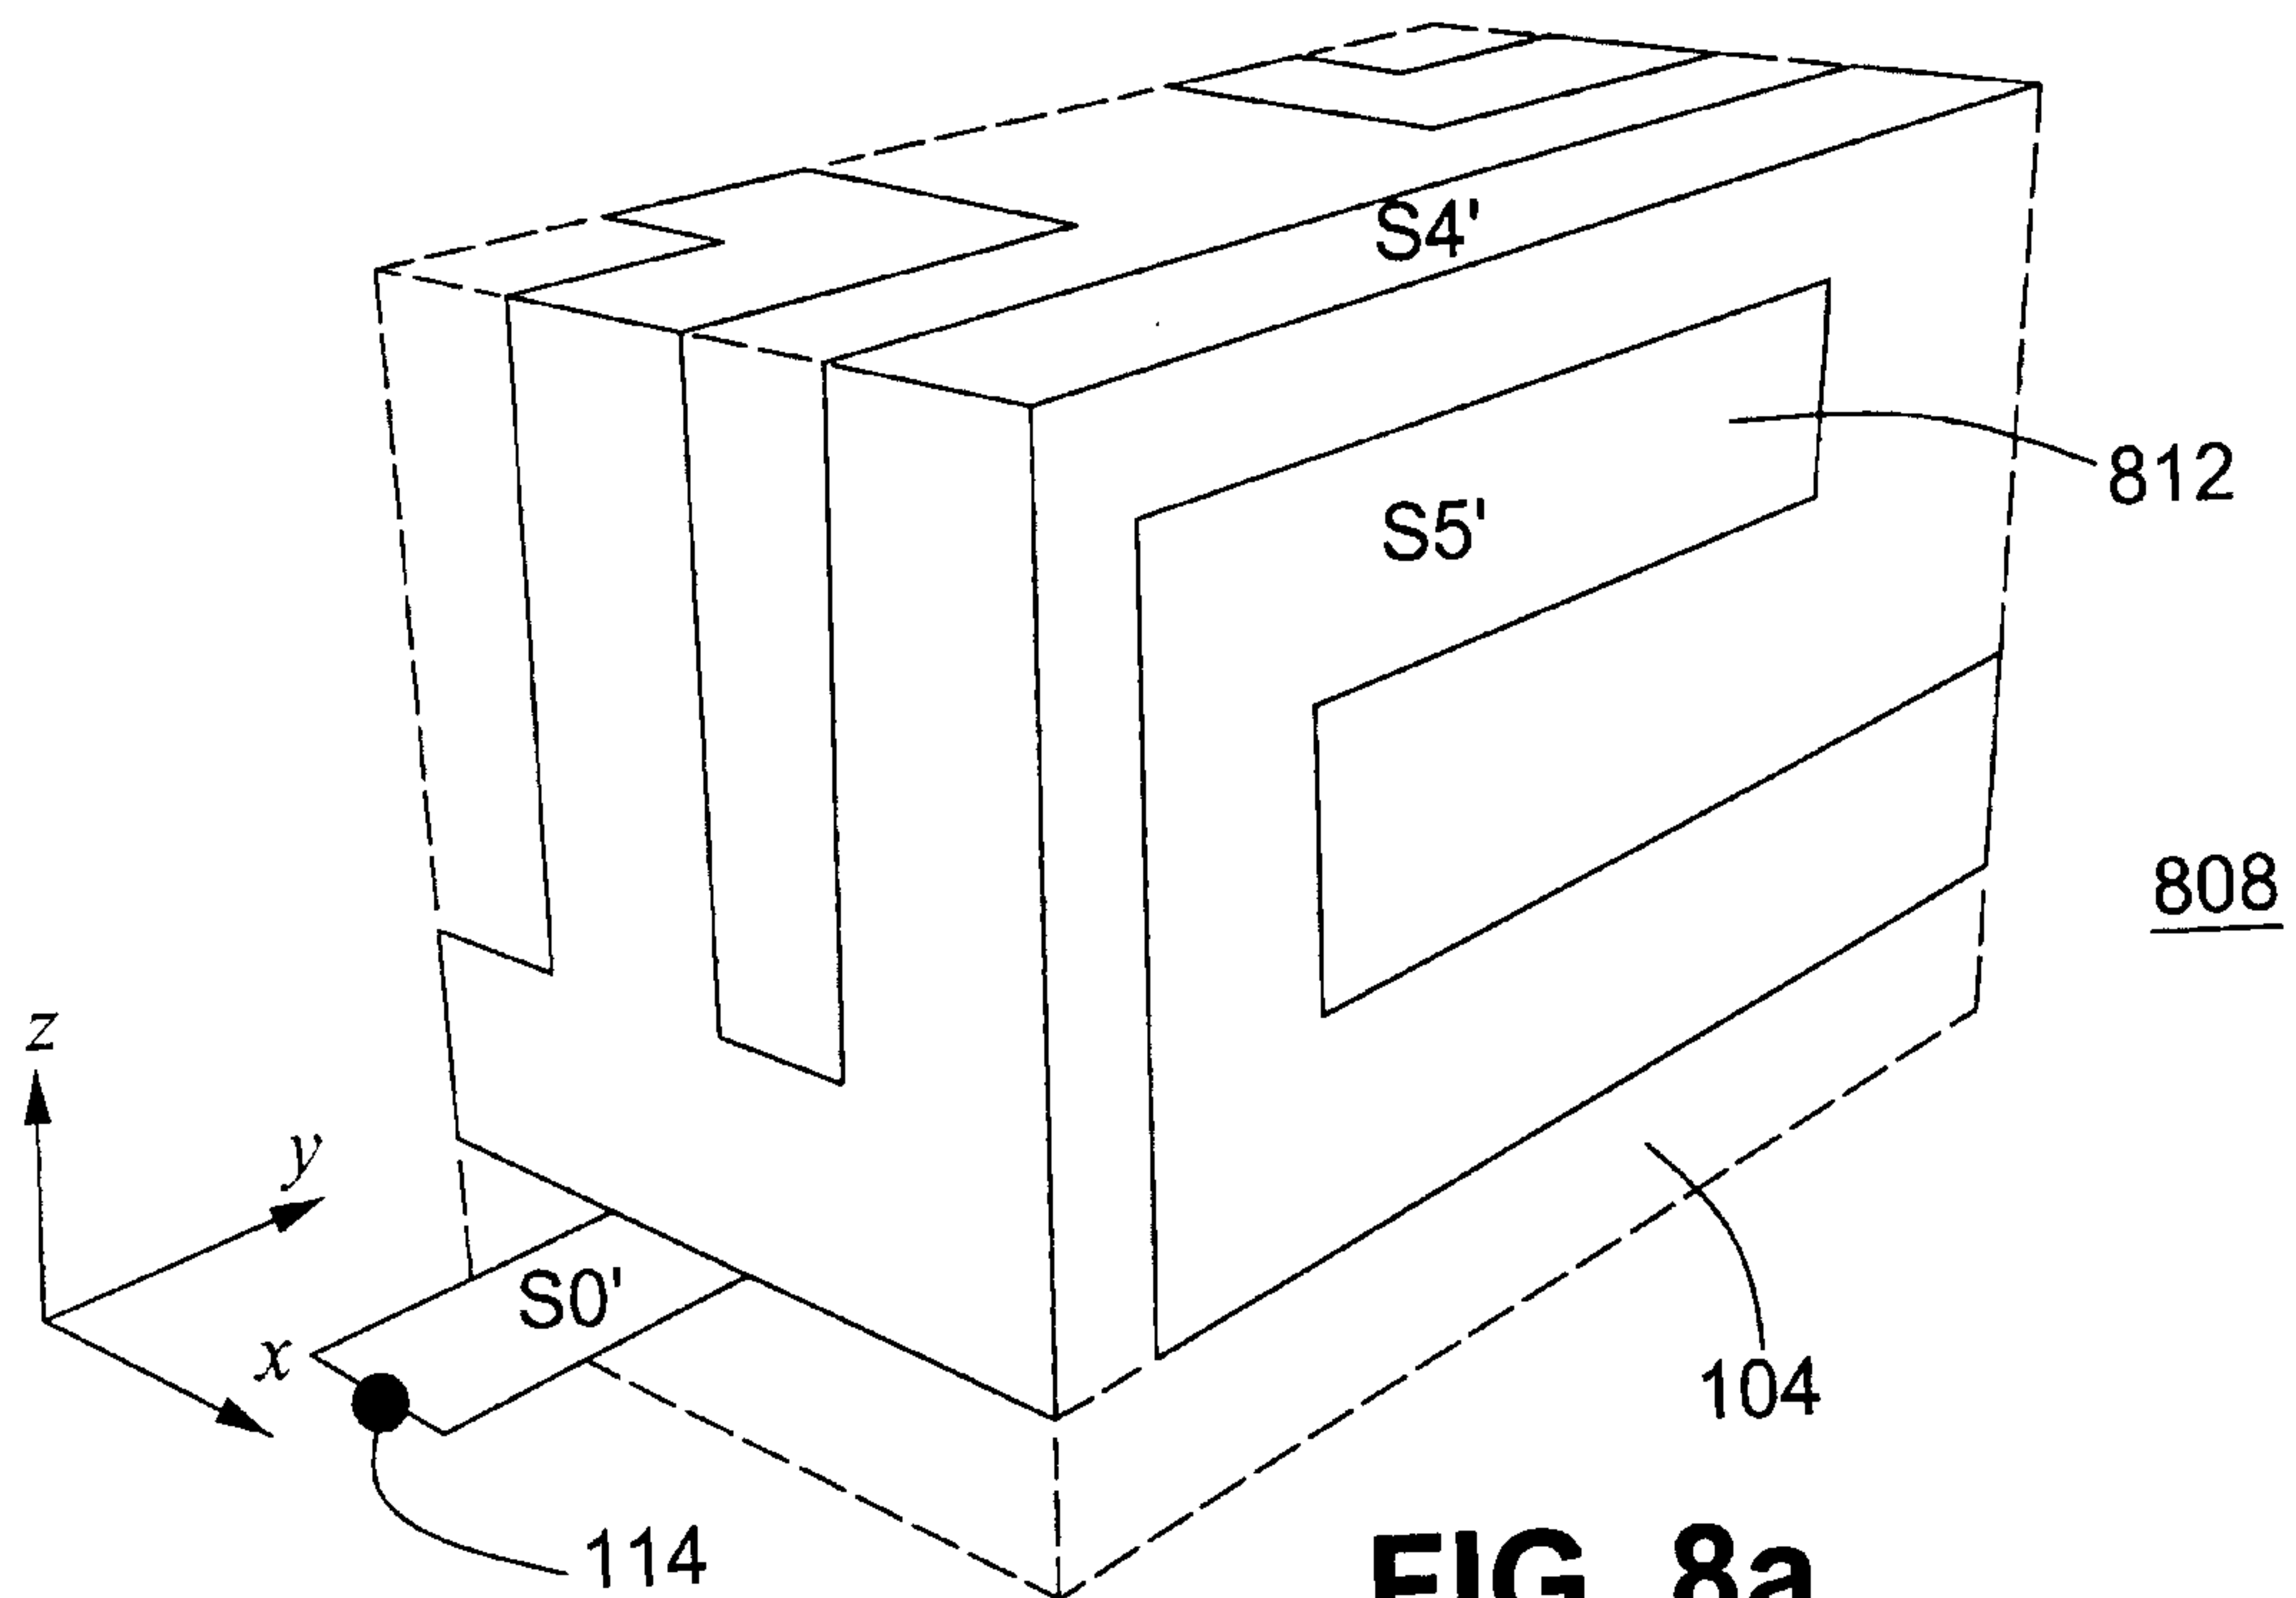


FIG. 7d

15/32






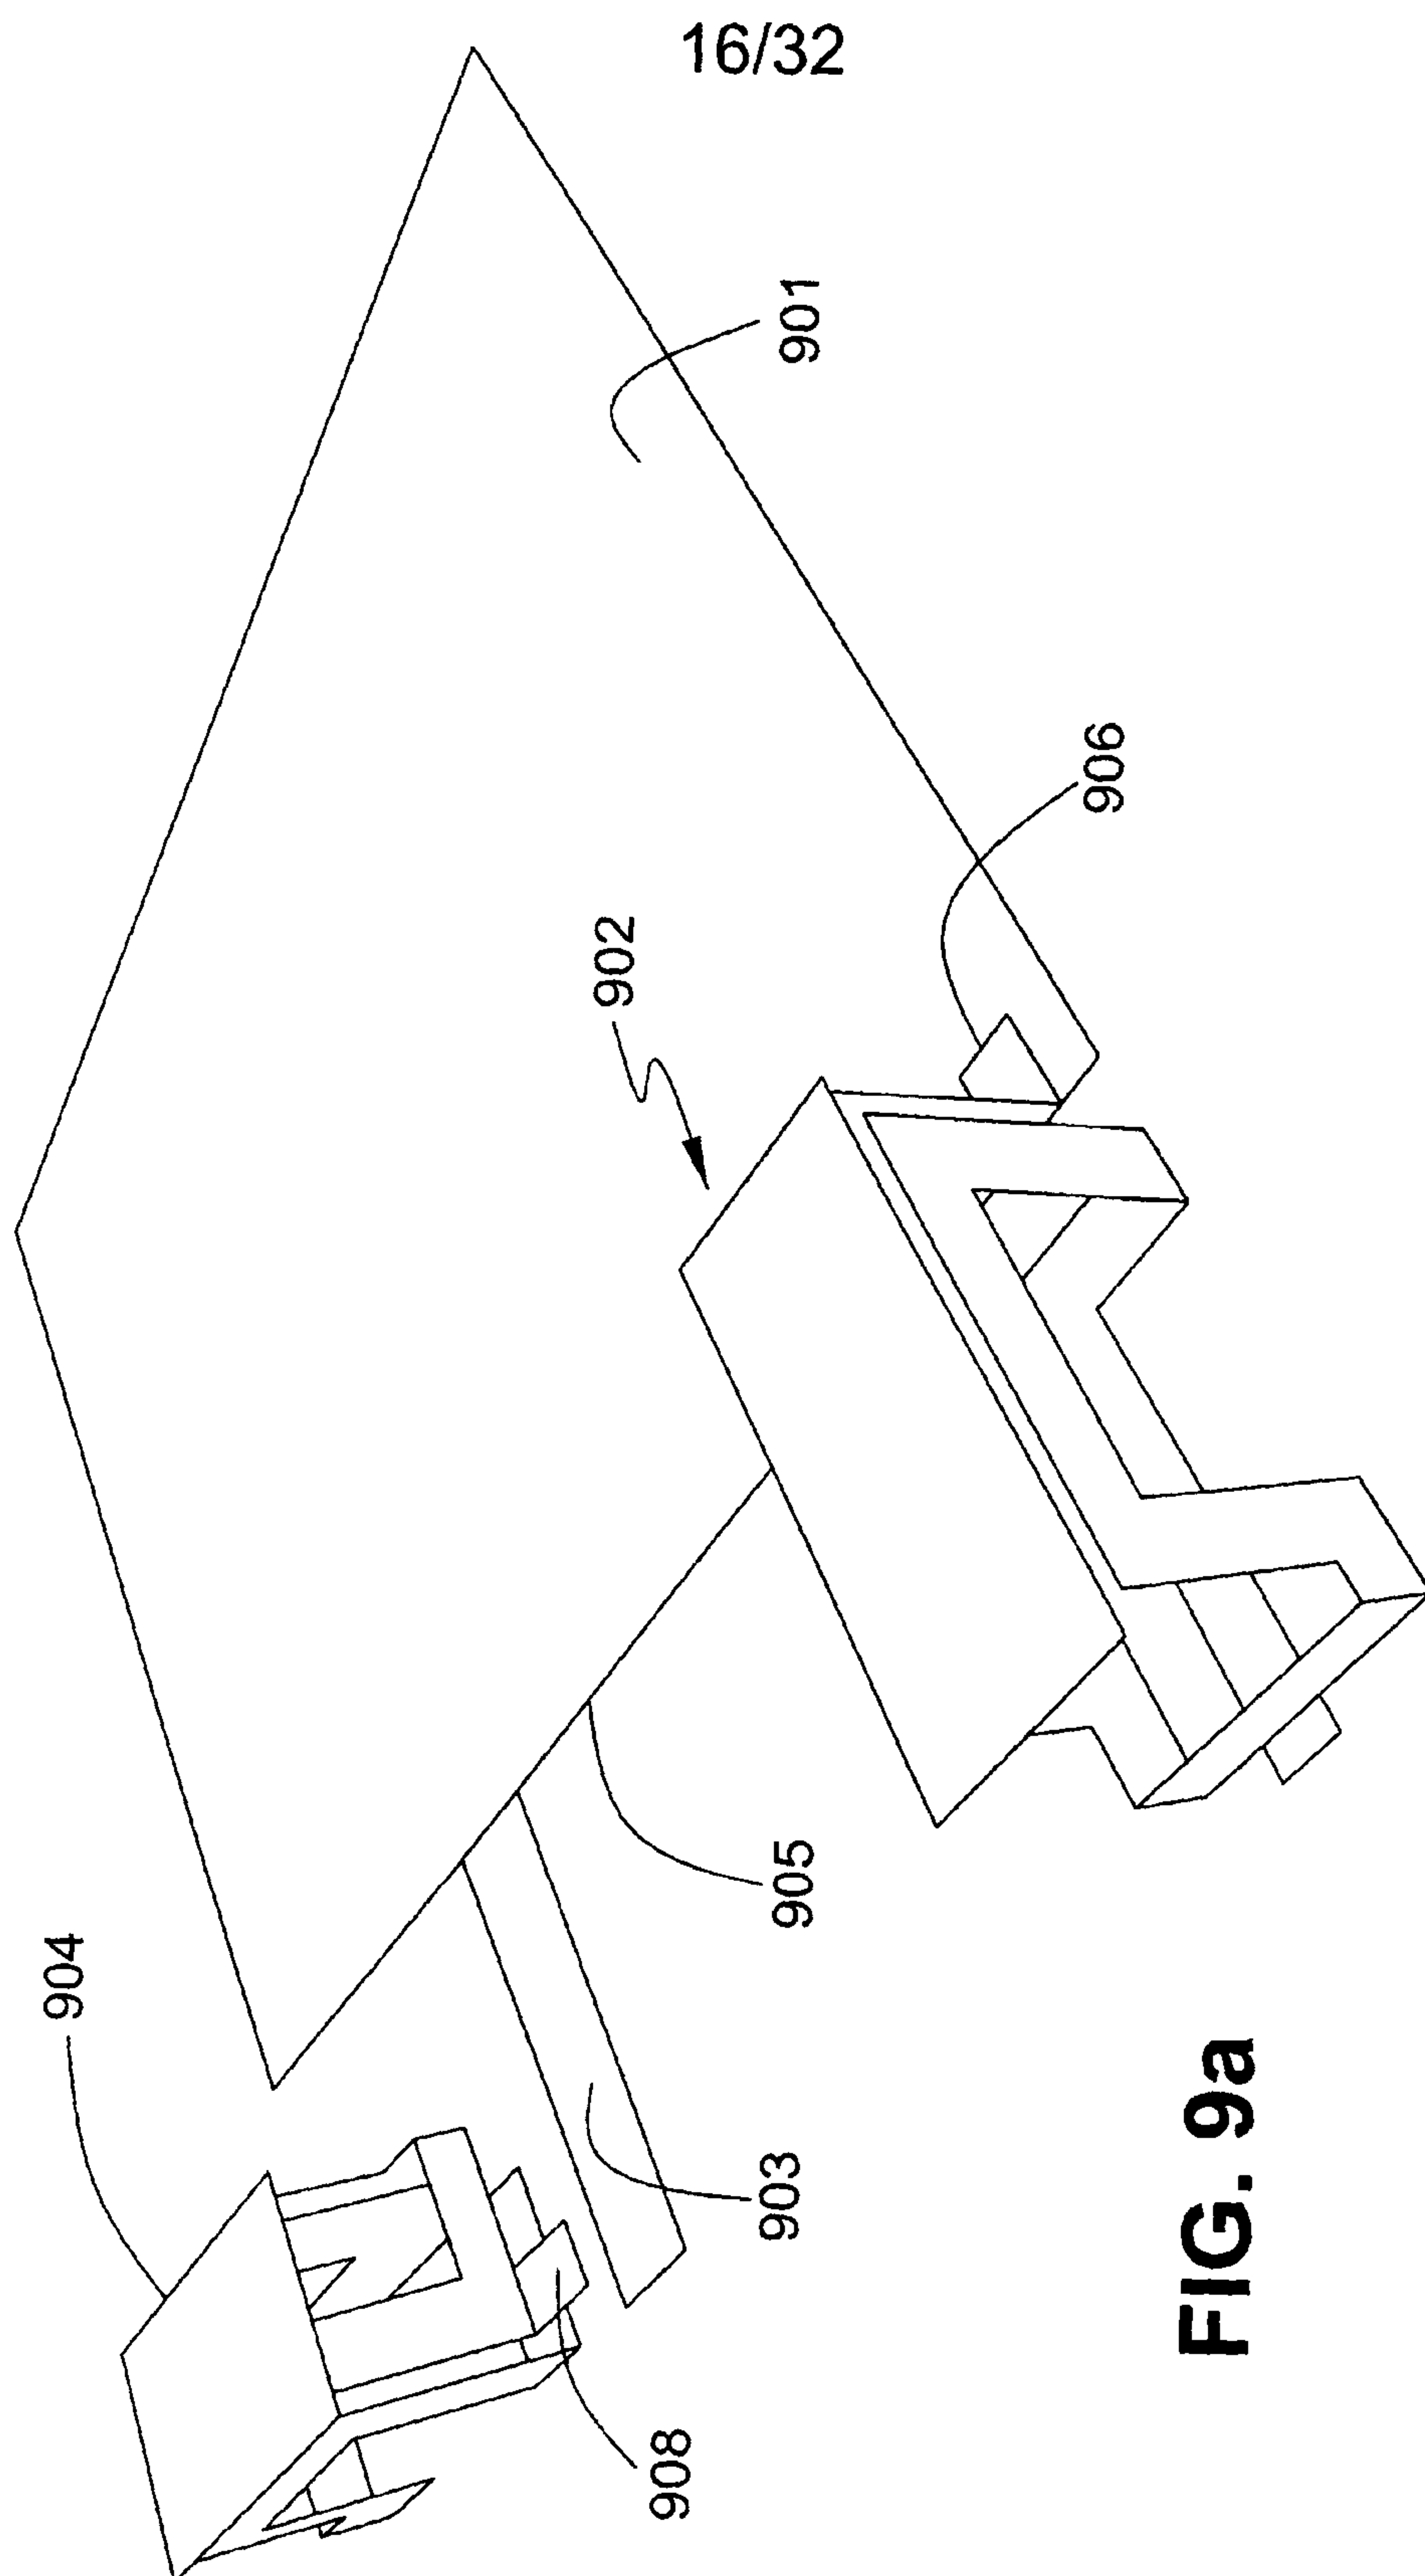


FIG. 9a

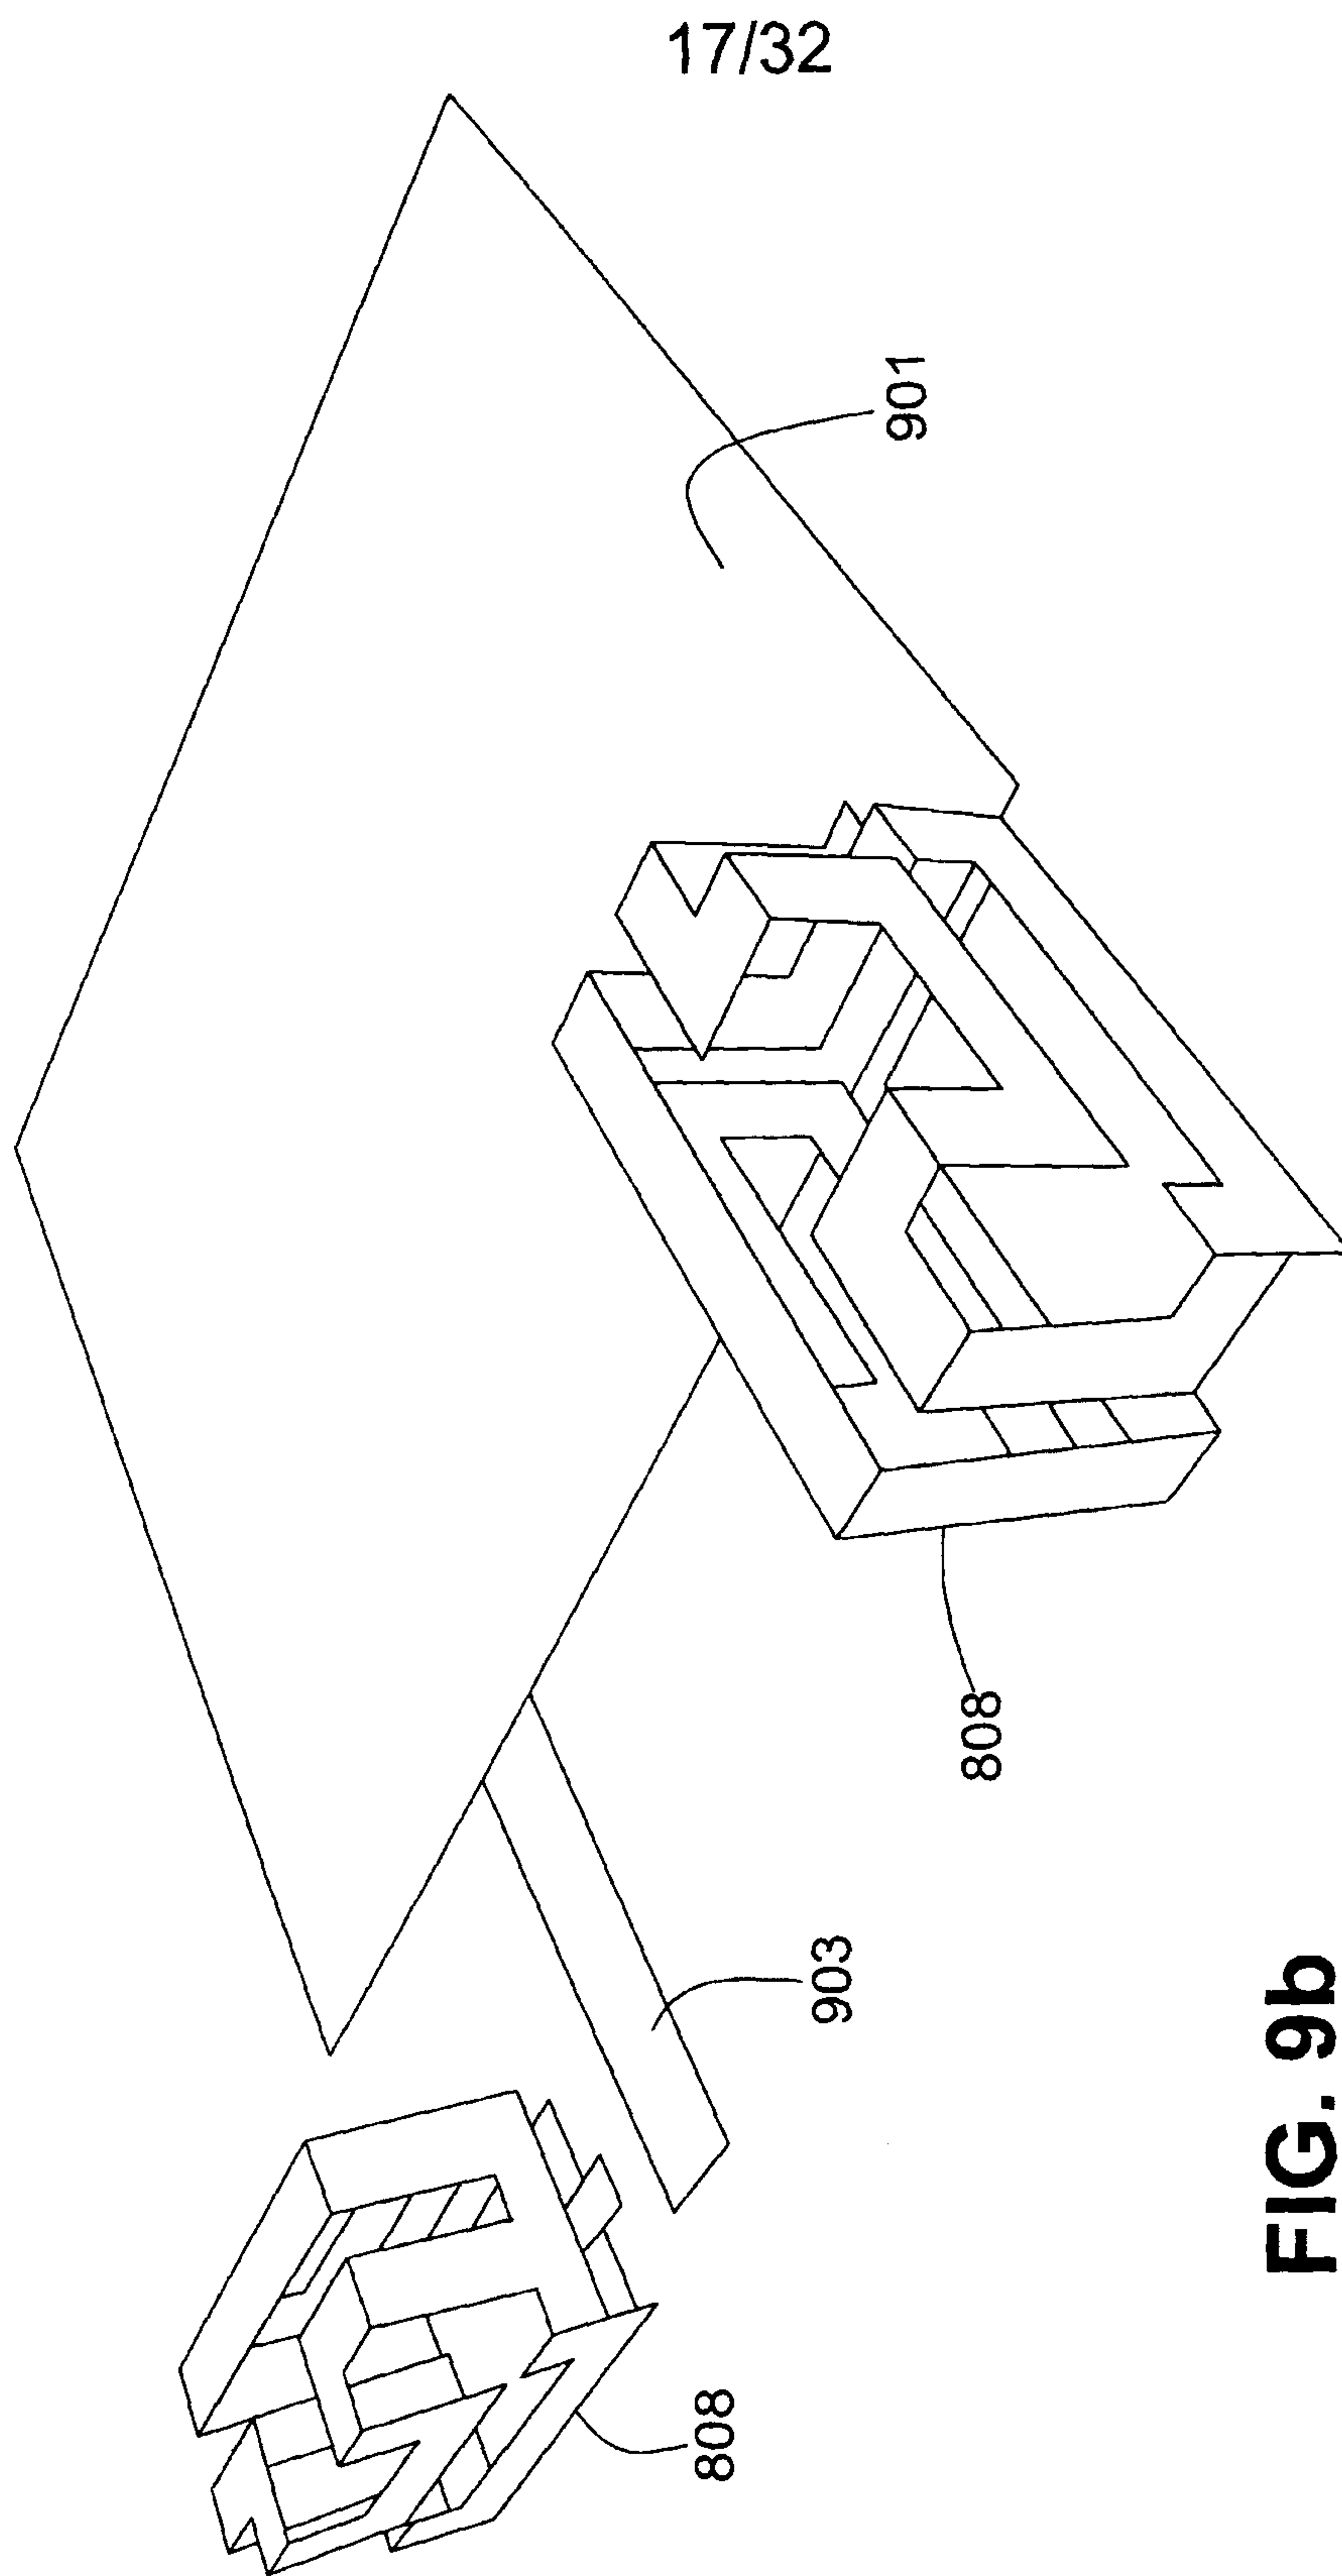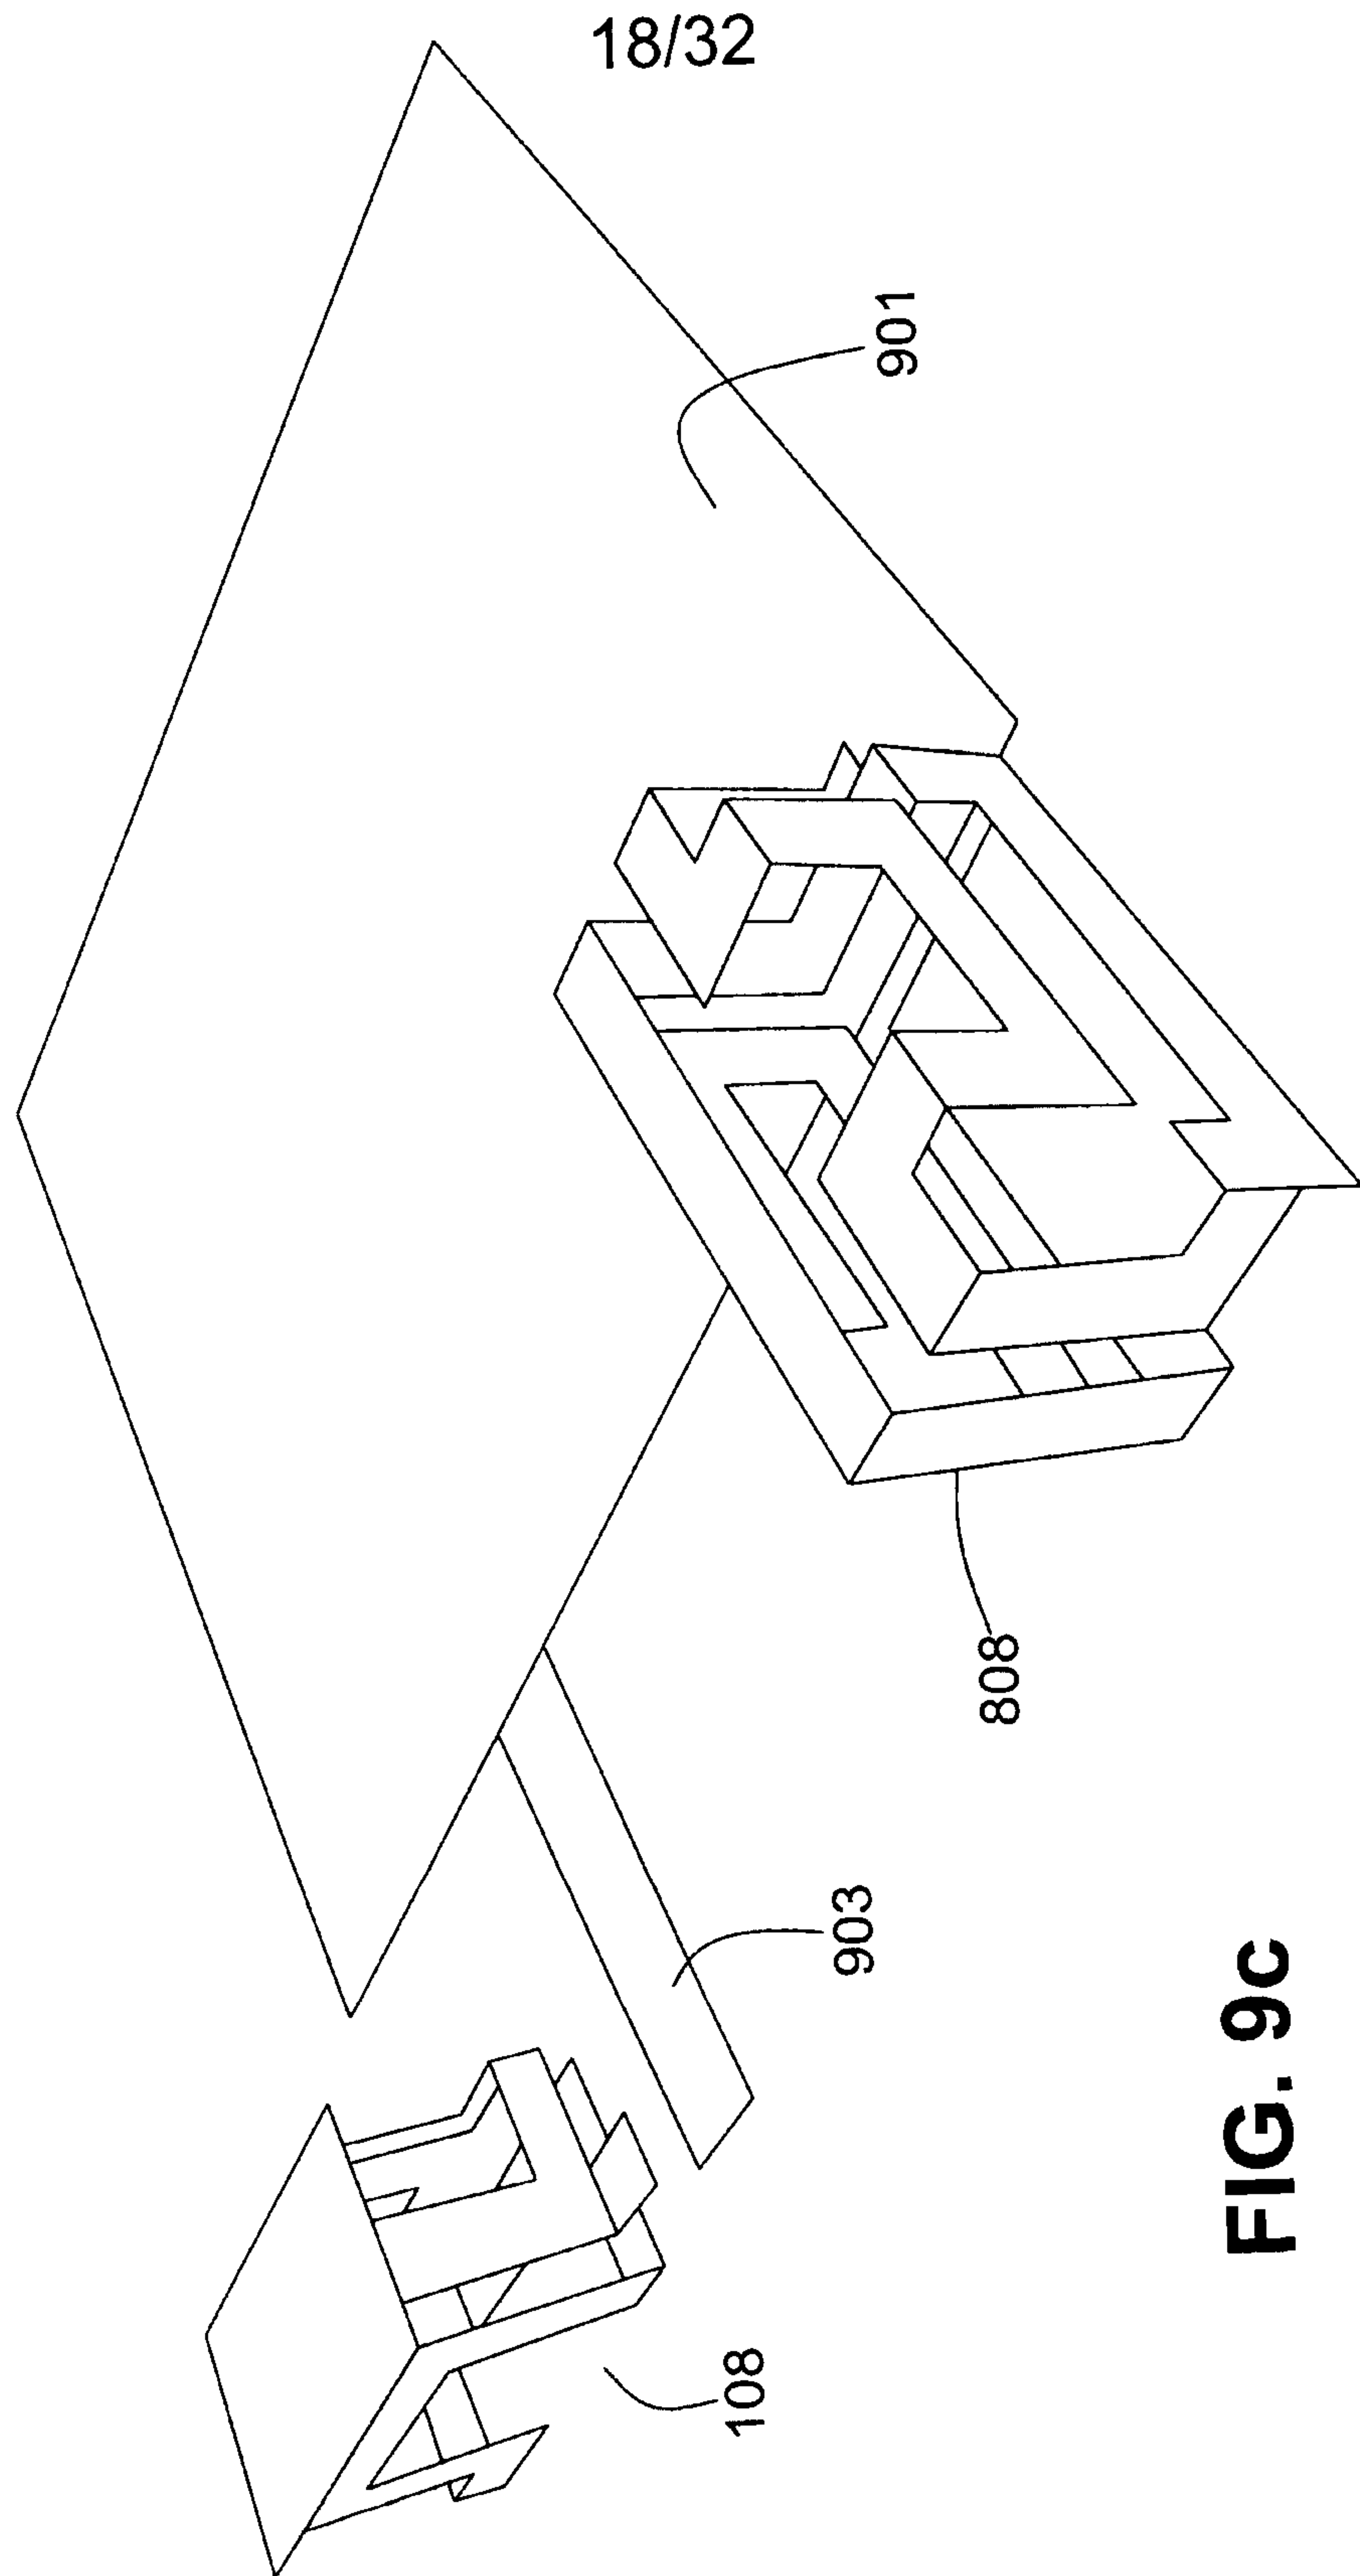

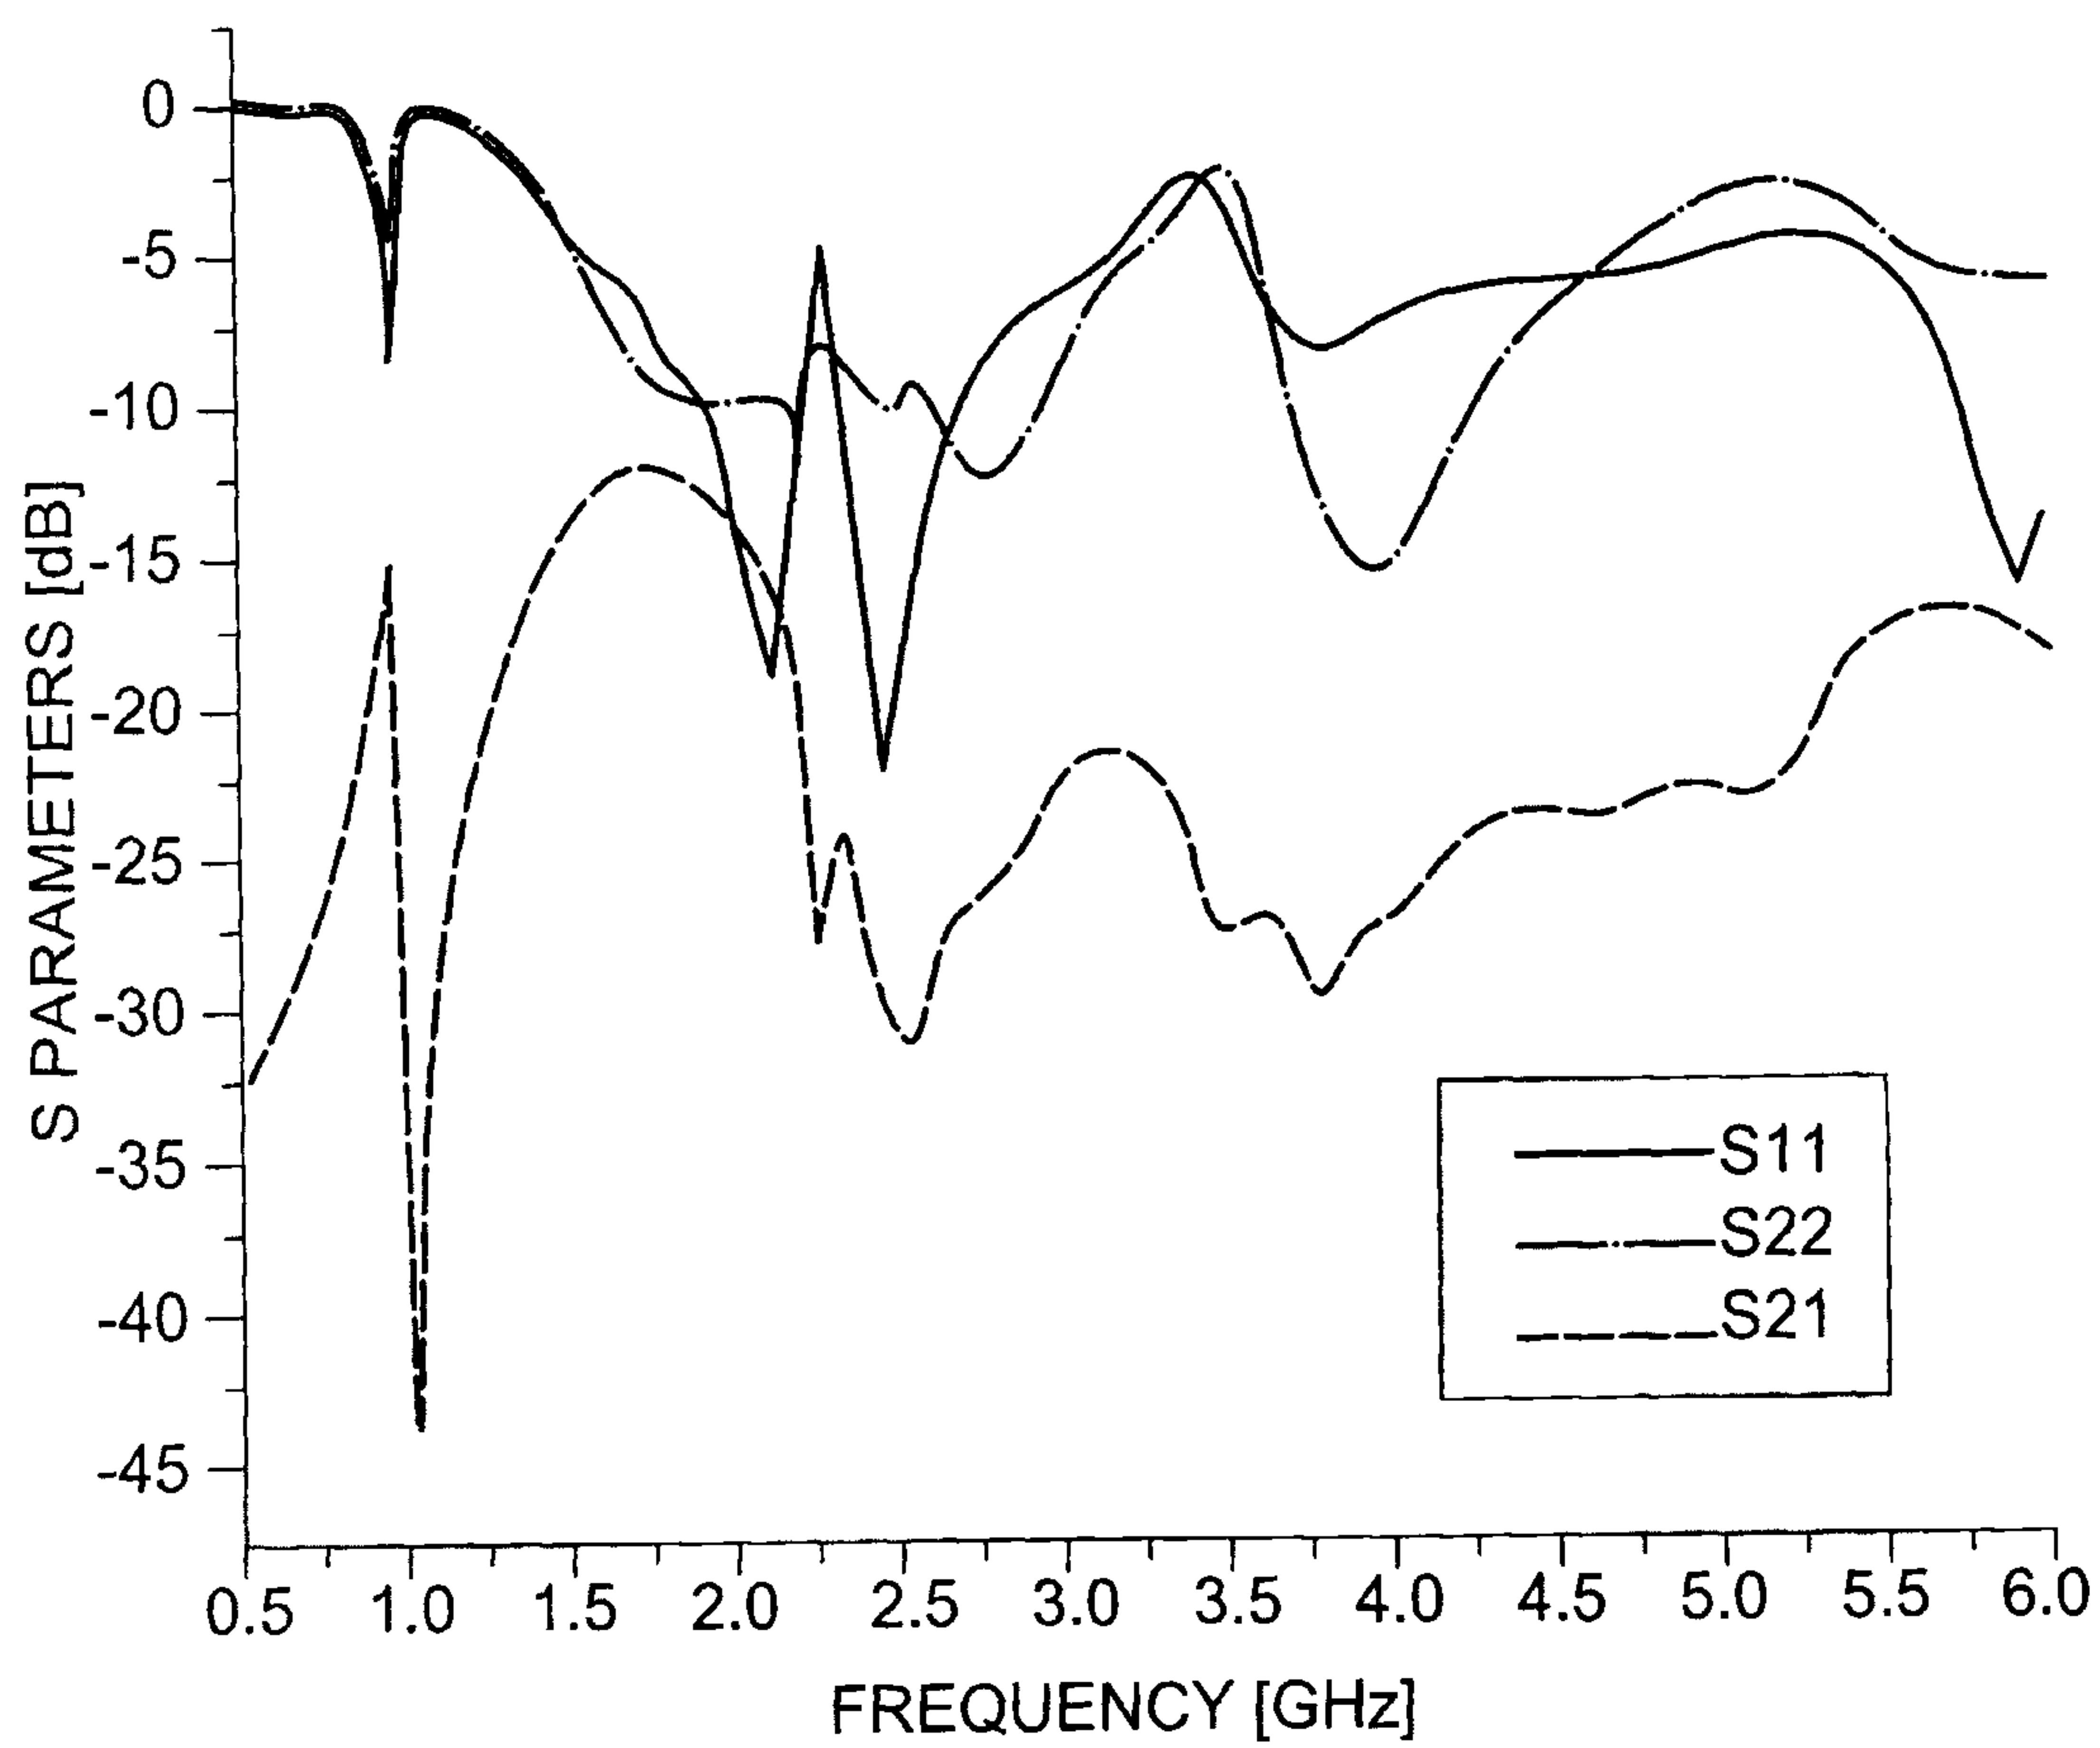

19/32

**FIG. 10**

20/32

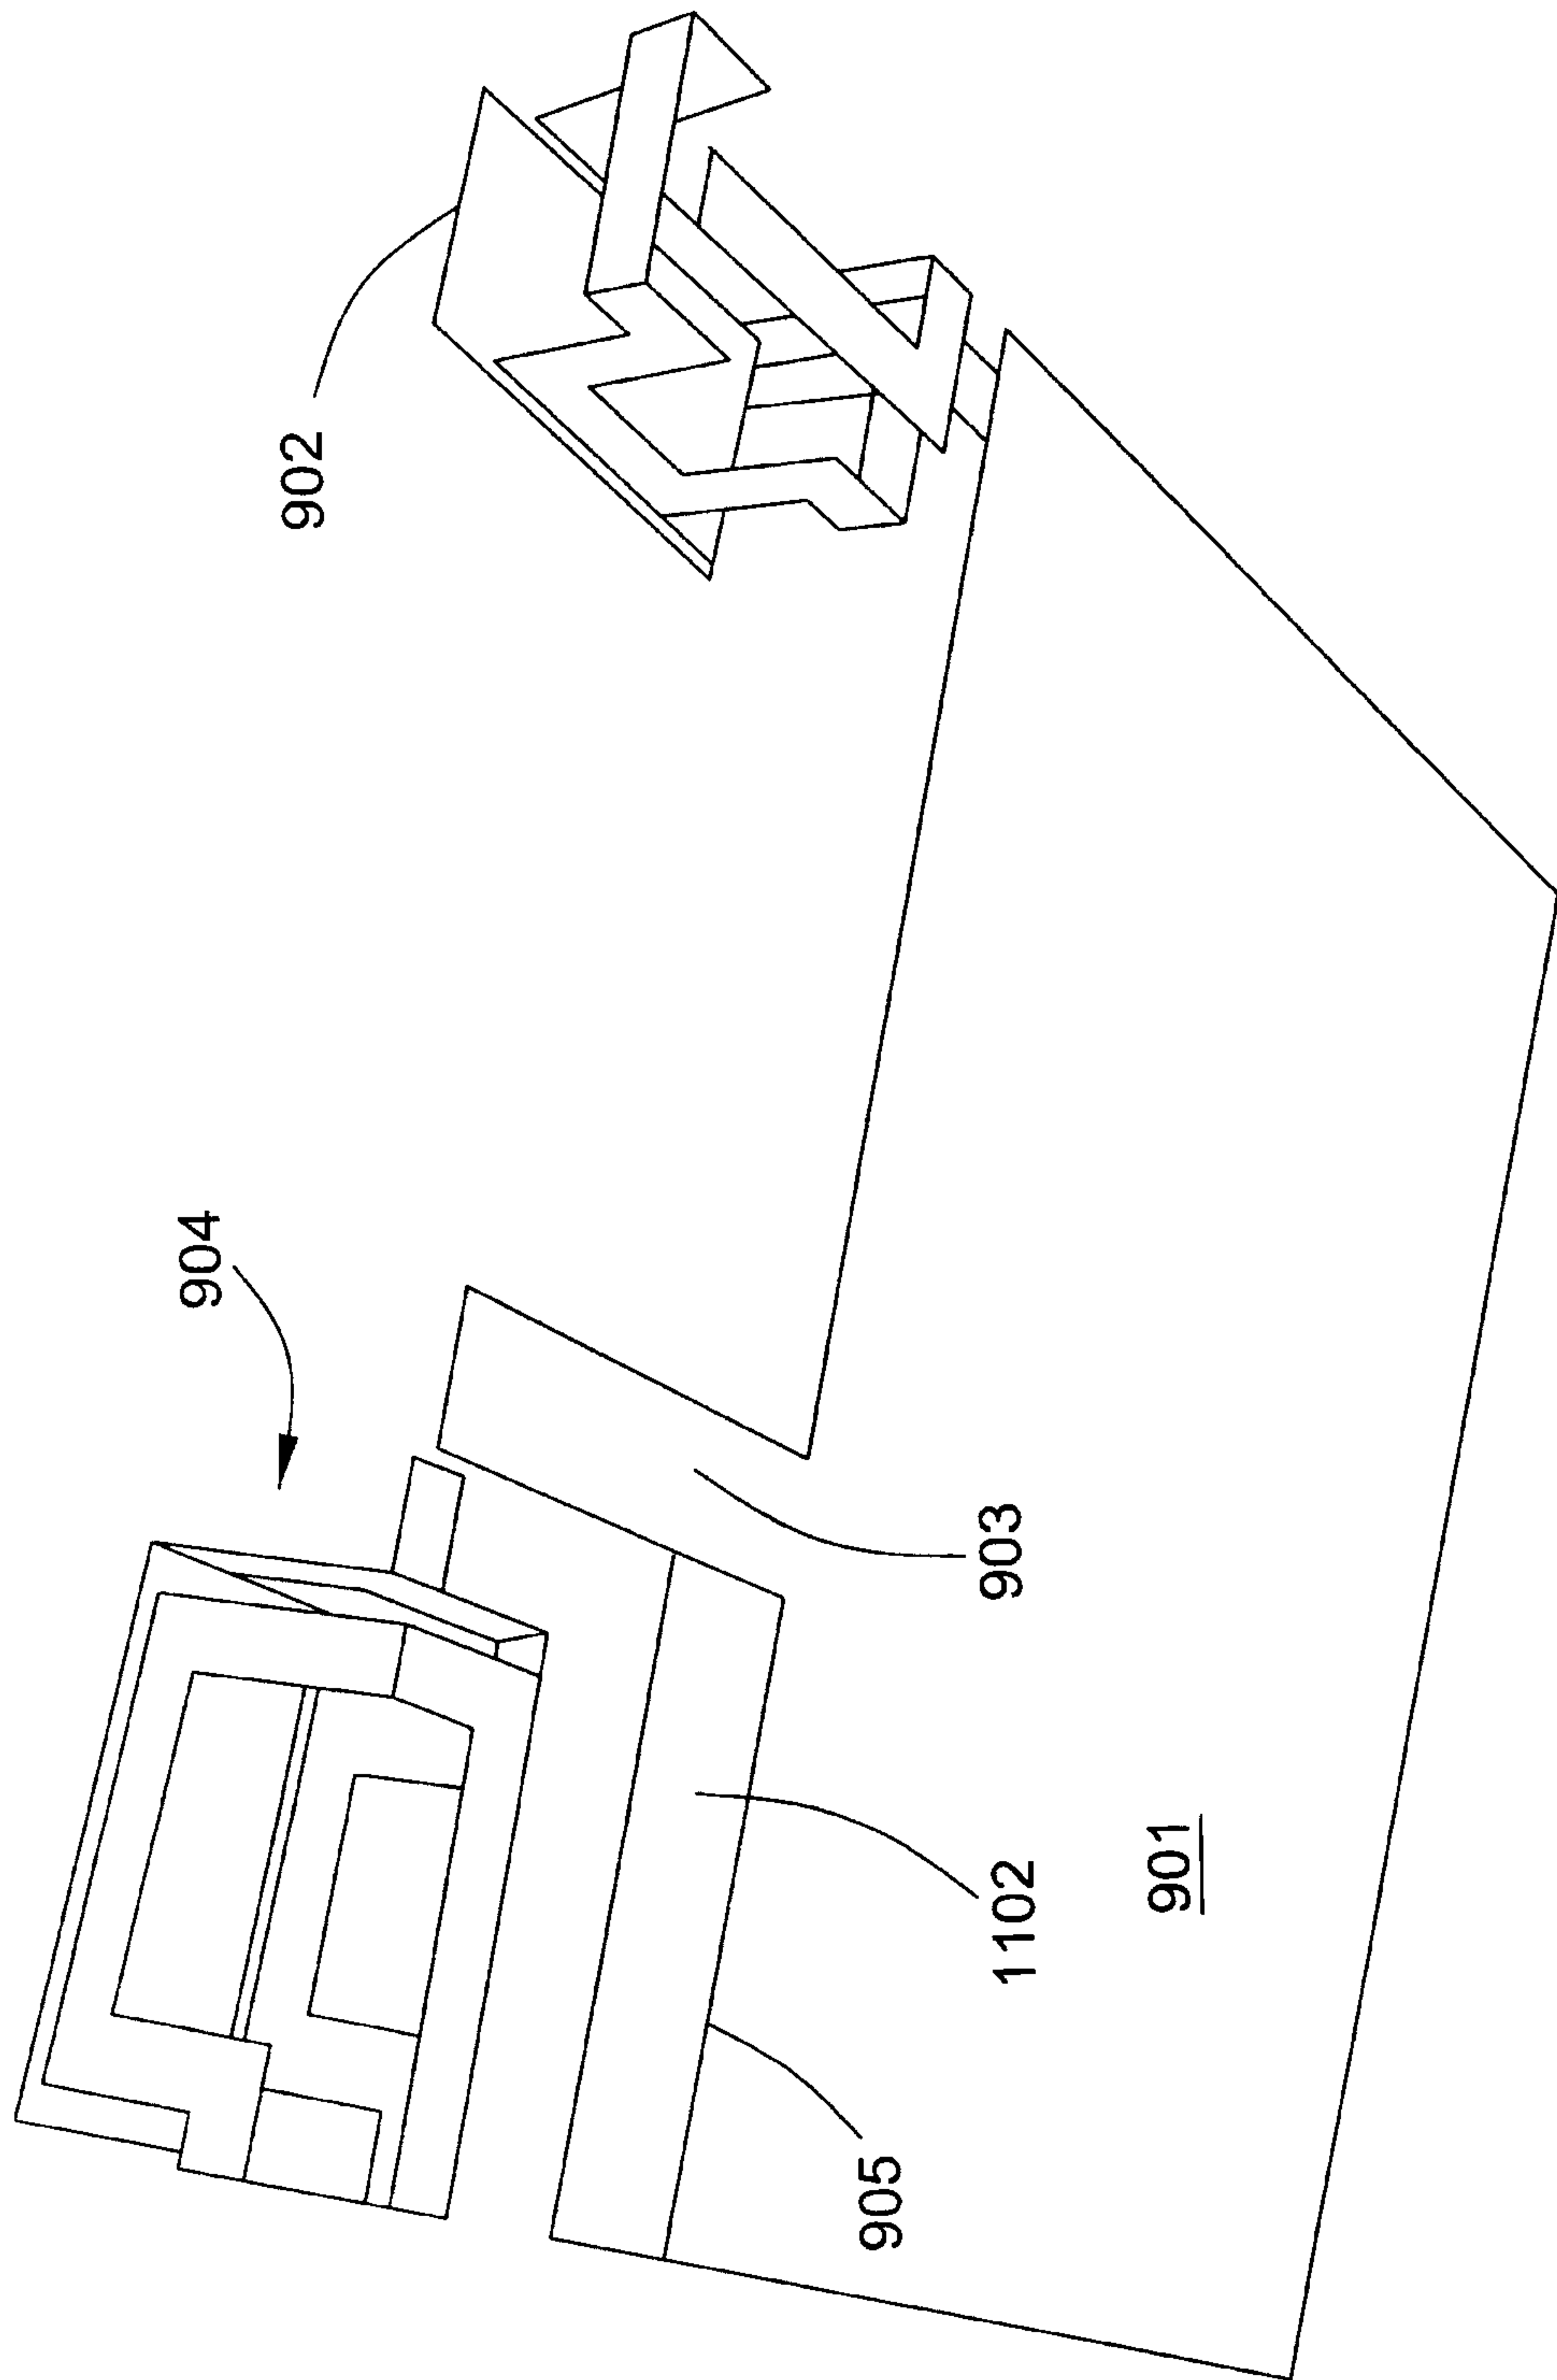
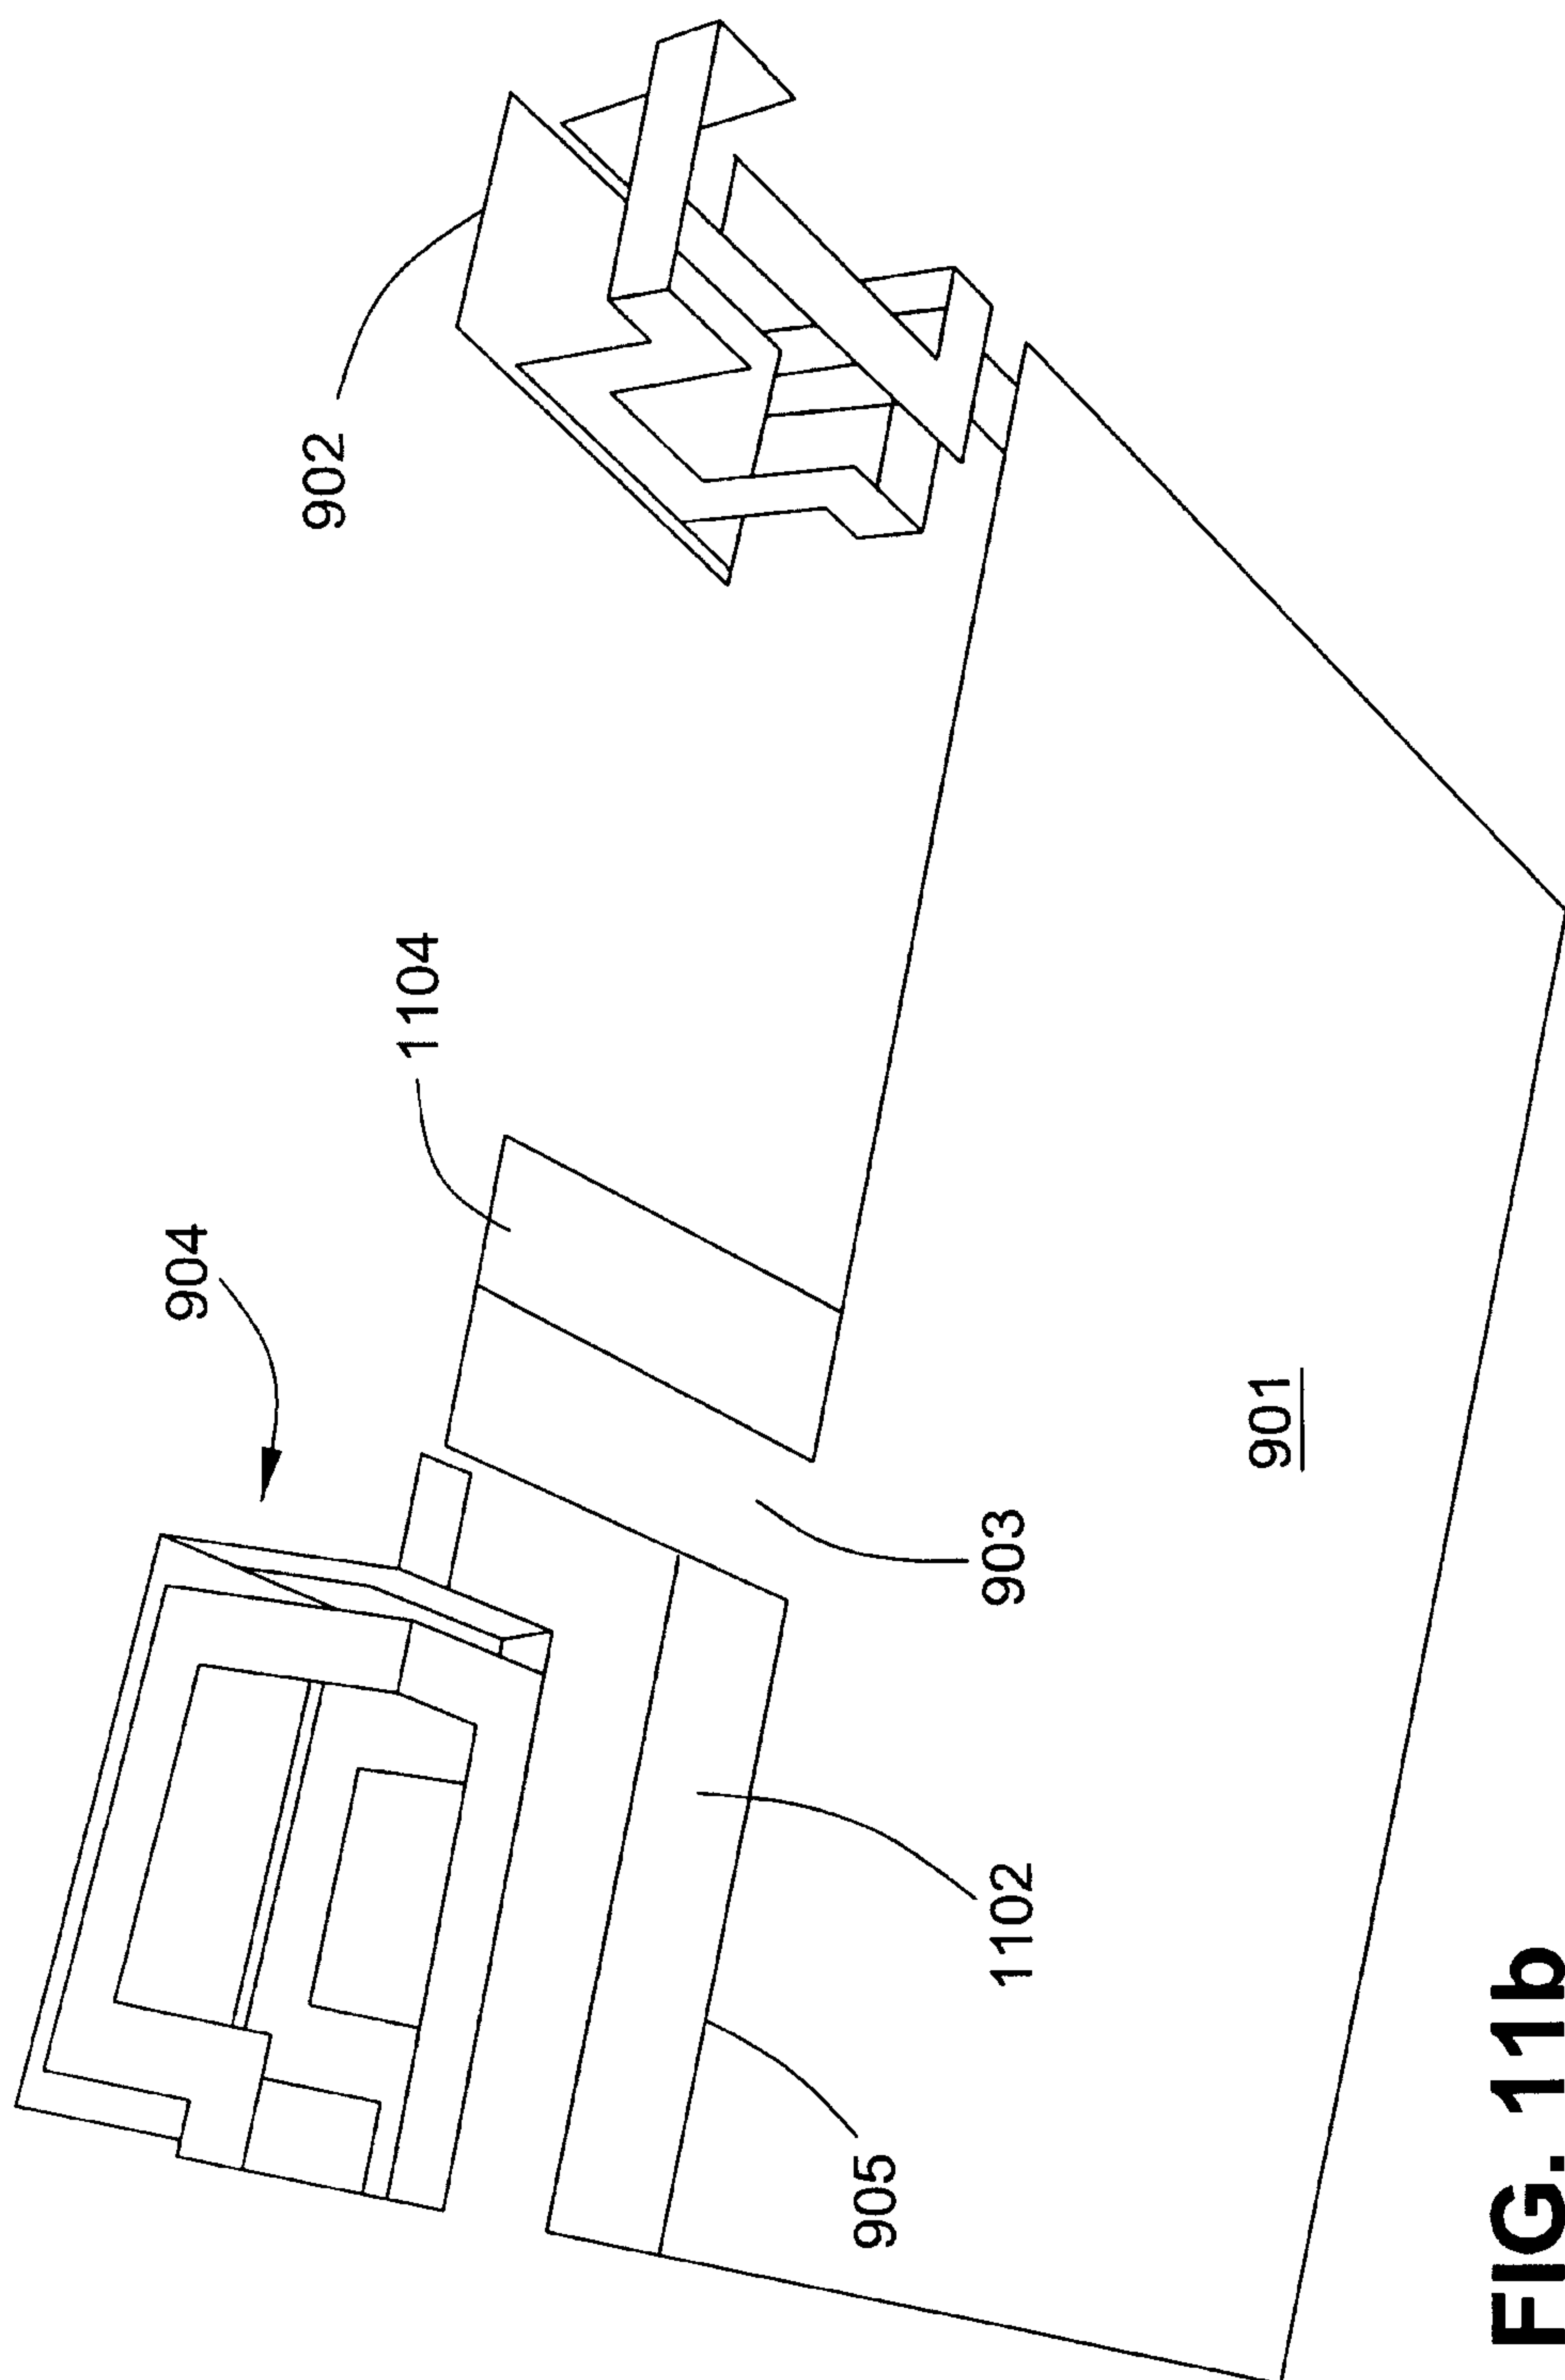
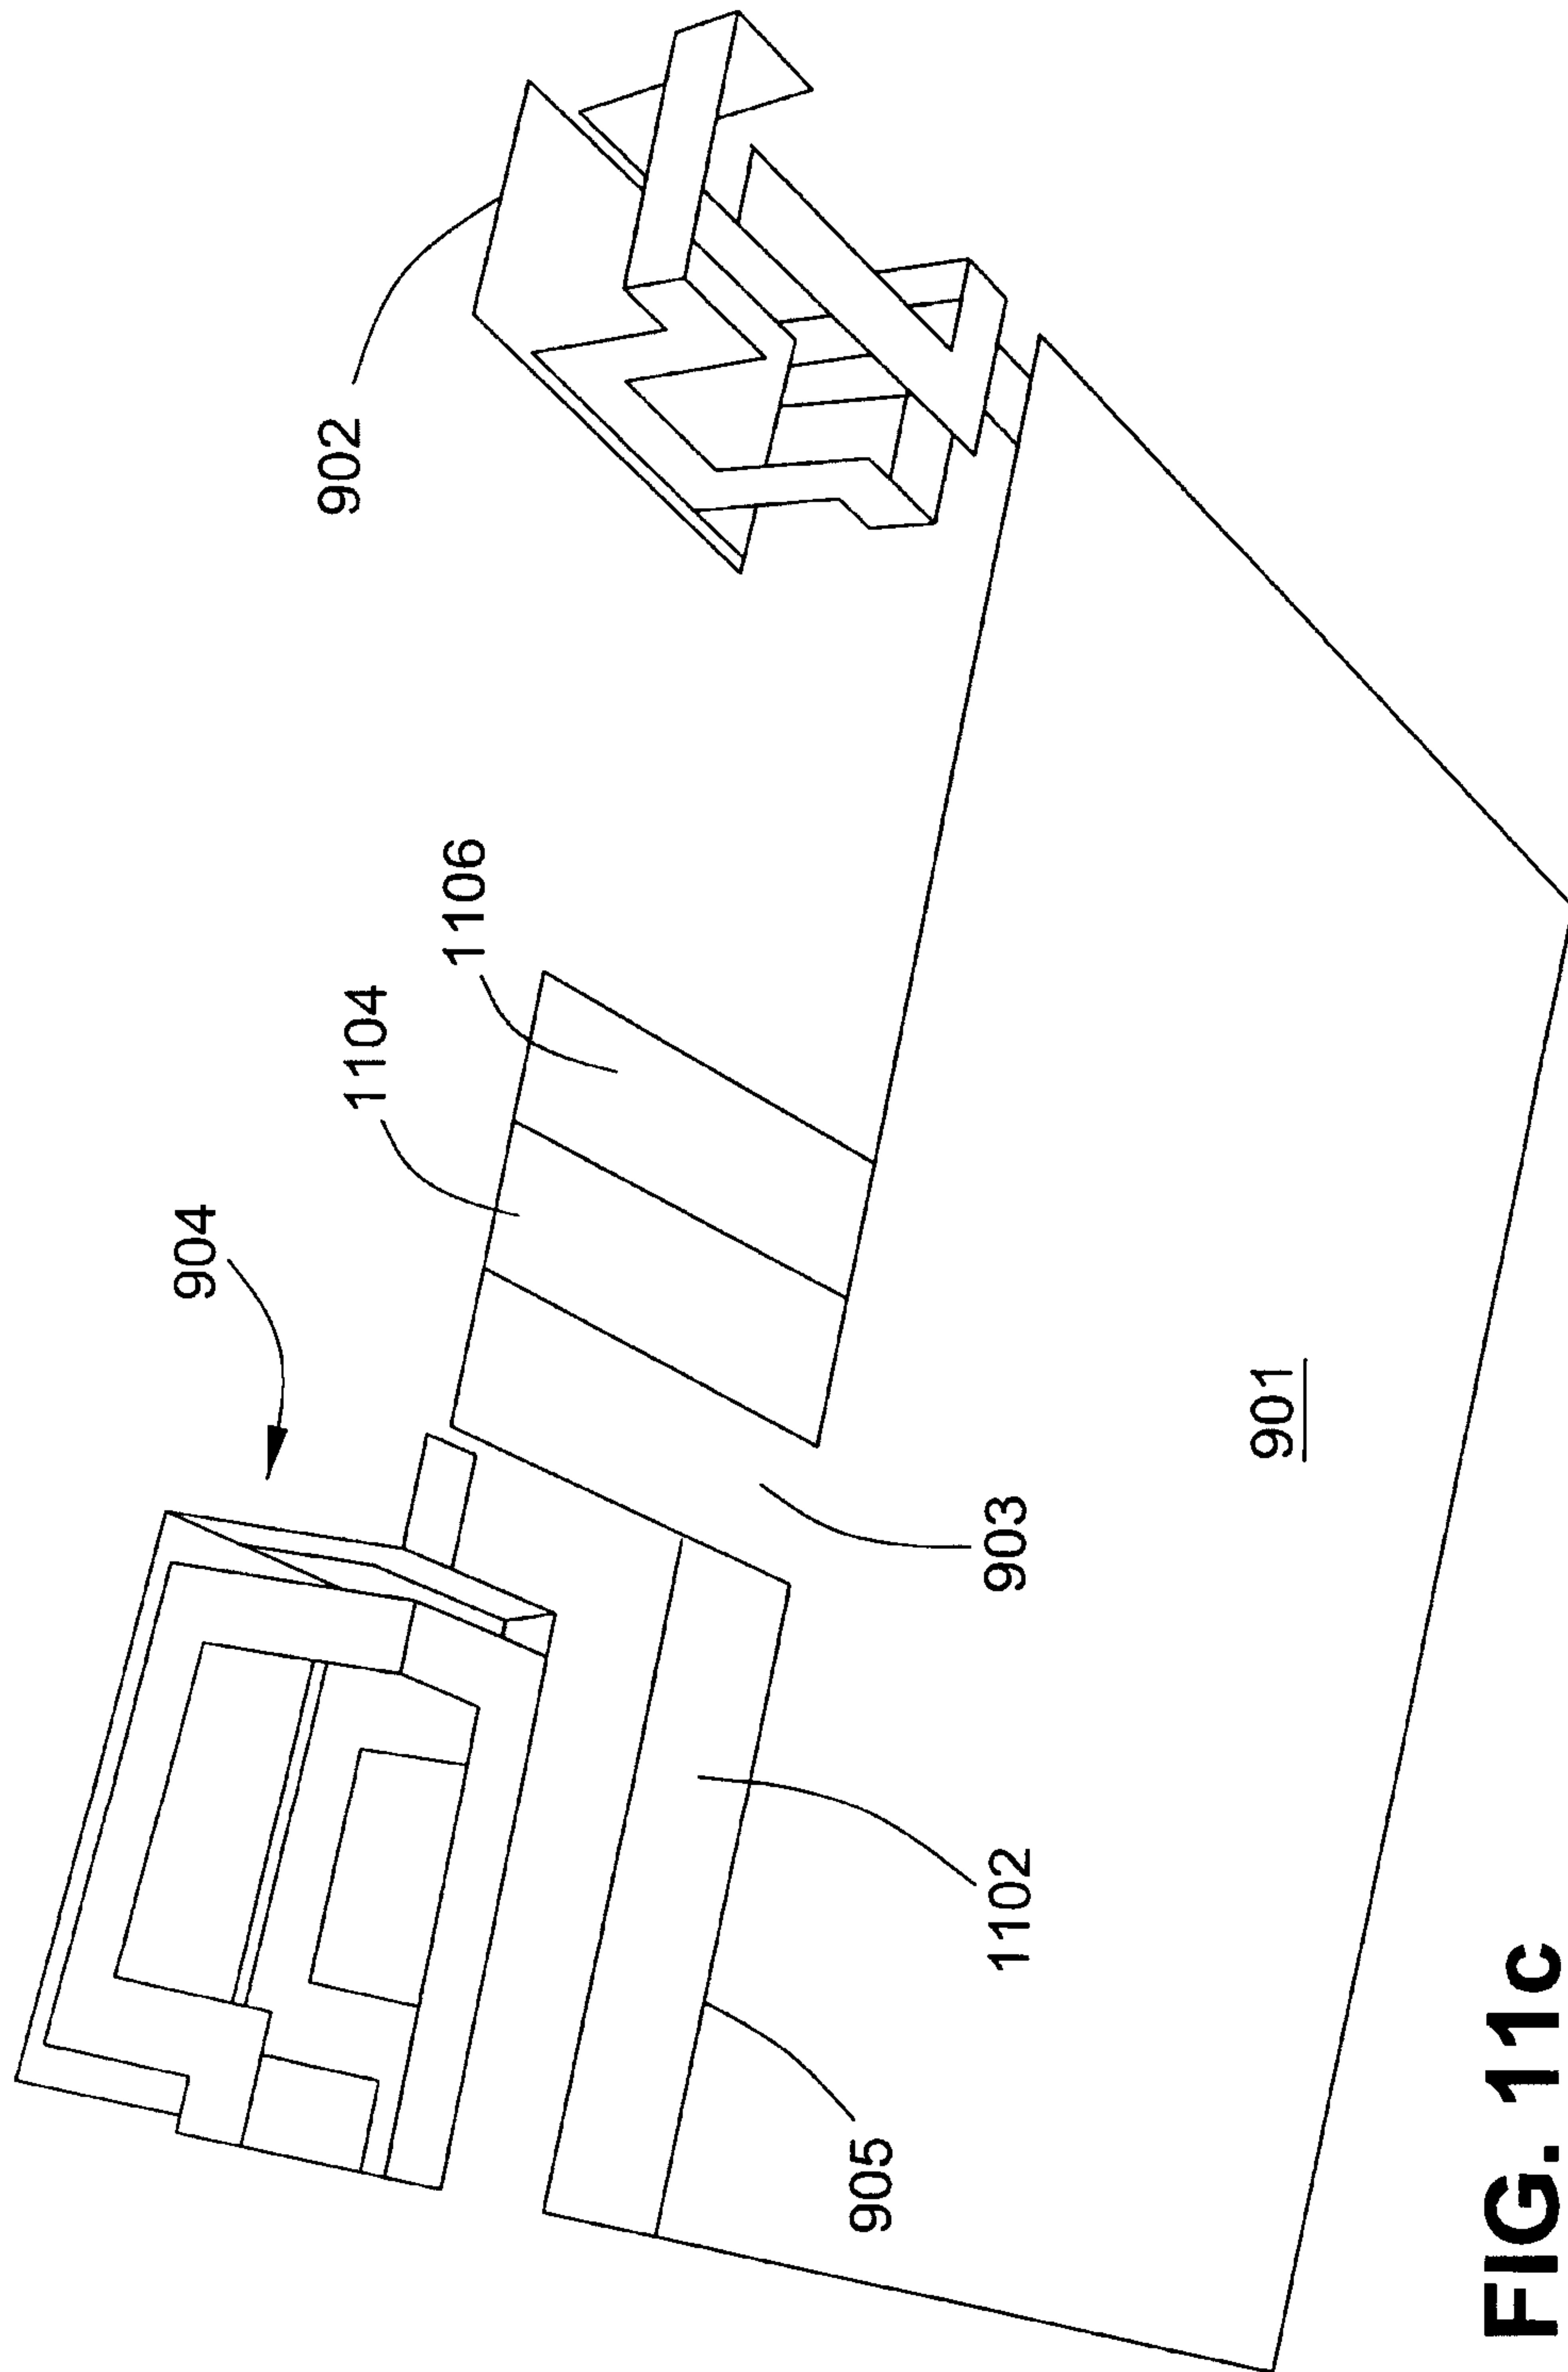


FIG. 11a


21/32

**FIG. 11b**

22/32

**FIG. 11c**

23/32

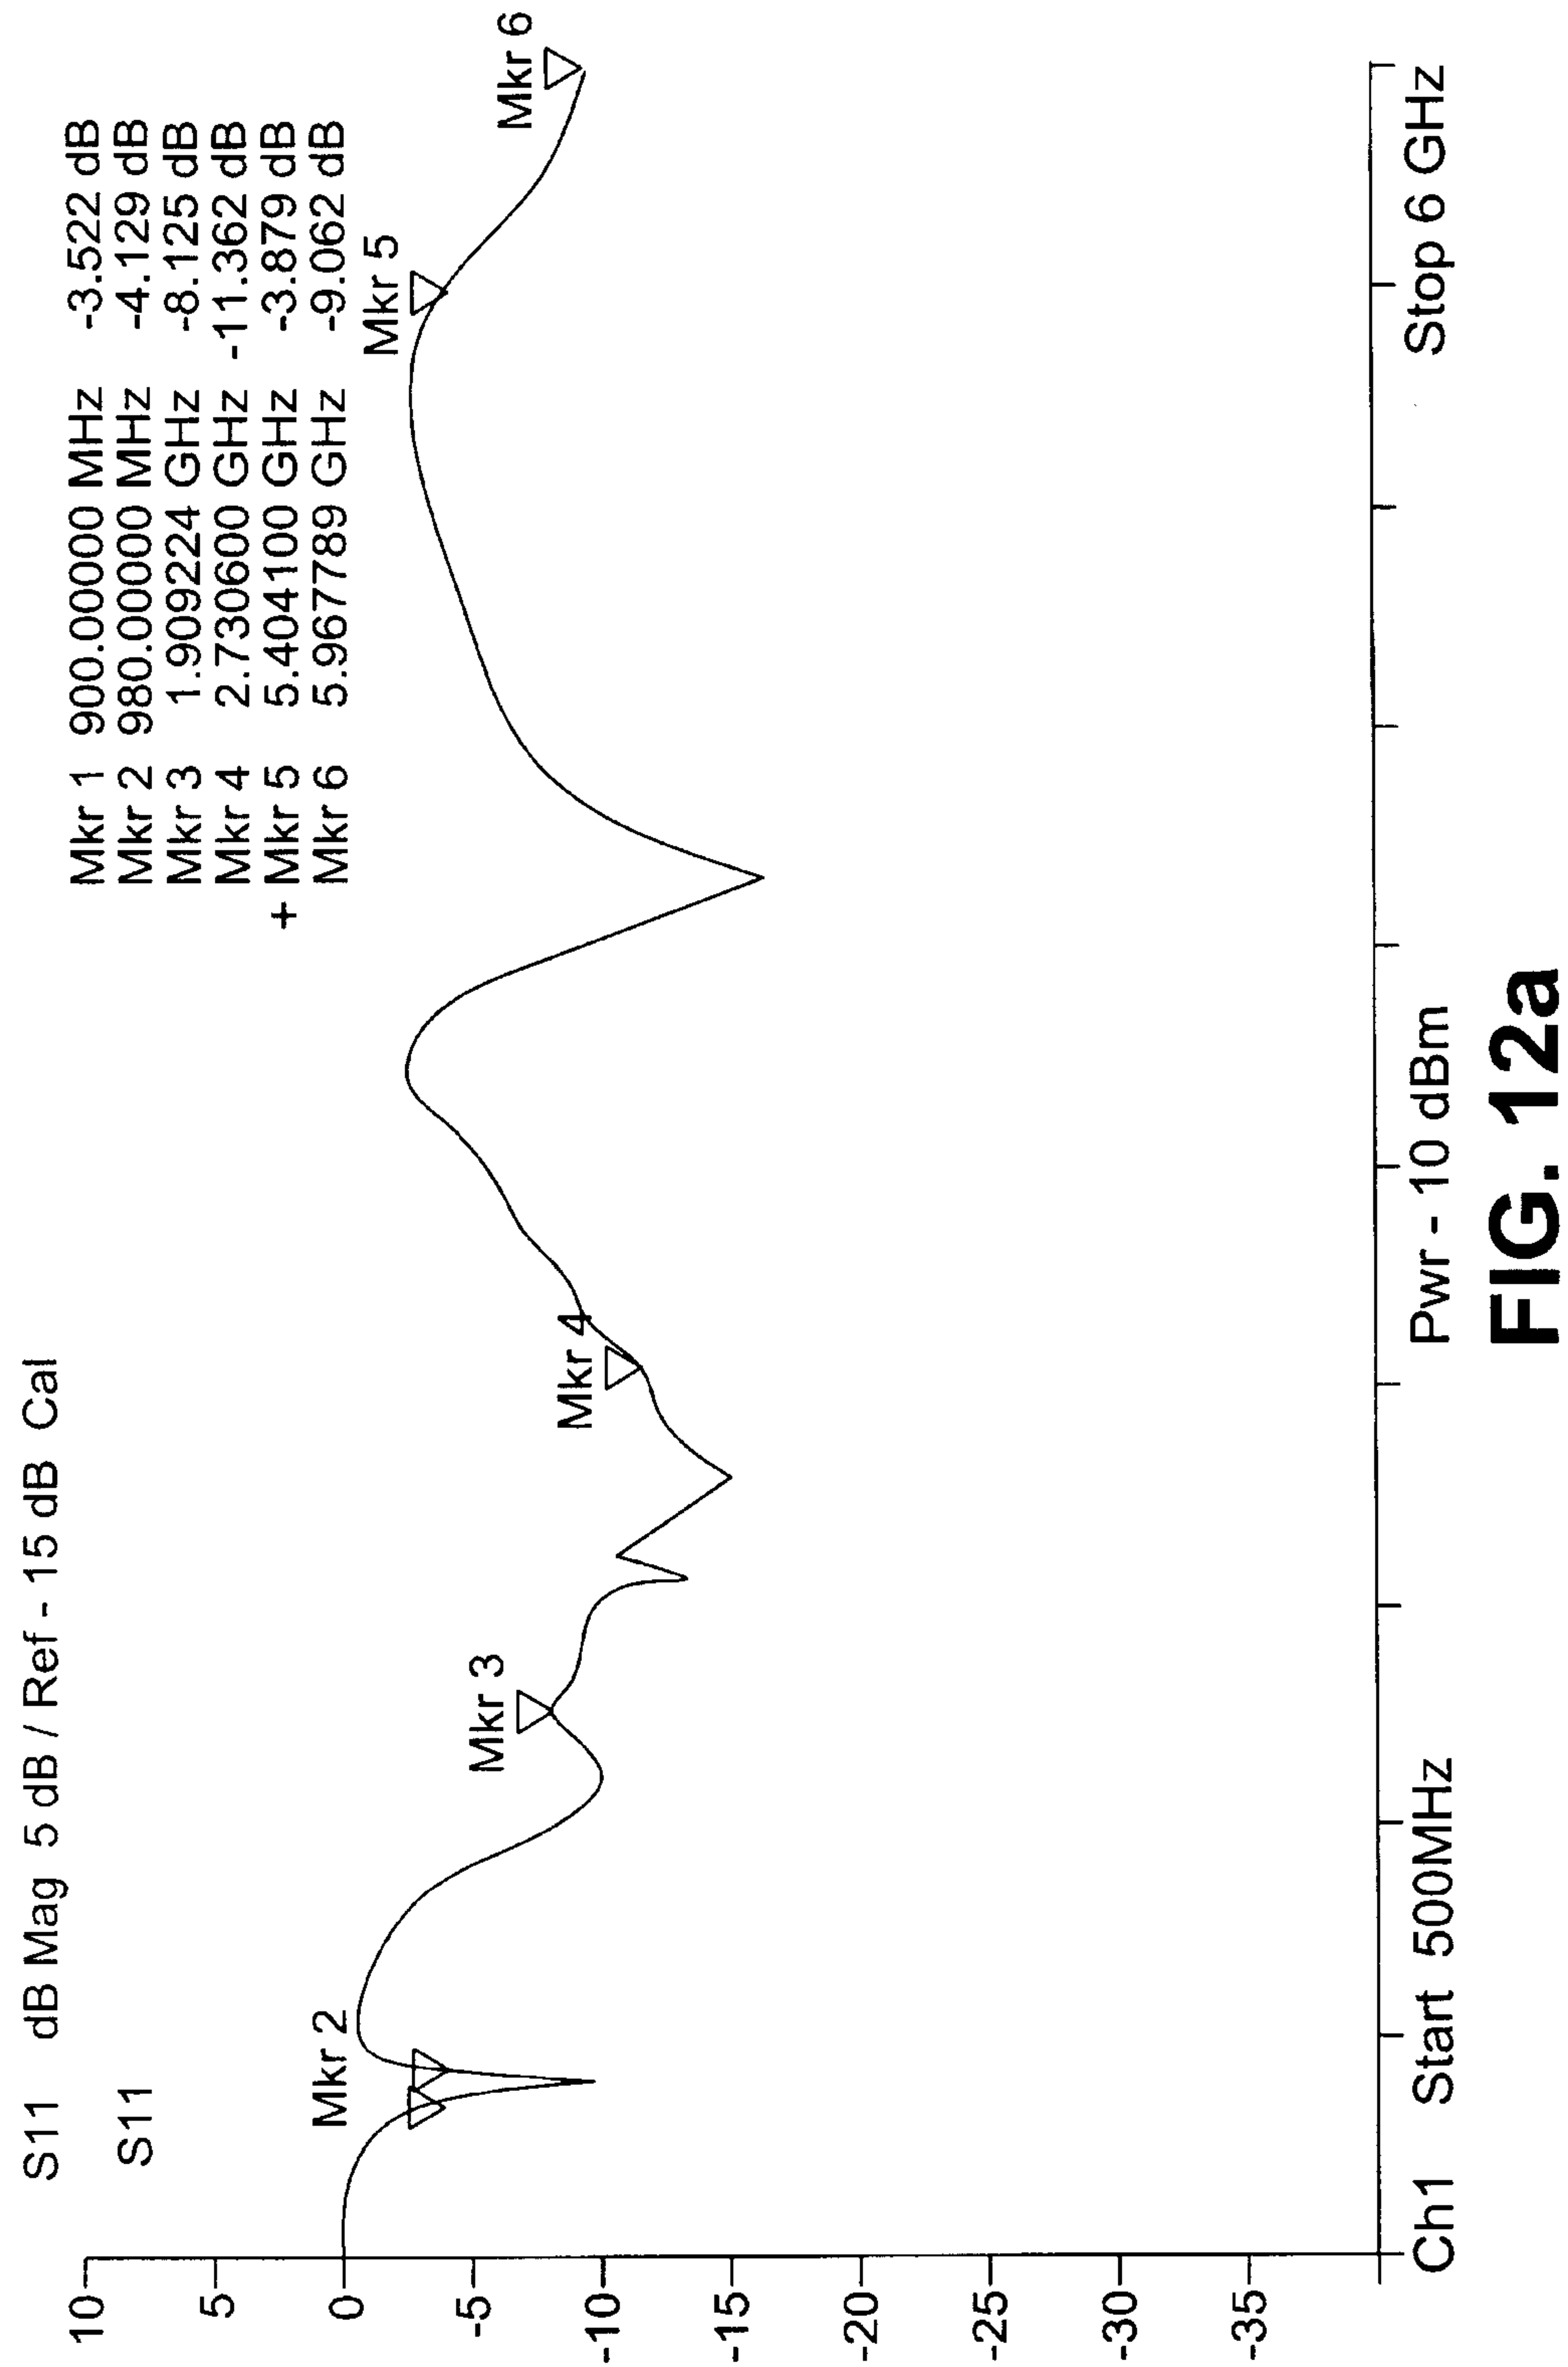

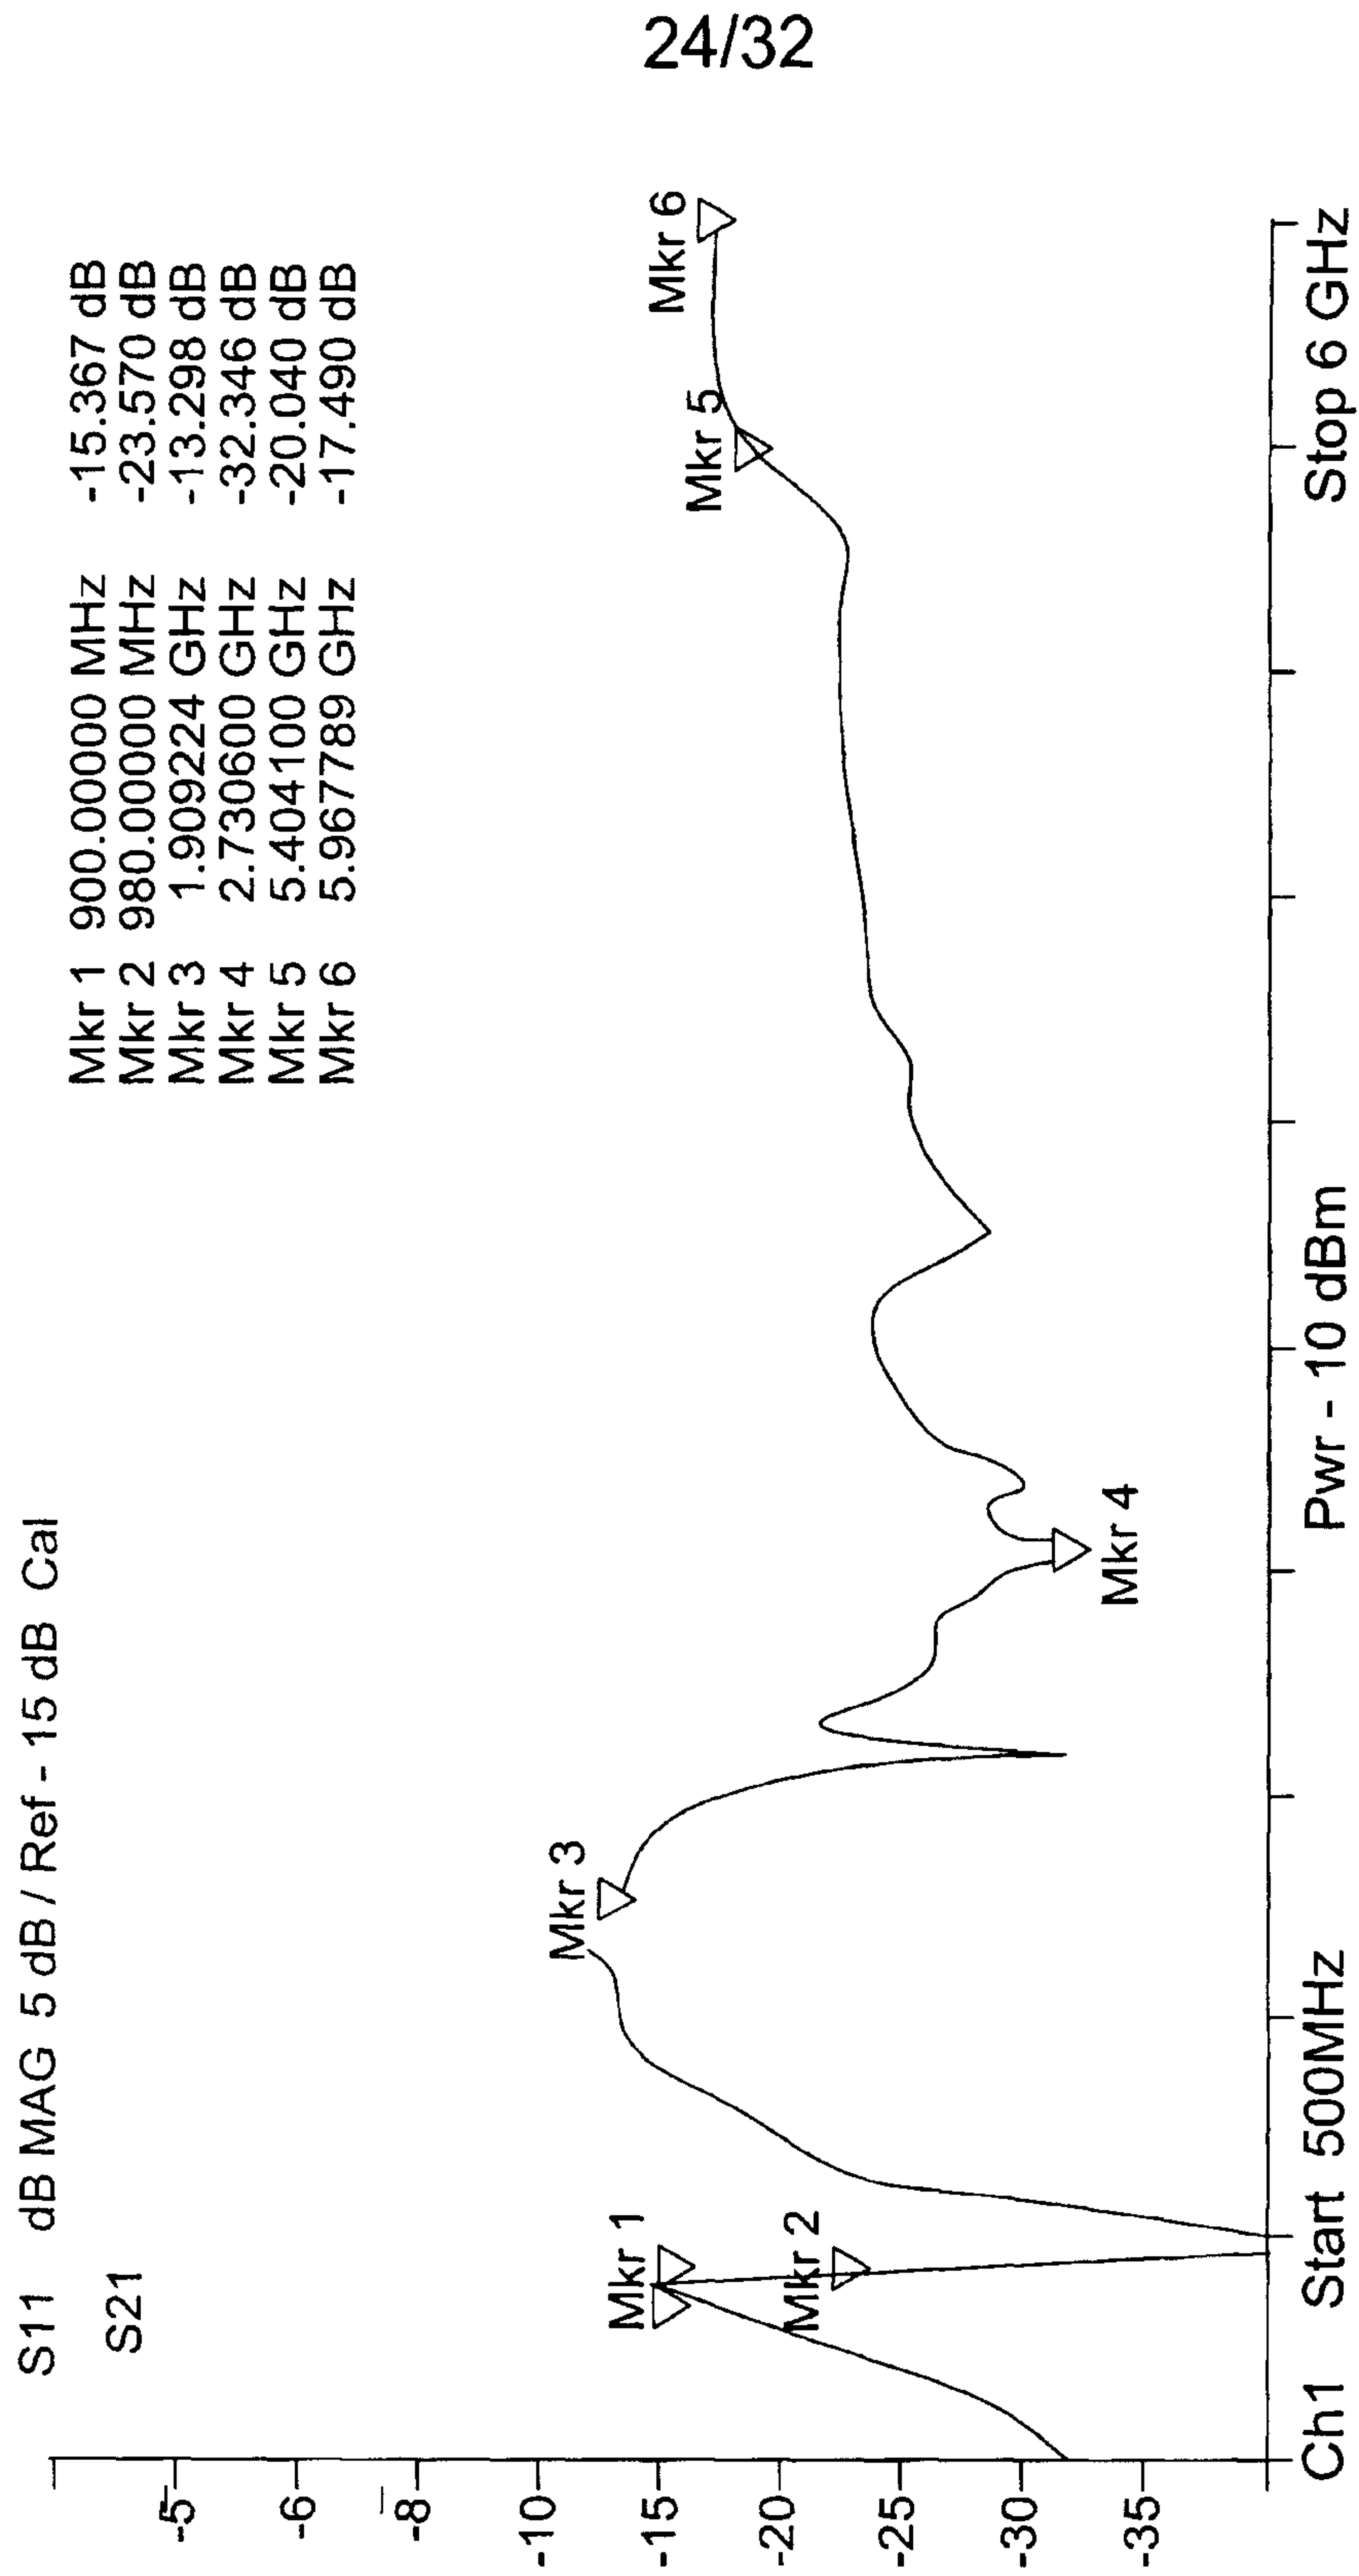


FIG. 12b

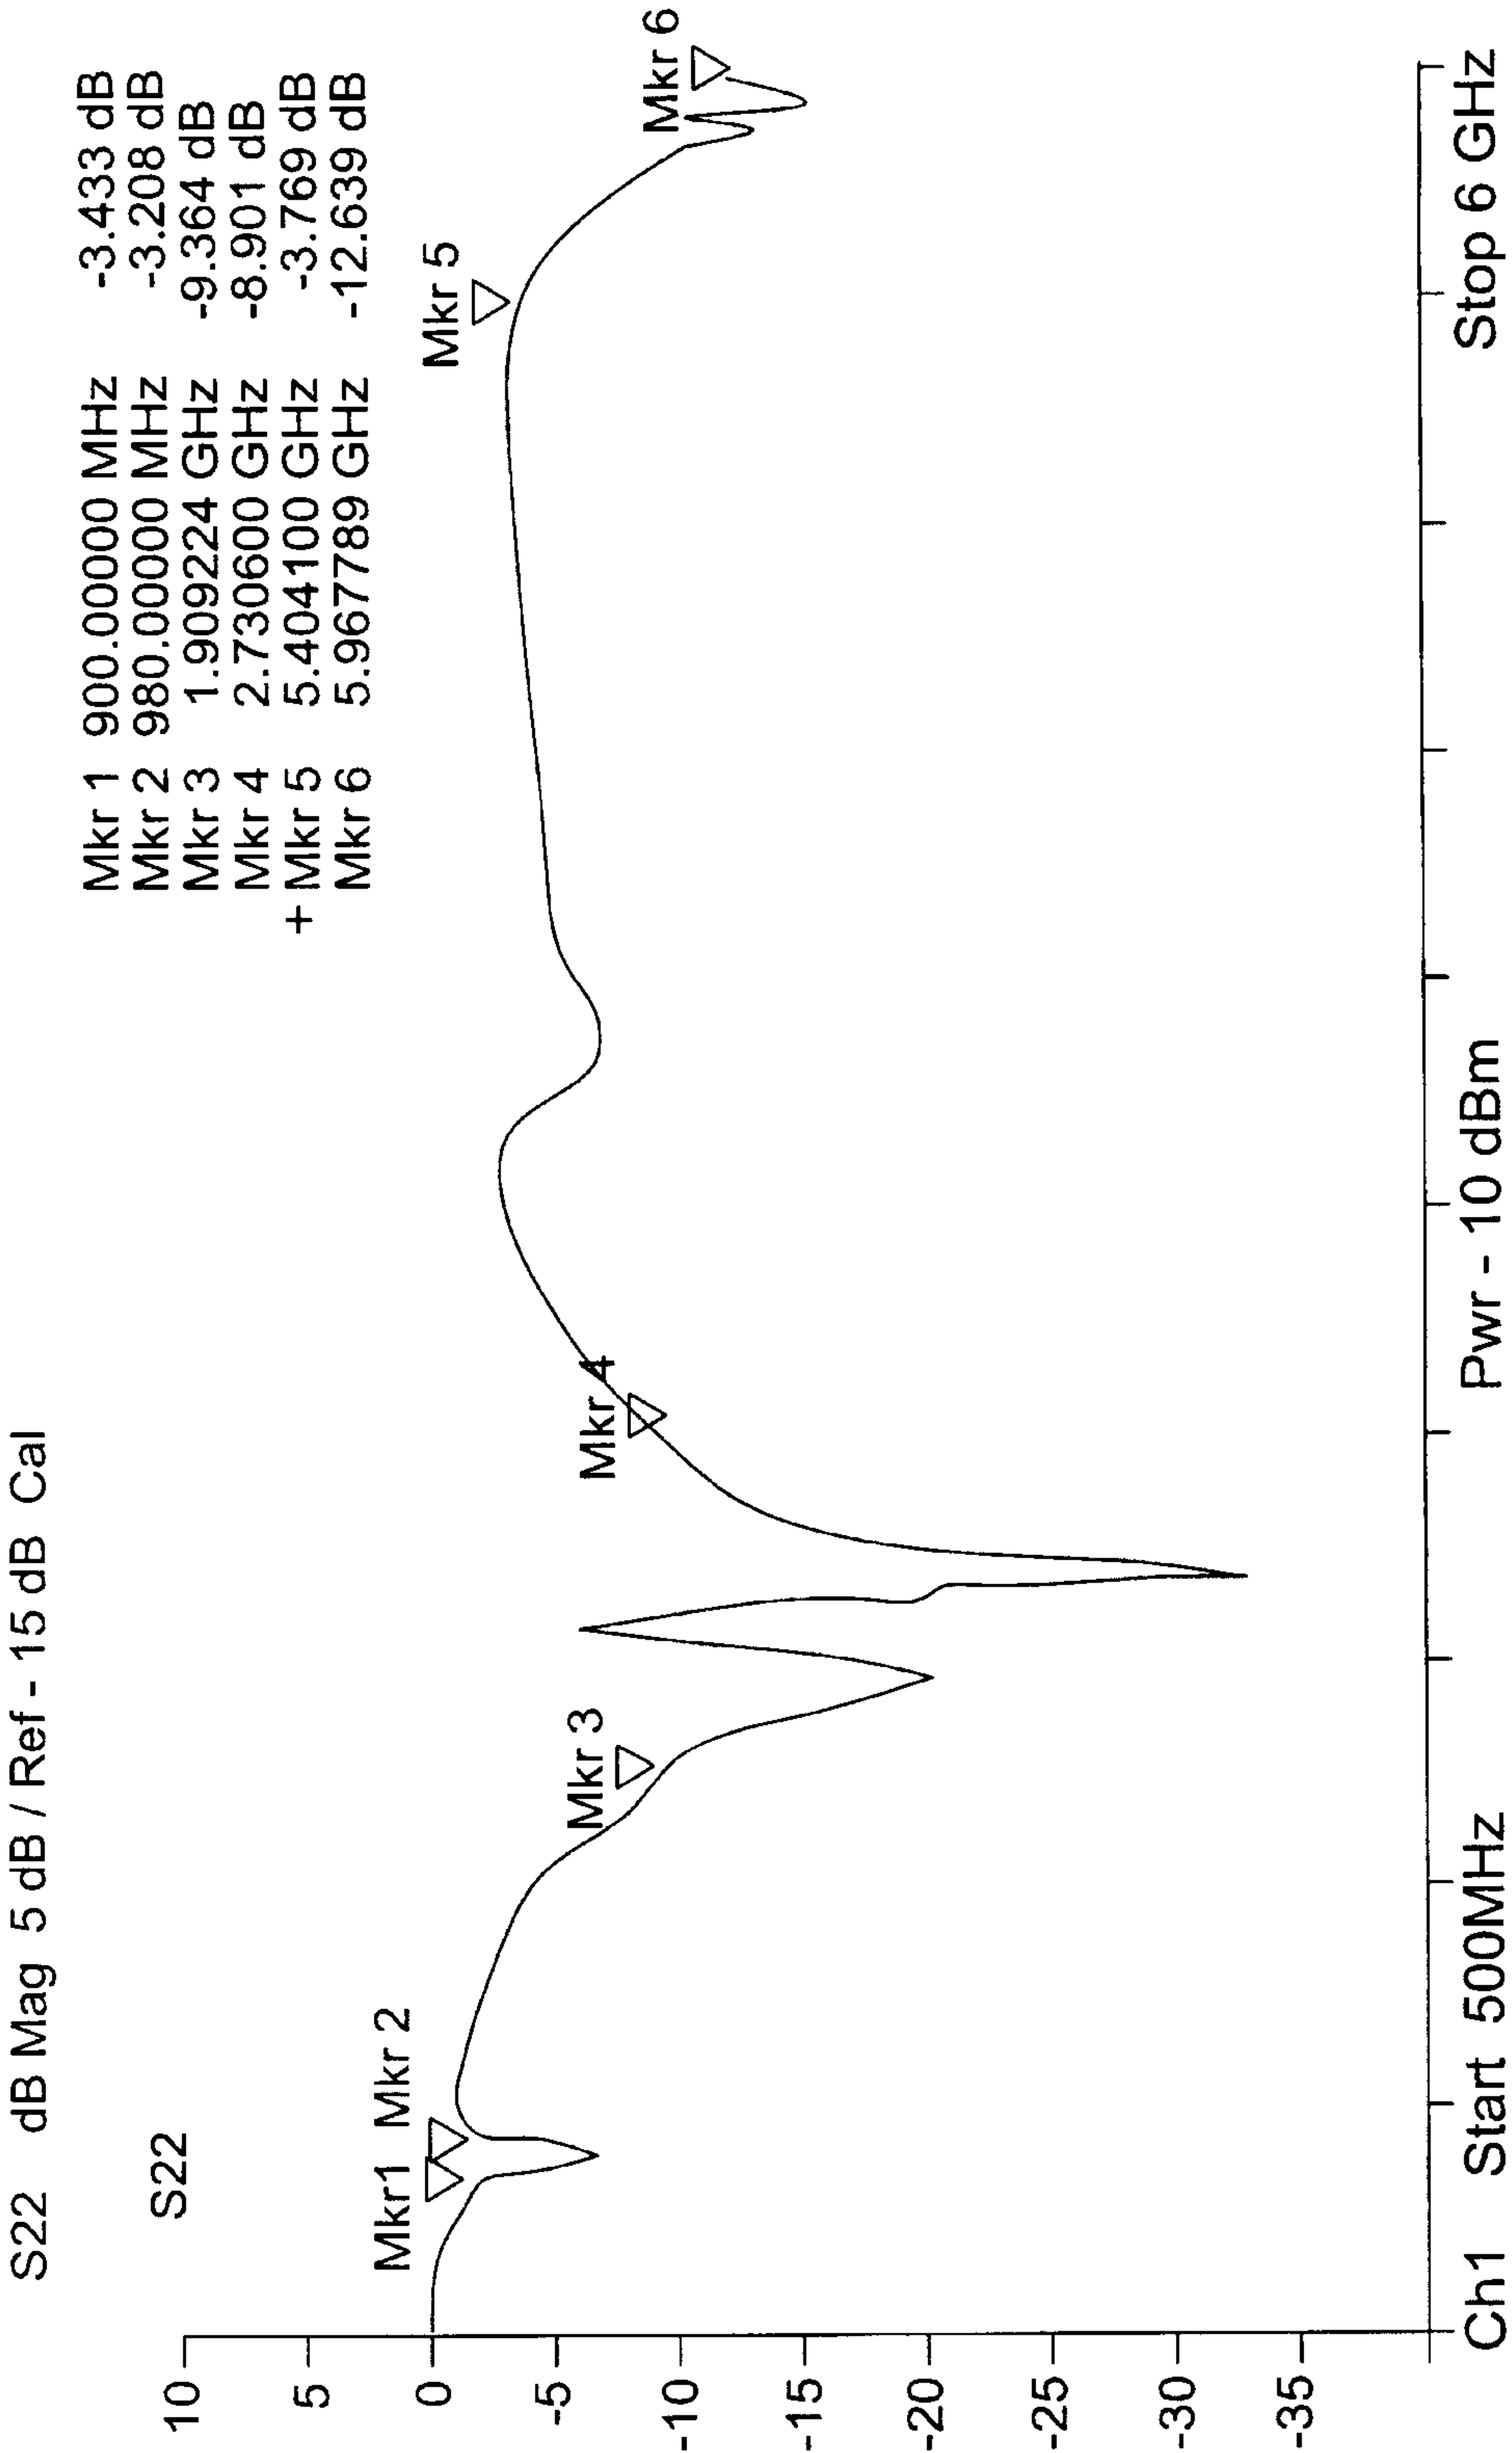


FIG. 12c

26/32

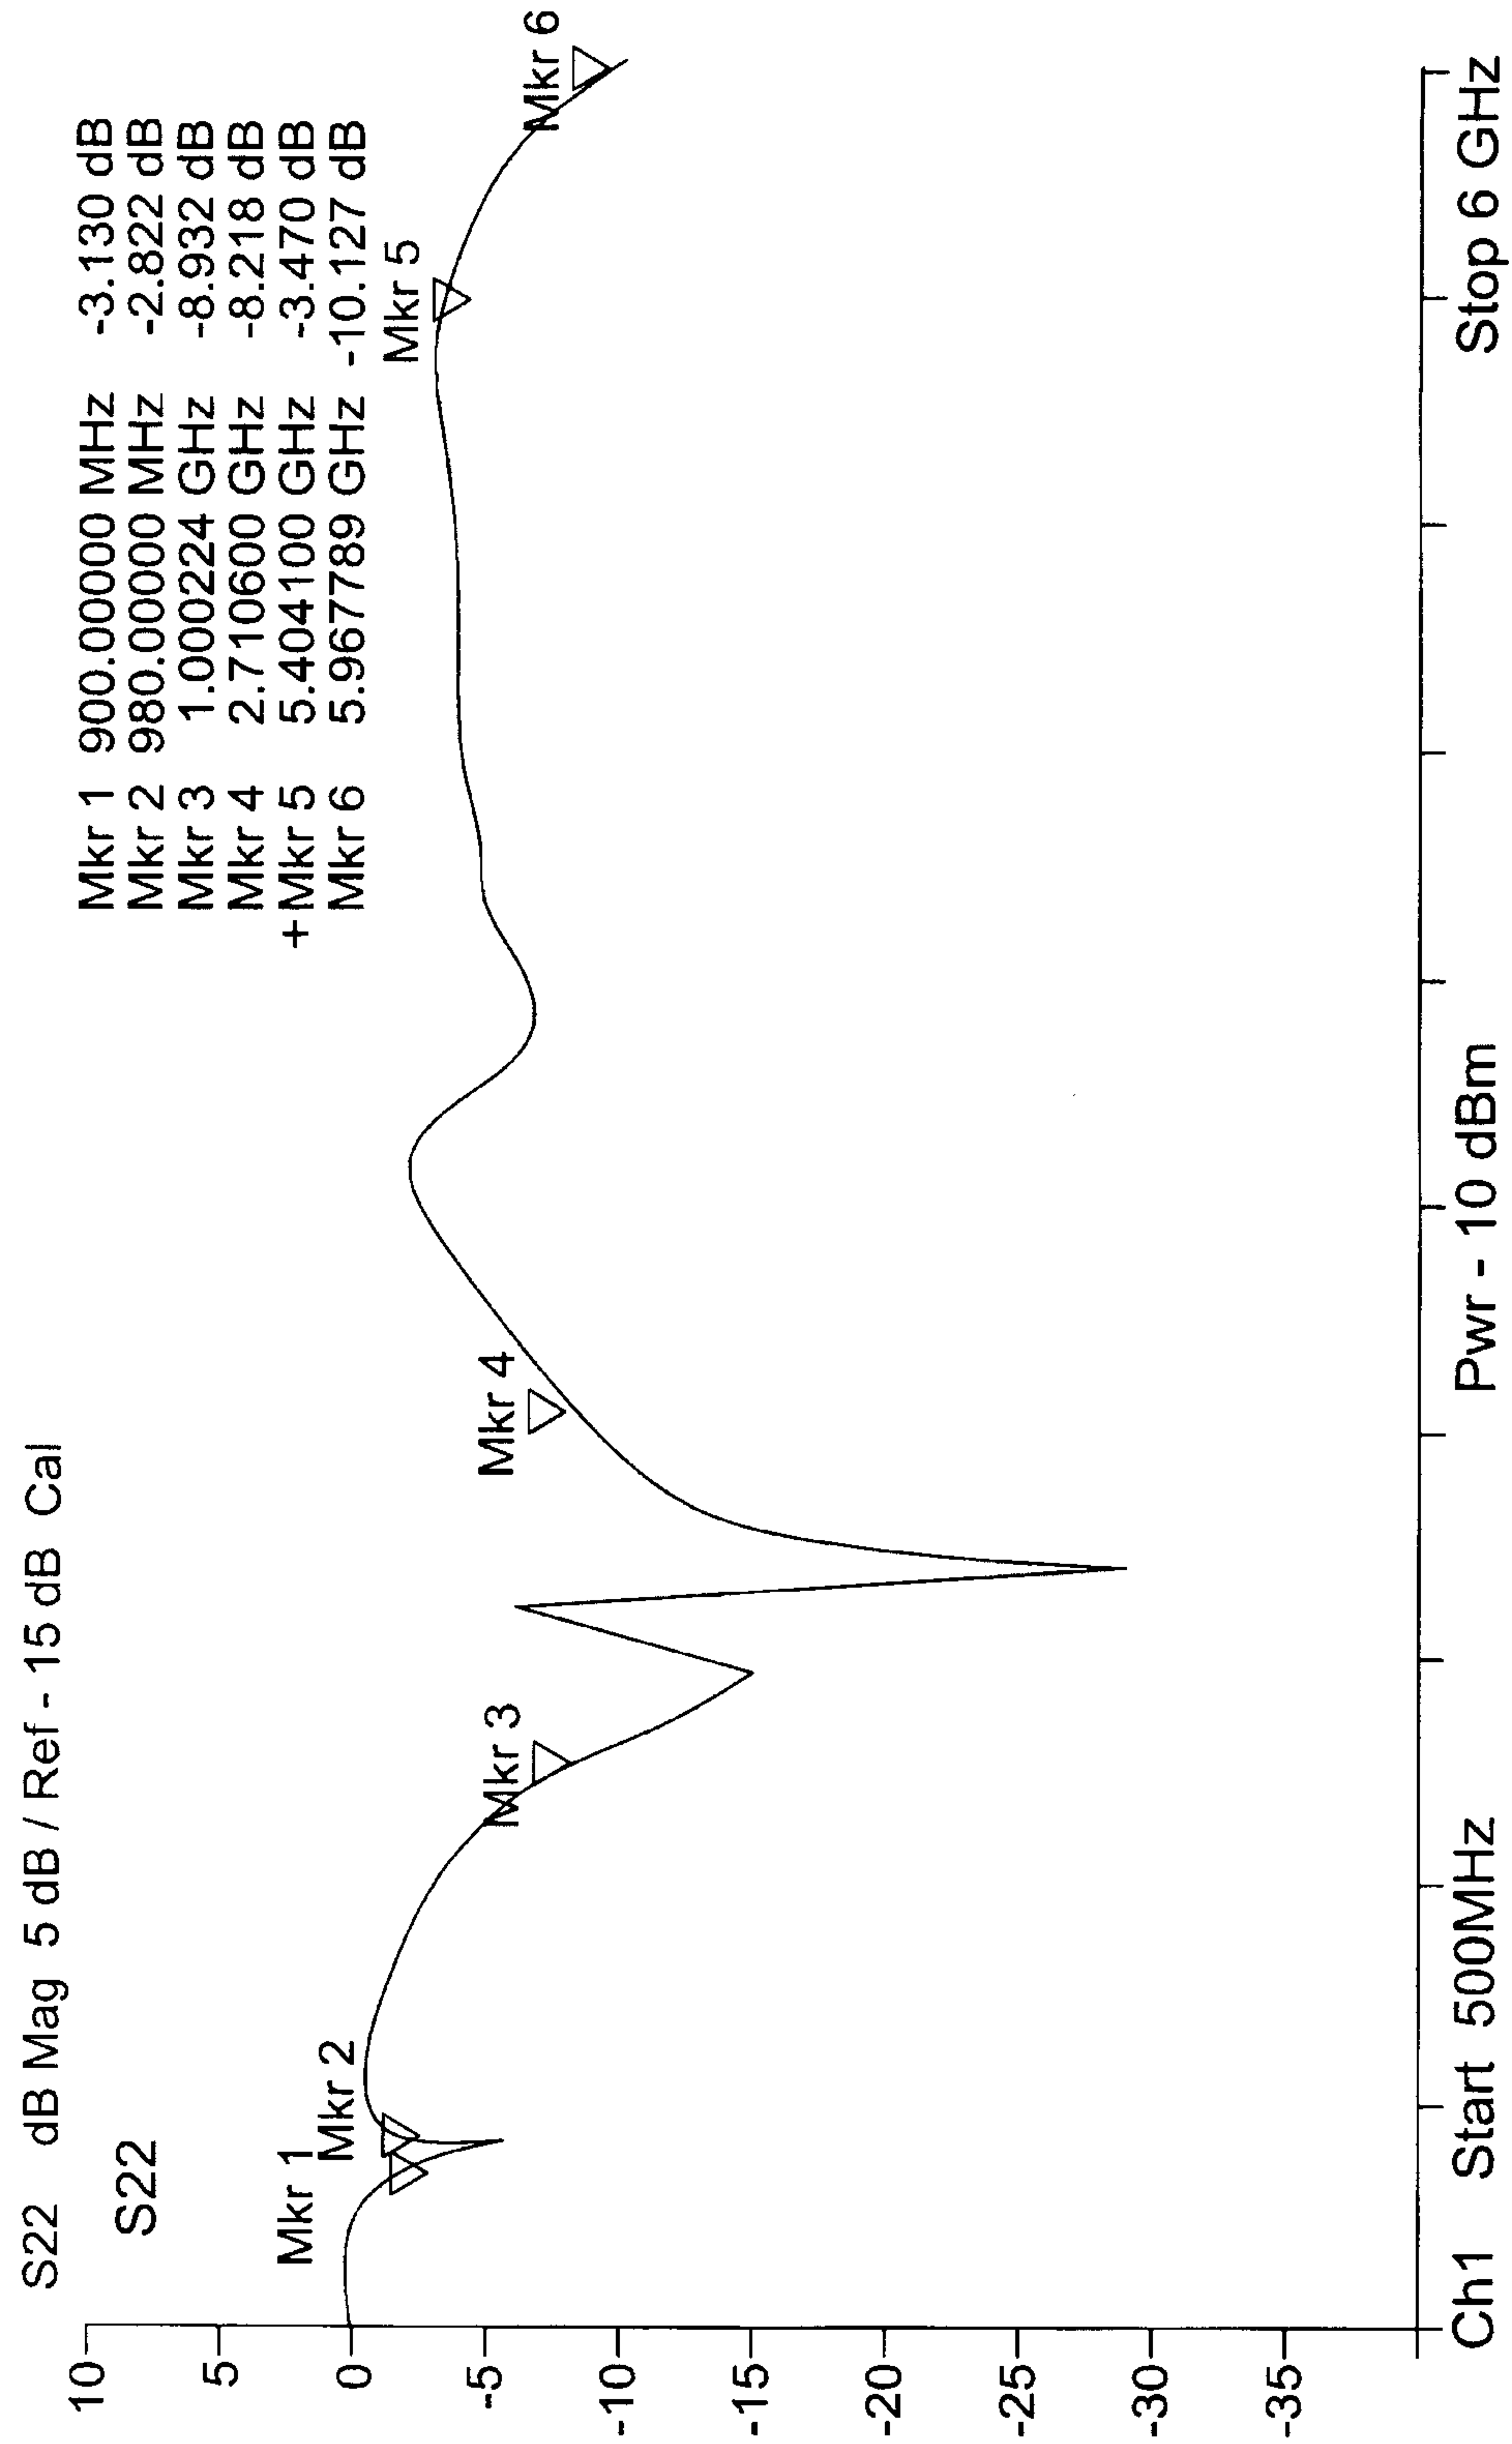


FIG. 13a

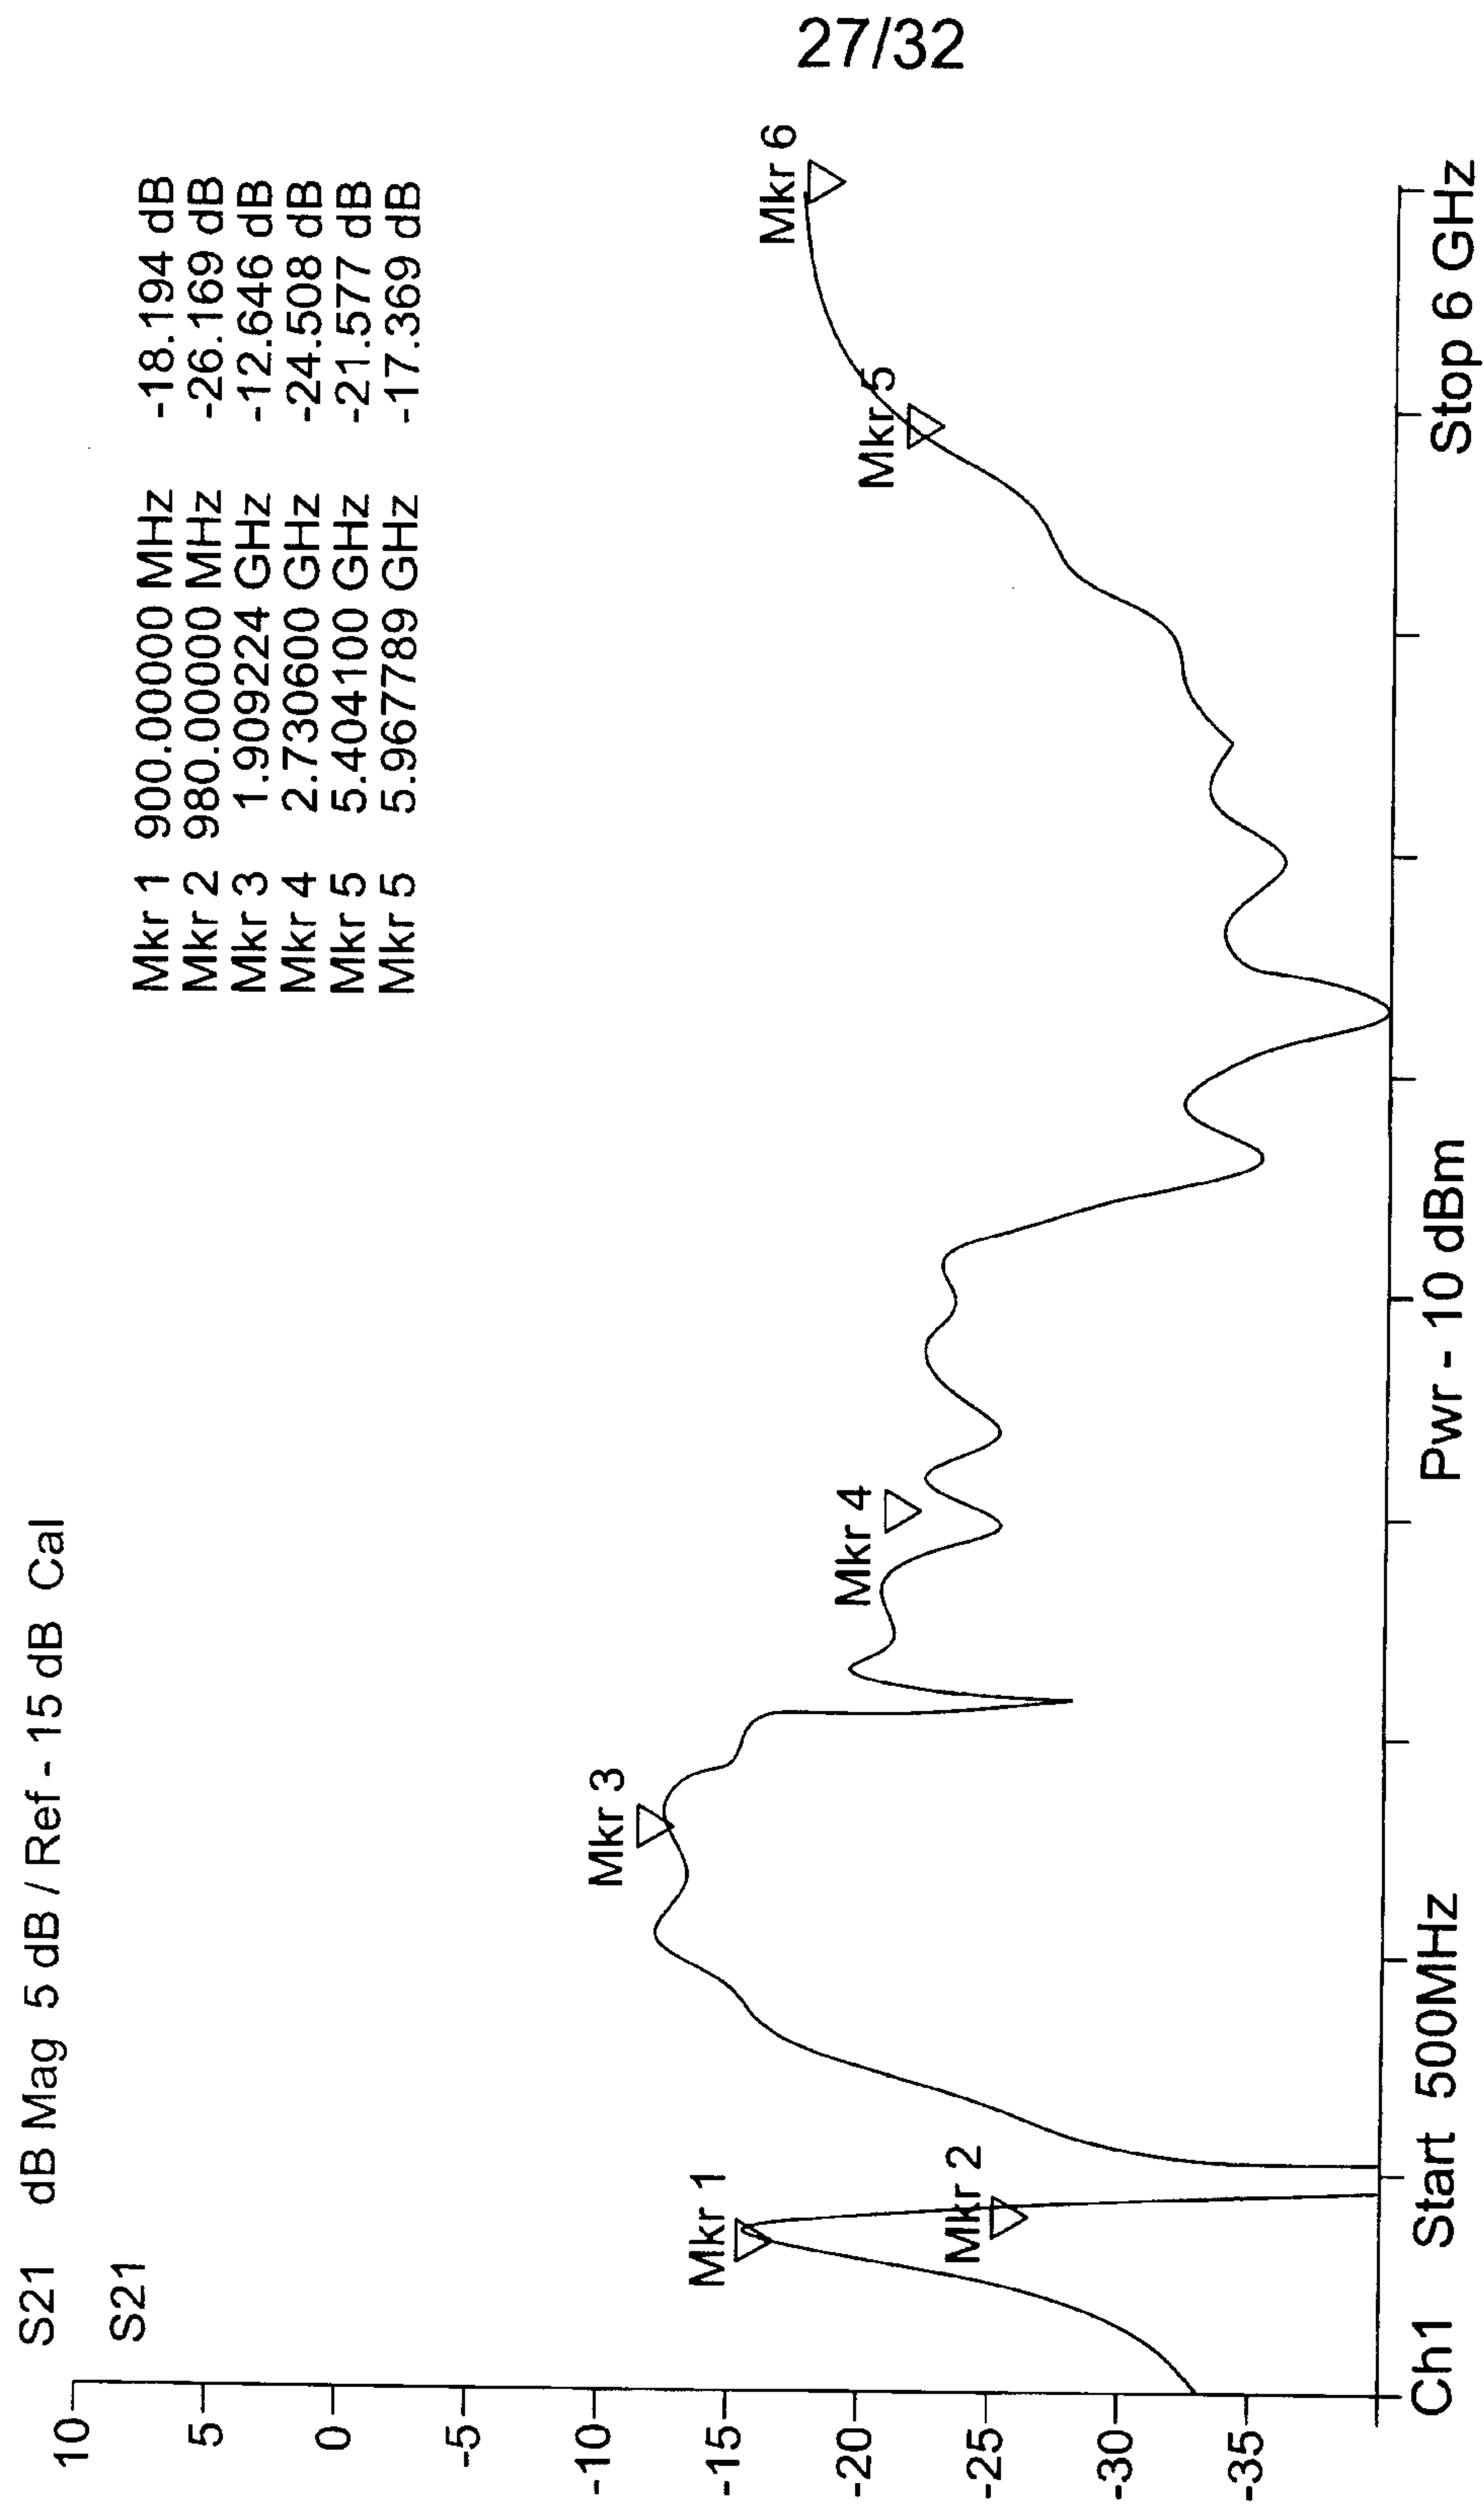


FIG. 13b

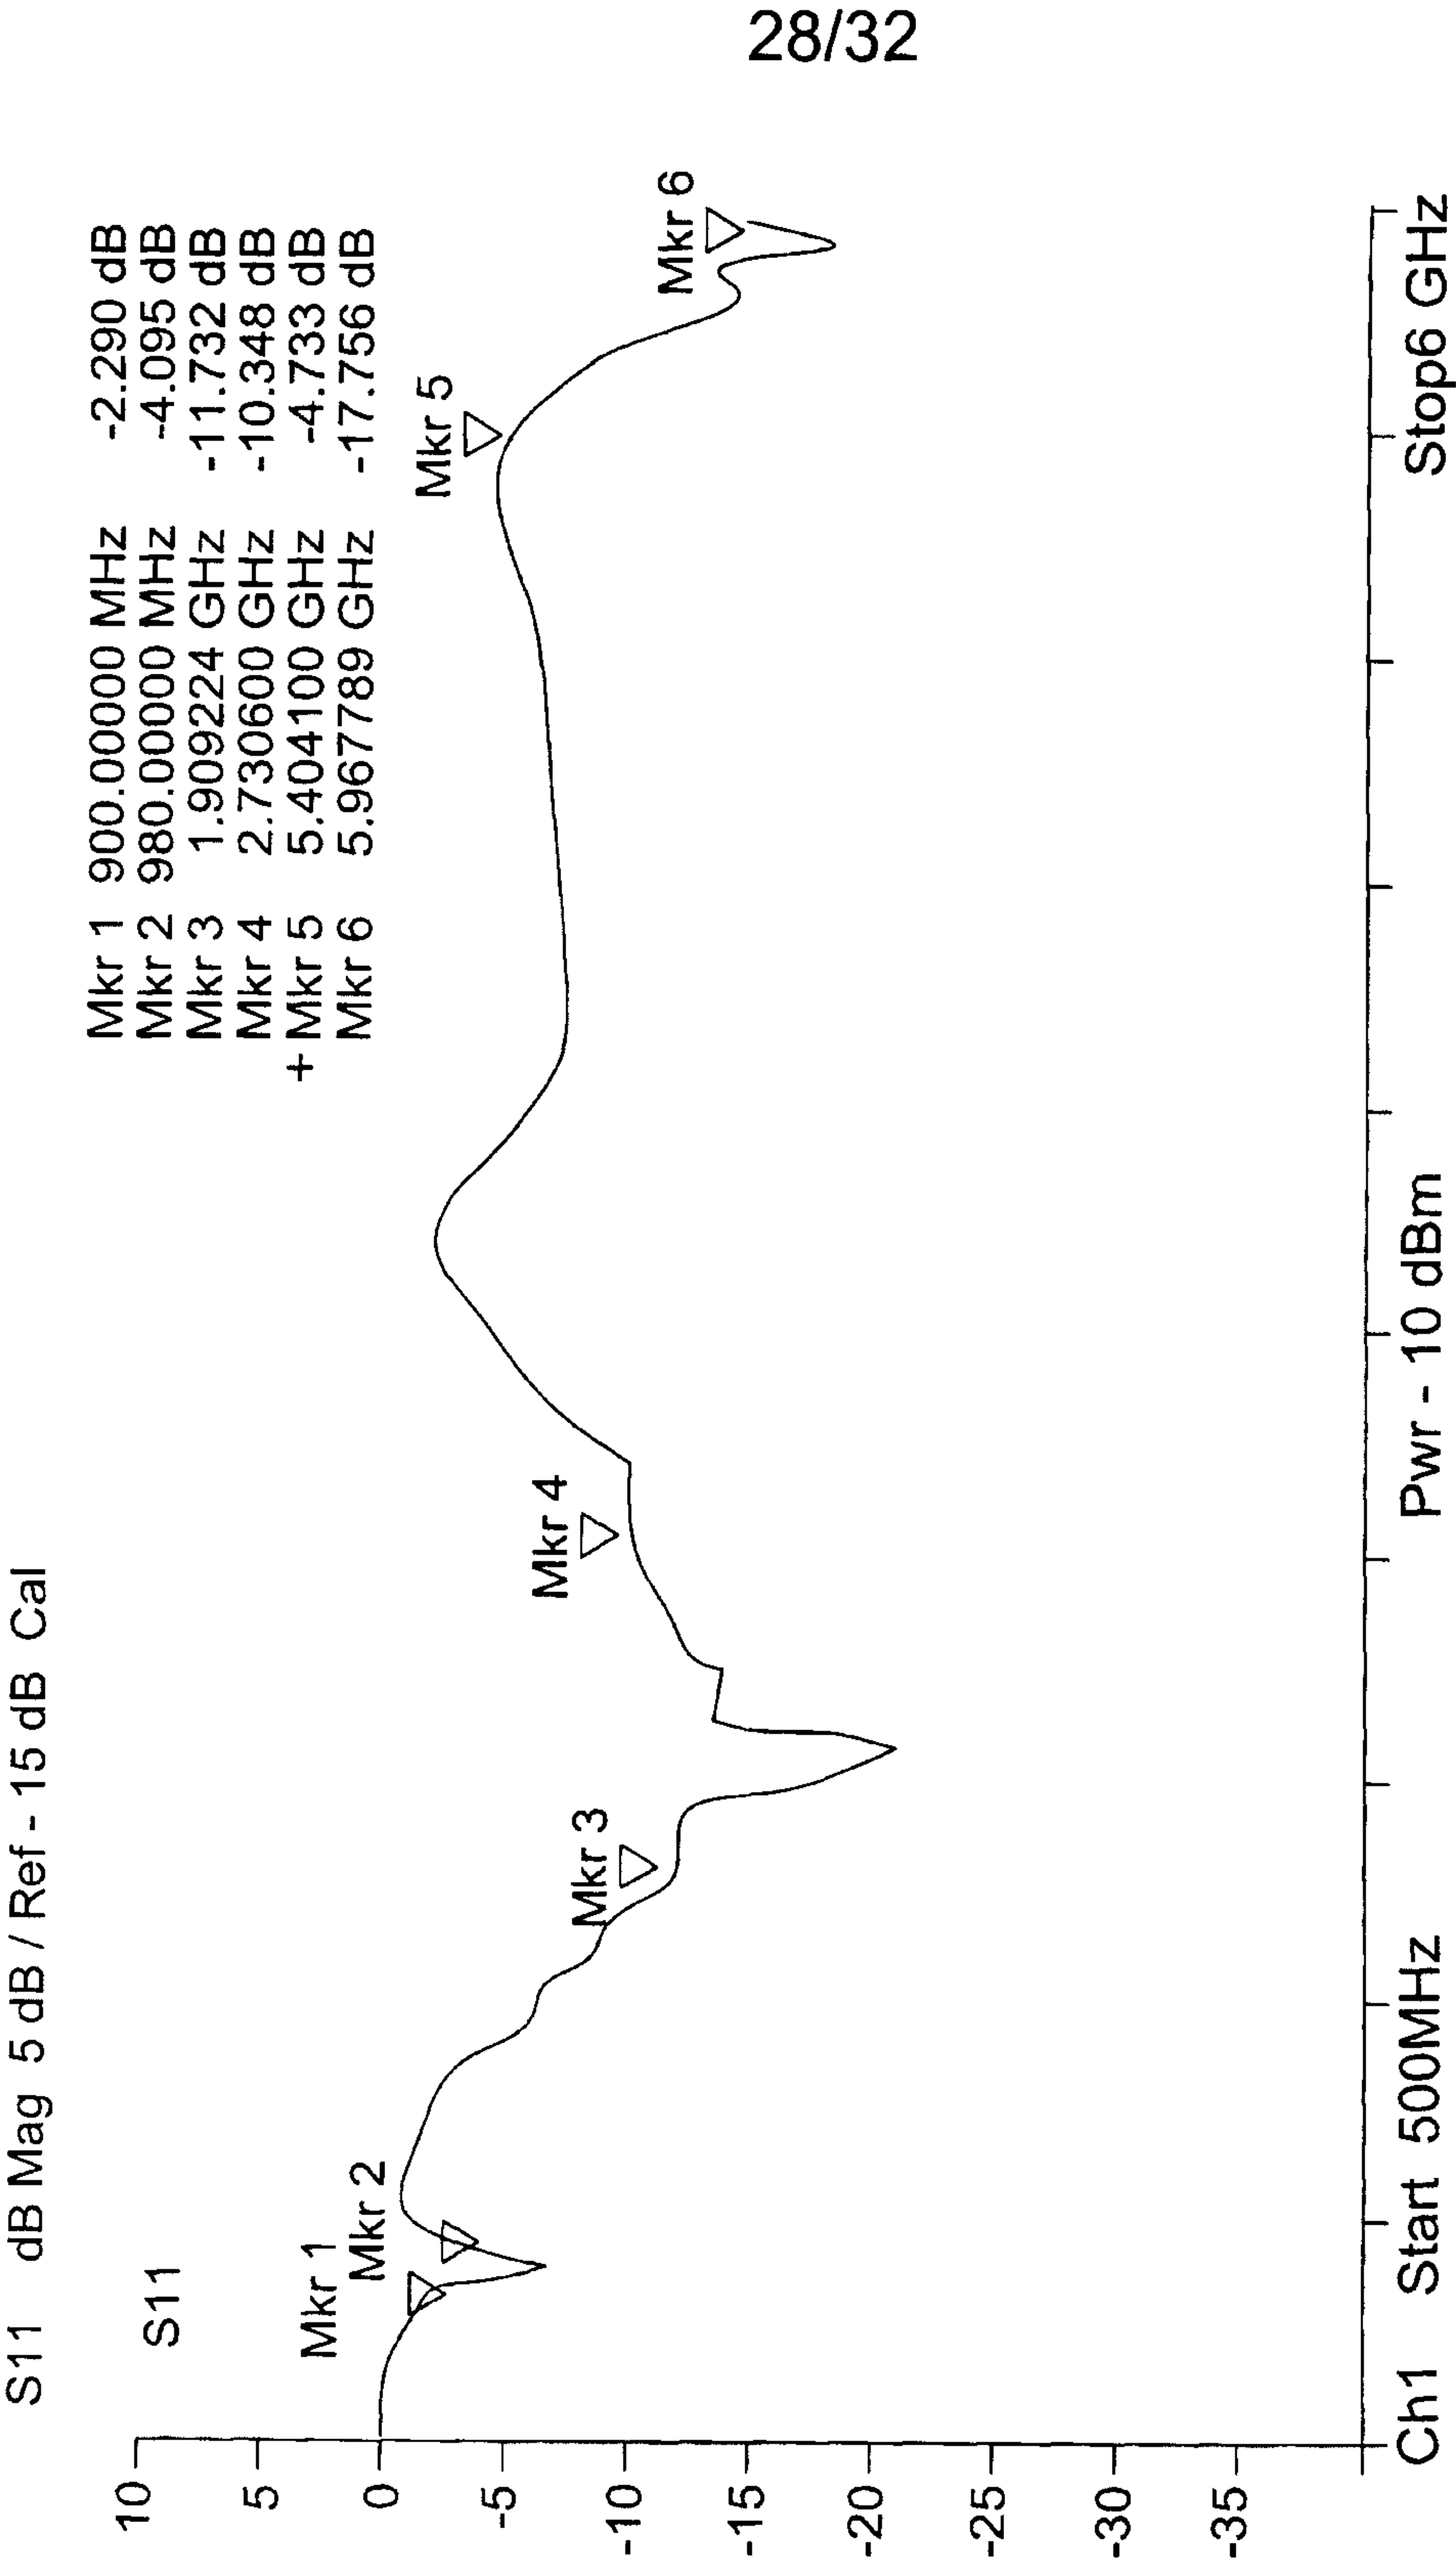


FIG. 13c

29/32

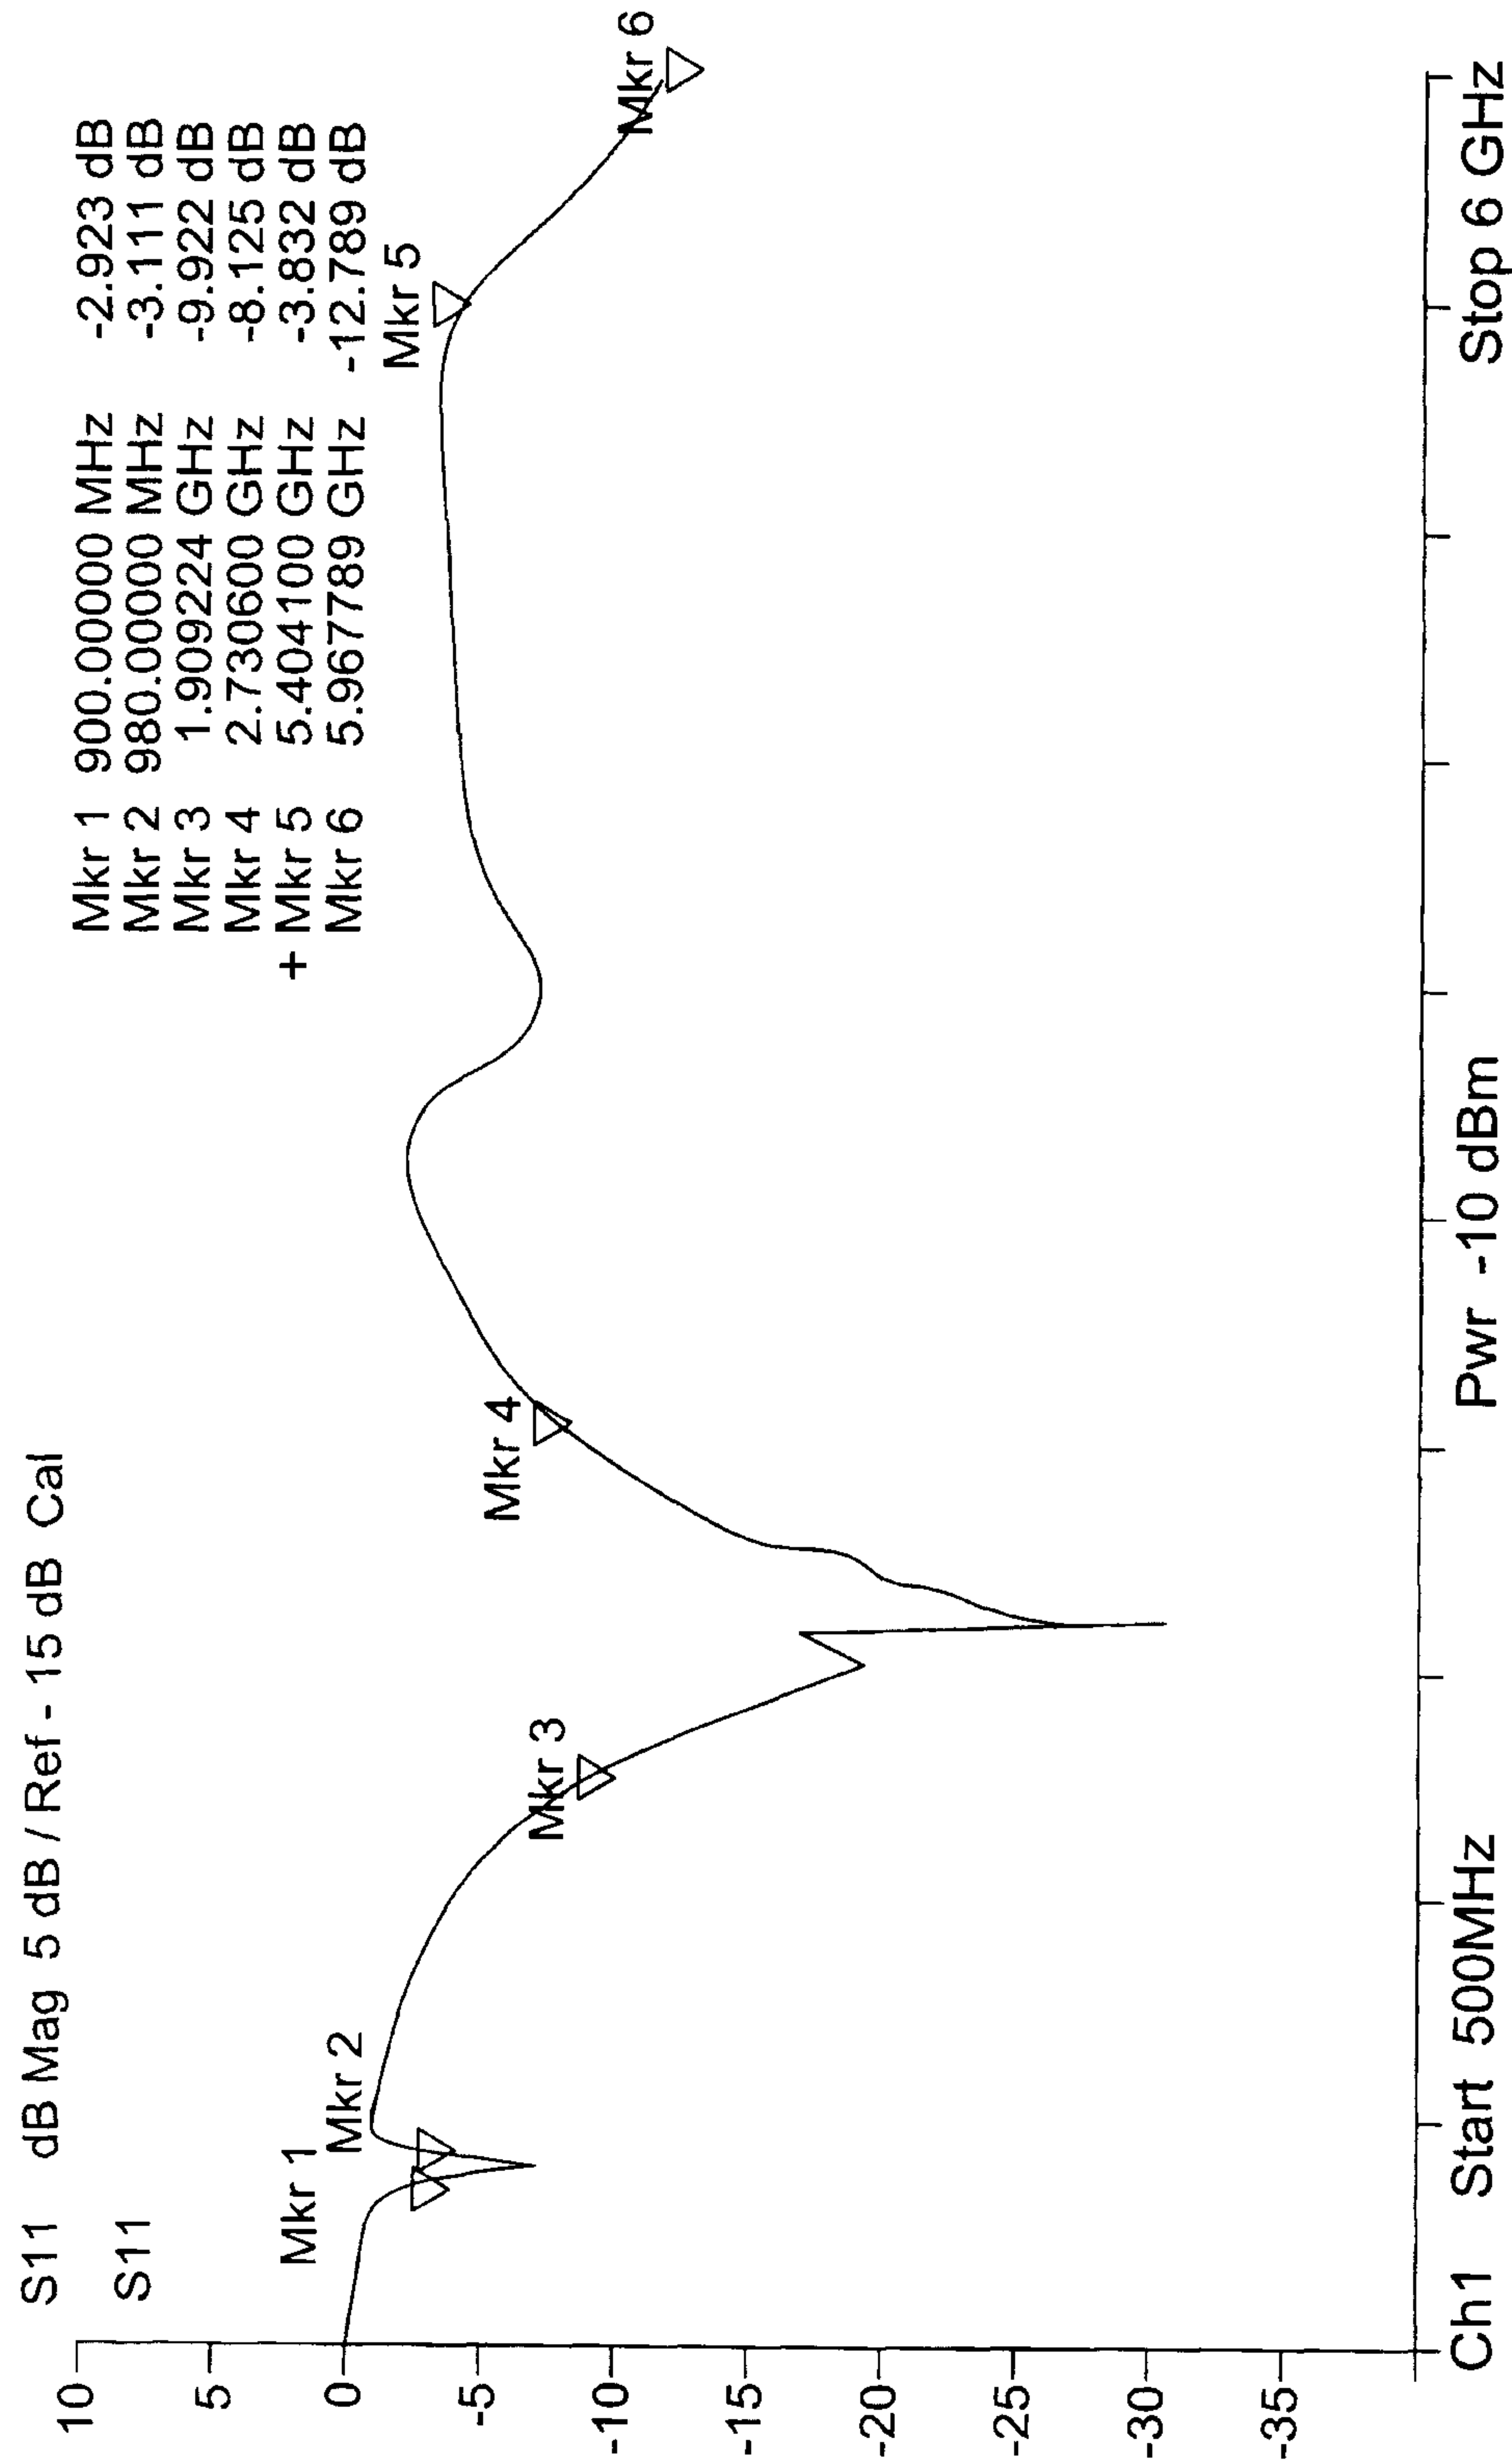


FIG. 14a

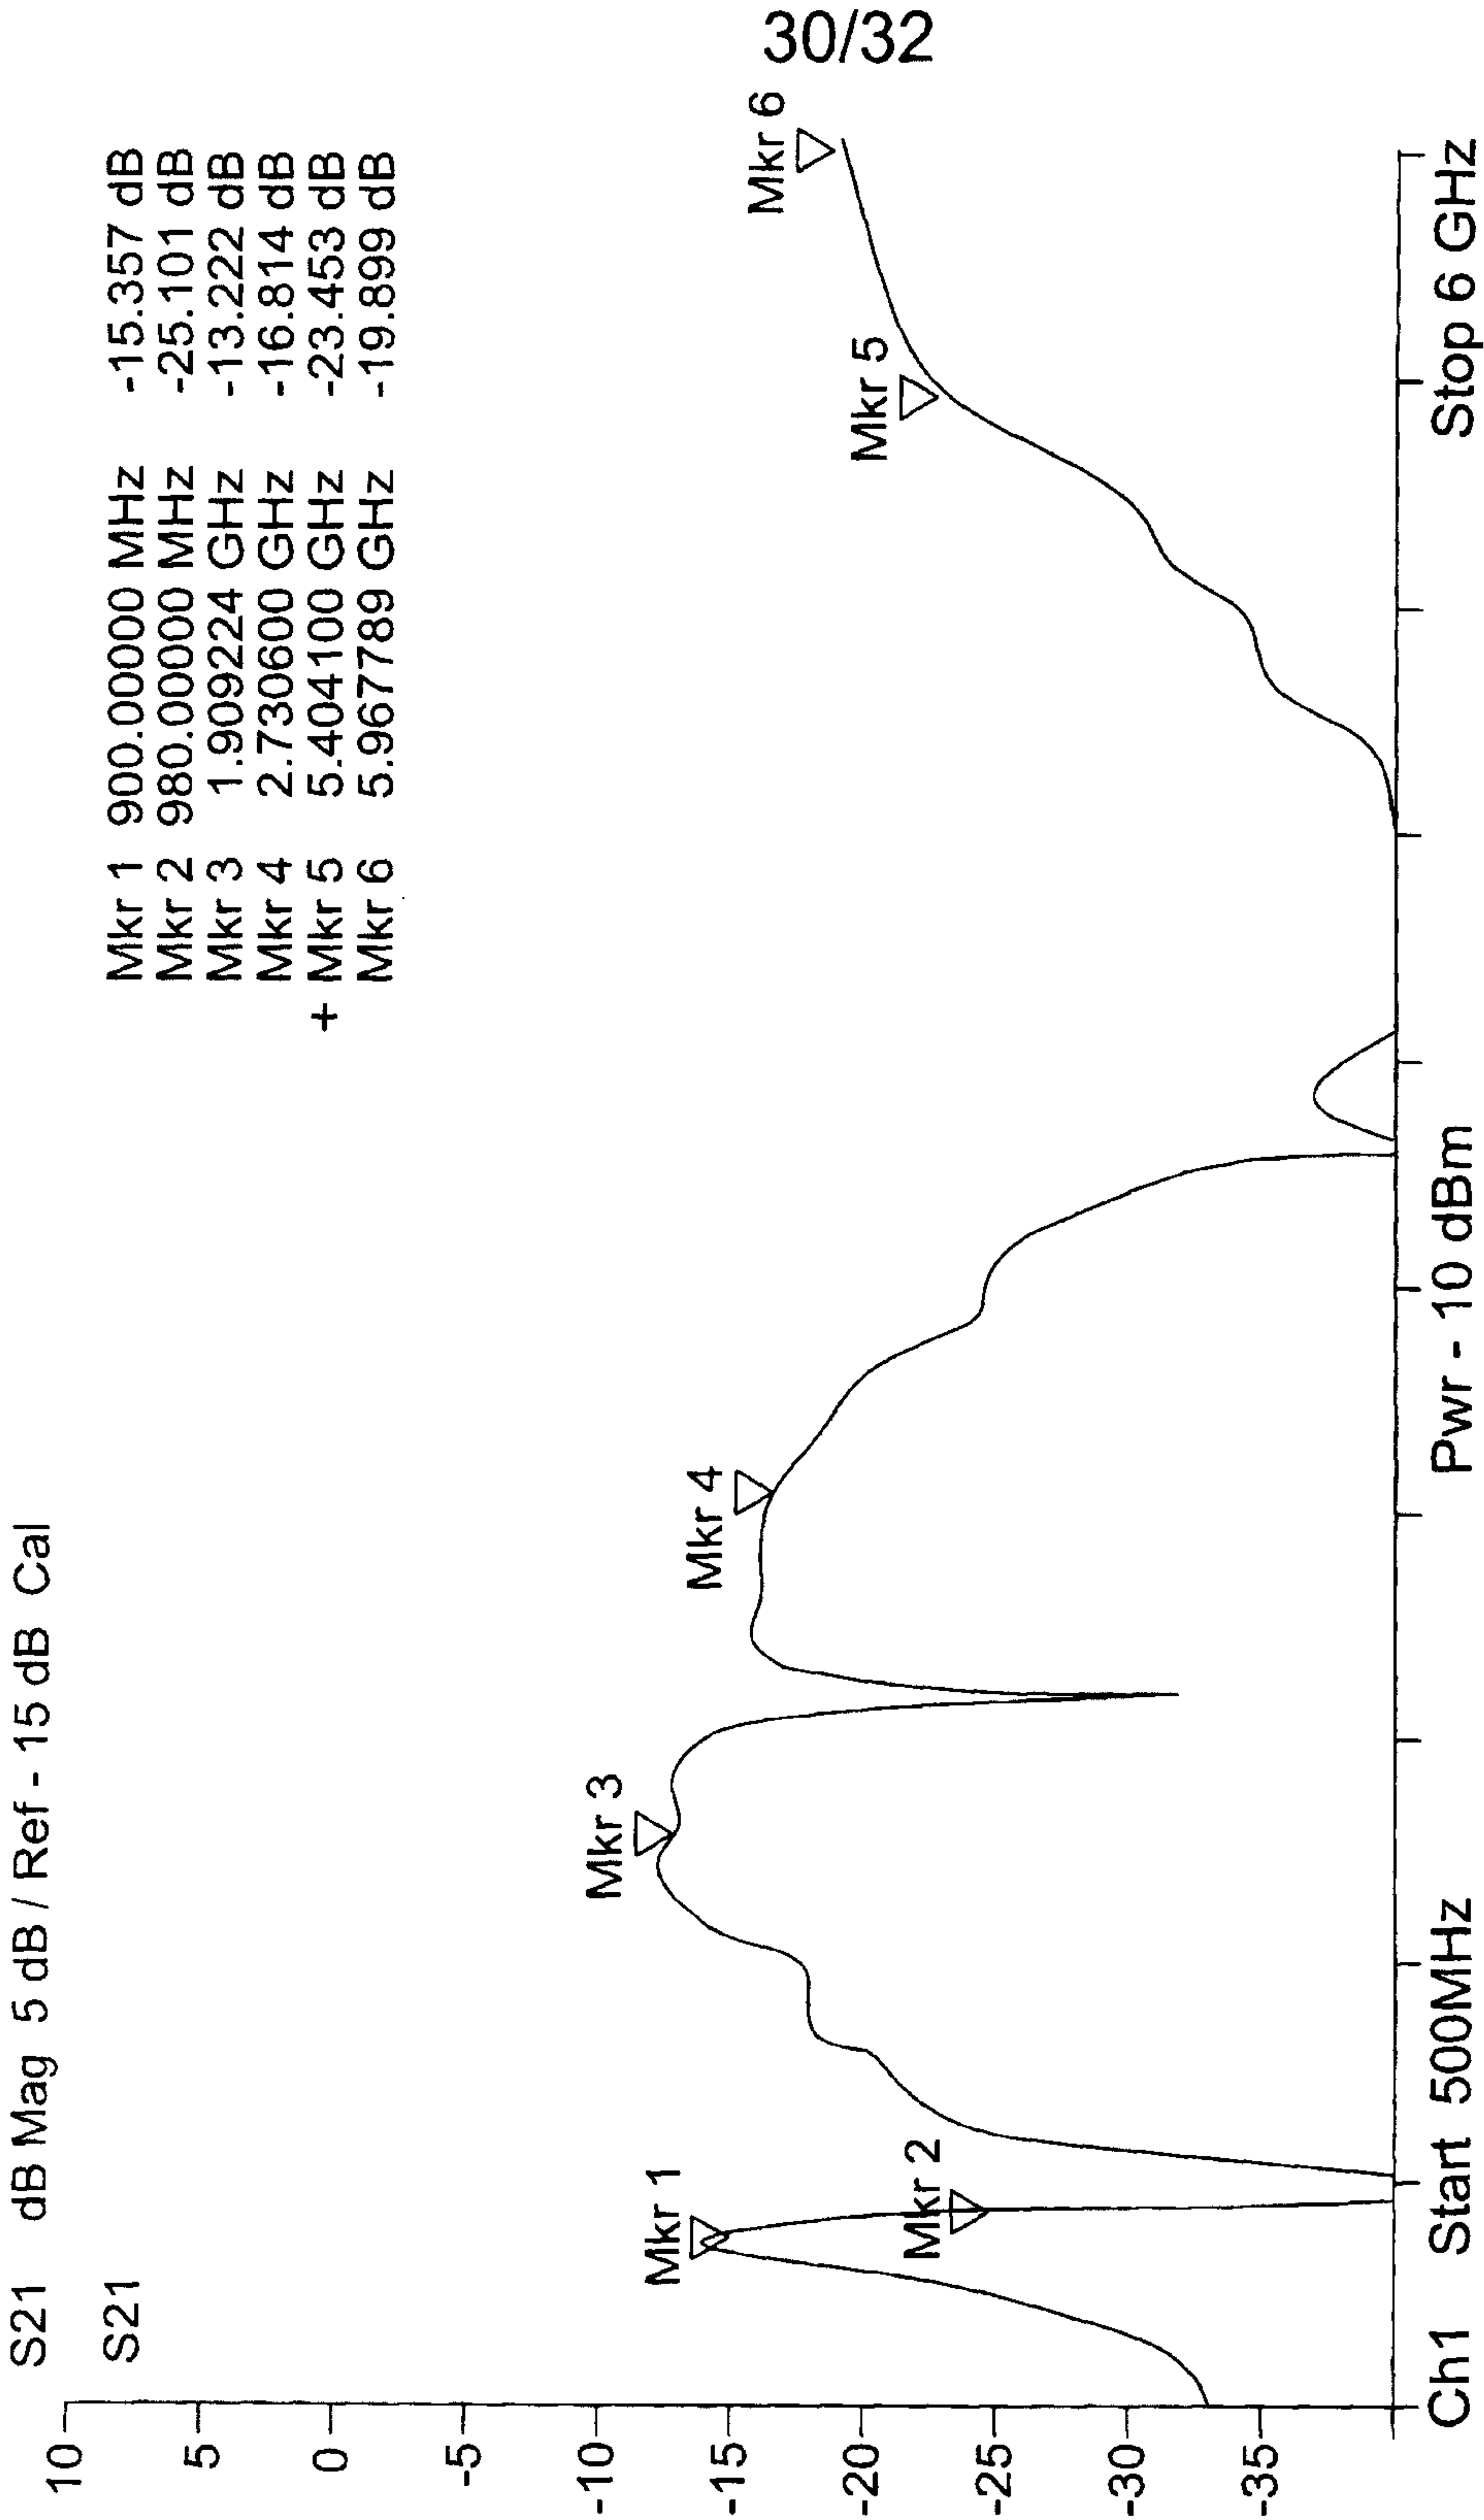


FIG. 14b

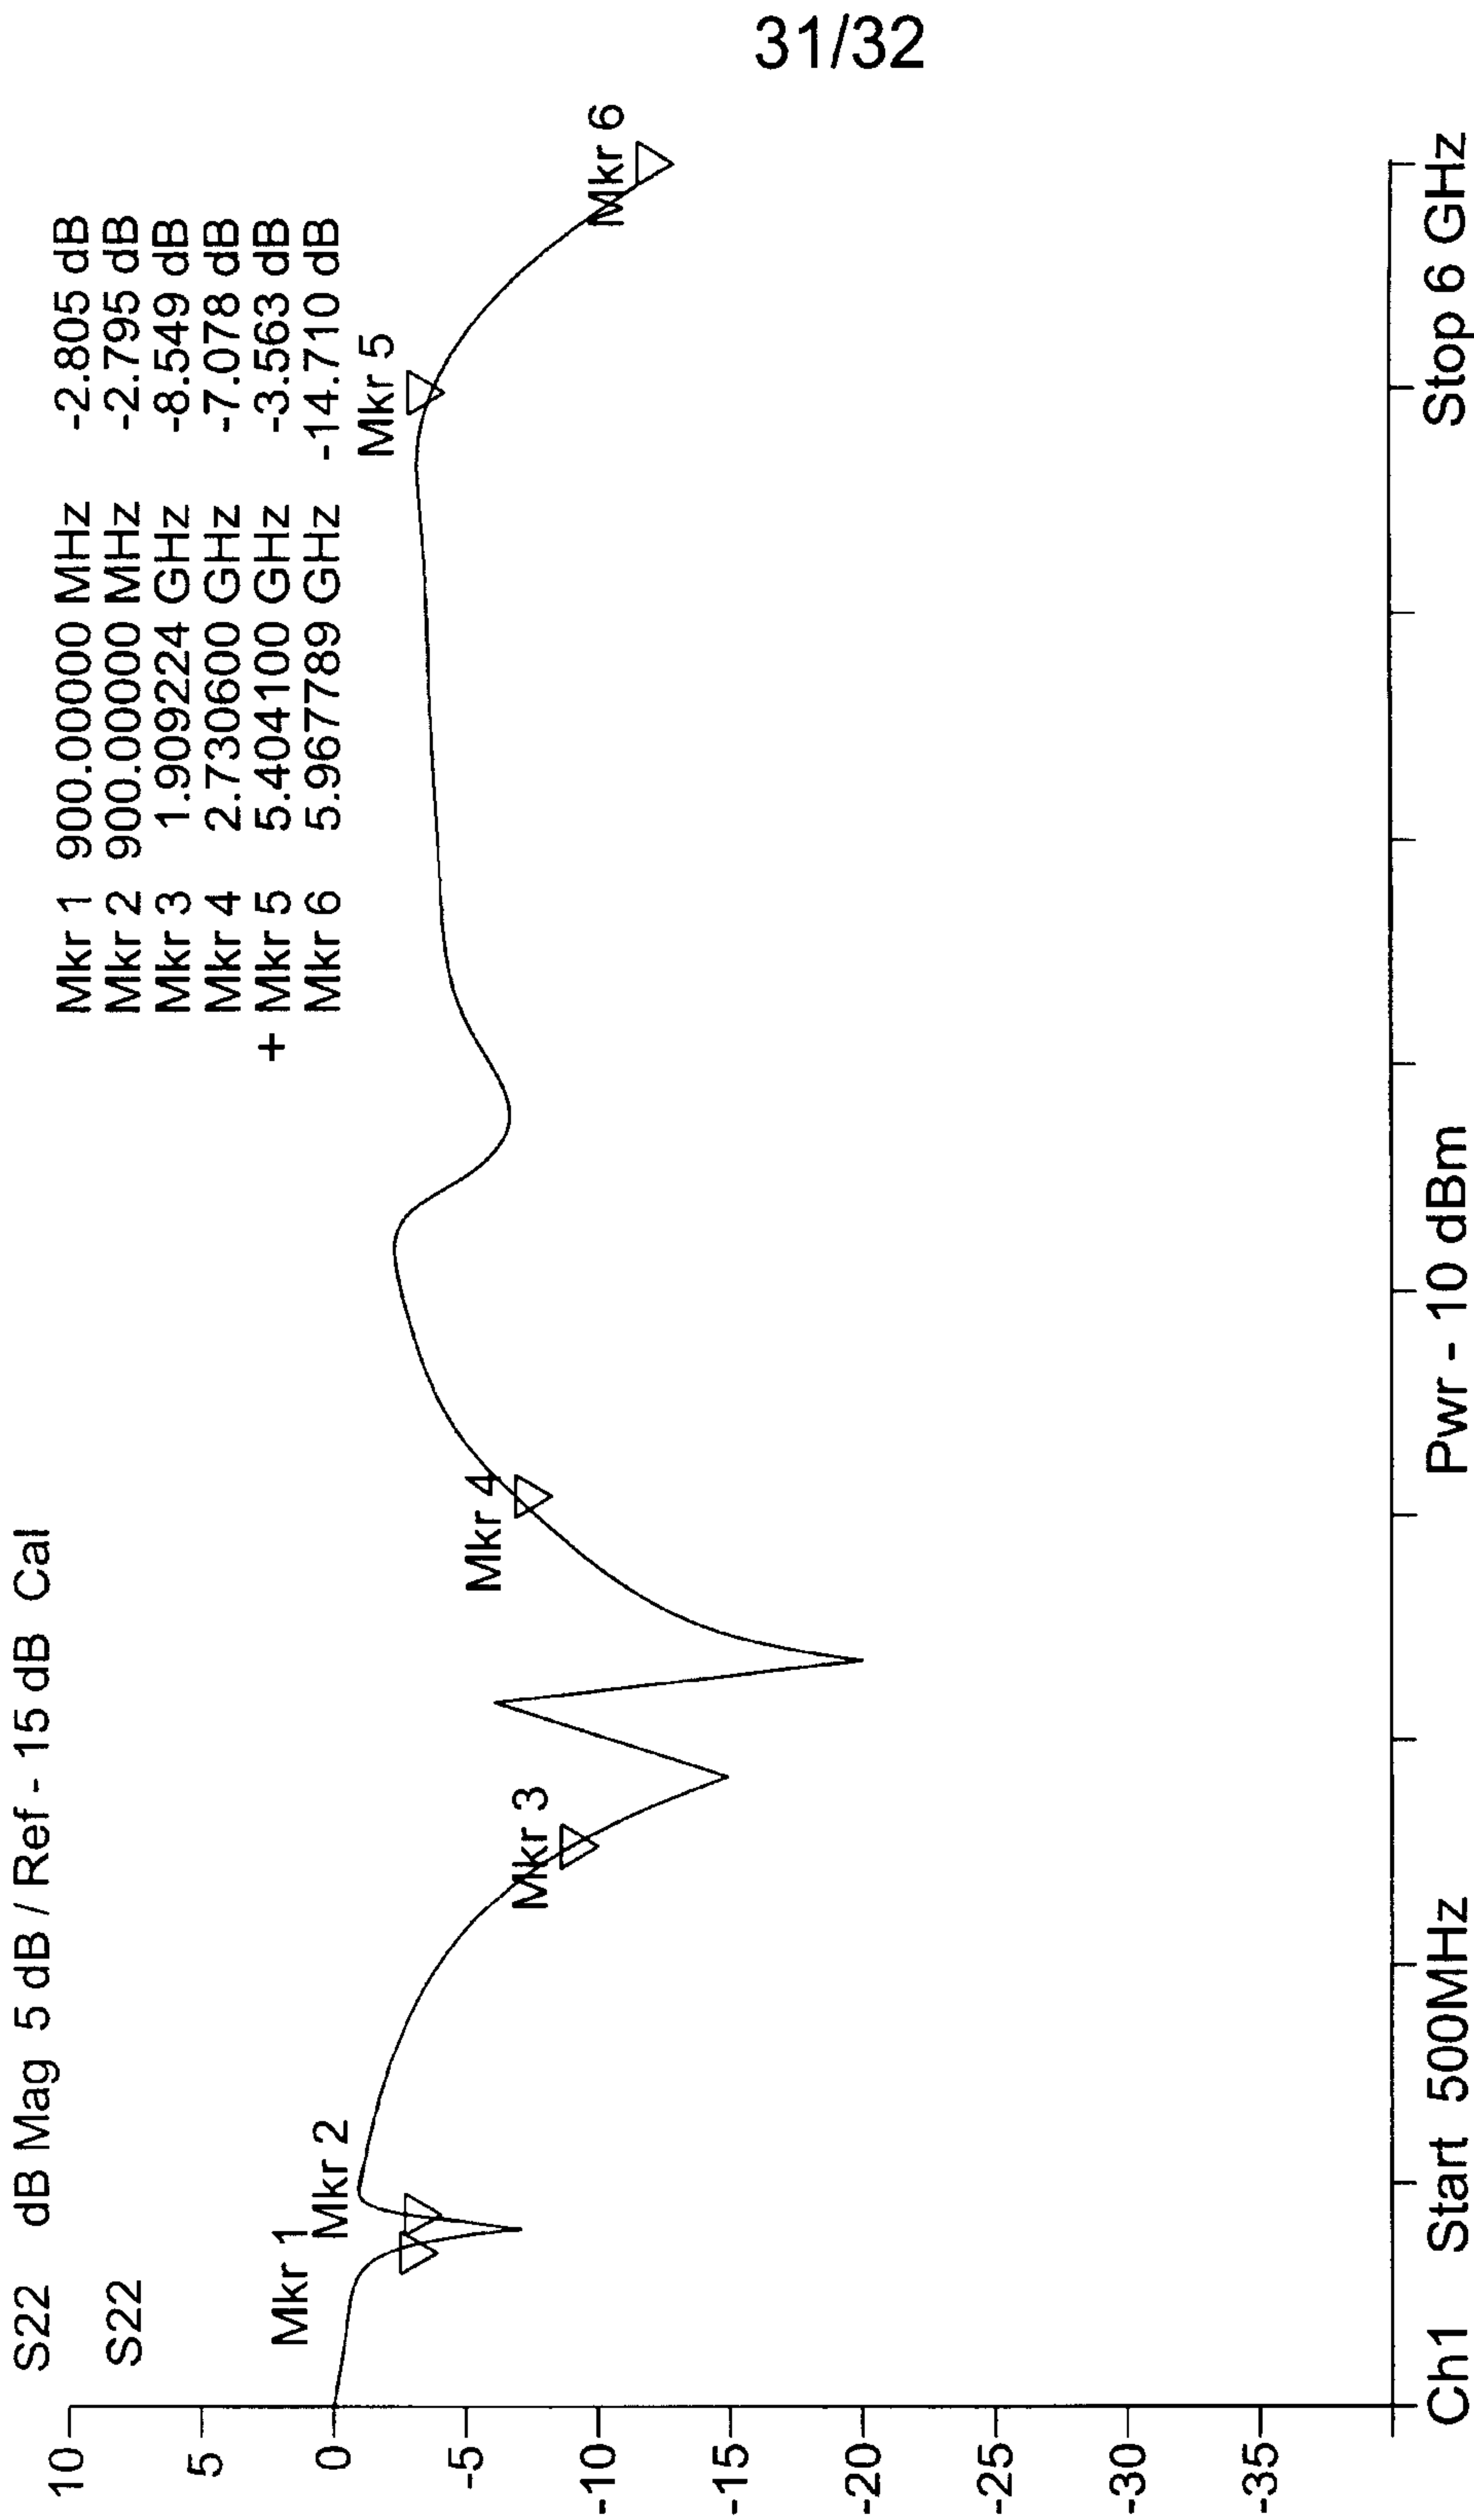


FIG. 14c

32/32

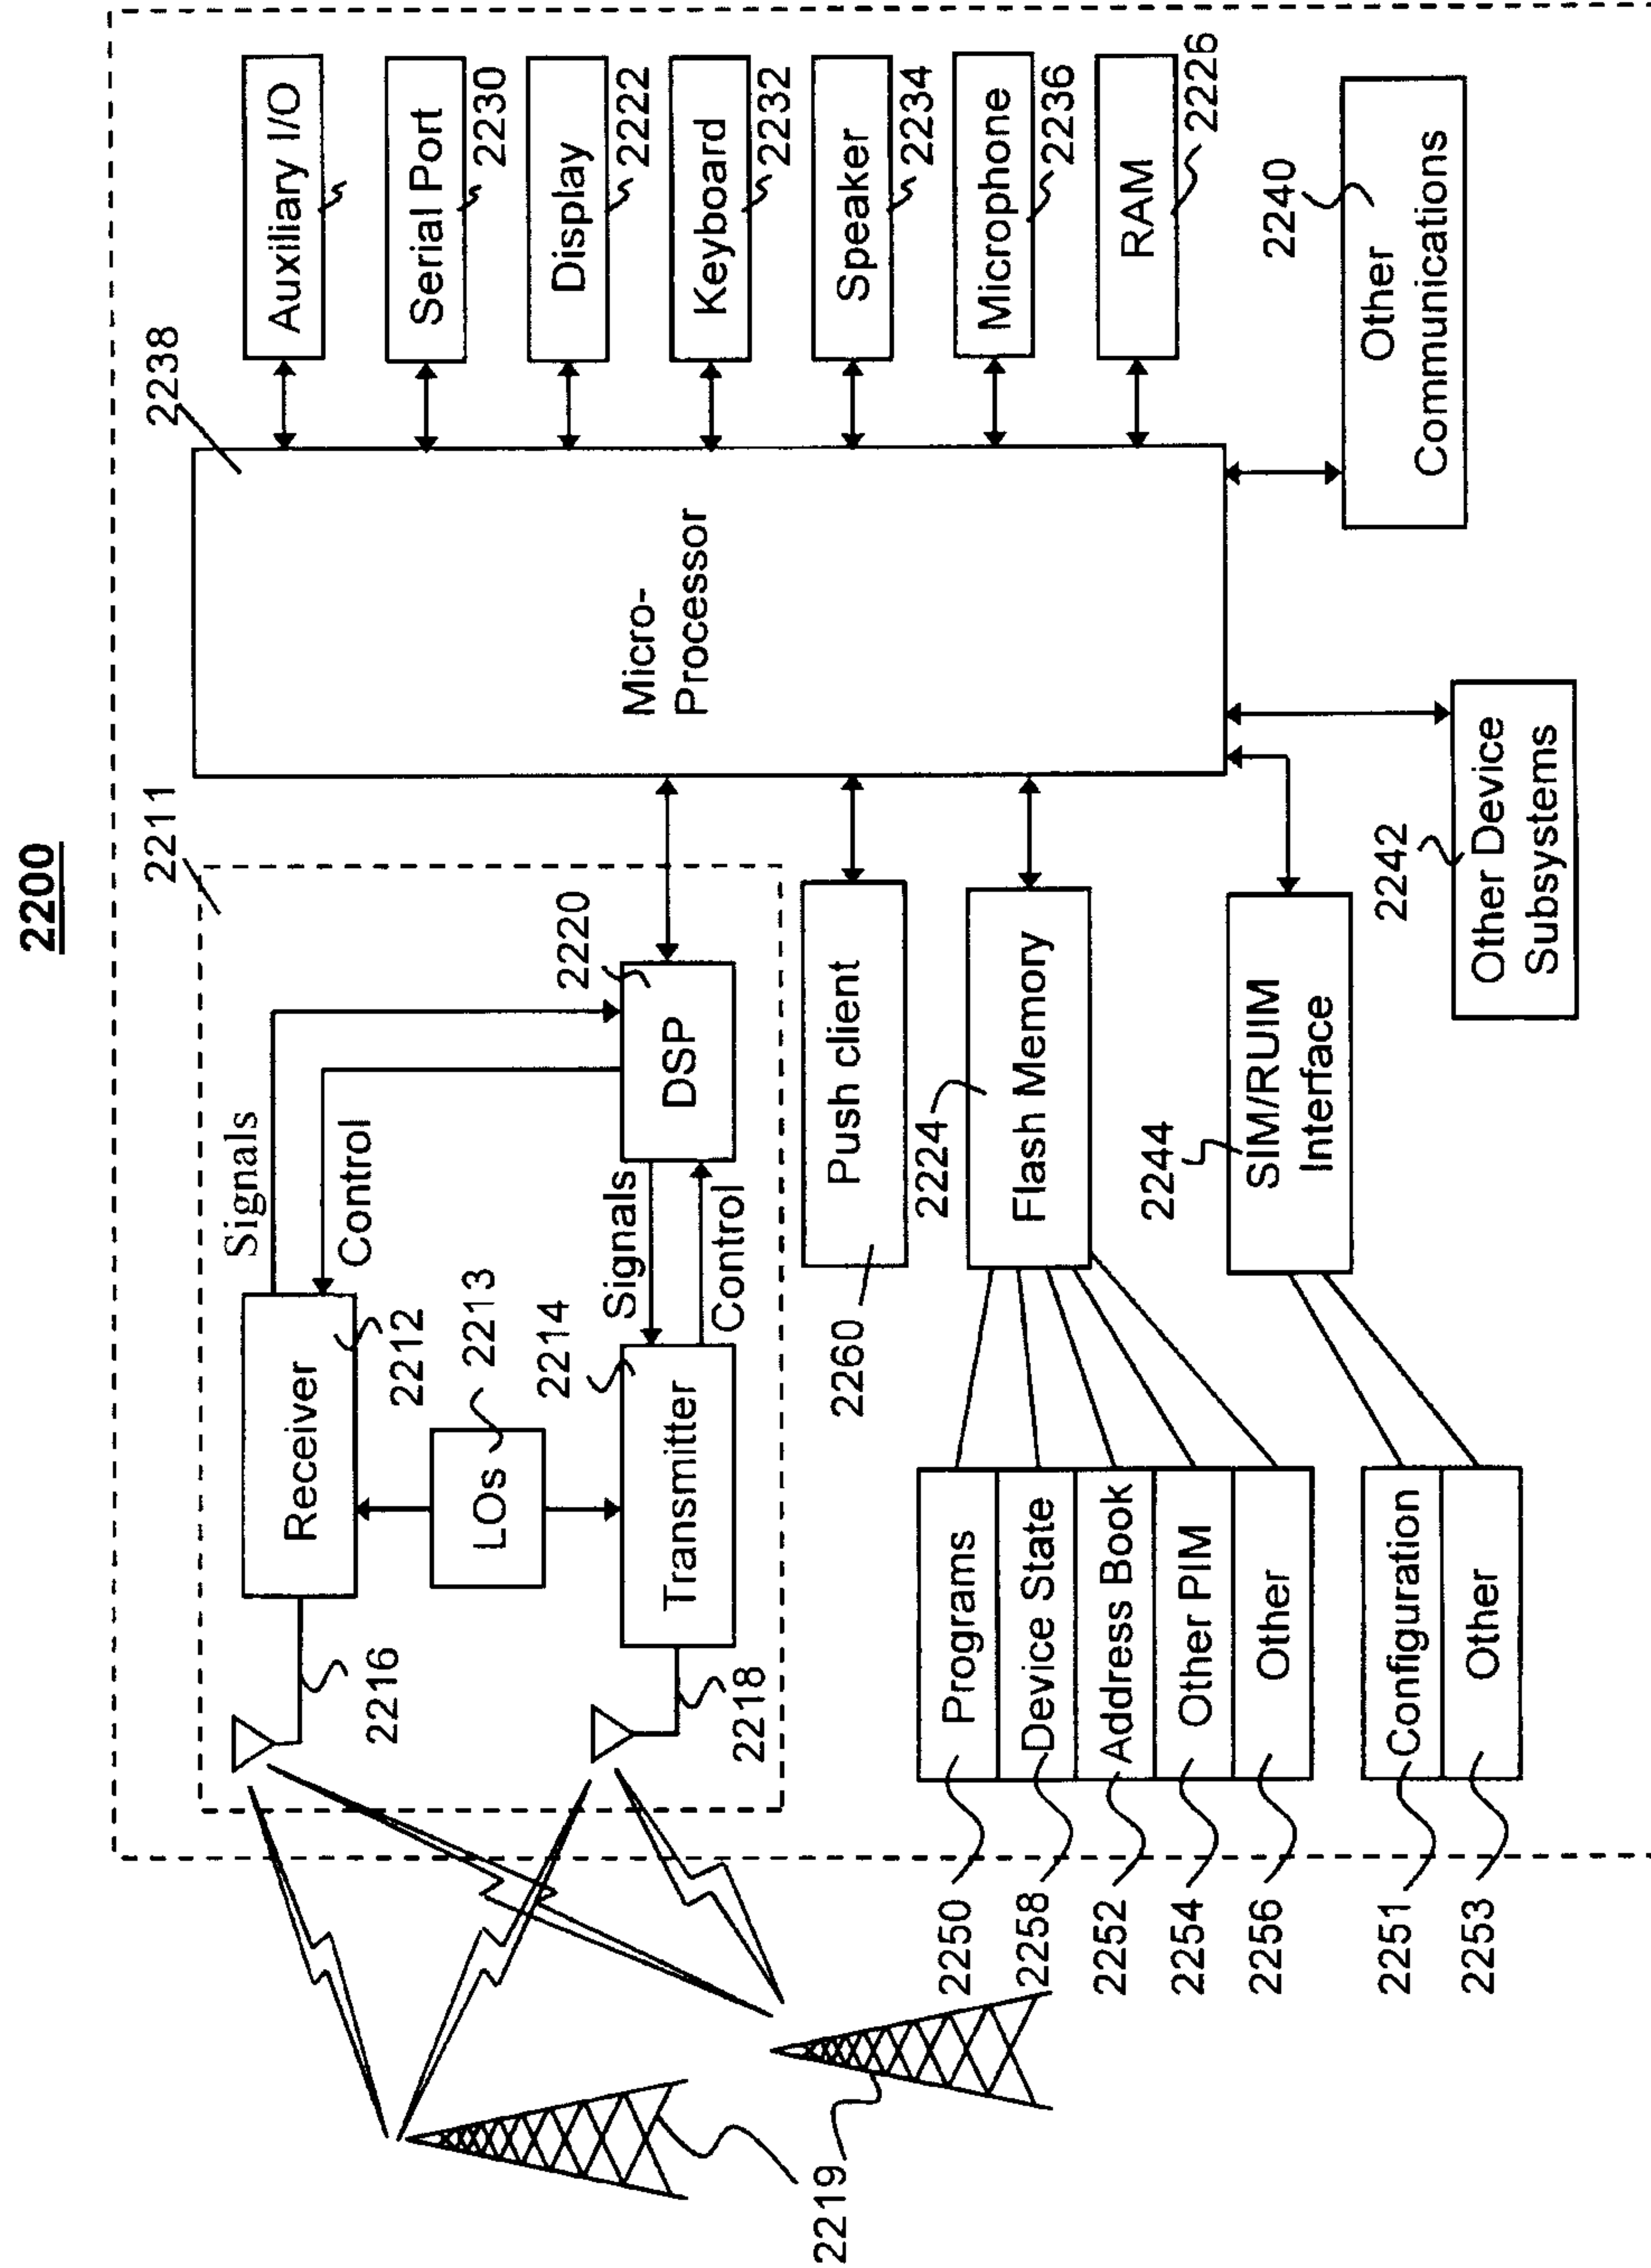


FIG. 15

100

