



(19) **United States**

(12) **Patent Application Publication**
Malkemes et al.

(10) **Pub. No.: US 2002/0061024 A1**

(43) **Pub. Date: May 23, 2002**

(54) **METHOD AND APPARATUS FOR PROVIDING A BROADBAND, WIRELESS, COMMUNICATIONS NETWORK**

provisional application No. 60/206,133, filed on May 22, 2000 and which is a non-provisional of provisional application No. 60/259,834, filed on Jan. 5, 2001.

(75) Inventors: **Robert Conrad Malkemes**, Bricktown, NJ (US); **Henry Sedwick Müller**, Yardley, PA (US)

Publication Classification

(51) **Int. Cl.⁷** **H04L 12/28; H04L 12/56**
(52) **U.S. Cl.** **370/401; 370/338**

Correspondence Address:
MOSER, PATTERSON & SHERIDAN, LLP
/SARNOFF CORPORATION
595 SHREWSBURY AVENUE
SUITE 100
SHREWSBURY, NJ 07702 (US)

(57) **ABSTRACT**

Method and apparatus for providing a broadband, wireless network comprising a neighborhood communications gateway that accepts all incoming communications signals and securely broadcasts those signals throughout a neighborhood of residences. Each communications appliance within the neighborhood is outfitted with a receiver that decodes the broadcast signals and couples the signals to the input terminals of the associated communications appliance. The system is completely "plug-and-play" such that a user can quickly and easily utilize the gateway for many communications appliances.


(73) Assignee: **Sarnoff Corporation**

(21) Appl. No.: **10/002,261**

(22) Filed: **Nov. 15, 2001**

Related U.S. Application Data

(63) Continuation-in-part of application No. 09/772,505, filed on Jan. 30, 2001, which is a non-provisional of

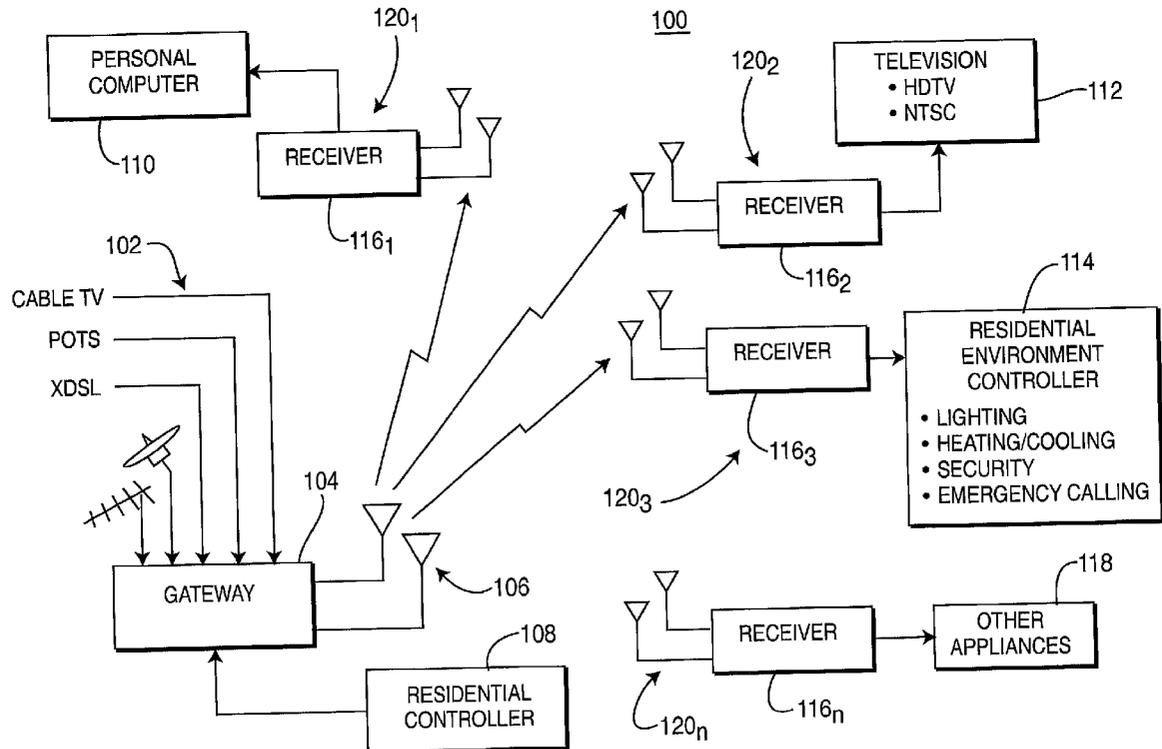

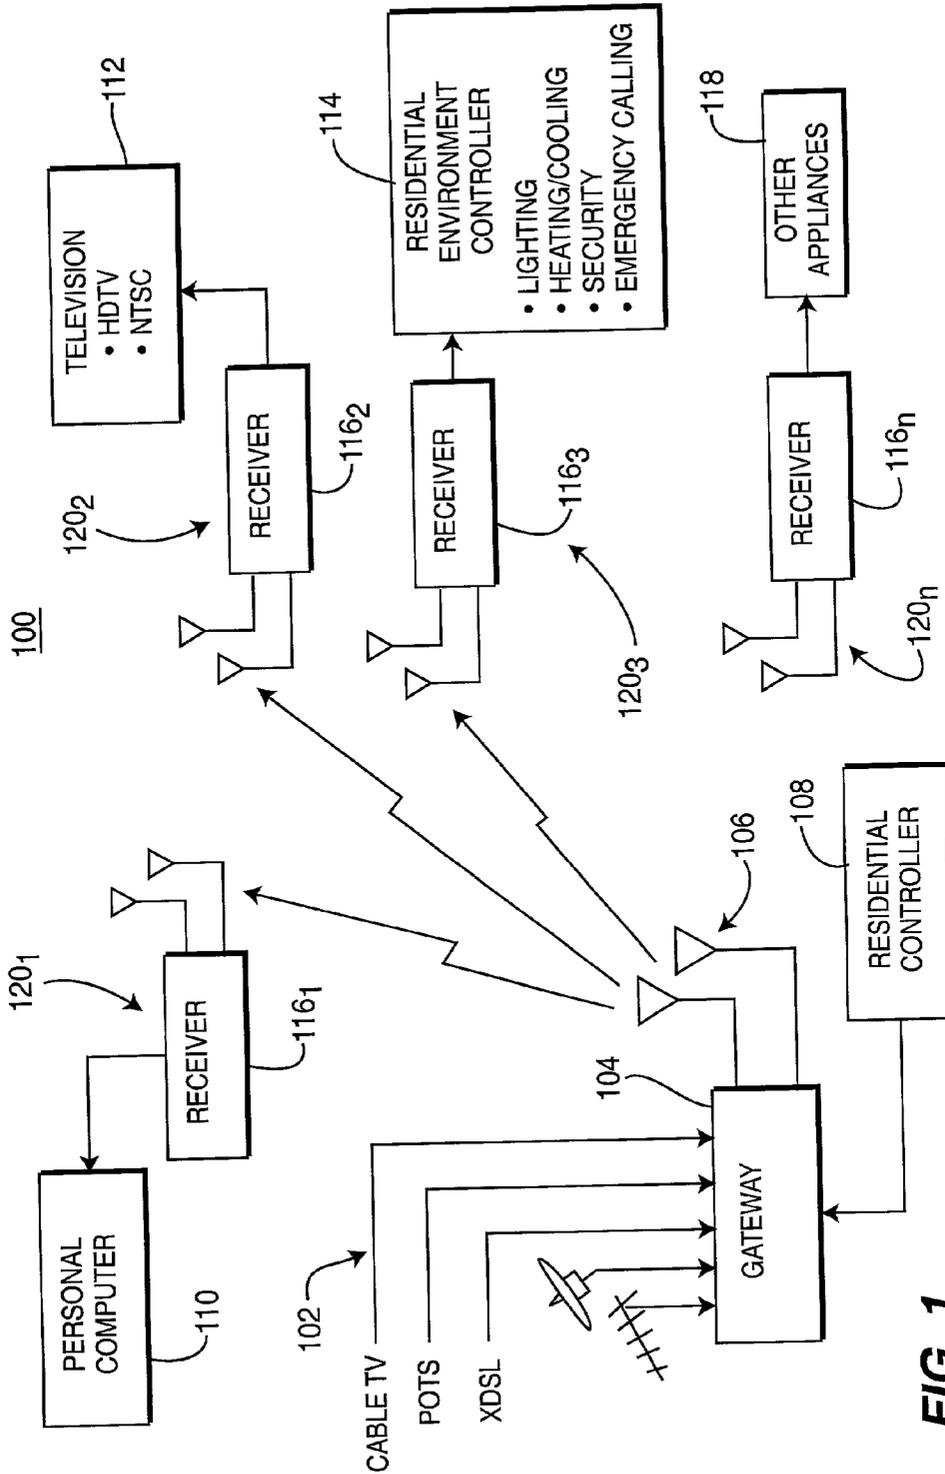


FIG. 1


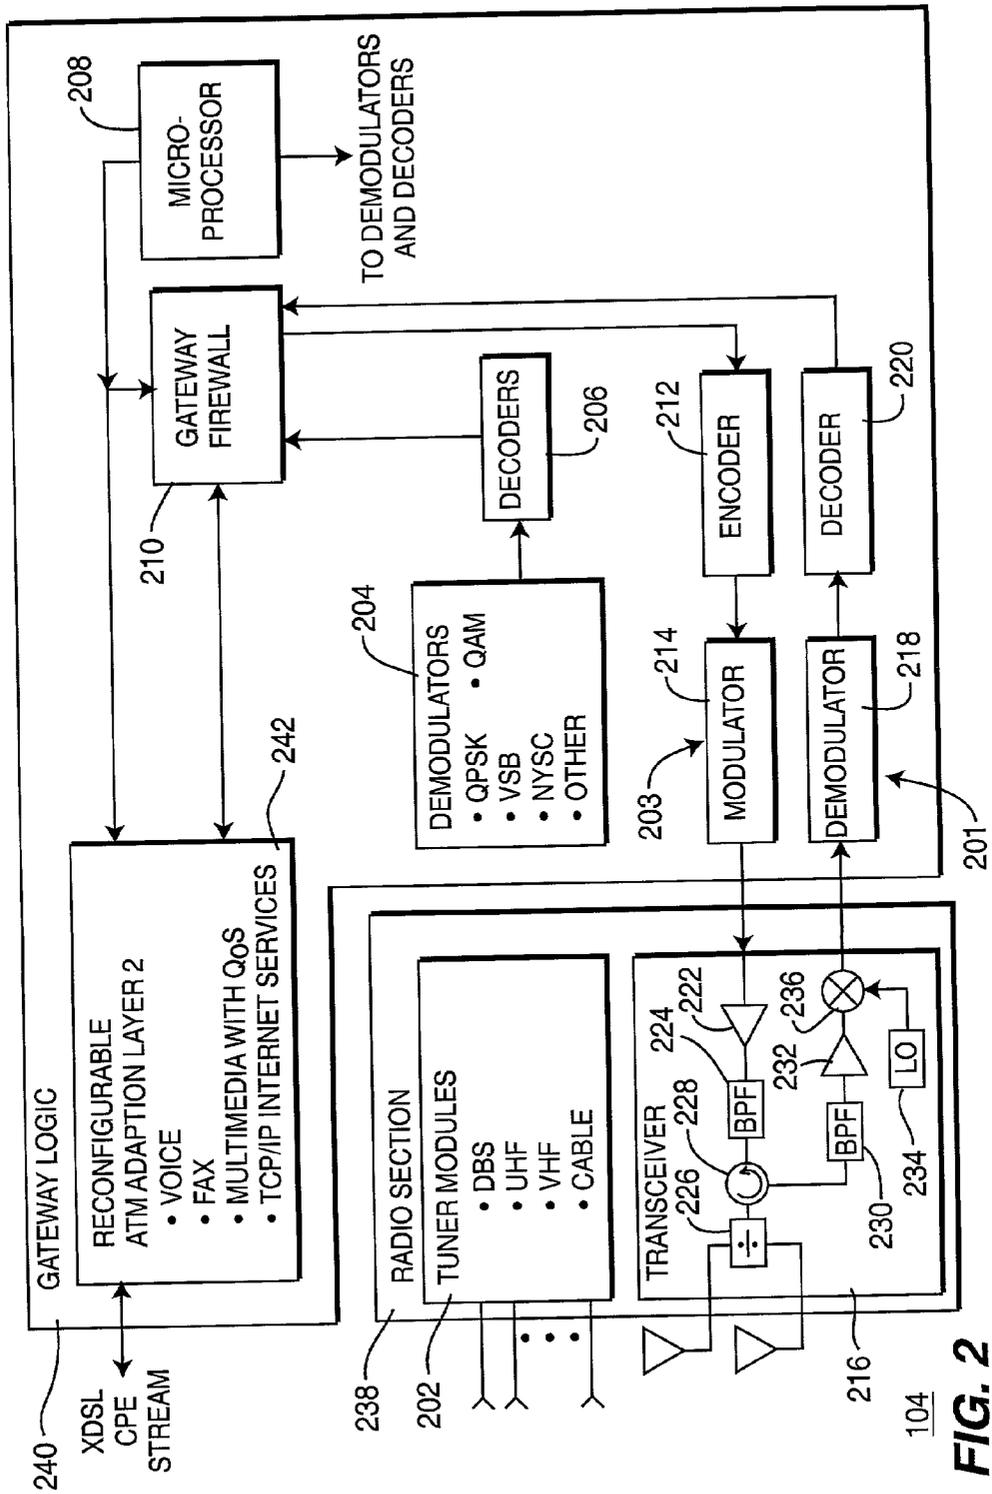


FIG. 2

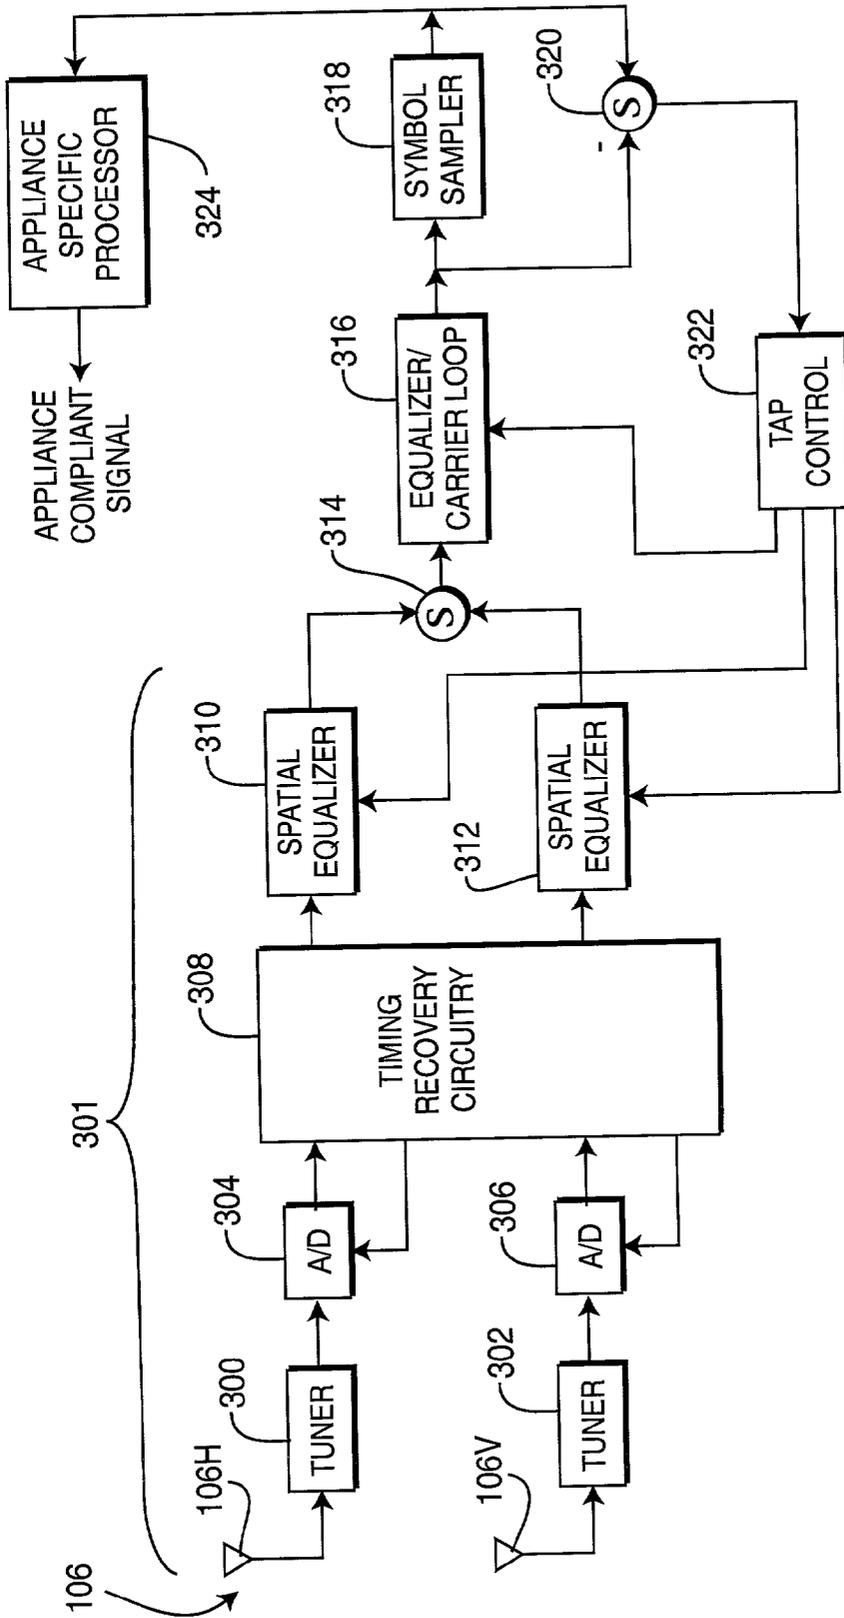

116

FIG. 3

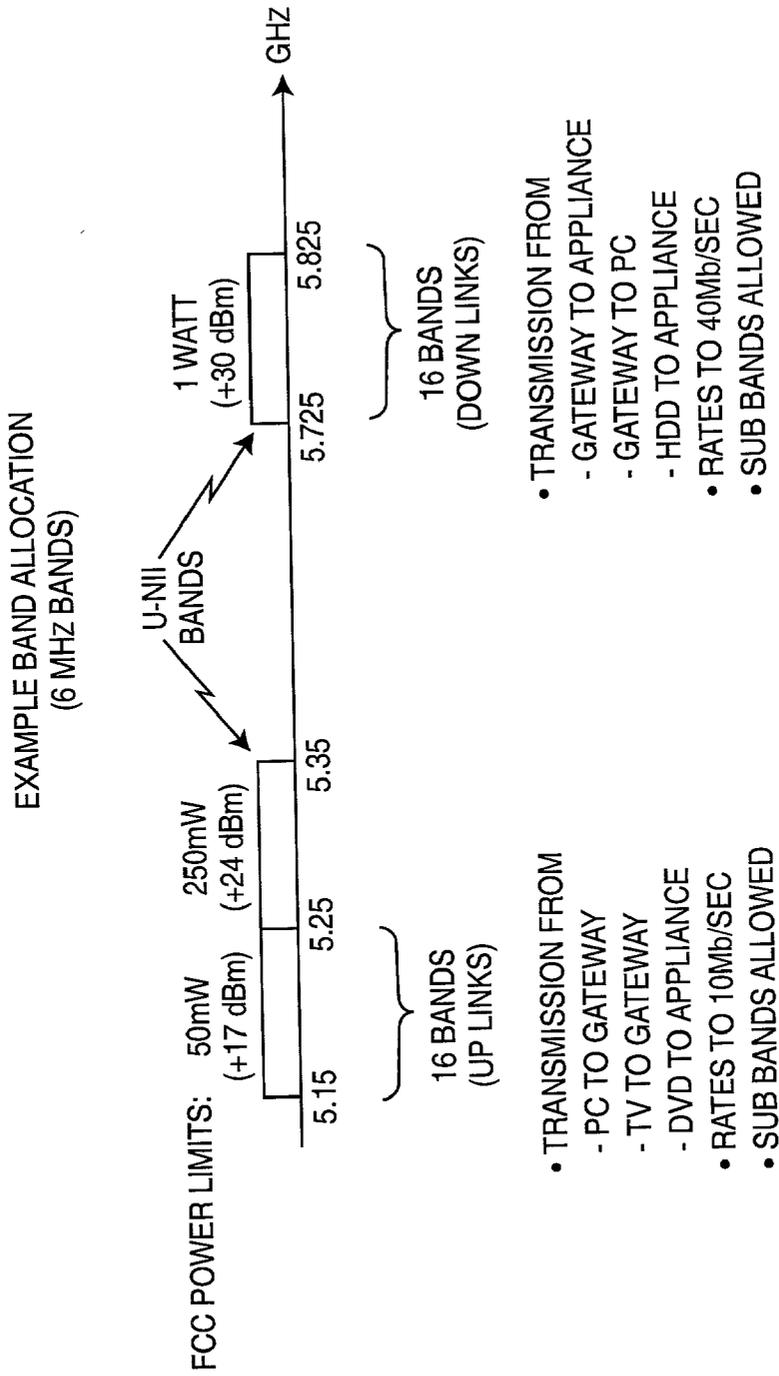


FIG. 4

EXAMPLE TV SET TRANSMITTER

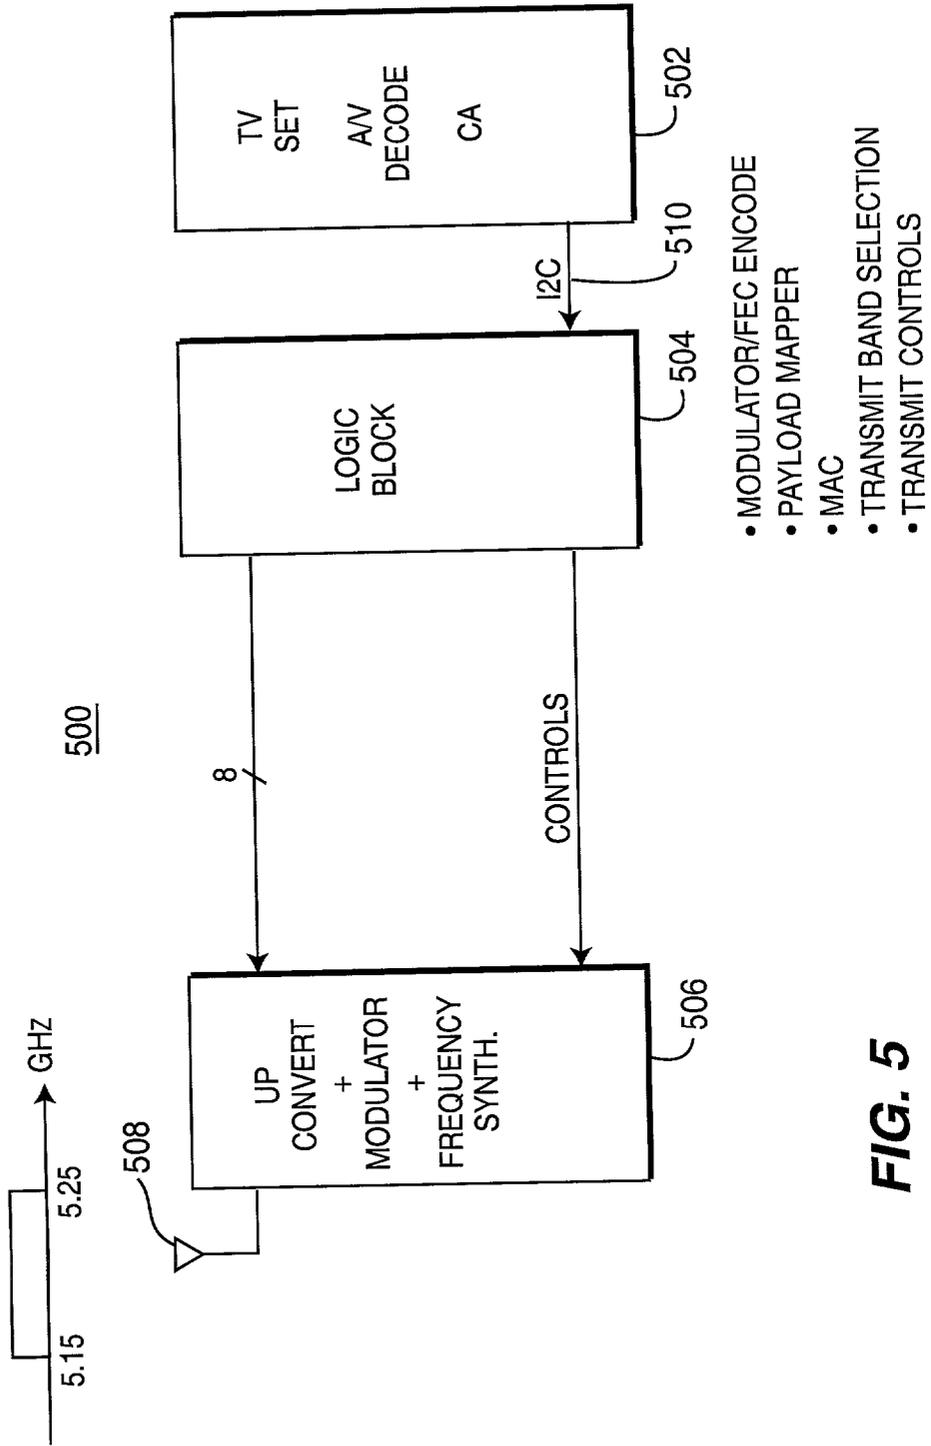
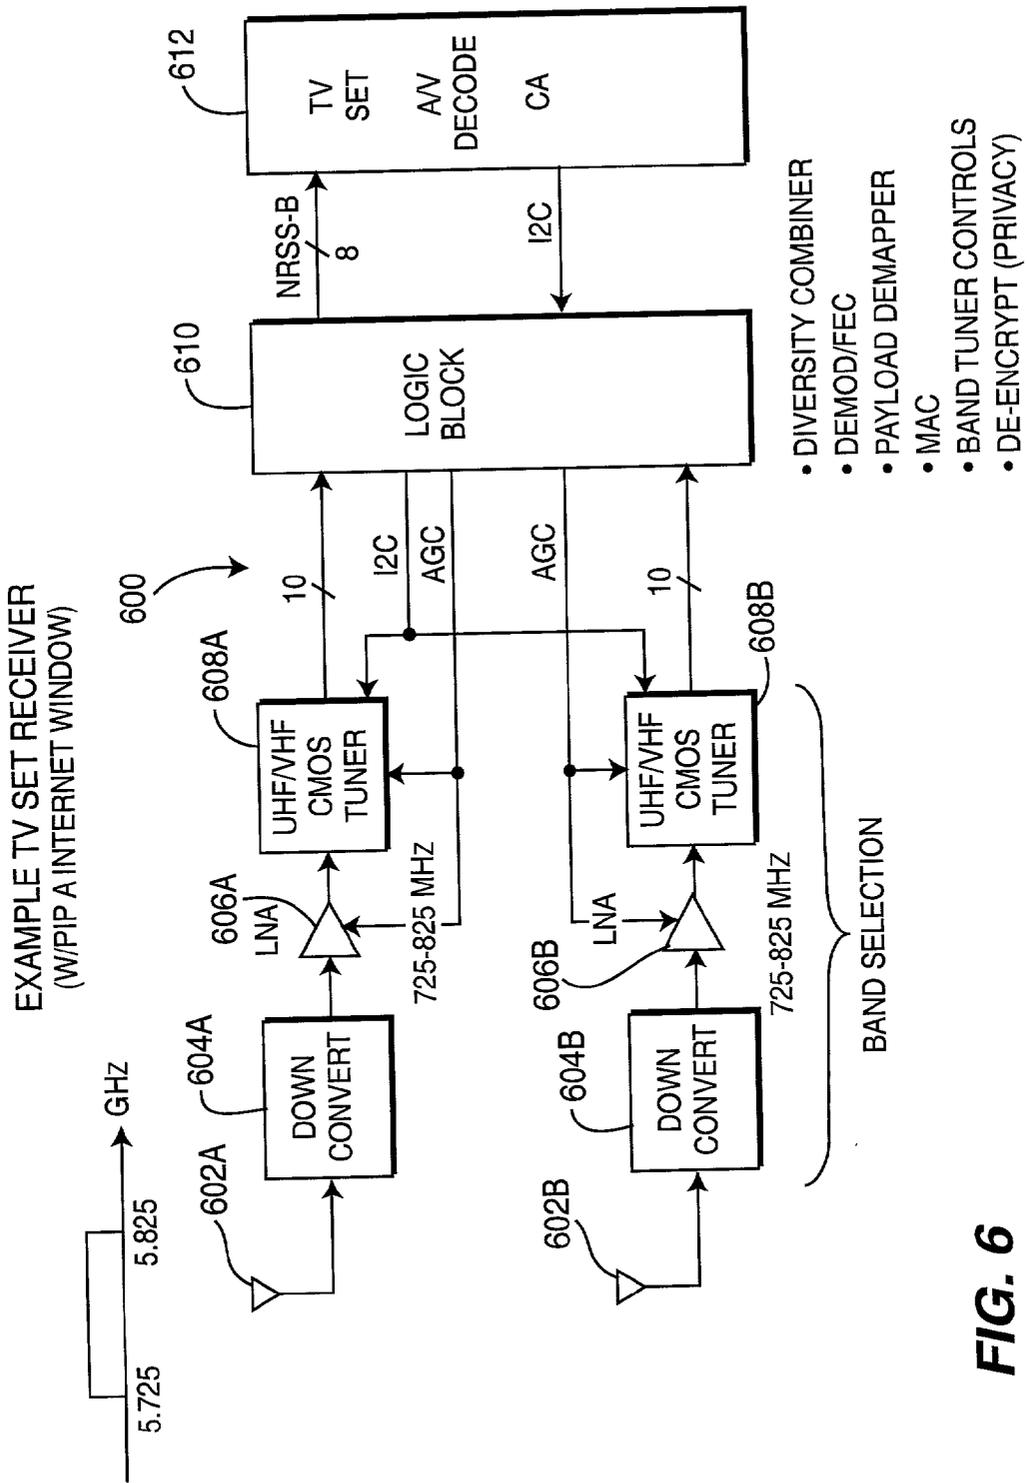


FIG. 5



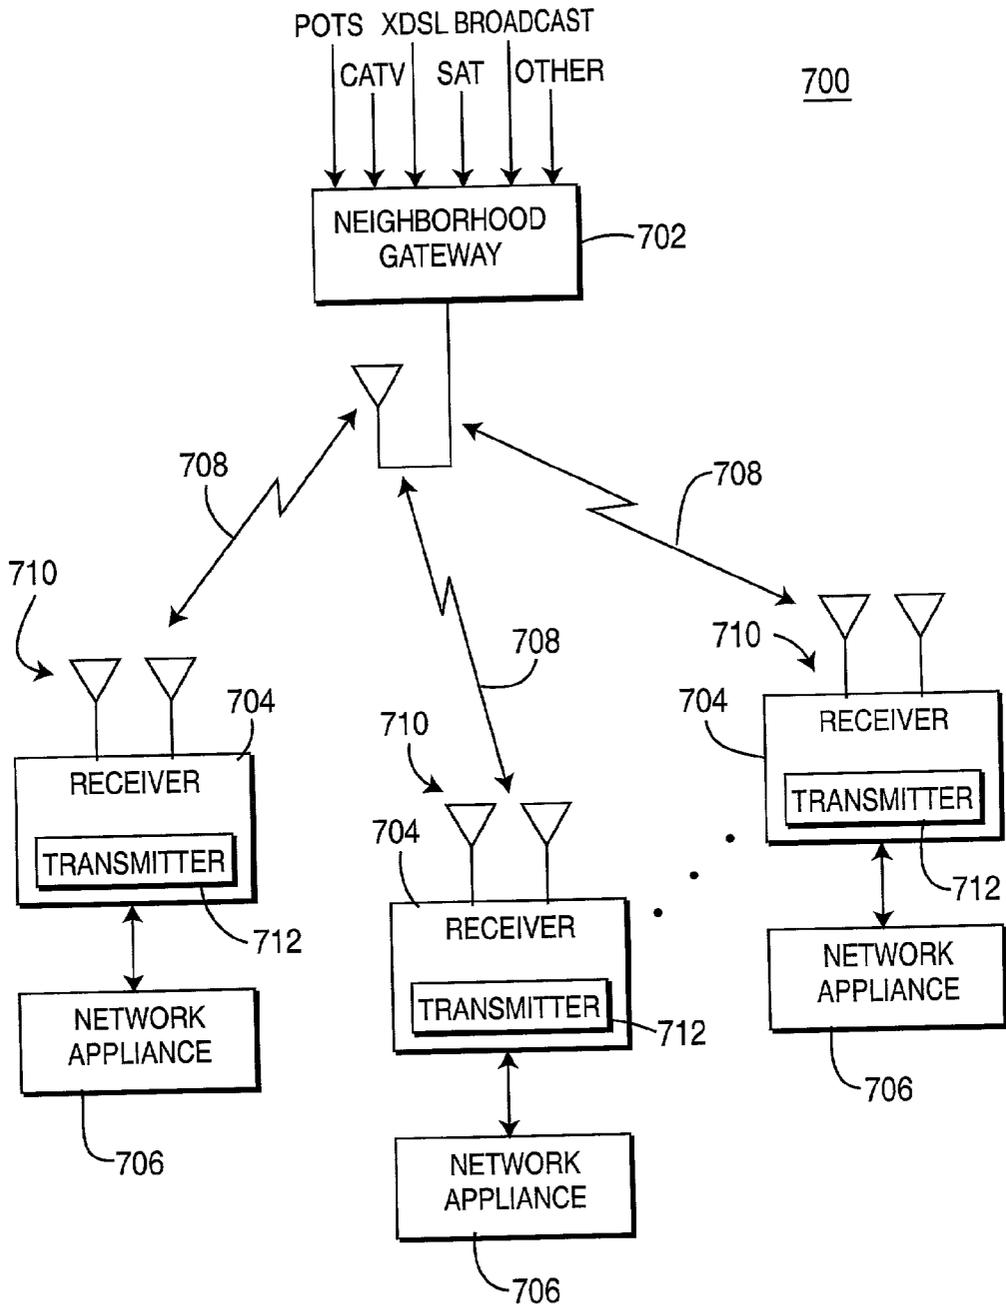


FIG. 7

METHOD AND APPARATUS FOR PROVIDING A BROADBAND, WIRELESS, COMMUNICATIONS NETWORK

[0001] This application is a continuation-in-part application of U.S. patent application Ser. No. 09/772,505, filed Jan. 30, 2001, which claims benefit of U.S. provisional patent applications 60/206,133, filed May 22, 2000, and 60/259,834, filed Jan. 5, 2001.

[0002] The invention relates to wireless communications networks and, more particularly, the invention relates to broadband, wireless communications networks for residential and enterprise use.

BACKGROUND OF THE DISCLOSURE

[0003] Residences are presently coupled to many sources of audio/visual entertainment, communications, and computing signals, including, computer modems, cable television feeds, satellite television feeds, telephone, over-the-air television and so on. Each of these sources of signals enters a residence and is routed via cables, or wires, or phone lines, to an associated communications appliance, i.e., the telephone signals are routed through the home on a twisted-pair cable to a telephone, the cable television signals are routed through the home on a coaxial cable to a cable set top box, and so on. As such, a residence will have many cables, wires and other communications connections throughout the home. Each time an appliance is to be moved from one location to another, the signal cabling must be rerouted. Such cutting and splicing leads to noisy connections and signal degradation that severely effects the fidelity of the signal.

[0004] To remedy this problem, wireless local area networks (LAN) have been developed that implement the Institute of Electrical and Electronic Engineers (IEEE) standard 802.11a, 802.11b, and other variants of the basic 802.11 standard. The 802.11a standard defines, for example, a wireless LAN system that uses orthogonal frequency division multiplexing (e.g., 48 carriers carrying 64-QAM signals in a 20 MHz wide channel) and defines the control layer to utilize the media access control (MAC) protocol. A plurality of the carriers are used as pilot tones to achieve receiver synchronization. Multipath interference is controlled by having many carriers propagating a low data rate signal, e.g., 256 kbit. As such, the data rate for the system is limited within a given bandwidth. Conversely, higher data rates necessitate greater bandwidth. The greater the bandwidth demand, the fewer the number of individual frequencies available to individually serve consumers residing in multiple dwelling unit housing configurations.

[0005] Therefore, a need exists in the art for a broadband, wireless network that provides a user with a flexible environment for using and locating their communications appliances.

SUMMARY OF THE INVENTION

[0006] The present invention provides a neighborhood communications gateway that accepts all incoming communications signals and securely broadcasts those signals to residences throughout a neighborhood. Each communications appliance within the neighborhood is outfitted with a receiver that decodes the broadcast signals and couples the

signals to the input terminals of the associated communications appliance. The system is completely "plug-and-play" such that a user can quickly and easily utilize the gateway for many communications appliances.

[0007] Each receiver is equipped with an antenna array and a multipath signal processor to ensure that each communications appliance received a robust, error free signal no matter where it is located in the home. The multipath signal processor comprises adaptive signal processing in both spatial and temporal domains to ensure that multipath signals are sufficiently suppressed to enable accurate decoding of the received signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

[0009] FIG. 1 depicts a block diagram of a wireless network system in accordance with the present invention;

[0010] FIG. 2 depicts a block diagram of a network gateway of FIG. 1;

[0011] FIG. 3 depicts a block diagram of a receiver of FIG. 1;

[0012] FIG. 4 depicts the frequency allocation for the wireless network system of FIG. 1;

[0013] FIG. 5 depicts a block diagram of one embodiment of a back channel transmitter;

[0014] FIG. 6 depicts a block diagram of a specific embodiment of a receiver; and

[0015] FIG. 7 depicts a block diagram of a wireless network for distributing information throughout a neighborhood of receivers.

[0016] To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

DETAILED DESCRIPTION

[0017] FIG. 1 depicts a block diagram of a broadband, wireless communication system 100 in accordance with the present invention. This system provides a broadband residential or small home office (SOHO) wireless network. The system 100 comprises a gateway 104 and a plurality of receiver nodes 120_n (n is an integer). Each receiver node 120_n comprises a receiver 116_n and a communications appliances 110, 112, 114, and 118 coupled to the receiver 116_n. The gateway 104 receives a plurality of input signals from a plurality of sources 102 including a cable feed, a plain old telephone system (POTS) feed, a satellite television feed, over-the-air television antenna, and the like. The gateway 104 is also optionally coupled to a residential controller 108 that provides the ability to control various environmental aspects of a residence (e.g., lighting, heating, cooling and so on) through a wireless system.

[0018] As illustrated, FIG. 1 emphasizes that the entertainment DTH, cable, and terrestrial channel tuners are located within the gateway. Channel tuners are no longer associated with the entertainment appliance. Air and physi-

cal interface access control, payload mapper and demapper functions are executed within the logic blocks of the gateway. Network control functions also are executed within the logic of the gateway.

[0019] Conditional access control for DTH is handled within the traditional decoder module of the A/V appliance so that encrypted entertainment remains encrypted within the in-home network until de-encrypted at the specific subscribing appliance. The traditional interface between the logic block and the appliance can be, for example, NRSS Level B for information flowing into the appliance and I²C for control going back into the in-home network. Cable pay per view (PPV) may be handled within the gateway.

[0020] The network itself, at 5.6 GHz, is comprised of three 100 MHz wide bands. These bands are channelized into fifty 6 MHz bands where each channel carries 40 Mbits/sec for a total capacity of 2 Gbits/sec. Control and Internet links can be multiplexed within the 6 MHz wide in-home bands as shown, for example, in Table I:

TABLE I

Channel Function	Channel Bandwidth	Maximum Available Bands--Adjacent Band Usage
Delivery of encrypted entertainment from external broadband pipes to appliances at 40 Mbits/sec.	6 MHz	50*
In-home multimedia/data channels at 10 Mbits/sec	6 MHz	4 per channel**
Internet Uplinks at 1 Mbit/sec	6 MHz	10 per channel**

*Dedicated non-multiplexed bands.

**Multiplexed within one 6 MHz band using a label protocol.

[0021] In a typical home configuration, assuming three DTH picture-in-picture/internet TV sets and two PCs plus DTH and xDSL Internet service subscriptions, the actual channel assignments for this typical network are shown below in Table II:

TABLE II

Channel Function	Bandwidth Required	6 MHz Bands Used
Delivery of encrypted entertainment or internet to TVs (6 @ 40 Mbits/sec)	6 MHz	6
PC internet downlinks (2 @ 10 Mbits/sec)	6 MHz	1
PC internet uplinks (2 @ 1 Mbits/sec)	6 MHz	1

[0022] Total 6 MHz band usage in this example is 8, leaving 42 free for near neighbor usage and other 5.6 GHz services. Two 6 MHz bands are dedicated to each TV to support regular high definition television (HDTV) viewing via a DTH service provider plus windows for HDTV PIP or Internet access, one 6 MHz band is dedicated to downloading the Internet to the two or three PCs and another lightly loaded channel is used for uploading from the PCs to the Internet. A bandwidth utilization example is summarized in FIG. 4.

[0023] The modulated signals are transmitted from the gateway 104 to the receivers 116_n through one or more

antennas 106. The transmitted signals are received and decoded at various locations throughout the residence. The receivers 116 can be up to 100 meters from the gateway 104. Each receiver 116 decodes the relevant signals for the appliance that is attached to the receiver. For example, the receiver 116₁ decodes the signals that are applicable to the personal computer 110, the receiver 116₂ decodes the signals that are applicable to the television (or home theatre system) 112, and so on. The uplink uses a time division multiple access (TDMA) frame structure having timing synchronized to downlink timing markers. Uplinks and downlinks are time based synchronized in pairs. As such, the transmissions are packetized and each packet is addressed to a particular receiver node. Consequently, the gateway 104 can route signals to any receiver node 120 within the system 100.

[0024] To facilitate the high data rates of the system, a 256/64 QAM modulation technology is used in the downlink. The occupied bandwidth is less than 6 MHz allowing a sufficiently large number of useable channels in the higher power portion of the 5 GHz band. With appropriate IF filtering, adjacent channel performance levels in excess of 40 dB can be achieved. A concatenated trellis code and block code structure is used to provide adequate Forward Error Correction or a Turbo Code method may also be employed based upon the desired outcome of specific architectural refinements.

[0025] The QPSK modulation technology is used for the uplinks. This occupies a bandwidth of less than 6 MHz with a maximum data rate of 10 Mbits/sec.

[0026] The most difficult class of problems associated with this 5.6 GHz band is that of multipath. In this frequency band and in a home or SOHO environment, the multipath takes on a broad range of characteristics including frequency flat fading, frequency selective fading and high frequency Doppler distortion. To combat this set of problems a multiple antenna diversity technique is used in the form a spatial diversity equalizer/combiner. At least two antenna inputs at a receiver node are equalized and combined to reduce the effects of multipath encountered in the home or home/office environments. This approach achieves the maximum level of Quality of Service (QoS) that can be achieved without resorting to complex MAC protocols and sophisticated reservation schemes.

[0027] To avoid interference and allow maximum user capacity, a Carrier Sense Multiple Access Collision Detection, or CSMA/CD, channel access technique is employed at system start-up. If contention is sensed, the next best available channel may be utilized by the system. Maximizing the overall available number of channels within the allowable spectrum eases the burden in a multidwelling unit application. A Forward Overhead Control Channel is embedded in the downlink data stream, which advises and controls uplink time slot allocation and channel bandwidth aggregation. Channel access is also controlled through this mechanism.

[0028] The uplink consists of a TDMA based 10 MB/s QPSK modulated data system in which burst demodulation must be employed to allow multiple users to access the hub unit as required.

[0029] Finally, power control of both uplink and downlink traffic channels, can be used to allow maximum utilization of spectrum in high capacity environments and mitigate some

of the technical radio design challenges associated with wide dynamic signal range. Because more than one user is multiplexed on a single carrier the power control algorithm must accommodate the lowest recovered signal strength user as its minimum case.

[0030] FIG. 2 depicts a detailed block diagram of the gateway 104 comprising a gateway logic 240 and a radio section 238. The radio section 238 comprises a plurality of tuner modules 202 (e.g., direct broadcast satellite (DBS), ultra-high frequency (UHF), very high frequency (VHF), and so on) and a transceiver 216. The gateway logic 240 comprises a plurality of demodulators 204 (e.g., quadrature phase shift keying (QPSK), vestigial side band (VSB), standard television and the like), decoders 206, a reconfigurable ATM adaptation layer 2242, a microprocessor 208, a gateway firewall 210, an encoder 212, a modulator 214, a demodulator 218 and a decoder 220. The various sources of RF signals are coupled to the tuner modules 202, which select particular signal channels for reception. Each appliance has a corresponding tuner module 202. The tuner modules filter and down convert each of the selected channels. The channels are selected by a user or users via the back channel communication link from the receivers 116 to the gateway 104. The back channel operation is discussed below. The demodulators 204 demodulate the down converted signals. The decoders 206, then decode the signals including performing error correction to form baseband video. The baseband video is coupled to the gateway interface 210. The tuner modules 202, the demodulators 204, and the decoders 206 are all controlled by the microprocessor 208.

[0031] The reconfigurable ATM adaptation layer 2242 couples the gateway firewall 210 to an xDSL CPE stream to enable the system to be used to distribute voice, data, fax, multimedia content, and TCP/IP Internet services throughout a residence. The content from the xDSL stream can then be displayed by any one of the appliances in the network.

[0032] The gateway firewall 210 digitizes the decoded signals (if necessary) and provides firewall services. The firewall services ensure that unauthorized users cannot access the gateway from outside the residence without proper authority. Additionally, the gateway firewall 210 provides encryption to ensure that neighboring residences are not capable of viewing each other's programming. The firewall and encryption services are provided by using a well-known protocol such as the media access control (MAC) protocol.

[0033] The encrypted baseband video signals are coupled to an encoder 212. The encoder 212 compresses the signal using, for example, run-length coding, or some other form of lossless encoding. The encoded signal is coupled to modulator 214, where the signal is modulated onto a 5-6 GHz carrier. The modulation is an M-ary quadrature amplitude modulation (QAM). To transmit broadband signals such as HDTV, the modulation is selected to be 256-ary QAM. For lower bandwidth signals, the modulation index can be lowered to, for example, 64.

[0034] A transceiver 216 amplifies the modulated signal and couples the signal to a pair of antennas 106. Specifically, the signal passes through a wide-band amplifier 222, a bandpass filter 224, a diplexer 228, and a power splitter/combiner 226. The diplexer 228 and band pass filter 224

may be fabricated as a single component. The diplexer 228 and power splitter 226 enables the transmitter and receiver to utilize the same antennas 106. The transmitter portion of the transceiver 216, for example, transmits a 1 Watt signal in the 5.75-5.85 GHz band (the UNII-band). Each of the transmitted signals carries 20-40 Mbps in a channel bandwidth of approximately 6 MHz. As such, many 6 MHz channels (one or more for each appliance) are transmitted in the UNII-band.

[0035] Additional antenna elements could be used with dynamic, beam forming circuitry such that the transmitted signal is "pointed" at the appliance that is to receive the signal being transmitted at any instant in time. Such antenna control provides multipath signal suppression at the receiver plus further enhancements of QoS without the complications of more complex MAC protocols.

[0036] The antennas 106 also receive control signals from various appliances within the residence. In one embodiment of the invention (not shown), only a single antenna is coupled to the back channel receiver 201 in the gateway 104. In another embodiment, both antennas are coupled to the receiver 201 via a splitter/combiner 226 and diplexer 228. Combining the antenna signals forms a spatial diversity combiner that suppresses multipath interference. An adaptive spatial diversity combiner that can be used in the gateway transceiver is described with reference to FIG. 2. Because the back channel data rate is relatively low, the back channel modulation is generally BPSK, QPSK or 4-ary QAM, both of which are relatively easy to receive, even in a noisy environment. As such, diverse antennas are not generally necessary.

[0037] The received signals, known as back-channel signals, are coupled through a diplexer 228, band pass filter 230, amplifier 232, mixer 236 and into a demodulator 218. The transceiver 216 provides amplification and downconversion such that the output of the transceiver 216 is an IF signal with a relatively high signal-to-noise ratio (SNR). The back-channel signal is typically in the 5.125-5.225 GHz band (the UNII-band) and transmitted from the network appliances using 50 mW. The back channel can support 10 Mbits/sec using burst mode QPSK modulation. The demodulator 218 extracts the modulation (a baseband signal) from the carrier signal and couples the baseband signal to the decoder 220. The decoder 220 decodes the baseband signal. The back channel signal carries commands from the network appliances (120 of FIG. 1) to instruct the gateway 104 as to what signals to transmit to the appliances. The decoded signals are coupled to the microprocessor 208 for implementation.

[0038] FIG. 3 depicts a block diagram of a receiver 116 of FIG. 1 that uses a multipath processor 301 (referred to as a spatial diversity combiner) to combat multipath interference. Each antenna 106A and 106B is respectively coupled to tuners 304 and 306. These tuners 304 and 306 select one of the 64 available channels. The tuners 304 and 306 filter and downconvert the received signal to near baseband. The near baseband signals are respectively coupled to the analog-to-digital (A/D) converters 304 and 306. The digitized signals are applied to the timing recovery circuitry 308. The timing recovery circuitry 308 ensures that the A/D converters 304 and 306 accurately sample the symbols in the near baseband signal.

[0039] The samples are then coupled to separate spatial equalizers **310** and **312**. These equalizers are multi-tap feed forward equalizers (FFE) that delay their respective signals to achieve equal delays in the received signals. The most difficult class of problems associated with this 5.6 GHz band is that of multipath. In this frequency band and in a home or SOHO environment, the multipath takes on a broad range of characteristics including frequency flat fading, frequency selective fading and Doppler distortion. To combat this set of problems a multiple antenna diversity technique is used to form a spatial diversity equalizer/combiner. At least two antenna inputs are equalized and combined to reduce the effects of multipath encountered in the home or home/office environments. Once spatially equalized by equalizers **310** and **312**, the two signals are combined in combiner **314**. The output of the combiner **314** is coupled to a single circuit **316** comprising both a temporal equalizer and carrier loop recovery circuit. The equalizer/carrier recovery circuit **316** comprises a decision feedback equalizer (DFE) that removes intersymbol interference and a carrier recovery loop that extracts the carrier from the equalized symbols.

[0040] The carrier is used to derotate the symbols for sampling using the symbol sampler **318**. Within the subtractor **320**, the symbol sample is compared to the unsampled symbol to produce a symbol error that is coupled to the tap control **322**. The tap control **322** uses the error signal to produce tap weight adjustments for the three equalizers: the two spatial equalizers **310** and **312** and the temporal equalizer **316**. To provide such multipath processing in the gateway, similar circuitry may be included in the transceiver of the gateway.

[0041] The sampled symbols are coupled to the appliance specific processor **324**. The processor **324** performs the necessary processing to convert the symbol stream into a signal that can be used by the appliance. For example, if the appliance is an NTSC television, the appliance specific processor **324** would convert the symbol stream into an NTSC signal. Receivers designed for other appliances convert the symbols into signals that are appropriate for those appliances. For example, an NTSC signal would be digitized and 3-D comb filtered in the gateway prior to encoding and transmission to a node in the system. An NTSC signal may be digitized into a standard definition (SD) digital signal. The receiver would convert the digital signal into a signal that is compatible with the television receiver. As such, the system can accommodate legacy television systems.

[0042] FIG. 5 depicts a back channel transmitter **500** for television appliance. The television set decoder **502** couples to the I²C bus **510** of the back channel transmitter **500**. The I²C bus **510** carries command and control signals to a logic block **504**. The logic block **504** contains a modulator/FEC encoder, payload mapper, MAC, transmit band selection and transmit control logic. The logic block **504** is coupled to the upconverter/modulator/frequency synthesizer block **506**. The logic block **504** sends a control signal and an 8 bit data signal to the block **506**. Block **506** modulates the command signal onto a carrier and upconverts the modulated signal to the back channel band. The signal is then coupled to one or more antennas **508**. This transmitter **500** receives, for example, channel turning commands from the television **502** and sends those commands to the gateway. The gateway then adjusts a tuner module to receive the specified channel.

Content from that channel is then wirelessly sent to the television appliance for display.

[0043] FIG. 6 is a block diagram of an illustrative receiver **600** that is used to receive both a primary television signal and a picture-in-picture (PIP) signal from the wireless network. The PIP signal may be an HDTV signal. Also the PIP signal may be received by a separate device such as a hand-held wireless device. The receiver **600** comprises one or more antennas **602A** and **602B**, a pair of down converters **604A** and **604B**, a pair of low noise amplifiers (LNAs) **606A** and **606B**, a pair of tuners **608A** and **608B**, and a logic block **610**. The logic block **610** is coupled to a television set decoder **612**.

[0044] The antennas **602A** and **602B** receive signals from the wireless network. Although two antennas are shown, those skilled in the art should understand that each antenna **602A** and **602B** may be an array of antennas and a diversity combiner. The signals are coupled to the down converters **604A** and **604B** to select a particular channel in the 5.725-5.8256 Hz band. The selected channels (one for each down converter) are converted to a 725-825 MHz band.

[0045] The down converters **604A** and **604B** are each coupled to an LNA **606A** and **606B** that adjust the amplitude of the signal. The gain of each LNA **606A** and **606B** is controlled by a gain control signal from the logic block **610**. The amplified signals are each coupled to the tuners **608A** and **608B**. These tuners may be integrated circuit tuners similar to that disclosed in U.S. patent application Ser. No. 09/457,258, filed Dec. 8, 1999 and incorporated herein by reference. The tuners **608A** and **608B** are controlled by signals generated by the logic block **610**.

[0046] The logic block **610** receives 10 bit digital signals from the tuners **608A** and **608B**. The logic block **610** provides diversity combining (if the down converters and tuners select the same channel), demodulation, forward error correction, payload demapping, MAC functionality, band tuner control, de-encryption, and the like. The logic block **610** produces 8-bit signals in NRSS-B format that are coupled to the television set decoder **612**. The decoder **612** couples control signals to the logic block **610**.

[0047] The receiver **600** may select two different television programs from the wireless network such that one signal can be displayed on the television as a primary video signal and the second signal can be displayed on the PIP television. Alternatively, one of the signals may be an Internet channel so that for example, the PIP could display an Internet web site or sites or other information provided by the Internet.

[0048] FIG. 7 depicts a block diagram of a wireless communications system **700** that is used to distribute information throughout a neighborhood of users, i.e., a wide area network. The system **700** provides broadband communications to the residences of a neighborhood, i.e., transmission over "the last mile".

[0049] The system **700** comprises a neighborhood gateway **702** and a plurality of receivers **704**. The receivers **704** are coupled to associated network appliances **706**. The gateway **702** received all or most of the communication signals used by a neighborhood of users. Such signals include telephone signals (POTS), analog and digital cable television signals, computer data signals (SDSL, cable

modem, and the like), satellite television signals, over-the-air television and radio broadcasts and the like.

[0050] This gateway 702 operates in much the same manner as the gateway 104 of FIGS. 1 and 2 in that the input signals are rebroadcast to user receivers 704 upon request from the receivers 704. The gateway 702 selects the information requested by each receiver 704 and transmits the information to the requesting receiver. The receivers 704 each contain a back channel transmitter 712 that is used for transmitting the requests from the receivers 704 to the gateway 702 via a back channel communications link. The forward and back channel links are represented by double-headed arrows 708. Each receiver 704, as in the residential application, is individually addressable such that the information is transmitted and received in a secure manner. A residence within the neighborhood may contain a multitude of receivers 704 such that all the communications needs of a given residence are serviced by the neighborhood gateway.

[0051] As with the residential network, the neighborhood network is subject to multipath fading and distortion. Such multipath signal degradation is mitigated by the use of the diversity antenna technique described above with respect to FIGS. 1-3. As such, each receiver 704 comprises a pair of receiving antennas 710.

[0052] Although various embodiments that incorporate the teachings of the present invention have been shown and described in detail herein, those skilled in the art can readily devise many other varied embodiments that still incorporate these teachings.

What is claimed is:

1. Apparatus for providing a wireless wide area network for a neighborhood of residences comprising:

a neighborhood gateway for receiving a plurality of signals, selecting specific signals from said plurality of signals and transmitting the selected signals through an antenna; and

a plurality of receivers for receiving said transmitted signals, where at least one receiver is located in a residence and each of the receiver converts the transmitted signal into a format that is compatible with a network appliance.

2. The apparatus of claim 1 wherein said plurality of signals comprise one or more signals selected from a group comprising analog cable television, digital cable television, plain old telephone signals, Digital Subscriber Line signals, satellite television signals, over-the-air television signals and any combination thereof.

3. The apparatus of claim 1 further comprising a transmitter coupled to said network appliance for transmitting a signal selection signal to said gateway.

4. The apparatus of claim 1 wherein said gateway comprises a transceiver for transmitting said selected signals and for receiving control signals from said network appliances.

5. The apparatus of claim 1 wherein said receiver comprises at least two antennas.

6. The apparatus of claim 5 wherein said receiver further comprises a spatial diversity combiner coupled to said at least two antennas.

7. The apparatus of claim 4 wherein said transceiver comprises a spatial diversity combiner and a plurality of antennas.

8. The apparatus of claim 5 wherein said receiver comprises:

a tuner coupled to each antenna;

an analog-to-digital converter coupled to each tuner;

a timing recovery circuit coupled to each analog to digital converter;

a spatial equalizer for each digitized signal;

a combiner for combining the output signals from each of the spatial equalizers;

a temporal equalizer for suppressing inter-symbol interference from the combined signal;

a symbol sampler for sampling the symbols;

a tap controller for adjusting the tap weights of the spatial equalizers and the temporal equalizers.

9. The apparatus of claim 7 further comprising an appliance specific processor for processing the symbols to form an appliance compliant signal.

10. The apparatus of claim 1 wherein said gateway transmits signals in the 5.725 to 5.825 GHz band.

11. The apparatus of claim 1 wherein said gateway transmits 20 to 40 Mbits/sec in 6 MHz channels.

12. The apparatus of claim 11 wherein said gateway is capable of transmitting approximately 50 channels.

13. The apparatus of claim 3 wherein said transmitter produces signals in the 5.15 to 5.25 GHz band.

14. The apparatus of claim 3 wherein said transmitter produces QPSK modulated signals.

15. The apparatus of claim 1 wherein said gateway transmits 256-ary signals.

16. A neighborhood gateway for providing a wireless wide area network across a neighborhood of residences comprising:

a plurality of tuner modules;

a plurality of demodulators coupled to said tuner modules;

at least one decoder coupled to said plurality of demodulators;

a transmitter portion for modulating and transmitting a forward signal; and

a receiver portion coupled to a gateway firewall for receiving commands from a network appliance to request one of said plurality of tuner modules to select a particular channel for transmission as a forward signal.

17. The apparatus of claim 16 wherein said plurality of tuner modules comprise one or more of the following tuners:

a VHF tuner;

a UHF tuner;

a cable channel tuner; and

a DSB tuner.

18. The apparatus of claim 16 further comprising:

a reconfigurable ATM adaptation level 2 circuit coupled to an xDSL stream and to said gateway firewall.

19. The apparatus of claim 16 wherein said transmitter portion comprises:

an encoder;
an M-ary modulator; and
a transmitter.

20. The apparatus of claim 19 wherein said M-ary modulator is a 256-ary modulator.

21. The apparatus of claim 16 wherein said receiver is a QPSK receiver.

22. A method of providing a wireless wide area network for a neighborhood of users comprising:

receiving a channel selection signal from a network appliance;

selecting a channel of information from a plurality of channels in response to said channel selection signal;

demodulating and decoding a signal in said selected channel;

encoding and modulating said signal to produce an M-ary signal; and

transmitting said M-ary signal to said network appliance.

23. The method of claim 22 further comprising:

receiving said M-ary signal at said network appliance; and

demodulating and decoding said M-ary signal to display information to a user.

24. The method of claim 23 wherein said M-ary signal receiving step further comprises:

receiving said M-ary signal at a plurality of antennas; and

diversity combining said M-ary signals received by each antenna.

* * * * *