



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2495614 A1 2004/03/25

(21) 2 495 614

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2003/07/02
(87) Date publication PCT/PCT Publication Date: 2004/03/25
(85) Entrée phase nationale/National Entry: 2005/02/09
(86) N° demande PCT/PCT Application No.: US 2003/020785
(87) N° publication PCT/PCT Publication No.: 2004/024421
(30) Priorité/Priority: 2002/09/10 (10/241,247) US


(51) Cl.Int.⁷/Int.Cl.⁷ B29C 59/00, B23B 29/26, B23B 5/00

(71) Demandeur/Applicant:
3M INNOVATIVE PROPERTIES COMPANY, US

(72) Inventeurs/Inventors:
BRYAN, WILLIAM J., US;
SEWALL, NELSON D., US;
CLEMENTS, JEFFREY E., US;
SCHRANK, GREG E., US

(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : ENSEMBLE OUTIL DE COUPE A PLUSIEURS DIAMANTS POUR DES OUTILS DE MICROREPLICATION
(54) Title: MULTI-DIAMOND CUTTING TOOL ASSEMBLY FOR CREATING MICROREPLICATION TOOLS

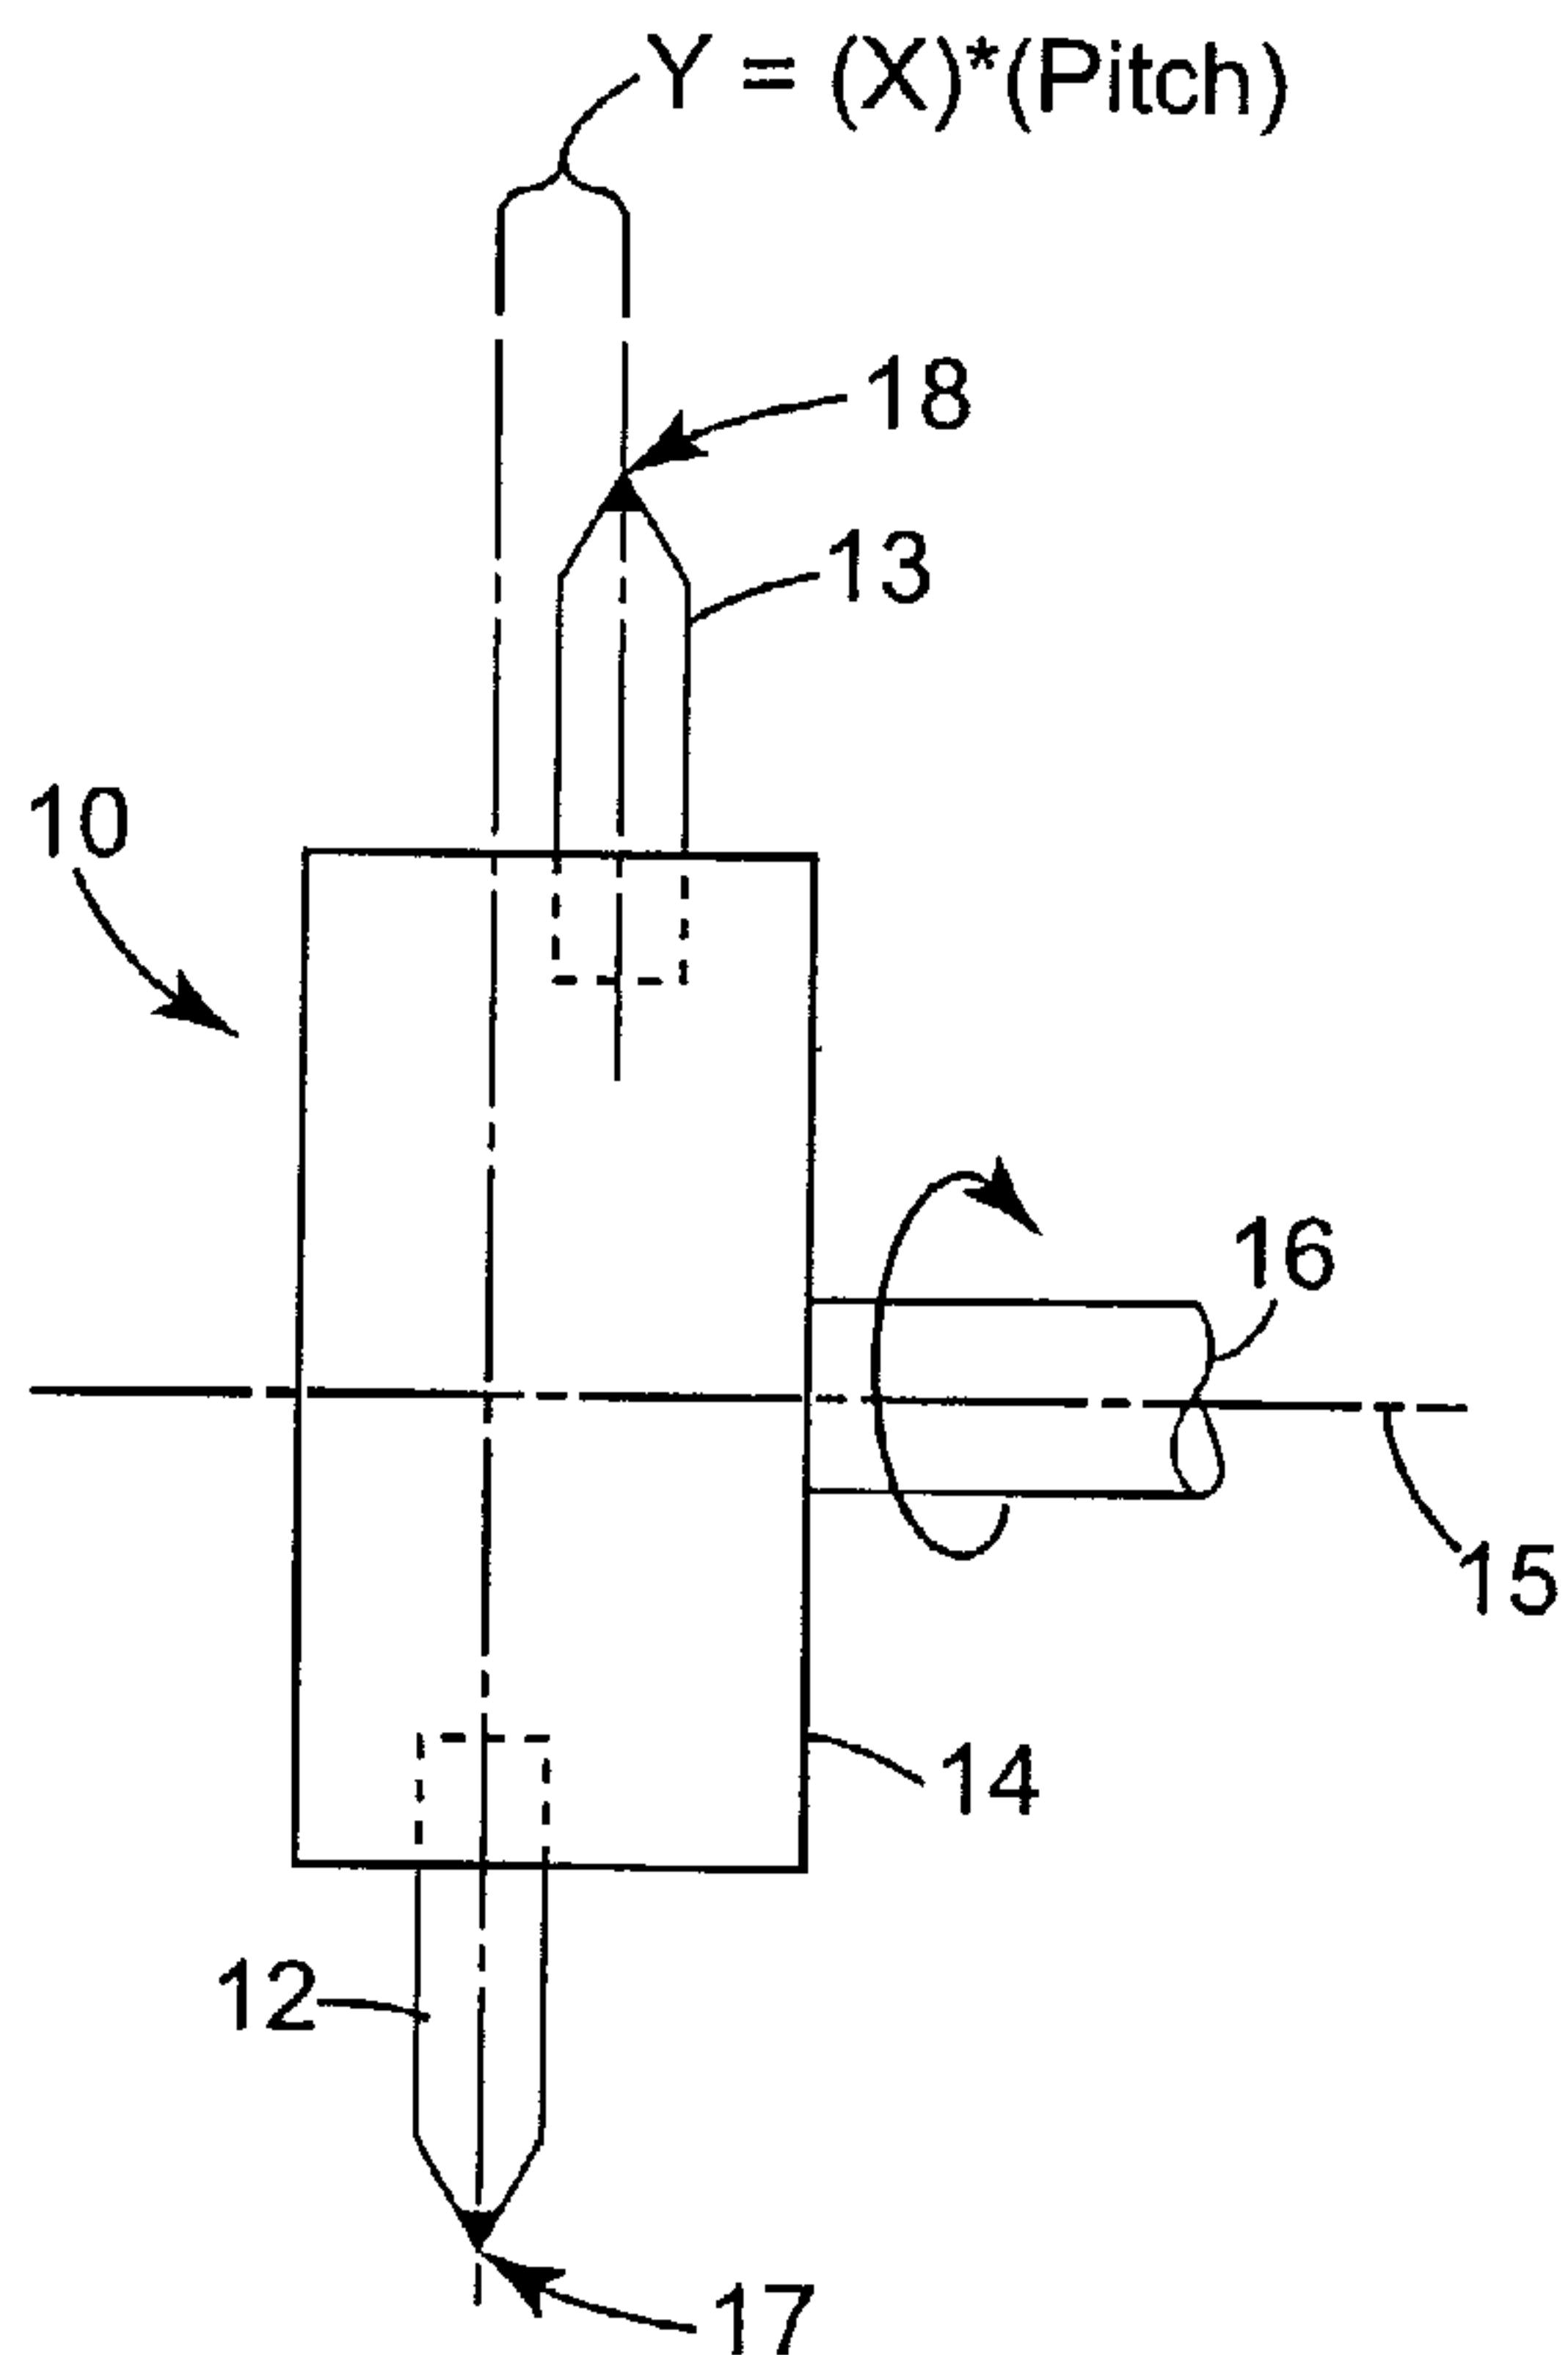

(57) Abrégé/Abstract:

In one embodiment, a cutting tool assembly (10) used for creating grooves in a microreplication tool (72a) is described. The cutting tool assembly includes a mounting structure (10) and multiple diamonds (12, 13) mounted in the mounting structure (14). For example, first and second tool shanks having first (17) and (18) second diamond tips can be positioned in the mounting structure (14) such that a cutting location of a diamond cutting tip of the first tool shank is a defined distance from a cutting location of a diamond cutting tip of the second tool shank. The defined distance (y) may correspond to an integer number (x) of pitch spacings, and may be accurate to within a tolerance of less than 10 microns.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/024421 A1

(51) International Patent Classification⁷: **B29C 59/00**,
B23B 5/00, 29/26

Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
CLEMENTS, Jeffrey, E.; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **SCHRANK, Greg, E.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(21) International Application Number:
PCT/US2003/020785

(74) Agents: **BUCKINGHAM, Stephen, W.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(22) International Filing Date: 2 July 2003 (02.07.2003)

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
10/241,247 10 September 2002 (10.09.2002) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: **BRYAN, William, J.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **SEWALL, Nelson, D.**;

[Continued on next page]

(54) Title: MULTI-DIAMOND CUTTING TOOL ASSEMBLY FOR CREATING MICROREPLICATION TOOLS

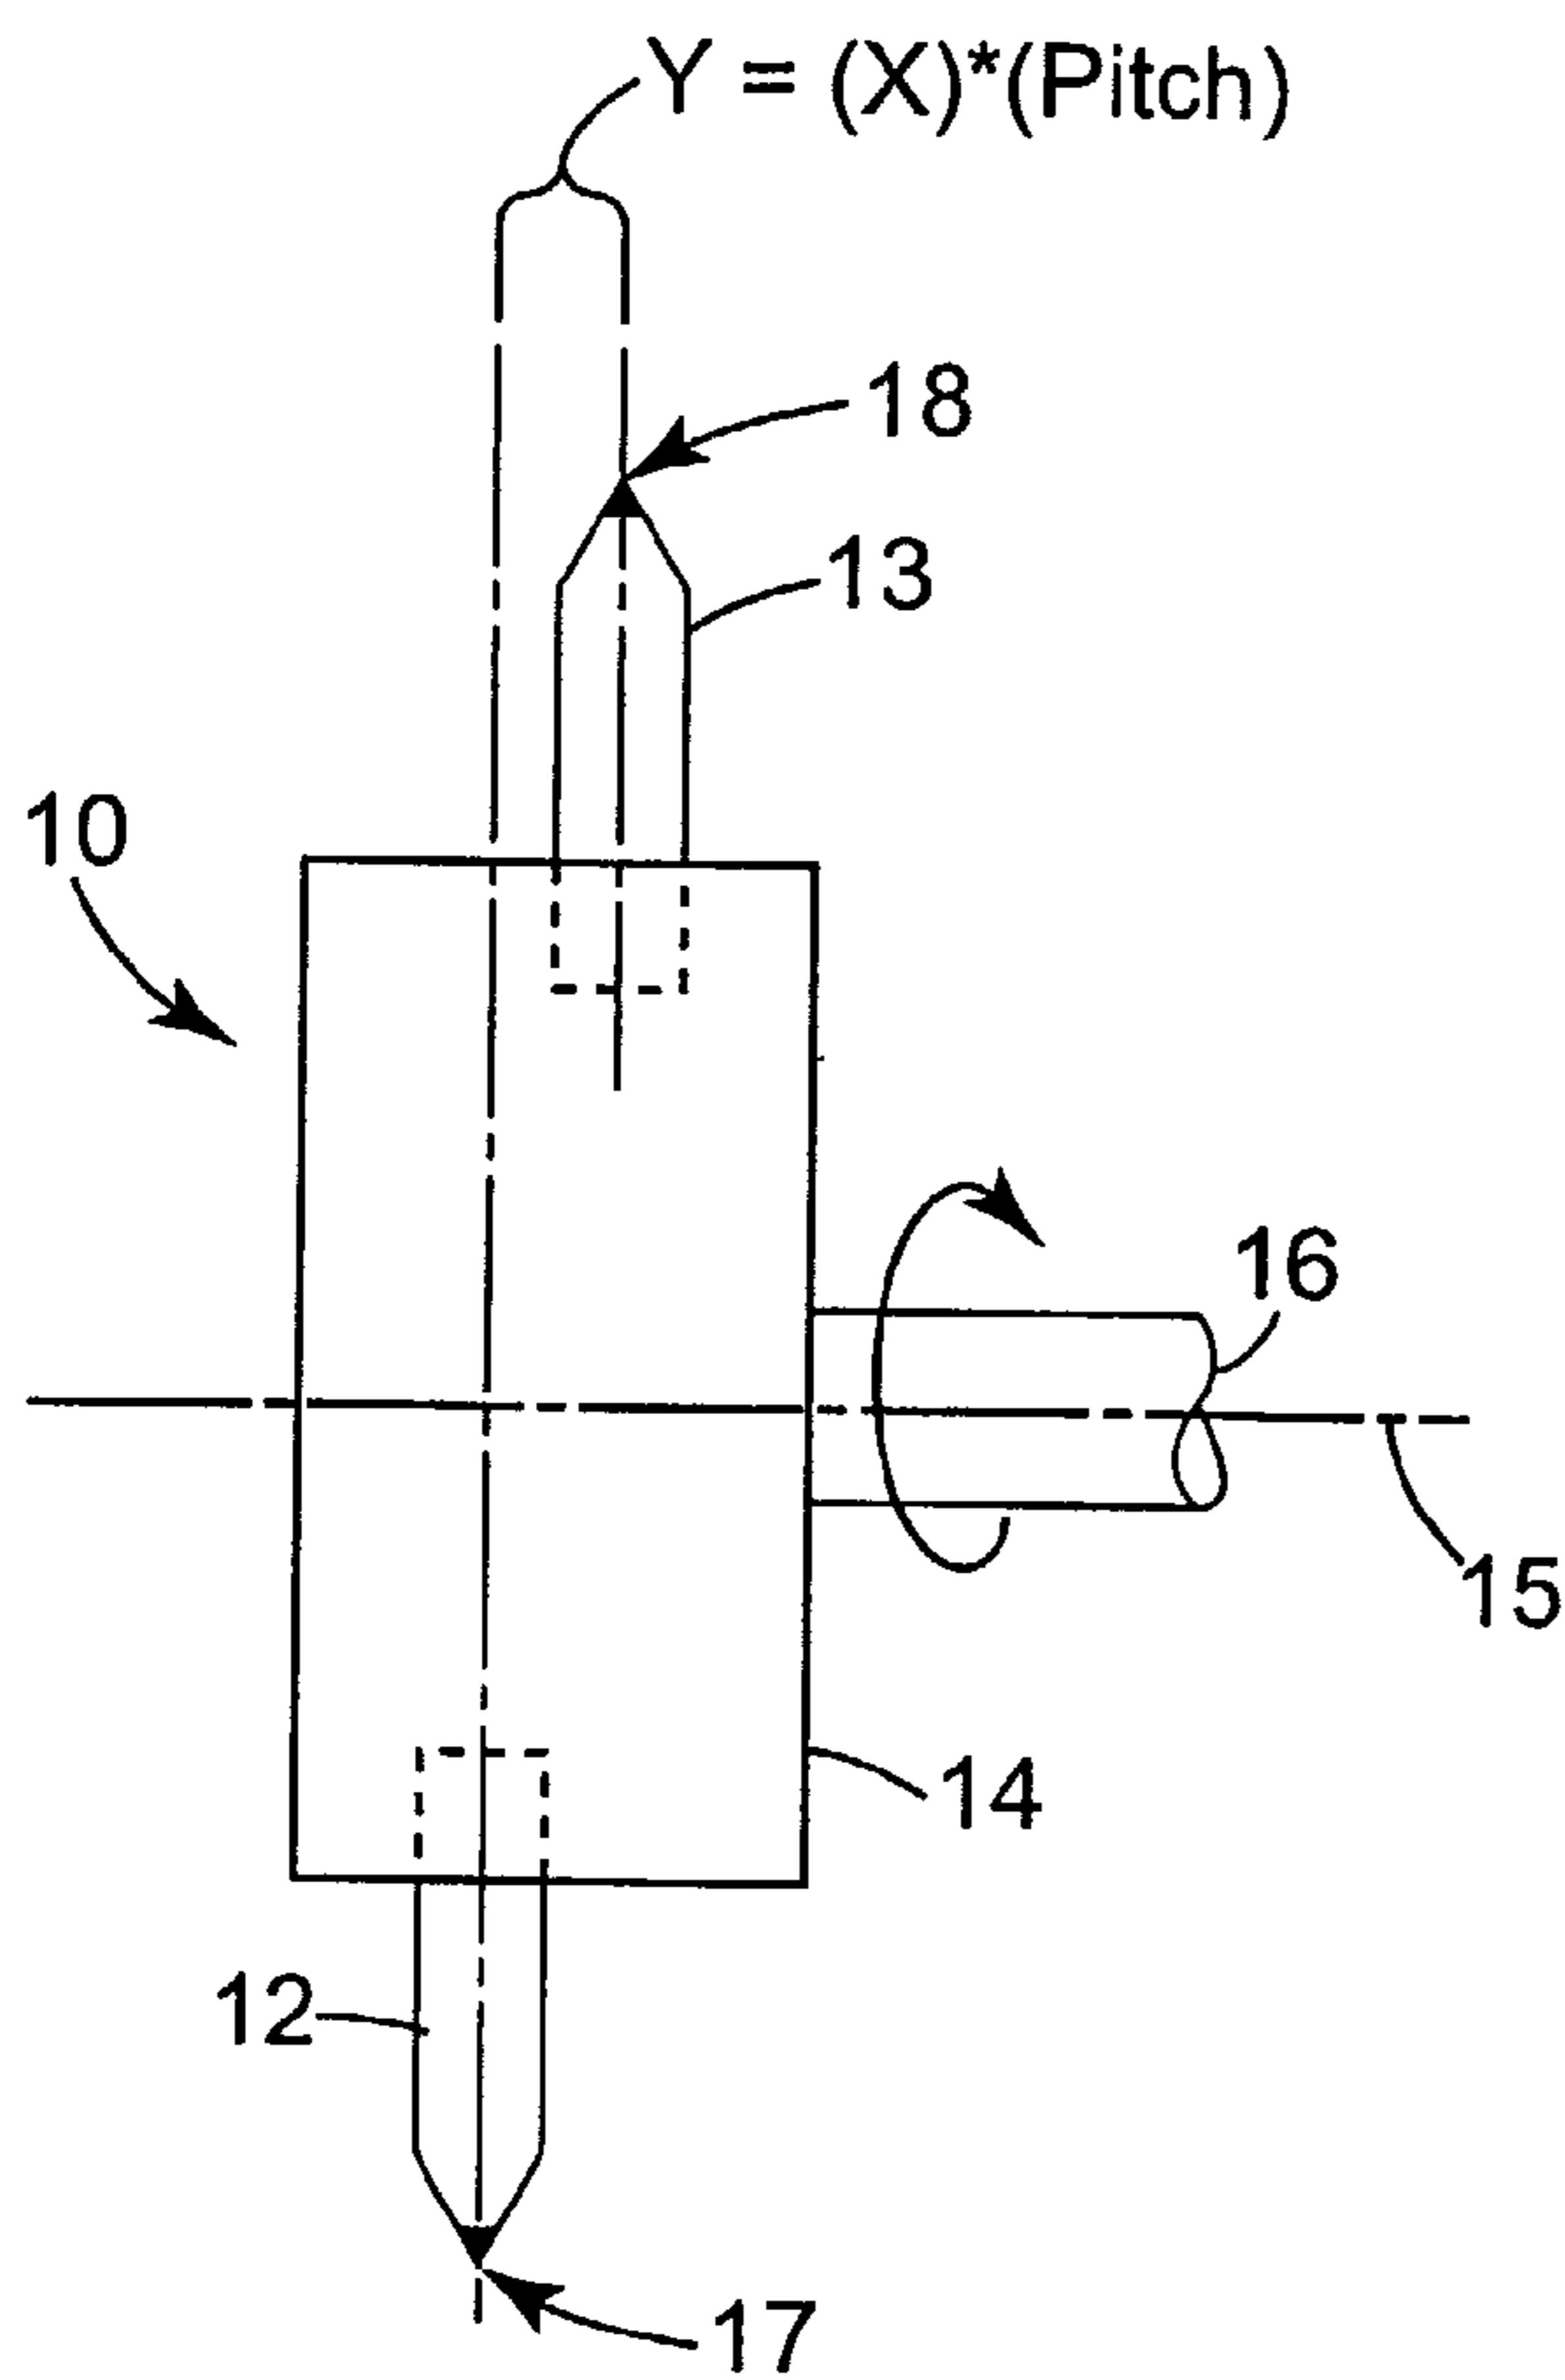

(57) Abstract: In one embodiment, a cutting tool assembly (10) used for creating grooves in a microreplication tool (72a) is described. The cutting tool assembly includes a mounting structure (10) and multiple diamonds (12, 13) mounted in the mounting structure (14). For example, first and second tool shanks having first (17) and (18) second diamond tips can be positioned in the mounting structure (14) such that a cutting location of a diamond cutting tip of the first tool shank is a defined distance from a cutting location of a diamond cutting tip of the second tool shank. The defined distance (y) may correspond to an integer number (x) of pitch spacings, and may be accurate to within a tolerance of less than 10 microns.

WO 2004/024421 A1

WO 2004/024421 A1



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

MULTI-DIAMOND CUTTING TOOL ASSEMBLY FOR CREATING MICROREPLICATION TOOLS

FIELD

5 The invention relates to diamond machining of microreplication tools used in creating microreplicated structures.

BACKGROUND

10 Diamond machining techniques can be used to create a wide variety of work pieces such as microreplication tools. Microreplication tools are commonly used for extrusion processes, injection molding processes, embossing processes, casting processes, or the like, to create microreplicated structures. The microreplicated structures may comprise optical films, abrasive films, adhesive films, mechanical fasteners having self-mating profiles, or any 15 molded or extruded parts having microreplicated features of relatively small dimensions, such as dimensions less than approximately 1000 microns.

15 Microreplication tools include casting belts, casting rollers, injection molds, extrusion or embossing tools, and the like. Microreplication tools can be created by a diamond machining process in which a cutting tool assembly is used to cut grooves or other features into the microreplication tool. The process of creating a microreplication tool using a cutting 20 tool assembly can be costly and time consuming.

SUMMARY

25 In general, the invention is directed to cutting tool assemblies that include multiple diamonds. The cutting tool assembly having multiple diamonds can be used in creating microreplication tools or other work pieces. In particular, the multiple diamonds of the cutting tool assembly can be used to create multiple grooves or other features in a microreplication tool during a single cutting pass of the assembly. With the ability to form multiple features in a single cutting pass, a cutting tool assembly with multiple diamonds can reduce production time and/or create more complex patterns.

The cutting tool assembly may include a mounting structure and multiple tool shanks mounted in the mounting structure. Each of the tool shanks can define a diamond tip used as a cutting tip of the cutting tool assembly. The diamond cutting tips of the tool shanks may be precisely formed to correspond to grooves or other features to be created in the

5 microreplication tool. Moreover, the tool shanks may be precisely positioned in the mounting structure such that cutting locations of the tips of the different diamonds are one or more pitch spacings apart from one another. Accordingly, the different diamond tips of the cutting tool assembly may correspond to different grooves or features to be created in the microreplication tool with pitch spacings defined by the cutting locations of the diamond tips.

10 By using multiple diamond cutting tips in the same assembly, the creation of the microreplication tool may be improved or simplified. In particular, fewer cutting passes of the cutting tool assembly may be needed to cut the grooves in the microreplication tool, which can reduce tooling costs. For example, if the cutting tool assembly includes two diamonds, the number of passes required to cut the grooves in the microreplication tool can be reduced

15 by one-half.

In addition, in some embodiments, the different diamond tips may define different features to be created in the microreplication tool. In that case, the use of different cutting tool assemblies to create two or more physically distinct features may be avoided, and a single assembly can be used instead to create two or more physically distinct features in the

20 microreplication tool. Such techniques may improve the quality of the microreplication tool and can reduce the time and costs associated with the creation of the microreplication tool, which in turn, may effectively reduce the costs associated with the ultimate creation of microreplicated structures.

Additional details of these and other embodiments are set forth in the accompanying

25 drawings and the description below. Other features, objects and advantages will become apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a top view of a multi-diamond cutting tool assembly configured for fly-

30 cutting.

FIG. 2 is a top view of a multi-diamond cutting tool assembly configured for plunge or thread cutting.

FIG. 3 is a more detailed top cross-sectional view of one embodiment of a multi-diamond cutting tool assembly configured for fly-cutting.

5 FIGS. 4 and 5 are more detailed top cross-sectional views of embodiments of a multi-diamond cutting tool assembly configured for plunge or thread cutting.

FIG. 6 is a front view of the embodiment illustrated in FIG. 5.

FIG. 7 is a conceptual perspective view of a multi-diamond fly cutting tool assembly simultaneously cutting two grooves during the creation of a microreplication tool.

10 FIG. 8 is a conceptual perspective view of a multi-diamond plunge or thread cutting tool assembly simultaneously cutting two grooves during the creation of a microreplication tool.

FIG. 9 is another top view of a multi-diamond plunge or thread cutting tool assembly.

FIG. 10 is another top view of a multi-diamond fly cutting tool assembly.

15 FIGS. 11A-11C are various cross-sectional top views illustrating a multi-diamond cutting tool assembly cutting grooves into a work piece, and the resultant grooves and protrusions that can be formed in the work piece.

20 FIGS. 12A-12D are additional cross-sectional top views illustrating a multi-diamond cutting tool assembly cutting grooves into a work piece, and the resultant grooves and protrusions that can be formed in the work piece.

FIG. 13 is a perspective view of a diamond that can be used in a multi-diamond cutting tool assembly.

FIGS. 14-27 are additional cross-sectional top views illustrating multi-diamond cutting tool assemblies according to various embodiments of the invention.

25

DETAILED DESCRIPTION

The invention is directed to cutting tool assemblies that include multiple diamonds. The cutting tool assembly can be used to create microreplication tools or other work pieces. In particular, the cutting tool assembly can be used to cut a plurality of grooves or other features during the creation of a microreplication tool with a single cutting pass of the cutting

tool assembly. Thus, the cutting time associated with the creation of a microreplication tool can be reduced, or more complex patterns can be formed in a given period of time. In this manner, the production cycle associated with the ultimate creation of microreplication structures can be reduced, and the production process may be simplified. In addition, in some 5 embodiments, the different diamonds may define different features to be created in the microreplication tool. In that case, the use of distinct cutting tool assemblies may be avoided, and a single, multi-faceted cutting tool assembly can be used instead to create two or more physically distinct features in the microreplication tool.

The cutting tool assembly may include a mounting structure, and multiple tool shanks 10 mounted in the mounting structure. Each tool shank defines a distinct diamond tip, and the different tips may correspond to different grooves or other features to be created in the microreplication tool. The cutting tool assembly may assume different configurations, depending on whether it is designed for flycutting or plunge or thread cutting.

The tips of the diamonds in the tool shanks can be formed using lapping techniques, 15 grinding techniques, or focused ion beam milling processes. Various shapes and sizes of the diamond tips are also described, which may be useful in the creation of different microreplication tools. Focused ion beam milling processes, in particular, may be used to perfect the desired shapes of the diamond tips with extreme accuracy.

The different tool shanks of the cutting tool assembly can be mounted in a mounting 20 structure using microscopic positioning techniques. For example, the techniques may involve the use of a tooling microscope with positioning controls. The microscope can be used to identify and measure the position of the diamond tips relative to one another so that the tool shanks can be properly positioned within the mounting structure. Positioning feedback can be provided to quantify the positioning of the diamond tips, e.g., in the form of a digital readout, 25 analog readout, graphic display, or the like. The feedback can be used to precisely position the different tool shanks in the mounting structure. Once positioned, the tool shanks can be secured in the mounting structure by any suitable securing mechanism. In this manner, the tool shanks can be positioned in the mounting structure such that a cutting location of a first diamond tip is a defined distance from a cutting location of a second diamond tip. The

defined distance may correspond to an integer number of pitch spacings, and may be accurate to within a tolerance of less than approximately 10 microns.

The use of a microscope and positioning feedback to precisely position the multiple tool shanks within the mounting structure can ensure placement of the diamond tips relative to 5 one another to tolerances required for effective tooling of microreplication tools. In particular, positioning to locations within tolerances of less than 10 microns, and more preferably less than 1 micron can be achieved. Moreover, positioning of the diamond tips to locations relative to one another within tolerances on the order of 0.5 microns can be achieved using a tooling microscope like that described herein. Such precision placement is desirable 10 for effective creation of microreplication tools that can be used for creating a wide variety of microreplicated structures such as microreplicated optical films, microreplicated mechanical fasteners, microreplicated abrasive films, microreplicated adhesive films, or the like.

The creation of cutting tool assemblies having multiple diamonds in the assembly can improve and simplify the creation of microreplication tools by reducing the number of cutting 15 passes of the assembly needed to create the grooves on the microreplication tool. Such simplification can effectively reduce the costs associated with the ultimate creation of microreplicated structures.

FIG. 1 is a top view of a cutting tool assembly 10 that includes two tool shanks 12 and 13 mounted in a mounting structure 14. Cutting tool assembly 10 is configured for flycutting 20 in which assembly 10 is rotated about an axis 15. For example, assembly 10 may be mountable to a drive shaft 16, which can be driven by a motor of a tooling machine (not shown) to rotate assembly 10. Mounting structure 14 may comprise a structure for holding tool shanks 12 and 13, that have diamond tips 17, 18. The shanks 12, 13 may be formed from a metallic or composite material, and diamonds can be secured to shanks 12, 13 by a 25 substantially permanent securing mechanism. In addition, mounting structure 14 may include features to enable attachment to drive shaft 16.

In order to secure the diamonds in tool shanks 12, 13 and thereby define diamond tips 17, 18, a substantially permanent securing mechanism can be used such as, brazing, soldering, an adhesive such as an epoxy, or the like. The tool shanks 12, 13 with diamond tips 17, 18, 30 can then be mounted in mounting structure 14 via a temporary securing mechanism such as

one or more bolts, clamps or set screws. Alternatively brazing, soldering, an adhesive such as an epoxy, or another more permanent securing mechanism may be used to secure tool shanks 12, 13 in mounting structure 14. In any case, the use of a tooling microscope with positioning controls and positioning feedback can ensure that tool shanks 12 and 13 are positioned within 5 mounting structure 14 such that diamond tips 17, 18 are positioned relative to one another with the precision required for effective manufacture of microreplication tools. Mounting structure 14 may have a shape that allows cutting tool assembly 10 to be inserted into a diamond tooling machine. Again, the diamond tooling machine may be a diamond turning machine configured for fly-cutting in which the cutting tool assembly is rotated about an axis 10 via drive shaft 16.

Each diamond tip 17 and 18 of tool shanks 12 and 13, respectively, defines a separate cutting mechanism that defines the creation of a distinct feature of a work piece such as a groove in a microreplication tool being created. In the embodiment illustrated in FIG. 1, cutting tool assembly 10 includes two tool shanks 12, 13, each having one diamond tip 17 and 15 18, although additional tool shanks with diamond tips may be used in accordance with the principles of the invention. In addition, the principles described below may be extended for use with diamonds that define more than one cutting tip per diamond.

As illustrated in FIG. 1, the tool shanks 12 and 13 are positioned in mounting structure 14 such that a cutting location of tip 17 of tool shank 12 is a defined distance from a cutting 20 location of tip 18 of tool shank 13. In particular, the defined distance may correspond to an integer number of pitch spacings. In general, the term "pitch" in this disclosure refers to the distance between two adjacent features to be created in a work piece. As shown in FIG. 1, distance $Y = X * (\text{Pitch})$, where X is an integer. The distance Y is also sometimes referred to as a pitch, e.g., the pitch of cutting tool assembly 10, although such terminology will be 25 generally avoided in this disclosure for clarity. In other words, unless otherwise specified, the term "pitch" when used herein is reserved for reference to the distance between two adjacent features to be created in a work piece. The distance Y would be equal to the pitch of features in a work piece when the integer X is chosen to be equal to one.

Tool shanks 12 and 13 can be positioned in mounting structure 14 such that a cutting 30 location of diamond tip 17 of tool shank 12 is an integer number of pitch spacings from a

cutting location of diamond tip 18 of tool shank 13. More specifically, diamond tips 17, 18 can be positioned relative to one another to within a tolerance of less than 10 microns, or less than 1 micron, such as to a tolerance on the order of 0.5 microns. Such precision placement may be desirable for effective creation of microreplication tools used for creating
5 microreplicated structures such as optical films, adhesive films, abrasive films, mechanical fasteners, or the like. Depending on the dimensions of the microreplication tool to be created, the pitch spacing may be less than approximately 5000 microns, less than approximately 1000 microns, less than approximately 500 microns, less than approximately 200 microns, less than approximately 100 microns, less than approximately 50 microns, less than approximately 10 microns, less than approximately 5 microns, less than approximately 1 micron, and may
10 approach the tolerance of 0.5 micron spacing of diamond tips 17, 18.

FIG. 2 is a top view of a multi-diamond cutting tool assembly configured for plunge or thread cutting. In plunge cutting, cutting tool assembly 20 is plunged into a moving work piece at defined locations for intervals of time before moving to other locations to cut various
15 grooves or other features. Thread cutting is similar to plunge cutting. However, in thread cutting, cutting tool assembly 20 is displaced into a moving work piece for longer periods of time to cut long threaded grooves. Cutting tool assembly 20 may also be used for scribing or ruling, in which case cutting tool assembly 20 is displaced through a work piece very slowly.

Like assembly 10 of FIG. 1, cutting tool assembly 20 of FIG. 2 includes multiple tool
20 shanks 22 and 23 secured within a mounting structure 24. In order to secure the diamonds in tool shanks 22, 23 and thereby define diamond tips 28, 29, a substantially permanent securing mechanism can be used such as, brazing, soldering, an adhesive such as an epoxy, or the like. The tool shanks 22, 23 with diamond tips 28, 29, can then be mounted in mounting structure 24 via a temporary securing mechanism such as one or more bolts, clamps or set screws.
25 Alternatively brazing, soldering, an adhesive such as an epoxy, or another more permanent securing mechanism may be used to secure tool shanks 22, 23 in mounting structure 24.

The use of a tooling microscope with positioning feedback can ensure that diamond tips 28, 29 of tool shanks 22 and 23 are positioned within mounting structure 24 with the precision required for effective tooling of microreplication tools. Mounting structure 24 may

have a shape that allows cutting tool assembly 20 to be inserted into a diamond tooling machine configured for plunge cutting, thread cutting, scribing or ruling.

FIG. 3 is a more detailed top cross-sectional view of one embodiment of a multi-diamond cutting tool assembly configured for fly-cutting. FIGS. 4 and 5 are more detailed 5 top cross-sectional view of embodiments of a multi-diamond cutting tool assembly configured for plunge or thread cutting. FIG. 6 is a front view of the embodiment illustrated in FIG. 5. In each case, mounting structure 14, 24A, 24B may include one or more areas 35A, 35B, 35C, 10 35D (collectively areas 35) to receive the respective tool shanks. Areas 35 may be slightly larger than the respective tool shanks in order to ensure that the tool shanks can be moved within the areas to properly position the diamond tips before the shanks are fixed in place. One or more spacers 41 (FIG. 4) may also be positioned in areas 35, if desired.

In order to position the tool shanks 12, 13 or 22, 23 within the respective mounting structure 14, 24, 24A or 24B, a tooling microscope can be used. For example, a Nikon Tool 15 Maker's Microscope commercially available from Fryer Company of Edina, Minnesota includes controlling dials for micro-measuring distances of the diamond cutting tips of tool shanks relative to one another. Moreover, feedback of the positioning can be provided and quantified by a Quadra Chex 2000 digital readout device, commercially available from Metronics Inc. of Manchester New Hampshire, in order to ensure that variable Y is defined to 20 within the accuracy required for effective creation of microreplication tools. The use of Nikon Tool Maker's Microscope and the Quadra Chex 2000 digital readout device can measure precision alignment of the tool shanks within the mounting structure such that diamond tips associated with the tool shanks are positioned relative to one another to within tolerances on the order of 0.5 microns.

In particular, achieving alignment of the diamond tips to tolerances less than 10 microns, and 25 more preferably less than 1 micron is desirable to create effective microreplication tools that can be used to create optical films, mechanical fasteners, abrasive films, adhesive films or the like. This micro-positioning can be achieved both laterally and vertically so that the diamond tips are correctly positioned laterally relative to one another to define the desired pitch, and vertically relative to one another to ensure desired cutting heights for the respective tips. Both 30 lateral and vertical positioning can be achieved to within the tolerances described herein.

Once properly positioned under the microscope using the digital readout, the tool shanks can be secured into the mounting structure via one or more bolts, clamps, or set screws.

Alternatively, brazing, soldering, an adhesive such as an epoxy, or any other securing mechanism can be used.

5 FIGS. 7 and 8 are conceptual perspective views of multi-diamond cutting tool assemblies 10, 20 used to simultaneously cut two grooves during the creation of a microreplication tool 72A (FIG. 7) or 72B (FIG. 8). In the examples of FIGS. 7 and 8, the respective microreplication tool 72 comprises a casting roll, although other microreplication tools such as casting belts, injection molds, extrusion or embossing tools, or other work pieces 10 could also be created using cutting tool assembly 10 or cutting tool assembly 20. As shown in FIG. 7, cutting tool assembly 10 may be secured to a drive shaft 16 which is attached to a motor (not shown) to rotate cutting tool assembly 10 about an axis. Cutting tool assembly 10 may also be moved relative to microreplication tool 72A in lateral directions (as illustrated by the arrows). At the same time, microreplication tool 72A may be rotated about an axis. As 15 cutting tool assembly 10 is rotated, diamond tips 18 and 17 cut into the microreplication tool 72A in an alternating manner. Accordingly, two grooves are formed in a single cutting pass of cutting tool assembly 10 along microreplication tool 72A.

As shown in FIG. 8, cutting tool assembly 20 may be secured in a diamond tooling machine 74 that positions the cutting tool assembly 20 relative to microreplication tool 72B, 20 and moves the cutting tool assembly 20, e.g., in lateral directions (as illustrated by the arrows) relative to the microreplication tool 72B. At the same time, microreplication tool 72B may be rotated about an axis. Diamond tooling machine 74 may be configured to pass the cutting tool assembly 20 into a rotating microreplication tool 72B via plunge or thread cutting techniques in order to cut grooves in the microreplication tool 72B. Alternatively, diamond tooling 25 machine 74 may be configured for scribing or ruling, in which cutting tool assembly 20 is displaced through a work piece very slowly. In any case, grooves can be cut, and protrusions can be formed on the work piece. The formed grooves and protrusions may define the ultimate form of microreplicated structures created using the microreplication tool 72A (FIG. 7) or 72B (FIG. 8), for example, during an extrusion process. Alternatively, the formed 30 grooves and protrusions may form features by displacement of material in a work piece other

than a microreplication tool. In addition, the use of a fast tool servo could be employed between cutting tool assembly 20 and the machine tool 74 that receives the cutting tool assembly. For example, the fast tool servo can vibrate the cutting tool assembly 20 for creating of particular microstructures in microreplication tool 72B.

5 Because the cutting tool assembly 10, 20 implements multiple tool shanks, and thus multiple diamond cutting tips, fewer passes of the cutting tool assembly are needed to cut the grooves on the microreplication tool. This can reduce production costs and speed the production cycle associated with creation of microreplication tools. Creation of a work piece can take hours if not days in some cases. Incorporation of two or more diamond cutting tips
10 within cutting tool assembly 10, 20 for simultaneous cutting of grooves can reduce the production cycle to a fraction of that time.

15 For example, if the cutting tool assembly includes two tool shanks each a defining diamond cutting tip (as illustrated in FIGS. 7 and 8), the number of passes required to cut grooves in the microreplication tool 72 can be reduced by one-half relative to an assembly that includes a single tool shank. Additional tool shanks may add further benefits in a similar manner. Also, multiple tips may be formed on one or both of the diamonds, which may add similar productivity benefits. Reducing costs associated with the creation of the microreplication tool 72, in turn, may effectively reduce the costs associated with the ultimate creation of microreplicated structures.

20 The diamond tips of the tool shanks 12, 13 or 22, 23 may also be subject to a wide variety of sizes. The sizes of the tips may be defined by one or more variables as illustrated in FIG. 9, including the cutting height (H), the cutting width (W), and variable (Y) defined above. The cutting height (H) defines the maximum depth that the diamond can cut in a work piece, and may also be referred to as the cutting depth. The cutting width (W) may be defined
25 as the average cutting width, or as labeled in FIG. 9, the maximum cutting width of a tip. The variable (Y) refers to the distance between adjacent tips, and is defined to be an integer number of pitch spacings. Another quantity that can be used to define the size of the cutting tips is referred to as the aspect ratio. The aspect ratio is the ratio of height (H) to width (W). Diamond tips created by focused ion beam milling processes can achieve various heights,
30 widths, pitches, and aspect ratios.

For example, the height (H) and/or the width (W) can be formed to be less than approximately 500 microns, less than approximately 200 microns, less than approximately 100 microns, less than approximately 50 microns, less than approximately 10 microns, less than approximately 1.0 micron, or less than approximately 0.1 micron. Additionally, the 5 variable Y may be defined to be less approximately 5000 microns, less than approximately 1000 microns, less than approximately 500 microns, less than approximately 200 microns, less than approximately 100 microns, less than approximately 50 microns, less than approximately 10 microns, less than approximately 5 microns, less than approximately 1.0 micron, and may approach a 0.5 micron tolerance. In some cases, as can be appreciated by 10 FIG. 10 (and FIGS. 5 and 6), the distance Y may be less than the width of the tool shank, and may even be less than the cutting width W associated with the diamond tip.

The aspect ratio may be defined to be greater than approximately 1:5, greater than approximately 1:2, greater than approximately 1:1, greater than approximately 2:1, or greater than approximately 5:1. Larger or smaller aspect ratios may also be achieved using focused 15 ion beam milling. These different shapes and sizes may be advantageous for various applications.

Focused ion beam milling refers to a process in which ions, such as gallium ions, are accelerated toward the diamond in order to mill away atoms of the diamond (sometimes referred to as ablation). The acceleration of gallium ions may remove atoms from the 20 diamond on an atom by atom basis. Vapor enhancing techniques using water vapors may also be used to improve the focused ion beam milling process. One suitable focused ion beam milling machine is the Micrion model 9500, commercially available from FEI Inc. of Portland Oregon. In general, focused ion beam milling can be performed to create precision tipped diamonds that correspond to the features to be created. One exemplary provider of focused 25 ion milling services that may be used to create one or more ion beam milled diamonds is Materials Analytical Services of Raleigh, North Carolina.

Focused ion beam milling is generally very expensive. Therefore, to reduce the costs associated with the creation of a multi-tipped diamond, it is desirable to initially process the diamond tip to be ion beam milled prior to submitting the diamond tip to the focused ion 30 beam milling process. For example, less expensive techniques such as lapping or grinding

may be used to remove significant portions of the diamond tip. The focused ion beam milling process may ensure that one or more of the dimensions or features listed above can be achieved. Still, by initially processing the diamond tip prior to focused ion beam milling, the amount of focused ion beam milling time required to create the final ion beam milled 5 diamond tip can be reduced. Lapping refers to a process of removing material from the diamond using a loose abrasive, whereas grinding refers to a process in which material is removed from the diamond using an abrasive that is fixed in a medium or substrate.

FIGS. 11A-11C are cross-sectional top views illustrating a cutting tool assembly 110 cutting grooves into a work piece 112. In the example, of FIGS. 11A-11C, the distance (Y) 10 quantified above would be equal to the pitch. In other words, the integer value (X) defined above would be equal to one, and thus because:

$$Y = (X) * (\text{Pitch}),$$

$$Y = \text{Pitch, when } X = 1.$$

In particular, FIG. 11A is a cross-sectional top view illustrating a multi-diamond cutting tool 15 assembly 110 cutting a first set of grooves into work piece 112, and FIG. 11B is a cross-sectional top views illustrating cutting tool assembly 110 cutting a second set of grooves into work piece 112. FIG. 11C is a top view illustrating the created work piece after only two 20 passes of cutting tool assembly 110. Work piece 112 may correspond to a microreplication tool as outlined above, although the invention is not necessarily limited in that respect. A similar cutting technique may be performed with a tool configured for fly cutting, with Y = 25 Pitch.

FIGS. 12A-12D are cross-sectional top views illustrating a multi-diamond cutting tool assembly 120 cutting grooves into a work piece 122. In the example of FIGS. 12A-12D, the integer value (X) defined above would be equal to 3, and thus because:

$$Y = (X) * (\text{Pitch}),$$

$$Y = 3 * \text{Pitch, when } X = 3.$$

In particular, FIG. 12A is a cross-sectional top view illustrating cutting tool assembly 120 cutting a first set of grooves into work piece 122, FIG. 12B is a cross-sectional top view 30 illustrating cutting tool assembly 120 cutting a second set of grooves into work piece 122, and FIG. 12C is a cross-sectional top view illustrating cutting tool assembly 120 cutting a third set

of grooves into work piece 122. FIG. 12D is a top view illustrating the created work piece after only three passes of cutting tool assembly 120. Again, work piece 122 may correspond to a microreplication tool as outlined above, although the invention is not necessarily limited in that respect. Also, a similar cutting technique may be performed with a cutting tool assembly configured for fly cutting, with $Y = 3 * \text{Pitch}$.

5 FIG. 13 is a perspective view of a diamond 130 that can be secured into a tool shank and then used in a cutting tool assembly. Diamond 130 may correspond to any of diamond tips 17, 18, 28, 29 described above. As shown in FIG. 13, diamond 130 may define a cutting tip 132 defined by at least three surfaces (S1-S3). Surfaces S1, S2 and S3 may be created by 10 grinding or lapping techniques, and may be perfected by focused ion beam milling techniques.

10 FIGS. 14-27 are top views of cutting tool assemblies according to various embodiments of the invention. FIGS. 14, 16, 18, 20, 22, 24 and 26 illustrate assemblies configured for plunge cutting, thread cutting, scribing or ruling, whereas FIGS. 15, 17, 19, 21, 15 23, 25 and 27 illustrate assemblies configured for flycutting. As can be appreciated by the examples of FIGS. 14-27, the tips of the diamonds in the respective tool shanks may be formed to have any of a wide variety of shapes and sizes.

15 For example, as shown in FIGS. 14 and 15, diamond tips 145-148 of tool shanks 141-144 may define substantially rectangular shapes. As shown in FIG. 16 and 17 diamond tips 165-168 of tool shanks 161-164 may define tapered shapes with flat tops. In that case, the 20 side walls defined by diamond tips 165-168 may taper such that diamond tips 165-168 define pyramid-like shapes with flat tops. The side walls defined by diamond tips 165-168 may form obtuse angles relative to the surface of mounting structures 169, 170.

25 As shown in FIG. 18 and 19, diamond tips 185-188 of tool shanks 181-184 define undercut side walls. In other words, side walls defined by diamonds 185-188 may form acute angles relative to the surface of mounting structures 189, 190. As shown in FIGS. 20 and 21, the different diamond tips 203, 204, 205, 206 of tool shanks 201 and 202 (FIG. 20) and 211 and 212 (FIG. 21) may define different shapes and sizes. In other words, a shape of the first diamond tip 203, 205 defined by first tool shank 201, 211 may be substantially different from a shape of the second diamond tip 204, 206 defined by second tool shank 202, 212. Such a 30 configuration may be particularly useful for the creation of optical films. In that case, the first

diamond tip 203, 205 defined by first tool shank 201, 211 may define a first optical characteristic to be created in the optical film, and the second diamond tip 204, 206 defined by second tool shank 202, 212 may define a second optical characteristic to be created in the optical film. Additional diamonds assuming various other shapes may add similar benefits.

5 For example, as shown in FIGS. 22 and 23, three or more tool shanks 221, 222, 223 (FIG. 22), 231, 232, 233 (FIG. 23) may be positioned in a mounting structure 224, 234 to define three or more diamond tips for simultaneously cutting grooves during a single cutting pass of the tool. In other uses, two or more diamonds may be secured in a tool shank as described herein, and then used to cut the same groove, e.g., with deeper and deeper cuts being made by 10 different diamonds during subsequent passes of the tool. In other words, a first diamond in the shank may cut a shallow groove with a second diamond in the shank cutting the same groove to a deeper depth during the next pass. Other shapes may also be cut during such subsequent passes.

As can be appreciated by FIGS. 24-27, one or both of the tool shanks 241, 242 (FIG.

15 24); 251, 252 (FIG. 25); 261, 262 (FIG. 26); or 271, 272 (FIG. 27) may be formed with diamonds that define multiple tips per diamond. In particular, as illustrated, tool shanks 242, 252, 261, 262, 271 and 272 are formed with multi-tipped diamonds. For example, multi-tipped ion beam milled diamonds as described in copending and commonly assigned U.S. application number 10/159,925, filed May 29, 2002 for Bryan et al. and entitled "Diamond 20 Tool with a Multi-Tipped Diamond" may be used in accordance with the principles of this disclosure. The entire content of U.S. application number 10/159,925 is hereby incorporated by reference herein. These and other formations of diamonds may be desirable for various applications. Accordingly, these and many other variations of the invention are within the scope of the claims.

25 A number of embodiments have been described. For example, multi-diamond cutting tool assembly has been described for use in diamond tooling machines. Nevertheless, various modifications can be made to the embodiments described above without departing from the scope of the following claims. For example, the cutting tool assembly may be used to cut grooves or other features into other types of work pieces, e.g., work pieces other than

microreplication tools. Accordingly, other implementations and embodiments are within the scope of the following claims.

08. Nov. 2004

CLAIMS

1. A cutting tool assembly comprising:

a mounting structure;

5 a first tool shank mounted in the mounting structure, the first tool shank defining a first diamond tip that corresponds to a first groove to be created in a work piece; and
 a second tool shank mounted in the mounting structure, the second tool shank defining a second diamond tip that corresponds to a second groove to be created in the work piece,
 wherein the first and second tool shanks are positioned in the mounting structure such
 10 that a cutting location of the first diamond tip is a defined distance from a cutting location of
 the second diamond tip, the defined distance being accurate to a tolerance of less than
 approximately 10 microns.

2. The cutting tool assembly of claim 1, wherein the defined distance corresponds to an
 15 integer number of pitch spacings, wherein each of the pitch spacings defines a distance
 between two adjacent features to be created in the work piece.

3. The cutting tool assembly of claim 2, wherein the first and second tool shanks are
 positioned in the mounting structure such that the cutting location of the first diamond tip is
 20 approximately one pitch spacing from the cutting location of the second diamond tip.

4. The cutting tool assembly of claim 2, wherein the pitch spacing is less than
 approximately 1000 microns.

25 5. The cutting tool assembly of claim 4, wherein the pitch spacing is less than
 approximately 100 microns.

6. The cutting tool assembly of claim 5, wherein the pitch spacing is less than
 approximately 10 microns.

30

16

< having been defined prior to assembly of the cutting tool assembly and >
 [following assembly of the cutting tool assembly]

7. The cutting tool assembly of claim 6, wherein the pitch spacing is less than approximately 1 micron.

8. The cutting tool assembly of claim 1, wherein an aspect ratio of a cutting height of the 5 first diamond tip relative to a cutting width of the first diamond tip is greater than approximately 1 to 1.

9. The cutting tool assembly of claim 8, wherein the aspect ratio is greater than approximately 2 to 1.

10

10. The cutting tool assembly of claim 1, wherein the first and second diamond tips define cutting widths of less than approximately 200 microns.

15

11. The cutting tool assembly of claim 1, wherein at least one of the diamond tips defines a substantially straight side wall.

12. The cutting tool assembly of claim 1, wherein at least one of the diamond tips defines an undercut side wall.

20 13.

The cutting tool assembly of claim 1, wherein at least one of the diamond tips defines a side wall that defines an obtuse angle relative to an adjacent surface of the mounting structure.

25 14.

The cutting tool assembly of claim 1, wherein the cutting tool assembly is a flycutting assembly configured to be rotated about an axis perpendicular to a cutting direction of the diamond tips, wherein the first and second tool shanks are mounted in the mounting structure on opposing sides of the mounting structure.

30 15.

The cutting tool assembly of claim 1, where the defined distance is less than a width associated with either of the first and second tool shanks.

16. The cutting tool assembly of claim 1, wherein the first and second tool shanks are mounted in the mounting structure on a common side of the mounting structure.

5 17. The cutting tool assembly of claim 1, further comprising a securing mechanism for securing the first tool shank in the mounting structure relative to the second tool shank.

18. The cutting tool assembly of claim 1, wherein a shape of the first diamond tip is substantially different from a shape of the second diamond tip.

10

19. The cutting tool assembly of claim 1, wherein the first and second diamond tips are shaped to create grooves in a microreplication tool that correspond to features to be created in a microreplicated structure.

15

20. The cutting tool assembly of claim 19, wherein the microreplicated structure comprises a mechanical fastener that defines a self-mating profile.

21. The cutting tool assembly of claim 19, wherein the microreplicated structure comprises an optical film.

20

22. The cutting tool assembly of claim 21, wherein a shape of the first diamond tip is substantially different from a shape of the second diamond tip, and wherein the first diamond tip defines a first optical characteristic to be created in the optical film and the second diamond tip defines a second optical characteristic to be created in the optical film.

25

23. The cutting tool assembly of claim 1, further comprising a third tool shank mounted in the mounting structure, the third tool shank defining a third diamond tip that corresponds to a third groove to be created in the work piece, wherein a cutting location of the third tip is a second defined distance from the cutting location of the second diamond tip, the second defined distance being accurate to a tolerance of less than approximately 10 microns.

24. The cutting tool assembly of claim 1, wherein the defined distance is accurate to within a tolerance of less than approximately 1 micron.

5 25. A diamond tooling machine used for creating grooves in a work piece comprising: a cutting tool assembly including:

a mounting structure;

a first tool shank mounted in the mounting structure, the first tool shank defining a first diamond tip that corresponds to a first groove to be created in the work piece; and

10 a second tool shank mounted in the mounting structure, the second tool shank defining a second diamond tip that corresponds to a second groove to be created in the work piece, wherein the first and second tool shanks are positioned in the mounting structure such that a cutting location of the first diamond tip is a defined distance from a cutting location of the second diamond tip, the defined distance being accurate to a tolerance of less than approximately 10 microns; and

15 an apparatus to receive the cutting tool assembly and to control positioning of the cutting tool assembly relative to the work piece.

20 26. The diamond tooling machine of claim 25, wherein the machine is a fly-cutting machine the rotates the cutting tool assembly about an axis, and wherein the apparatus includes a drive train coupling the mounting structure to a motor.

27. A cutting tool assembly comprising:

25 a mounting structure;

a first tool shank mounted in the mounting structure, the first tool shank defining a first diamond tip that corresponds to a first groove to be created in the work piece;

a second tool shank mounted in the mounting structure, the second tool shank defining a second diamond tip that corresponds to a second groove to be created in the work piece; and

*[having been defined prior to assembly of the cutting tool assembly and]
[following assembly of the cutting tool assembly]*

means for securing the first and second tool shanks in the mounting structure such that a cutting location of the first diamond tip is a defined distance from a cutting location of the second diamond tip, the defined distance being accurate to a tolerance of less than approximately 10 microns.

5

28. A flycutting tool assembly configured to be rotated about an axis to cut grooves in a microreplication tool comprising:

a mounting structure;

10 a first tool shank mounted in a first side of the mounting structure, the first tool shank defining a first diamond tip that corresponds to a first groove to be created in the microreplication tool; and

15 a second tool shank mounted in the mounting structure on a second side of the mounting structure opposite the first side, the second tool shank defining a second diamond tip that corresponds to a second groove to be created in the work piece, wherein the first and second tool shanks are positioned in the mounting structure such that a cutting location of the first diamond tip is a defined distance from a cutting location of the second diamond tip, the defined distance being accurate to a tolerance of less than approximately 10 microns.

20 29. The flycutting tool assembly of claim 28, where the defined distance is less than a width associated with either of the first and second tool shanks.

30. The flycutting tool assembly of claim 28, wherein the defined distance corresponds to an integer number of pitch spacings, wherein a pitch spacing defines a distance between two adjacent features to be created in a work piece.

25

31. The flycutting tool assembly of claim 30, wherein the first and second tool shanks are positioned in the mounting structure such that the cutting location of the first diamond tip is approximately one pitch spacing from the cutting location of the second diamond tip.

301
Our Ref.: 44273PC0
December 14, 2004

32. The flycutting tool assembly of claim 28, wherein a shape of the first diamond tip is substantially different from a shape of the second diamond tip.

33. The flycutting tool assembly of claim 28, wherein the defined distance is accurate to 5 within a tolerance of less than approximately 1 micron.

34. A method comprising:
defining a pitch spacing for a microreplication tool;
creating a cutting tool assembly by positioning first and second tool shanks in a 10 mounting structure such that a cutting location of a first diamond tip associated with the first tool shank is a defined distance from a cutting location of a second diamond tip associated with the second tool shank, the defined distance corresponding to an integer number of pitch spacings, wherein the defined distance is accurate to within a tolerance of less than approximately 10 microns.

15 35. The method of claim 34, further comprising creating a microreplication tool using the cutting tool assembly.

20 36. The method of claim 34, further comprising creating microreplicated structures using the microreplication tool.

25 37. The method of claim 34, wherein positioning first and second tool shanks includes adjusting a position of the tool shanks relative to one another under a tooling microscope in response to positioning feedback.

38. The method of claim 37, wherein the defined distance is accurate to within a tolerance of less than approximately 1 micron.

*<for creating a cutting tool assembly to be used in manufacturing
a microreplication tool>*

1/14

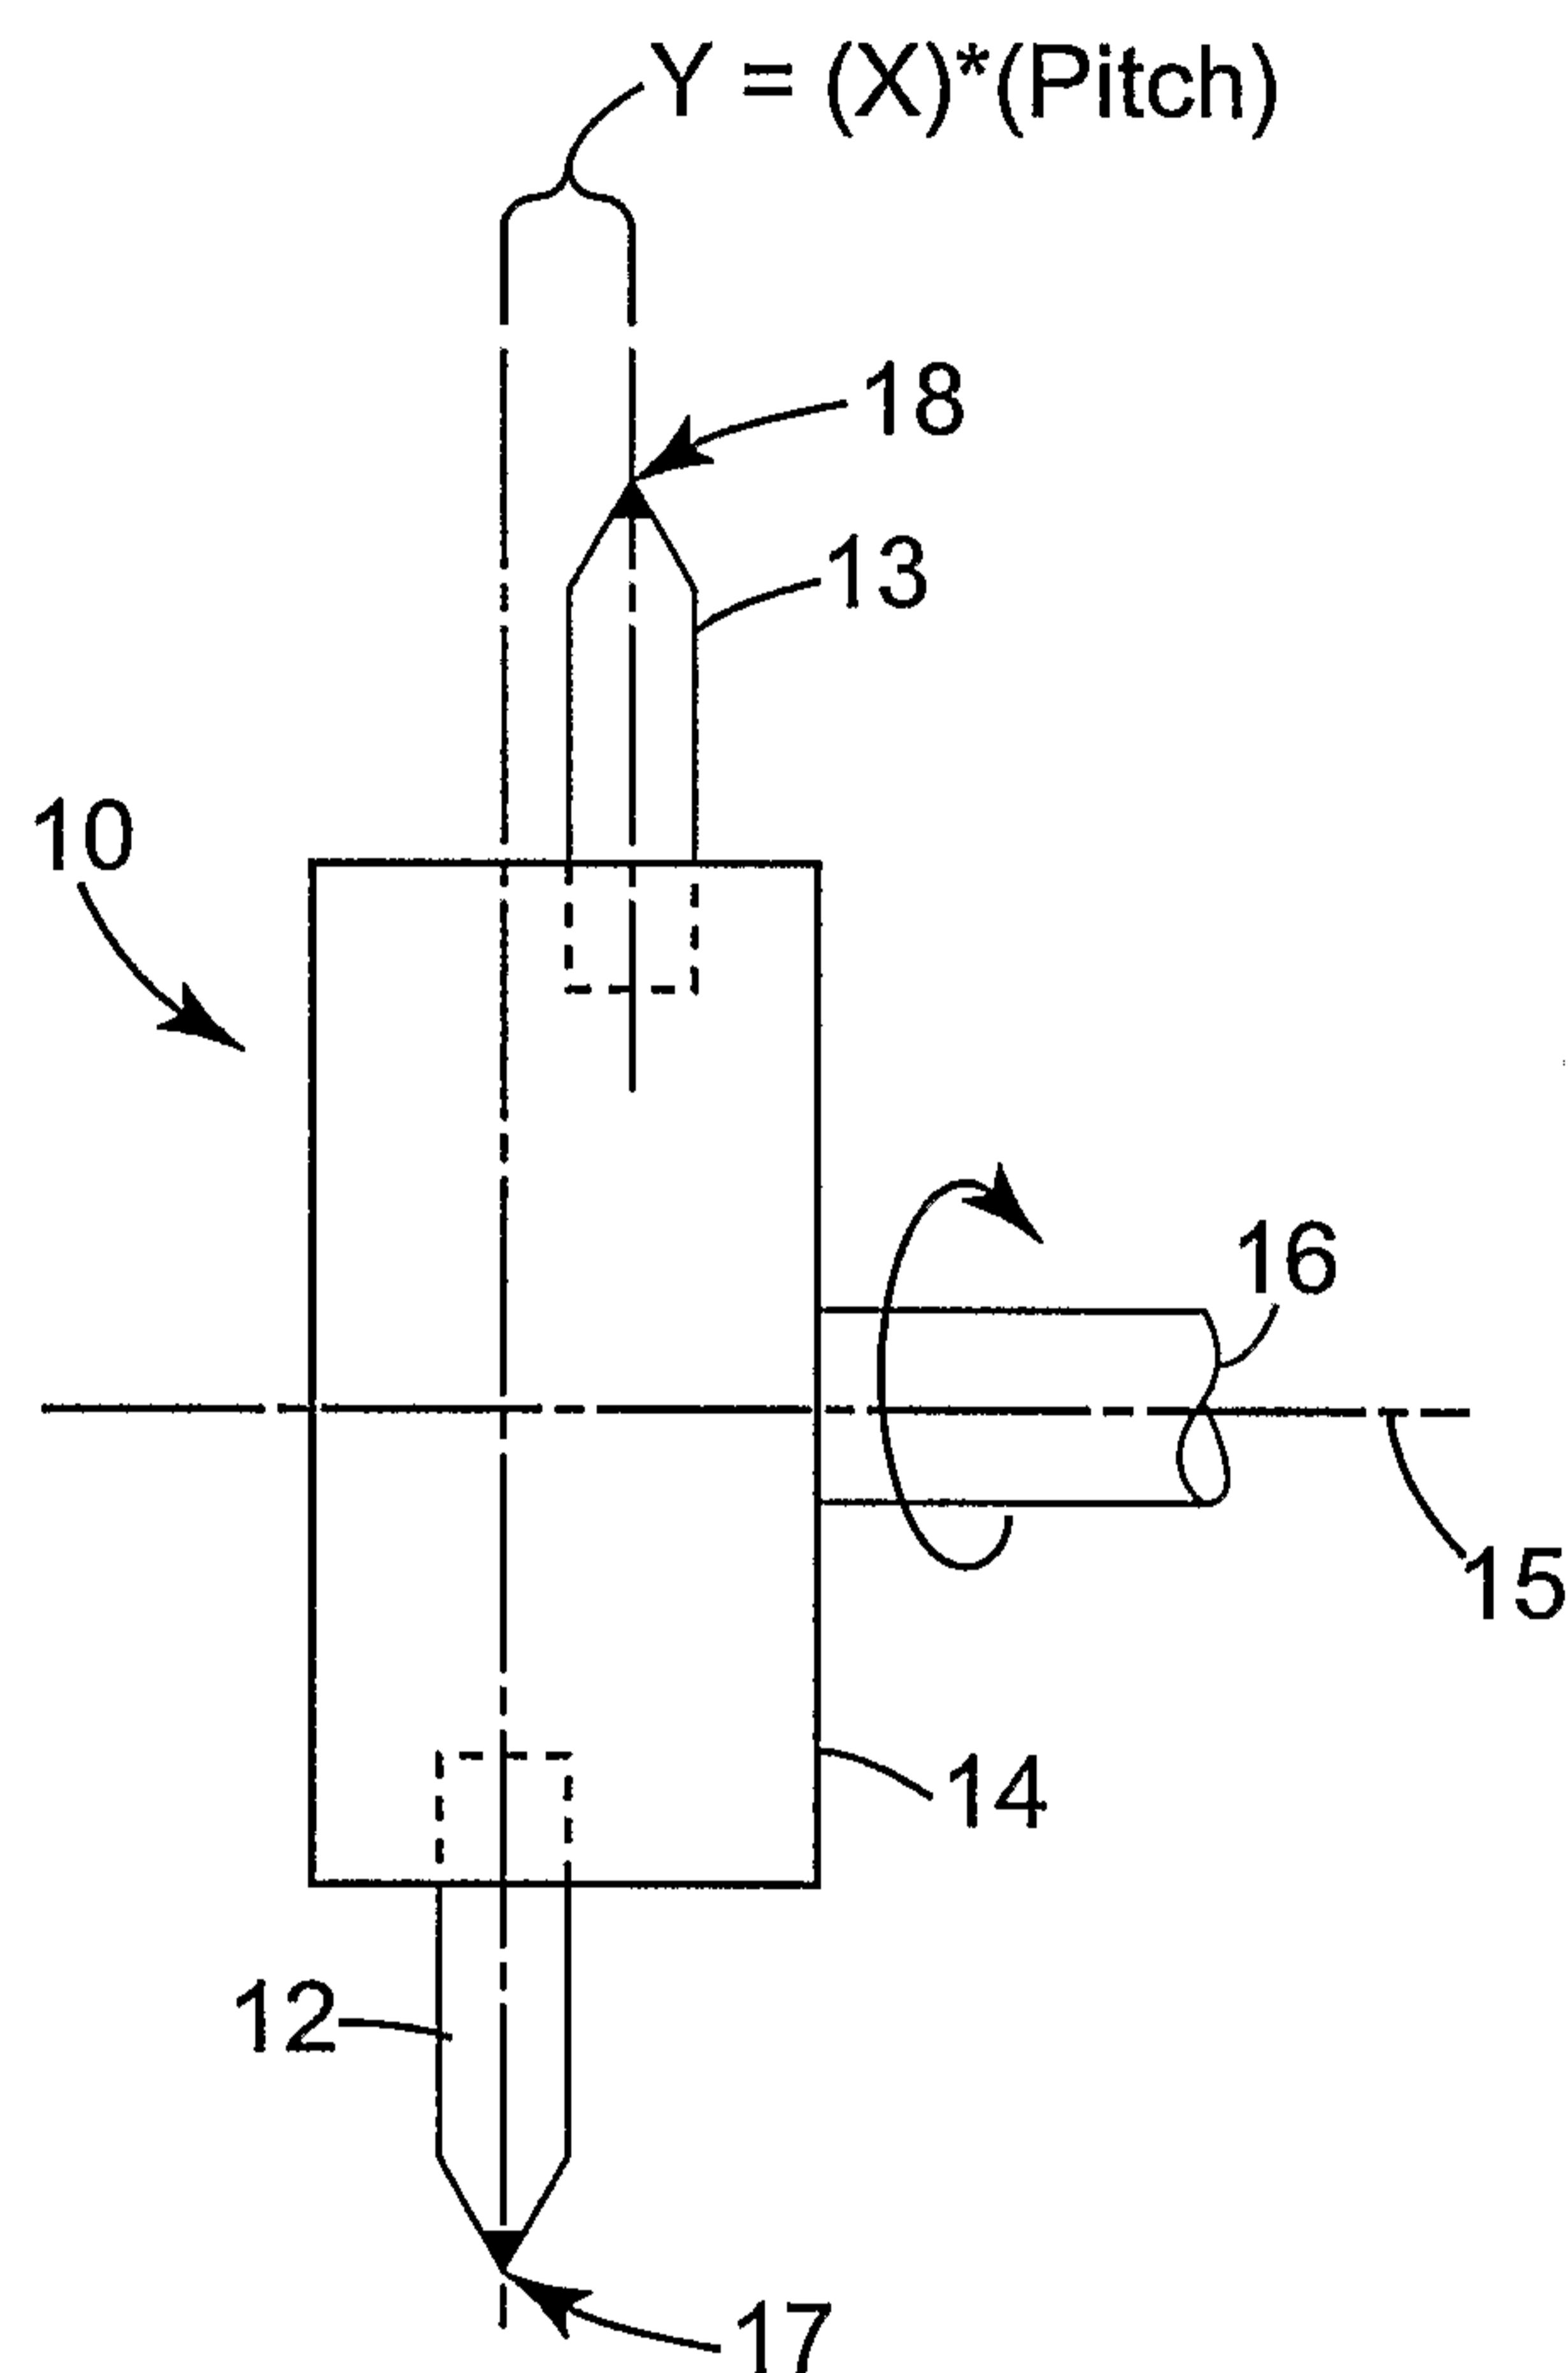


Fig. 1

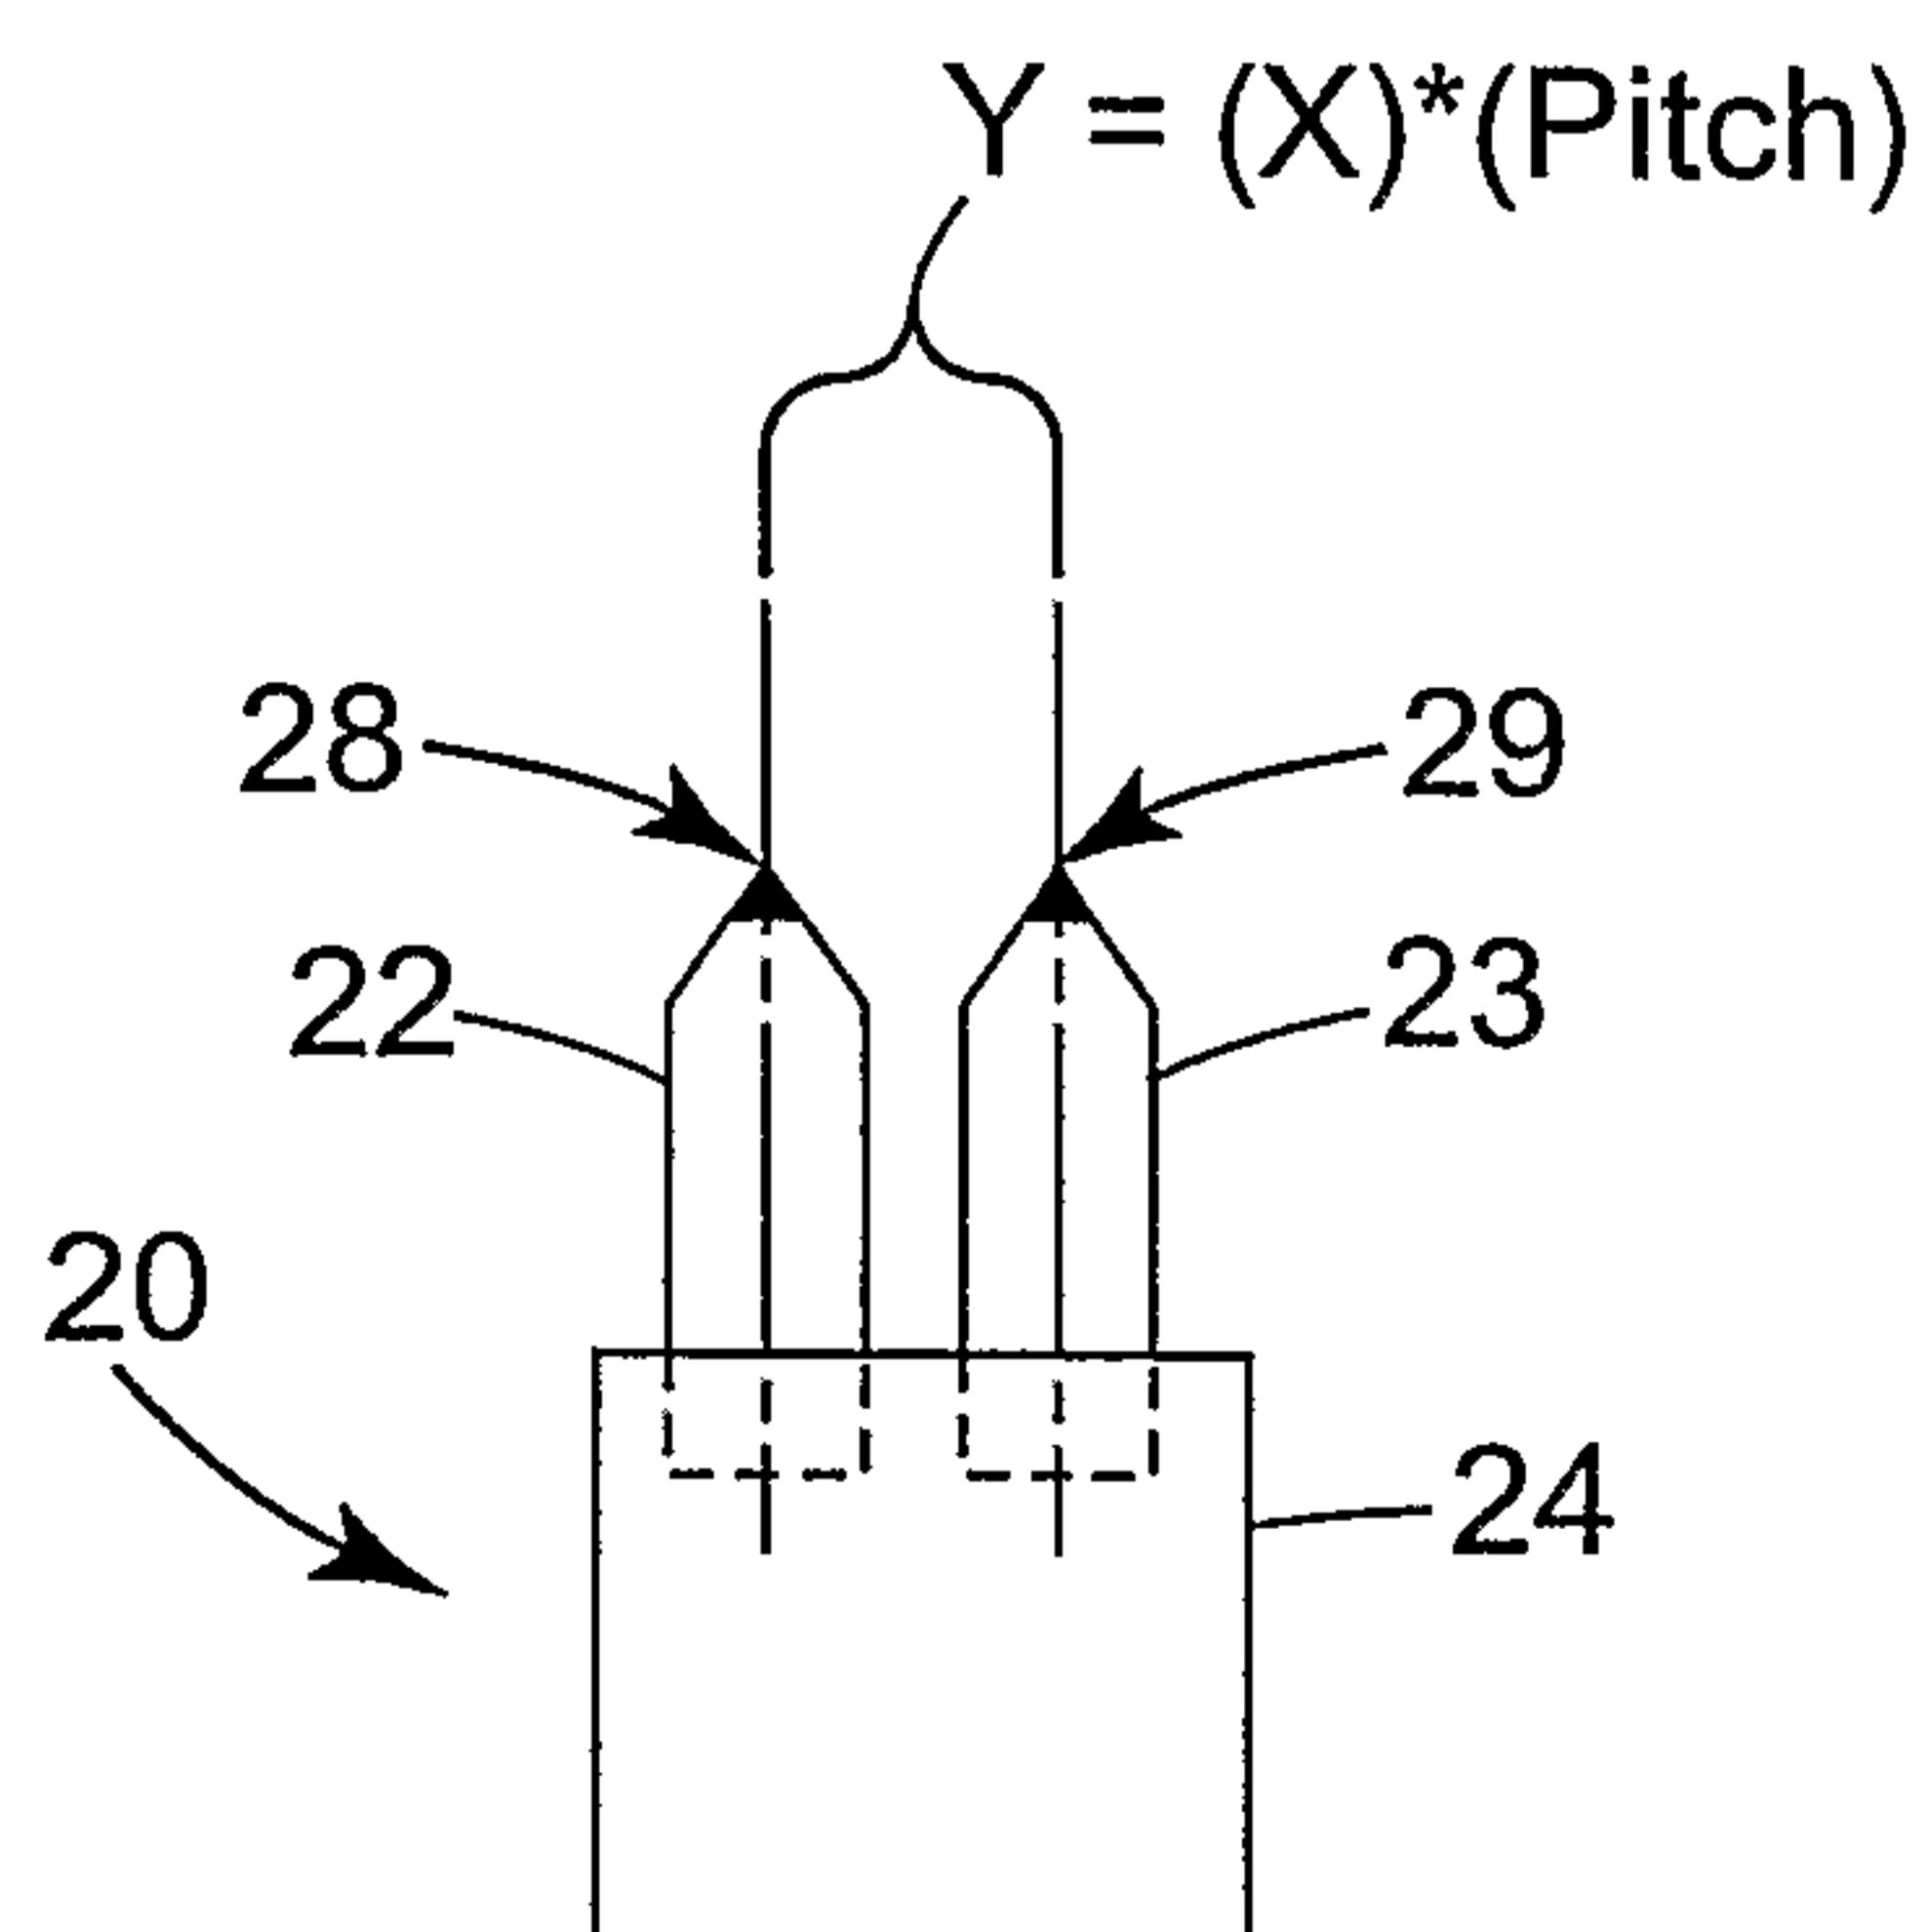


Fig. 2

2/14

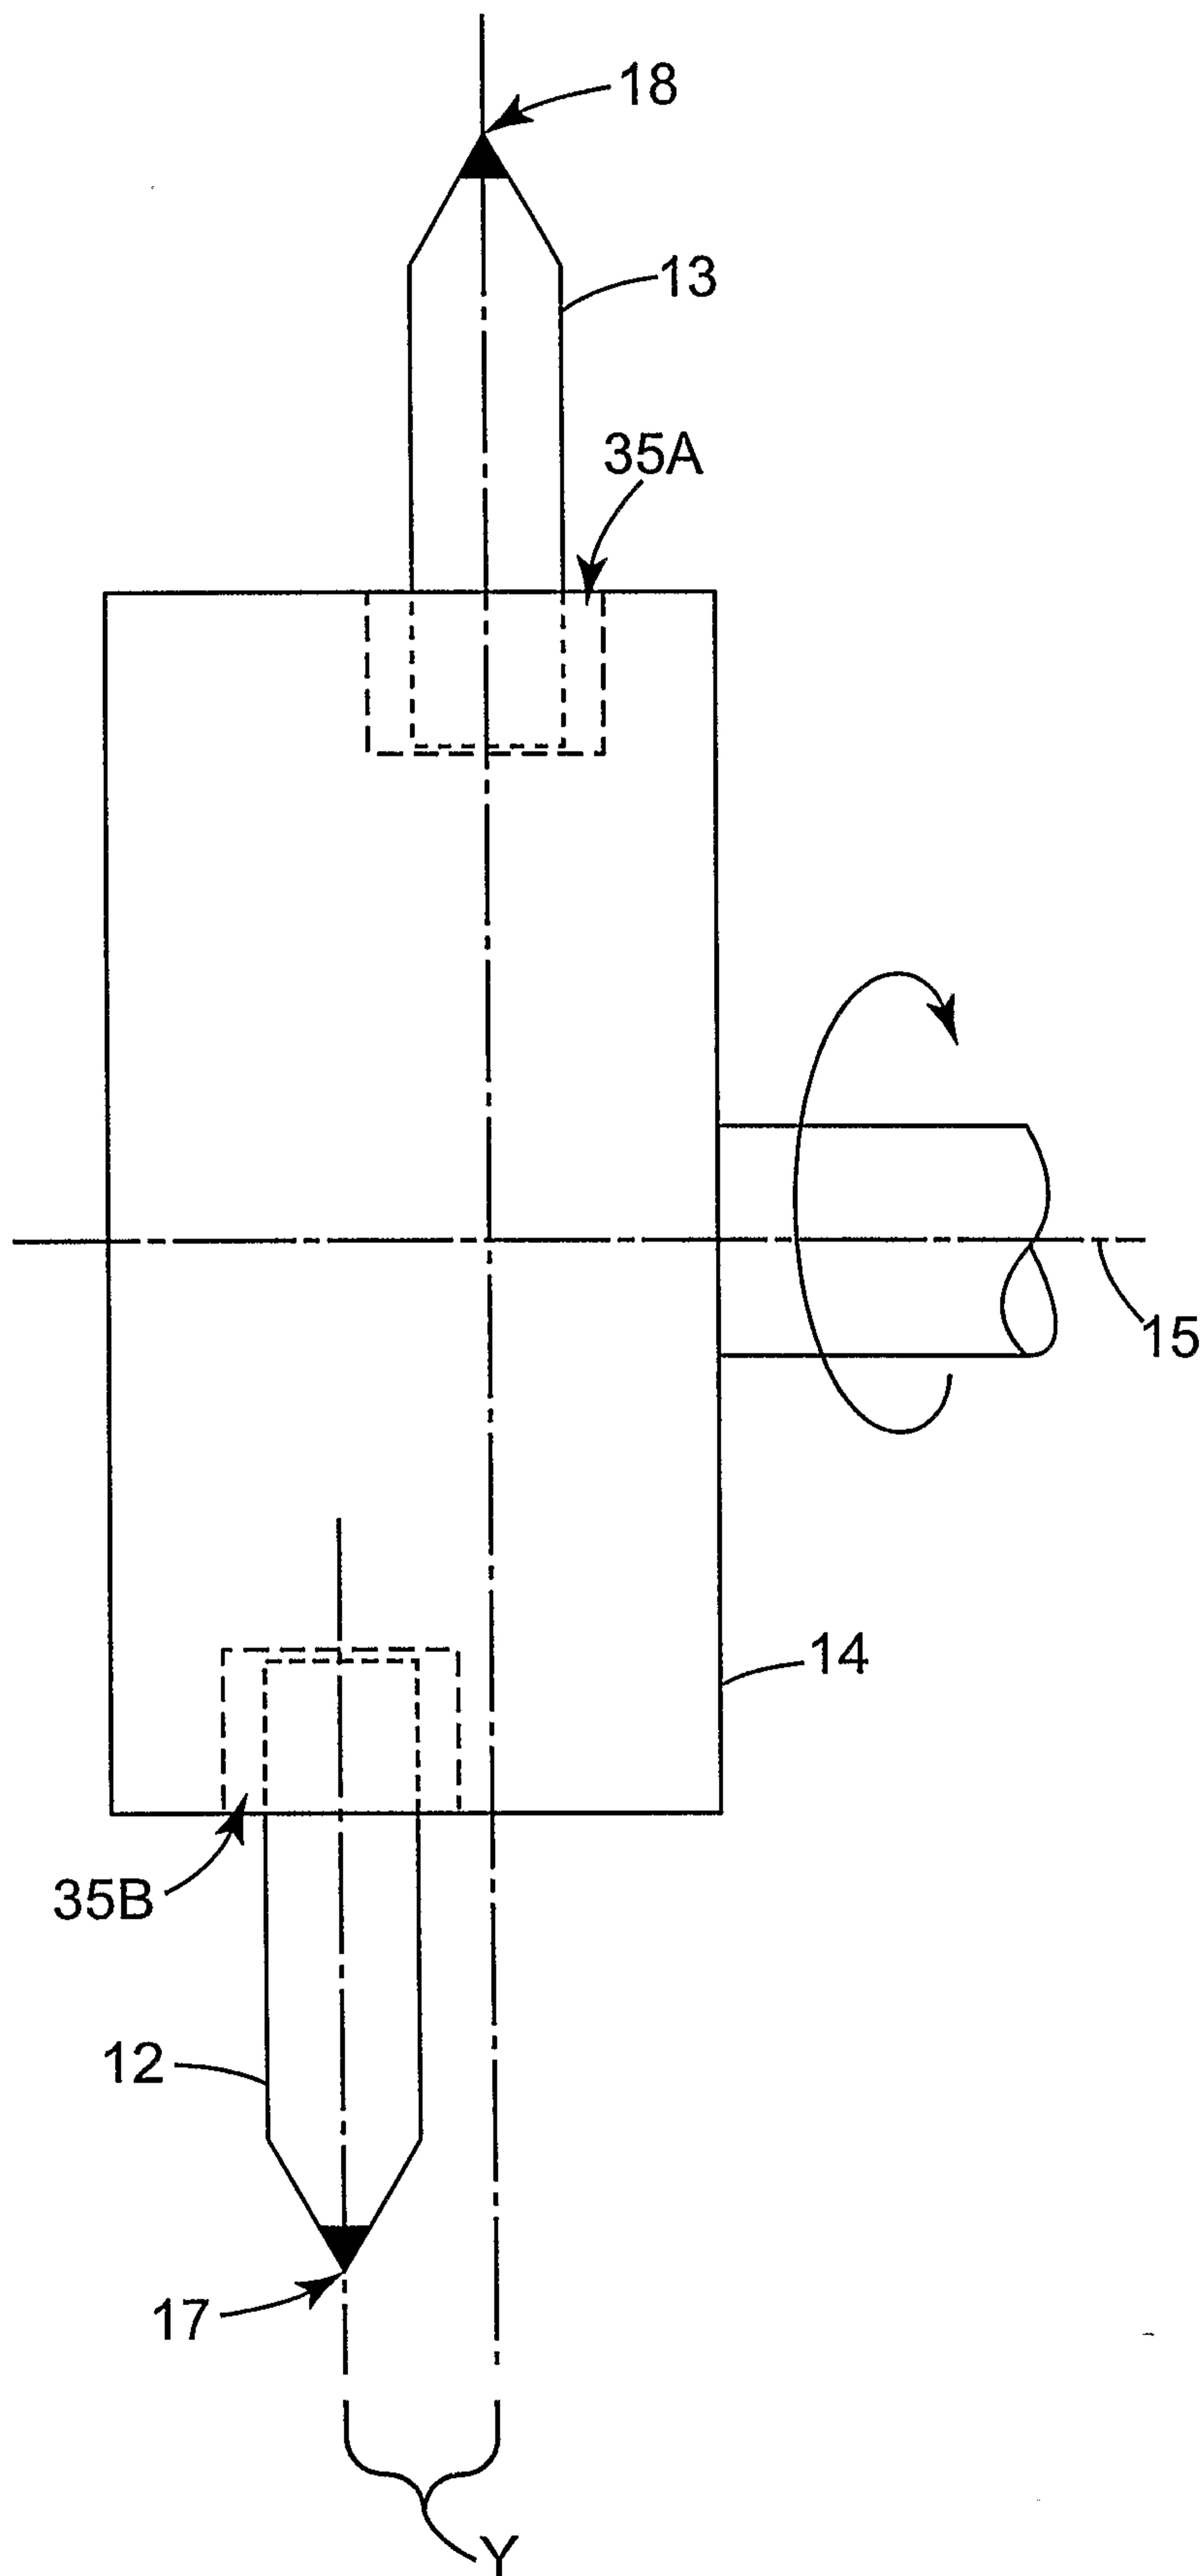


Fig. 3

3/14

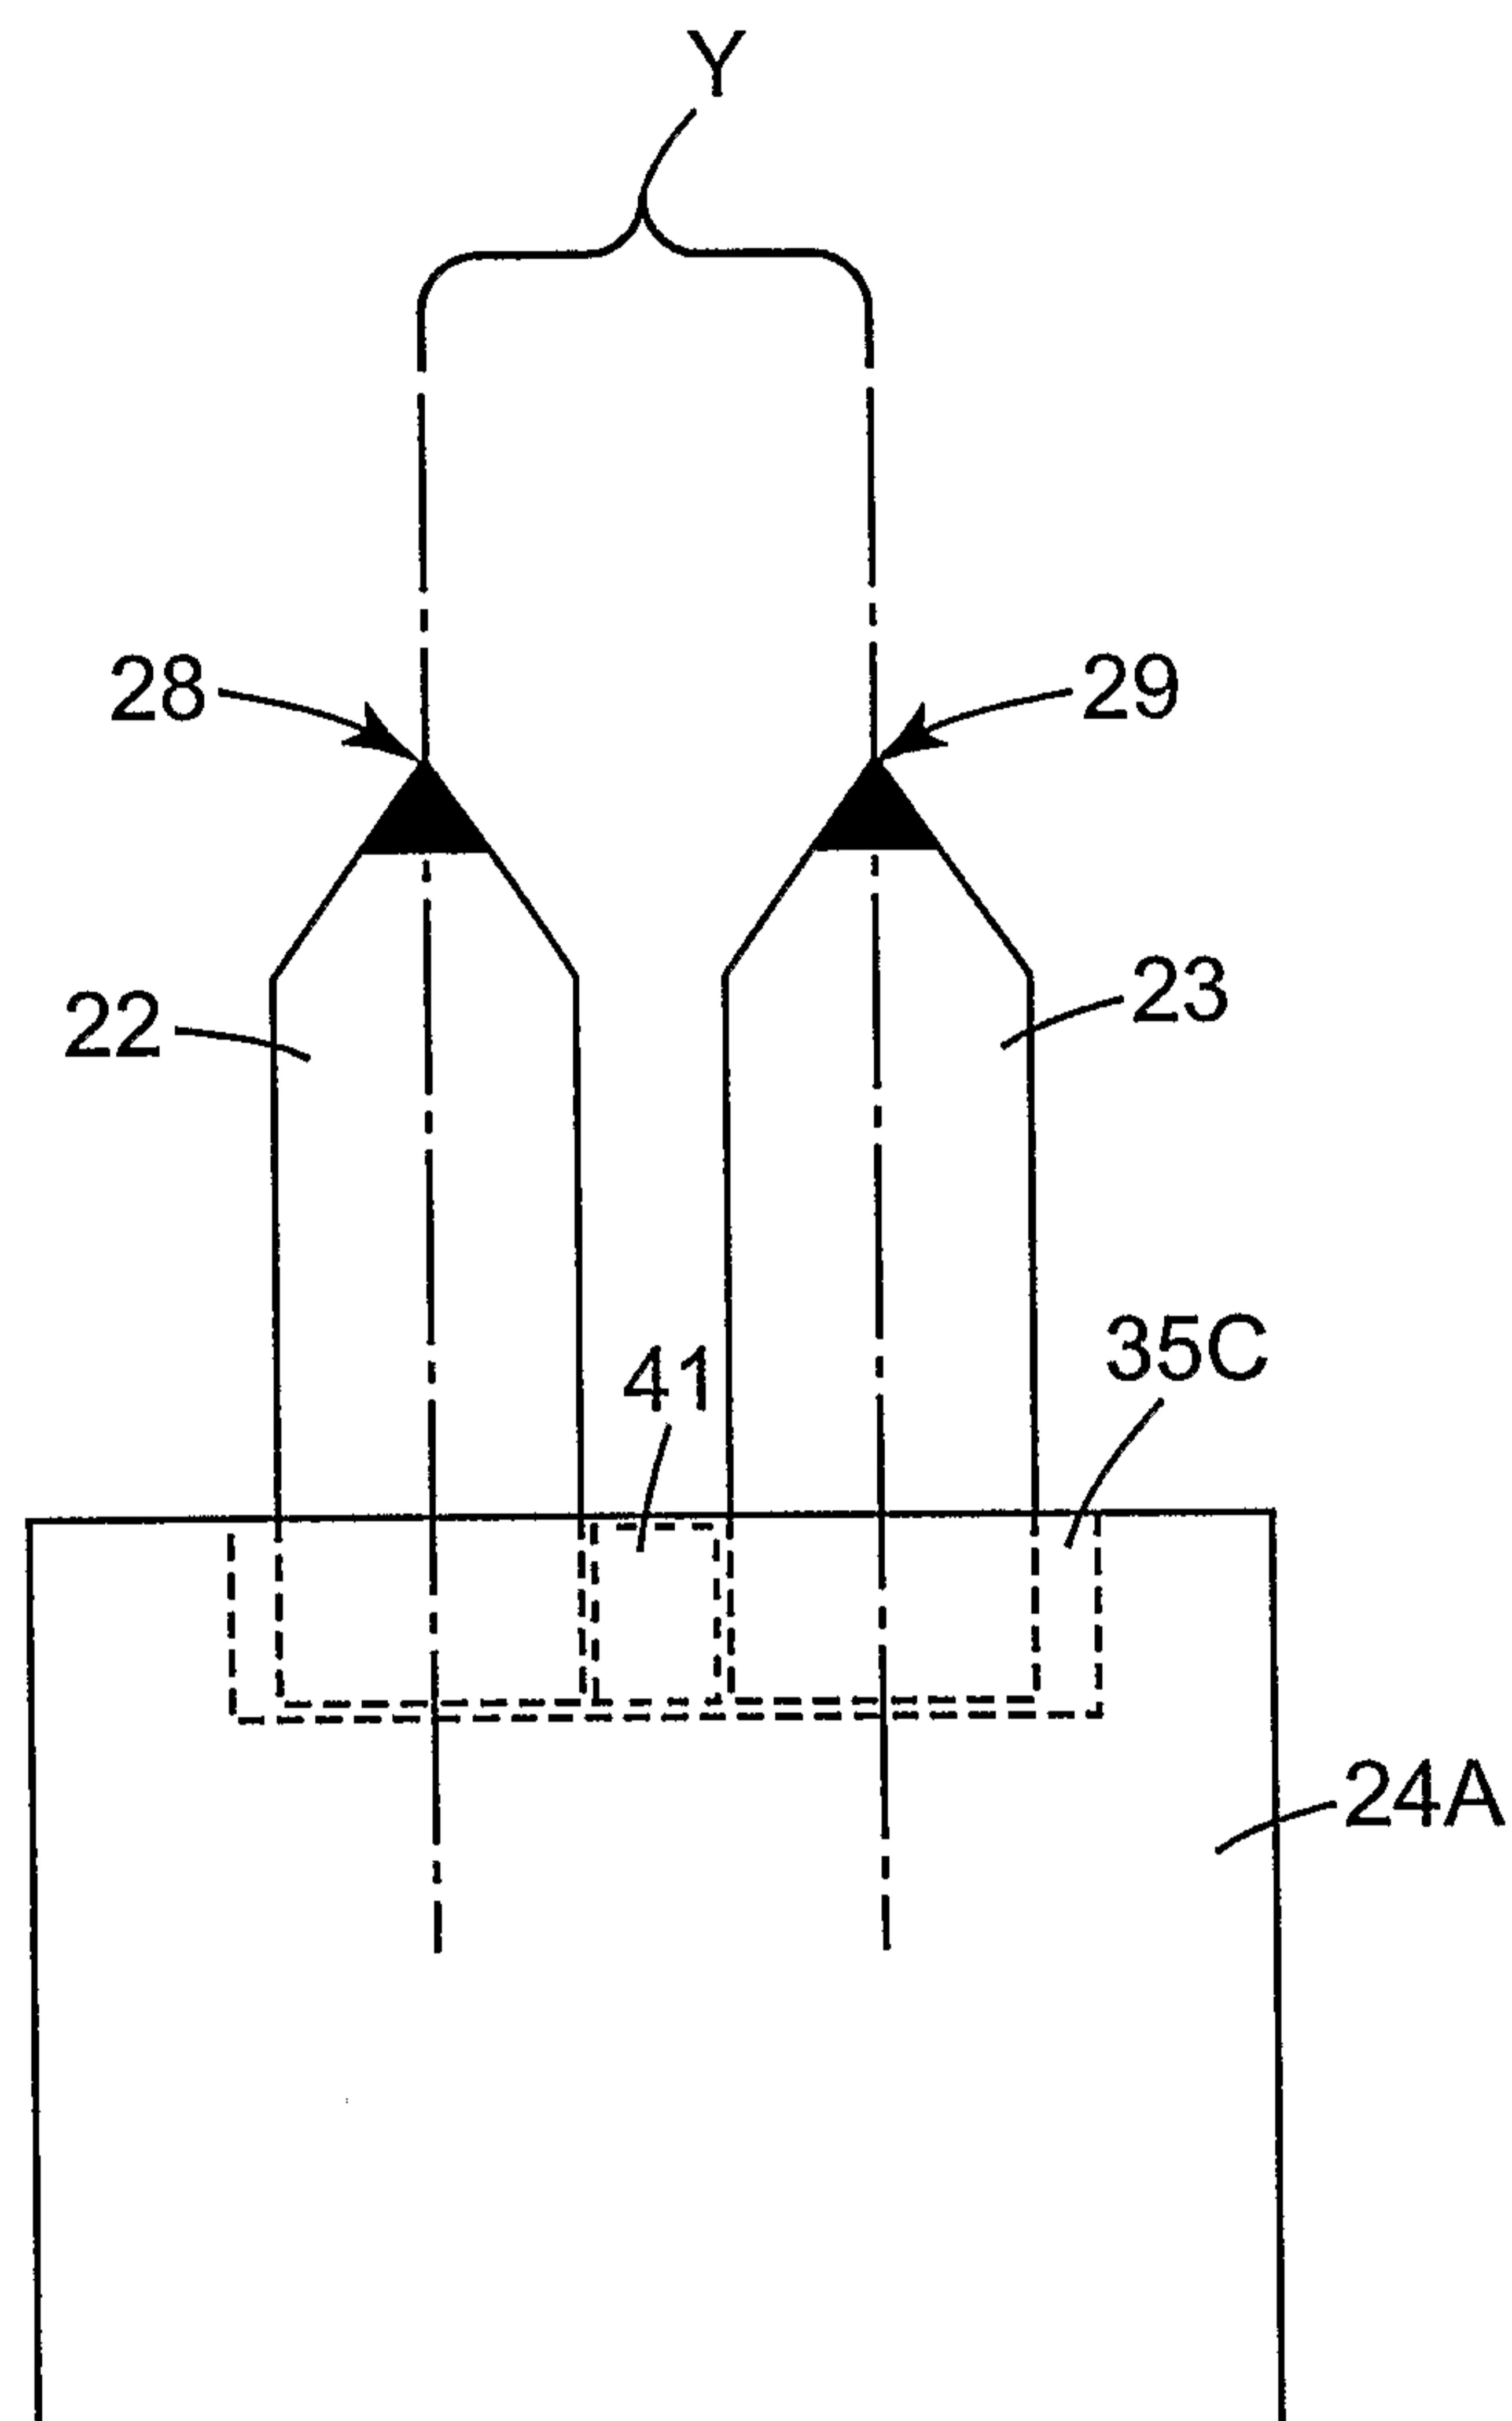


Fig. 4

4/14

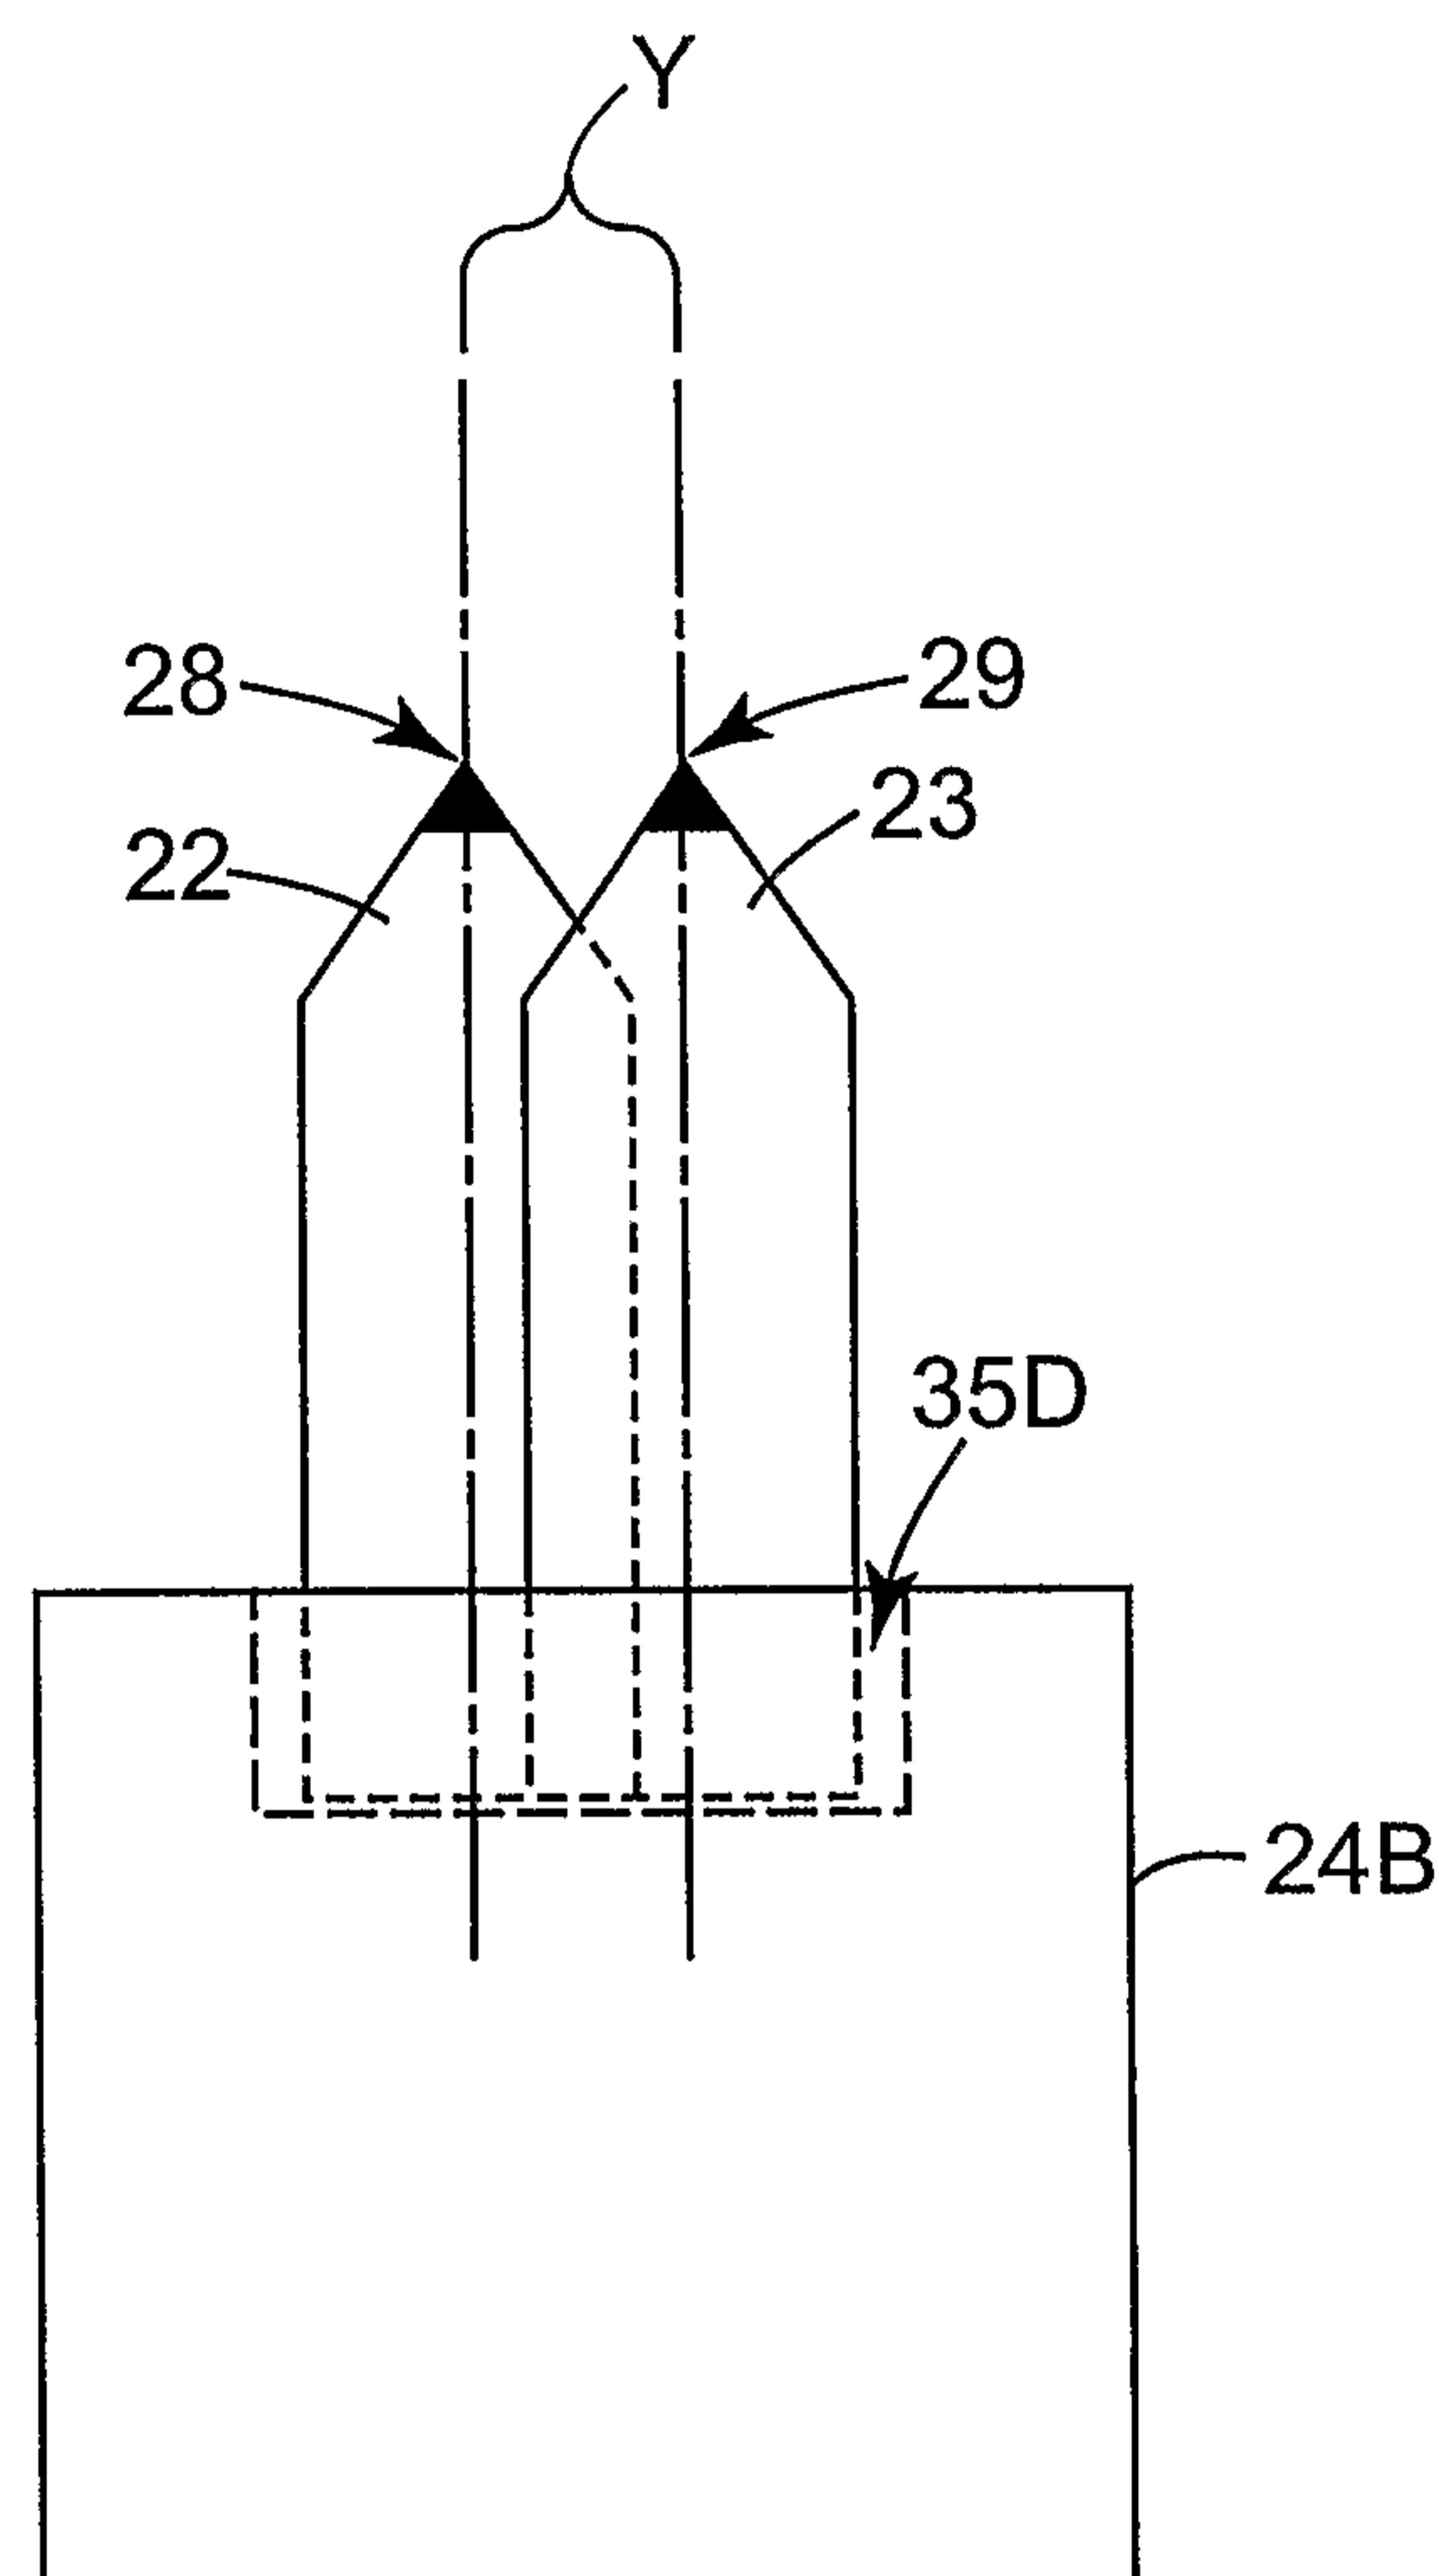


Fig. 5

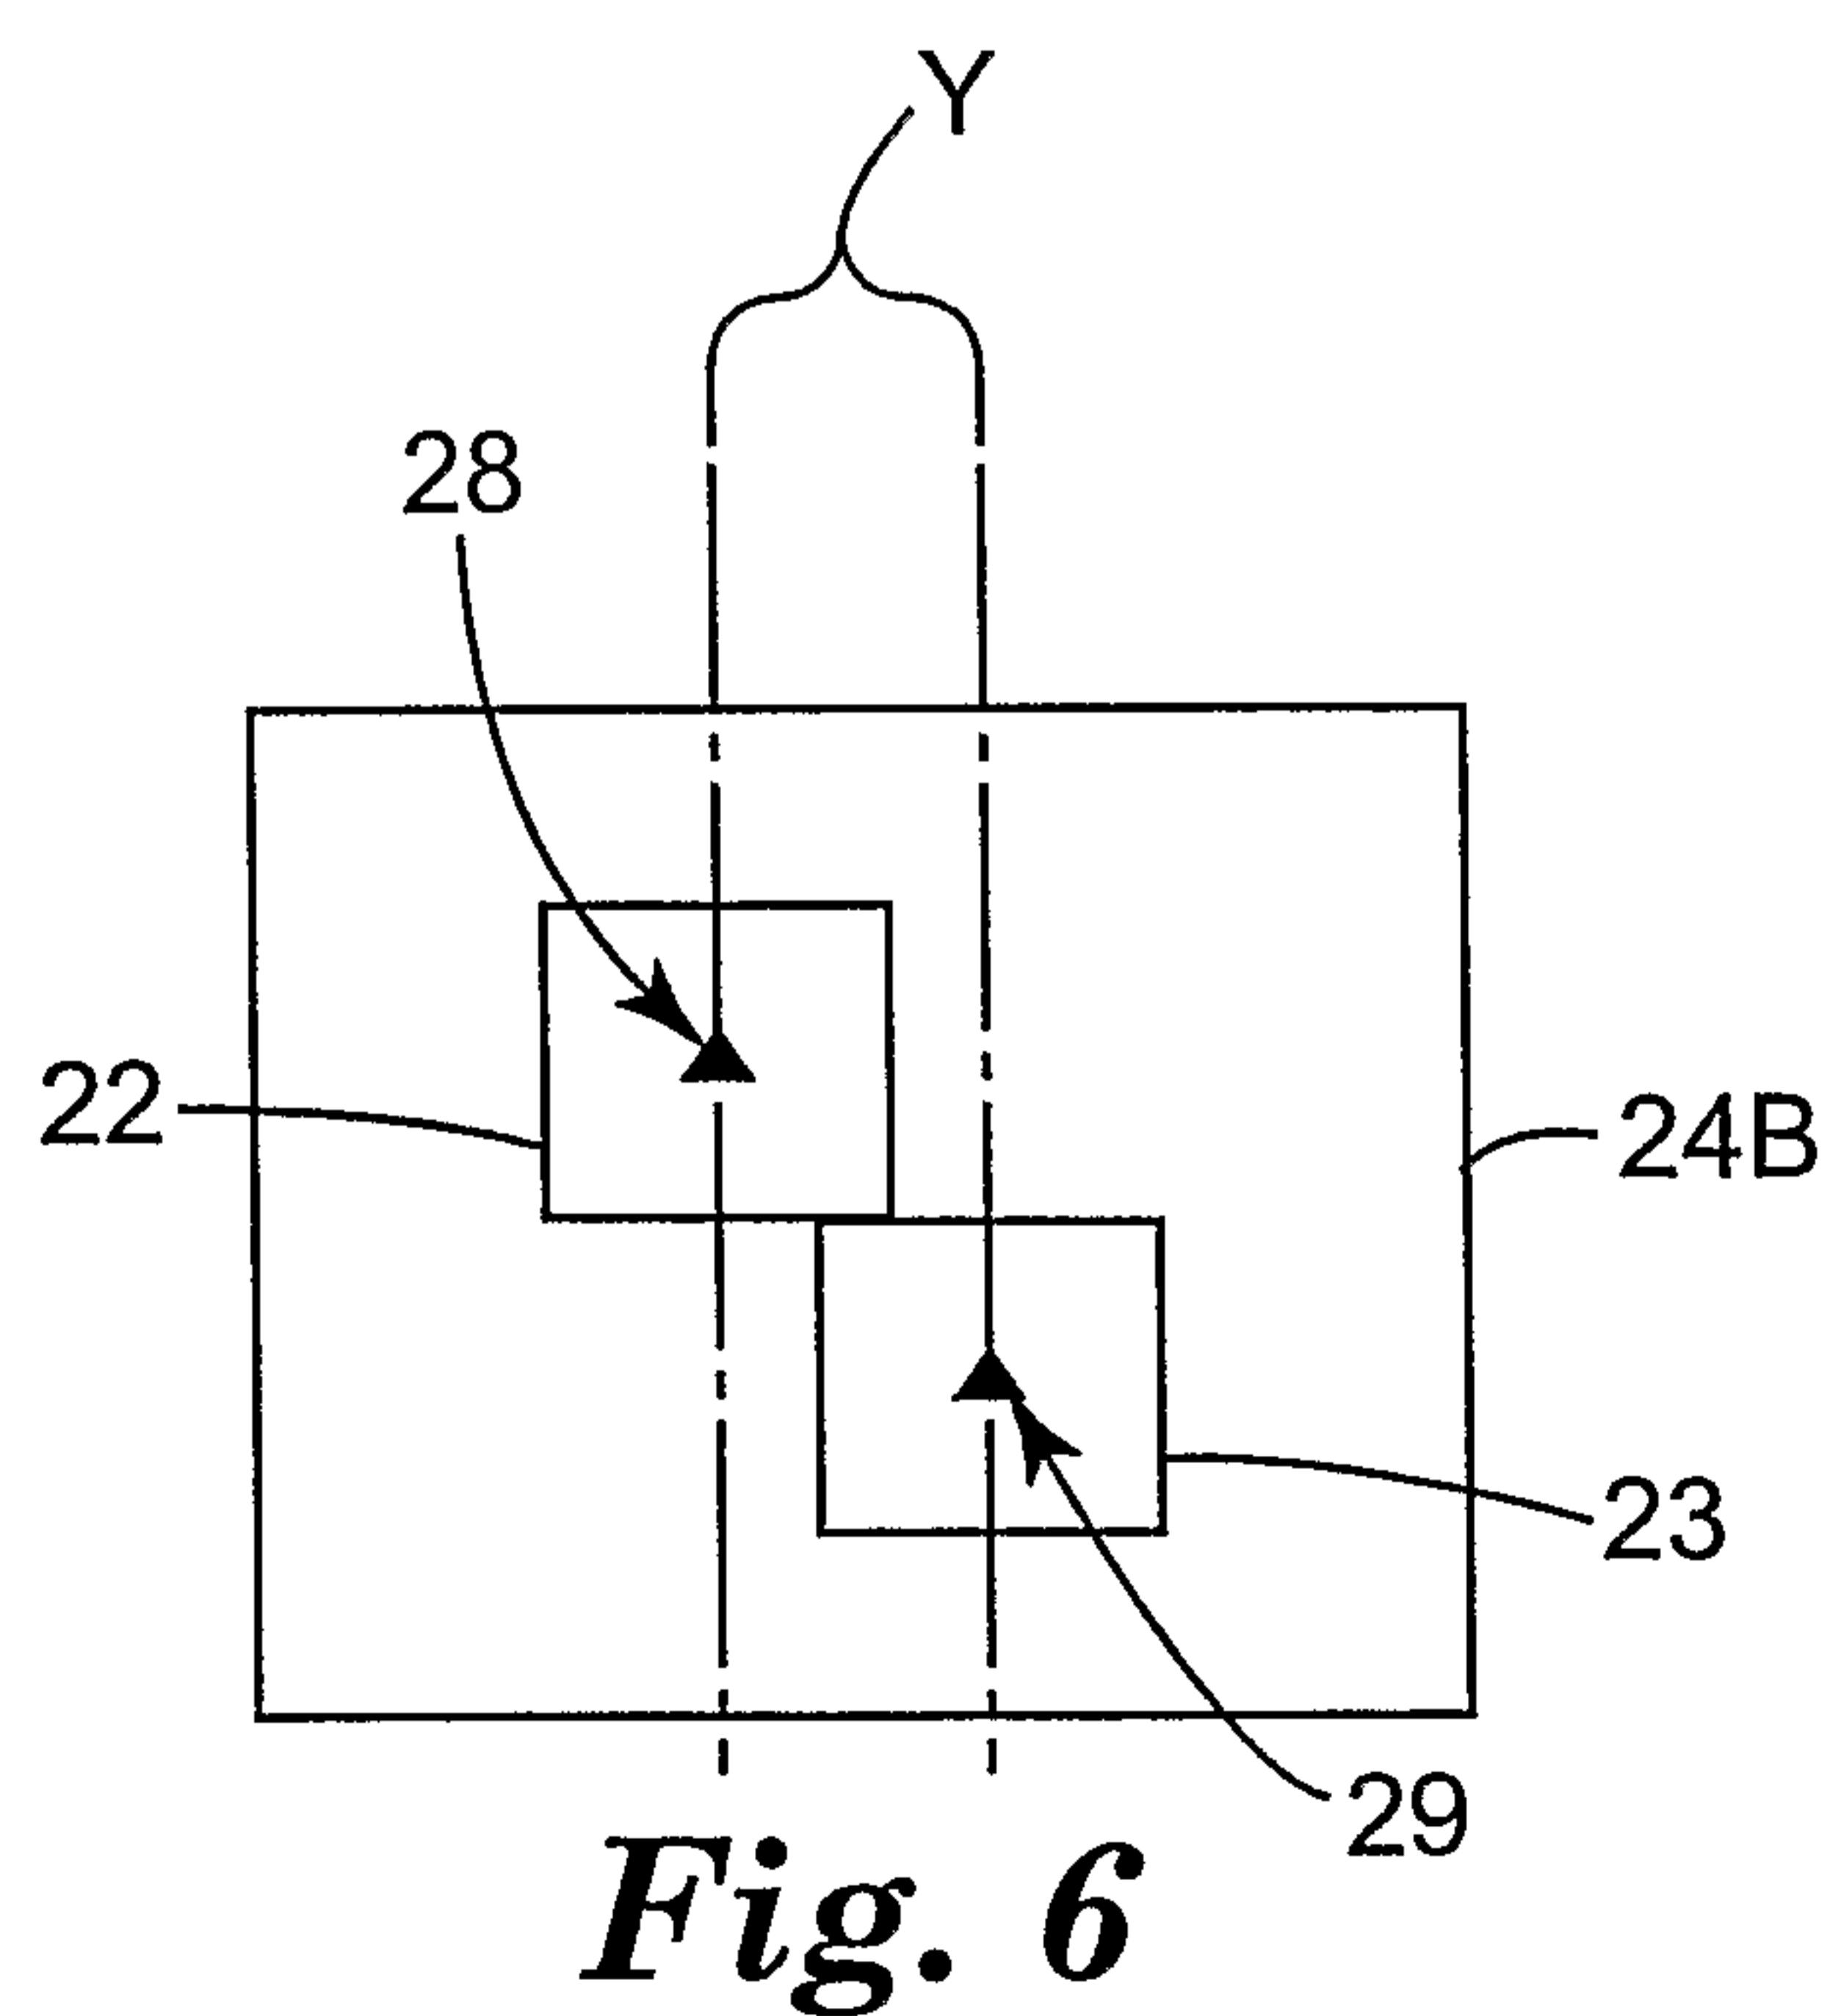


Fig. 6

5/14

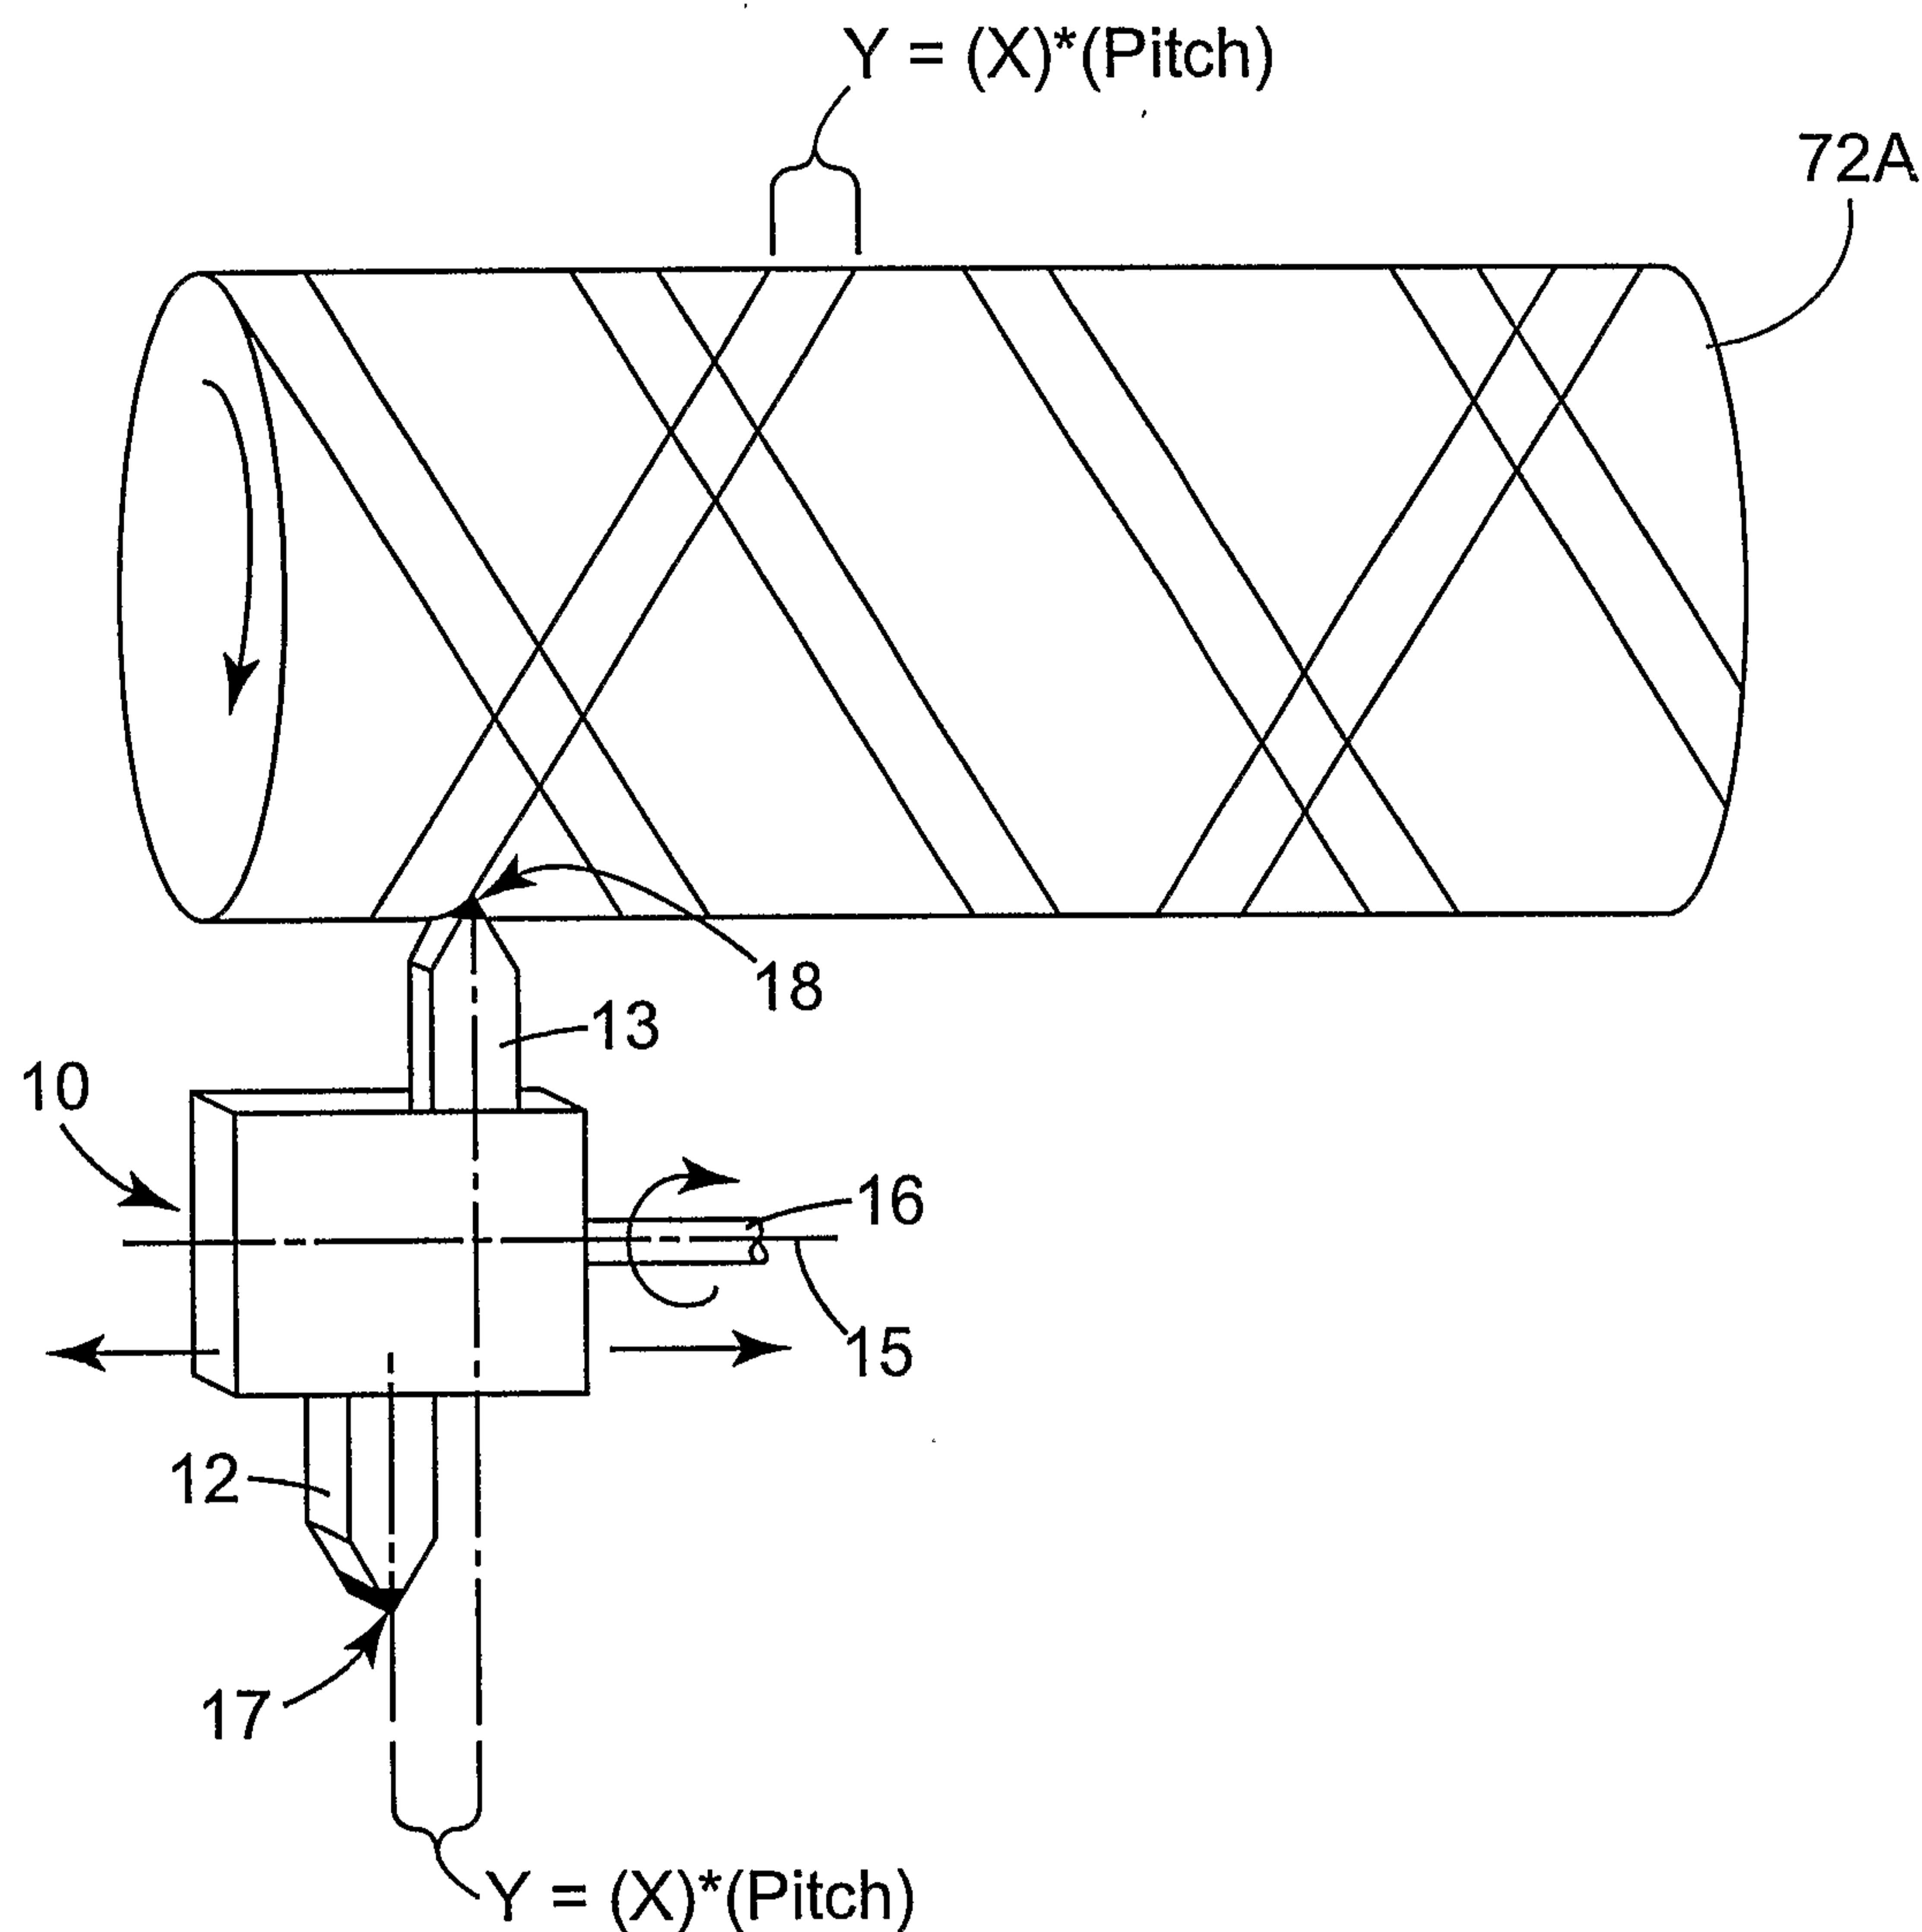


Fig. 7

6/14

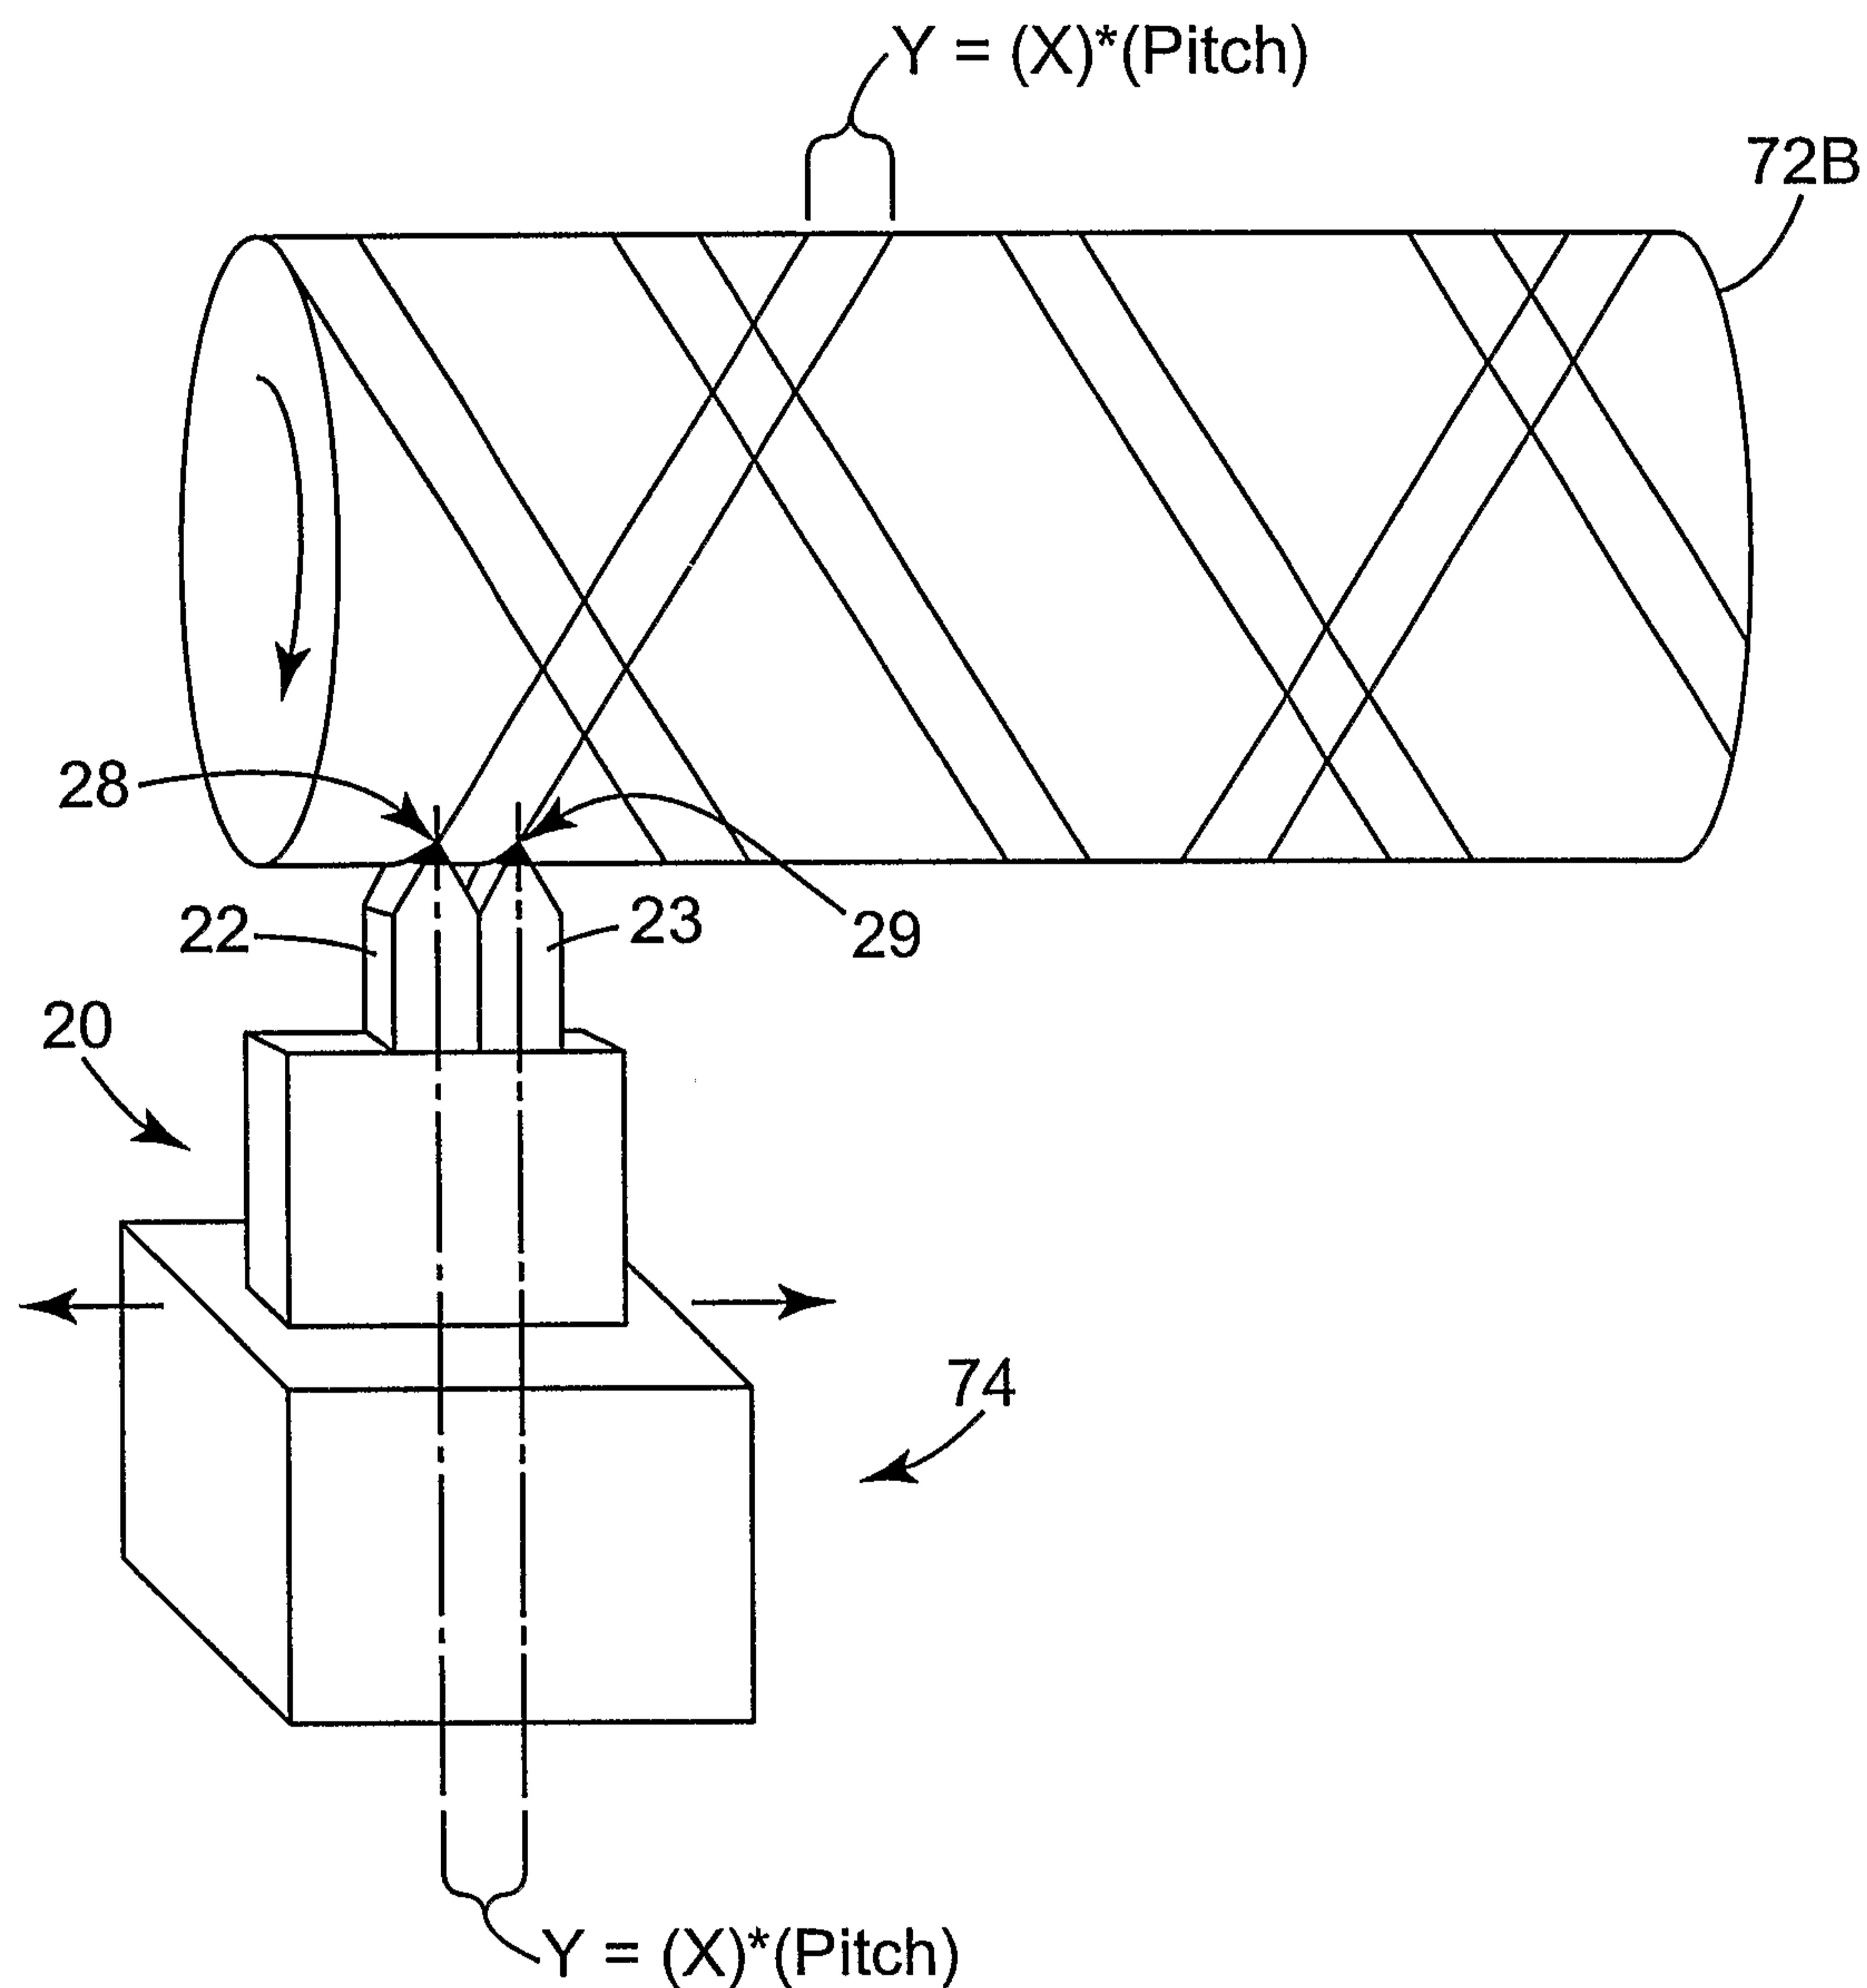


Fig. 8

7/14

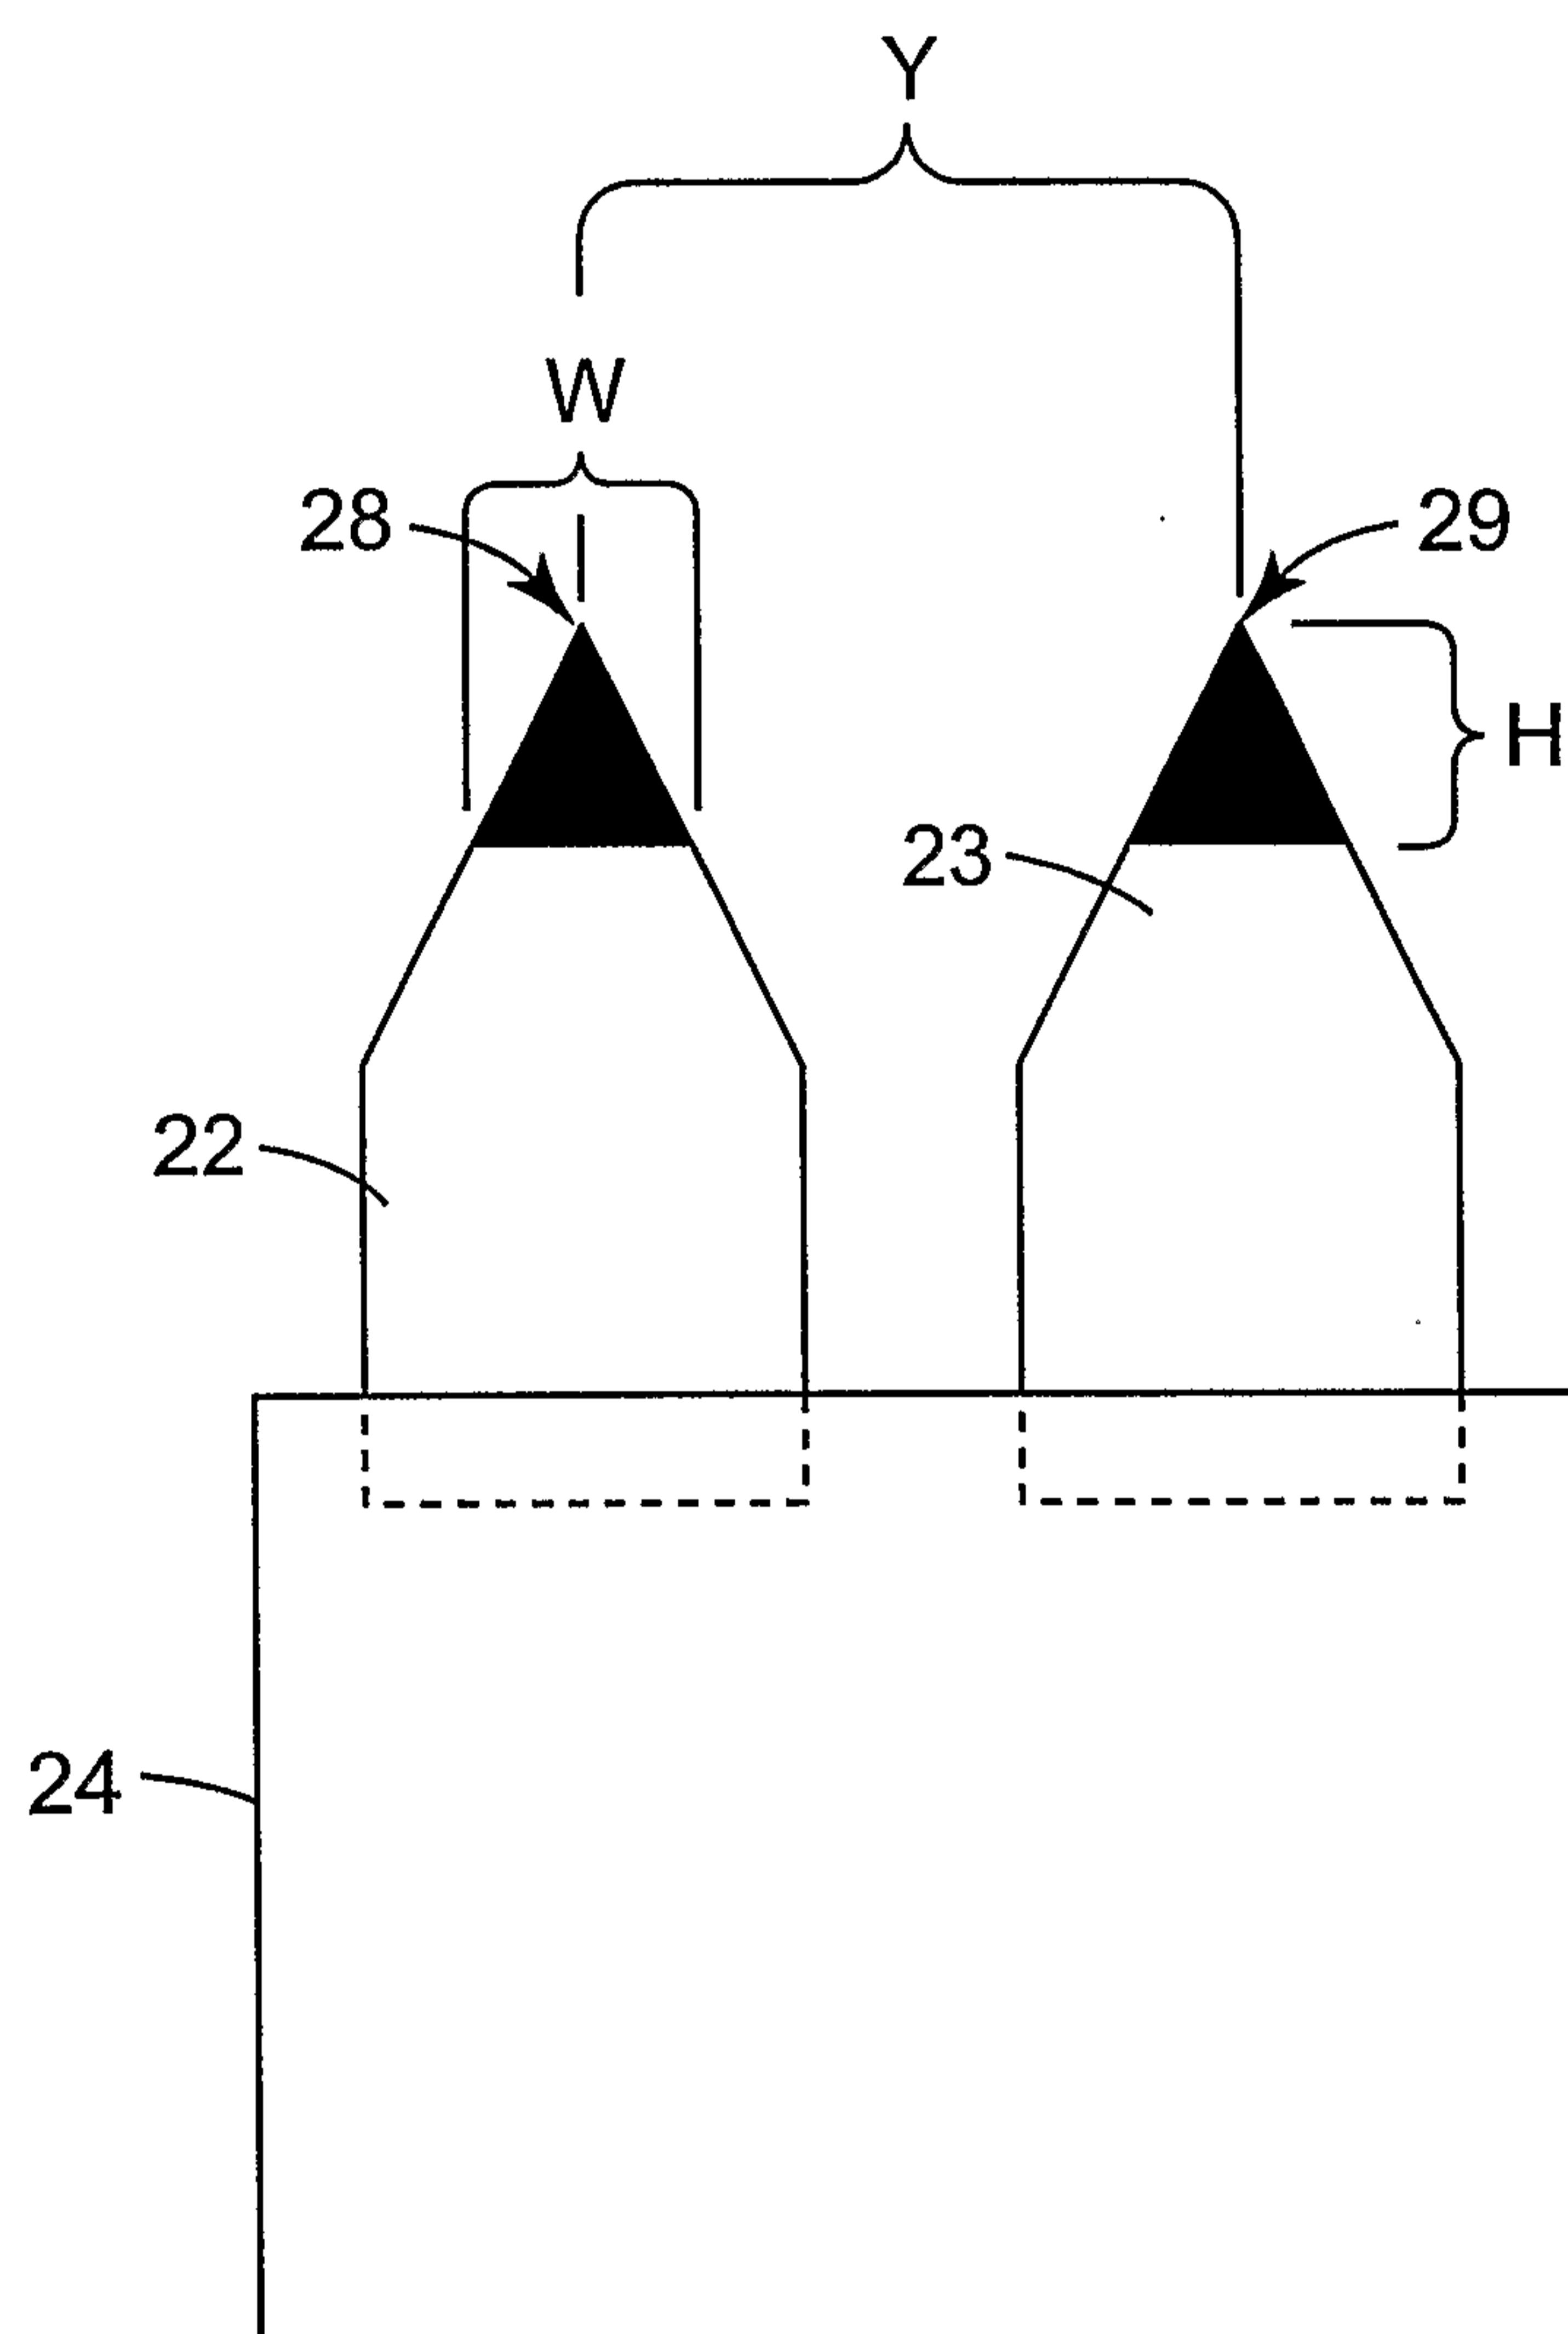


Fig. 9

8/14

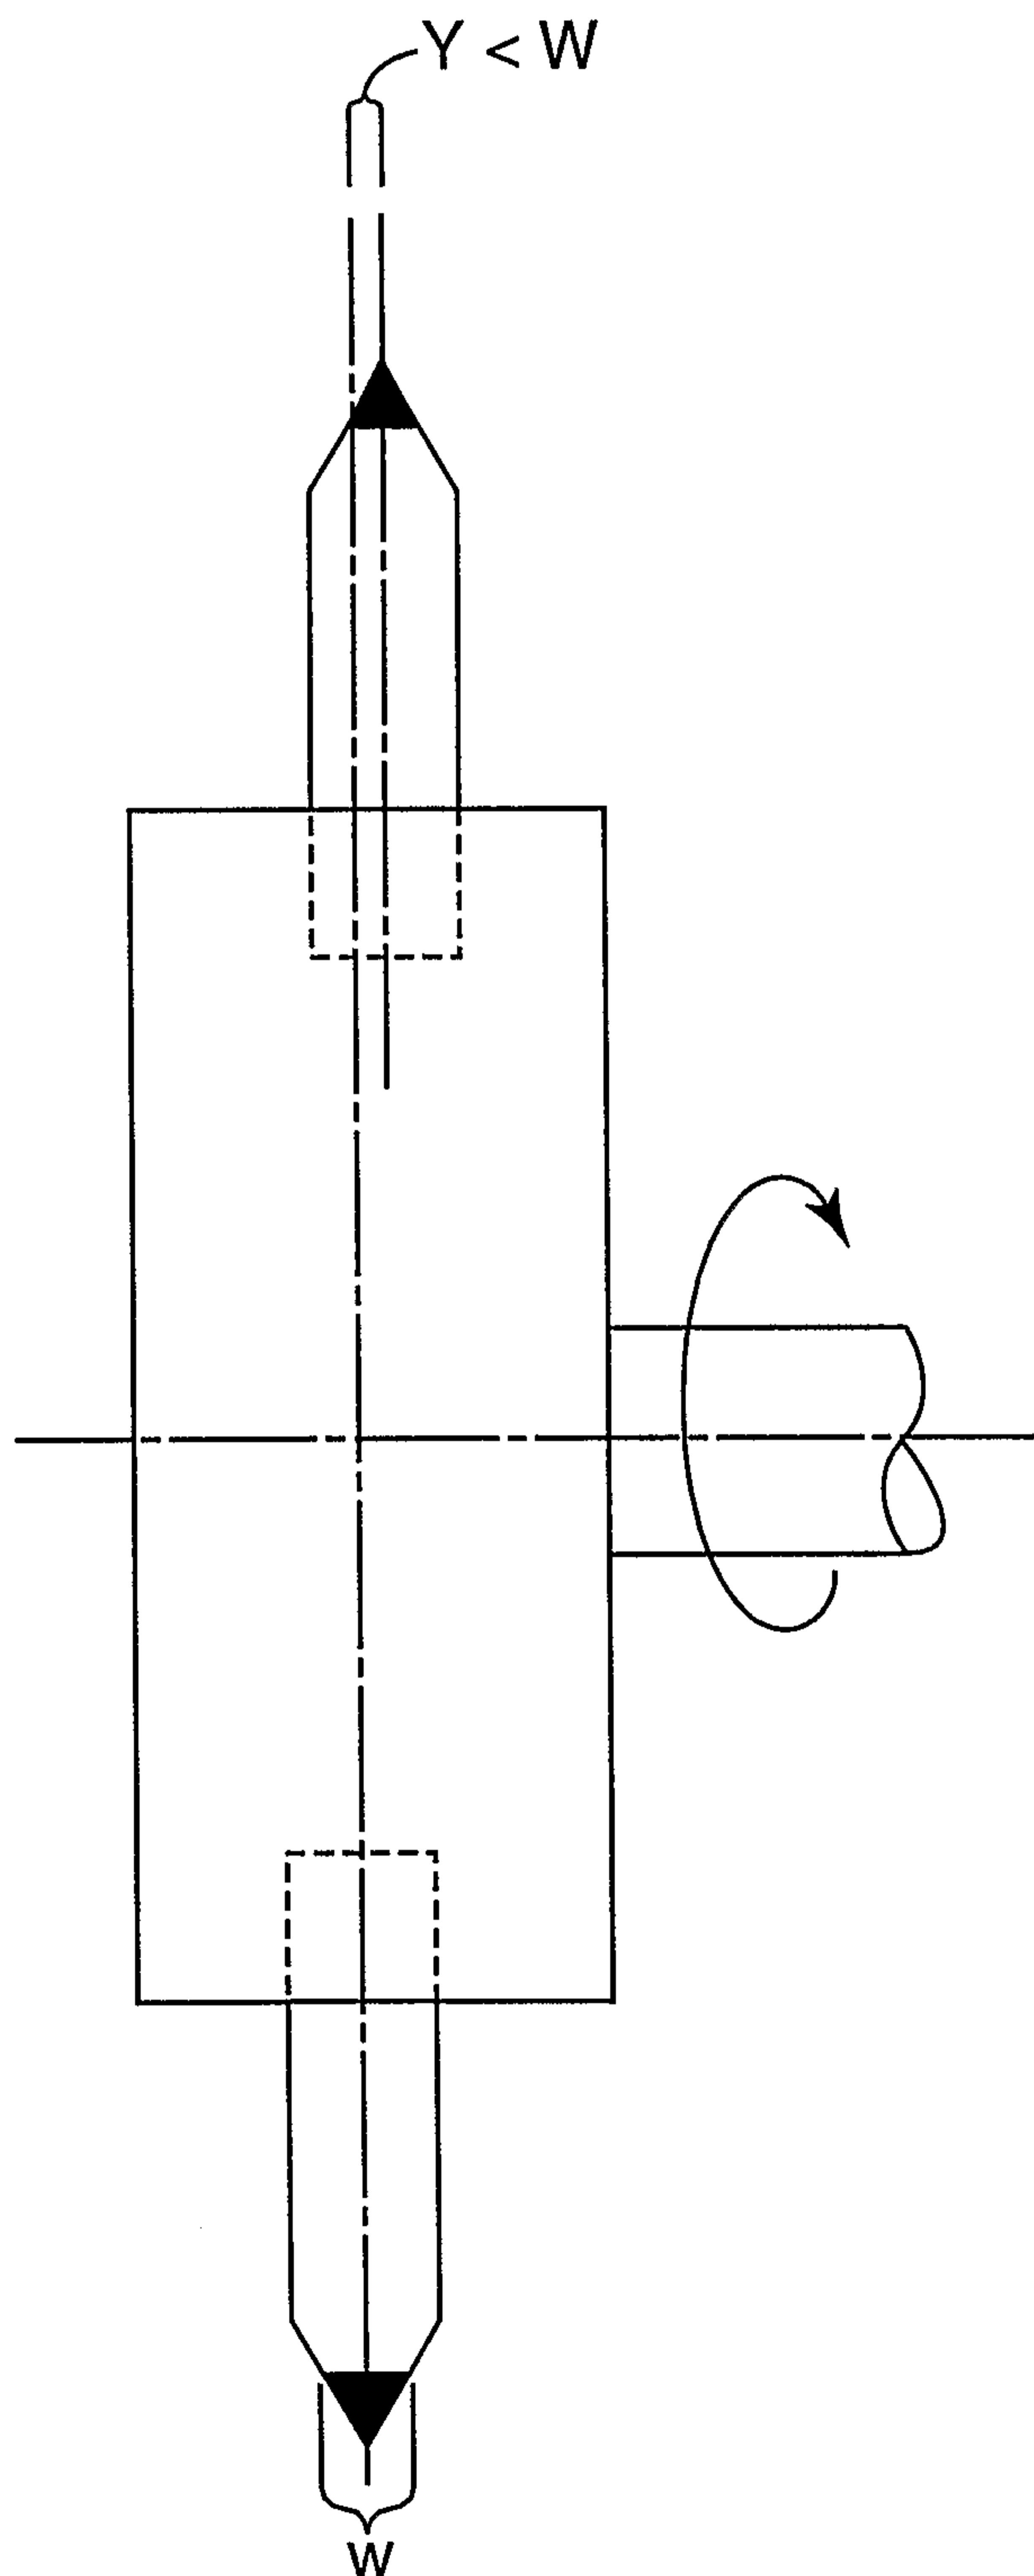


Fig. 10

9/14

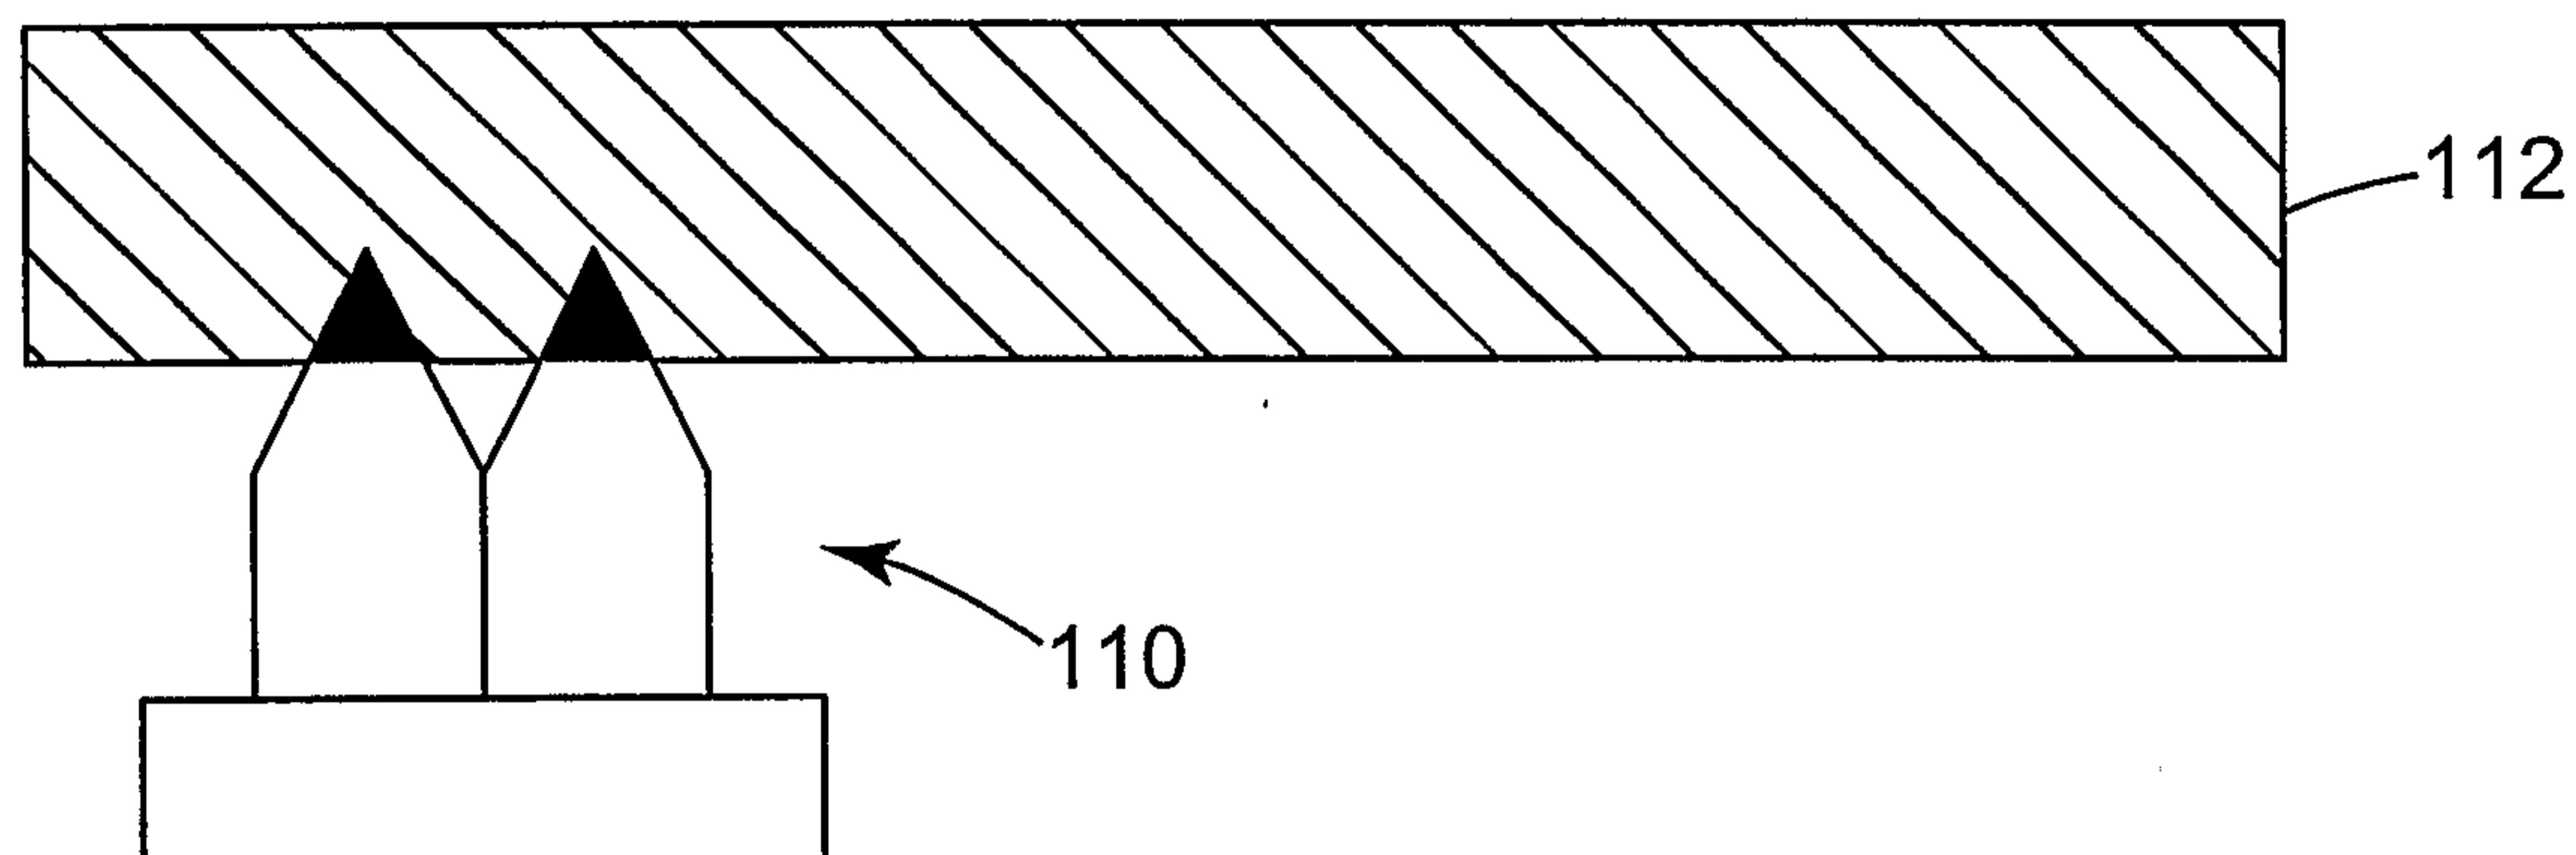


Fig. 11A

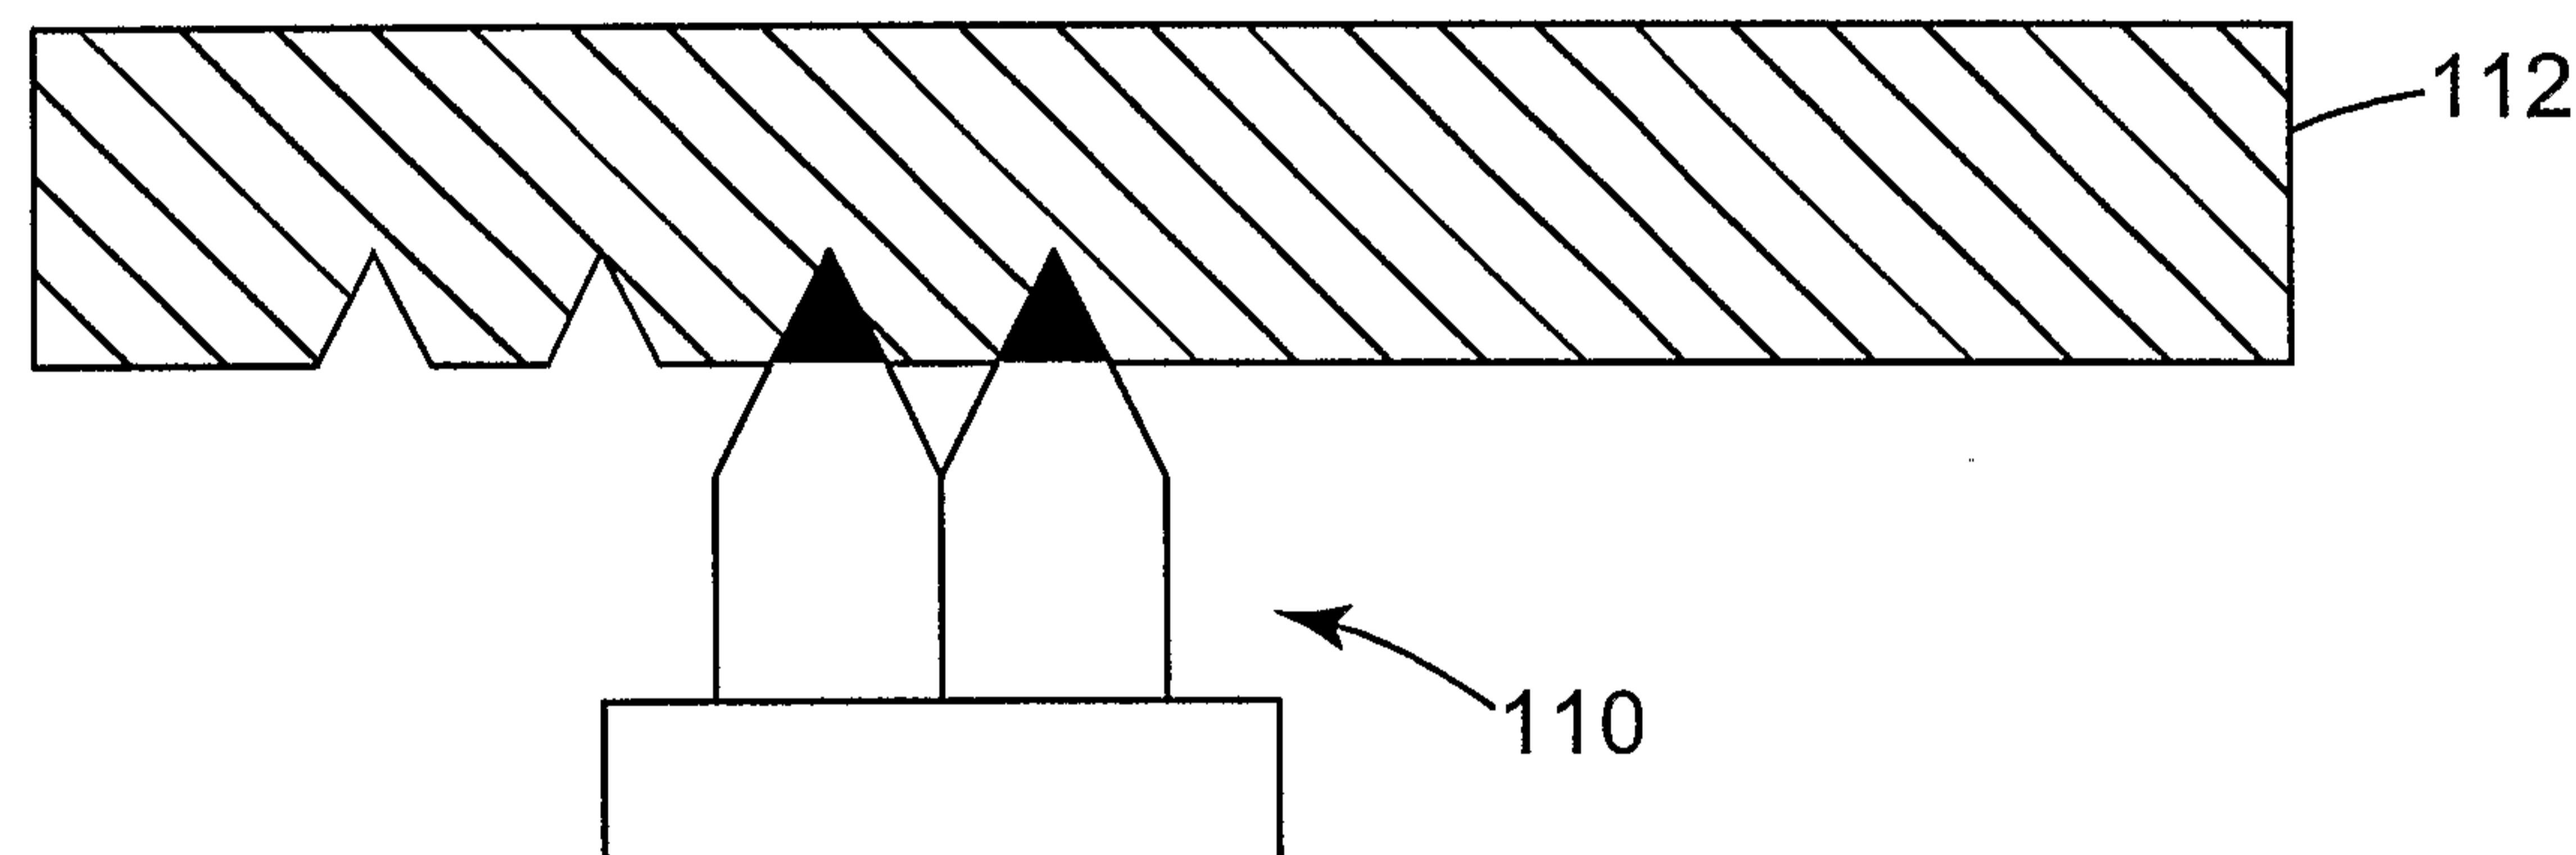


Fig. 11B

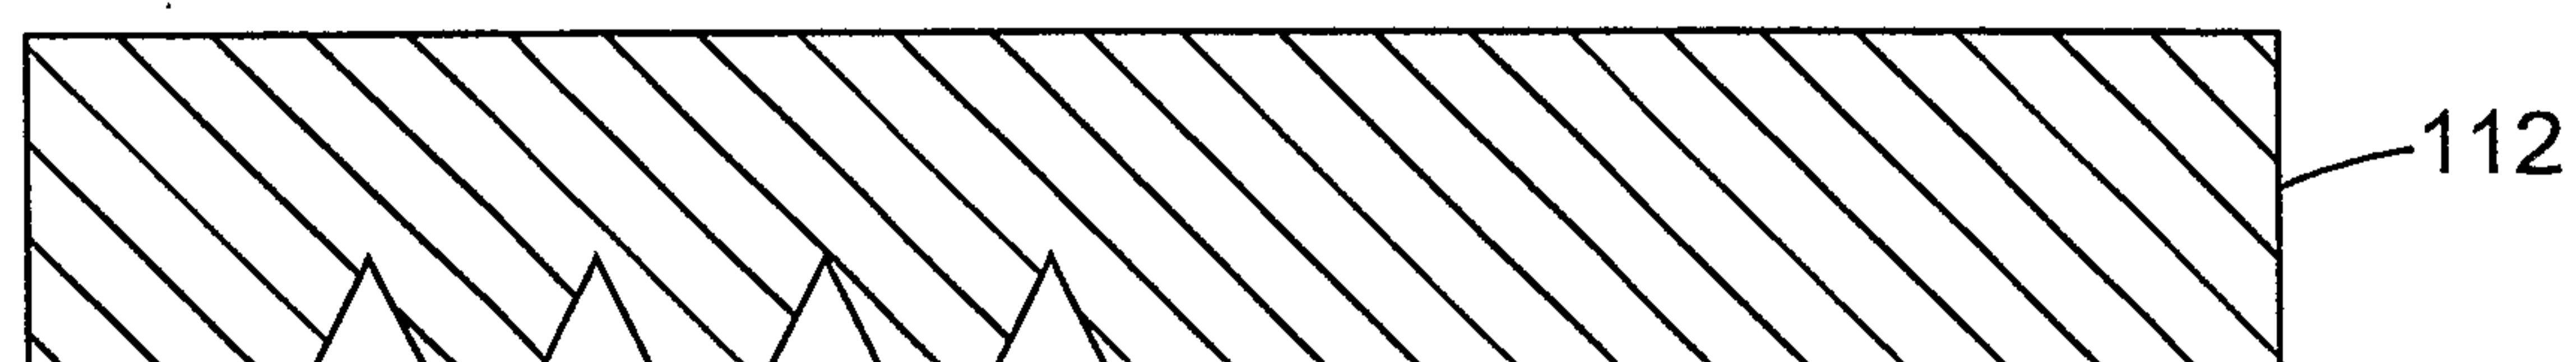


Fig. 11C

10/14

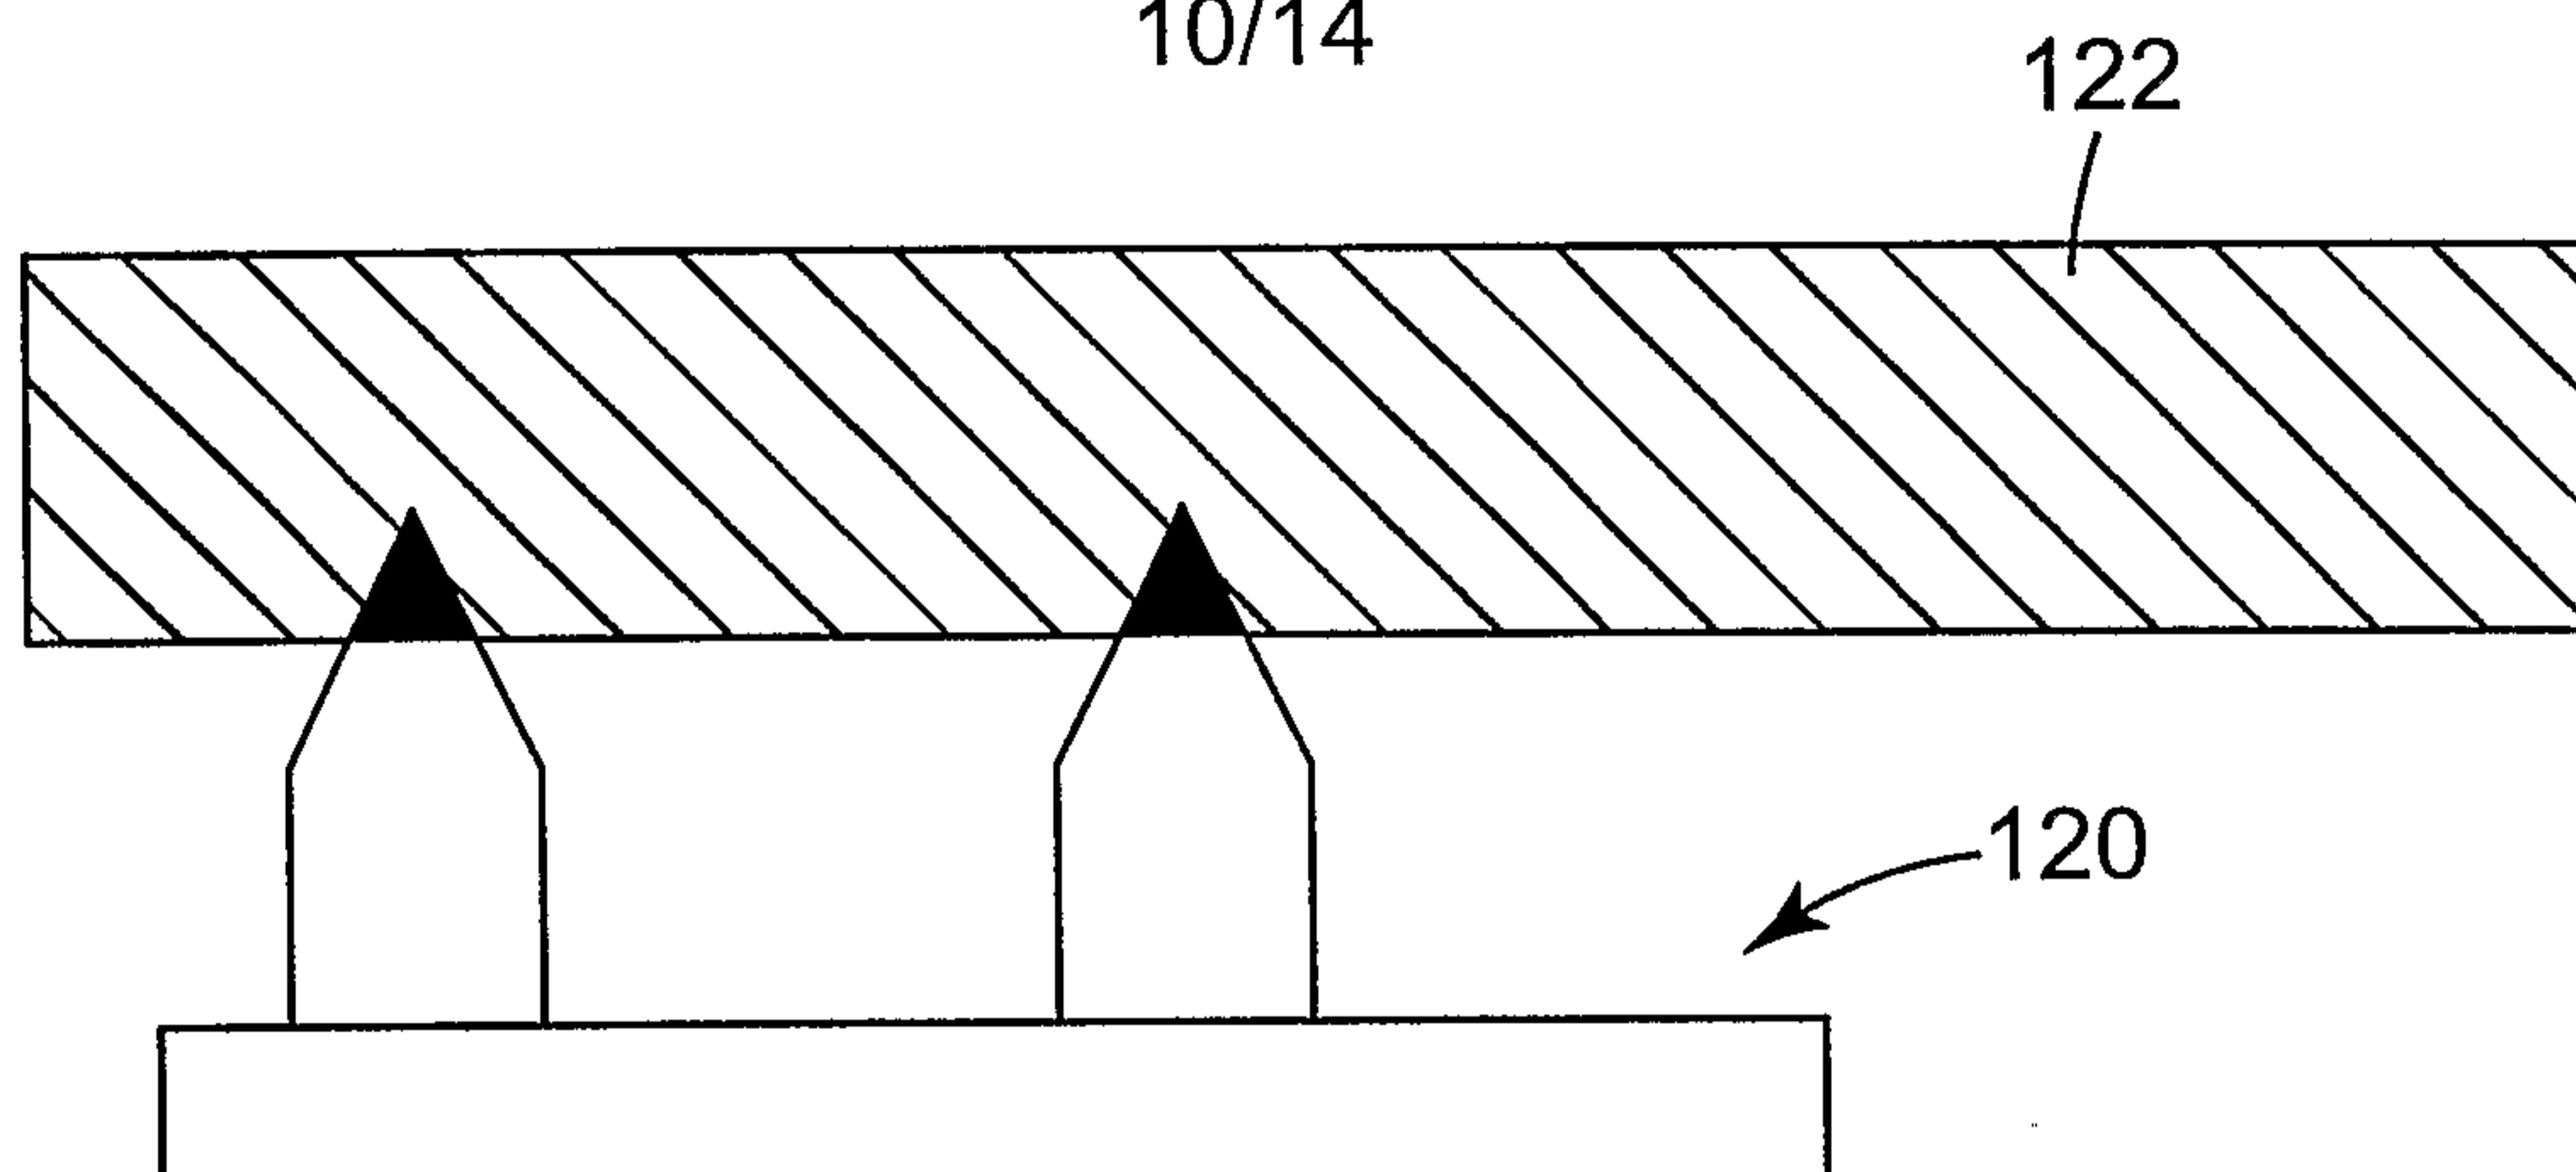


Fig. 12A

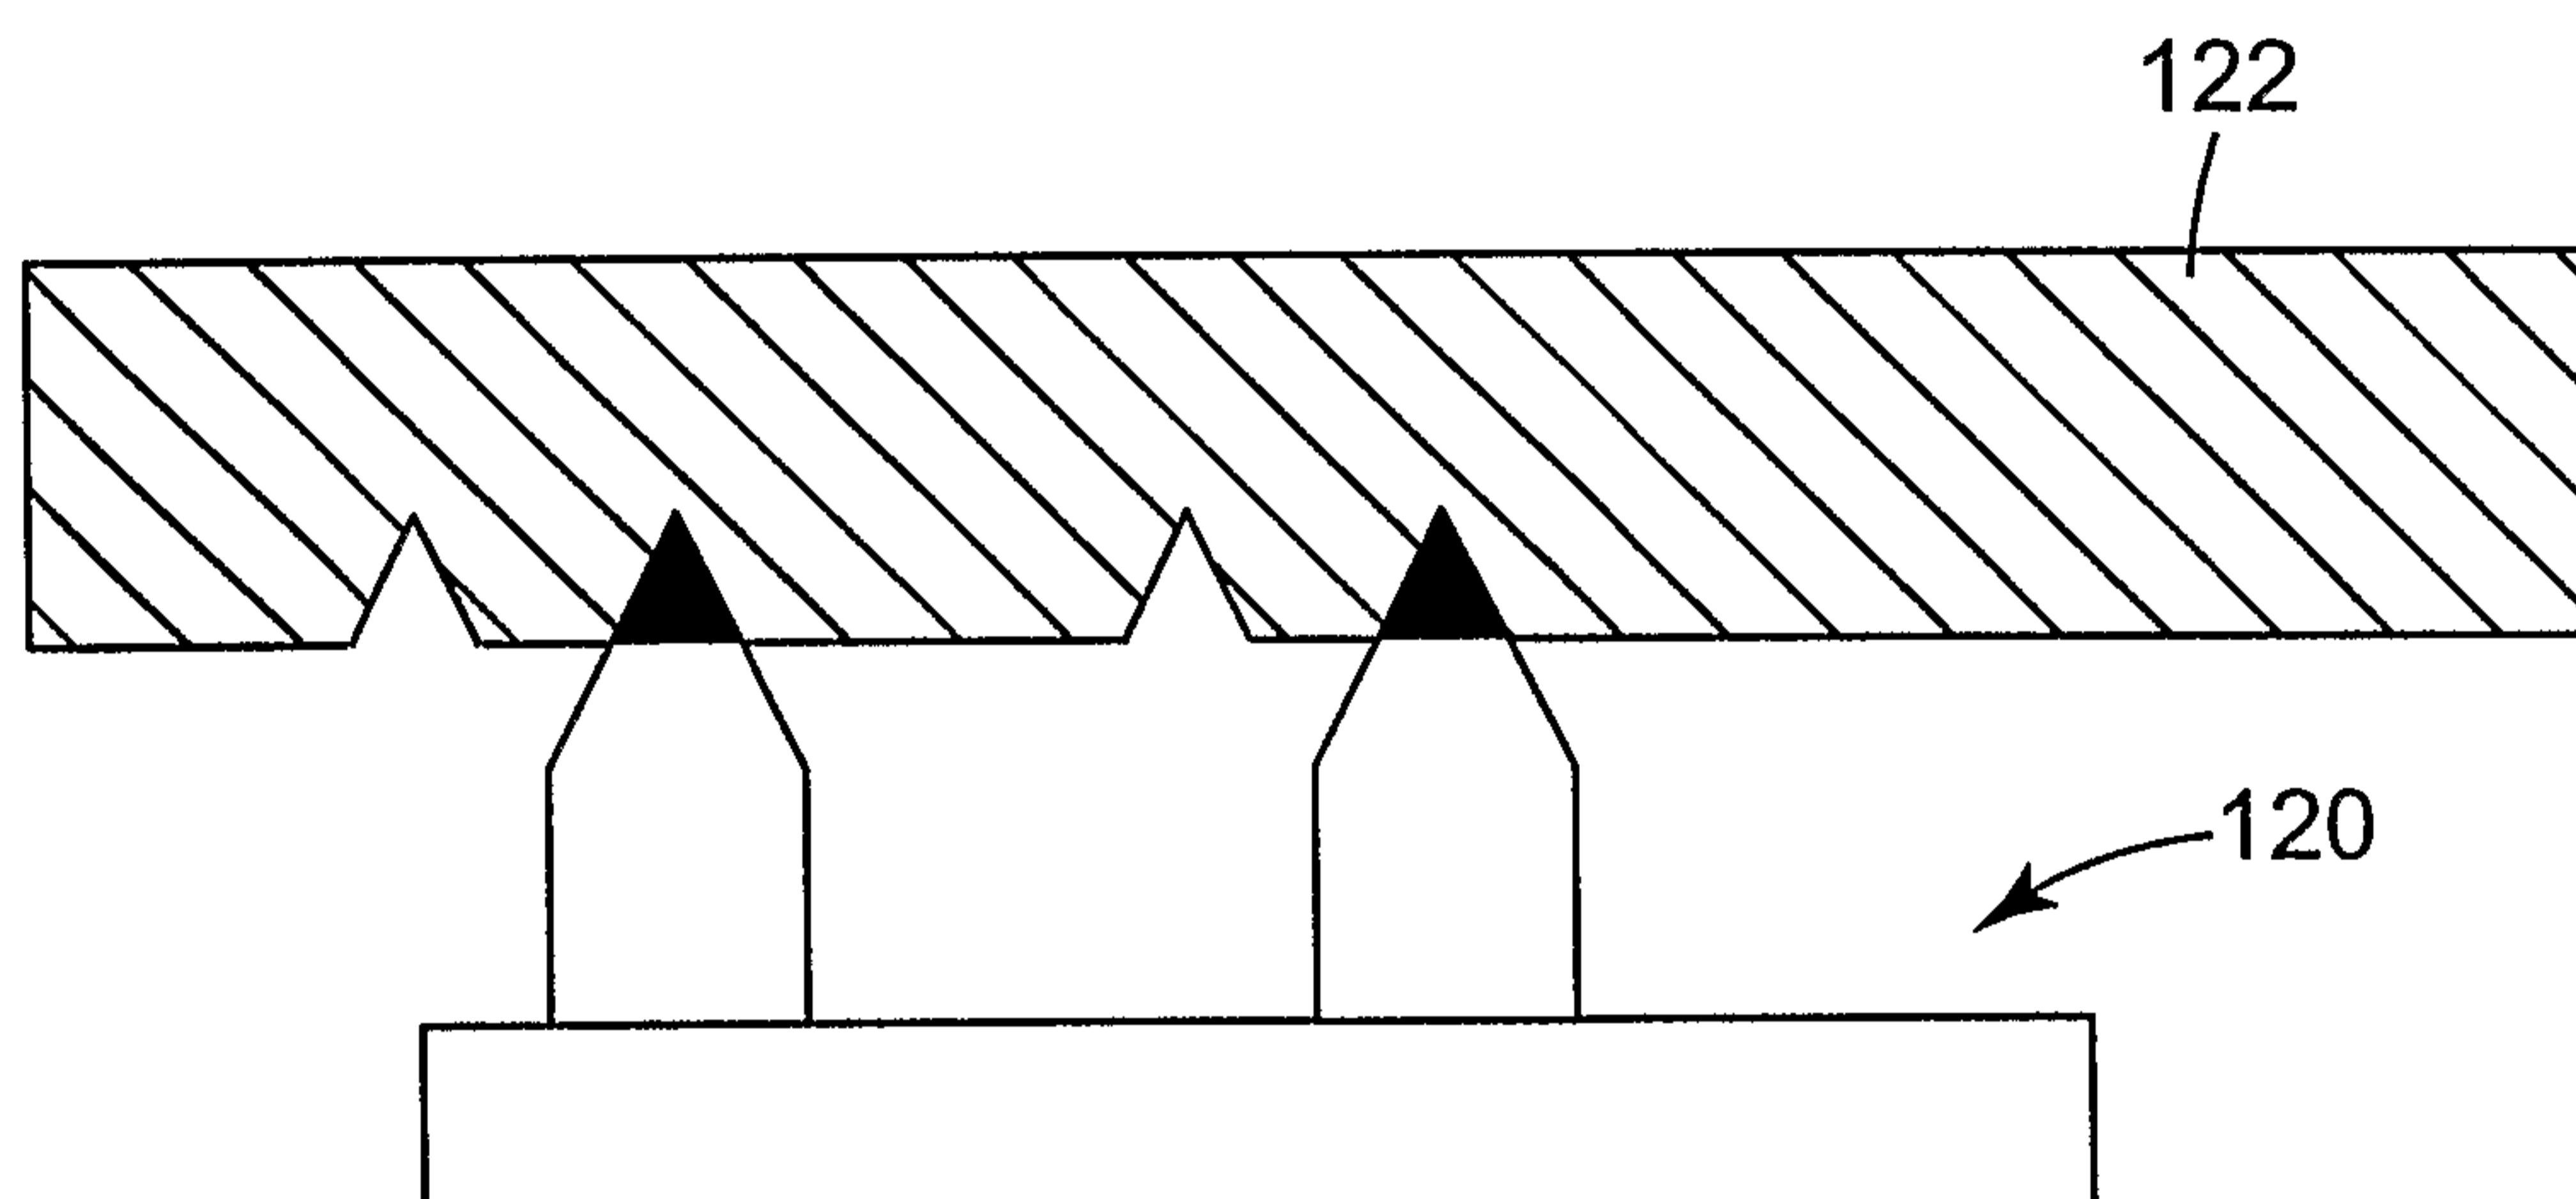


Fig. 12B

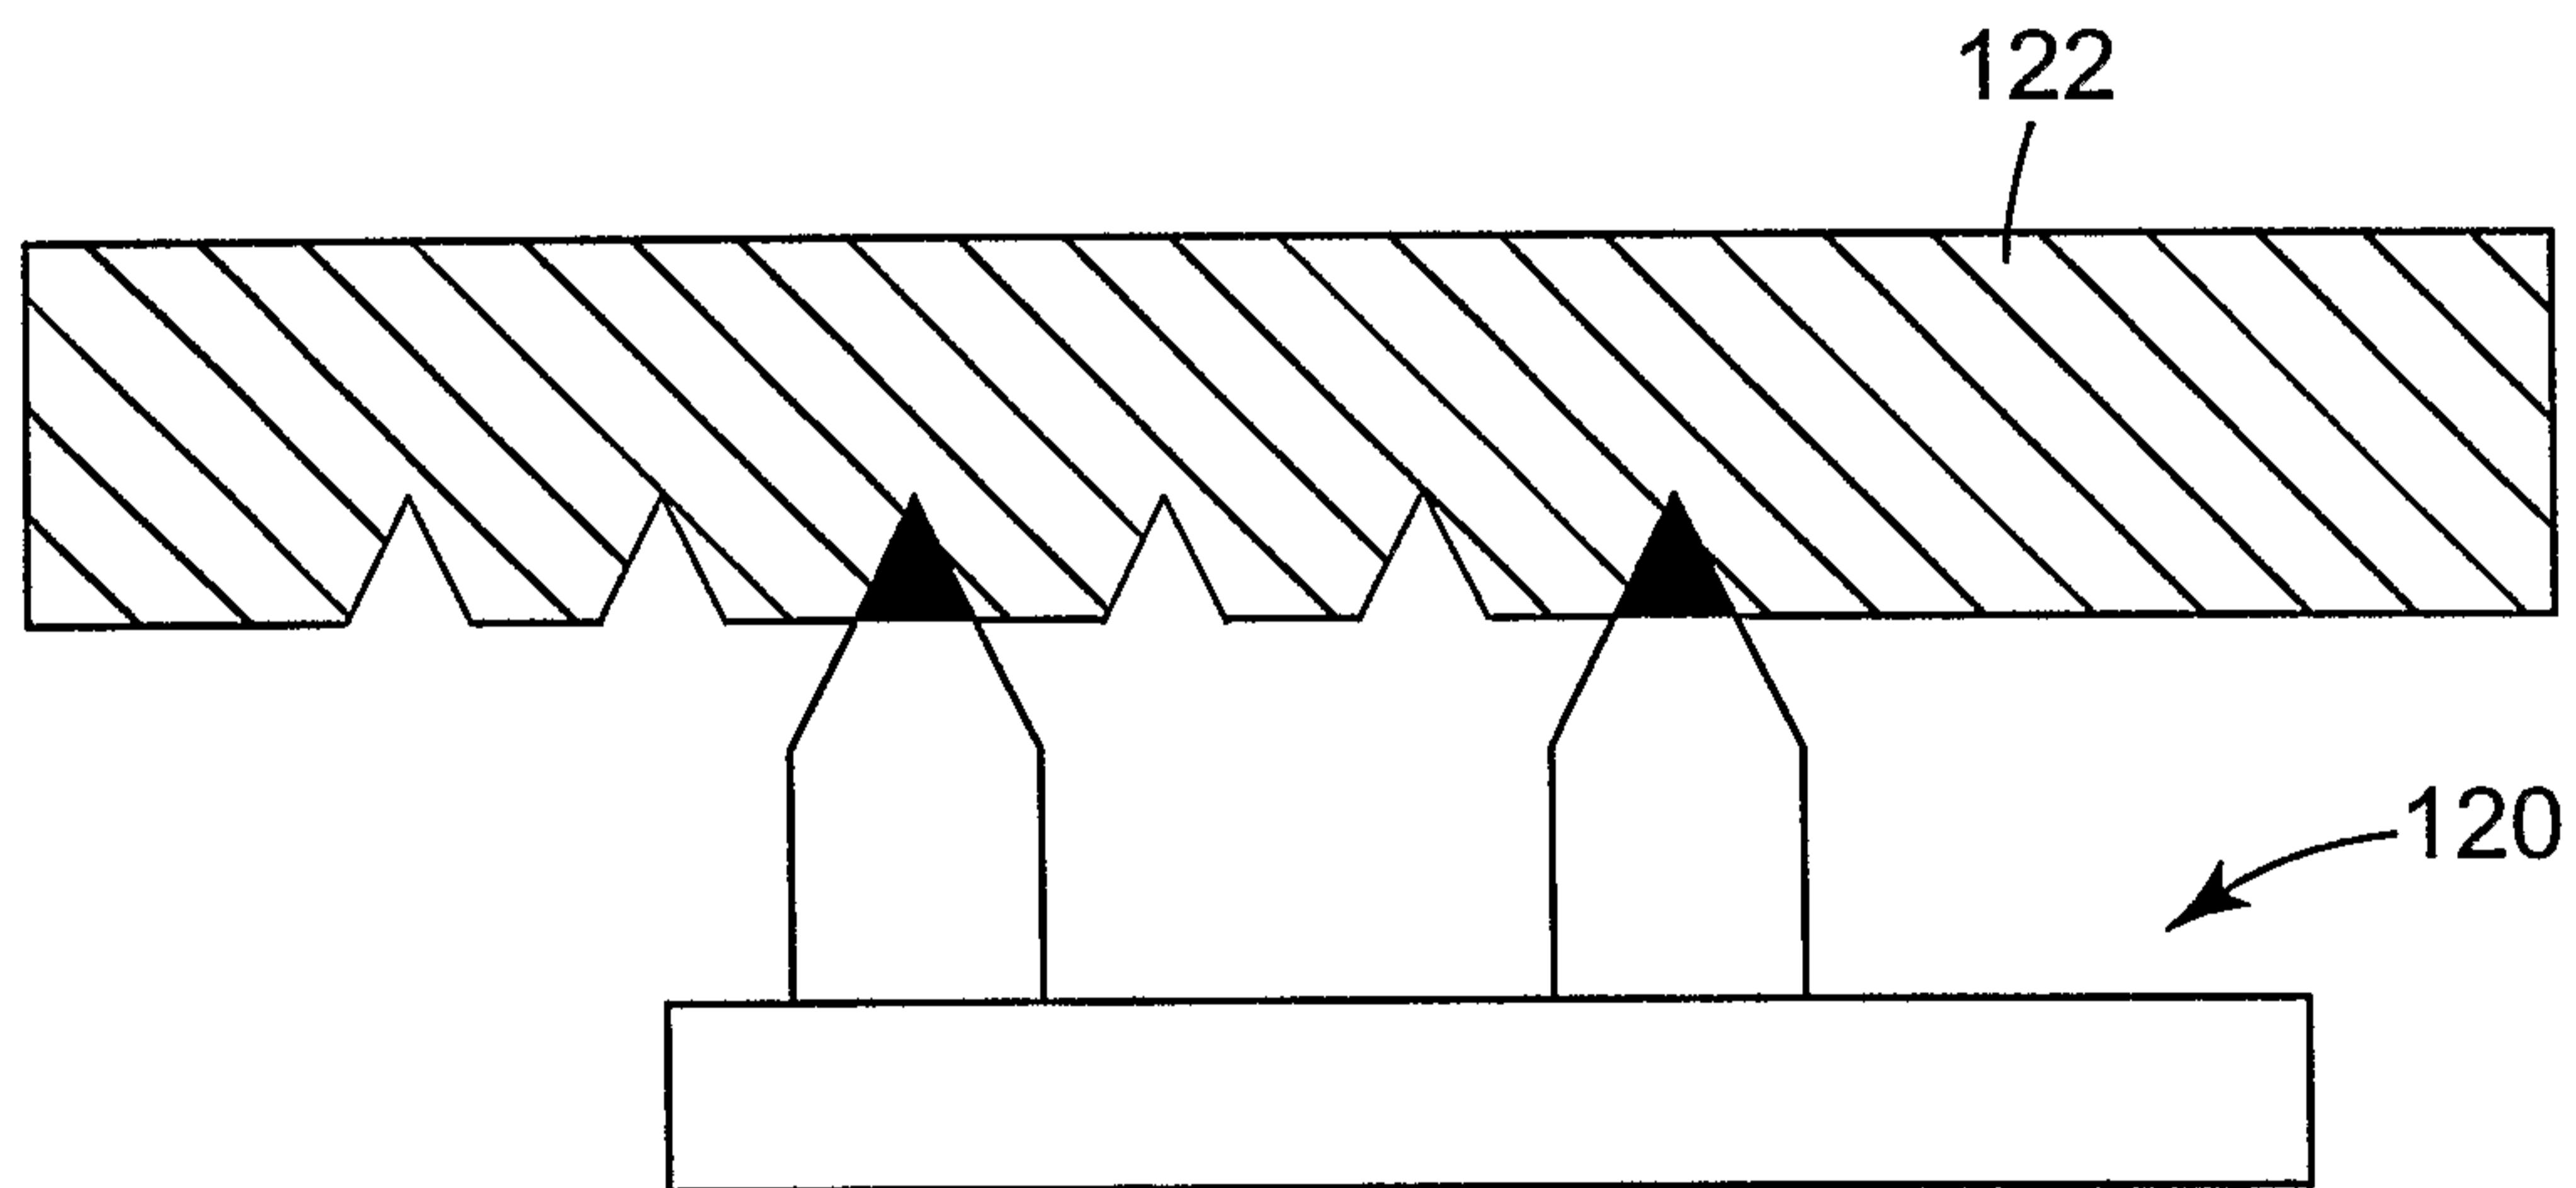


Fig. 12C

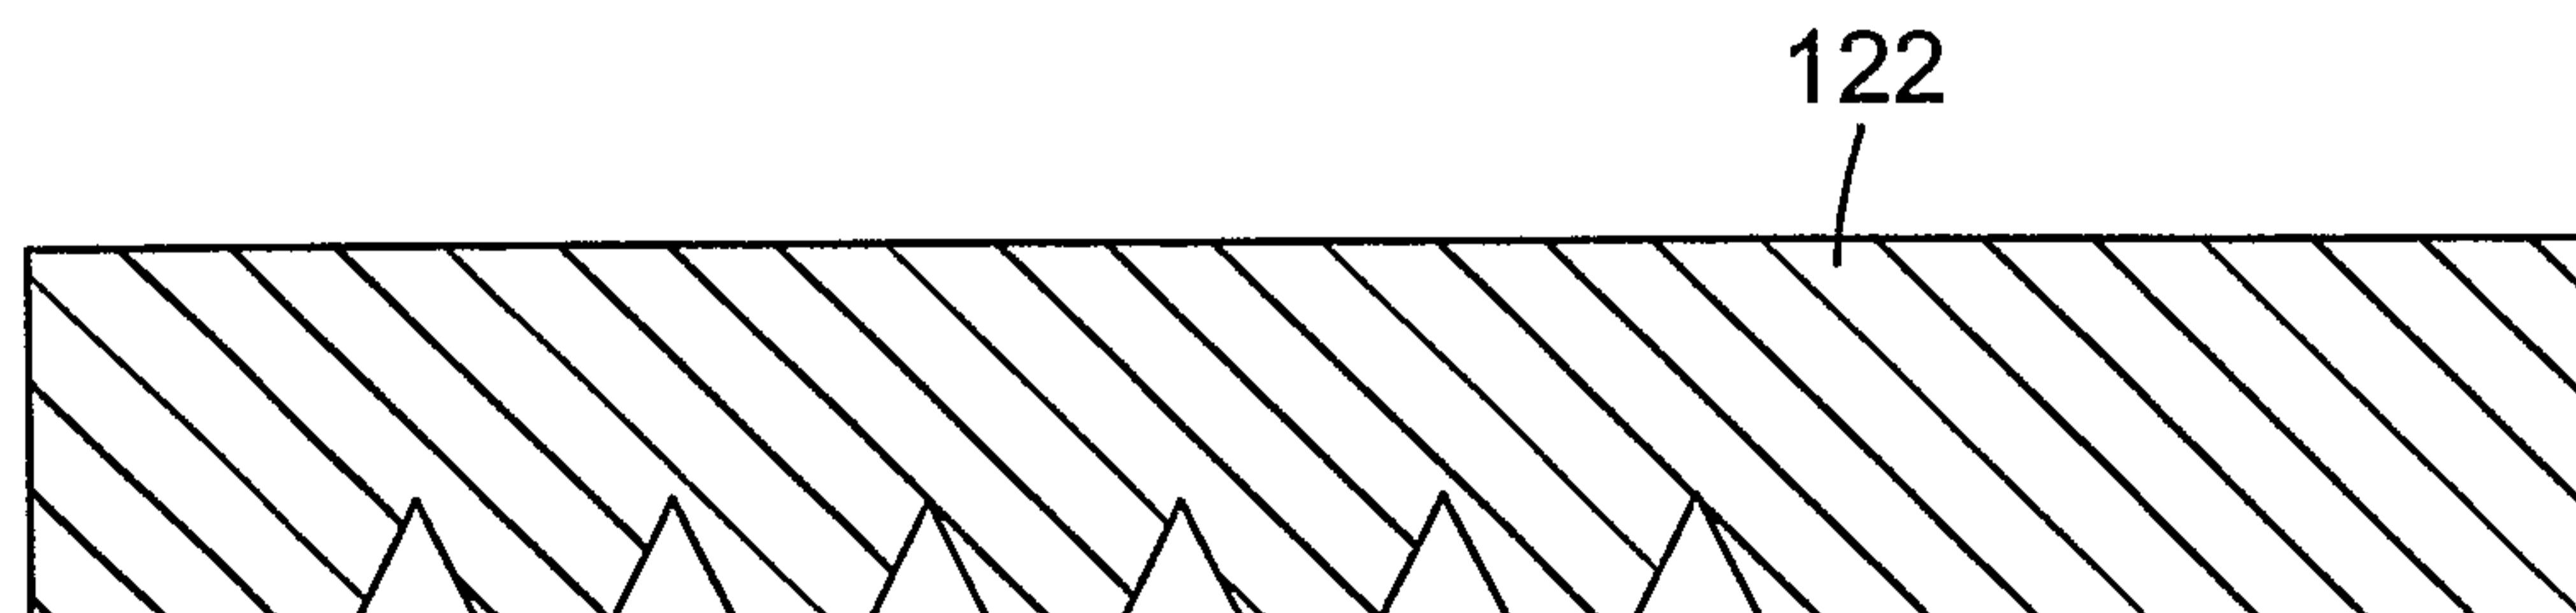


Fig. 12D

11/14

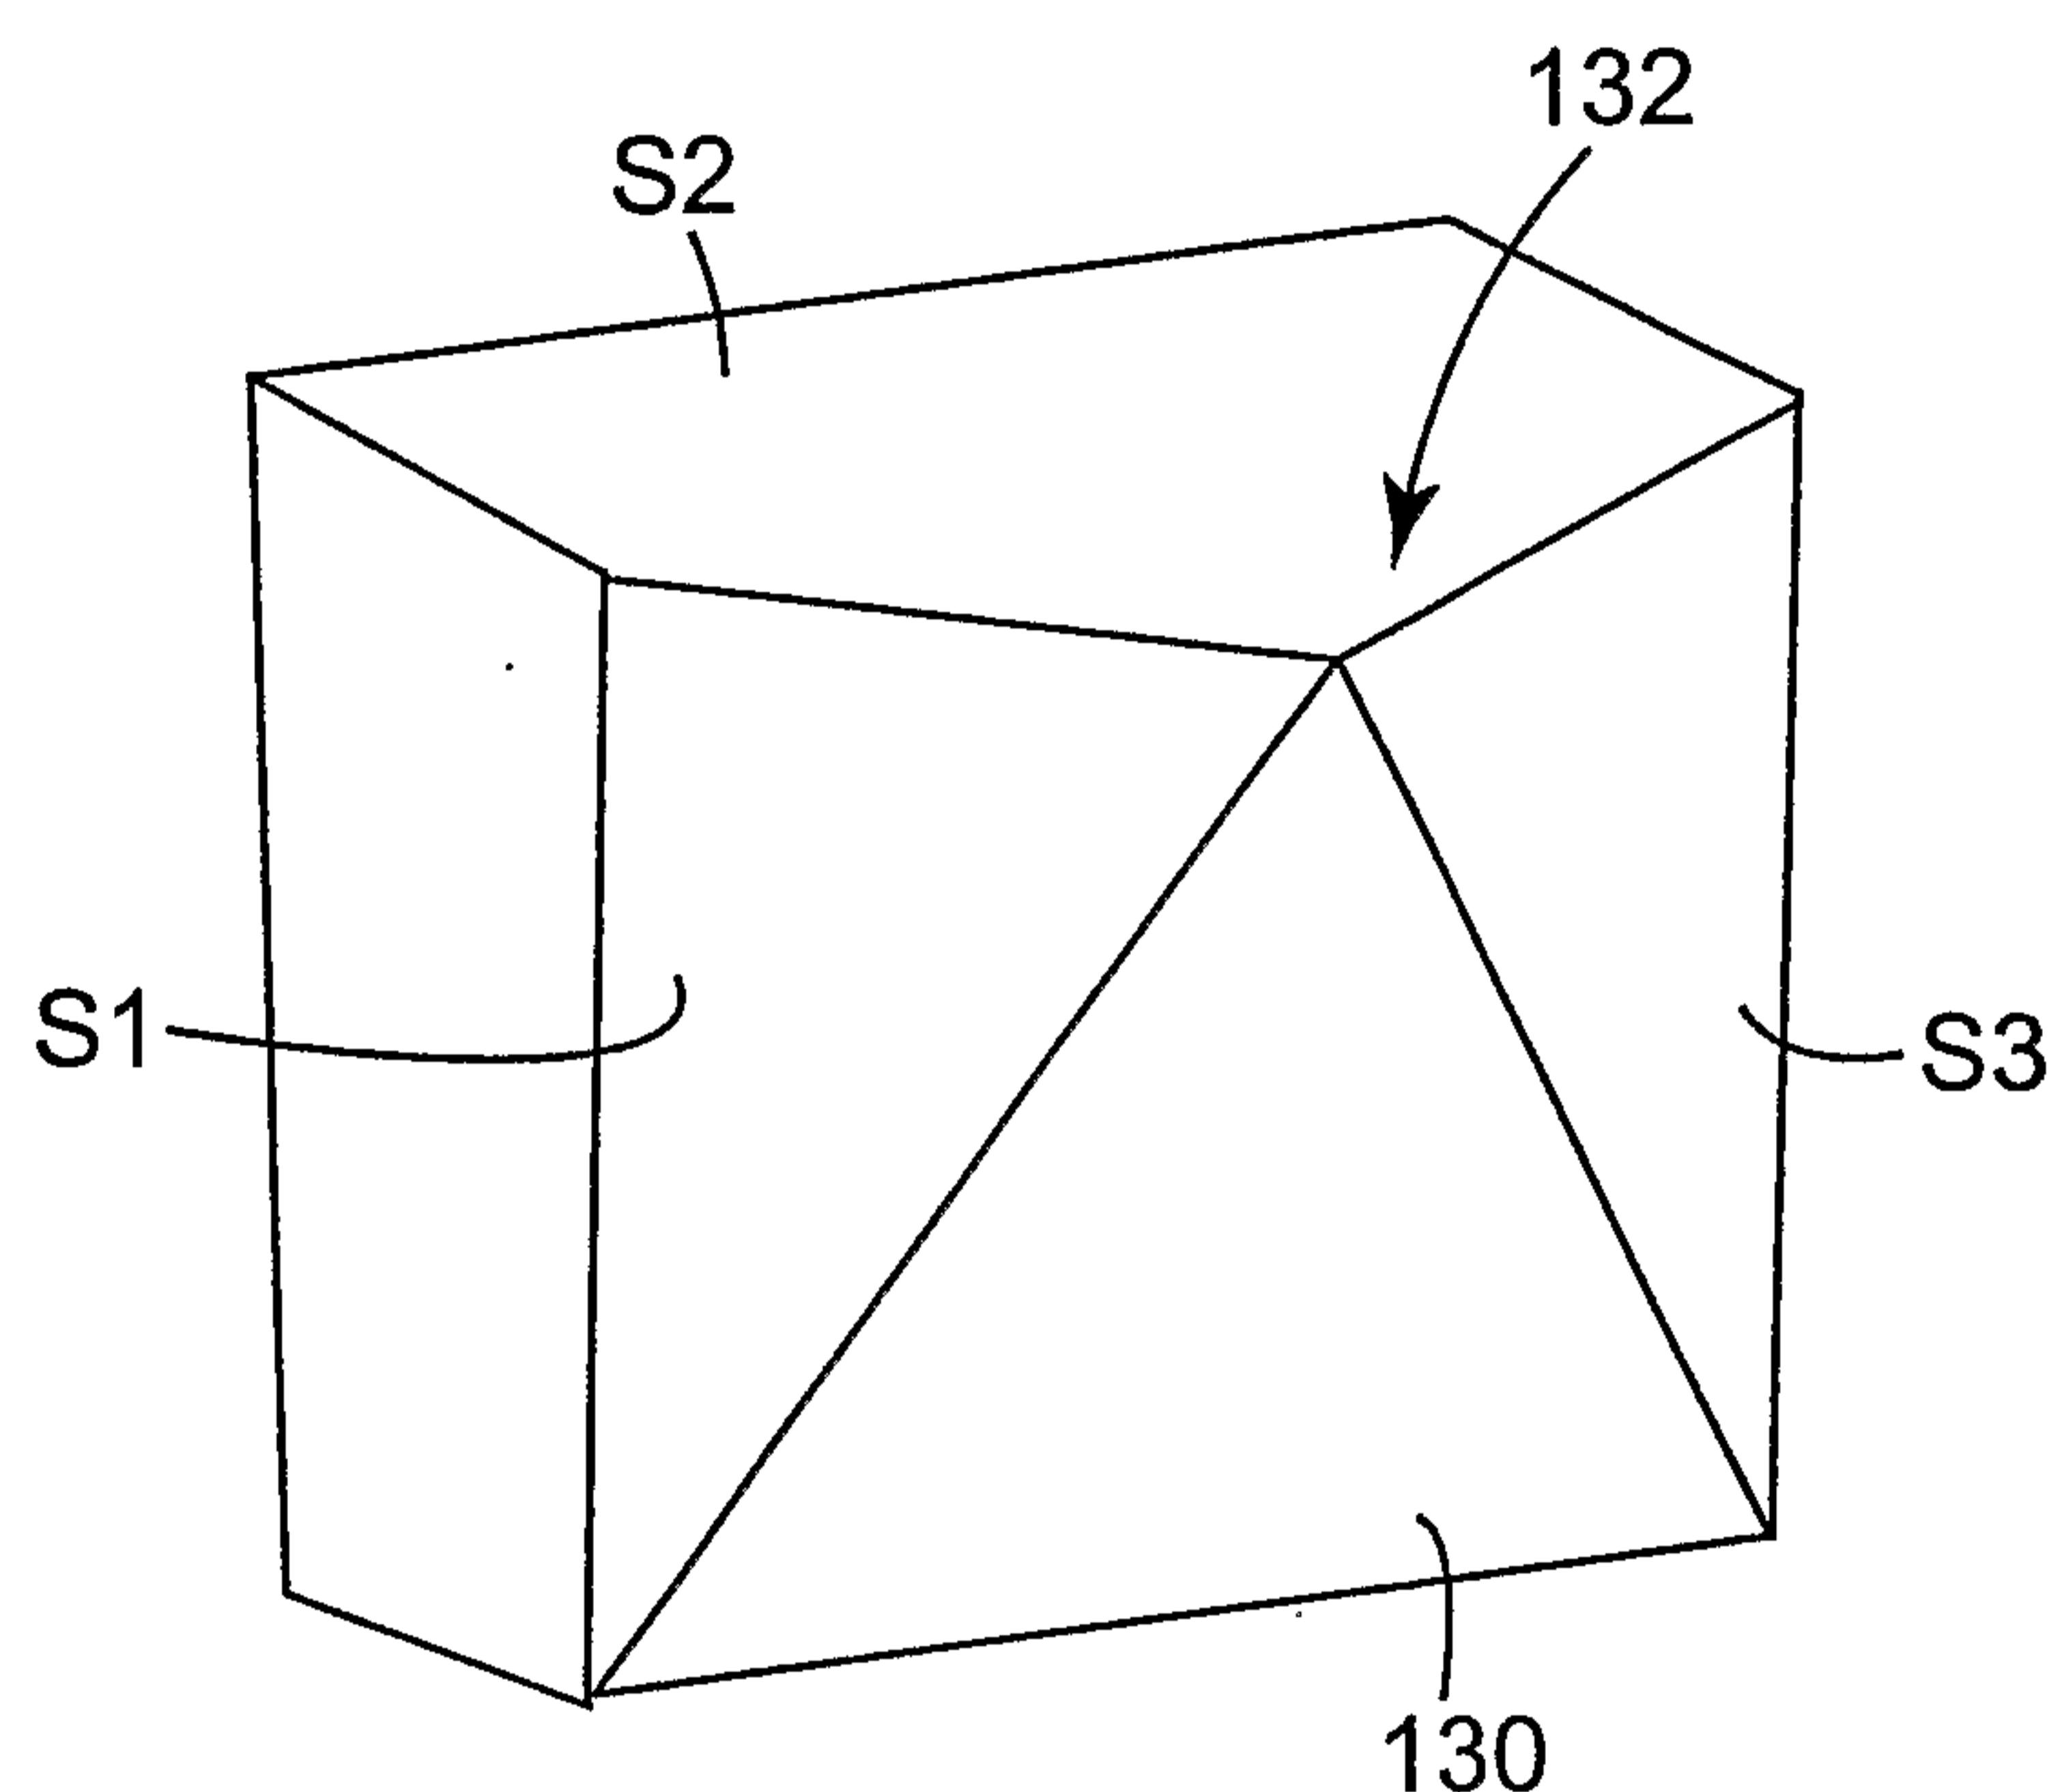
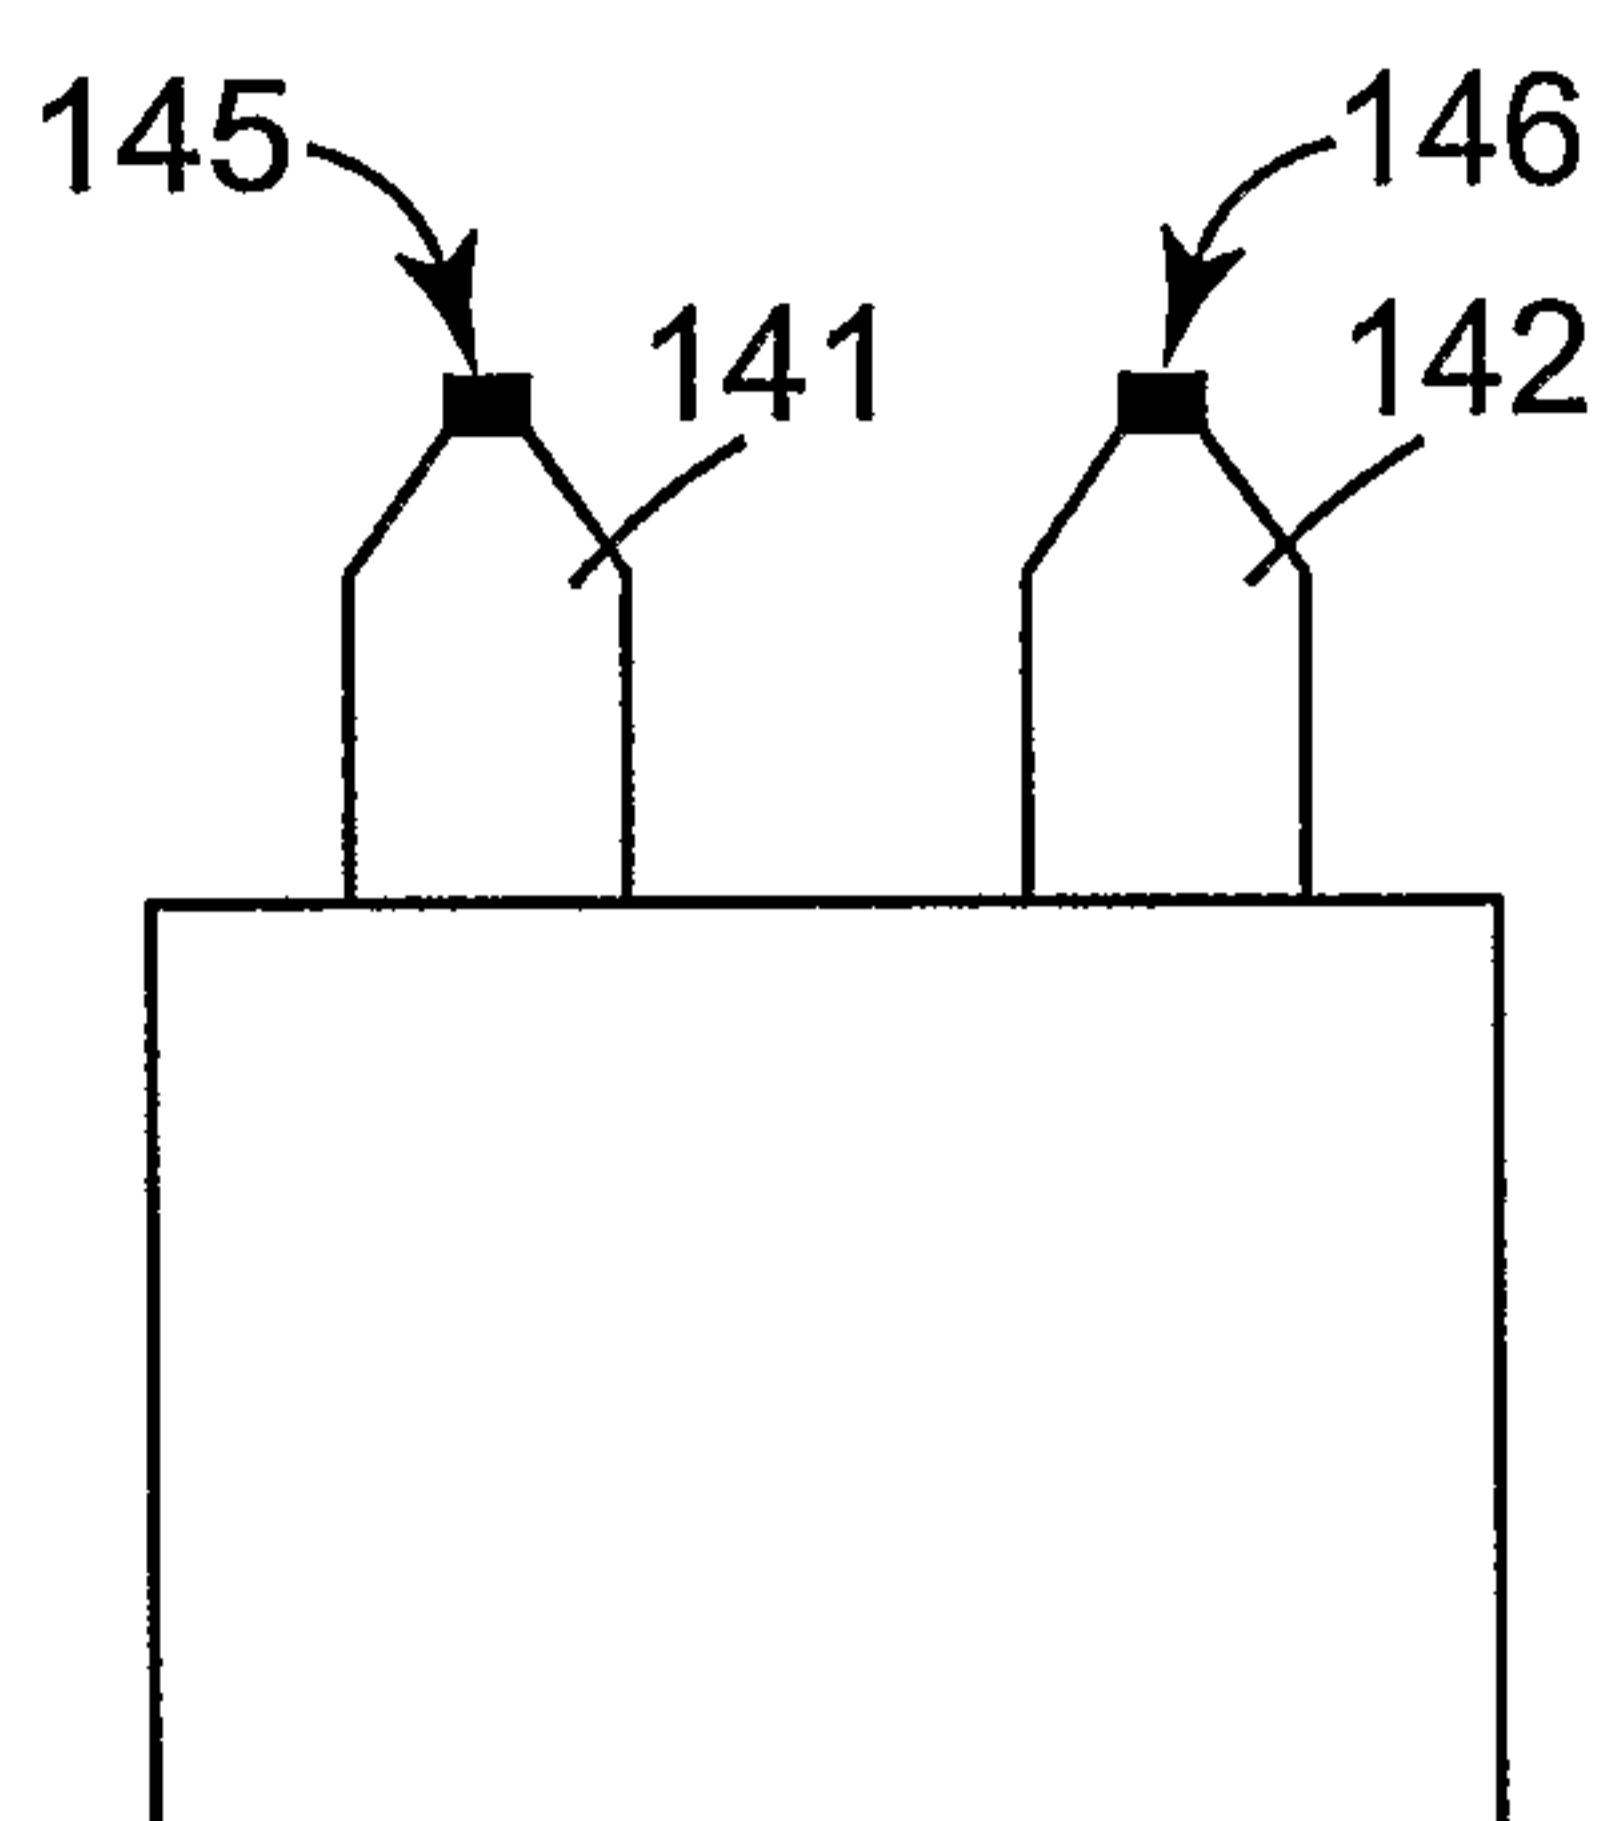
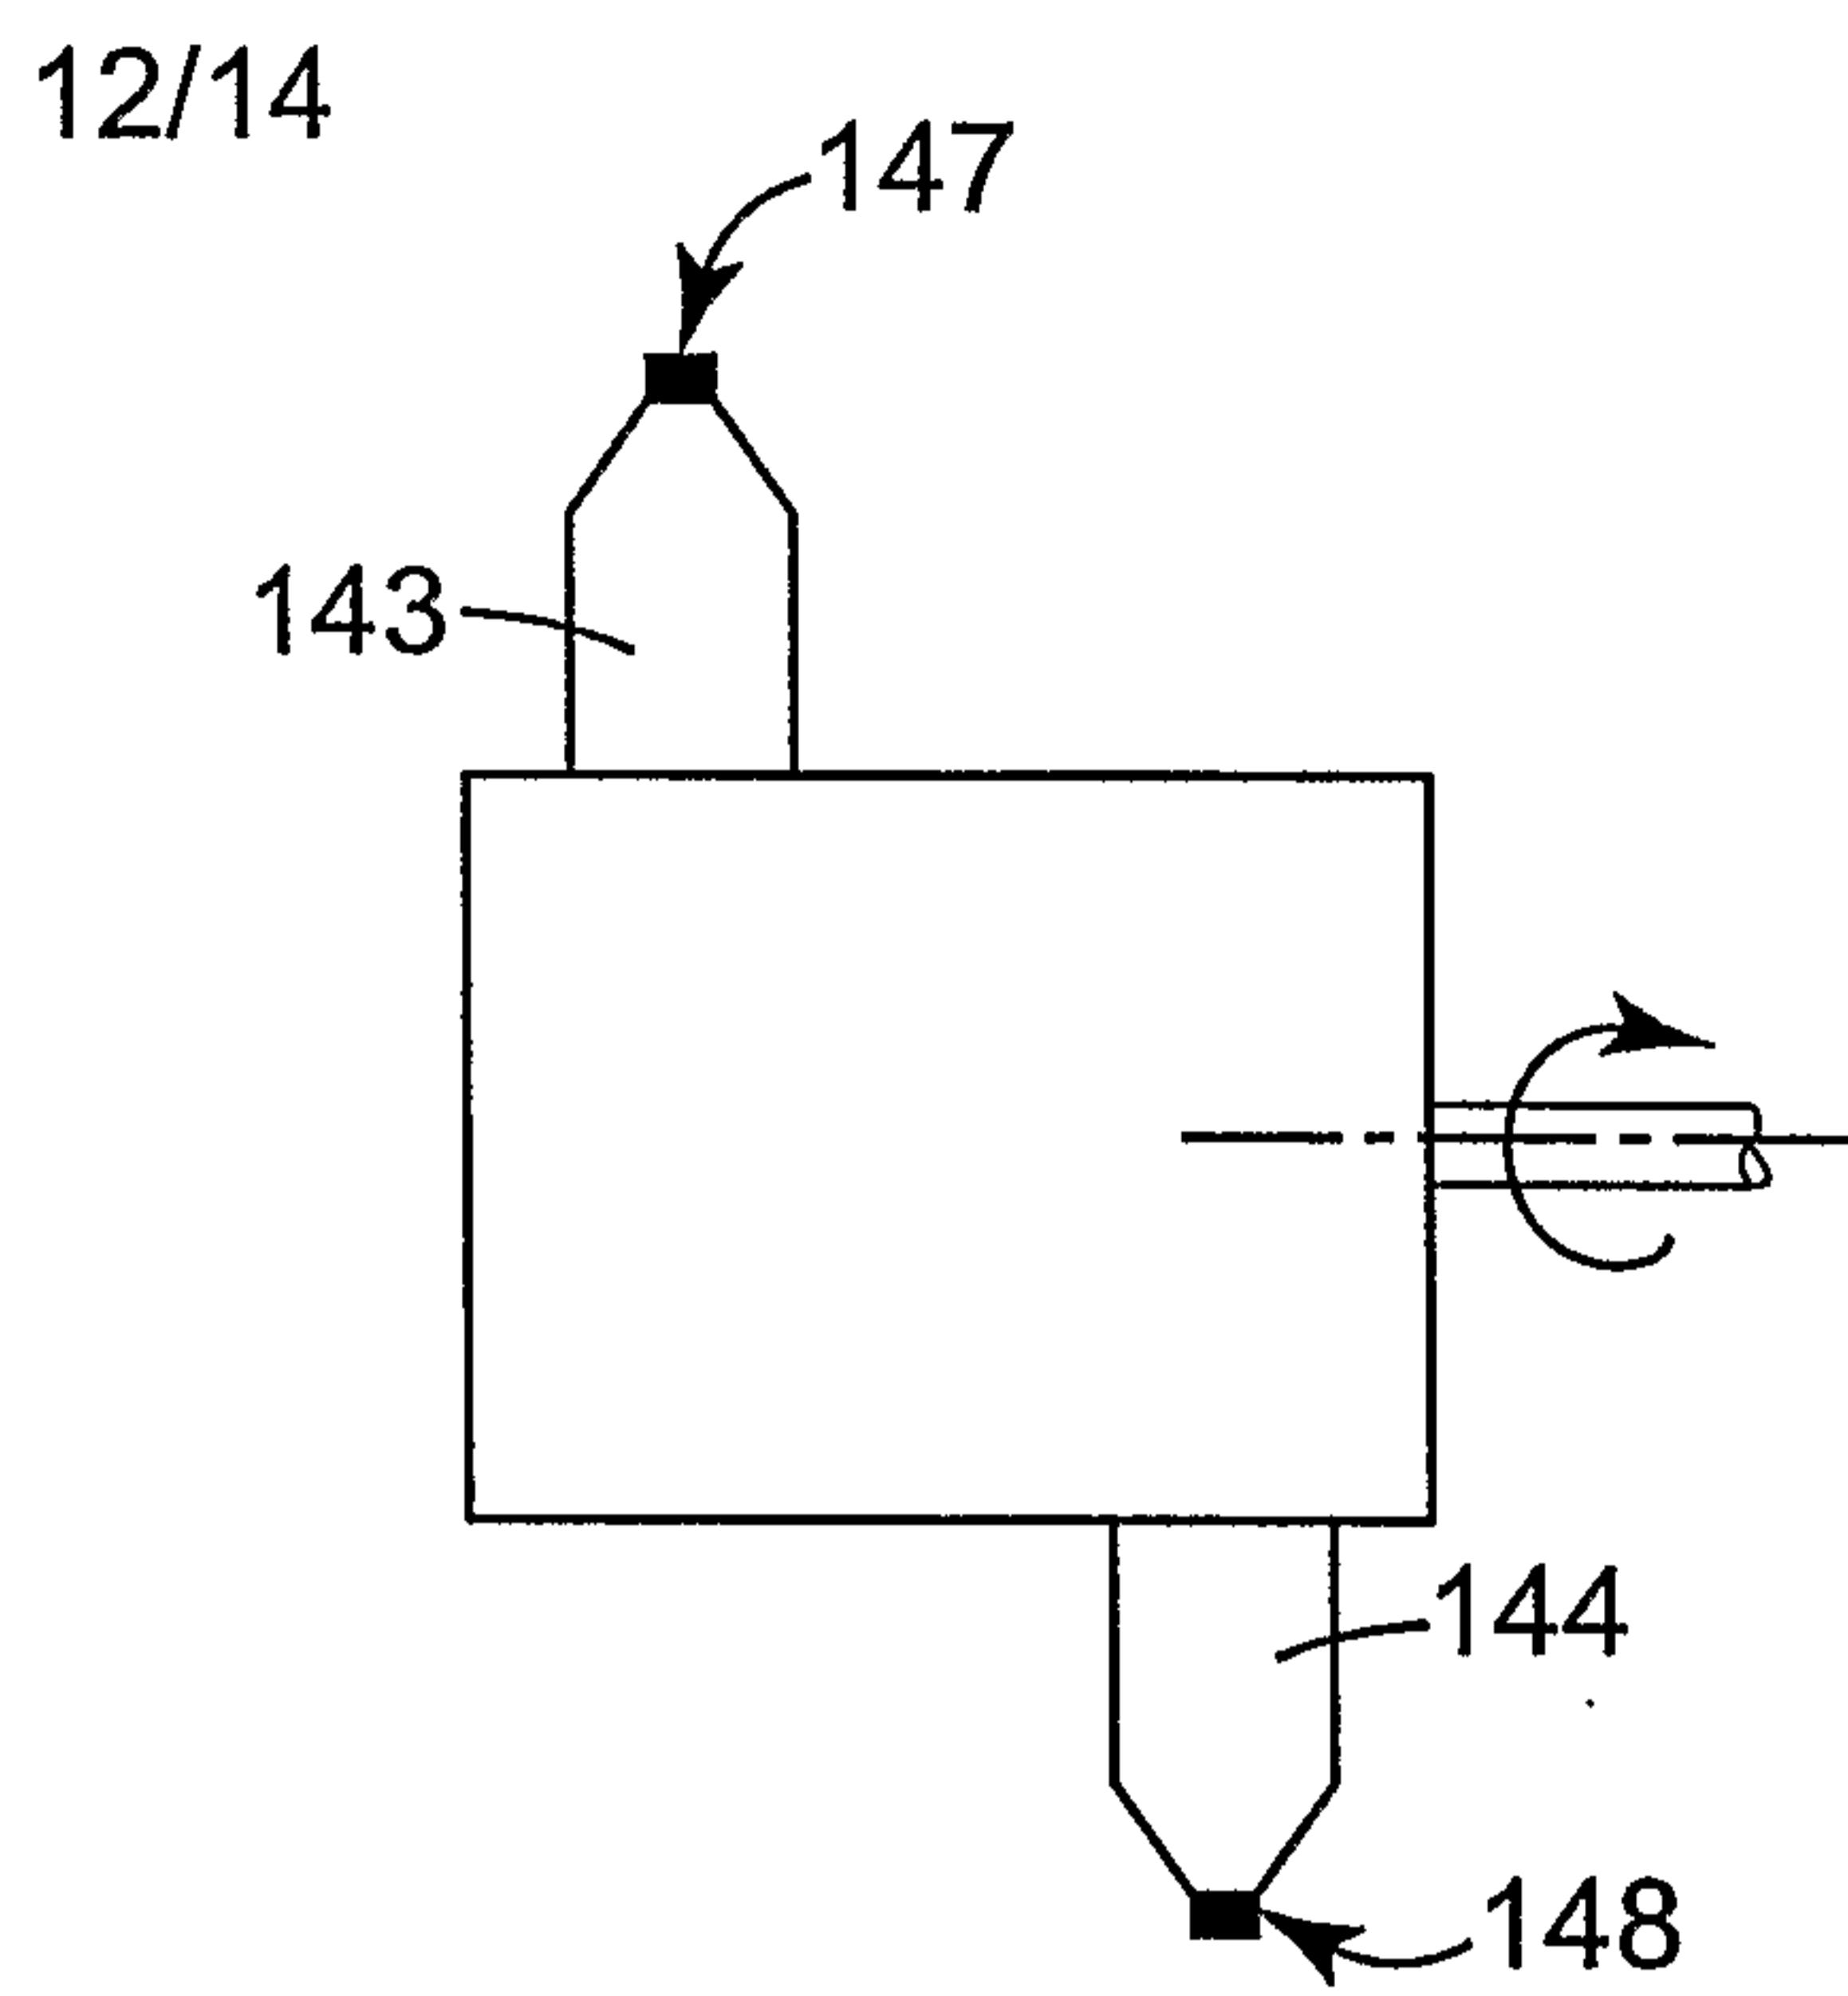
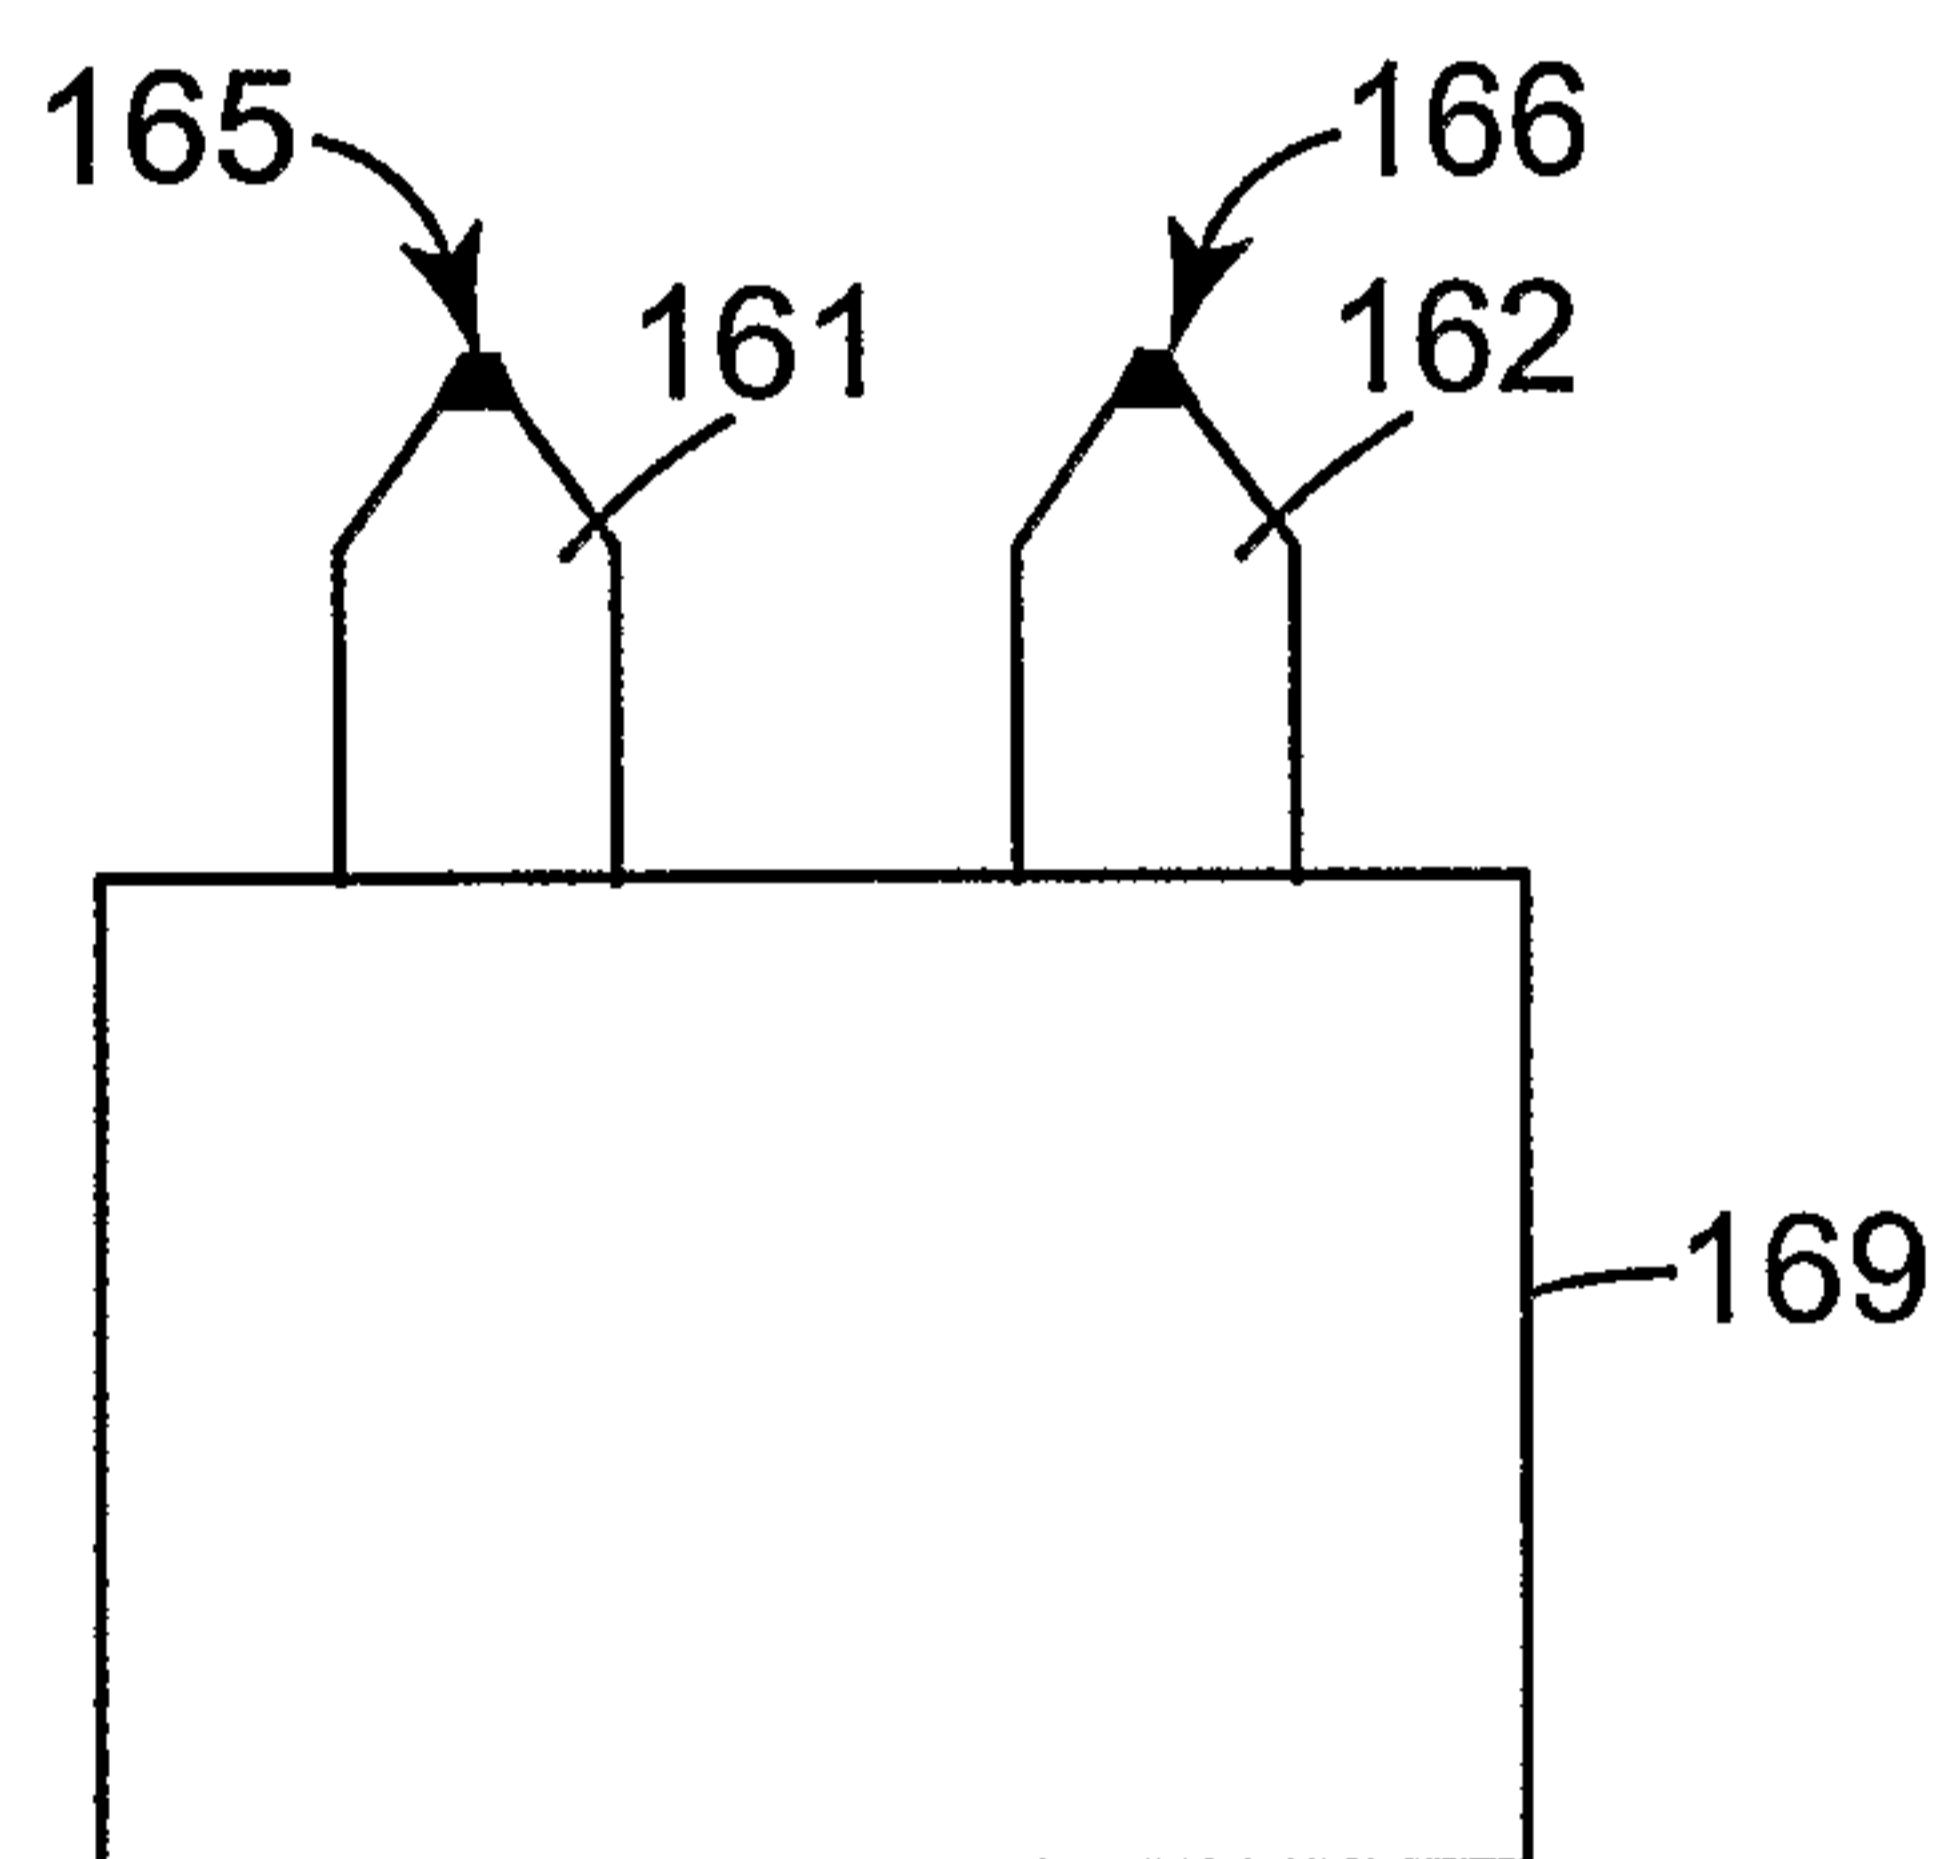
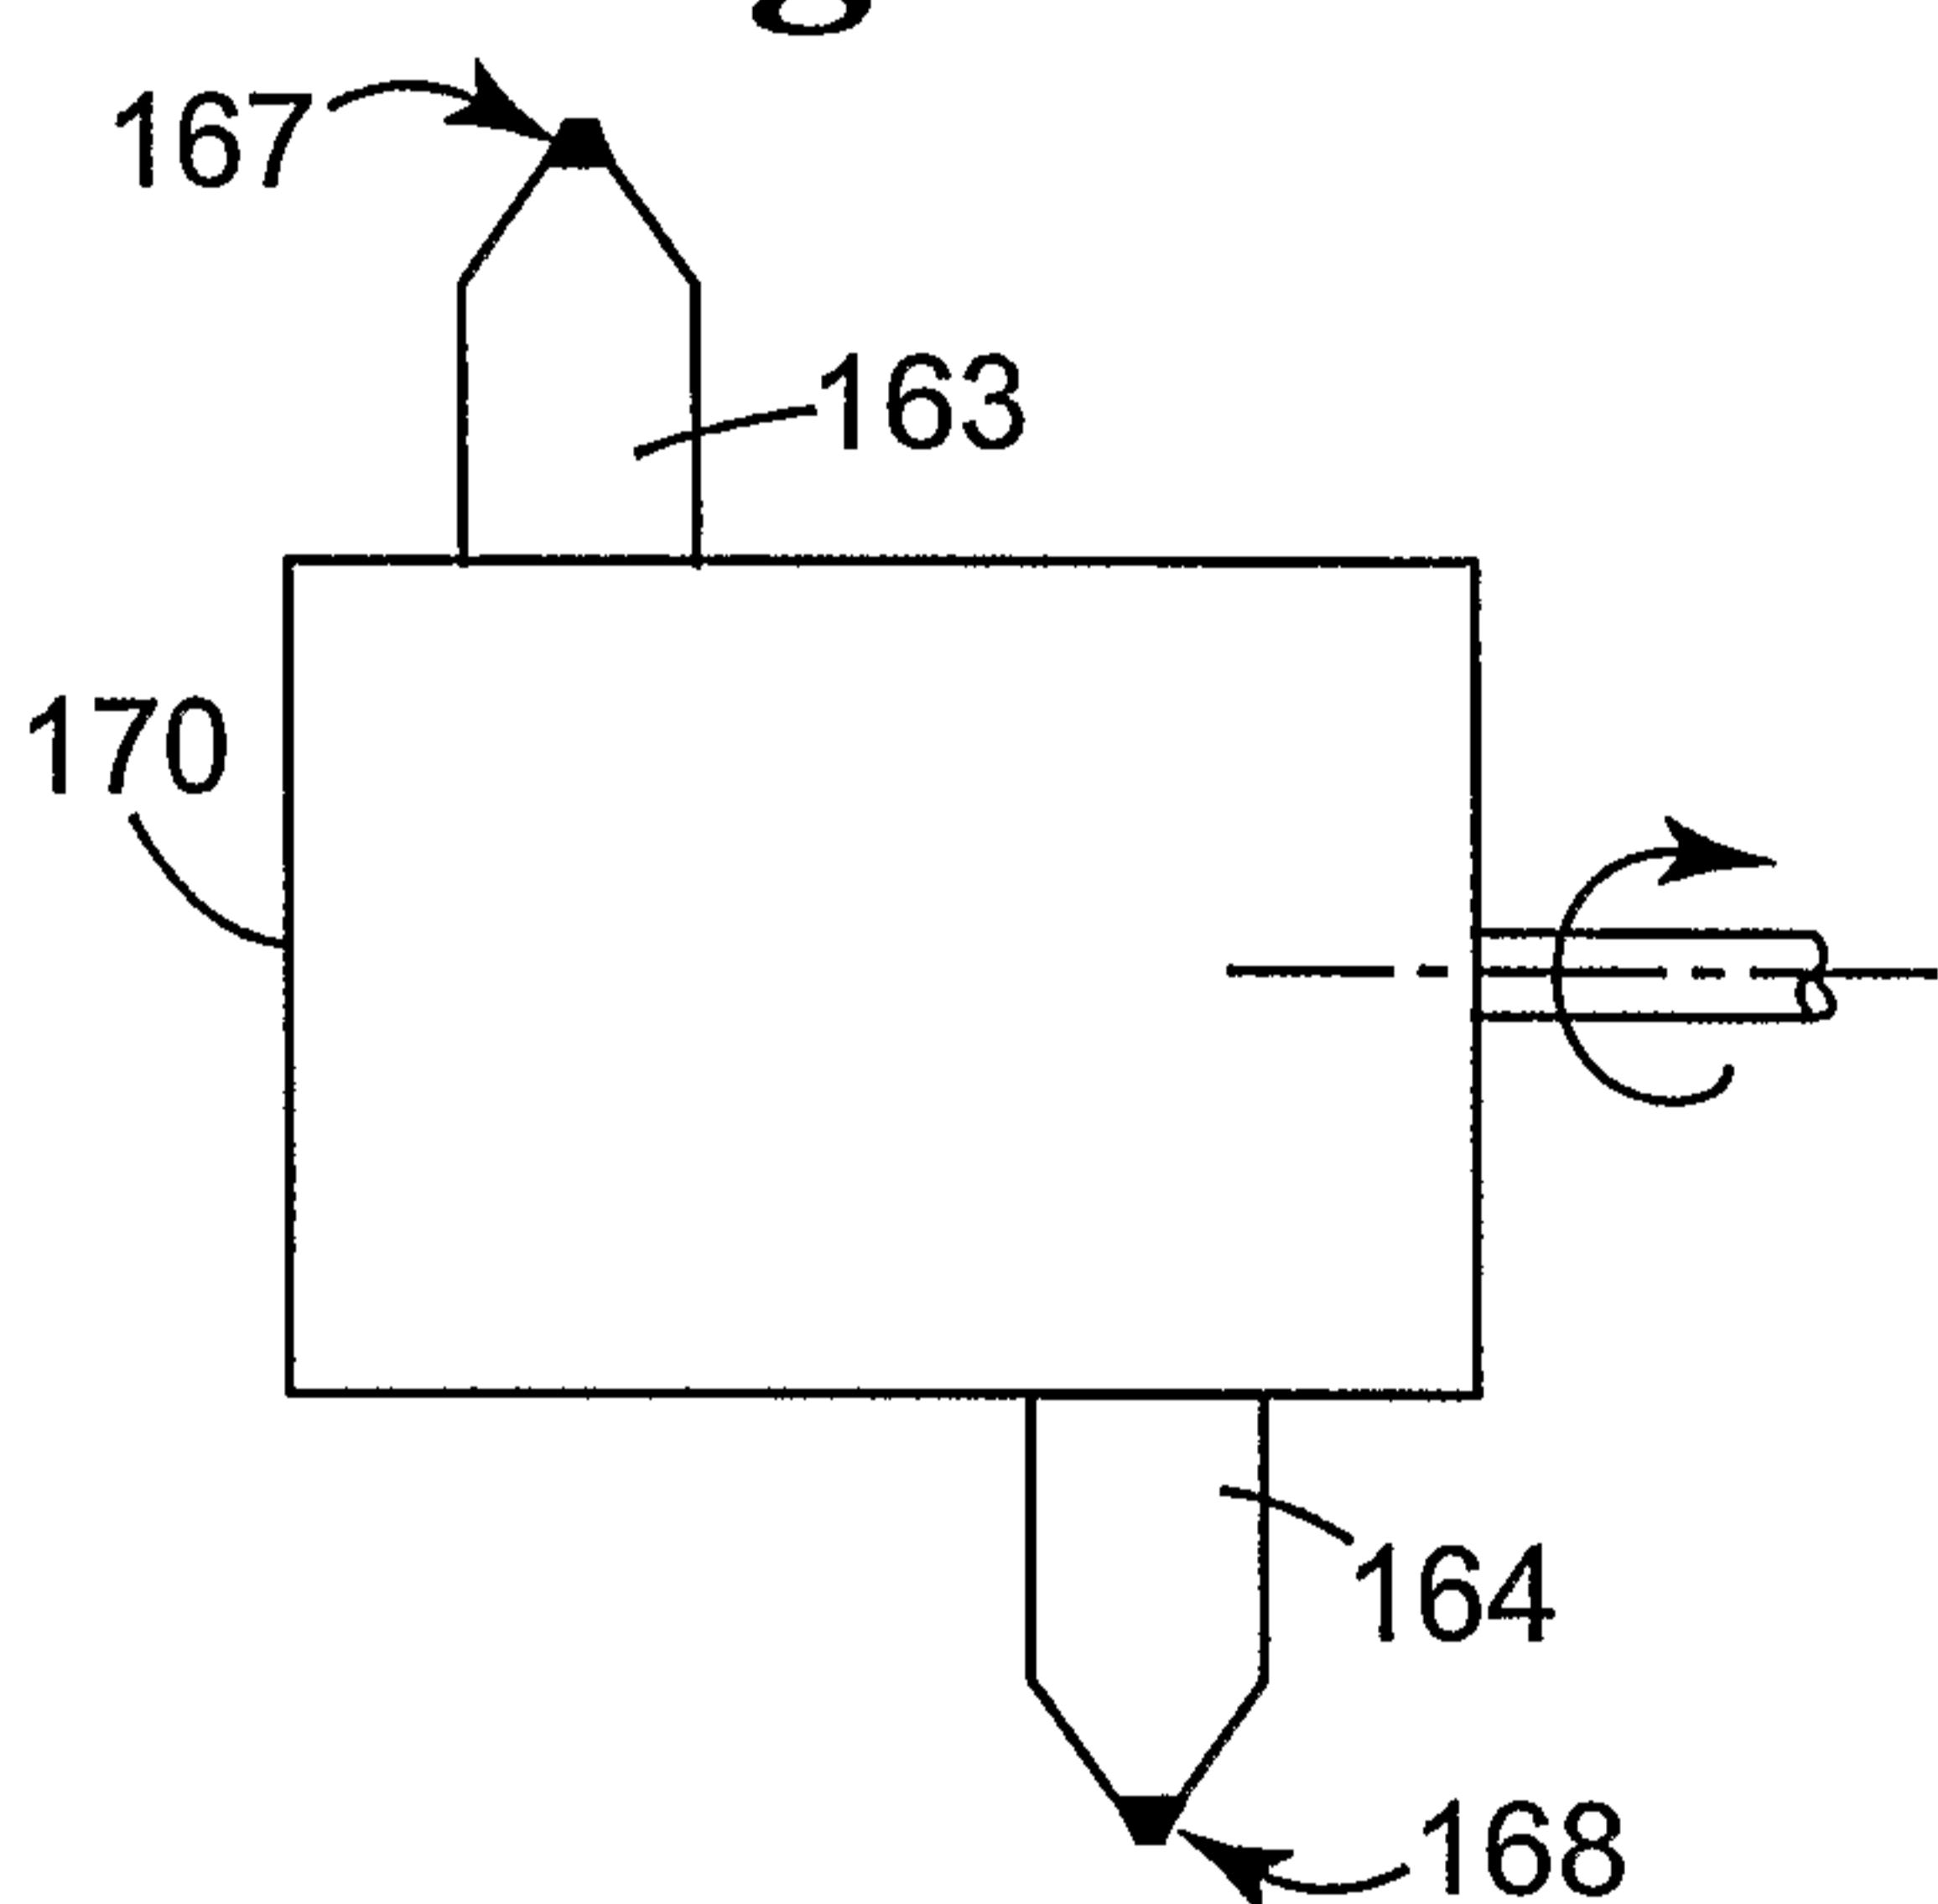
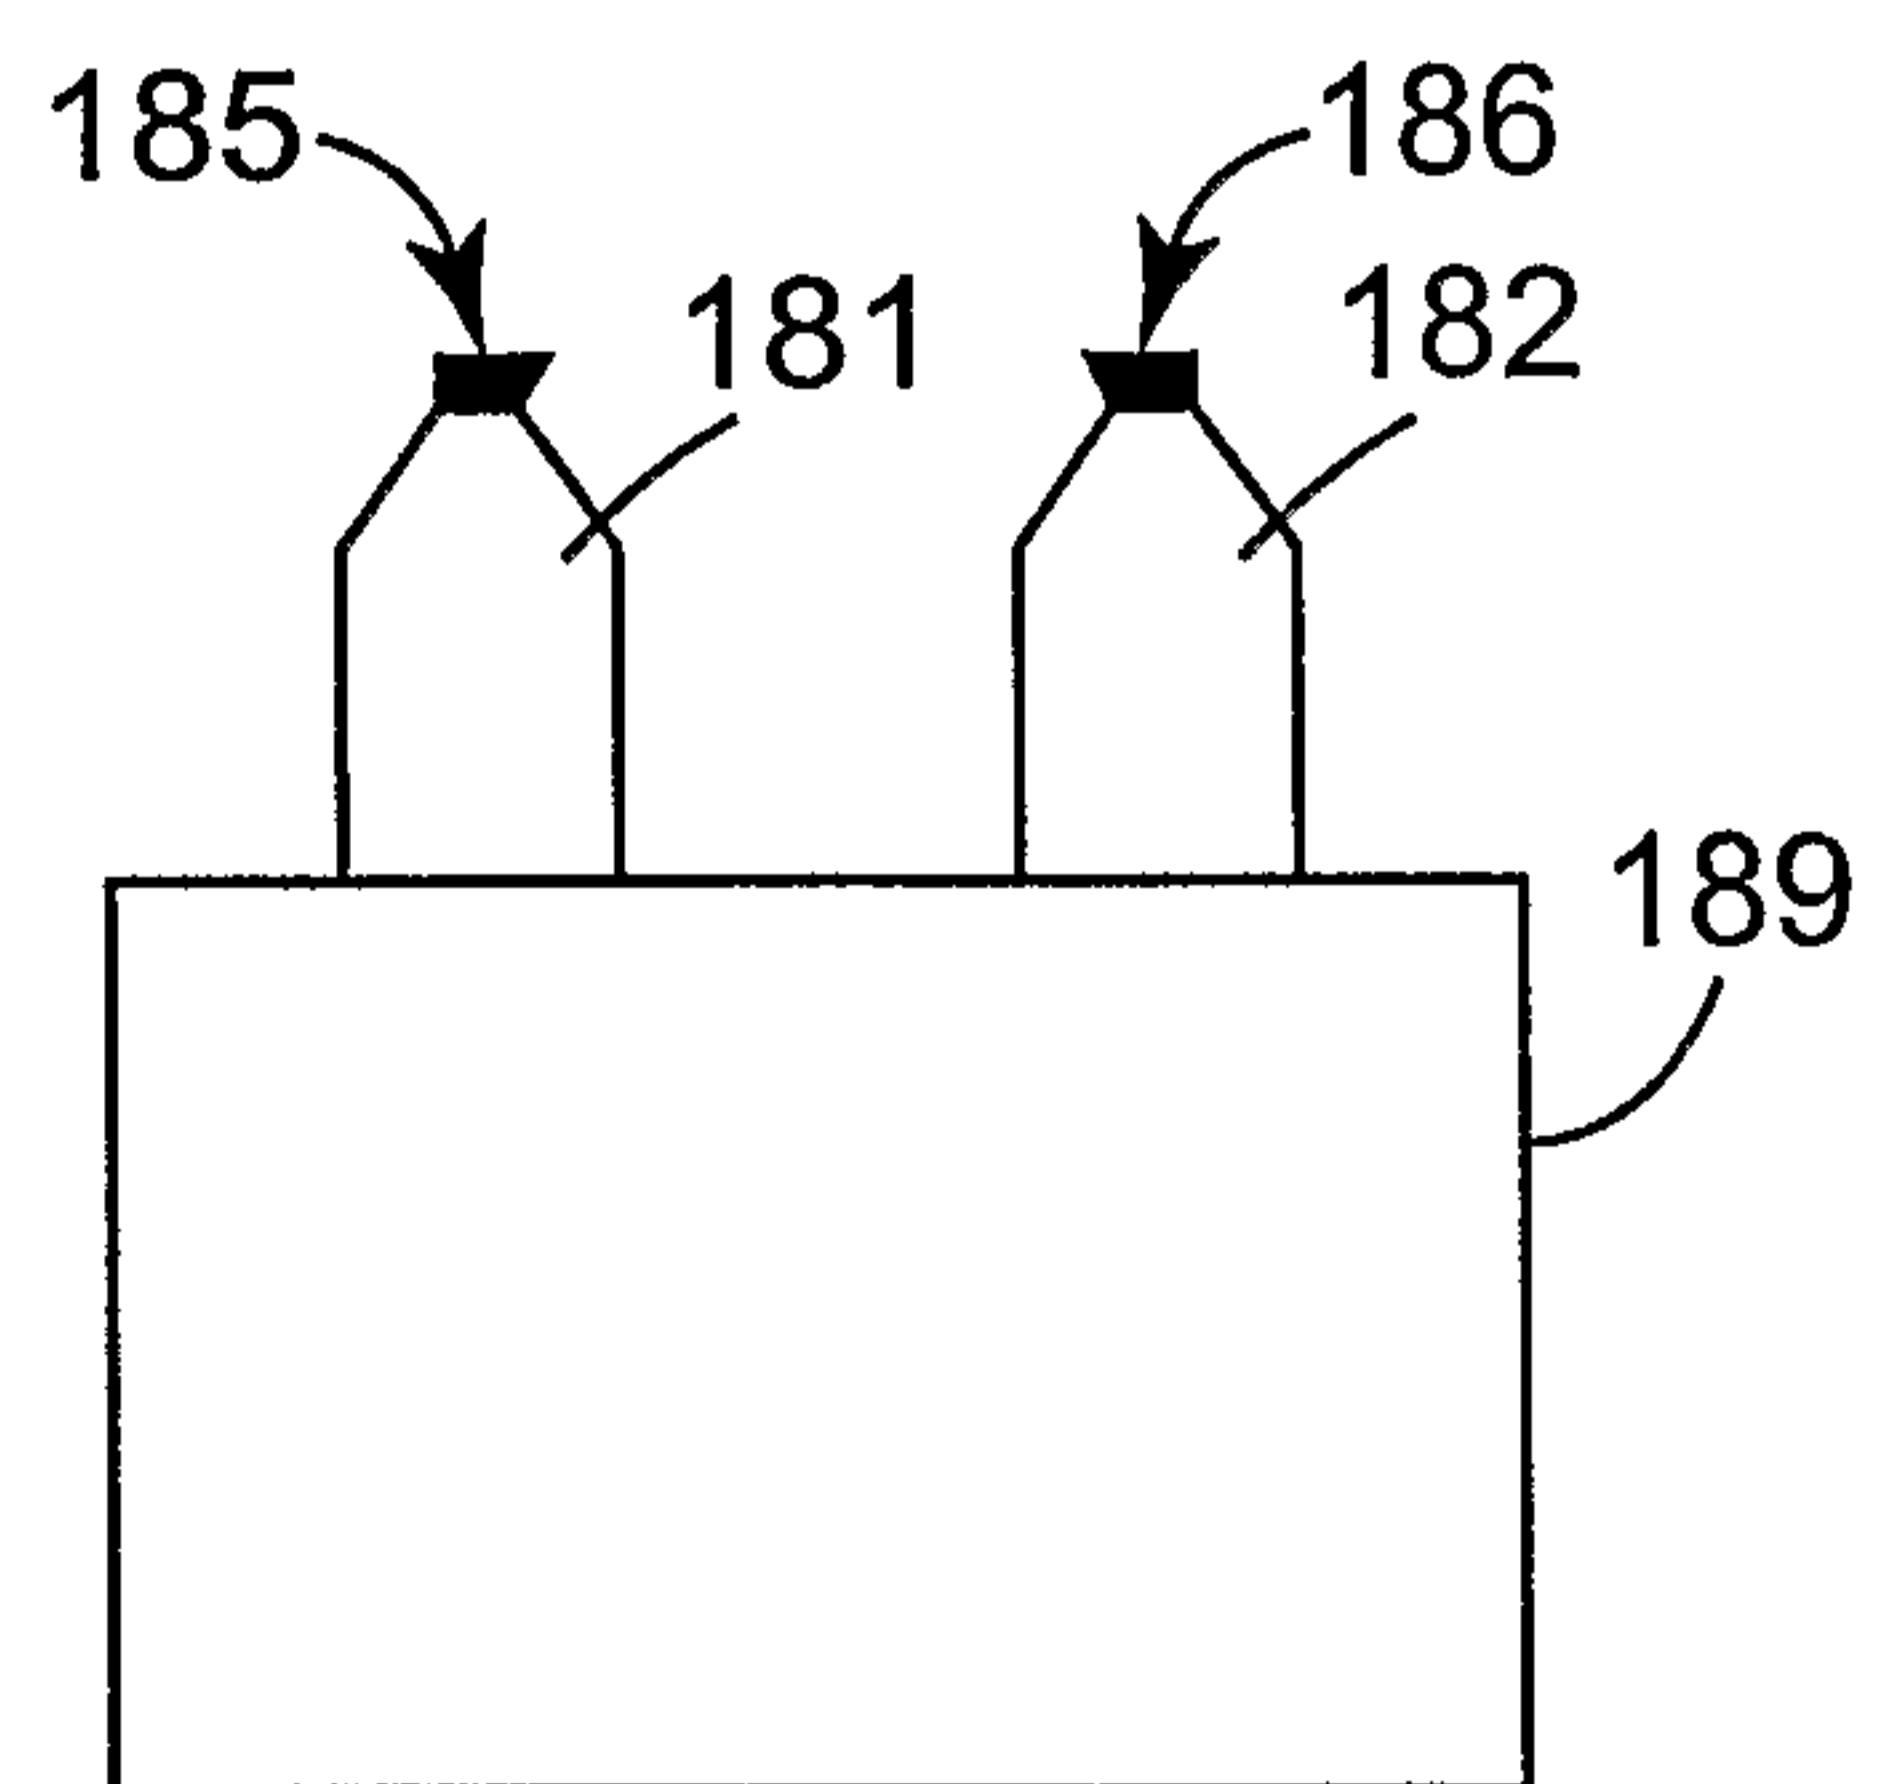
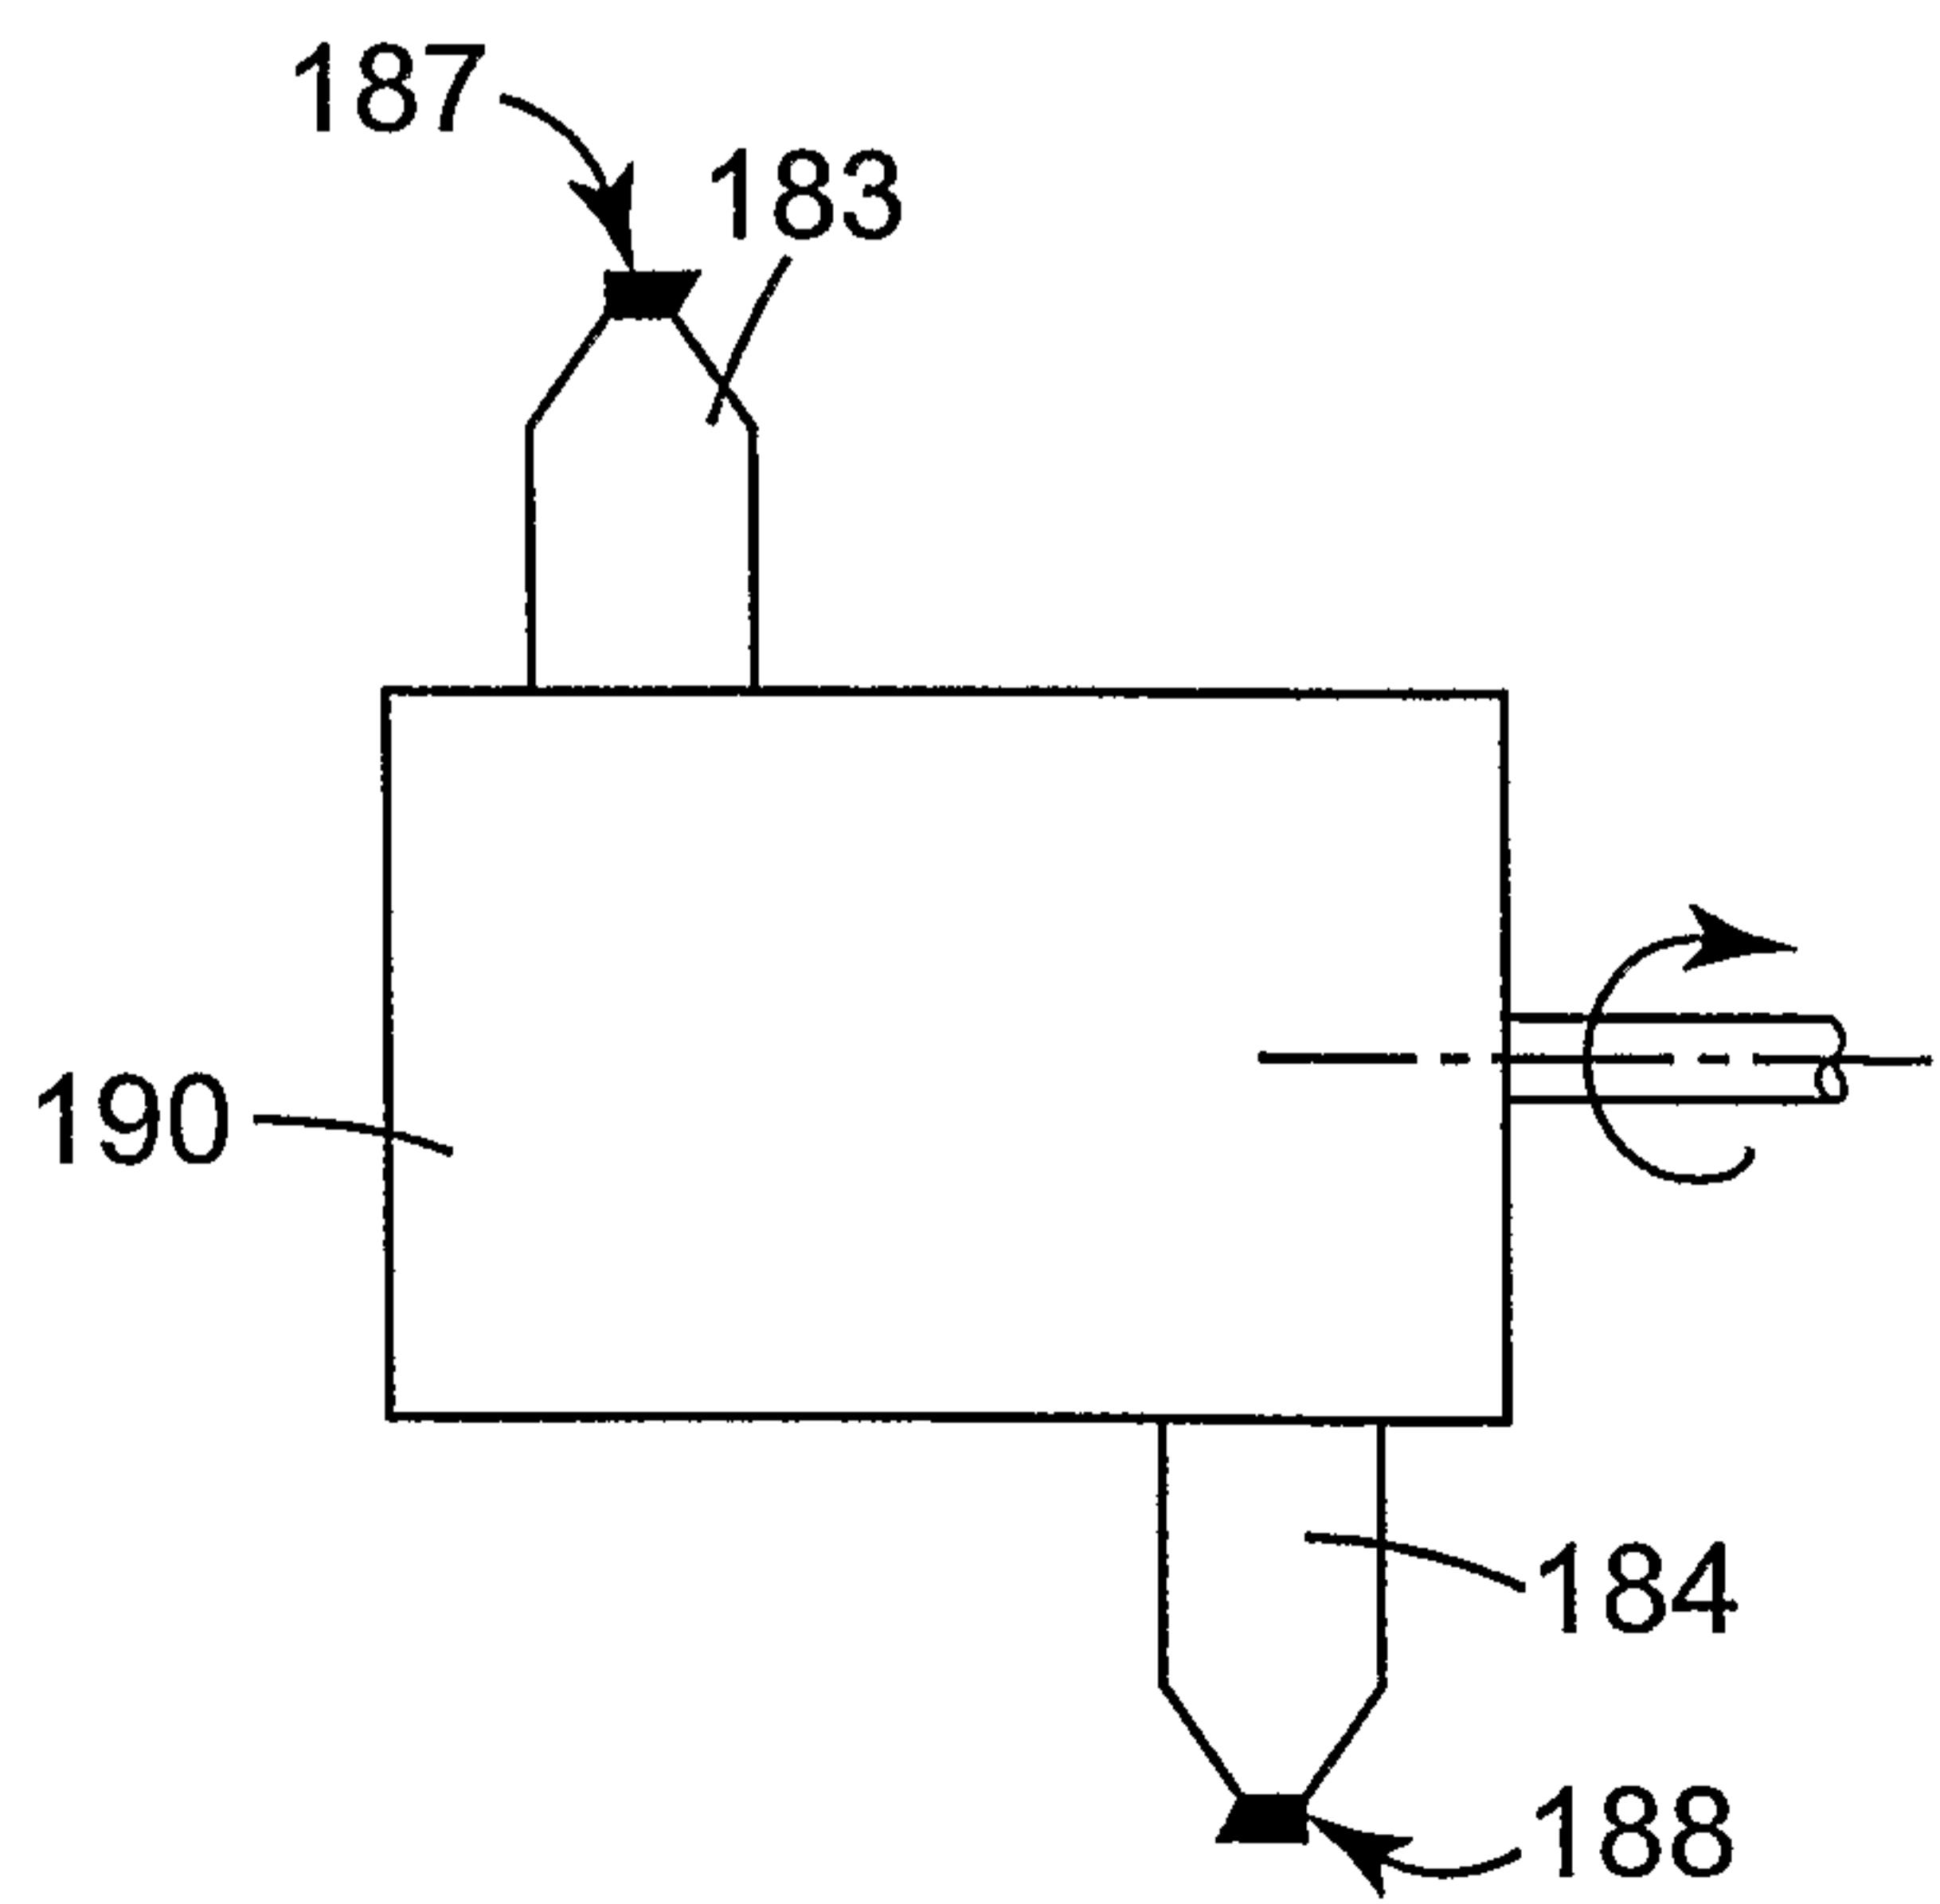
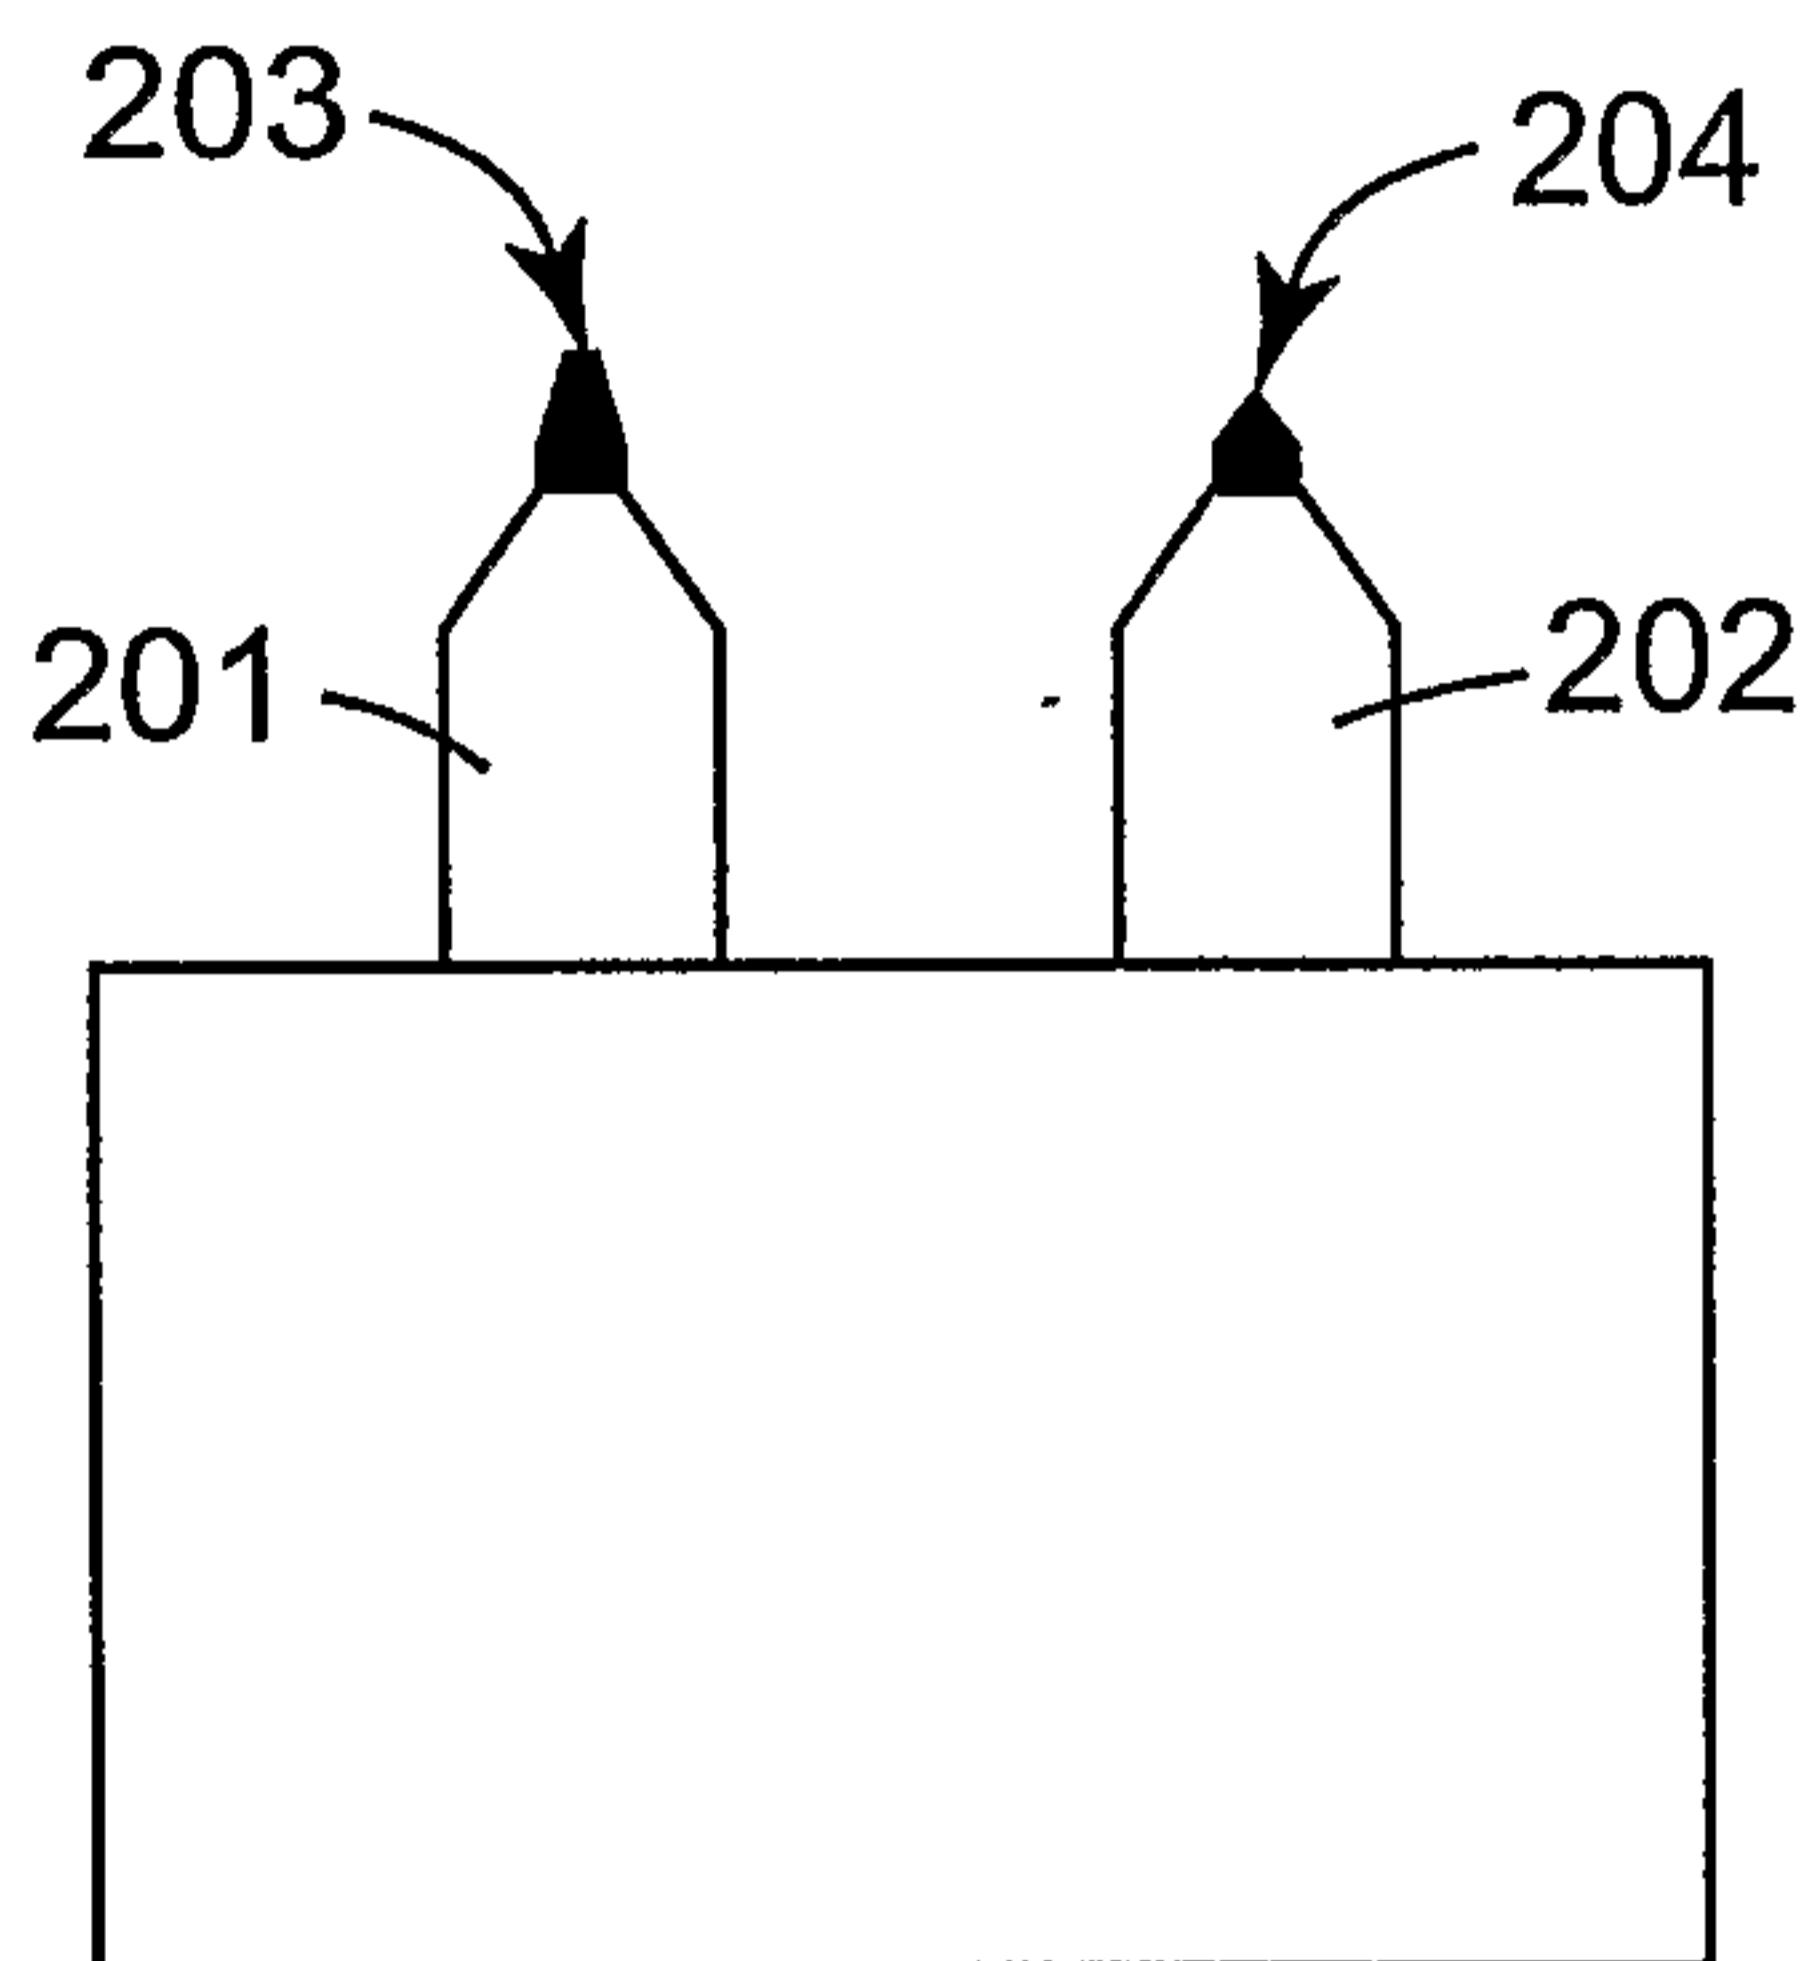
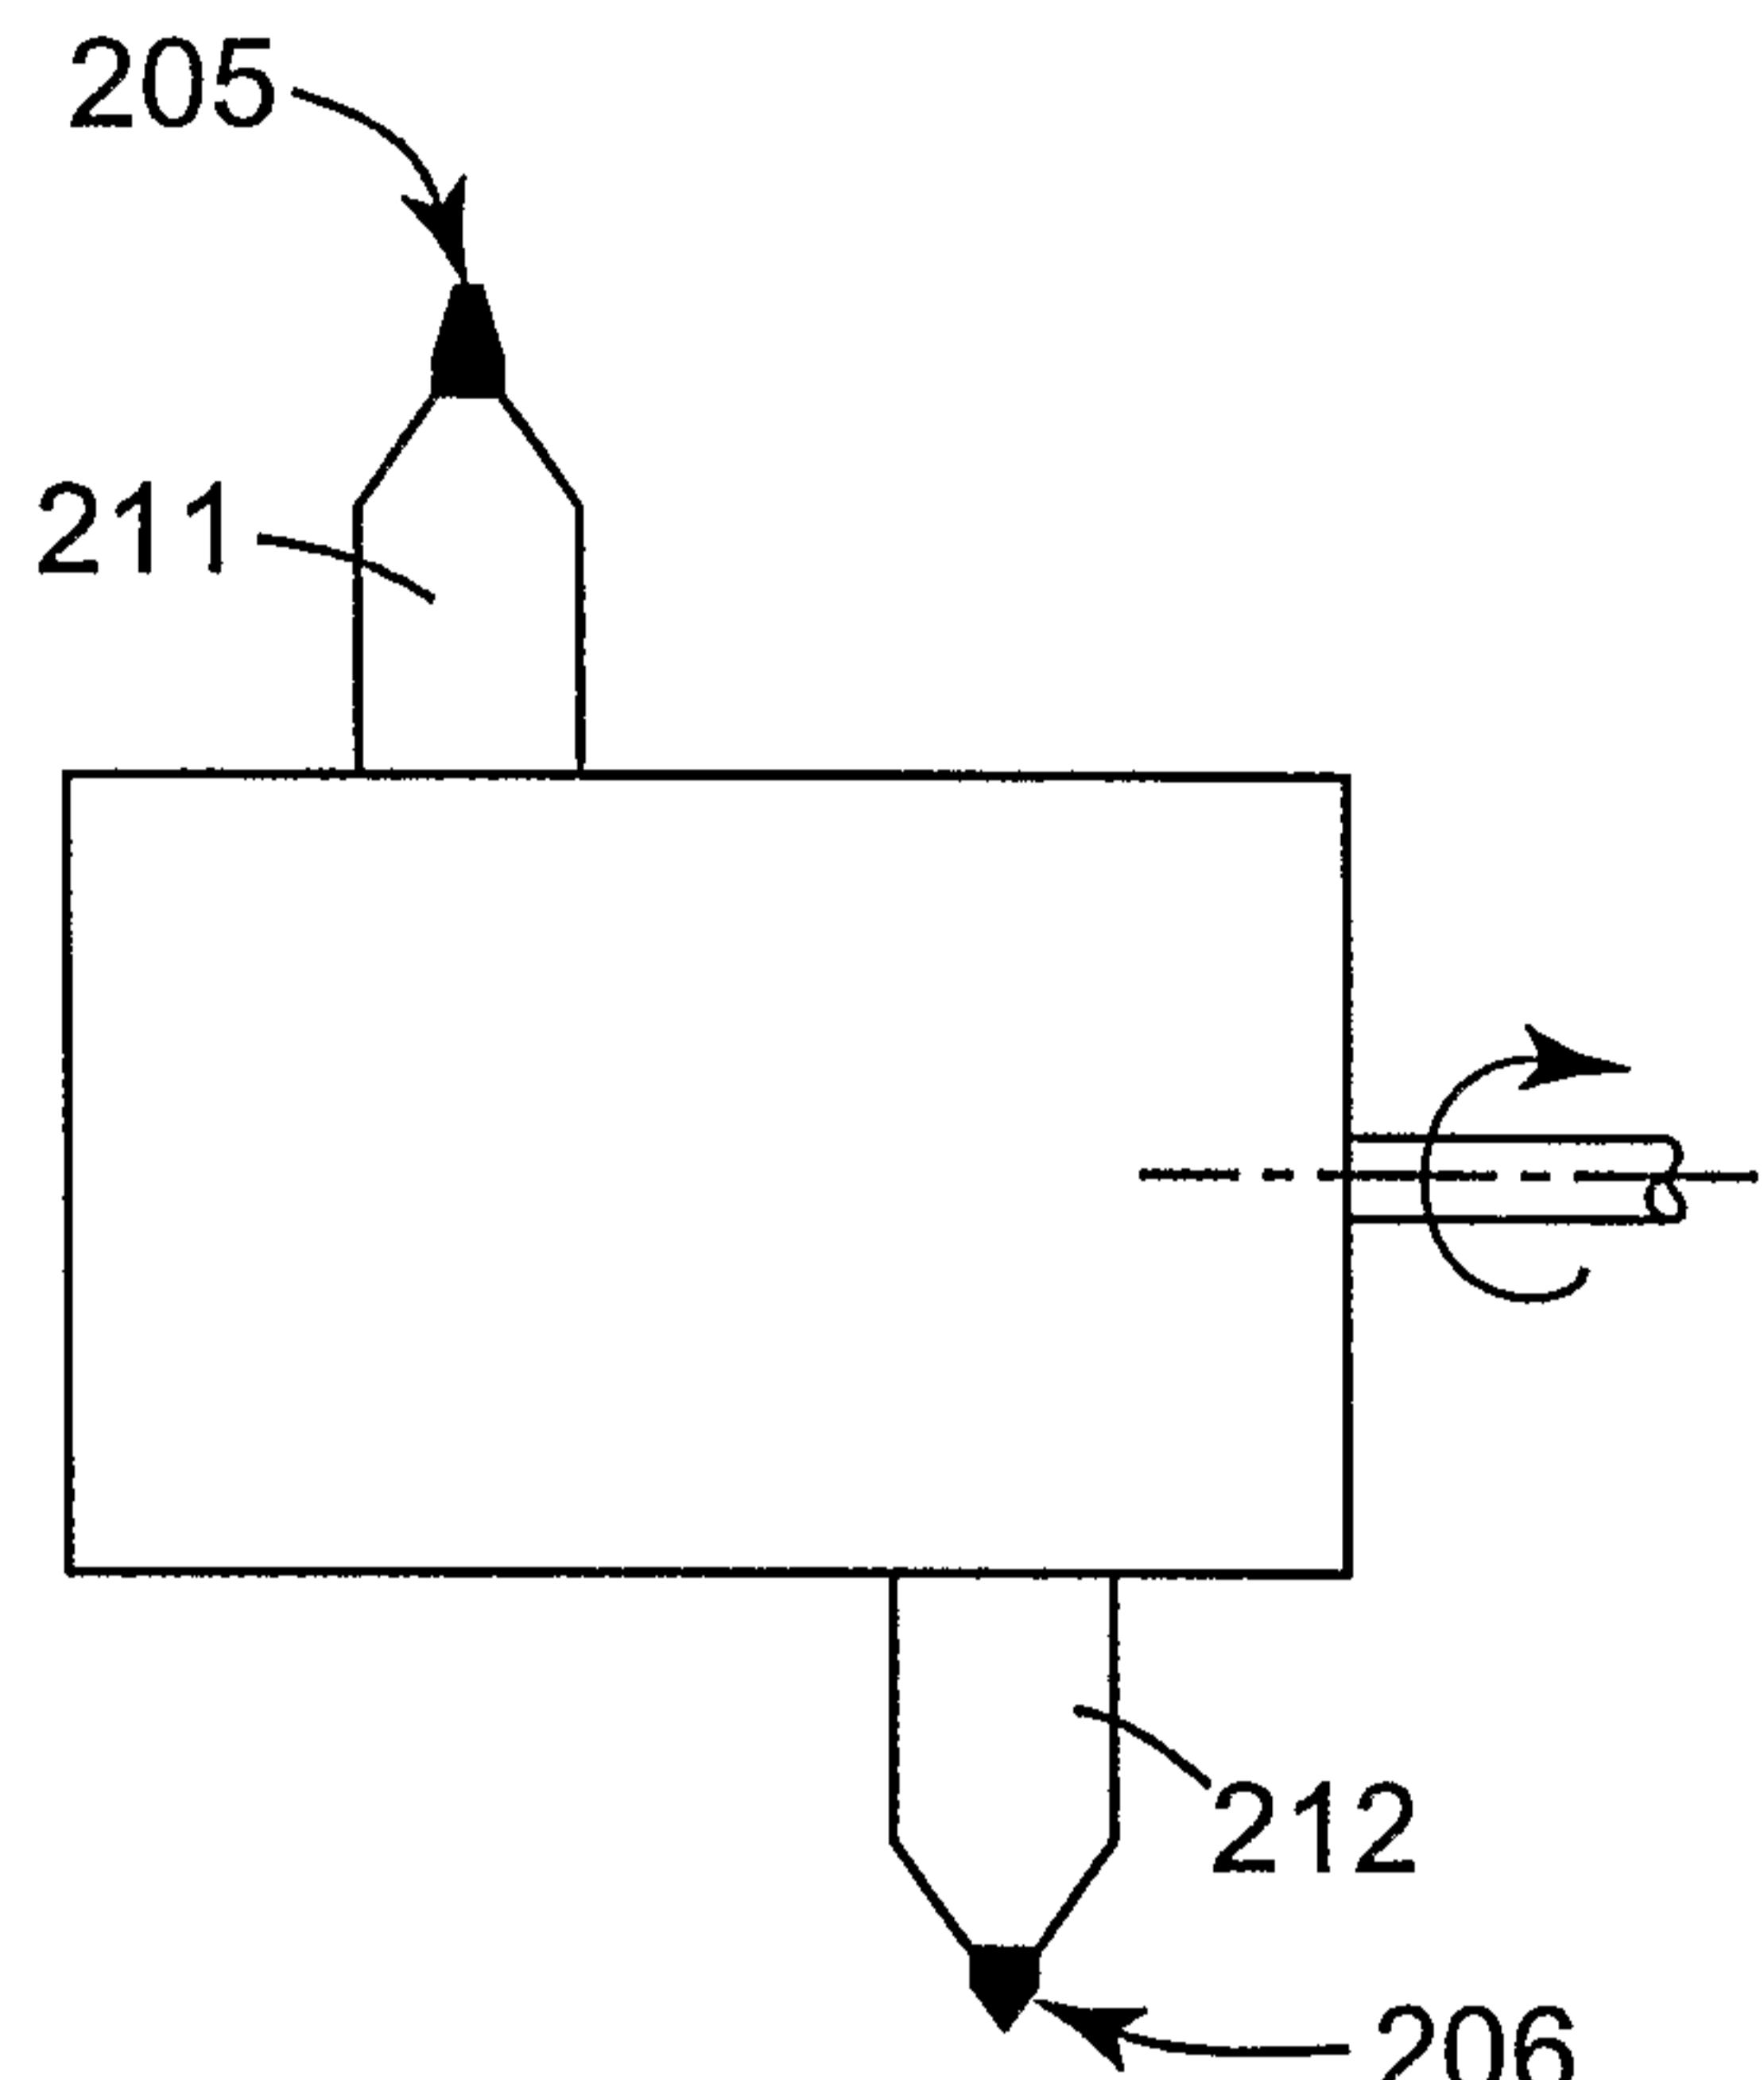
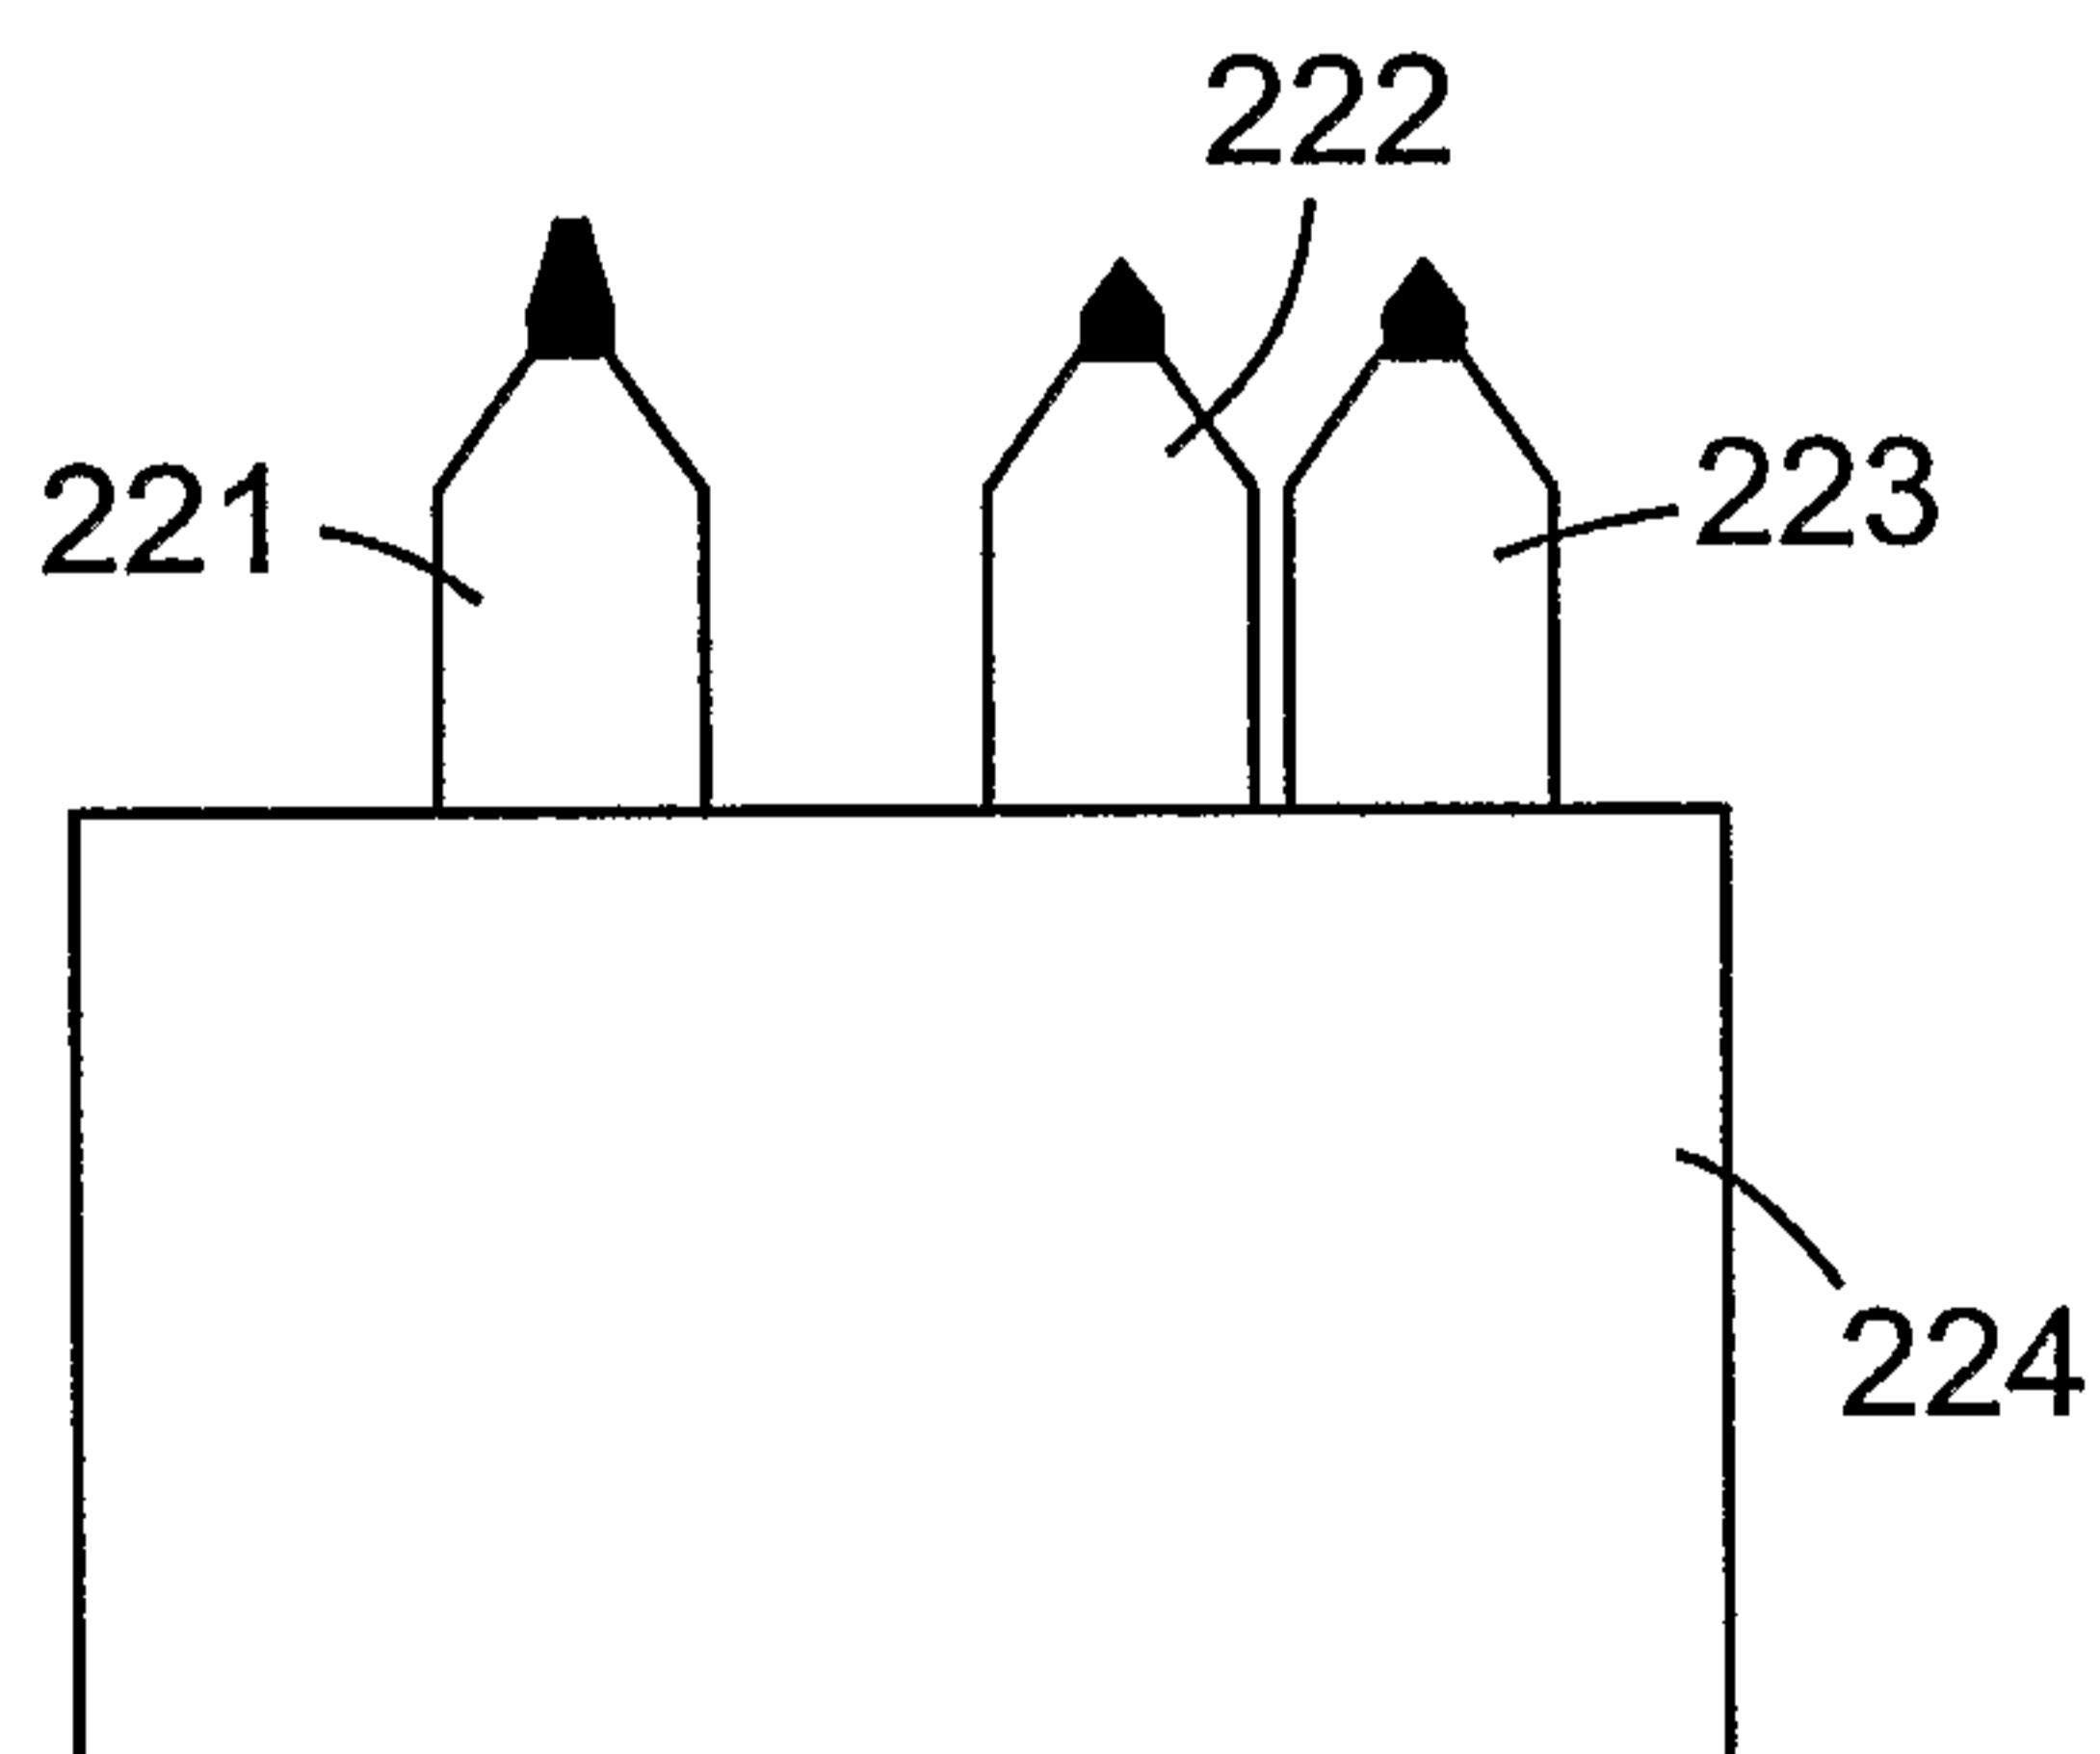
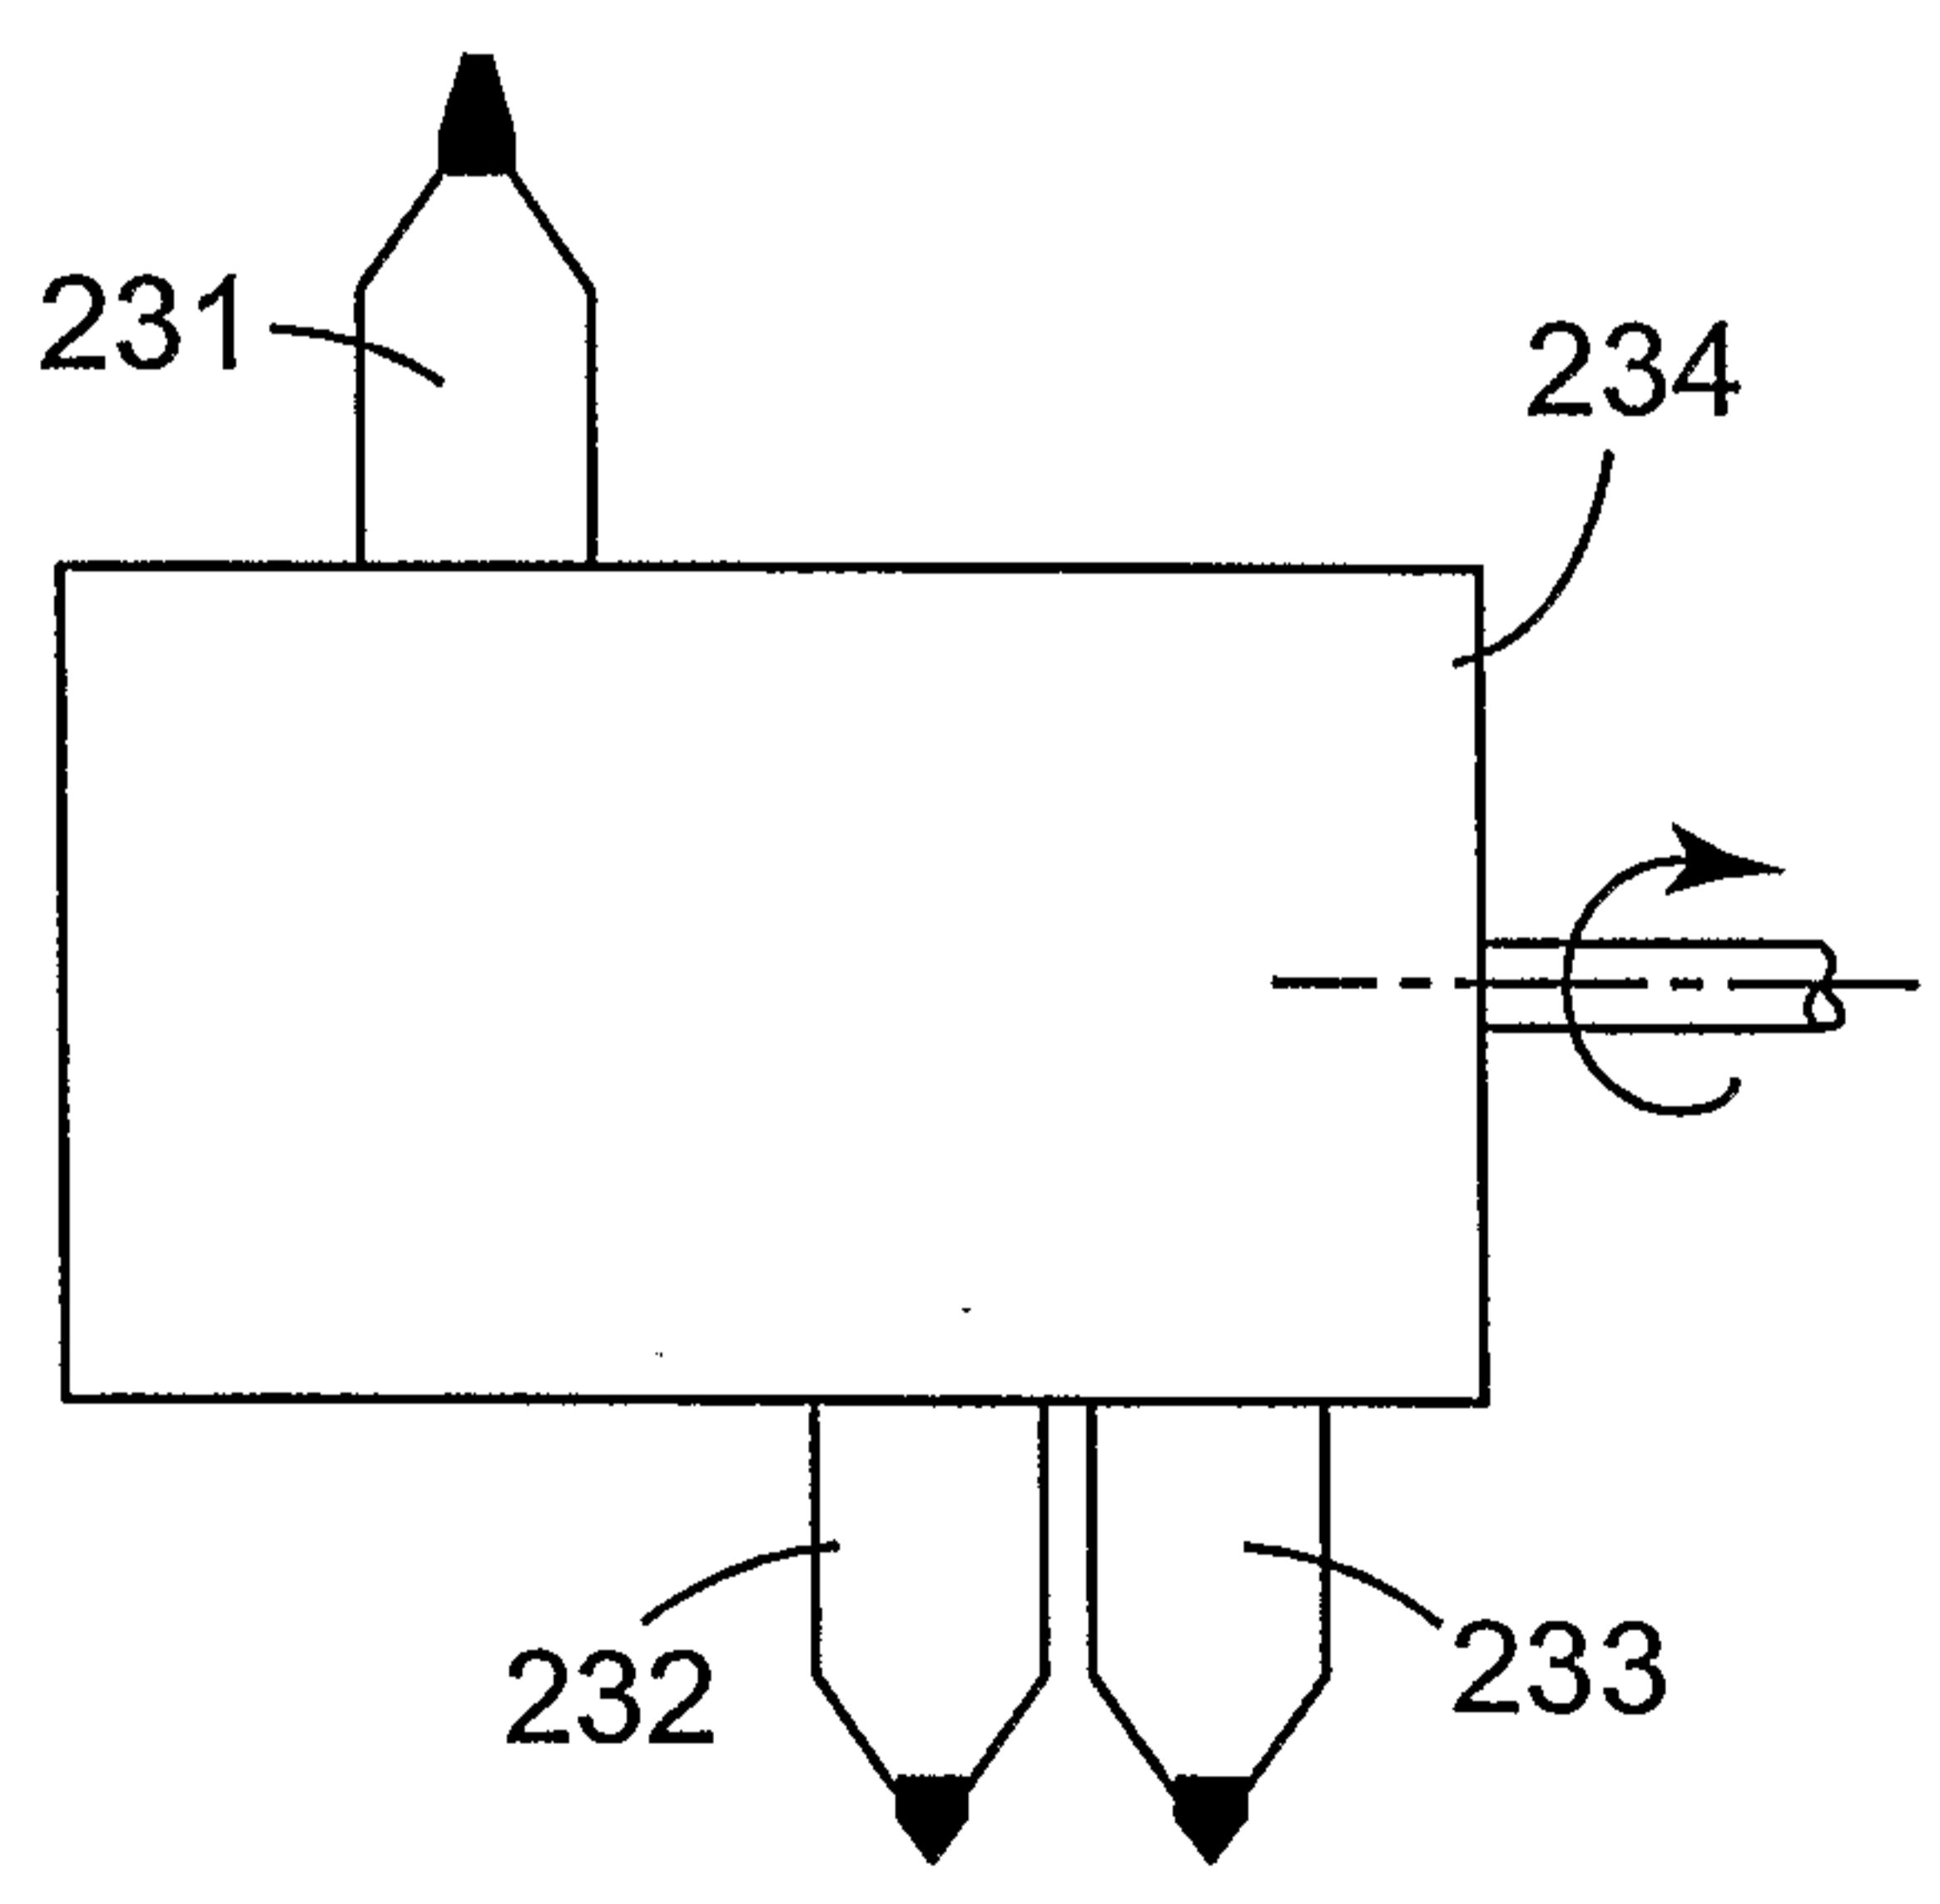


Fig. 13

**Fig. 14****Fig. 15****Fig. 16****Fig. 17****Fig. 18****Fig. 19**

13/14

*Fig. 20**Fig. 21**Fig. 22**Fig. 23*

14/14

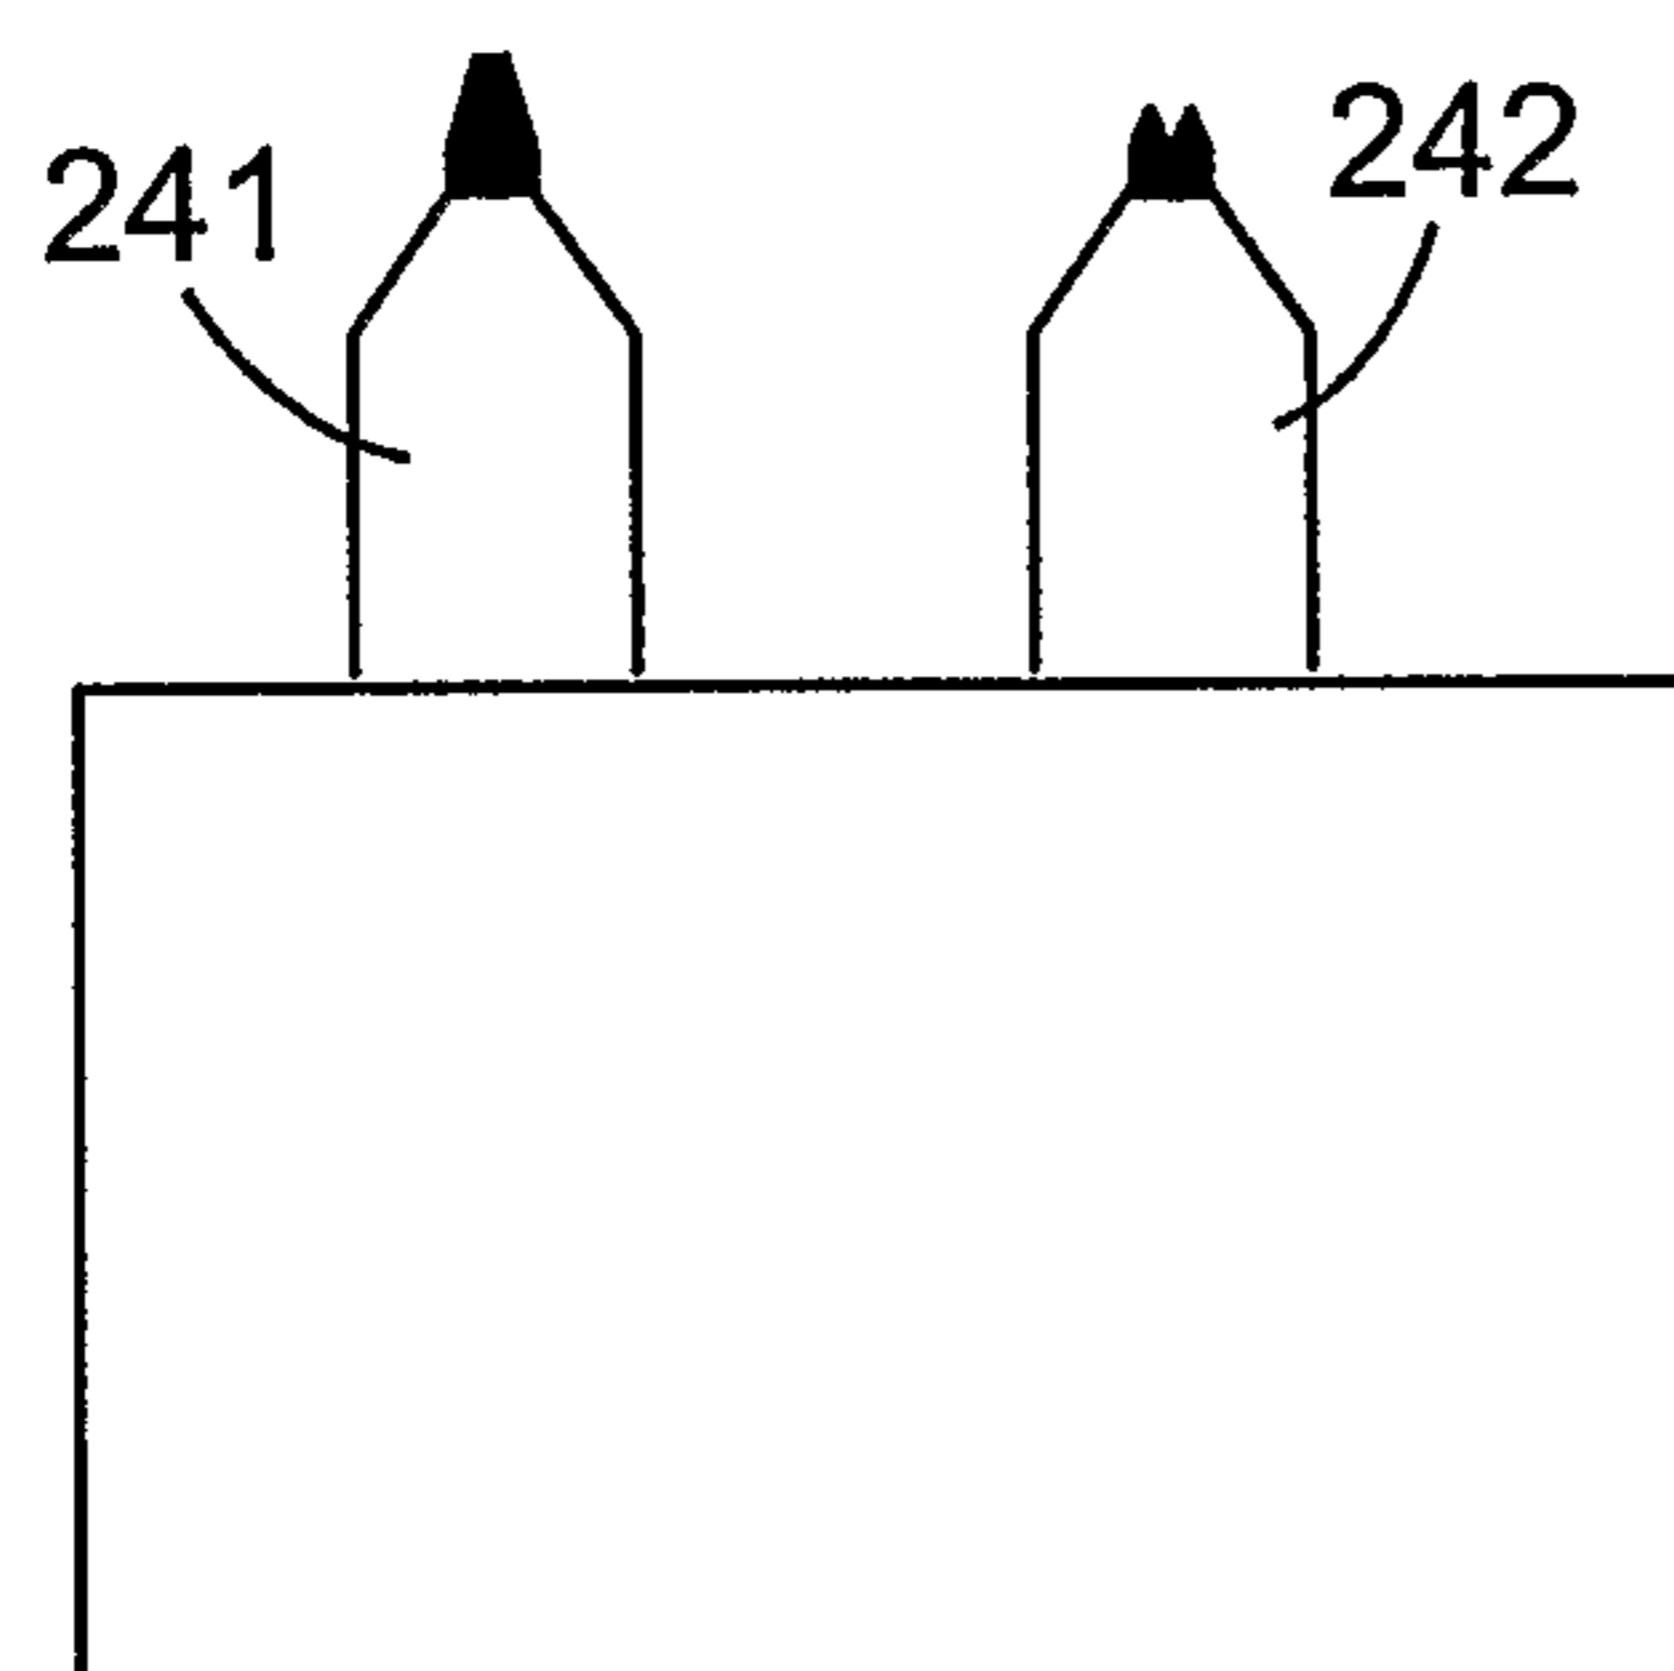


Fig. 24

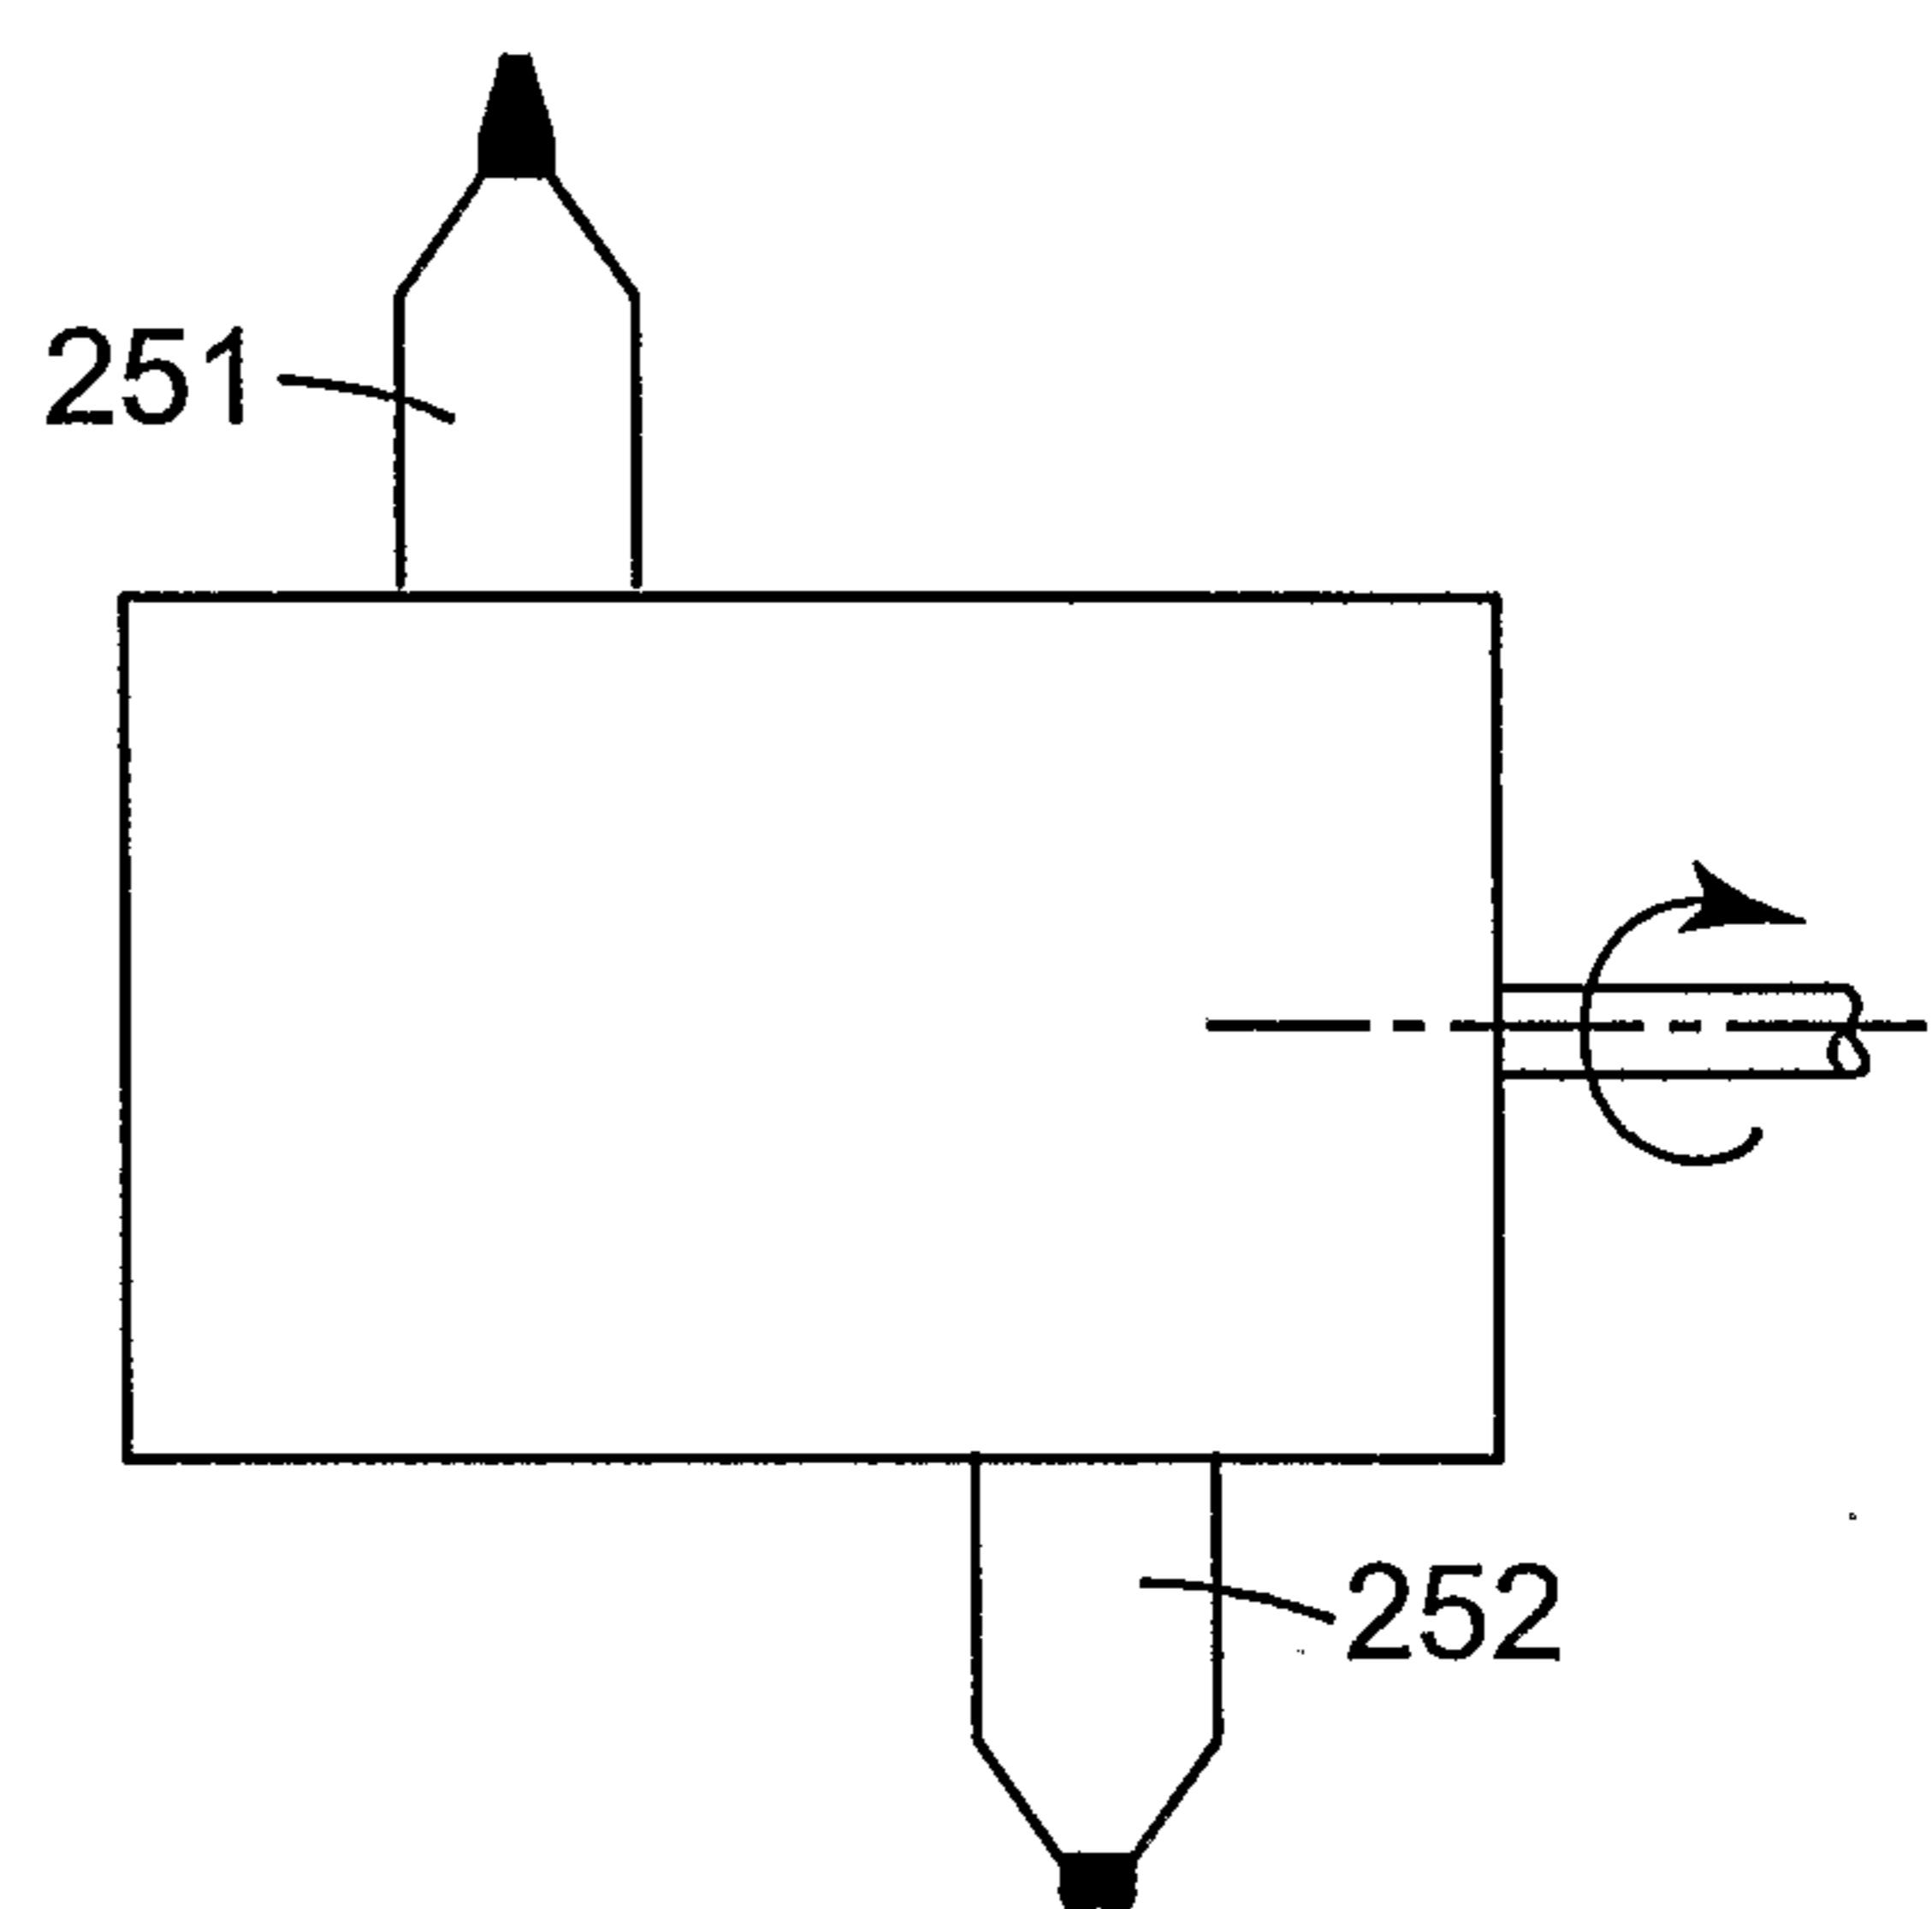


Fig. 25

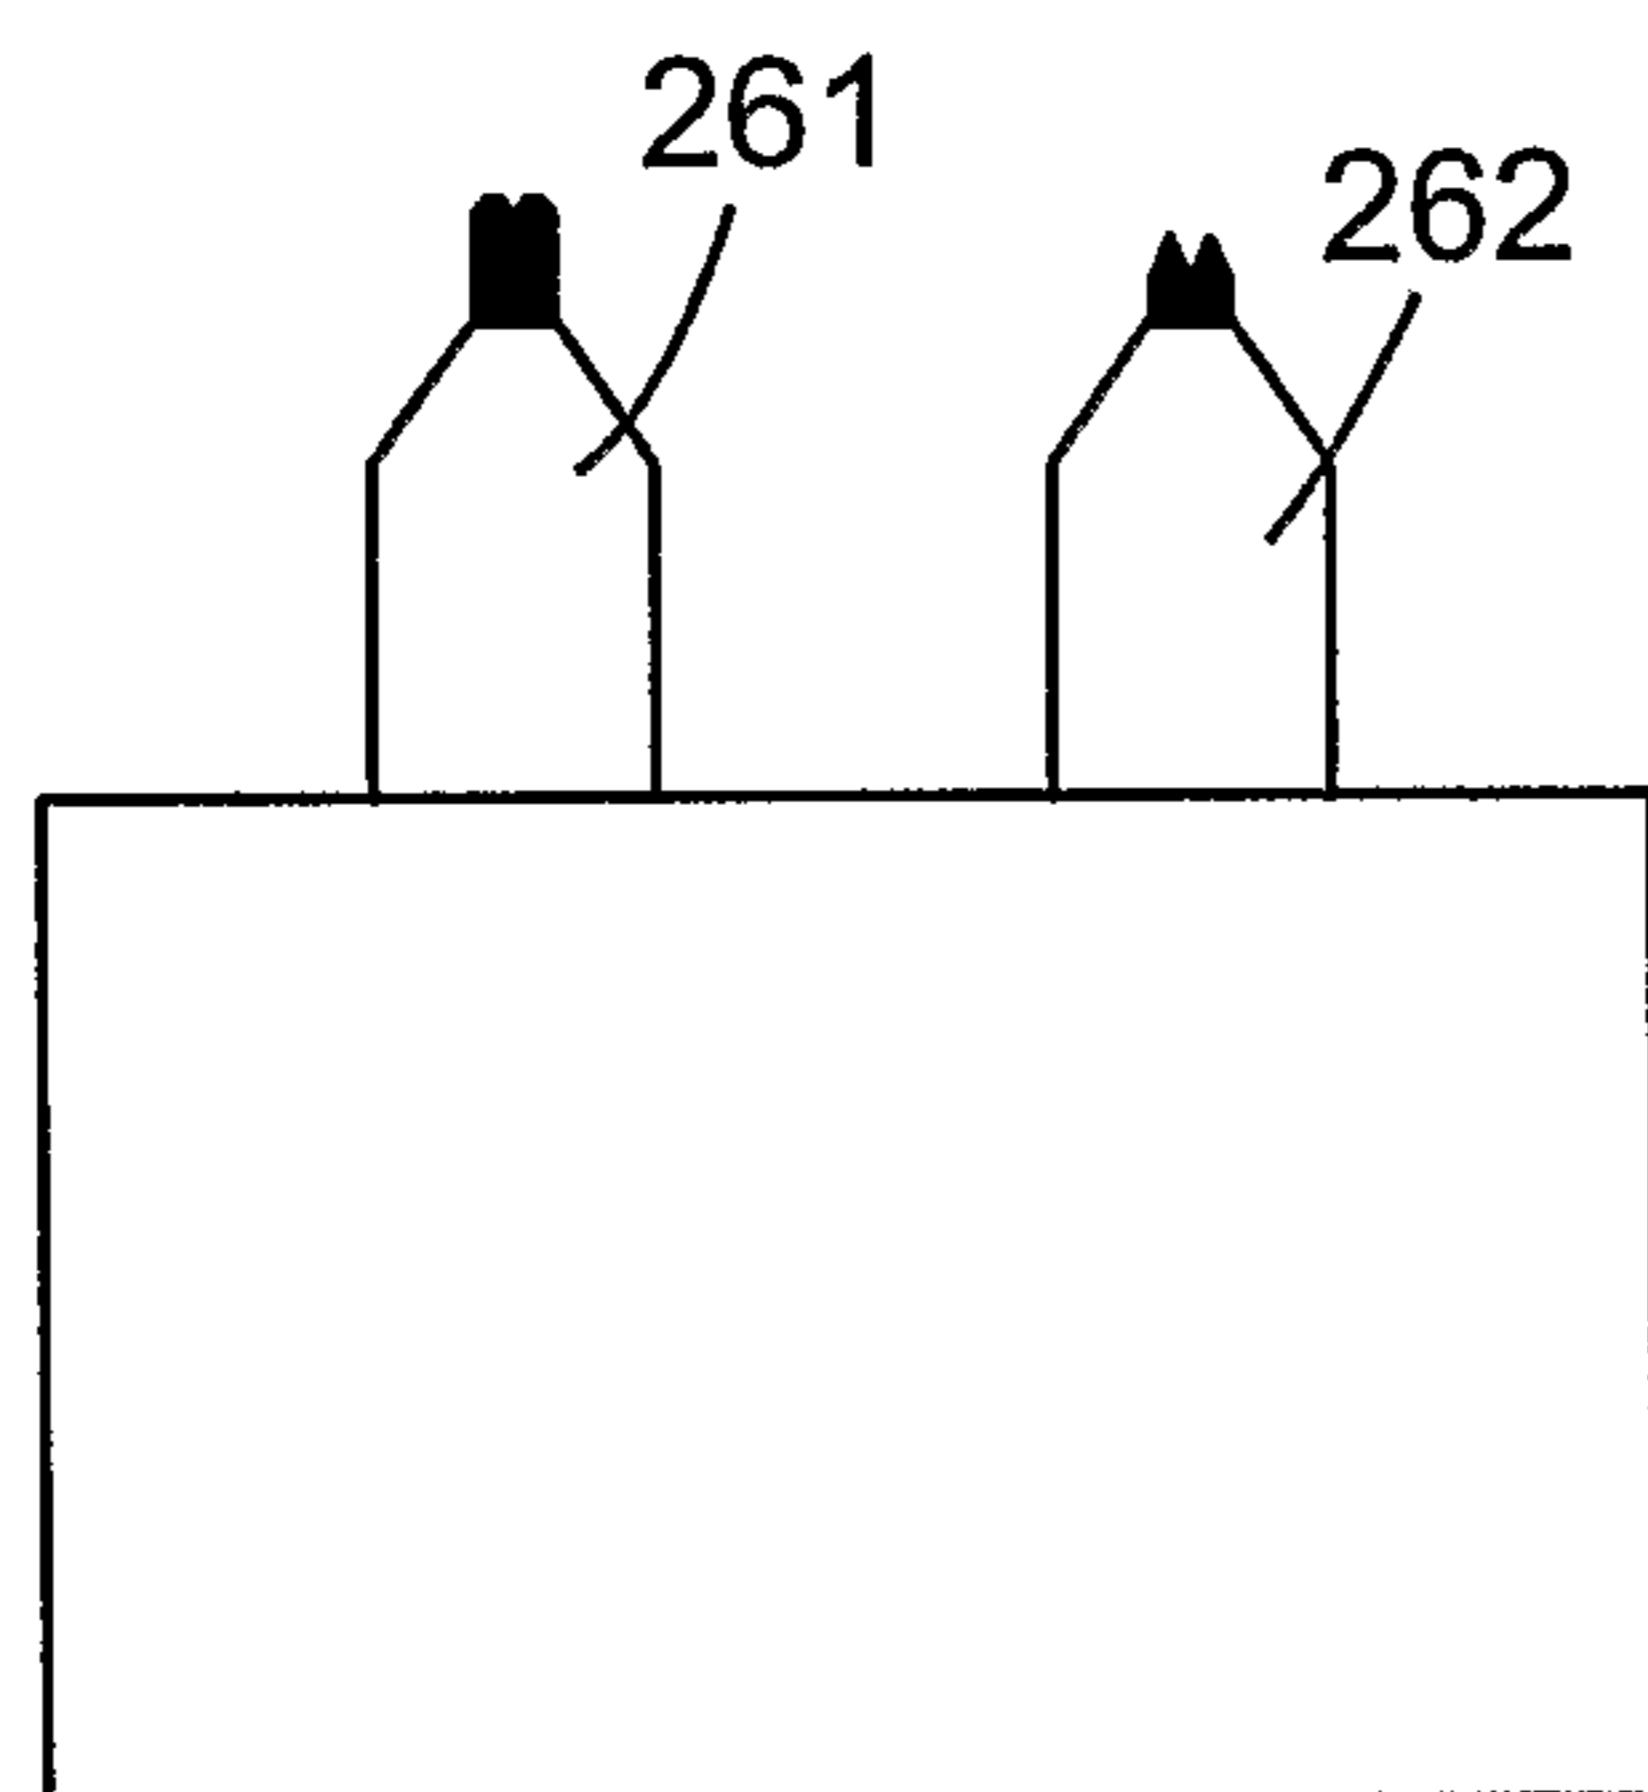


Fig. 26

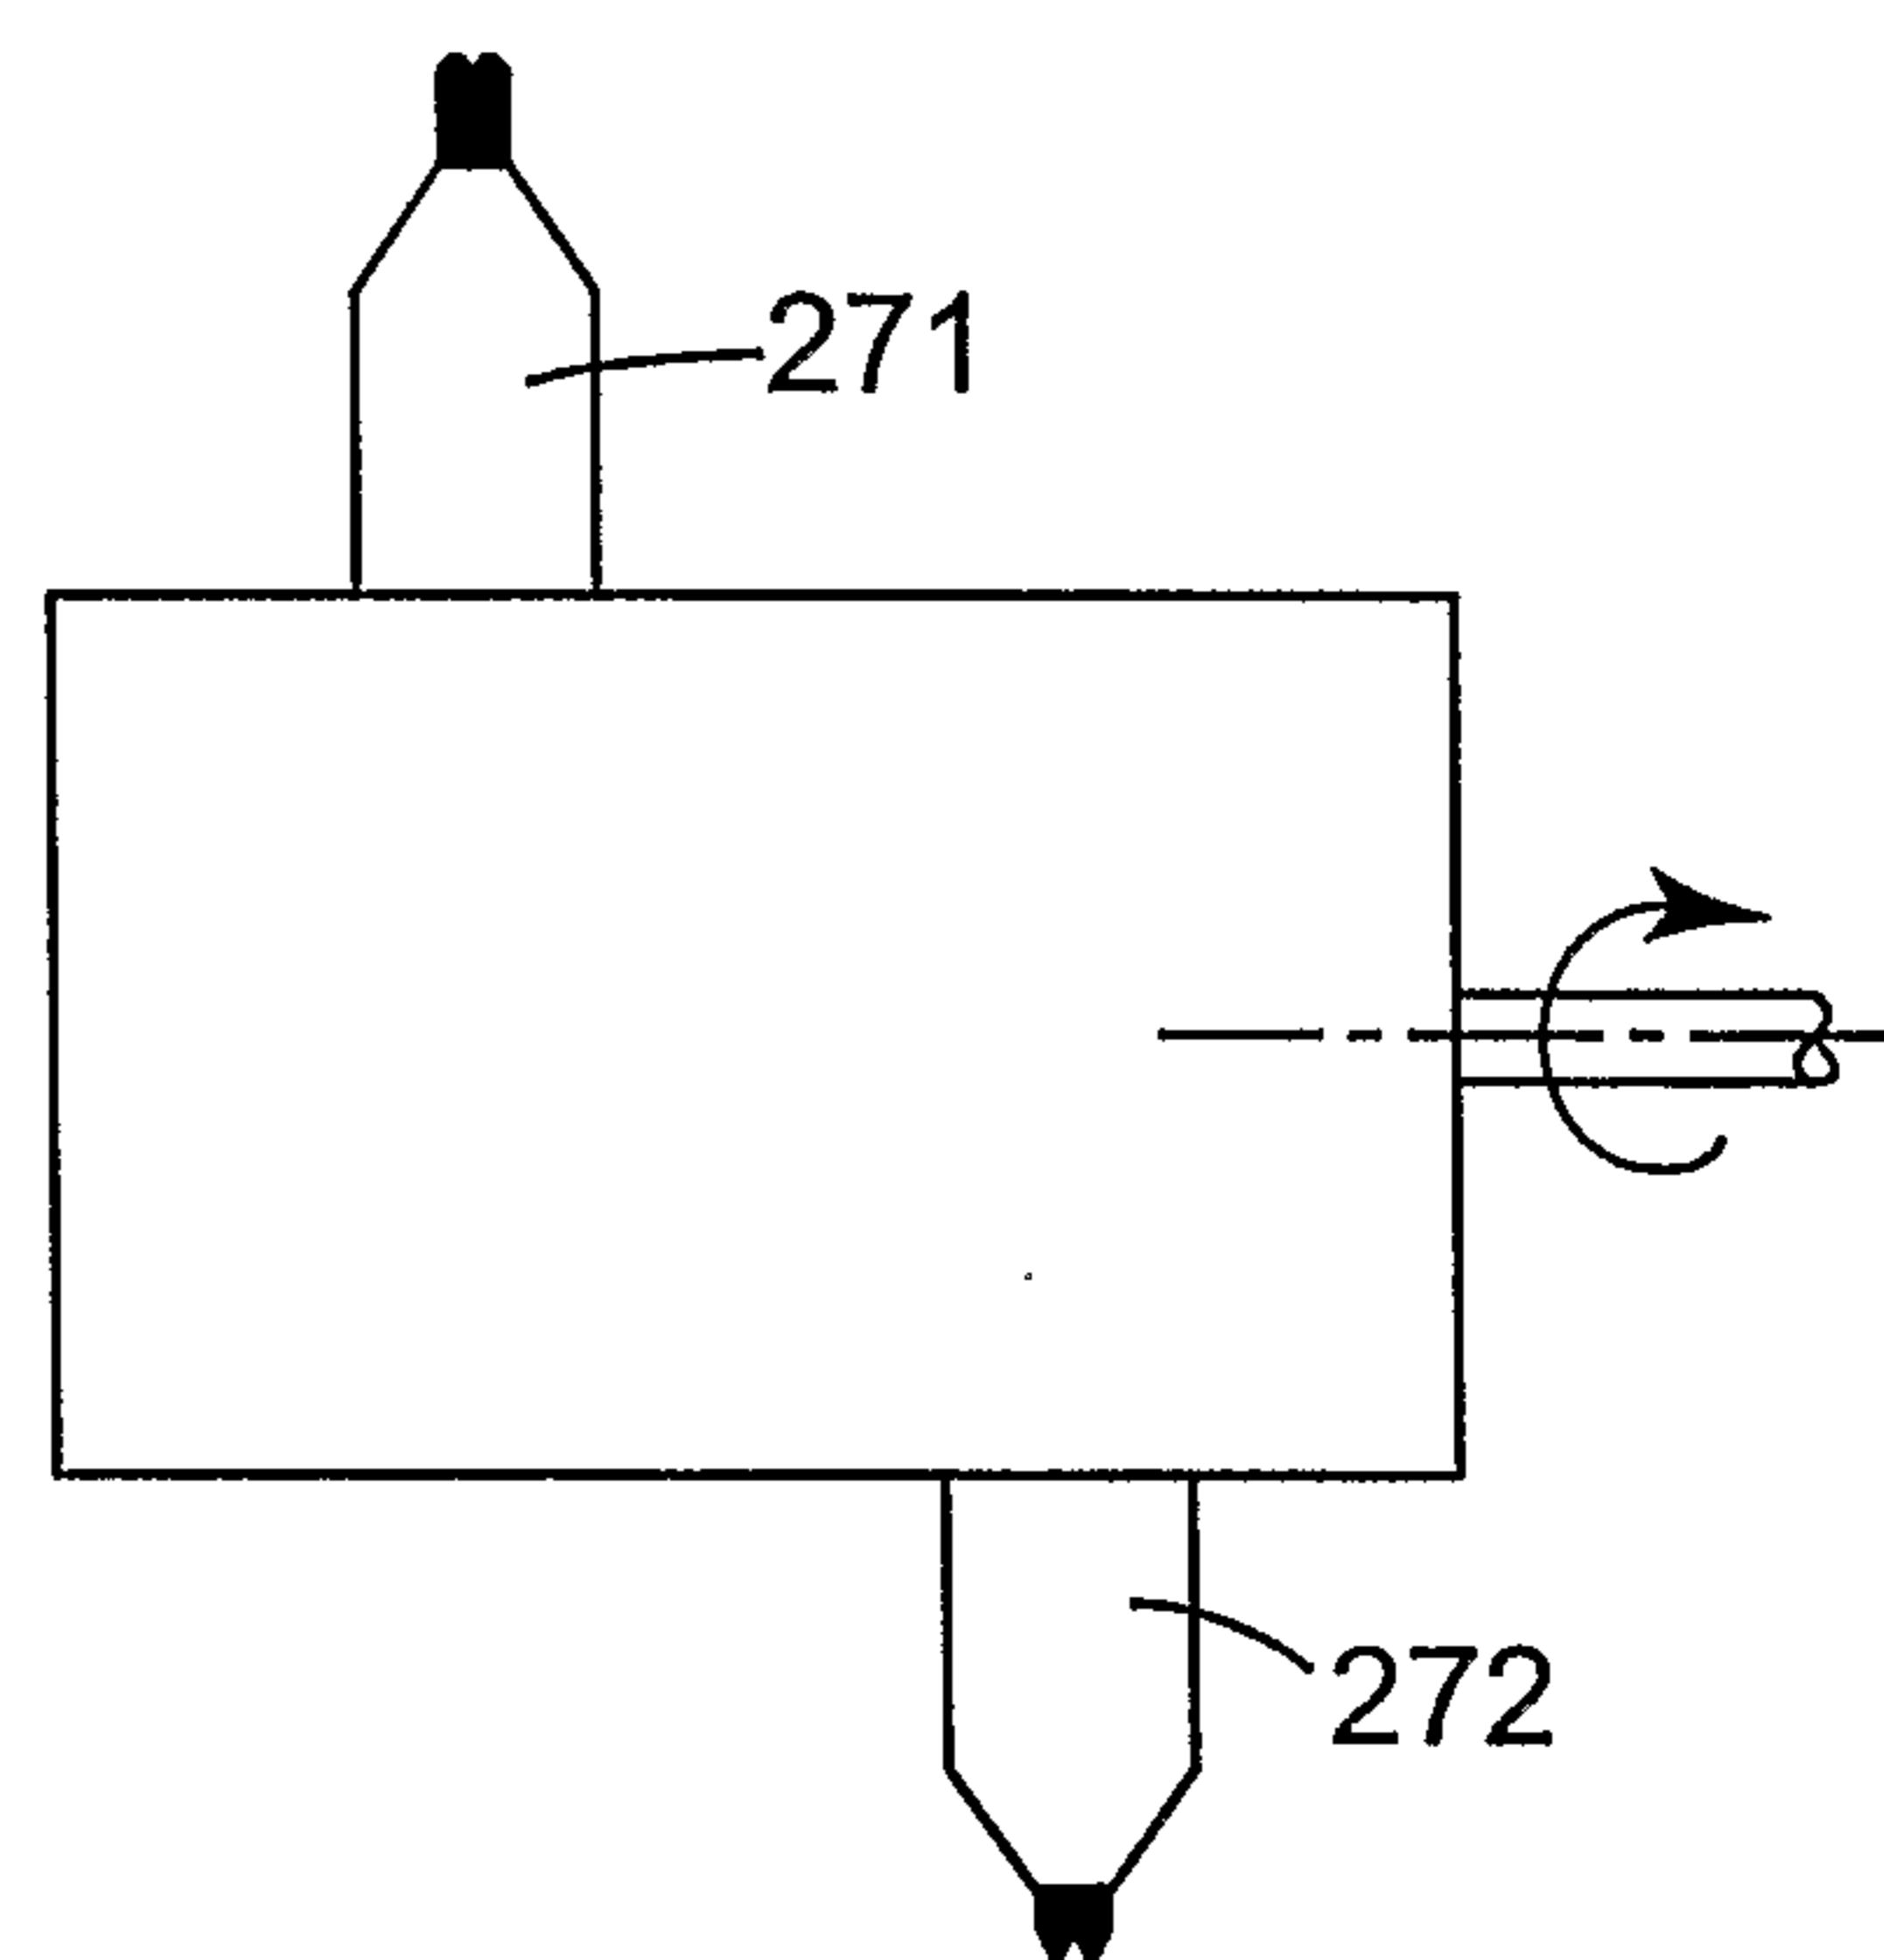


Fig. 27

$$Y = (X)^*(\text{Pitch})$$

