



(19) **United States**

(12) **Patent Application Publication**  
**Guha**

(10) **Pub. No.: US 2006/0080400 A1**

(43) **Pub. Date: Apr. 13, 2006**

(54) **METHOD AND SYSTEM FOR EFFICIENTLY  
STORING WEB PAGES FOR QUICK  
DOWNLOADING AT A REMOTE DEVICE**

(52) **U.S. Cl. .... 709/216**

(75) **Inventor: Alope Guha, Louisville, CO (US)**

(57) **ABSTRACT**

Correspondence Address:

**STORAGE TECHNOLOGY CORPORATION  
ONE STORAGE TEK DRIVE, MS-4309  
LOUISVILLE, CO 80028-4309 (US)**

(73) **Assignee: Storage Technology Corporation, Lou-  
isville, CO**

(21) **Appl. No.: 11/289,733**

(22) **Filed: Nov. 29, 2005**


**Related U.S. Application Data**


(63) Continuation of application No. 09/887,803, filed on Jun. 22, 2001, now Pat. No. 7,007,072, which is a continuation of application No. 09/362,013, filed on Jul. 27, 1999, now Pat. No. 6,272,534, which is a continuation of application No. 09/034,968, filed on Mar. 4, 1998, now abandoned.

**Publication Classification**


(51) **Int. Cl.**  
**G06F 15/167 (2006.01)**

A web server for efficiently storing web pages for quick downloading at a remote device comprises a fast memory, a disk memory and a storage device. The fast memory stores a first plurality of web pages and receives a first signal from the remote device indicating selection of one of the first plurality of web pages. The disk memory stores a second plurality of web pages linked to the first plurality of web pages and transfers all of the second plurality of web pages that are linked to the selected one of the first plurality of web pages to the fast memory in response to the first signal. The disk memory also transmits a second signal to the storage device in response to the first signal. The storage device stores a third plurality of web pages linked to the first plurality of web pages and transfers all of the third plurality of web pages that are linked to the selected ones of the second plurality of web pages to the disk memory in response to the second signal. In addition, the fast memory deletes each of the non-selected first plurality of web pages in response to the first signal so as to allow for memory reuse and to aid in quickly downloading selected web pages to the remote device.

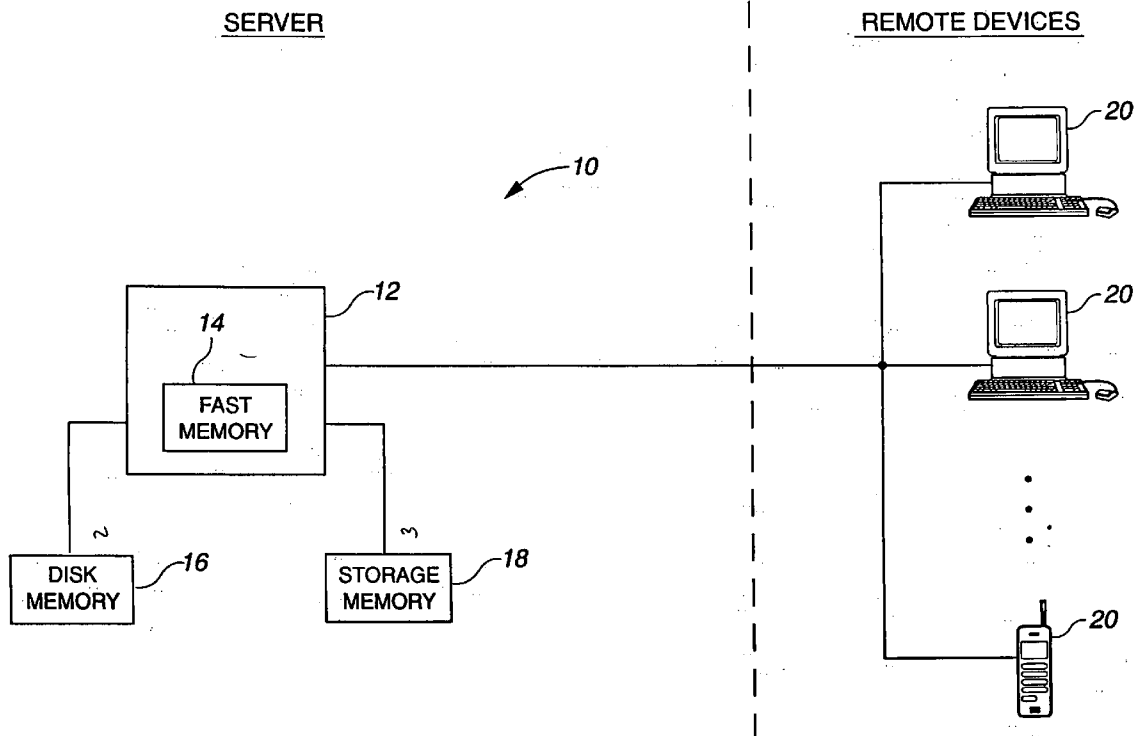


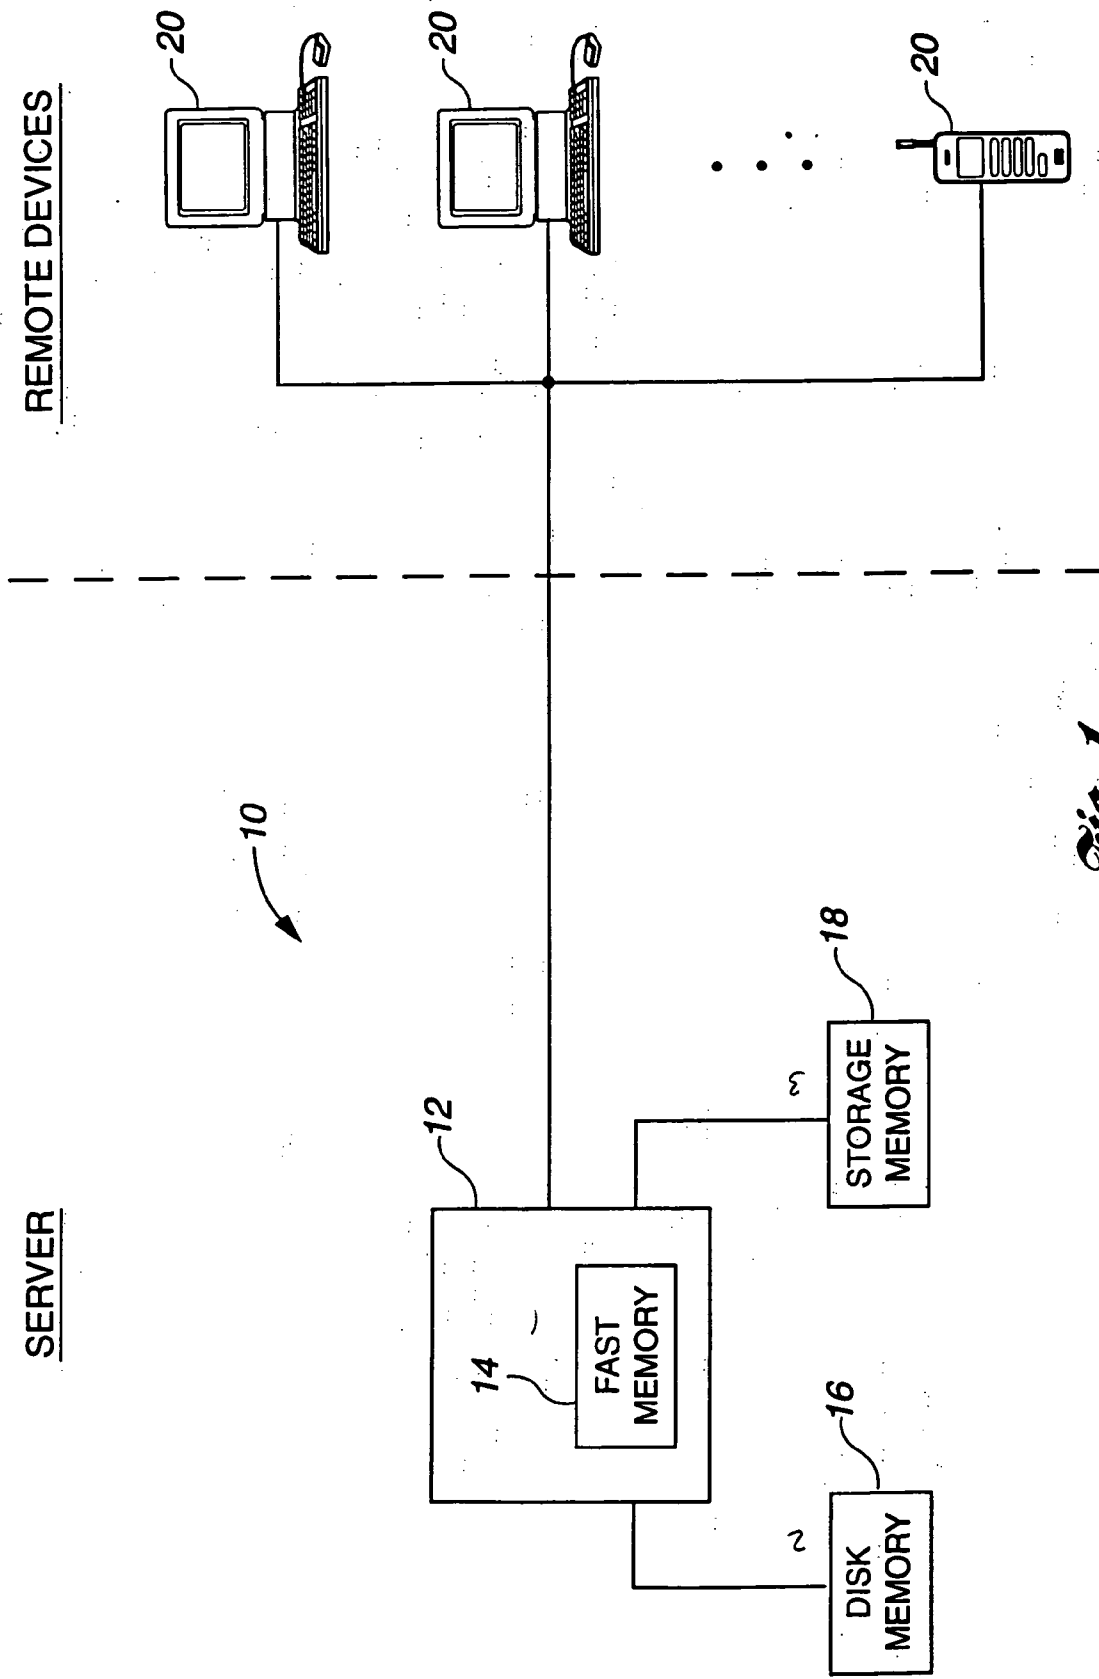


*Fig. 1*

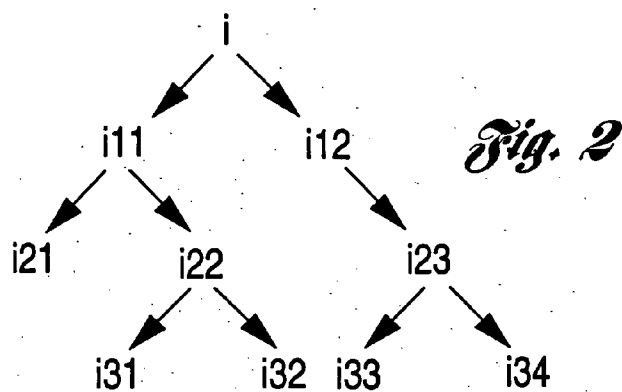

*Fig. 2*

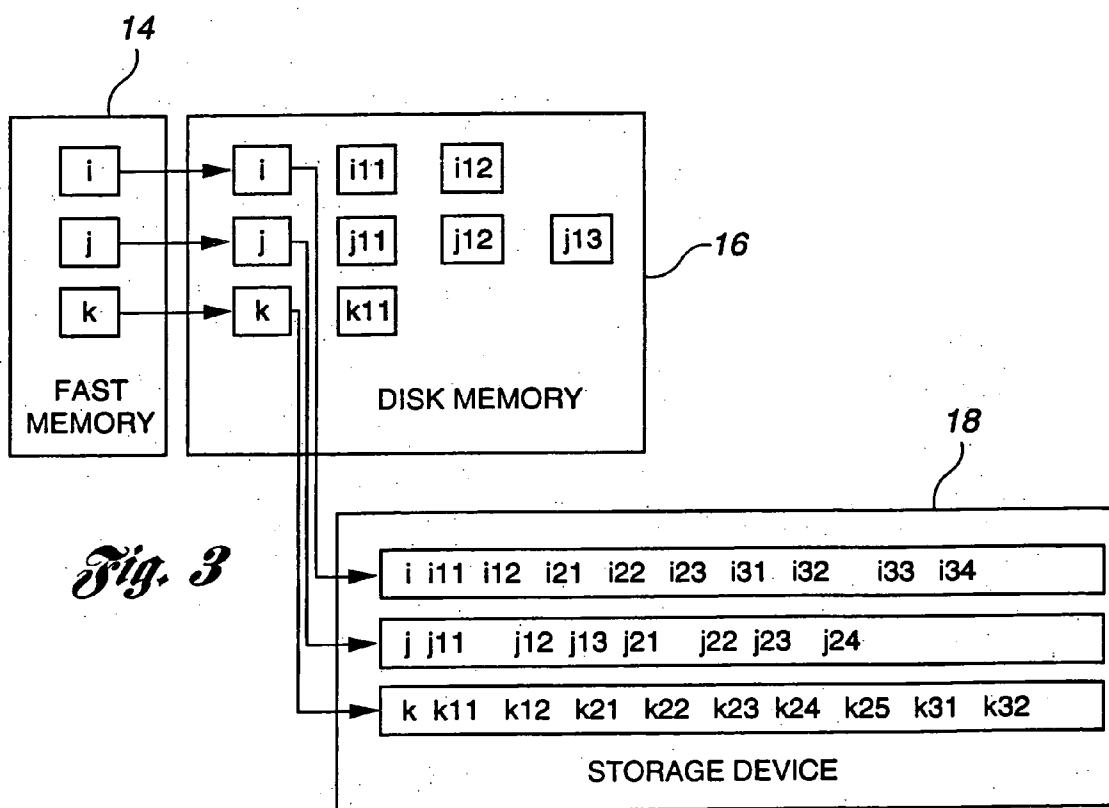

*Fig. 3*

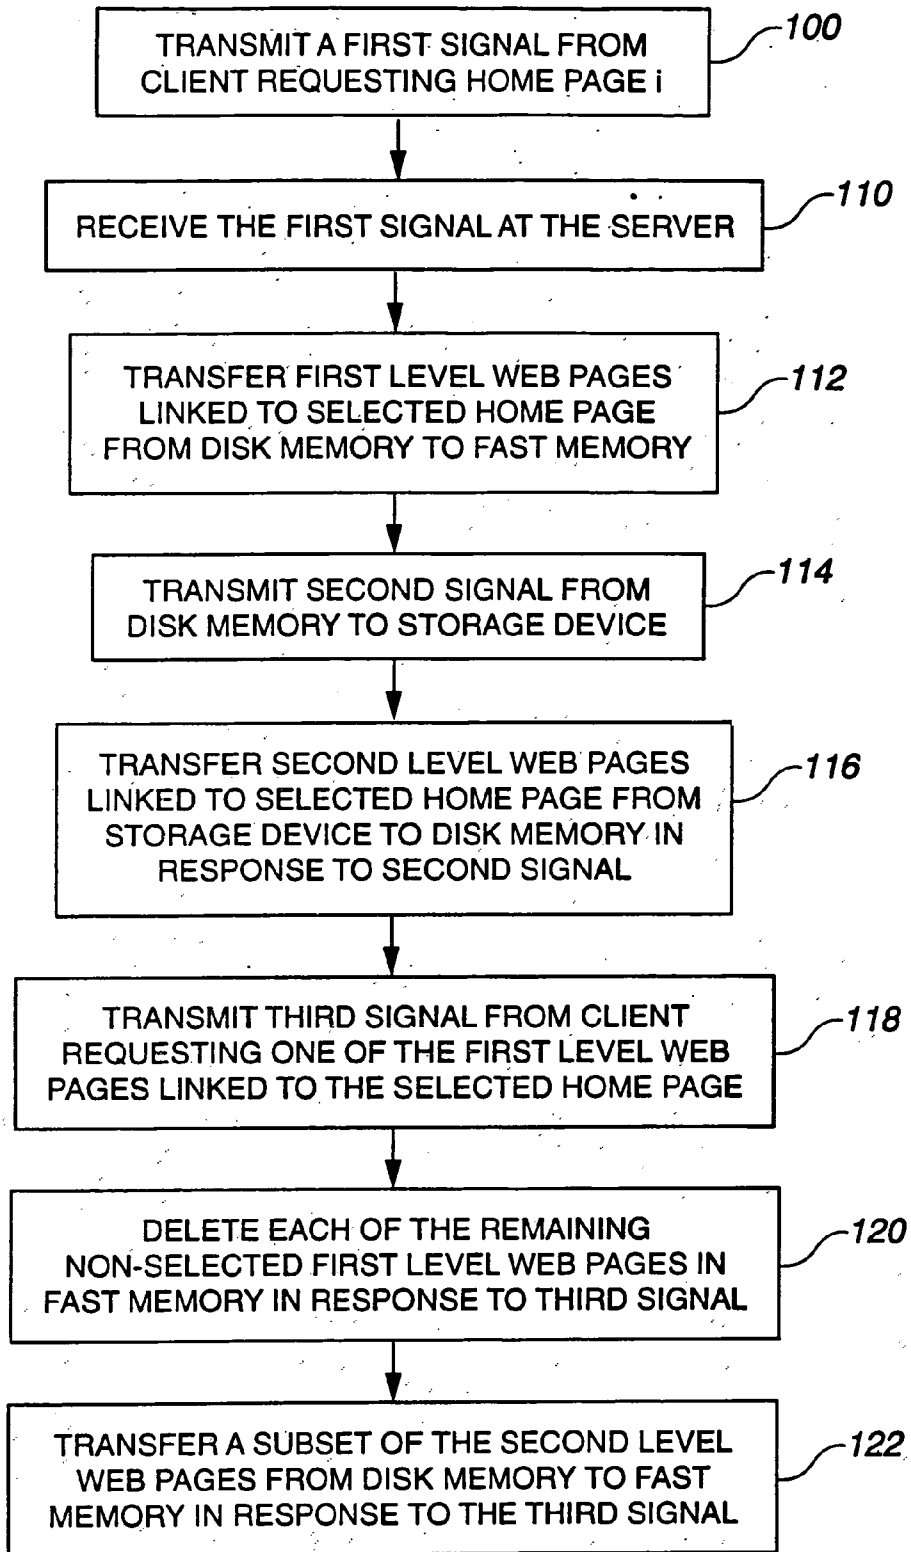

*Fig. 4*

**METHOD AND SYSTEM FOR EFFICIENTLY STORING WEB PAGES FOR QUICK DOWNLOADING AT A REMOTE DEVICE**

**TECHNICAL FIELD**

[0001] This invention relates to methods and systems for efficiently storing web pages at a server for quick downloading at a remote device in communication with the server.

**BACKGROUND ART**

[0002] Traditional web servers depend on sequential access to HTML (HyperText Markup Language) pages by loading hyperlinked pages as the client requests them while navigating through the current page. Each client initiated hit involves a random access to the memory, even if multiple clients access the same page. Thus, overall latency is high even when there is an overlap in the access. Latency refers to the amount of time it takes a web server to respond to a client beginning from the time the request was sent by the client to the server. To reduce latency in the network, some proposals have been made to have local machines, mostly proxy servers, to prefetch the pages linked to the current page before the client actually "hits" them. However, since all web pages may not be requested by the client, storage is wasted. Furthermore, bandwidth is also wasted. If a user is on a public area network, the user will pay for the time of access or number of bytes transferred every time he/she uses the bandwidth. Consequently, if the network is busy, aggressive prefetching can be expensive.

[0003] File servers, on the other hand, typically utilize a hierarchical storage manager (HSM) in managing access of data stored on disk and tape. An application program in an HSM configuration examines memory usage in the hard drive. Instead of putting all files, or data, on the hard drive, the program will keep a subset of the files on the hard drive and the rest on the tape. By ensuring that the most currently or frequently used files are on the hard drive, most accesses are satisfied by accesses to the hard drive, i.e., hits.

[0004] If the file required is not on the hard drive, i.e., a miss, a memory request is sent to the tape. Since the tape is slower than the disk, the time to retrieve the file is higher. Since the access is usually to the disk, this penalty is only apparent on a small percentage of the accesses. Thus, the main motivation for using HSM is cost. Tape is significantly cheaper and denser than a hard drive. However, in some file requests, latency will suffer.

[0005] Thus, there exists a need for a method and system for efficiently storing scaleable amounts of data at a web server that can be quickly accessed by a client without compromising bandwidth.

**DISCLOSURE OF THE INVENTION**

[0006] It is a general object of the present invention to provide a method and system for efficiently storing web pages at a server for quick downloading at a remote device in communication with the server.

[0007] In carrying out the above object and other objects, features, and advantages of the present invention, a method is provided for efficiently storing web pages for quick downloading at a remote device in a computer network including a server computer having a fast memory for

storing a plurality of home web pages, a disk memory for storing a first plurality of web pages linked to the home web pages, and a storage device coupled to the computer for storing a second plurality of web pages linked to the home web pages. The method includes the step of receiving a first signal from the remote device at the server computer indicating selection of one of the plurality of home pages. The method also includes the step of transferring at least one of the first plurality of web pages linked to the selected home page from the disk memory to the fast memory in response to the first signal. Still further, the method includes the step of transmitting a second signal from the disk memory to the storage device in response to the first signal. Finally, the method includes the step of transferring at least one of the second plurality of web pages linked to the selected home page from the storage device to the disk memory in response to the second signal wherein anticipated web pages linked to the selected home page are quickly accessible by the remote device.

[0008] In further carrying out the above object and other objects, features, and advantages of the present invention, a web server is also provided for carrying out the steps of the above described method. The web server includes a fast memory for storing a plurality of home web pages and for receiving a first signal from the remote device indicating selection of one of the plurality of home pages. The web server also includes a disk memory for storing a first plurality of web pages linked to the home web pages and for transferring at least one of the first plurality of web pages linked to the selected home page to the fast memory in response to the first signal. The disk memory is further provided for transmitting a second signal in response to the first signal. The web server further includes a storage device for storing a second plurality of web pages linked to the home web pages, receiving the second signal, and transferring at least one of the second plurality of web pages linked to the selected home page to the disk memory in response to the second signal wherein anticipated web pages linked to the selected home page are quickly accessible by the remote device.

[0009] The above object and other objects, features and advantages of the present invention are readily apparent from the following detailed description of the best mode for carrying out the invention when taken in connection with the accompanying drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0010] **FIG. 1** is a schematic diagram of the storage-efficient web server of the present invention;

[0011] **FIG. 2** is a directed page graph for a page sequence that begins with page i;

[0012] **FIG. 3** is an example of a page distribution in the server storage hierarchy; and

[0013] **FIG. 4** is a flow diagram illustrating the general sequence of steps associated with the present invention.

**BEST MODES FOR CARRYING OUT THE INVENTION**

[0014] A schematic diagram of the storage-efficient web server is shown in **FIG. 1**, denoted generally by reference numeral **10**. The server **10** includes a computer **12** such as,

for example, a workstation or a high-end personal computer. The server **10** hosts a plurality of web sites, wherein each web site includes a plurality of HTML documents, or web pages.

[0015] The computer **12** of the server **10** includes a fast memory **14**, such as cache or RAM (random access memory), and a disk memory **16**. Although shown externally, the disk memory **16** may be either an internal disk drive or an externally attached disk or disk farm, such as a RAID (redundant array of inexpensive disks). Both the fast memory **14** and the disk memory **16** store a portion of the web pages for quick downloading as will be described in greater detail below.

[0016] The computer **12** is also connected to an external storage device **18**, such as tape or removable media, which stores even more data relating to the web pages. The storage device **18** can be connected to the computer **12** either directly via a point-to-point link, as shown in **FIG. 1**, or indirectly via a storage area network. The server **10** is in communication with a plurality of remote devices **20** which can download any of the web pages stored at the server **10**. Examples of such devices include a computer, an Internet-ready telephone, etc.

[0017] As shown in **FIG. 1**, a three-tier hierarchy exists; fast memory **14**, disk memory **16** and storage device **18**, where the traditional assumption of lower access speed, larger capacity, and lower cost holds true as one moves down the hierarchy. While in most cases these may represent cache or RAM, disk and tape, any other forms of storage that satisfies the access speed, capacity and cost monotonicity also applies. In any case, the storage hierarchy, which can be extended to more than three tiers, forms a serial buffer chain where the cache in fast memory **14** is supported by a cache in disk memory **16** which in turn is supported by the data in the storage device **18**.

[0018] Also, this chained buffer configuration allows the possibility of data to be transferred between fast memory **14** and disk memory **16** while storage device **18** transfers data to disk memory **16**, provided disk memory **16** utilizes a typical double buffer so that one buffer feeds disk memory **16**, while the second buffer is filled by storage device **18**. This simultaneous data transfer between hierarchies is possible as long as disk memory **16** possesses adequate data bandwidth and connectivity either through direct point-to-point links or through a storage area network.

[0019] The server **10** of the present invention reduces cache space at fast memory **14** storage level which results in fewer pages of a web site being put on the computer **12** while off-loading successive pages in the second level storage of the storage device **18**. Before continuing with the description of the present invention, an exemplary directed page graph is shown in **FIG. 2** for a page sequence that begins with page *i*. Note that because the page numbering convention is visit order independent, the naming sequence is not unique. Therefore, many different page graphs can result in the same page number sequence.

[0020] Returning to the discussion of the present invention, in order to reduce the cache space at the fast memory **14**, a large number of the first level home pages, i.e., the first page of the web sites, *i*, *j*, *k*, etc. are stored in the fast memory **14**, as shown in **FIG. 3**. Disk memory **16** contains

a larger sequence of subsequent levels of the web site pages, i.e., *i*,  $i_{11}$  and  $i_{12}$ , where  $i_{jk}$  refers to the *k*th hyperlinked page on the *j*th level.

[0021] First level home pages, e.g., *i*, are kept in fast memory **14** while the pages  $i_{11}$  and  $i_{12}$ , hyperlinked by *i*, are kept in disk memory **16**. The cache in fast memory **14** has links to locations on disk memory **16**, as shown by the connections in **FIG. 3**. That is, when cached page *i* is accessed from fast memory **14**, a pointer points to the location (address) of the same page *i* in disk memory **16**. Similarly, the sequence for pages *i*,  $i_{11}$ ,  $i_{12}$  in disk memory **16** reference the address in storage device **18** so that on further access (beyond  $i_{12}$  in disk memory **16**), the server **10** knows where to fetch the rest of the pages from storage device **18**.

[0022] When there is a hit on *i* in fast memory **14**, all pages linked to *i* in disk memory **16** are read into fast memory **14** even before there is a hit on any of  $i_{11}$  or  $i_{12}$ . Therefore, while the page is sent to the client, fast memory **14** reads in  $i_{11}$  and  $i_{12}$ , according to the example shown in **FIG. 2**. Thus, prefetching of certain pages from disk memory **16** reduces the total number of home pages that normally resides in fast memory **14**. By using cache space reuse, described below, the space in fast memory **14** can be kept relatively small for each web site hosted.

[0023] Cache space reuse implies that the cache used in fast memory **14** is kept to a fixed maximum per home page. This is achieved by prefetching from disk memory **16**, discarding pages not required in the cache for fast memory **14** and reading in pages from storage device **18**.

[0024] To follow on the simple example described above with reference to **FIGS. 2 and 3**, the following sequence is executed, as shown in **FIG. 4**. In the following example, it is assumed that disk memory **16** stores only the first level of web pages linked to the home page, while storage device **18** stores the remaining levels of web pages linked to the home page. The storage space of disk memory **16** actually depends on the access time of locating partitions in storage device **18**, i.e., finding the address in storage device **18** where the pages are written. For example, an address utilized in a disk-type storage device **18** is identified by a {sector, track, block number} descriptor. If storage device **18** is very fast, then either only the first level or the first and second level pages only could be stored in disk memory **16**. A further explanation of the storage space of disk memory **16** is described in greater detail below.

[0025] In continuing with the example, a first signal is transmitted from a client at one of the remote devices **20** requesting one of the home pages, e.g., *i*, as shown at block **100**. The server computer **12** receives the first signal, as shown at block **110**.

[0026] In response to the first-signal, disk memory **16** transfers the first level web pages linked to the selected home page, i.e.,  $i_{11}$  and  $i_{12}$ , to fast memory **14**, as shown at block **112**. At the same time, disk memory **16** transmits a second signal to storage device **18** requesting specific data, as shown at block **114**. In response to the second signal, storage device **18** transfers the second level web pages linked to the selected-home page to disk memory **16**, i.e.,  $i_{21}$ ,  $i_{22}$  and  $i_{23}$ , as shown at block **116**.

[0027] If the client requests one of the first level web pages, e.g.,  $i_{12}$ , a third signal is transmitted from the remote

device **20** accordingly, as shown at block **118**. Fast memory **14** then deletes the remaining non-selected first level web pages, i.e., page  $i_{11}$ , as shown at block **120**, and sends the selected web page to the client. Since disk memory **16** has read in and stored pages  $i_{21}, i_{22}, i_{23}$ , etc., from storage device **18**, disk memory **16** transfers the second level web pages related to page  $i_{12}$ , i.e., page  $i_{23}$ , to fast memory **14**. Similarly, disk memory **16** may delete the non-selected second level web pages if cache memory size is a concern. Then, disk memory **16** transmits a fourth signal to storage device **18** requesting the web pages linked to the selected page  $i_{23}$ , i.e., pages  $i_{33}$  and  $i_{34}$ . The method continues in a like manner as the client requests additional web pages.

[0028] It is possible that the client may proceed to traverse the web pages in a reverse order back to a previous web page where there were more than one possible path from that web page, e.g., page  $i$  utilizing the example shown in **FIG. 2**. In this instance, upon reaching that web page, disk memory **16** transmits a signal to storage device **18** requesting the web pages linked to that page, e.g. pages  $i_{11}$  and  $i_{12}$ , as described at block **112**. Thus, disk memory **16** anticipates the client's request by insuring fast memory **14** always has all of the first level web pages-related to the selected web page stored therein. At the same time, disk memory **16** insures that all of the second level web pages related to the selected web page are stored in disk memory. This is achieved via memory re-use as described above.

[0029] The above sequence depends on the access time of locating partitions in storage device **18**, wherein partitions correspond to the portion of the storage device **18** that comprises all the web pages and sequences of the associated web site. If the time to access a partition in storage device **18** is  $t_{M2}$ , then the number of pages to be kept in M1 will be dependent on two factors: i) average size,  $s(i_{jk})$ , of an individual page  $i_{jk}$  at any level  $j$  in the page directed graph, and ii) reaction time of the client, assumed fixed  $t_r$ . The level  $j$  of the number of pages to be hosted in disk memory **16** is determined according to the following:

$$j \ni \sum_j t_p + t_r + \frac{\overline{s(i_{jk})}}{L} \geq t_{M2}$$

where  $t_p$  is the average propagation delay between client and server,  $L$  is the average link bandwidth, or effective data rate, between the client and server **10**, and  $\overline{s(i_{jk})}$  over  $k$  represents the average size of the pages at level  $j$ .

[0030] A simple explanation of the limit to  $j$  is as follows. Each level of the tree traversed (i.e.,  $j=1, 2$ , etc.) provides the server **10** the following time window consisting of the client reaction time,  $t_r$ , which is probably 0.25 seconds for the average human, the delay or propagation time,  $t_p$ , and the time of flight  $\overline{s(i_{jk})}/L$  to send the average page at level  $j$  to the client to access storage device **18**. As the average page size  $\overline{s(i_{jk})}$  increases, its time of flight provides a larger time window during which access to a slow storage device **18** can be masked due to the limited link bandwidth  $L$ . The propagation delay is typically ignored since the client can be at any arbitrary distance from the server **10**.

[0031] The above inequality is somewhat conservative since it assumes that the average page size is a good

indicator of the time of flight. In the case where there is a large variation in file size, the mean should be replaced with a minimum,  $\text{Min}(s(i_{jk}))$ . This results in increasing the depth of the pages to be stored and potentially increases the storage required in disk memory **16**.

[0032] An example illustrating the use of the above limit is as follows. If the link bandwidth  $L$  to the server **10** is 56 Kbs, the average page size at each level in the page directed graph of the home page sequence is 50 KB, and the access time to storage device **18** is eight seconds, then at least two levels of pages ( $j=2$ ) must be resident in disk memory **16**. In case of the  $i$  page sequence, pages  $i, i_{11}, i_{12}, i_{21}, i_{22}$  and  $i_{23}$  must be kept in disk memory **16**.

[0033] Typically, however, the average page loaded on the Web is only 6 KB. This implies that a larger depth (level) of pages may be stored in disk memory **16** for a fixed size cache. However, since the pages are of smaller size, the total storage required (i.e., number of pages per level\*average size per page\*number of levels) will not be significantly different.

[0034] To ensure that successive pages can be read from storage device **18** with no perceived latency, a quasi-sequential access of the levels is utilized, i.e., page  $i_{j+1,1}$  is always read after page  $i_{j,k}$  even when  $k < 1$ . If  $i_{j,k} = i_{11}$ , then  $i_{j+1,1} = i_{21}$ , where  $l$  is any integer 1, 2, 3, . . . , etc. Access to web site pages is not totally random since only certain paths can be traversed by a client, nor is the access totally sequential since each web site typically has multiple yet a finite number of links on each level. By exploiting this quasi-sequentiality, slow sequential access storage devices can be exploited.

[0035] All home page sequences are added at a boundary of the partition so that the partition can be accessed with moderately low deterministic access time. Vertical partitioning works well in this case, i.e. data stored sequentially. If access time increases to further out partitions, one can place home pages with very large pages at the further ends and home pages with small pages at the beginning of the device **18**, i.e., vertical partitioning. In vertical partitioning, each partition starts from the same starting point and proceeds from left to right so that the access time to the first page on any partition is zero whenever the tape is read.

[0036] Clearly, storage devices **18** that exhibit low partition access latency will be well-suited to developing hierarchical storage web servers as disclosed herein with very large capacities and with the added benefit of fully masking latencies to disk memory **16** and storage device **18**.

[0037] However, the storage device **18** may be a non-sequential device, such as, for example, a random access optical disk. In this case, the present invention is still valid even though partitioning as described above is not necessary.

[0038] While the best modes for carrying out the invention have been described in detail, those familiar with the art to which this invention relates will recognize various alternative designs and embodiments for practicing the invention as defined by the following claims.

1-12. (canceled)

13. In a computer network including a server computer having a first storage device for storing a first plurality of web pages and a second storage device for storing a second plurality of web pages linked to the first plurality of web

pages, a method for efficiently storing web pages for quick downloading at a remote device, the method comprising:

receiving a first signal from the remote device at the server computer indicating selection of one of the first plurality of web pages; and

transferring all of the second plurality of web pages that are linked to the selected one of the first plurality of web pages from the second storage device to the first storage device in response to the first signal so that anticipated web pages linked to any web pages selected by the remote device are quickly accessible by the remote device.

**14.** The method of claim 13 wherein the first storage device comprises a fast memory and the second storage device comprises a disk memory.

**15.** The method of claim 13 wherein transferring all of the second plurality of web pages includes deleting each of the non-selected first plurality of web pages in the first storage device.

**16.** The method of claim 13 wherein storing the second plurality of web pages linked to the first plurality of web pages includes:

determining one of an average size and a minimum size of each web page linked to each of the first plurality of web pages; and

determining a reaction time of a client operating the remote device.

**17.** The method of claim 16 further comprising:

determining an average propagation delay between the client and the server;

determining an average link bandwidth between the client and the web server; and

determining a time to access a partition in the storage device.

**18.** A system for providing quick downloading of web pages at a remote device, the system comprising:

a server computer;

a first storage device in communication with the server computer for storing a first plurality of web pages and for receiving a first signal from the remote device indicating selection of one of the first plurality of web pages; and

a second storage device in communication with the first storage device, the second storage device for storing a second plurality of web pages linked to the first plurality of web pages and for transferring all of the second plurality of web pages that are linked to the selected one of the first plurality of web pages to the first storage device in response to the first signal so that anticipated web pages linked to any web pages selected by the remote device are quickly accessible by the remote device.

**19.** The system of claim 18 wherein the first storage device comprises a fast memory and the second storage device comprises a disk memory.

**20.** The system of claim 18 wherein the first storage device is further operative to delete each of the non-selected first plurality of web pages in response to the first signal.

**21.** The system of claim 18 wherein the second storage device, in storing the second plurality of web pages linked to the first plurality of web pages, stores the second plurality of web pages based on one of an average size and a minimum size of each web page linked to each of the first plurality of web pages and a reaction time of a client operating the remote device.

**22.** The system of claim 21 wherein the second storage device is further operative to store the second plurality of web pages based on an average propagation delay between the client and the server, an average link bandwidth between the client and the server, and an access time to access a partition in the storage device.

**23.** The system of claim 18 wherein the first storage device is a cache.

**24.** The system of claim 18 wherein the first storage device is a random access memory.

**25.** The system of claim 18 wherein the second storage device is an internal memory.

**26.** The system of claim 18 wherein the second storage device is an external memory.

**27.** The system of claim 18 wherein the second storage device is a hard drive.

**28.** The system of claim 18 wherein the second storage device is a redundant array of inexpensive disks.

**29.** In a computer network including a server computer having a first storage device for storing a first plurality of web pages and a second storage device for storing a second plurality of web pages linked to the first plurality of web pages, the first and second storage devices arranged in a hierarchy wherein the second storage device has a lower access speed and a larger capacity than the first storage device, a method for efficiently storing web pages for quick downloading at a remote device, the method comprising:

receiving a first signal from the remote device at the server computer indicating selection of one of the first plurality of web pages; and

transferring all of the second plurality of web pages that are linked to the selected one of the first plurality of web pages from the second storage device to the first storage device in response to the first signal so that anticipated web pages linked to any web pages selected by the remote device are quickly accessible by the remote device.

**30.** The method of claim 29 wherein the first storage device comprises a fast memory and the second storage device comprises a disk memory.

**31.** The method of claim 29 wherein transferring all of the second plurality of web pages includes deleting each of the non-selected first plurality of web pages in the first storage device.

**32.** The method of claim 29 wherein storing the second plurality of web pages linked to the first plurality of web pages includes:

determining one of an average size and a minimum size of each web page linked to each of the first plurality of web pages; and

determining a reaction time of a client operating the remote device.



- 33. The method of claim 32 further comprising:  
 determining an average propagation delay between the client and the server;  
 determining an average link bandwidth between the client and the web server; and  
 determining a time to access a partition in the storage device.
- 34. A system for providing quick downloading of web pages at a remote device, the system comprising:  
 a server computer;  
 a first storage device in communication with the server computer for storing a first plurality of web pages and for receiving a first signal from the remote device indicating selection of one of the first plurality of web pages; and  
 a second storage device in communication with the first storage device, the second storage device having a lower access speed and a larger capacity than the first storage device, the second storage device for storing a second plurality of web pages linked to the first plurality of web pages and for transferring all of the second plurality of web pages that are linked to the selected one of the first plurality of web pages to the first storage device in response to the first signal so that anticipated web pages linked to any web pages selected by the remote device are quickly accessible by the remote device.
- 35. The system of claim 34 wherein the first storage device comprises a fast memory and the second storage device comprises a disk memory.

- 36. The system of claim 34 wherein the first storage device is further operative to delete each of the non-selected first plurality of web pages in response to the first signal.
- 37. The system of claim 34 wherein the second storage device, in storing the second plurality of web pages linked to the first plurality of web pages, stores the second plurality of web pages based on one of an average size and a minimum size of each web page linked to each of the first plurality of web pages and a reaction time of a client operating the remote device.
- 38. The system of claim 37 wherein the second storage device is further operative to store the second plurality of web pages based on an average propagation delay between the client and the server, an average link bandwidth between the client and the server, and an access time to access a partition in the storage device.
- 39. The system of claim 34 wherein the first storage device is a cache.
- 40. The system of claim 34 wherein the first storage device is a random access memory.
- 41. The system of claim 34 wherein the second storage device is an internal memory.
- 42. The system of claim 34 wherein the second storage device is an external memory.
- 43. The system of claim 34 wherein the second storage device is a hard drive.
- 44. The system of claim 34 wherein the second storage device is a redundant array of inexpensive disks.

\* \* \* \* \*