

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 July 2007 (05.07.2007)

PCT

(10) International Publication Number
WO 2007/075461 A2

(51) International Patent Classification:
B60R 11/02 (2006.01)

(21) International Application Number:
PCT/US2006/048006

(22) International Filing Date:
18 December 2006 (18.12.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/753,080 22 December 2005 (22.12.2005) US

(71) Applicant (for all designated States except US): **JOHNSON CONTROLS TECHNOLOGY COMPANY** [US/US]; 915 East 32nd Street, Holland, Michigan 49424 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CAMPBELL, Douglas, C.** [US/US]; 34 East 14th Street, Holland, Michigan 49423 (US). **PRICE, James, B.** [US/US]; 186 Sun Meadow Court, Holland, Michigan 49424 (US). **SCHULTZ, Steven, G.** [US/US]; 1912 Goldeneye Drive, Holland, Michigan 49424 (US). **STOKES, Theodore, J.** [US/US]; 349 W. Maerose Avenue, Holland, Michigan

49424 (US). **MICHALAK, Eric, B.** [US/US]; 34326 Sheridan, Westland, Michigan 48185 (US). **PROS-NIEWSKI, Joseph, F.** [US/US]; 19675 Inkstör Road, Brownstown Twp, Michigan 48174 (US). **GREENE, Alan, G.** [US/US]; 6578 Lily Street, Grandville, Michigan 49418 (US). **THIMM, David, P.** [US/US]; 48770 Quail Run Drive S., Plymouth, Michigan 48170 (US). **LEE, Joon, K.** [US/US]; 7960 N. Fountain Park, Apt. #149, Westland, Michigan 48185 (US).


(74) Agent: **LAZARUS, John, M.**; FOLEY & LARDNER LLP, 777 E. Wisconsin Avenue, Milwaukee, WI 53202-5306 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: SEATBACK ENTERTAINMENT DISPLAY SYSTEM

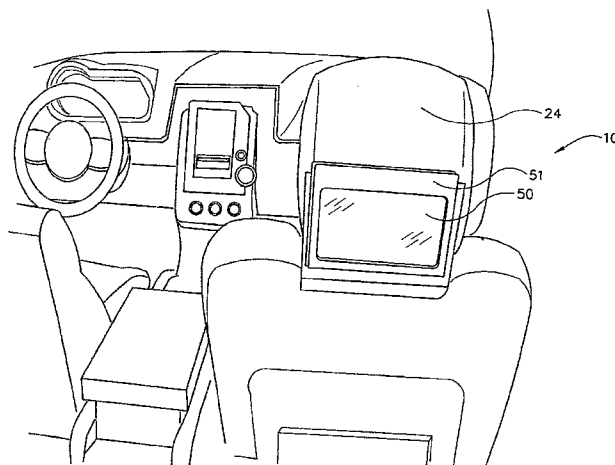

(57) Abstract: A seatback entertainment display system for a vehicle is provided having a support member extending from a seatback frame, and an adjustment mechanism coupled to the support member, and a display device coupled to the adjustment mechanism. The support member may be a cantilever type beam or frame extending upwardly from the seatback at a position behind and adjacent to a headrest. The support member may also be a pair of rods arranged to fixedly receive the display device and movably receive the headrest. The adjustment device may include any one or more of a forward-rearward tilting mechanism, a side to side pivoting mechanism and an up-down translation mechanism. The seatback entertainment display system is adaptable to optimize a viewing angle for a rear seat occupant of the vehicle, throughout a normal adjustment range of the seat.

WO 2007/075461 A2



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*

SEATBACK ENTERTAINMENT DISPLAY SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present Application claims the benefit of priority under 35 U.S.C. § 119(e) to U.S. Provisional Patent Application No. 60/753,080, titled Seatback Entertainment Display System, filed on December 22, 2005, the disclosure of which is hereby incorporated by reference.

BACKGROUND

[0002] The present inventions relate generally to a seatback entertainment system for use in a vehicle (e.g., automobiles such as cars, trucks, and the like; airplanes, boats, trains, busses, etc.). More specifically, the present inventions relate to a seatback entertainment display system having a high-mount arrangement that permits a wide range of adjustment intended to accommodate or adapt to repositioning of the seatback and headrest and to optimize a viewing angle for viewers in the vehicle. The seatback entertainment display system may also include a wide variety of other components such as a DVD player, speakers, lighting sources (e.g. ambient, task, reading, etc.), connectivity ports, headphone jack(s), auxiliary input(s), wireless transmitters/receivers, etc.

[0003] Seatback entertainment display systems for use with the seats of vehicles such as automobiles are generally known and typically include a display mounted or fixed in a portion of the seatback or a headrest portion of the seat back. However, such known displays for use in a seatbacks have certain disadvantages. For example, movement of the seatback (such as between a reclined position and an upright or fold-forward position tend to change the viewing angle of the display as observed by users (such as users seated in rear seats of the vehicle) to a less-than-optimum position.

[0004] Also, such known displays that are mounted into the seatback or headrest typically have an elevation that is determined by the elevation of the seatback or the headrest and the elevation tends to change if the elevation of the seat or the headrest is changed by an occupant of the seat. Further, the viewing angle of the known displays tends to be limited and not readily adaptable to occupants of various sizes that are viewing the display device (e.g. adults, children, etc.). By further way of example, the known seatback displays are

generally not adjustable from side-to-side to enhance the viewing angle of rear seat viewers of the display that are sitting in an offset relationship from the display (such as a viewer sitting in the “middle” of a rear seat arrangement in a vehicle. Although some of the known rear seat display devices that are mounted in a seatback may provide some adjustment, such adjustment capabilities are generally limited and not satisfactory.

[0005] Accordingly, it would be advantageous to provide a seatback entertainment display system that overcomes the disadvantages of the known seatback displays. It would also be advantageous to provide a seatback entertainment display system having a “high mount” arrangement that is cantilevered from a top portion of the seatback behind a headrest of the seat. It would also be advantageous to provide a seatback entertainment display system that permits the display to be tilted forward and rearward. It would also be advantageous to provide a seatback entertainment display system that permits a display to be pivoted from side-to-side. It would also be advantageous to provide a seatback entertainment display system that permits the display device to translate vertically in an upwardly and downwardly manner. It would also be advantageous to provide a seatback entertainment display system that permits the display device to be tilted, pivoted or translated to accommodate or adapt to a desired viewing angle for a viewer, and in a manner that is generally independent of the adjustment range of the seatback and/or headrest by an occupant of the seat. It would also be advantageous to provide a seatback entertainment display system having components such as a DVD player, speakers, lighting sources (e.g. ambient, task, reading, etc.), connectivity ports, headphone jack(s), auxiliary input(s), wireless transmitters/receivers, etc. It would also be desirable to provide a seatback entertainment system that movably integrates a headrest and fixedly integrates a display device (with a movably display screen) onto a structure (e.g. a bracket, pair of rods, etc.) extending from the seatback frame.

[0006] Accordingly, it would be desirable to provide a seatback entertainment display system for a vehicle having any one or more of these or other advantageous features.

SUMMARY

[0007] According to one aspect of the invention, a seatback entertainment display system for a vehicle seat having a seatback frame for supporting a seatback and a headrest is

provided. The system includes a support member coupled to the seatback frame and extending adjacent to and behind the headrest. An adjustment device is coupled to the support member, and a display device is coupled to the adjustment mechanism.

[0008] According to another aspect of the invention, a seatback entertainment system for use with a vehicle seat having a seatback and a headrest is provided. The system includes a frame for the seatback of the vehicle seat, where the frame including a support member extending above the seatback and behind the headrest. An adjustment device is provided and includes a first portion and a second portion, where the first portion is coupled to the support member. A display device is coupled to the second portion of the adjustment device.

[0009] According to a further aspect of the invention, a seat for a vehicle includes a seat bottom frame coupled to a seatback frame and a headrest coupled to a top portion of the seatback frame. A support member extends from the top portion of the seatback frame and adjacent to the headrest. An adjustment device is coupled to the support member and a display panel is coupled to the adjustment device.

[0010] According to a further aspect of the invention, a seat for a vehicle includes a seat bottom frame coupled to a seatback frame. At least one support member extends from the seatback frame. A display device having a body portion is coupled to the support member in a generally fixed position, and a screen portion is pivotally coupled to the body portion along a top edge of the screen portion for movement to any one of a plurality of viewing positions. A headrest is movably coupled to the support member for positioning within a predetermined adjustment range relative to the seatback and the body portion of the display device

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIGURE 1 is a schematic representation of a seatback entertainment display system for a vehicle according to an exemplary embodiment.

[0012] FIGURE 2A is a schematic representation of a perspective view of a seatback entertainment display system with a display device in one position according to an exemplary embodiment.

[0013] FIGURE 2B is a schematic representation of a perspective view of a seatback entertainment display system with a movable display screen portion according to an exemplary embodiment.

[0014] FIGURE 2C is a schematic representation of a perspective view of a seatback entertainment display system with a display device shown with controls according to an exemplary embodiment.

[0015] FIGURE 2D is a schematic representation of a perspective view of a seatback entertainment display system with a movable display screen portion, and a drive and a compartment for accessory item(s) located behind the screen, according to an exemplary embodiment.

[0016] FIGURE 3 is a schematic representation of a perspective view of a seatback entertainment display system with the display device in another position according to an exemplary embodiment.

[0017] FIGURE 4 is a schematic representation of a perspective view of a seatback entertainment display system with the display device in another position according to an exemplary embodiment.

[0018] FIGURE 5 is a schematic representation of a perspective view of a seatback entertainment display system with the display device in another position according to an exemplary embodiment.

[0019] FIGURE 6A is a schematic representation of a perspective view of a seatback entertainment display system with the display device in another position according to an exemplary embodiment.

[0020] FIGURE 6B is a schematic representation of the perspective view of a seatback entertainment display system of FIGURE 6A, with the display device in another position to permit folding of the seatback, according to an exemplary embodiment.

[0021] FIGURE 7 is a schematic representation of a side view of a seatback entertainment display system according to an exemplary embodiment.

[0022] FIGURES 8A-8D are schematic representations of a seatback entertainment display system integrated with a support member (shown as rods for a headrest), according to another exemplary embodiment.

DETAILED DESCRIPTION

[0023] FIGURES 1-7 illustrate one exemplary embodiment of a seatback entertainment display system for use in a vehicle (e.g., automobiles such as cars, trucks, sport utility vehicles, minivans, buses, and the like; airplanes, boats, trains, etc.). The seatback entertainment display system is shown and described by way of example to include a display device and other components for use with a seatback of a front seat of a vehicle, for viewing by occupants of the vehicle ("viewers") that are seated behind the front seat. Such a display device may be provided in a wide variety of sizes, shapes, components, and configurations, and the system may be used within any seat (such as a train, airplane, bus, etc.) where viewers are seated behind another seat. All such variations are intended to be within the scope of the inventions.

[0024] Referring to FIGURE 7, a seatback entertainment display system 10 for a vehicle is shown according to an exemplary embodiment. The system includes a seatback frame 20, a support member 30, an adjustment device 40 and a display device 50. The system may also include a wide variety of additional components as shown for example in FIGURES 2A-4. The seatback frame 20 may be a conventional seat frame for use in any of a wide variety of vehicles. The support member 30 is shown having a bottom end 32 that is mounted (connected, coupled, attached, integrally formed, etc.) at or generally near a top portion 22 of the seatback frame 20 by any suitable process such as welding, brazing, threaded fasteners, integral formation with the seatback frame, etc. The support member 30 may be attached to any suitable portion of the seatback frame 20 (e.g. sides, back, etc.), so that a portion of the frame extends behind a headrest attached to the seatback. Referring to FIGURES 2A-6, the support member 30 is shown to extend upwardly from a location near the top portion 22 of the seatback frame 20 and adjacent to, and behind, a headrest 24 of the seatback to provide a "high mount" arrangement for the display device 50. The support member may be made of any suitable material (such as steel, aluminum, plastic, etc.) and attached to the seatback frame during production of the seatback. A top end 34 of the support member 30 is configured to receive an adjustment device 40 that is shown to

interconnect what is shown for example as a top portion of the display device 50 to the support member 30 at an attachment point. According to one embodiment, the support member is plastic-coated or encased, however, the support member may be finished in any suitable manner to match or contrast (as desired) with other interior trim features of the vehicle, such as painted, anodized, epoxy coated, plasticized, vinyl coated, fabric-wrapped, leather-wrapped, etc.

[0025] According to one embodiment, the support member 30 is also shown having a shape that is intended to remain generally “concealed” or hidden behind the display device 50 when the display device is in a “stowed” position against the support member (see FIGURES 1-2A), so that the display device retains an appearance similar to that of a “hard-mounted” type of display device, yet permits the advantageous adjustment features of the embodiments described herein. According to another embodiment the support may be sized and shaped to remain visible when the display device is stowed and may be configured to have an aesthetic appearance that compliments or contrasts with the seat back and/or display device. According to the illustrated embodiment, the support member 30 is shown as a generally rigid member having a strength suitable for use with all intended loading scenarios that may be potentially experienced by the display device and/or support member. According to an alternative embodiment, the support member may also include a restorable “break-free” feature (such as a snap-hinge, over-center biasing device, etc.) that is intended to “fold” or collapse in the event of loading or impact in excess of a certain predetermined amount (e.g. if a person “pulls” or “leans” on the display device, or otherwise stresses the display device or support member) to prevent damage to the display device, and/or the adjustment mechanism and/or the support member.

[0026] According to one embodiment, the adjustment mechanism 40 is intended to permit movement of the display device 50 (and other components such as those shown in FIGURES 2A-4) in a forward-rearward (e.g. tipping, tilting, folding, draw-forward, push-back, etc.) manner (i.e. rotation about a horizontal axis – see FIGURES 6A-7) through a desired adjustment range, such as range of approximately 0 through 60 degrees. Referring to FIGURE 6B, the display device may be arranged for pivoting upward approximately 180 degrees to accommodate positioning of the vehicle seat when protection of the display is desired (e.g. when moving the seatback to a “fold flat” position to prevent damage to the display device, etc.). The adjustment mechanism 40 is also intended to permit a side-to-

side (e.g. pivoting, swinging, sliding, etc.) manner (i.e. rotation about a vertical axis) through a desired adjustment range, such as range of approximately 0 through 30 degrees and an up-down (e.g. raise, lower, etc. – see FIGURE 4) manner, and a side-to-side manner (see FIGURE 3) so that the display panel may be movable by translation generally along a plane defined by the support member or the adjustment device) along a travel distance in an amount up to about the height of the support member 30. However, the adjustment mechanism may be selected to provide only one (or certain several) of these adjustment features to suit a particular application or customer. According to one embodiment, the adjustment mechanism is intended to provide a mechanical connection between the support member and the display device. The connection is intended to facilitate use of a quick-release device to permit the display device (and its associated components) to be removed for use at other locations, and to facilitate interchangeability to permit upgrade/replacement of the display device (and its associated components).

[0027] The adjustment mechanism 40 may be selected as a commercially available product that permits a desired range of motion and may also include a “friction-creating” or “torque-resisting” interaction (such as a “torque hinge” or torque washers or counter-balanced springs or the like for the rotational adjustment features) or may be custom-made to incorporate the desired features or combination of features. The adjustment mechanism may also include “retention” features (e.g. viscous or frictional interfaces, dampers, spring-assist devices, etc.) that tend to “hold” or “retain” the display device in a desired position after adjustment to a desired viewing angle by a viewer and until subsequently repositioned by the viewer. According to one embodiment, the retention features have sufficient retentive strength to maintain the position of the display device during normal usage and movements of the vehicle. However, the strength of the retention features is intended to be low enough to permit convenient manual adjustment of the display device and to permit “release” of the position of the display device upon impact with an occupant or other object in the vehicle. The horizontal axis pivoting and vertical axis pivoting feature of the adjustment mechanism 40 may be provided by any suitable rotational device such as a hinge, pin-and-socket, bearing, bushing or the like (shown for example as hinge 42 for adjustment about a horizontal axis). The up-down and side-to-side translation adjustment feature may be provided using a slide, track, rail or the like, that interfaces between (or is incorporated in) the adjustment mechanism 40 and either of the display device 50 or the support member 30. According to the illustrated embodiment, up-down adjustment is

provided by a track 36 provided in the support member 30 and is configured to slidably receive a corresponding projection extending from the adjustment mechanism 40 (see FIGURE 7). Side-to-side adjustment is shown provided by a track 52 on the display device 50 that engages a projection or tab (shown as a tang 46) extending from hinge 42 on the adjustment mechanism 40 (see FIGURE 7). According to an alternative embodiment the pivotal/rotational features of the adjustment mechanism may comprise a ratchet and pawl device with a release mechanism (such as a spring-biased button, lever, latch, etc.).

[0028] According to other embodiments, the adjustment features may be accomplished by other suitable devices such as a ball-and-socket device, a viscous coupling device, pinned linkages (that permit the display device to telescope, articulate, etc.). According to another alternative embodiment, the position of the display device may be remotely adjustable through suitable motors, servos, actuators or the like (e.g. of a “miniature” size, etc.) and may be activated through controls on the display device or by a remote control device, such as the remote control that operates a media device associated with the display panel. According to a further alternative embodiment, the adjustment mechanism may include a side-to-side translation feature to permit lateral movement of the display device. According to a further embodiment, the adjustment mechanism (or its attachment point) may be provided with a quick-release device that permits the display device to be removed by a user, such as for security purposes, or for use remote from the vehicle (such as a hotel, or other suitable application or location). The quick release device may include a locking device (such as a key, etc.) to minimize unintended removal of the display device.

[0029] According to an alternative embodiment shown in FIGURE 2B, the display device 50 may be provided as a two-part device that includes a screen portion 54 that is movably connected to a body portion 56 of the display device 50 to permit a further adjustment range for viewing images by a user. The screen portion 54 is shown pivotally coupled along a top edge to the body portion 56, such as by use of a torque hinge or the like. An indentation in body portion (shown as a finger relief 58) is provided adjacent a lower edge of the display screen to enhance ease of a use by an occupant of the vehicle in positioning the screen.

[0030] According to another embodiment, the adjustment device is configured as a low-profile (e.g. thin, slim, narrow, etc.) device that minimizes the package space of the display device behind and adjacent the headrest of the seatback. The adjustment device 40, in

combination with the support member 30, is intended to permit a viewer to selectively customize the viewing angle of the display device 50 in any one of an almost infinite number of positions, to accommodate a particular viewer (e.g. short, tall, etc.), the location of the viewer (e.g. directly behind the seat, offset from the seat, etc.) and to permit adjustment to maintain the desired viewing angle when the seatback and/or headrest are adjusted or repositioned by the occupant of the seat. For example, if an occupant of the vehicle seat reclines the seatback, the viewer may adjust (e.g. tilt) the display device and/or raise the display device to maintain a desired viewing angle. By further way of example, since the display device is mounted independent of the headrest, an occupant of the seat may adjust the headrest to any desired elevation or inclination without changing the position of the display device.

[0031] Referring further to FIGURE 2A-4, the display device is shown to include a variety of additional components and/or features intended to enhance the functionality of the display. For example, the display device may include speakers 62 for broadcasting audio to the user of the display. Ambient lighting may be provided by light sources, such as LEDs 64, mounted along a perimeter (or side or back) of the display device to provide multi-colored lighting that is coordinated with the images displayed on the screen of the display device. A media device, shown for example as a DVD player 66, may be integrated into the display device, and may have an access door shown as provided along a side or top of the display device. The display device is also shown to be equipped with connectivity ports 68 (e.g. USB, etc.), a headphone jack 70, and auxiliary input 72 (e.g. for an RCA or 1/8" jack, etc.). Reading lamps 74 are also shown to be provided along a lower edge of the display device, and may be positioned for directing the beam of light to a desired location by adjusting the position of the display device. The display device is also shown to include an infrared transmitter and receiver 76 (e.g. for communicating with a remote control device, or other suitable interface). The display device may also be outfitted for wireless communication, such as Bluetooth, WiFi, etc.). The trim surrounding the display screen may also include decorative accent lighting, such as in the form of one or more "bands" that "glow" or otherwise provide a decorative appearance that may be either independent of an image on the screen or coordinated with an image on the screen. Referring further to FIGURE 2C, control devices 69 (e.g. buttons, knobs, dials, etc.) may be provided at any suitable location to permit local operation of the display device 50. Referring further to FIGURE 2D, the display device may be provided without visible control devices and

configured for operation by a remote control device 75. As shown by way of example in FIGURE 2D, the display device may be provided with a compartment 73 located behind the movable display screen for stowing or storing accessory items, such as, among others, the remote control device, movie media, batteries, battery packs, USB items, etc. The display device 50 may also include other components arranged (or “hidden”) behind a movable display screen, such as an SD card slot, etc. For example, FIGURE 2D further illustrates a drive device 66 (shown as a DVD player drive) arranged behind the movable display screen.

[0032] According to other embodiments, the display device may include a face plate or trim bezel 51 (see FIGURE 1) that is detachable or replaceable so that the display device may be customized by a user. For example, replacement bezels may be provided in a wide variety of customized styles such as color, texture (e.g. wood grain, carpet, fabric, etc.), graphics (e.g. favorite team logos, characters, locations, organizations, etc.).

[0033] According to another embodiment, the display device may include a camera 53 (see FIGURE 4) arranged to display an image on the display screen (e.g. for use as a “vanity mirror” or the like).

[0034] According to any exemplary embodiment, the display device 50 may include any suitable technology for receiving a signal from a media device and conveying an image to a viewer. By way of example, the display device technologies may include (among others) LCD, plasma, OLED, emissive or transfective devices, field emission devices, and may be provided as color or monochromatic displays. The screen may also provide touch-screen interaction for receiving input commands from a user. All such display screen technologies are intended to be within the scope of the embodiments of the invention.

[0035] Referring to FIGURES 8A-8D, a seatback entertainment display system 110 integrated with support members (shown as rods 130) for a headrest 124 is illustrated according to another exemplary embodiment. According to a preferred embodiment, a pair of rods 130 are compatible with apertures on the seatback and on the headrest. As shown in FIGURE 8A, the seatback 120 is provided with apertures for receiving and securing support members (shown as downwardly projecting lower segments 131 of rods 130). The lower segments 131 of rods 130 are configured to secure the display device 150 to the seat back. A body portion 152 of display device 150 also includes upwardly projecting segments 134 of rods 130 to adjustably support the headrest 124.

[0036] The rods 130 may each be single rods having a lower projecting segment 131, an intermediate segment 132 and an upper projecting segment 134. Alternatively, rods 130 may be provided in separate segments integrated with the body portion 152. Display device 150 is secured to the seatback 120 by the rods 130 in a position behind the headrest 124. Body portion 152 connects to the rods 130 (shown at an intermediate segment 132 of the rods) in a generally fixed manner for mounting the display device 150 to the seatback 120, with a bottom segment 131 of rods 130 inserted within the apertures and secured to the seatback 120 (see FIGURE 8B). According to one embodiment (as illustrated), the intermediate segment 132 of the rods includes a generally horizontal “bend” or offset region that aides in retaining the body portion 152 in a fixed position. According to other embodiments, the rods may have any desirable configuration that secures to the seatback and mounts the display device in a fixed position behind a movably-mounted headrest. For example, the rods may each have a “Y” shape where one branch movably mounts the headrest and another branch fixedly mounts the display device, and the bottom leg is secured to the seatback.

[0037] Referring further to FIGURE 8C, according to the illustrated embodiment, the headrest 124 is movably mounted over an upward segment 134 of the rods 130 so that the headrest 124 is positioned adjacent to, and in front of, the display device 150. The headrest 124 is vertically positionable through an adjustment range along the upper segment 134 of the rods 130, independent from the body portion 152 of the display device 150, which remains generally fixed relative to the seatback 120 and rods 130. The headrest may also be configured to be horizontally adjustable relative to rod segments 134 to enhance positioning to accommodate particular users. Accordingly, the headrest 124 is adjustable, while the body portion 152 of the display device 150 is intended to remain generally fixed relative to the seatback 120 in a position adjacent to, and behind, the headrest. According to alternative embodiments, the body portion of the display device may be movably mounted to the support member (so that the display device and the headrest are independently movable relative to one another and to the seatback) to increase the amount of adjustment available to a user.

[0038] Referring to FIGURE 8D, the display device 150 includes a movable display screen 154 that is pivotally connected along a top edge of the screen to the body portion 152, so that a user may pivotally adjust a viewing angle of the display screen 154 in a

manner that is independent from the position of the seatback 120 or headrest 124. Display device 150 may include any one or more of the variety of features, characteristics and capabilities as previously described in relation to the display device 50 of FIGURES 2A-4.

[0039] According to another alternative embodiment, the headrest and display device may be integrated together using a bracket, such as the support member shown in FIGURE 7. According to such an embodiment, a display device (with a pivoting display screen) may have a body portion fixedly secured to the support member, and a pair of rods are integrated with either the support member or the display device. The rods are arranged to movably mount the headrest in front of the display device for vertical adjustment of the headrest relative to the seatback within a predetermined range.

[0040] According to any preferred embodiment, the seatback entertainment display system provides an improved system and method for optimizing an adjustment of the viewing angle for a rear seat display device 50, 150. The system permits a viewer to adapt the display device 50, 150 to any desired viewing angle independent of the position of the headrest on the seatback, or the position of the seatback (e.g. reclined, upright, etc.) and the elevation of the seatback (raised, lowered, etc.). The system is also intended to reduce cost by (among others) providing a relatively standardized system usable on any of a wide variety of seatback frames.

[0041] The construction and arrangement of the elements of the seatback entertainment display system as shown in the preferred and other exemplary embodiments is illustrative only. Although only a few embodiments of the present inventions have been described in detail in this disclosure, those skilled in the art who review this disclosure will readily appreciate that many modifications are possible (e.g., variations in sizes, dimensions, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, use of materials, colors, orientations, etc.) without materially departing from the novel teachings and advantages of the subject matter recited herein (e.g., the variety of adjustment features may be chosen or selected and combined to suit any desired application). For example, elements shown as integrally formed may be constructed of multiple parts or elements, the position of elements may be reversed or otherwise varied, and the nature or number of discrete elements or positions may be altered or varied. It should be noted that the elements and/or assemblies of the support member may be

constructed from any of a wide variety of materials that provide sufficient strength or durability, including any of a wide variety of moldable plastic materials (such as high-impact plastic) in any of a wide variety of colors, textures and combinations. Other substitutions, modifications, changes and omissions may be made in the design, operating conditions and arrangement of the preferred and other exemplary embodiments without departing from the scope of the present inventions.

[0042] The order or sequence of any process or method steps may be varied or re-sequenced according to alternative embodiments. In the claims, any means-plus-function clause is intended to cover the structures described herein as performing the recited function and not only structural equivalents but also equivalent structures. Other substitutions, modifications, changes and omissions may be made in the design, operating configuration and arrangement of the preferred and other exemplary embodiments without departing from the spirit of the present inventions as expressed in the appended claims.

What is claimed is:

1. A seatback entertainment display system for a vehicle seat having a seatback frame for supporting a seatback and a headrest, comprising:
 - a support member coupled to the seatback frame and extending substantially adjacent to and behind the headrest;
 - an adjustment device coupled to the support member; and
 - a display device coupled to the adjustment device.
2. The system of Claim 1 wherein the support member comprises a cantilever type frame extending upwardly from the top portion of the seatback.
3. The system of Claim 1 wherein the adjustment device comprises a forward-rearward tilting feature.
4. The system of Claim 1 wherein the adjustment device comprises a side-to-side pivoting feature.
5. The system of Claim 1 wherein the adjustment device comprises an up-down translation feature.
6. The system of Claim 1 wherein the adjustment device comprises a side-to-side translation feature.
7. The system of Claim 1 wherein the adjustment device and the support member are adaptable to optimize a viewing angle of the display device for an occupant of a rear seat of the vehicle, throughout an adjustment range of the seatback and headrest.
8. The system of Claim 1 wherein the display device includes at least one additional component selected from the group consisting of a media device, a speaker, a connectivity port, a headphone jack, and an auxiliary input.
9. The system of Claim 1 wherein the display device includes at least one lighting device selected from the group consisting of a reading lamp, a task lamp, a decorative accent lamp, and an ambient lighting lamp.

10. The system of Claim 1 wherein the display device includes a wireless transmitter and receiver.

11. A seatback entertainment system for use with a vehicle seat having a seatback and a headrest, comprising:

a frame for the seatback of the vehicle seat, the frame including a support member extending above the seatback and behind the headrest;

an adjustment device having a first portion and a second portion, the first portion coupled to the support member; and

a display device coupled to the second portion of the adjustment device.

12. The system of Claim 11 wherein the first portion and the second portion of the adjustment device are interconnected by a viscous coupler.

13. The system of Claim 11 wherein the first portion and the second portion of the adjustment device are interconnected by a friction-generating device.

14. The system of Claim 13 wherein the friction-generating device comprises a torque hinge that is operable to permit pivotal adjustment of the display device about a substantially horizontal axis.

15. The system of Claim 14 wherein the torque hinge is operable to permit pivotal adjustment of the display device about a substantially vertical axis.

16. The system of Claim 11 wherein the first portion of the adjustment device is slidably coupled to the support member.

17. The system of Claim 11 wherein the second portion of the adjustment device is slidably coupled to the display device.

18. The system of Claim 11 wherein the support member comprises a restorable break-free mechanism.

19. The system of Claim 11 wherein the display device includes an ambient lighting source integrated along a side of the display device.

20. The system of Claim 11 wherein the display device includes a screen portion and a body portion, and the screen portion is movably coupled to the body portion.

21. The system of Claim 11 wherein the adjustment device provides a connection point to facilitate removal and replacement of the display device.

22. A seat for a vehicle, comprising:
a seat bottom frame coupled to a seatback frame,
a headrest coupled adjacent to a top portion of the seatback frame;
a support member extending from the seatback frame, and adjacent to the headrest;
an adjustment device coupled to the support member; and
a display device coupled to the adjustment device.

23. The seat for a vehicle of Claim 22 wherein the support member comprises a cantilever type frame having a portion extending upwardly beyond the top portion of the seatback frame.

24. The seat for a vehicle of Claim 22 wherein the adjustment device comprises at least one hinge to permit movement about at least one of a substantially horizontal axis and a vertical axis.

25. The seat for a vehicle of Claim 22 wherein the support member further comprises a track configured to slidably receive a projection on the adjustment device.

26. The seat for a vehicle of Claim 22 wherein the display device comprises a track configured to slidably receive a tang extending from the adjustment device.

27. The seat for a vehicle of Claim 22 wherein the display device includes a screen having a touch screen interface for receiving an input from a user.

28. The seat for a vehicle of Claim 22 wherein the display device is removably coupled to the support member to permit removal of the display device from the seat by a user.

29. The seat for a vehicle of Claim 22 wherein the display device further comprises at least one of a component selected from the group consisting of a media device, a speaker, a connectivity port, a headphone jack, an auxiliary input, a lighting device, a wireless transmitter and a wireless receiver.

30. The seat for a vehicle of Claim 29 wherein the media device comprises a DVD player.

31. The seat for a vehicle of Claim 22 further comprising a camera arranged to provide an image on the display device.

32. The seat for a vehicle of Claim 22 wherein the display device comprises an interchangeable trim piece.

33. The seat for a vehicle of Claim 22 wherein the display device further comprises control buttons.

34. The seat for a vehicle of Claim 22 wherein the display device further comprises a movable display screen and a drive device arranged behind the display screen so that the drive device is hidden when the display screen is in a stowed position.

35. The seat for a vehicle of Claim 22 wherein the display device further comprises a compartment for an accessory device; the compartment arranged behind the display screen so that the compartment is hidden when the display screen is in a stowed position.

36. The seat for a vehicle of Claim 22 wherein the adjustment device permits movement of the display device approximately 180 degrees to accommodate movement of the seat to a stowed position.

37. A seat for a vehicle, comprising:

a seat bottom frame coupled to a seatback frame;

at least one support member extending from the seatback frame;

a display device having a body portion coupled to the support member in a generally fixed position, and a screen portion pivotally coupled to the body portion along a top edge of the screen portion for movement to any one of a plurality of viewing positions; and

a headrest movably coupled to one of the body portion and the support member for positioning of the headrest within a predetermined adjustment range relative to the seatback and the body portion of the display device.

38. A seat for a vehicle, comprising:

a seat bottom frame coupled to a seatback frame, the seatback frame having a pair of apertures;

a display device having a body portion, the body portion having a first pair of rod segments received and secured within the apertures of the seatback frame, and a second pair of rod segments configured to receive a headrest;

wherein the headrest is adjustable relative to the display device and the seatback frame along at least a portion of the second pair of rod segments.

39. The seat of Claim 38 wherein the headrest is movably positioned forward of, and adjacent to, the body portion of the display device.

40. The seat of Claim 38 further comprising a display screen having a top edge pivotally connected to the body portion of the display device.

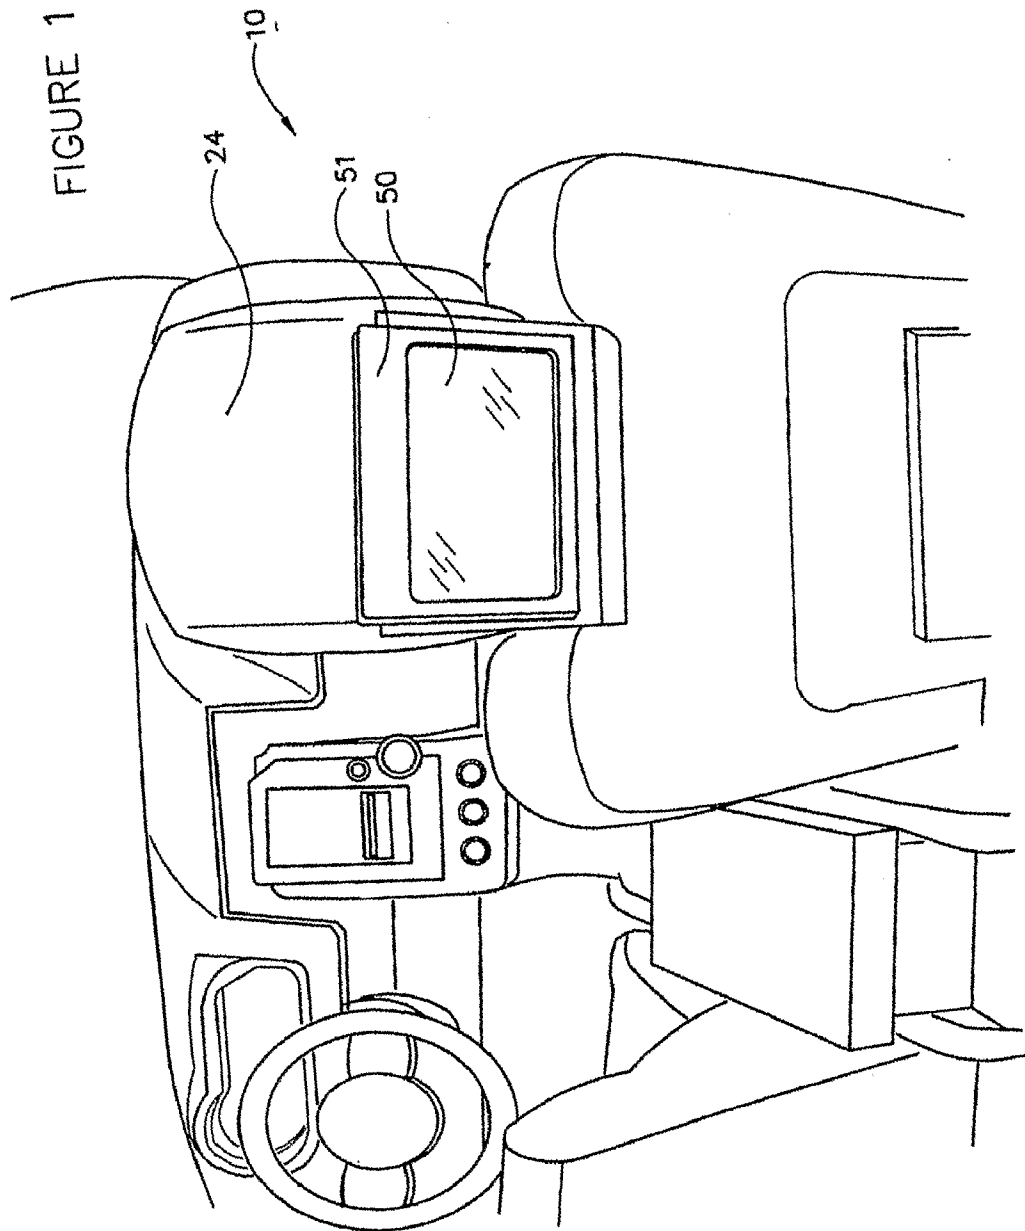


FIGURE 2A

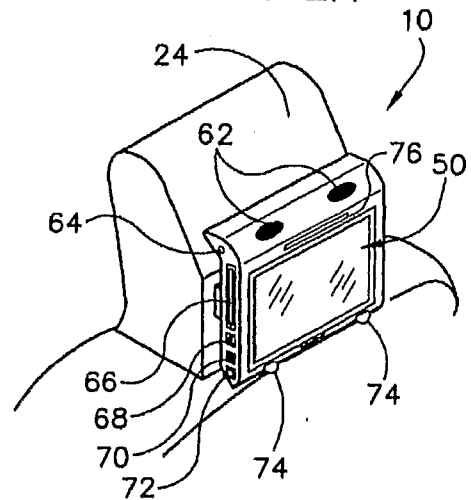


FIGURE 2B

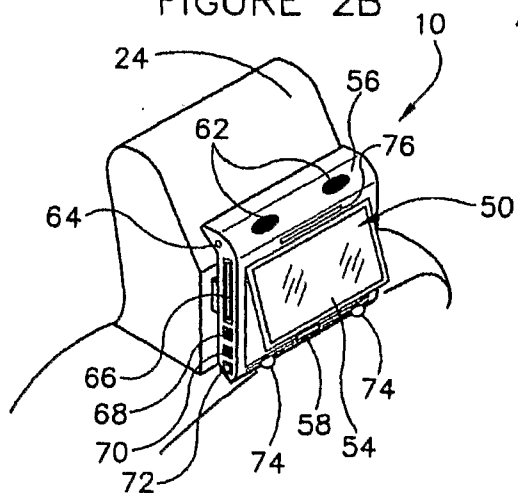


FIGURE 2C

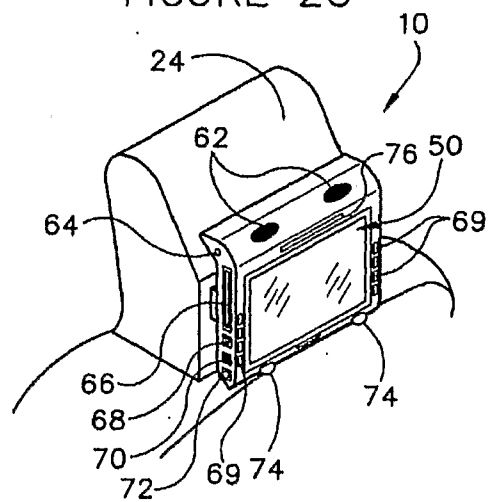


FIGURE 2D

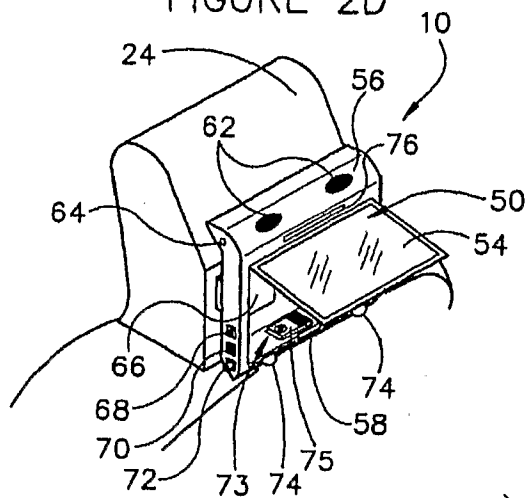


FIGURE 3

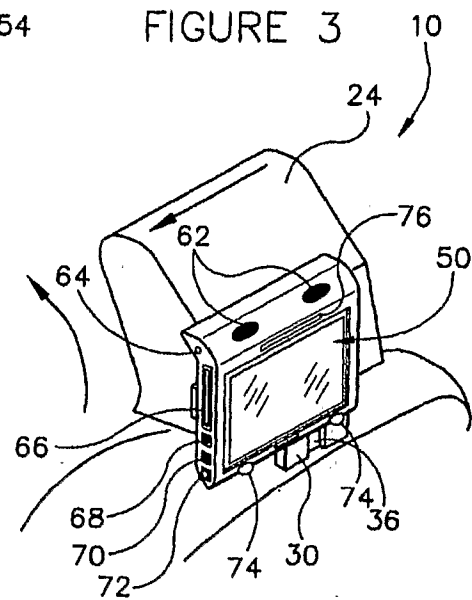


FIGURE 4

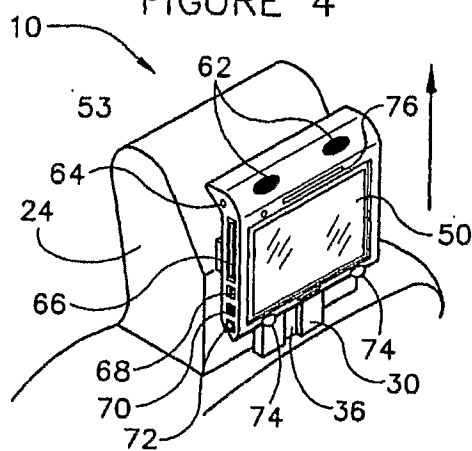


FIGURE 5

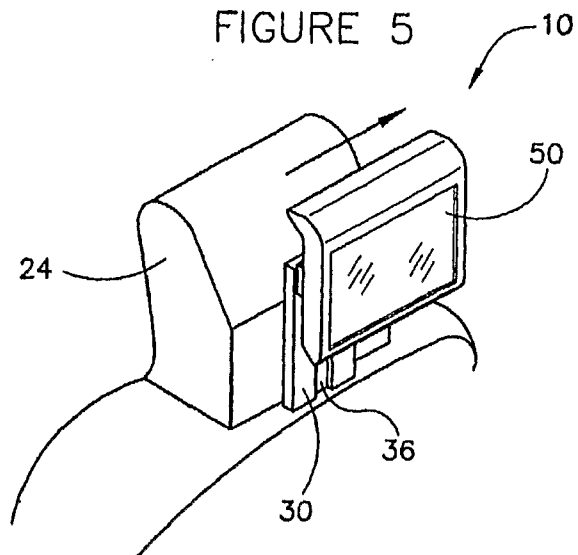


FIGURE 6A

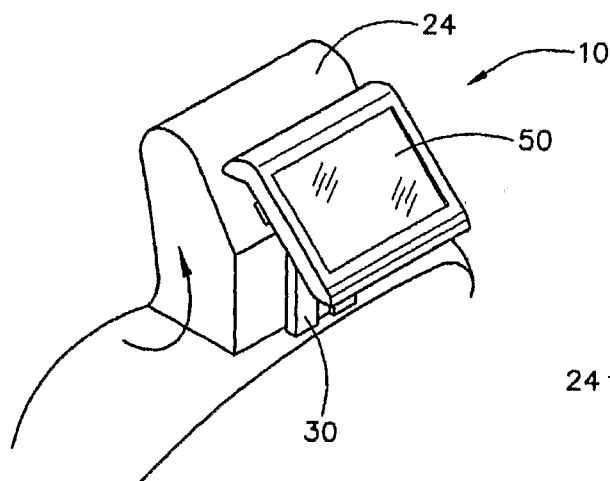


FIGURE 6B

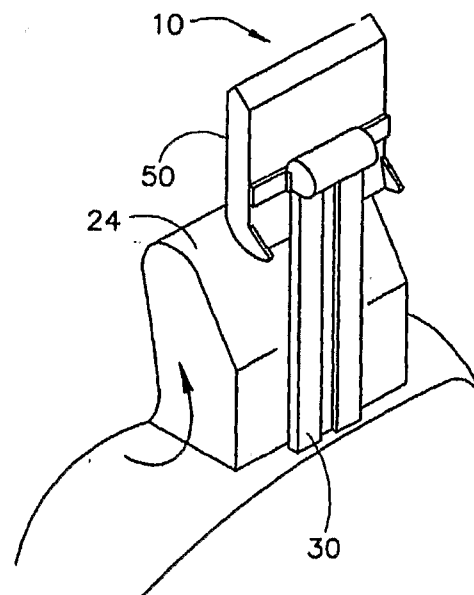


FIGURE 7

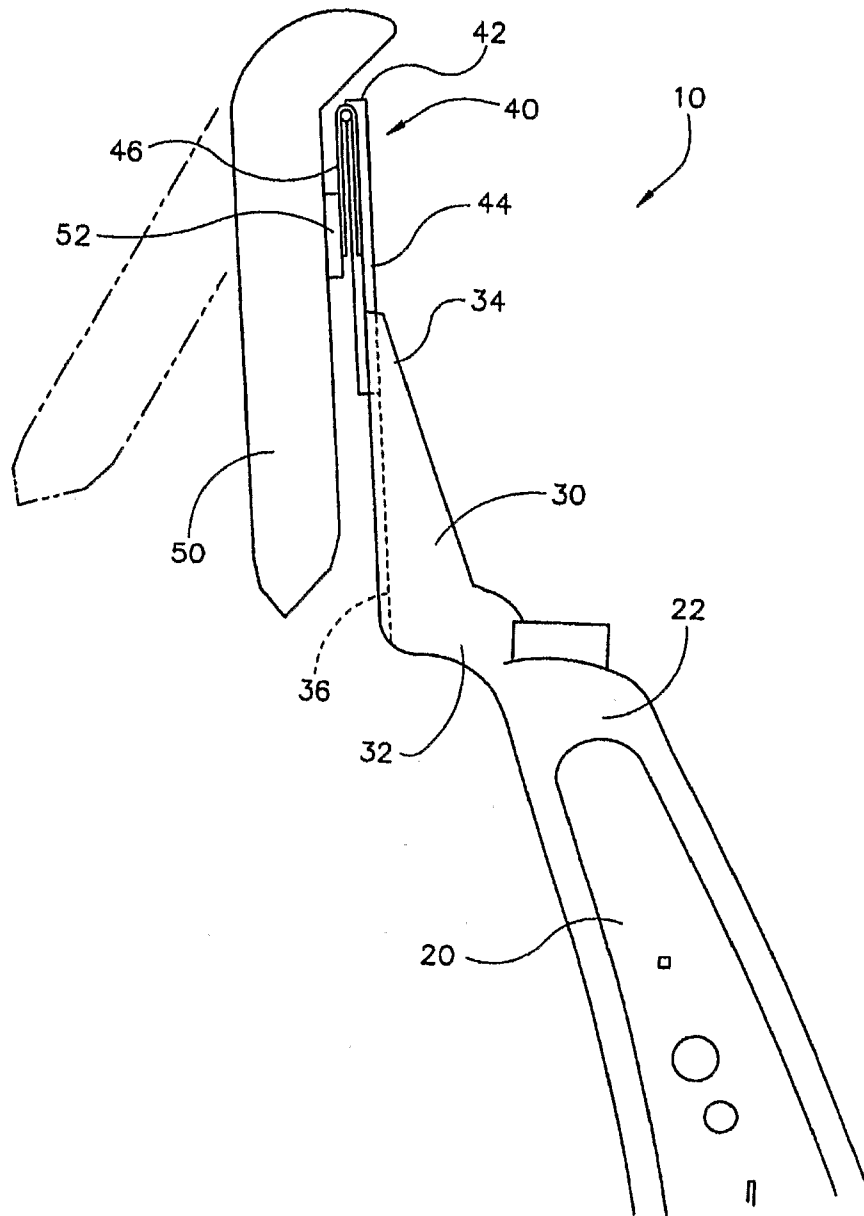


FIGURE 8A

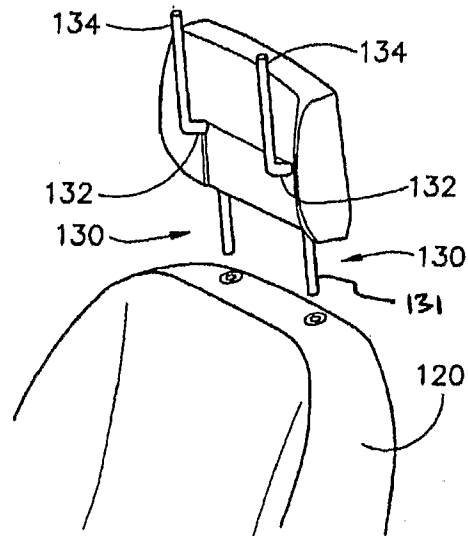


FIGURE 8B

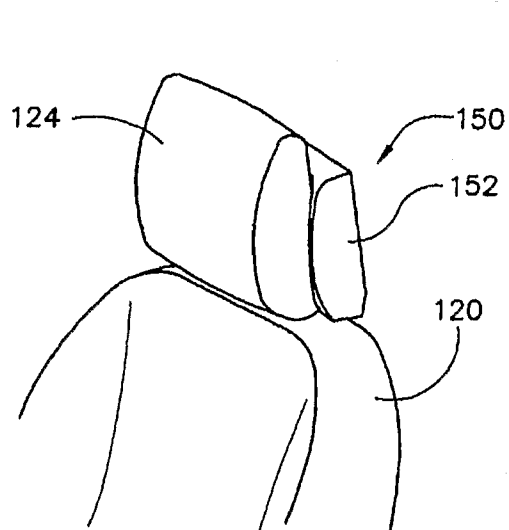
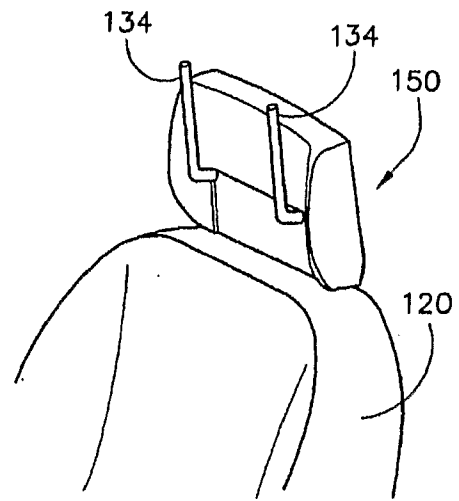


FIGURE 8C

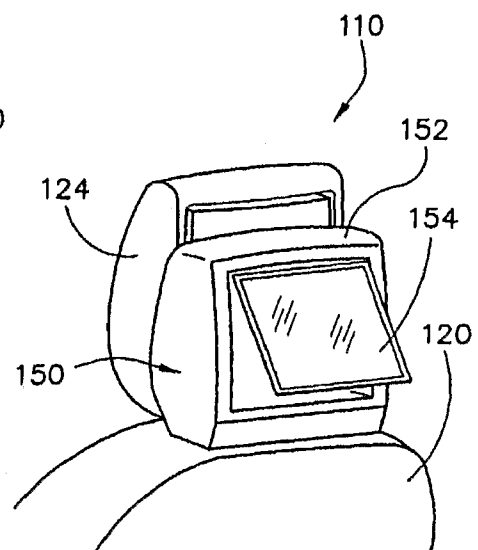


FIGURE 8D