



(86) Date de dépôt PCT/PCT Filing Date: 2008/01/31  
(87) Date publication PCT/PCT Publication Date: 2008/08/07  
(45) Date de délivrance/Issue Date: 2013/11/26  
(85) Entrée phase nationale/National Entry: 2008/09/03  
(86) N° demande PCT/PCT Application No.: EP 2008/000765  
(87) N° publication PCT/PCT Publication No.: 2008/092687  
(30) Priorité/Priority: 2007/01/31 (DE10 2007 005 720.4)

(51) Cl.Int./Int.Cl. *B01F 17/00* (2006.01),  
*C08G 18/28* (2006.01), *C08G 18/58* (2006.01),  
*C08G 18/64* (2006.01), *C08G 59/00* (2006.01),  
*C08G 59/06* (2006.01), *C08G 59/18* (2006.01),  
*C08G 59/40* (2006.01)



(72) Inventeurs/Inventors:  
ORTH, ULRICH, DE;  
OMEIS, JUERGEN, DE;  
HOLTKAMP, HERIBERT, DE;  
PICKAVE, MATTHIAS, DE

(73) Propriétaire/Owner:  
BYK-CHEMIE GMBH, DE

(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : AGENTS MOUILLANTS ET DEFLOCULANTS UNIVERSELS BASES SUR DES MONOADDUCTEURS  
D'ISOCYANATES

(54) Title: UNIVERSAL WETTING AND DISPERSING AGENTS BASED ON ISOCYANATE MONOADDUCTS

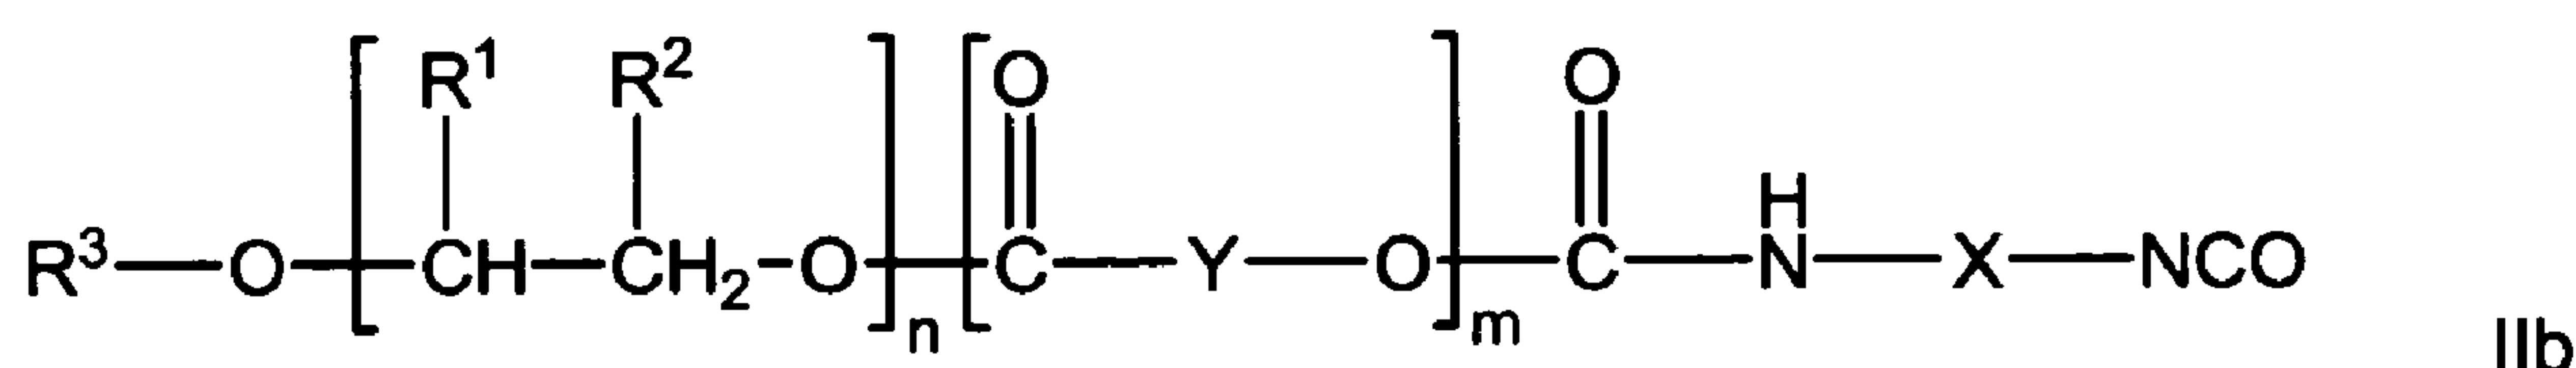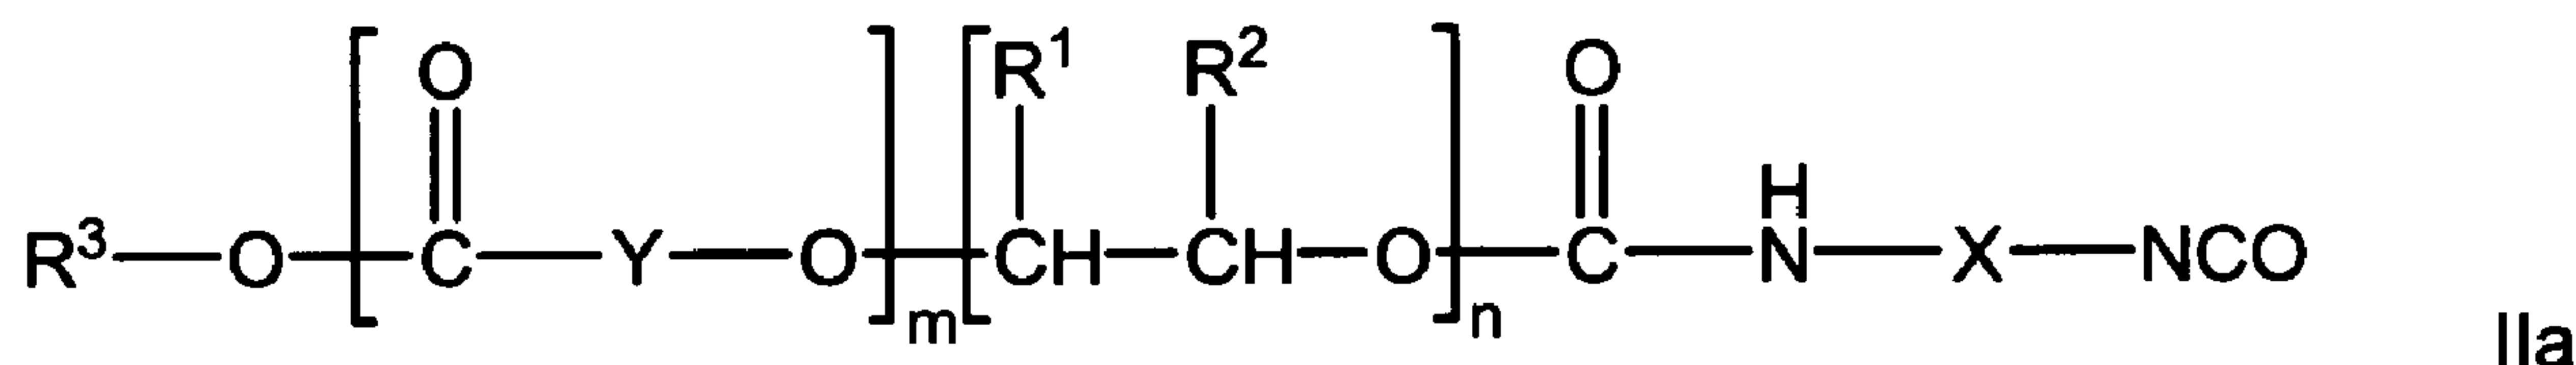

(57) Abrégé/Abstract:

Addition compound which is suitable as wetting agent and dispersant and can be obtained by reaction of A) polyepoxides with B) at least one aliphatic and/or araliphatic primary amine of the general formula (I)  $\text{H}_2\text{N}-\text{R}$  where  $\text{R}$  = alkyl, cycloalkyl, aryl or aralkyl and the primary amine can bear further functional groups selected from among -OH, tertiary amine or carboxyl, and subsequent addition C) of at least one modified isocyanate of the general formula (IIa) and/or (IIb), where  $\text{R}^3$  = alkyl, cycloalkyl, aryl or aralkyl,  $\text{R}^1$  and  $\text{R}^2$  are each, independently of one another, H, alkyl or aryl,  $\text{X}$  = alkylene, cycloalkylene and/or aralkylene,  $\text{Y}$  = alkylene and/or cycloalkylene and  $n$  and  $m$  are independent of one another and the sum  $n+m$  is  $\geq 2$ , to form a urethane.

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum  
Internationales Büro(43) Internationales Veröffentlichungsdatum  
7. August 2008 (07.08.2008)

PCT

(10) Internationale Veröffentlichungsnummer  
**WO 2008/092687 A1**

## (51) Internationale Patentklassifikation:

*B01F 17/00* (2006.01)    *C08G 59/00* (2006.01)  
*C08G 18/28* (2006.01)    *C08G 59/06* (2006.01)  
*C08G 18/58* (2006.01)    *C08G 59/18* (2006.01)  
*C08G 18/64* (2006.01)    *C08G 59/40* (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2008/000765

## (22) Internationales Anmeldedatum:

31. Januar 2008 (31.01.2008)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

## (30) Angaben zur Priorität:

10 2007 005 720.4    31. Januar 2007 (31.01.2007)    DE



(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von  
US): **BYK-CHEMIE GMBH** [DE/DE]; Abelstrasse 45,  
46483 Wesel (DE).

## (72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **ORTH, Ulrich**  
[DE/DE]; Orchideenweg 2, 46485 Wesel (DE). **OMEIS,**  
**Jürgen** [DE/DE]; Wiesental 35, 46286 Dorsten-Lembeck  
(DE). **HOLTKAMP, Heribert** [DE/DE]; Frankenstrasse  
1a, 46487 Wesel (DE). **PICKAVÉ, Matthias** [DE/DE];  
Teutonenstrasse 67, 45478 Mülheim/Ruhr (DE).(74) Anwalt: **LEIFERT & STEFFAN**; Burgplatz 21-22,  
40213 Düsseldorf (DE).(81) Bestimmungsstaaten (soweit nicht anders angegeben, für  
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,  
AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY,  
BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ,  
LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK,  
MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG,

[Fortsetzung auf der nächsten Seite]

(54) Title: UNIVERSAL WETTING AGENTS AND DISPERSANTS BASED ON ISOCYANATE MONOADDUCTS

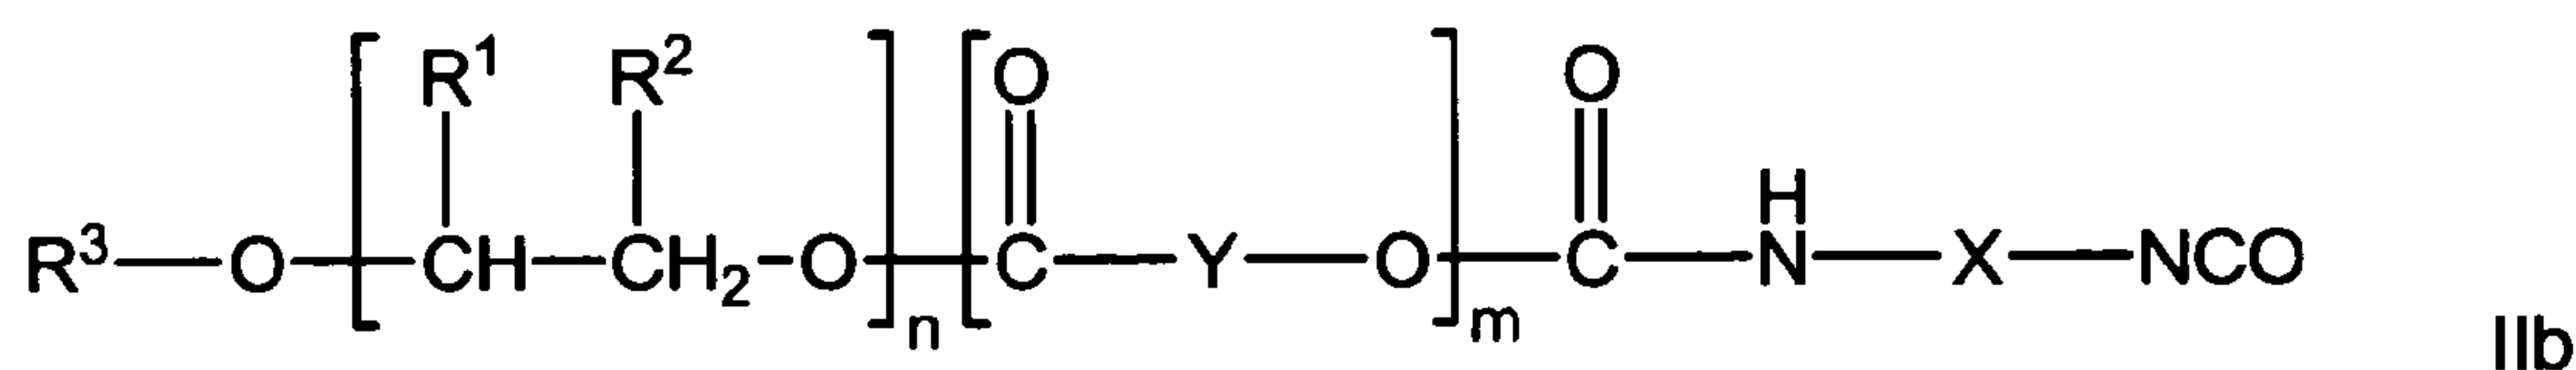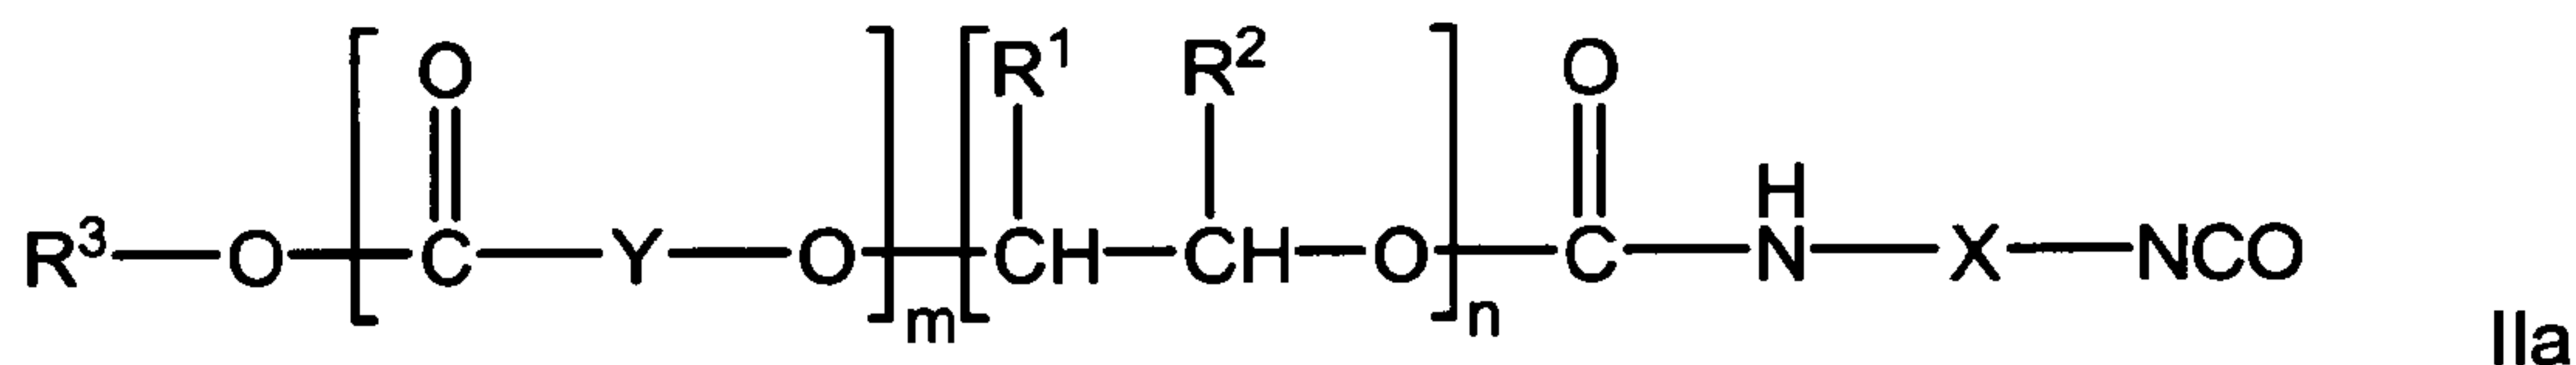(54) Bezeichnung: UNIVERSELLE NETZ- UND DISPERGIERMITTEL AUF DER BASIS VON ISOCYANAT-MONOAD-  
DUKTEN(57) Abstract: Addition compound which is suitable as wetting agent and dispersant and can be obtained by reaction of A) polyepoxides with B) at least one aliphatic and/or araliphatic primary amine of the general formula (I) H<sub>2</sub>N-R where R = alkyl, cycloalkyl, aryl or aralkyl and the primary amine can bear further functional groups selected from among -OH, tertiary amine or carboxyl, and subsequent addition C) of at least one modified isocyanate of the general formula (IIa) and/or (IIb), where R<sup>3</sup> = alkyl, cycloalkyl, aryl or aralkyl, R<sup>1</sup> and R<sup>2</sup> are each, independently of one another, H, alkyl or aryl, X = alkylene, cycloalkylene and/or aralkylene, Y = alkylene and/or cycloalkylene and n and m are independent of one another and the sum n+m is ≥ 2, to form a urethane.(57) Zusammenfassung: Als Netz- und Dispergiermittel geeignete Additionsverbindung, erhältlich aus der Umsetzung von A) Polyepoxiden mit B) mindestens einem aliphatischen und/oder araliphatischen primären Aminen der allgemeinen Formel (I) H<sub>2</sub>N-R wobei R = Alkyl, Cycloalkyl, Aryl und Aralkyl bedeutet und wobei das primäre Amin noch weitere funktionelle Gruppen ausgewählt aus -OH, tertiäres Amin oder Carboxyl tragen kann und nachfolgende Addition C) mindestens eines modifizierten Isocyanats der allgemeinen Formel IIa und/oder IIb wobei R<sup>3</sup> = Alkyl, Cycloalkyl, Aryl oder Aralkyl ist, R<sup>1</sup> und R<sup>2</sup> unabhängig voneinander H, Alkyl und/oder Aryl sind, X = Alkylen, Cycloalkylen und/oder Aralkylen, Y = Alkylen und/oder Cycloalkylen und n und m unabhängig voneinander sind, wobei die Summe n+m ≥ 2 ist, unter Bildung eines Urethans.

WO 2008/092687 A1

# WO 2008/092687 A1



PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(84) Bestimmungsstaaten** (*soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK,

**Veröffentlicht:**

- mit internationalem Recherchenbericht
- mit geänderten Ansprüchen und Erklärung

Byk-Chemie GmbH  
L 06 051

Universal wetting and dispersing agents based on  
isocyanate monoadducts

The invention relates to reaction products of epoxides  
5 with amines and polyalkyleneoxide modified and/or  
polyester-modified and/or polyether-polyester-modified  
isocyanates to give aminic polymers, and also their  
salts, as wetting and dispersing agents for pigments  
and fillers, and also to a process for preparing them.  
10 The resultant polymers are comblike. The invention  
further relates to the use of these reaction products  
as wetting and dispersing agents for organic and  
inorganic pigments, and also fillers, in aqueous and  
solvent-borne systems.

15 The aforementioned reaction products are suitable more  
particularly for preparing pigment concentrates and  
also for stabilizing solids in binders, coating  
materials, plastics and polymeric mixtures. As wetting  
20 and dispersing agents they reduce the viscosity of such  
systems, improve the storage stability and the flow  
properties, and may enhance the colour strength.

High mechanical forces are necessary in order to  
25 introduce solids stably into liquid media. As a  
consequence of this it is usual to use agents in order  
to lower these dispersing forces and hence to minimize  
not only the total energy input required into the  
system but also the dispersing time. The known  
30 dispersing agents (dispersants) are generally surface-  
active substances which in a small amount are either  
applied directly to the solid or added to the liquid  
medium. Even after complete deflocculation of the  
agglomerates of solids, instances of reagglomeration  
35 may occur after the dispersing operation, thereby  
wholly or partly negating the dispersing effort. In  
this way, unwanted effects may come about, such as an

Byk-Chemie GmbH  
L 06 051

- 2 -

increase in viscosity in the liquid systems, shade drift, or a loss of gloss in paints and coatings.

A multiplicity of different substances are known for present-day use as dispersants for pigment and fillers. One review of existing patent literature is found in EP 0 318 999 A. As well as simple compounds of low molecular weight such as lecithin, fatty acids and their salts, and alkylphenol ethoxylates, use is also made, by way of example, of complex structures as wetting and dispersing agents.

One known group of such dispersants is based on reaction products of monoepoxides or polyepoxides with amines which contain an imidazoline moiety. A review of this group of dispersants is found in publications including the U.S. patents US 5 128 393 and US 4 710 561. Another group of dispersants is formed from polyepoxide/amine mixtures and their salts. The publications DE 36 23 296 A and DE 36 23 297 A disclose the use of such mixtures as dispersants for pigments primarily in organic media, the polyepoxides being novolaks and the amines used being aliphatic, aromatic and/or heterocyclic amines of low molecular weight.

Recently there have been further developments in the field of the polyepoxide/amine dispersants. EP 747 413 A describes, as emulsifiers, reaction products of aliphatic polyols with epoxides having at least two epoxide groups per ring. These compounds, accordingly, do not carry any nitrogen atoms from which salts can be formed, and therefore exhibit only low affinity for fillers and pigments. DE 103 26 147 A1, in contrast, describes addition compounds, suitable as wetting and dispersing agents, of monofunctional or polyfunctional aromatic epoxides with polyoxyalkylenemonoamines. These specific amines contain at least four ether oxygens per molecule. A further application of the specific

Byk-Chemie GmbH  
L 06 051

- 3 -

polyether-substituted amines is disclosed in WO 2005/113677 A1. There the amines serve as emulsifiers for producing a wide spectrum of paints with a high pigment fraction.

5

Features common to all of the aforementioned dispersants are that they were in each case developed for a narrowly restricted field of use and therefore are geared specifically to the pigment/binder mixture.

10 In systems with sharp differences in polarity, however, their usefulness is limited.

A further disadvantage of the dispersants that are based on polyether-substituted amines lies in the  
15 limited availability of the amines. At the present time, for example, only about five different amines are available. Polyether-polyester-modified primary amines, in contrast, are not available at all.

20 Specifically in the context of industrial applications the narrow spectrum and poor availability of the existing wetting and dispersing agents represents a barrier, since in the train of the rationalized operational sequences it is preferred to use modular  
25 components. In the sense of a building-block system, these modular components ought to be readily compatible with the other components such as binders, auxiliaries and solvents.

30 It is an object of the present invention, therefore, to provide a wetting and dispersing agent that is highly compatible with commonplace binder and solvent systems. At the same time the wetting and dispersing agent is to be readily available and to have good long-term  
35 stability and storage stability. An accompanying aim is to specify a process for preparing such wetting and dispersing agents.

Byk-Chemie GmbH  
L 06 051

- 4 -



This object is achieved in accordance with the invention by means of an addition compound suitable as a wetting and dispersing agent and obtainable from the  
5 reaction of

- A) polyepoxides with
- B) at least one aliphatic and/or araliphatic primary amine of the general formula I

10  $\text{H}_2\text{N}-\text{R}$  I

where R is alkyl, cycloalkyl, aryl or aralkyl, and where the primary amine may also carry further functional groups selected from -OH, tertiary amine or  
15 carboxyl, and subsequent addition reaction of

- C) at least one modified isocyanate of the general formula IIa and/or IIb

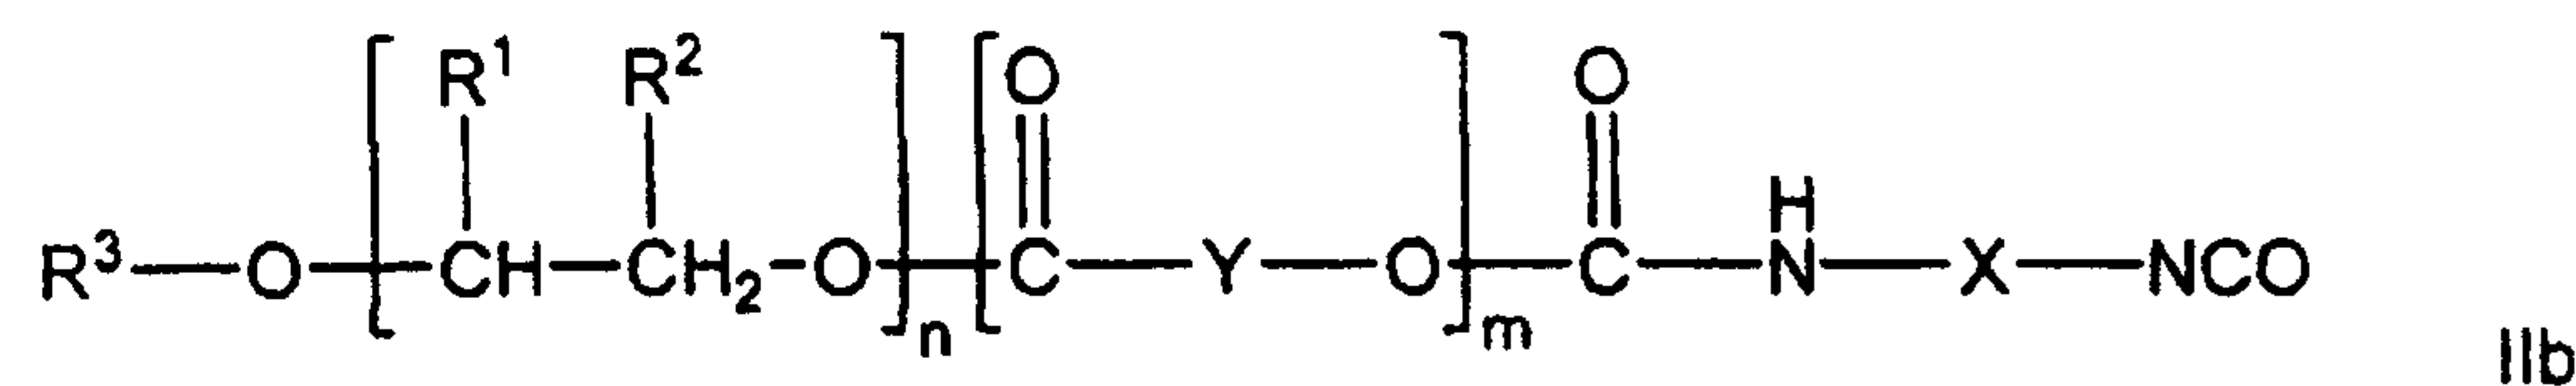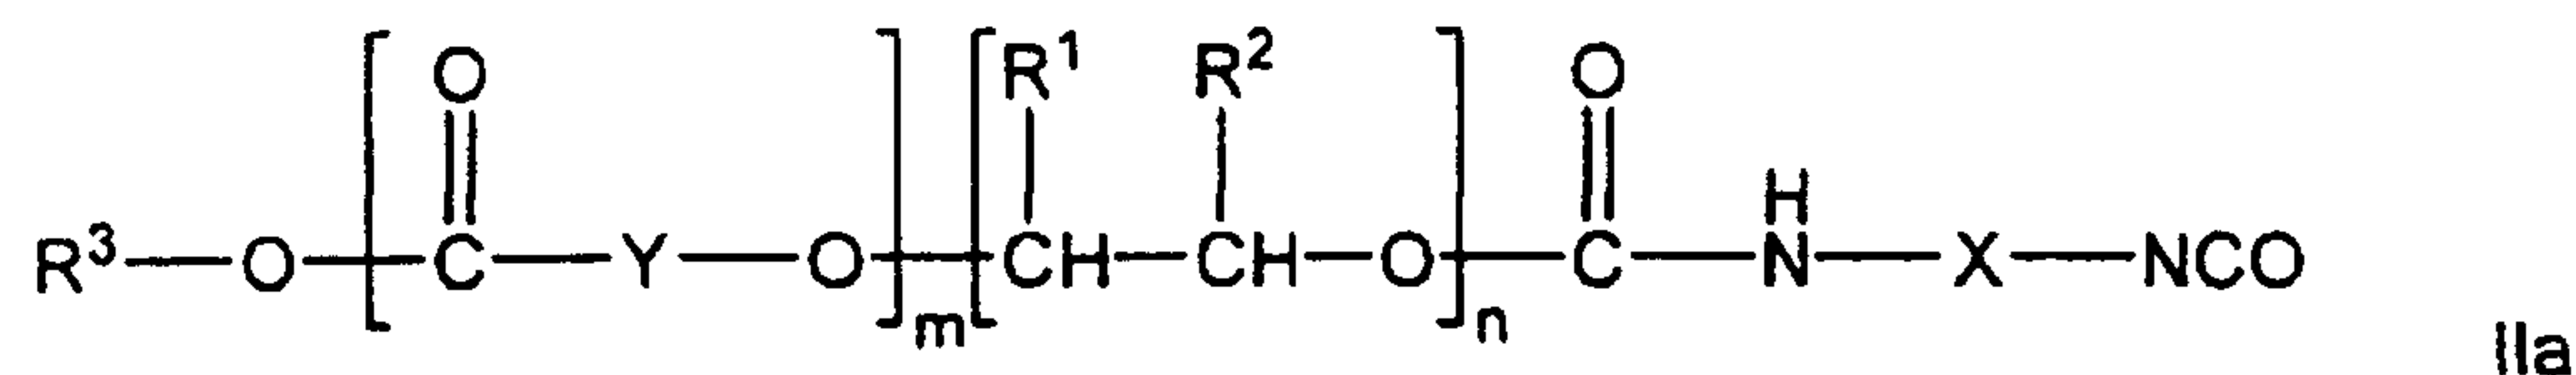

20 where  $\text{R}^3$  is alkyl, cycloalkyl, aryl or aralkyl,  $\text{R}^1$  and  $\text{R}^2$  independently of one another are H, alkyl and/or aryl, X is alkylene, cycloalkylene and/or aralkylene, Y is alkylene and/or cycloalkylene and n and m are independent of one another, the sum  $n+m$  being  $\geq 2$ ,  
25 to form a urethane.

As a result of the use of the polyether-, polyester- and/or polyether-polyester-modified isocyanates the addition compounds of the invention have a broad

Byk-Chemie GmbH  
L 06 051

- 5 -

availability. The urethane bond additionally present in the compounds of the invention allows not only a broad compatibility with commonplace binder/solvent systems but also an advantageous long-term stability and storage stability, on the basis of their chemical inertness.

As component A it is possible to use aromatic-containing and/or aliphatic polyepoxides. The polyepoxides can contain two or more epoxy groups per molecule, and have at least six carbon atoms. Mixtures of different polyepoxides can also be used. Typical examples from the group of the aromatic-containing polyepoxides are reaction products of diphenylolpropane (bisphenol A) with epichlorohydrin and the higher homologues thereof that are available, for example, under the brand names D.E.R. or Epikote from the DOW Chemical Company or from Resolution Performance Products, respectively. Examples of aliphatic polyepoxides are 1,6-hexane diglycidyl ether and 1,4-butane diglycidyl ether. The aliphatic polyepoxides may also additionally contain oxygen in the chain, such as polypropylene glycol diglycidyl ether and polytetrahydrofuran diglycidyl ether, for example. These aliphatic polyepoxides are available, for example, under the trade name Grilonit<sup>®</sup> from Ems-Chemie.

The aliphatic and/or araliphatic amines of component B preferably have 3 to 28 carbon atoms. As additional functional groups particular preference is given to hydroxyl groups or to tertiary amino groups. Suitable amines having an additional functional group are, for example ethanolamine, butanolamine, 2-amino-2-methyl-1-propanol. Suitable amines having more than one additional functional group are, for example, 2-amino-2-ethyl-1,3-propanediol or 2-amino-2-hydroxymethyl-1,3-propanediol. More particular preference is possessed,


Byk-Chemie GmbH  
L 06 051

- 6 -

for example, by ethanolamine, butanolamine and/or dimethylaminopropylamine. In accordance with the invention the amines of component B preferably have no alkoxy functions as additional functional groups.

5

The modified isocyanates C are preferably polyalkyleneoxide modified isocyanates of the formula IIc

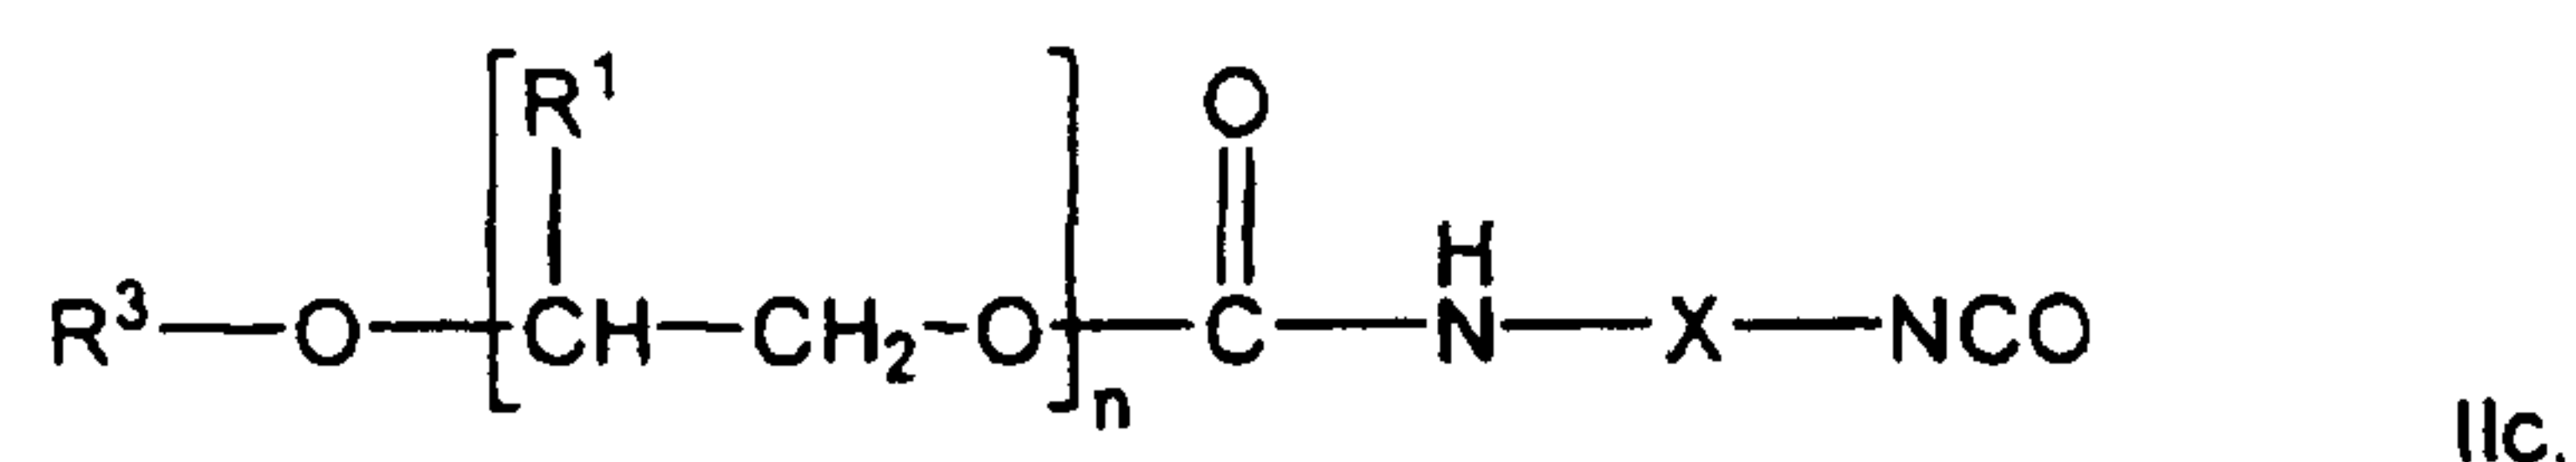

10

where  $\text{R}^3$  is alkyl, cycloalkyl, aryl or aralkyl,  $\text{R}^1$  is H, methyl and/or ethyl, X is alkylene, cycloalkylene and/or aralkylene and n is 1 to 100. Particular preference is given to polyalkyleneoxide modified isocyanates IIc with  $n = 2$  to 100.

15

In one preferred embodiment of the present invention at least one further primary amine D is used of the general formula III

20



where  $\text{R}'$  is alkylene and Z is a heterocyclic radical. The amines of component D are preferably heterocyclic compounds having 5- or 6-membered rings, containing as heteroatoms preferably N and/or O, such as, for example, N-(3-aminopropyl)imidazole or N-(2-aminoethyl)morpholine.

25

30 In accordance with the invention the components A and B or A, B and D can be reacted with one another in a stoichiometric excess of component A to form epoxide-terminated polymers.

It is equally possible in accordance with the invention


Byk-Chemie GmbH  
L 06 051

- 7 -

to react components A and B or A, B and D with one another in a stoichiometric excess of components B and/or D to form amine-terminated polymers.

- 5 In a further preferred embodiment of the present invention component C is used in an amount such that 5-100%, preferably 20-100% and with particular preference 40-100% of the OH groups generated by the addition reaction of components A, B and D are reacted with  
10 formation of urethane.

In one preferred embodiment of the present invention component A is diepoxides of the general formula IV

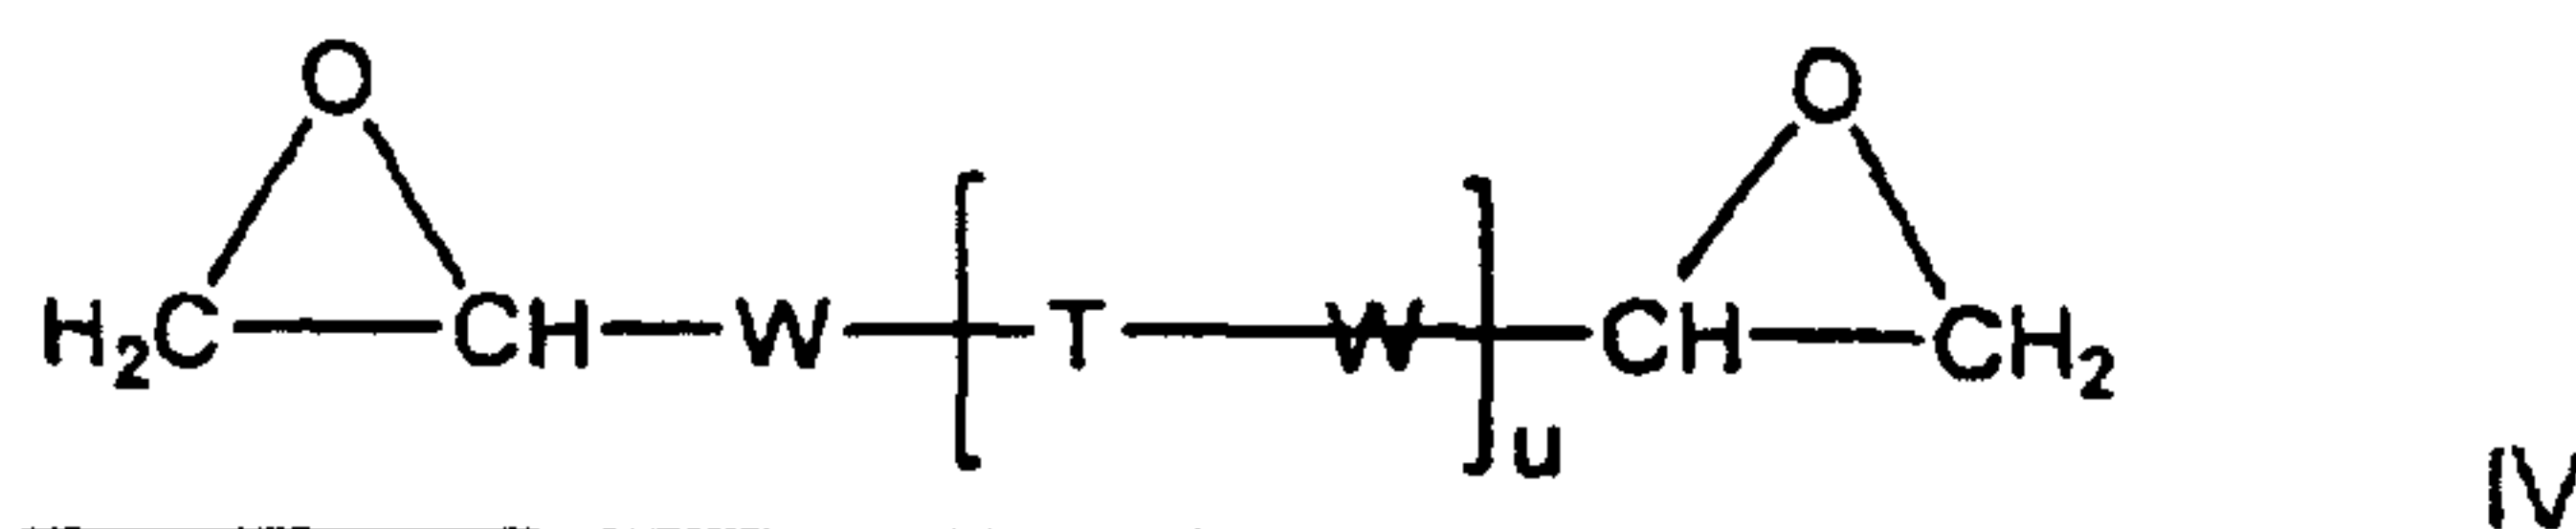

15

with W = -CH<sub>2</sub>-O- or -CH<sub>2</sub>-, T = alkyl, cycloalkyl, aryl or aralkyl, and u = 1-8.

- 20 Particular preference is given to the use as component A of aromatic-containing diepoxide compounds having on average two epoxy functions per molecule, and with particular preference diglycidyl ethers of difunctional phenols. The aromatic-containing diepoxide compounds  
25 have the advantage that they exhibit a higher binder compatibility.

- Particular preference is given to using, as component A, aliphatic or cycloaliphatic diepoxide compounds  
30 having on average two epoxy functions per molecule, and with particular preference diepoxide compounds containing diglycidyl ether. As a result of the lower inherent viscosity of these aliphatic and cycloaliphatic diepoxide compounds as compared with the

Byk-Chemie GmbH  
L 06 051

- 8 -

aromatic-containing compounds, and the associated lower viscosity of the polymer formed, structures of higher molecular mass are possible.

5 The addition compounds obtained from components A, B and C or A, B, C and D constitute high-value wetting and dispersing agents of broad compatibility. They can be used in the form in which they are obtained as a result of the two-stage reaction. In order to adapt  
10 their properties in each individual case to specific requirements, however, it is in some cases desirable to subject them to further modification. Described below are suitable modifications based on a reaction with the hydroxyl and/or amino groups present in the addition  
15 compounds. In the course of the modification some or all of these groups may be reacted.

The following modification reactions can be combined as and when required, thereby giving multiply modified  
20 addition compounds. Where two or more modification reactions are to be carried out in succession, it should be ensured that a sufficient number of reactive groups for one or more subsequent reactions be maintained in the molecule. The stated modifications  
25 are advantageous embodiments of the present invention and can be realized by:

1. reacting the terminal amino groups with isocyanates, lactones, cyclic carbonates or acrylates,
- 30 2. reacting the terminal epoxide group with secondary amines or acids,
3. reacting the remaining hydroxyl function with hydroxycarboxylic acids and/or cyclic lactones,
4. reacting the remaining hydroxyl function with  
35 isocyanates other than those listed under C,
5. reacting the remaining hydroxyl function with phosphoric acid or polyphosphoric acid and/or acidic

Byk-Chemie GmbH  
L 06 051

- 9 -

phosphoric esters and/or carboxylic acids, and

6. alkylating or oxidizing the amino group to form quaternary ammonium salts or nitrogen oxides.

5 The free hydroxyl groups remaining, where appropriate, in the addition compounds of the invention can be esterified as indicated under 3. The esterification takes place in a way which is known to a person skilled in the art. If there are also free amino groups present  
10 in the addition product of the invention, it is advisable to form salts of these amino groups prior to the esterification, in order to obtain a satisfactory reaction rate. In the transesterification, terminal OH groups are retained, thereby making the resultant  
15 products outstandingly suited through particularly broad compatibility in numerous paint systems.

The compounds formed in the addition reaction of the invention, with hydroxyl groups remaining if  
20 appropriate, may also be reacted with isocyanates as per 4. The urethane formation is carried out in a way which is known to a person skilled in the art. The transformation of the hydroxyl group into a urethane group is preferably performed if hydroxyl groups are  
25 disruptive in the paint system. Furthermore, the further urethane formation may be beneficial to the defoaming action of the wetting and dispersing agents. Particularly in cases of grinding in aqueous formulations, suppressing the foam tendency constitutes  
30 an important additional property of the wetting and dispersing agents.

The modification described under 6. of the amino groups remaining where appropriate takes place in a way which  
35 is known to a person skilled in the art. Quaternization of the amino nitrogen atom, for example, may be achieved using alkyl or aralkyl halides, using

Byk-Chemie GmbH  
L 06 051

- 10 -

halocarboxylic esters or using epoxides. Quaternization of this kind is preferred, for example, when amino groups are disruptive in the binder system into which the pigment paste is incorporated.

5

The reaction of the epoxide function of component A with the amino groups of components B or B and C to form the  $\beta$ -hydroxyamino function may be carried out in a solvent system, but preferably in bulk, in accordance with the methods that are known to a person skilled in the art. The reaction temperature to be chosen depends on the reactivity of the reactants. Many epoxides react with amines even at room temperature. For less reactive epoxides, in contrast, reaction temperatures of up to 15 160°C may be needed. Particularly suitable reaction temperatures for the reaction of epoxides with amines are situated at 50-120°C. Where appropriate, catalysts known to a person skilled in the art can be used in order to accelerate the reaction of the epoxide with 20 the amine.

Component C is preferably prepared by the methods as described in DE 199 19 482 A1. For that purpose, monohydroxy compounds are reacted with an excess of 25 diisocyanate, preferably tolylene diisocyanate, and the unreacted portion of the diisocyanate is removed from the reaction mixture.

The object of the present invention is likewise 30 achieved by a process for preparing an addition compound suitable as a wetting and dispersing agent, by reaction of



- A) polyepoxides with
- B) at least one aliphatic and/or araliphatic primary 35 amine of the general formula I



Byk-Chemie GmbH  
L 06 051

- 11 -


where R is alkyl, cycloalkyl, aryl and aralkyl, and  
where the primary amine may also carry further  
functional groups selected from -OH, tertiary amine or  
5 carboxyl, and subsequent addition reaction of  
C) at least one modified isocyanate of the general  
formula IIa and/or IIb

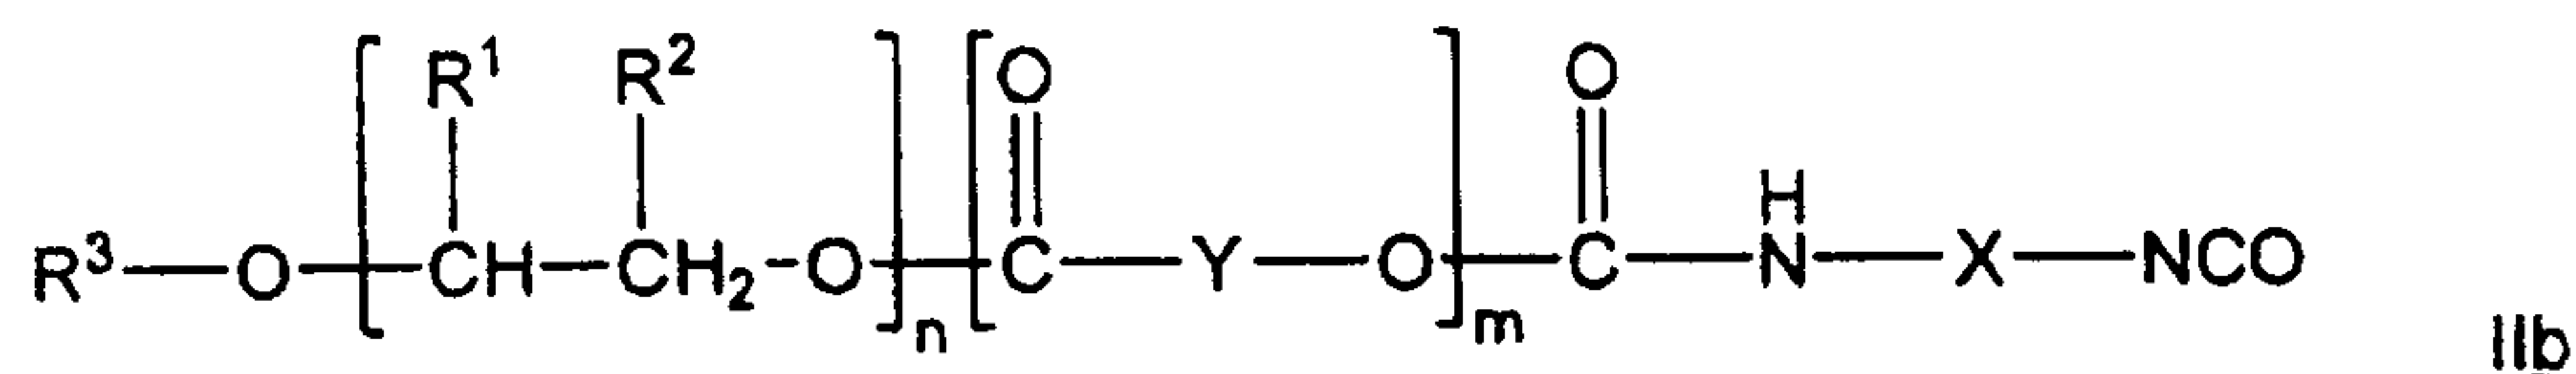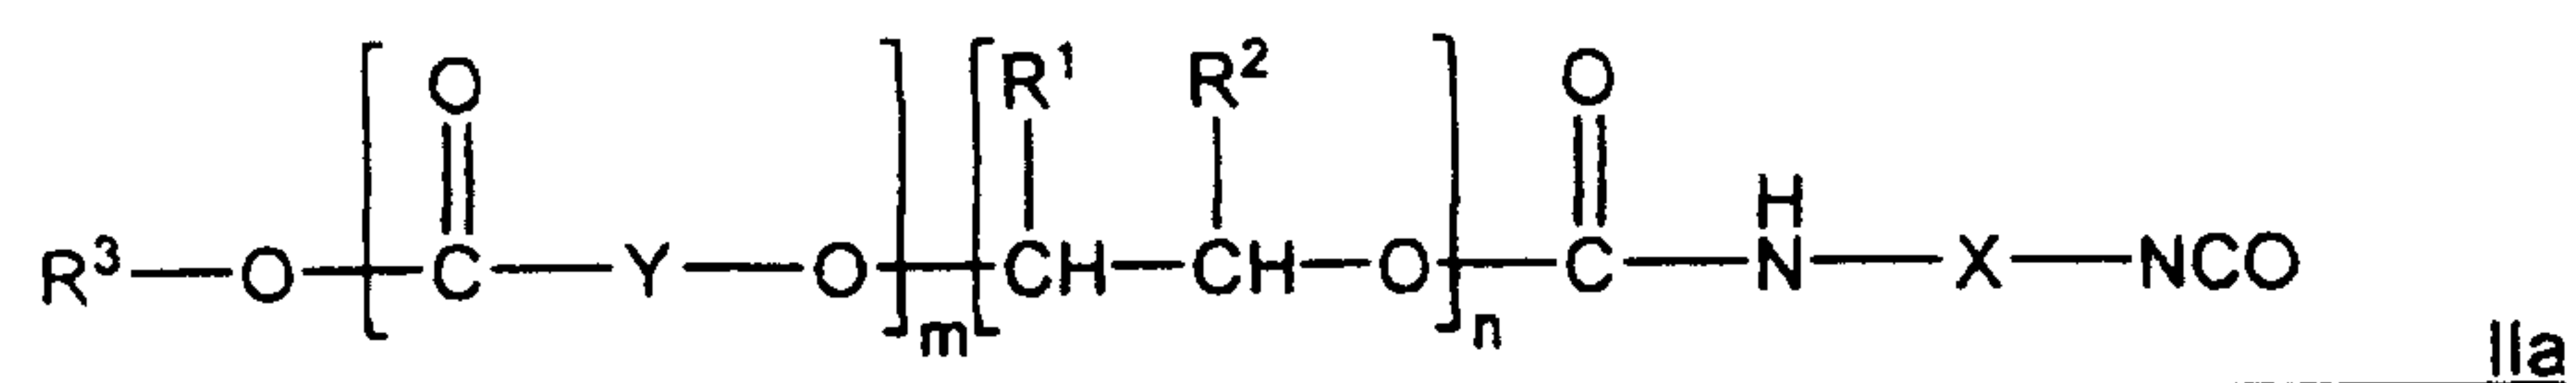

10

where R<sup>3</sup> is alkyl, cycloalkyl, aryl or aralkyl, R<sup>1</sup> and  
R<sup>2</sup> independently of one another are H, alkyl and/or  
aryl, X is alkylene, cycloalkylene and/or aralkylene, Y  
is alkylene and/or cycloalkylene and n and m are  
15 independent of one another, the sum n+m being ≥ 2,  
to form a urethane.

One preferred embodiment of the process of the  
invention uses polyalkyleneoxide modified isocyanates  
20 of the formula IIc

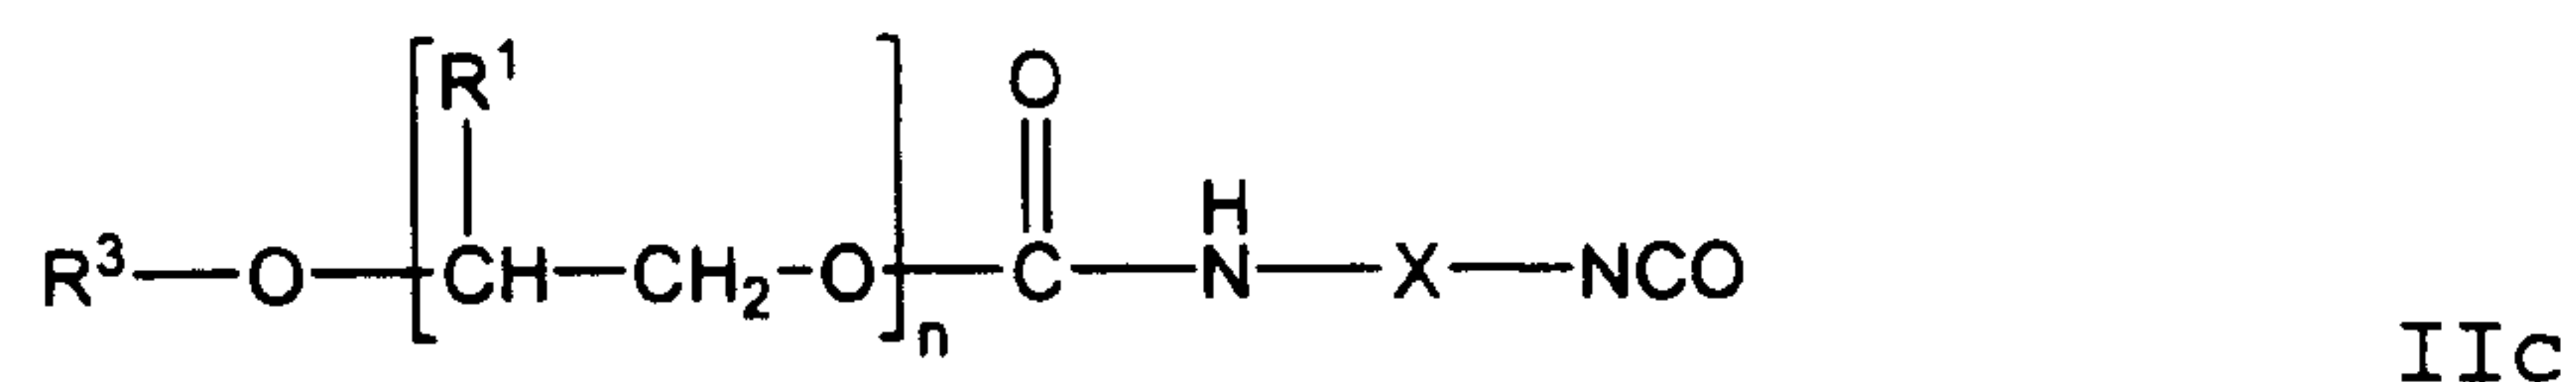

as isocyanates C, where R<sup>3</sup> is alkyl, cycloalkyl, aryl  
25 and/or aralkyl, R<sup>1</sup> is H, methyl and/or ethyl, X is  
alkylene, cycloalkylene and/or aralkylene and n is 1 to  
100.

Byk-Chemie GmbH  
L 06 051


- 12 -

A further preferred embodiment of the process of the invention uses a further primary amine D of the general formula III



where R' is alkylene and Z is a heterocyclic radical.

10 In one preferred embodiment of the process of the invention use is made as component A) of diepoxides of the general formula IV

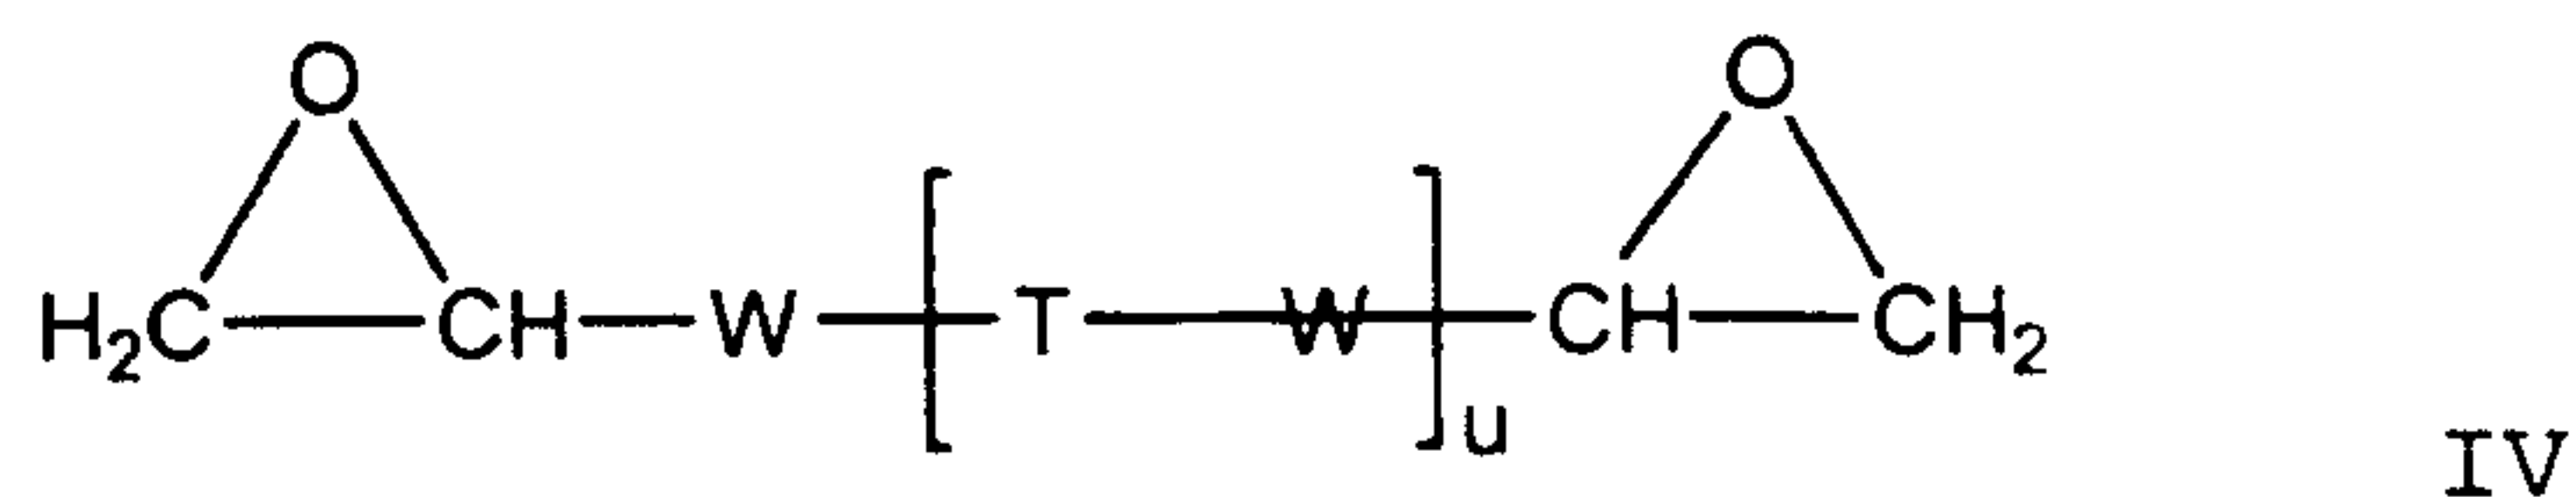

15

with W = -CH<sub>2</sub>-O- or -CH<sub>2</sub>-, T = alkyl, cycloalkyl, aryl or aralkyl, and u = 1-8.

20 In a further embodiment of the process of the invention components A and B or A and B+D can be used preferably in a molar ratio of 2:3 to 3:2.

25 With a view to the use of component C, the amount of this component that is used is preferably selected such that, in the addition reaction, 5-100%, preferably 20-100% and with particular preference 40-100% of the OH groups generated by the addition reaction of components A and B or A, B and D are reacted with formation of urethane.

30

In this way a particularly high compatibility of the addition compound with binders specifically in aqueous systems is achieved.

Byk-Chemie GmbH  
L 06 051

- 13 -

The addition compounds of the invention are used as wetting and/or dispersing agents for organic and/or inorganic pigments or fillers. The dispersants can be used alone or together with binders. With particular  
5 preference the wetting and dispersing agents of the invention find their application in aqueous and/or solvent-borne paints, for the stabilization and dispersion of pigments and fillers.

10 Besides their use as wetting and dispersing agents in aqueous and/or solvent-borne dispersions, more particularly paints, it is likewise possible to use the addition compounds of the invention to coat solids in powder or fibre form. Coating operations of this kind  
15 on organic and inorganic solids are carried out in a known way; for example, such methods are described in EP 0 270 126 A. Specifically in the case of pigments, coating of the pigment surface may take place during or after the pigment synthesis, by addition, for example,  
20 of the addition compounds of the invention to the pigment suspension. Pigments pretreated in this way exhibit ease of incorporation into the binder system, improved viscosity and flocculation behaviour, and good gloss as compared with untreated pigments. The addition  
25 compounds of the invention are suitable, furthermore, for the dispersing of, for example, effect pigments in nail varnishes.

The dispersants of the invention are used preferably in  
30 an amount of 0.5-60% by weight, based on the solid to be dispersed. For specific solids, however, substantially higher amounts of dispersant may be necessary for the dispersing operation.

35 The amount of dispersant employed is substantially dependent on the size and nature of the surface of the solid that is to be dispersed. Carbon black, for

- 14 -

example, requires substantially larger amounts of dispersant than does titanium dioxide. EP 0 270 126 A contains examples of pigments and fillers. Further examples are based on new developments, particularly in the field of organic pigments, such as in the class of the diketopyrrolopyrroles. Magnetic pigments as well, based on pure iron or mixed oxides, can be incorporated into dispersions with the aid of the dispersants of the invention. Furthermore, mineral fillers too, such as calcium carbonate and calcium oxide, or flame retardants such as aluminium hydroxide or magnesium hydroxide can be dispersed. Moreover, matting agents such as silicas are also dispersed and stabilized.

The invention further provides a use of the above-mentioned addition compound as a wetting and/or dispersing agent for organic and/or inorganic pigments or fillers.

The invention further provides solids in powder or fibre form which have been coated with the above-mentioned addition compounds.

The invention is further elucidated by the examples below, without being restricted by them. Unless indicated otherwise, any reference to parts is to parts by weight, and any reference to percentages to percentages by weight.

## Examples

- 14a -

**Example 1**

A 250 ml four-necked flask with KPG stirrer, nitrogen line and intensive condenser was charged with 13.0 g of Epikote 828 in 16 g of ethyl acetate. The clear solution was heated to 75°C with stirring. Over the course of 3 minutes 2.73 g of ethanolamine were added dropwise. The initially clear solution became hazy after 3 hours. After a reaction time totalling 5 hours, 34.8 g of TDI-M 350 monoadduct were added dropwise. After a further 3 hours of reaction time at 80°C the reaction product was diluted with 75.75 g of DI water. The ethyl acetate was removed over the course of 2 hours on a rotary evaporator at 200 mbar and 60°C. The product prepared is a clear, yellowish solution with 40% solids.

- 15 -

The further examples were carried out in accordance with the instructions given above, using the reactants shown in the table below.

5

| Example | Epoxides<br>[molar<br>ratio]                       | Amine [molar<br>ratio] | Molar<br>ratio<br>[epoxide:<br>amine] | Isocyanat<br>e adduct | OH<br>groups<br>reacte<br>d |
|---------|----------------------------------------------------|------------------------|---------------------------------------|-----------------------|-----------------------------|
| 2       | Grilonit™<br>RV 1812                               | Benzylamine            | 9:10                                  | TDI-M2000             | 50%                         |
| 3       | Epikote™<br>828 /<br>Grilonit™<br>RV 1806<br>[1:1] | Ethanolamine           | 2:3                                   | TDI-M 350             | 50%                         |
| 4       | Grilonit™<br>RV 1812                               | Benzylamine            | 3:4                                   | TDI-M2000             | 50%                         |
| 5       | Grilonit™<br>RV 1812                               | Benzylamine            | 6:7                                   | TDI-M2000             | 50%                         |
| 6       | Epikote<br>828                                     | Ethanolamine           | 7:8                                   | TDI-M750              | 50%                         |

TDI: Tolylene diisocyanate (isomer mixture)

M350: Methoxypolyethylene glycol (molecular weight 350)

M750: Methoxypolyethylene glycol (molecular weight 750)

10 M2000: Methoxypolyethylene glycol (molecular weight 2000)

Grilonit™ RV 1806: 1,4-Butane diglycidyl ether

Grilonit™ RV 1812: 1,6-Hexane diglycidyl ether

Epikote 828: Bisphenol A diglycidyl ether

15

Employed as a comparative example (not inventive) was Example 1 of WO 2005/113677 of Huntsman.

#### Application tests

20 To test the activity of the dispersants of the

- 16 -

invention, binder-free pigment pastes were prepared and were incorporated into a binder. Assessments were made of the foam behaviour and the viscosity. Following application and curing of the completed pigment paints, the drawdowns were then assessed visually, and measurements were performed for transparency, colour strength, gloss and haze.

The components of the formulation were dispersed over 40 minutes at 40°C and 10 000 rpm with the aid of a Dispermat CV from VMA-Getzmann GmbH.

**Formulation:**

Water: 30.16 g  
 Byk 034: 0.40 g  
 Irgalithrot FBN: 36.00 g  
 Wetting and dispersing agent: 13.50 g  
 Joncryl 8052 binder: 186.67 g

Byk 034: Defoamer from Byk-Chemie GmbH

Irgalithrot FBN: Red Naphthol AS pigments from Ciba  
 Joncryl™ 8052: Acrylate dispersion from Johnson Polymers

**Assessment**

| Example | Foam           | Trans-<br>parency | Gloss<br>20° | Gloss<br>60° | Colour<br>strength | Viscosity |
|---------|----------------|-------------------|--------------|--------------|--------------------|-----------|
| 1       | little<br>foam | 1                 | 56           | 87           | 2                  | 1         |
| 2       | little<br>foam | 1                 | 55           | 86           | 1-2                | 1         |
| 3       | little<br>foam | 1                 | 57           | 87           | 1-2                | 2         |
| 4       | little<br>foam | 1                 | 55           | 85           | 1-2                | 2         |
| 5       | little<br>foam | 1                 | 57           | 86           | 1-2                | 2         |
| 6       | little<br>foam | 1-2               | 45           | 81           | 1-2                | 1         |

Byk-Chemie GmbH  
L 06 051

- 17 -

|                    |       |     |    |    |   |   |
|--------------------|-------|-----|----|----|---|---|
| Compar.<br>example | foamy | 2-3 | 41 | 80 | 4 | 2 |
|--------------------|-------|-----|----|----|---|---|

### Example 7

A 250 ml four-necked flask with KPG stirrer, nitrogen  
5 line and intensive condenser was charged with 13.07 g  
of Grilonit F713 in 69.3 g of methoxypropyl acetate.  
The clear solution was heated to 75°C with stirring.  
Over the course of 3 minutes 1.93 g of benzylamine were  
added dropwise [molar ratio 15:16]. After a reaction  
10 time totalling 5 hours, 54.3 g of a TDI monoadduct of a  
caprolactone polyester prepared starting from decanol  
(C16CAPA) were added dropwise. The product prepared is  
a clear, yellowish solution with 50% solids.

15 The further examples were carried out in accordance  
with the instructions given above of Example 7, using  
the reactants shown in the table below.

| Ex-<br>ample | Epox-<br>ide(s)     | Amine<br>B       | Amine<br>D                     | Molar<br>ratio<br>[amine B:<br>amine D] | Molar<br>ratio<br>[epox-<br>ide:<br>amines] | Iso-<br>cyanate<br>adduct |
|--------------|---------------------|------------------|--------------------------------|-----------------------------------------|---------------------------------------------|---------------------------|
| 8            | Grilonit<br>F704    | Benzyl<br>-amine | Amino-<br>propyl-<br>imidazole | 6:1                                     | 15:16                                       | TDI-<br>M1500             |
| 9            | Grilonit<br>F713    | Benzyl<br>-amine | Amino-<br>propyl-<br>imidazole | 8:1                                     | 15:16                                       | TDI-<br>M1500             |
| 10           | Grilonit<br>RV 1812 | Benzyl<br>-amine | Amino-<br>propyl-<br>imidazole | 6:1                                     | 15:16                                       | TDI-<br>M2000             |
| 11           | Grilonit<br>F704    | Benzyl<br>amine  | Amino-<br>propyl-<br>imidazole | 4:1                                     | 15:16                                       | TDI-<br>C16CAPA           |

- 18 -

|    |                   |                  |                                |     |       |                 |
|----|-------------------|------------------|--------------------------------|-----|-------|-----------------|
| 12 | Grilonit™<br>F713 | Benzyl<br>-amine | Amino-<br>propyl-<br>imidazole | 4:1 | 15:16 | TDI-<br>C16CAPA |
|----|-------------------|------------------|--------------------------------|-----|-------|-----------------|

TDI: Tolylene diisocyanate (isomer mixture)

M1500: Methoxypolyethylene glycol (molecular weight 1500]

5 Grilonit™ F713: Polytetrahydrofuran diglycidyl ether (9-THF units)

Grilonit™ F704: Polypropylene glycol diglycidyl ether (7 PO units)

10 C16CAPA: Caprolactone polyester prepared starting from decanol; C16:CAPA = 1:5

Employed as a comparative example 2 (not inventive) was Example 4 of DE 10326147.

## 15 **Application tests**

To test the activity of the dispersants of the invention, pigment pastes (millbase) were first prepared and were then incorporated into a binder (letdown). Assessments were made of the foam behaviour  
20 and the viscosity. Following application and curing of the completed pigment paints, the drawdowns were then assessed visually, and measurements were performed for transparency, gloss and haze.

The components of the formulation were dispersed over  
25 40 minutes at 40°C and 10 000 rpm with the aid of a Dispermat CV from VMA-Getzmann GmbH.

## **Formulation**

30 Millbase

Macrynal SM 516 21.4 g  
Methoxypropyl acetate 14 g  
Heliogenblau™ 6975 F 7.5 g  
Wetting and dispersing agent 6.5 g

Byk-Chemie GmbH  
L 06 051

- 19 -

Butyl acetate 0.6 g

Letdown

Millbase 50 g  
Methoxypropyl acetate 10 g  
Macrynal SM 516 34.96 g  
Butyl glycol acetate 0.5 g  
Butyl acetate 3.49 g  
DBTL (1% in butyl acetate) 0.9 g  
Byk 331 0.15 g

Byk 331: Flow control additive from Byk-Chemie GmbH

Heliogenblau 6975 F: Blue phthalocyanine pigment from BASF

- 5 Macrynal SM 516: Polyacrylate, 70% strength in butyl acetate, from Clariant

#### Assessment

| Example                          | Vis-<br>cosity | Foam              | Trans-<br>parency | Gloss<br>20° | Haze | Colour<br>strength |
|----------------------------------|----------------|-------------------|-------------------|--------------|------|--------------------|
| 7                                | 2              | little<br>foam    | 1                 | 91           | 25   | 2                  |
| 8                                | 2              | little<br>foam    | 1                 | 90           | 30   | 1-2                |
| 9                                | 2              | little<br>foam    | 1                 | 90           | 28   | 1-2                |
| 10                               | 2              | little<br>foam    | 1                 | 91           | 28   | 1-2                |
| 11                               | 2              | little<br>foam    | 1                 | 91           | 25   | 1-2                |
| 12                               | 2              | little<br>foam    | 1-2               | 90           | 27   | 1-2                |
| Compara-<br>tive<br>Example<br>2 | 3              | slightly<br>foamy | 2-3               | 56           | 305  | 3                  |

**CLAIMS**

1. Addition compound suitable as a wetting and dispersing agent and obtainable from the reaction of



A) polyepoxides with

B) at least one aliphatic and/or araliphatic primary amine of the general formula I




where R is alkyl, cycloalkyl, aryl and aralkyl, and where the primary amine may also carry further functional groups selected from -OH, tertiary amine or carboxyl, and subsequent addition reaction of

C) at least one modified isocyanate of the general formula IIa and/or IIb

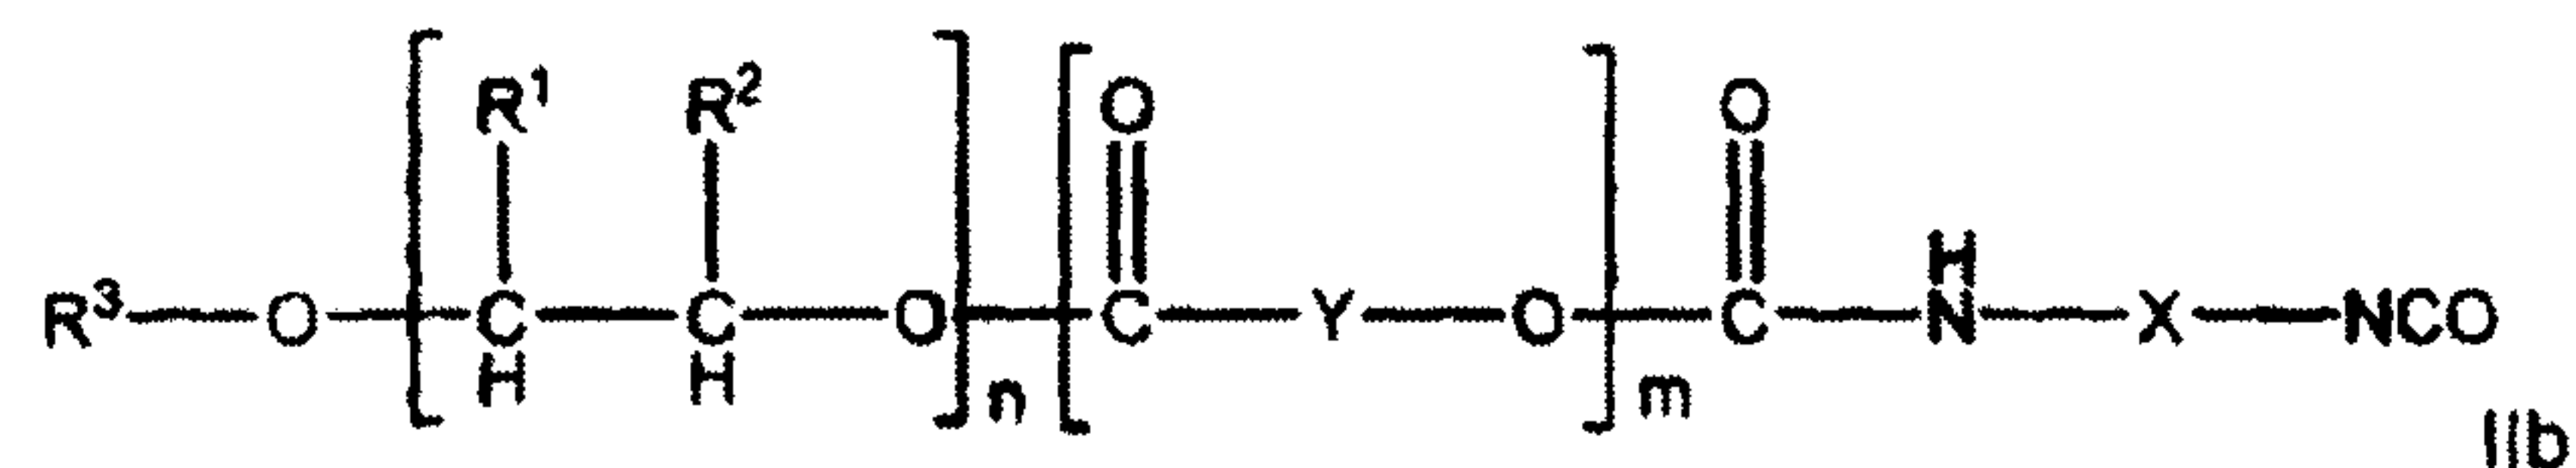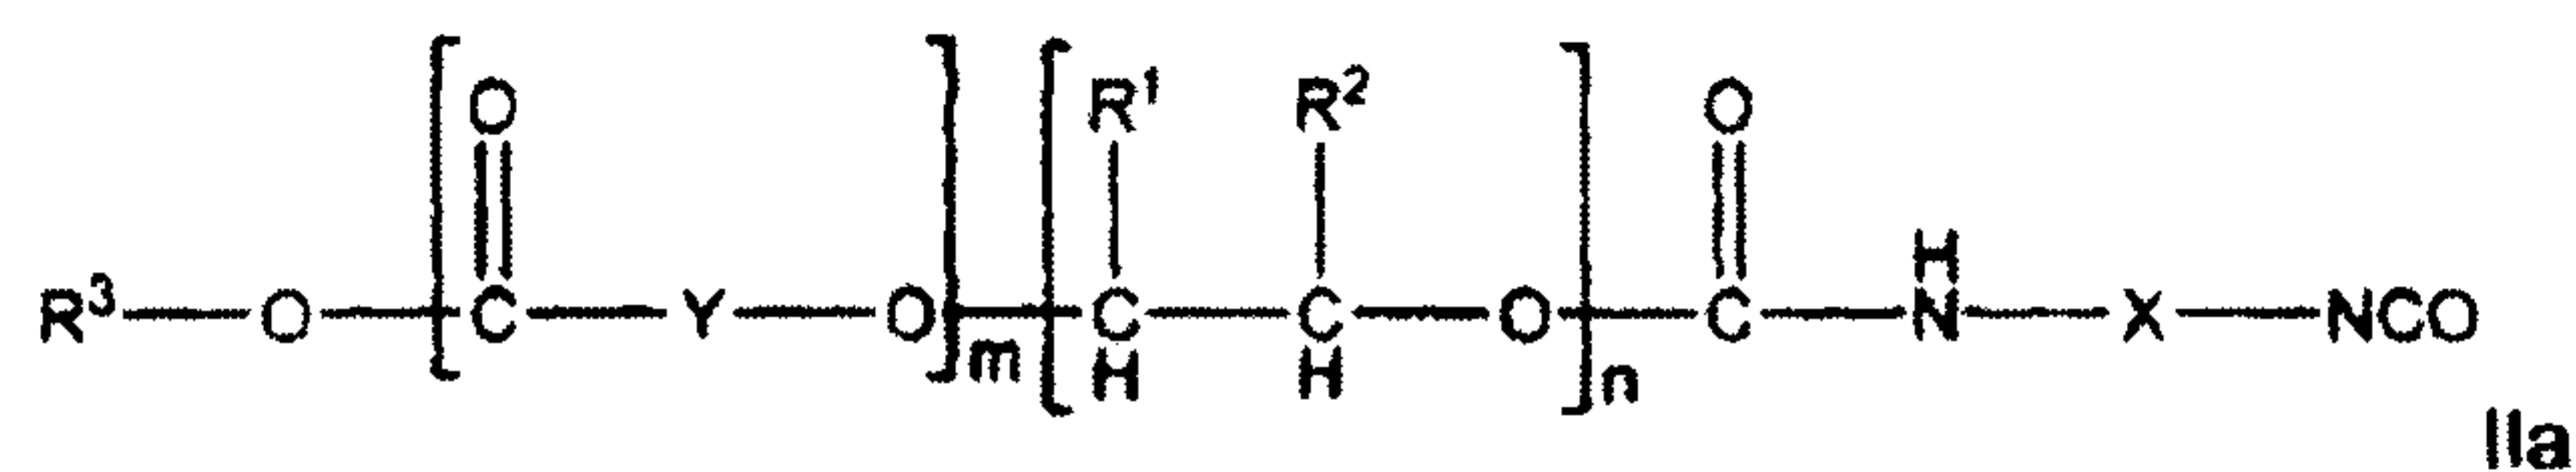

where  $\text{R}^3$  is alkyl, cycloalkyl, aryl and/or aralkyl,  $\text{R}^1$  and  $\text{R}^2$  independently of one another are H, alkyl or aryl, X is alkylene, cycloalkylene and/or aralkylene, Y is alkylene and/or cycloalkylene and n and m are independent of one another, the sum  $n+m$  being  $\geq 2$ , to form a urethane.

2. Addition compound according to Claim 1, characterized in that the isocyanate C is a polyalkyleneoxide modified isocyanate of the formula IIc

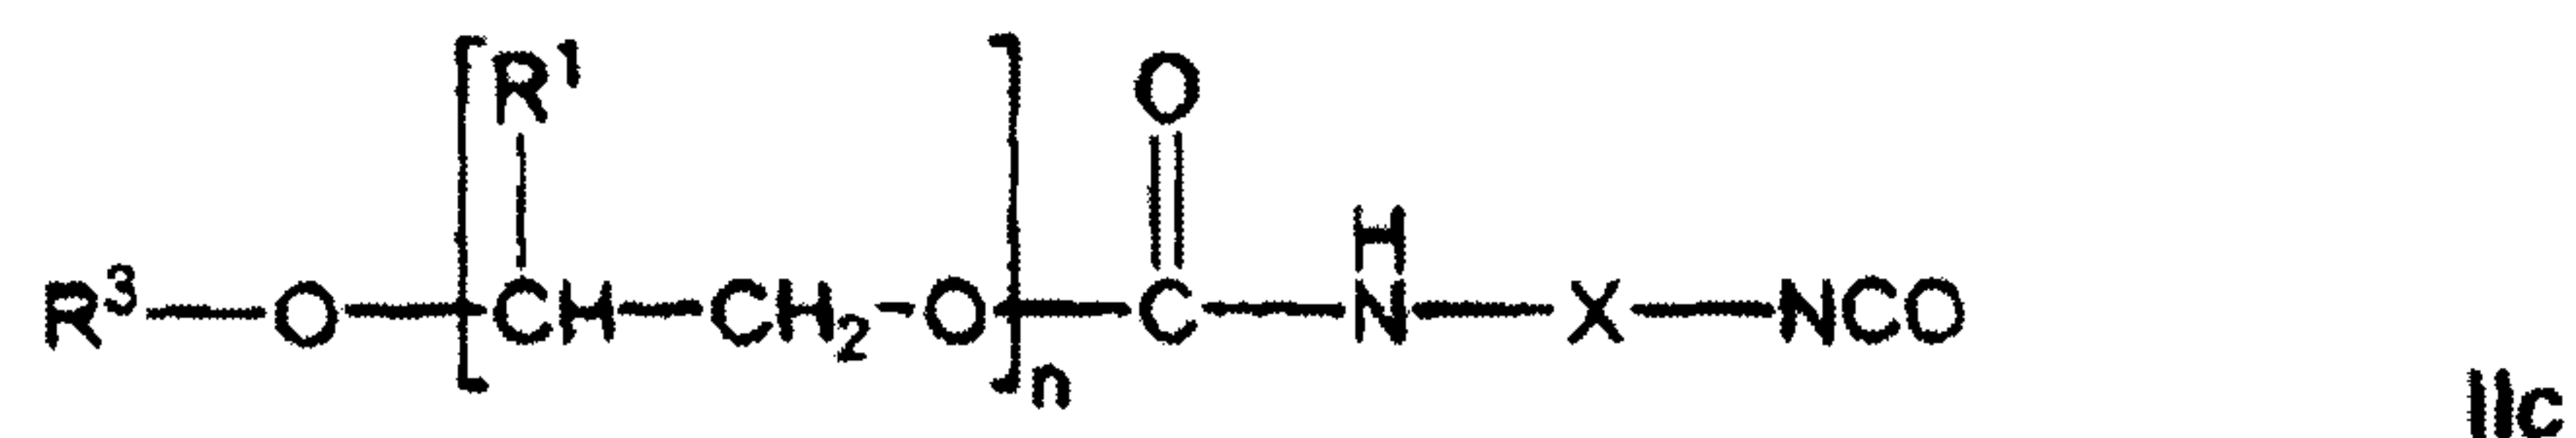


where  $R^3$  is alkyl, cycloalkyl, aryl or aralkyl,  $R^1$  is H, methyl and/or ethyl, X is alkylene, cycloalkylene and/or aralkylene and n is 2 to 100.

3. Addition compound according to claim 1 or 2, characterized in that at least one further primary amine D is used, of the general formula III



where  $R'$  is alkylene and Z is a heterocyclic radical.

4. Addition compound according to any one of Claims 1 to 3, characterized in that component A are diepoxides of the general formula IV

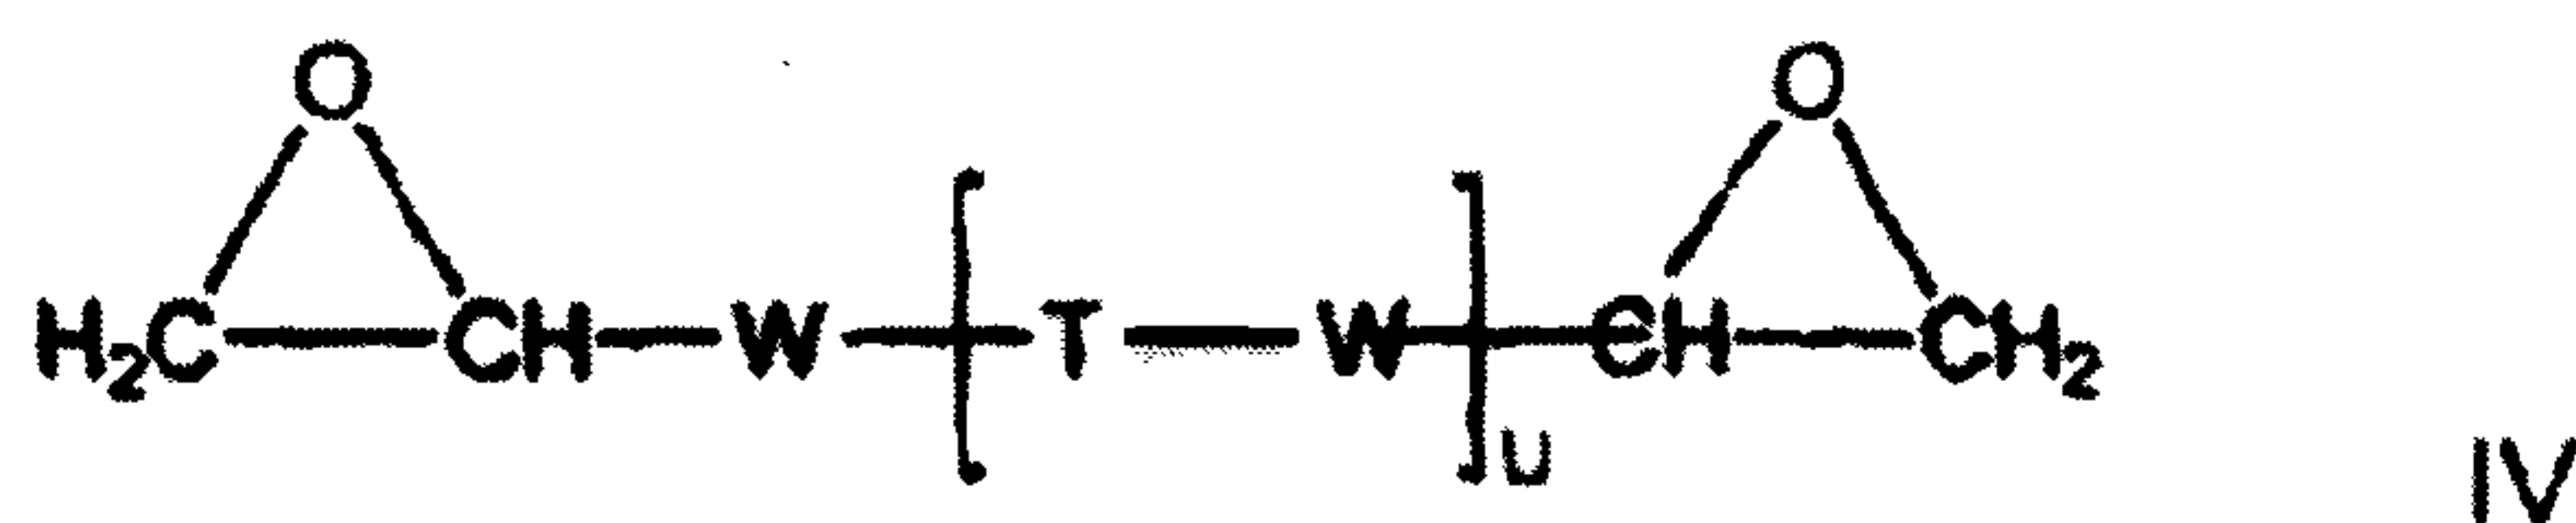

with  $W = -CH_2-O-$  or  $-CH_2-$ ,  $T$  = alkyl, cycloalkyl, aryl or aralkyl, and  $u = 1-8$ .

5. Addition compound according to Claim 4, characterized in that the diepoxides are aromatic-containing diepoxide compounds.
6. Addition compound according to Claim 5, characterized in that the diepoxide compounds are diglycidyl ethers of difunctional phenol.
7. Addition compound according to Claim 4, characterized in that the diepoxides are aliphatic and/or cycloaliphatic diepoxide compounds.
8. Addition compound according to any one of Claims 1 to 7, characterized in that, in a further step, any terminal amino groups present are reacted with isocyanates, lactones, cyclic carbonates or acrylates.
9. Addition compound according to any one of Claims 1 to 8, characterized in that, in a further step, any terminal epoxide groups present are reacted with secondary amines, or acids.
10. Addition compound according to any one of Claims 1 to 9, characterized in that, in a further step, any remaining hydroxyl functions are reacted with hydroxycarboxylic acids and/or cyclic lactones.

11. Addition compound according to any one of Claims 1 to 10, characterized in that, in a further step, any remaining hydroxyl functions are reacted with isocyanates other than those listed under C.
12. Addition compound according to any one of Claims 1 to 11, characterized in that, in a further step, any remaining hydroxyl functions are reacted with phosphoric acid or polyphosphoric acid and/or acidic phosphoric esters and/or carboxylic acids.
13. Addition compound according to any one of Claims 1 to 12, characterized in that, in a further step, an alkylation or an oxidation is performed on the amino groups remaining where appropriate, to form quaternary ammonium salts or nitrogen oxides.
14. Process for preparing an addition compound suitable as a wetting and dispersing agent by reaction of



A) polyepoxides with

B) at least one aliphatic and/or araliphatic primary amine of the general formula I




where R is alkyl, cycloalkyl, aryl and aralkyl, and where the primary amine may also carry further functional groups selected from -OH, tertiary amine or carboxyl, and subsequent addition reaction of

C) at least one modified isocyanate of the general formula IIa and/or IIb

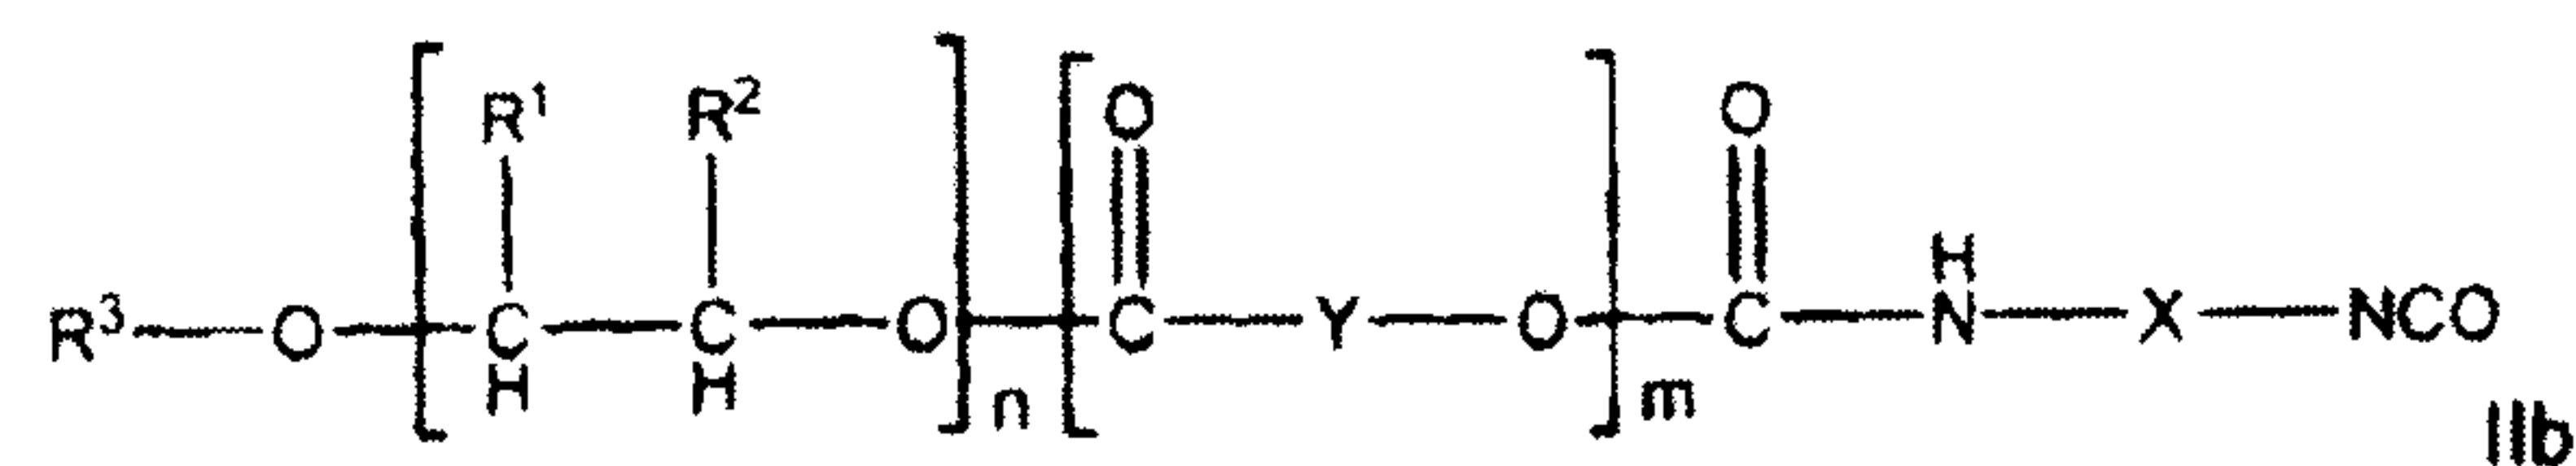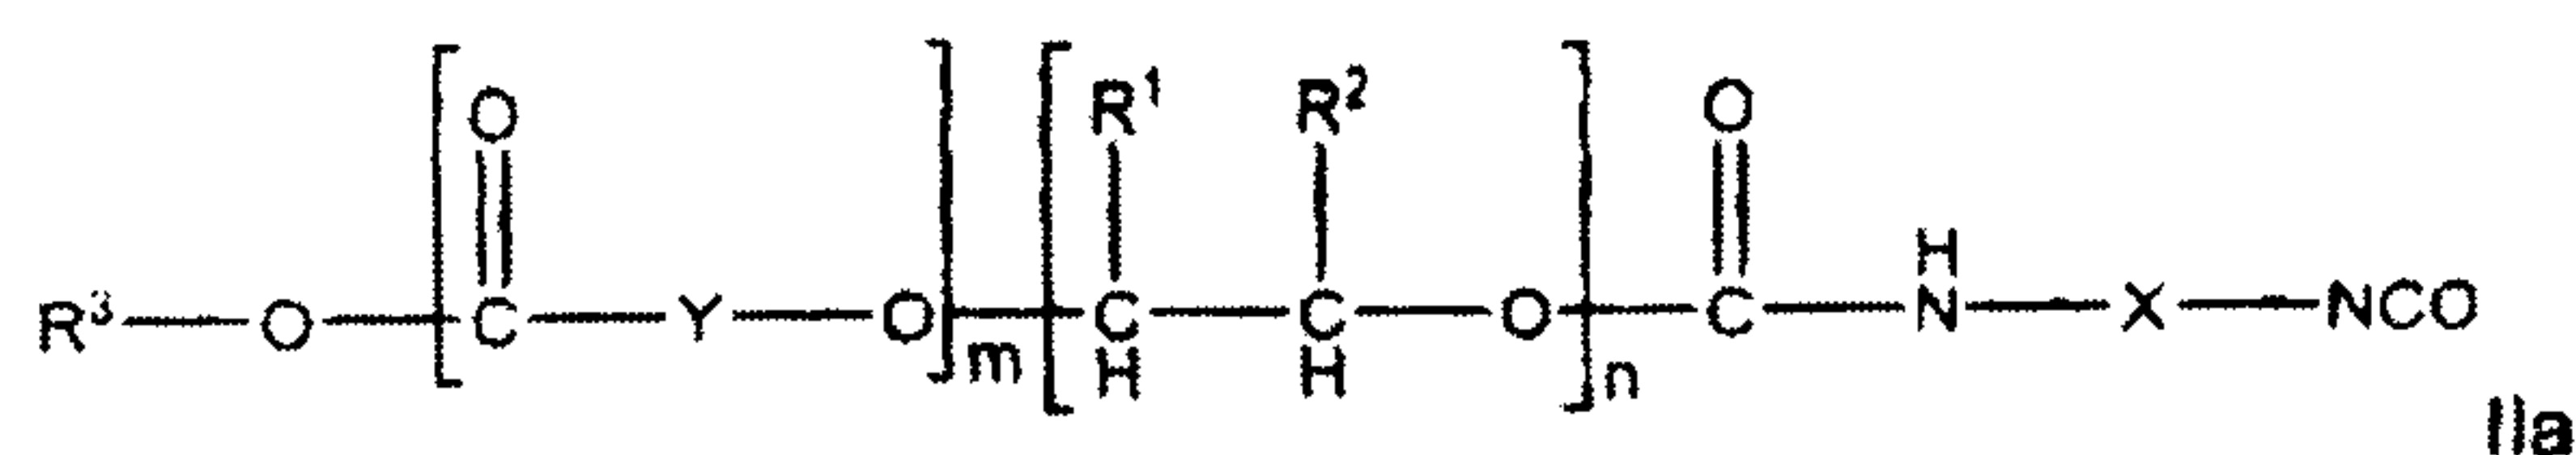

where  $R^3$  is alkyl, cycloalkyl, aryl or aralkyl,  $R^1$  and  $R^2$  independently of one another are H, alkyl and/or aryl, X is alkylene, cycloalkylene and/or aralkylene, Y is alkylene and/or cycloalkylene and n and m are independent of one another, the sum  $n+m$  being  $\geq 2$ , to form a urethane.

15. Process for preparing an addition compound according to Claim 14, characterized in that the isocyanate C is a polyalkyleneoxide modified isocyanate of the formula IIc

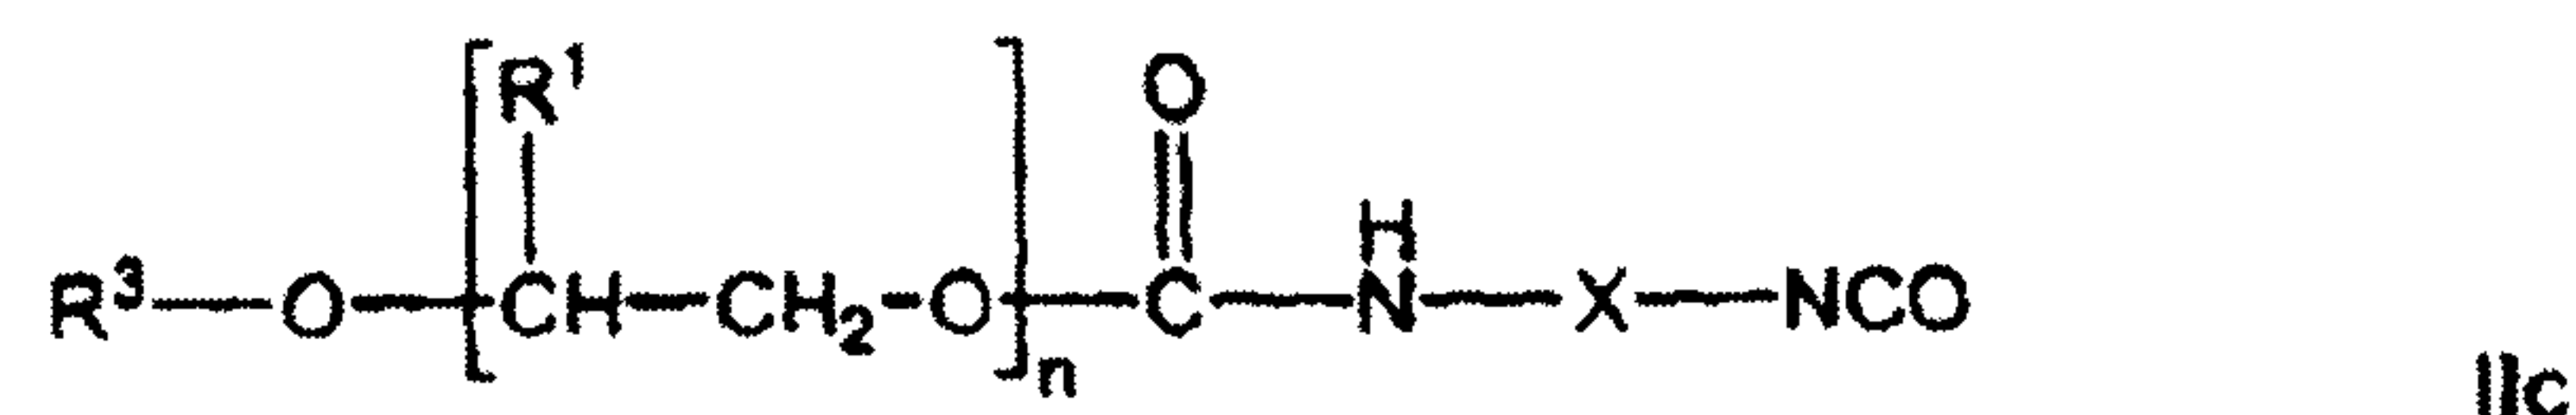


where  $R^3$  is alkyl, cycloalkyl, aryl or aralkyl,  $R^1$  is H, methyl and/or ethyl, X is alkylene, cycloalkylene and/or aralkylene and n is 2 to 100.

16. Process for preparing an addition compound according to Claim 14 or 15, characterized in that at least one further primary amine D is used, of the general formula III



where  $R'$  is alkylene and Z is a heterocyclic radical.


17. Process for preparing an addition compound according to any one of Claims 14 to 16, characterized in that use is made as component A of diepoxides of the general formula IV

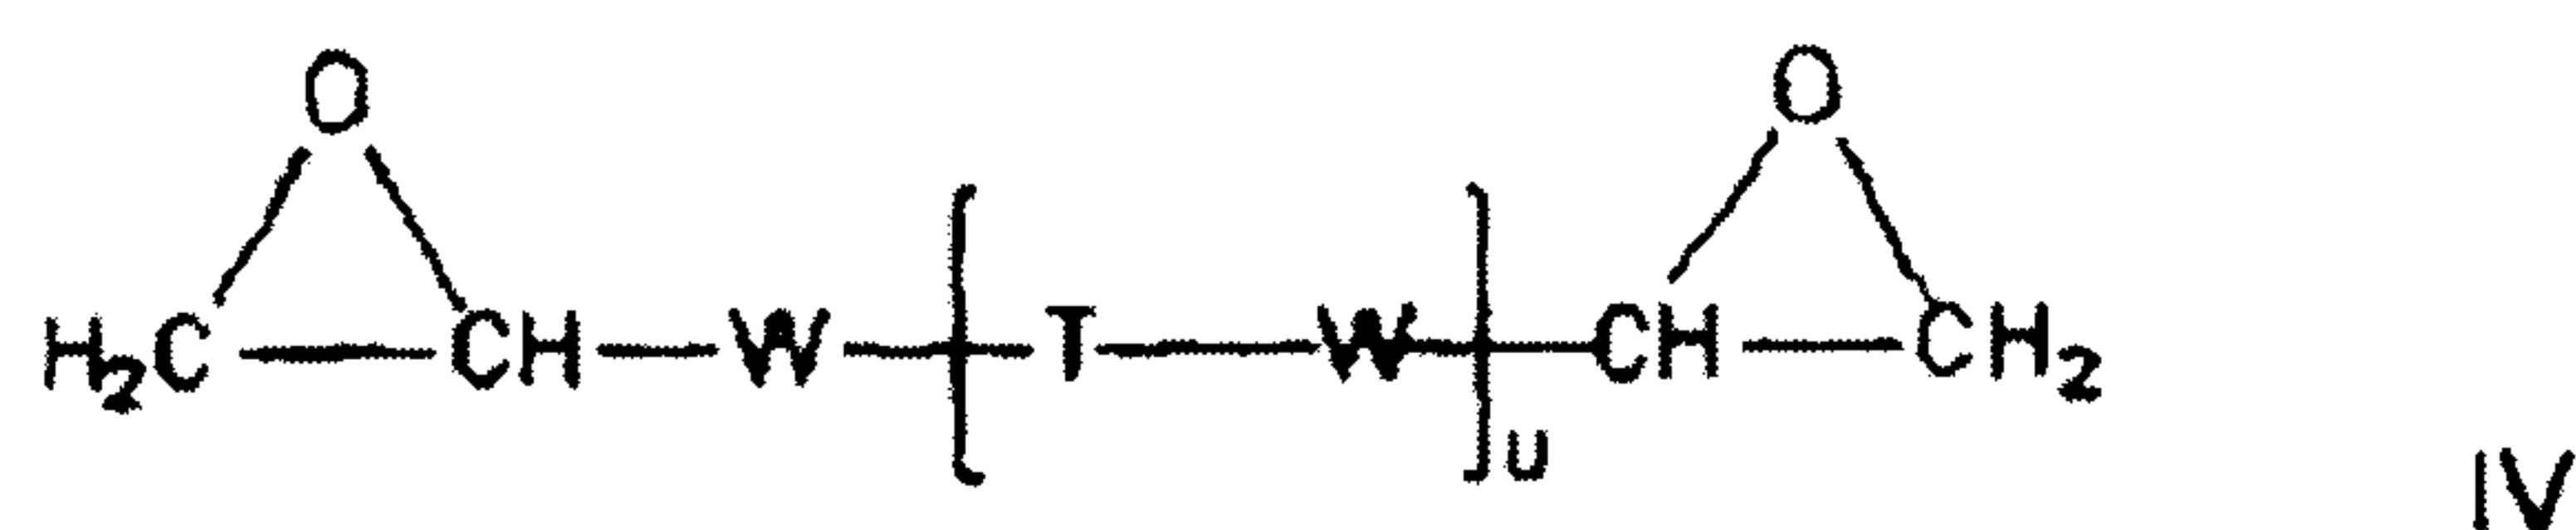


with  $W = -CH_2-O-$  or  $-CH_2-$ , T = alkyl, cycloalkyl, aryl or aralkyl, and u = 1-8.

18. Process according to Claim 14 or 17, characterized in that components A and B are used in a molar ratio of 2:3 to 3:2.

19. Process according to Claim 14 or 17, characterized in that components A, B and D are used in a molar ratio of 2:3 to 3:2.
20. Process according to any one of Claims 14 to 19 characterized in that, in the addition reaction, component C is used in an amount such that 5-100% of the OH groups generated by the addition reaction of components A and B are reacted with formation of urethane.
21. Process according to Claim 20, wherein in the addition reaction, component C is used in an amount such that 20-100% of the OH groups generated by the addition reaction of components A and B are reacted with formation of urethane.
22. Process according to Claim 21, wherein in the addition reaction, component C is used in an amount such that 40-100% of the OH groups generated by the addition reaction of components A and B are reacted with formation of urethane.
23. Process according to any one of Claims 14 to 19, characterized in that, in the addition reaction, component C is used in an amount such that 5-100% of the OH groups generated by the addition reaction of components A, B and D are reacted with formation of urethane.
24. Process according to Claim 23, wherein in the addition reaction, component C is used in an amount such that 20-100% of the OH groups generated by the addition reaction of components A, B and D are reacted with formation of urethane.
25. Process according to Claim 23, wherein in the addition reaction, component C is used in an amount such that 40-100% of the OH groups generated by the addition reaction of components A, B and D are reacted with formation of urethane.
26. Use of an addition compound according to any one of Claims 1 to 13 as a wetting and/or dispersing agent for organic and/or inorganic pigments or fillers.
27. Solids in powder or fibre form which have been coated with addition compounds according to any one of Claims 1 to 13.

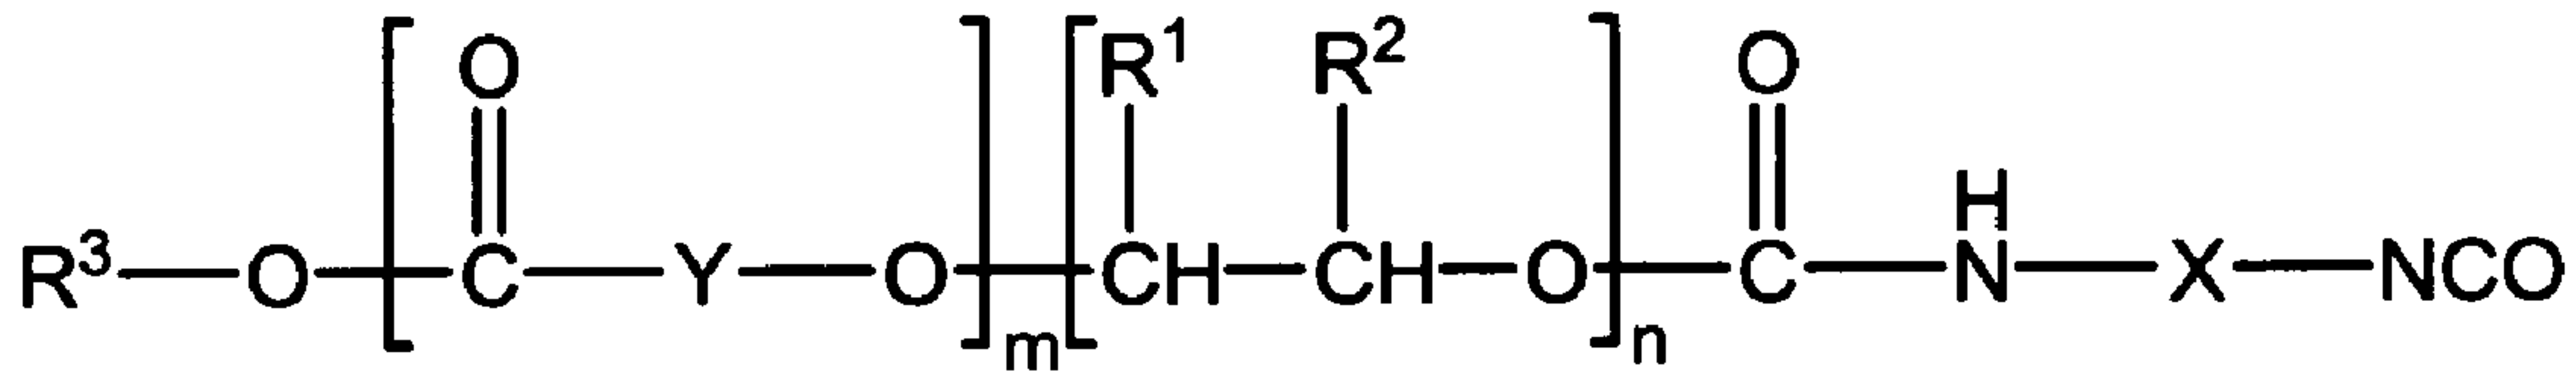

IIa

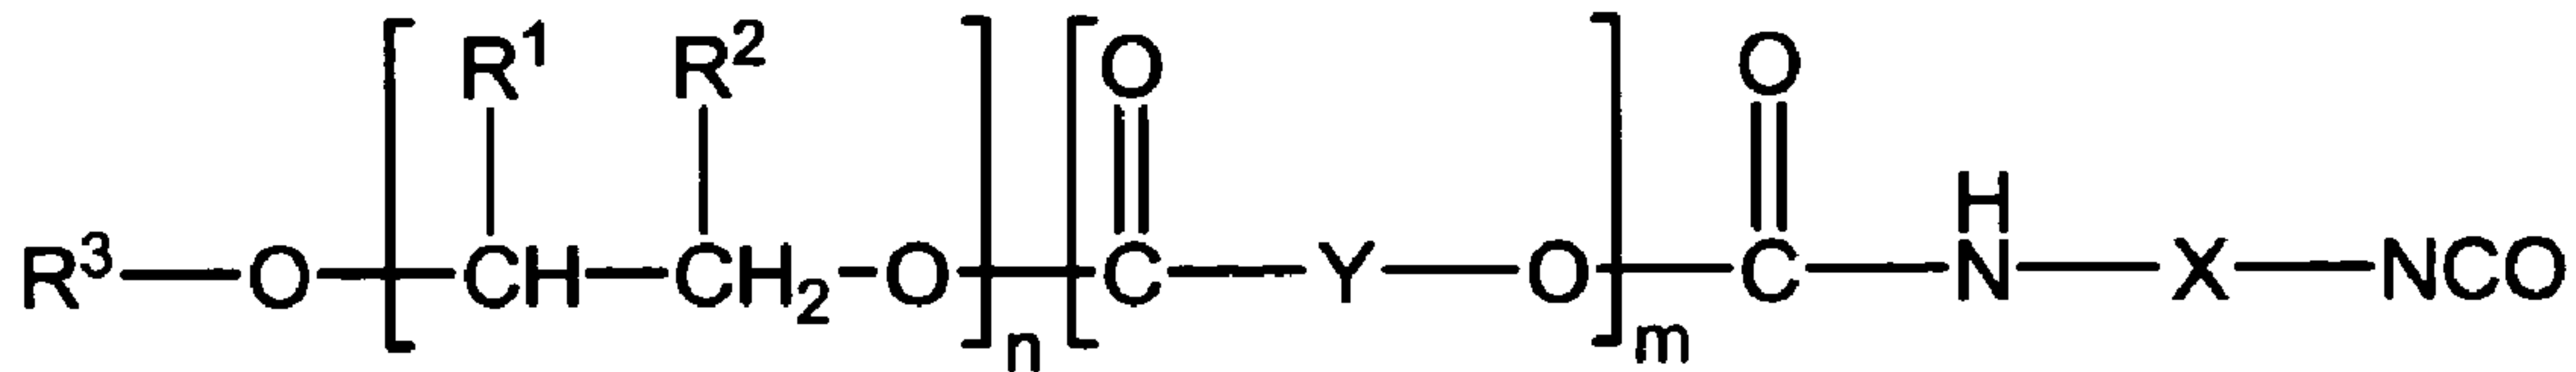

IIb