

July 11, 1950


E. A. WILCKENS

2,514,819

APPARATUS FOR HANDLING SHEETS

Filed May 4, 1945

4 Sheets-Sheet 1

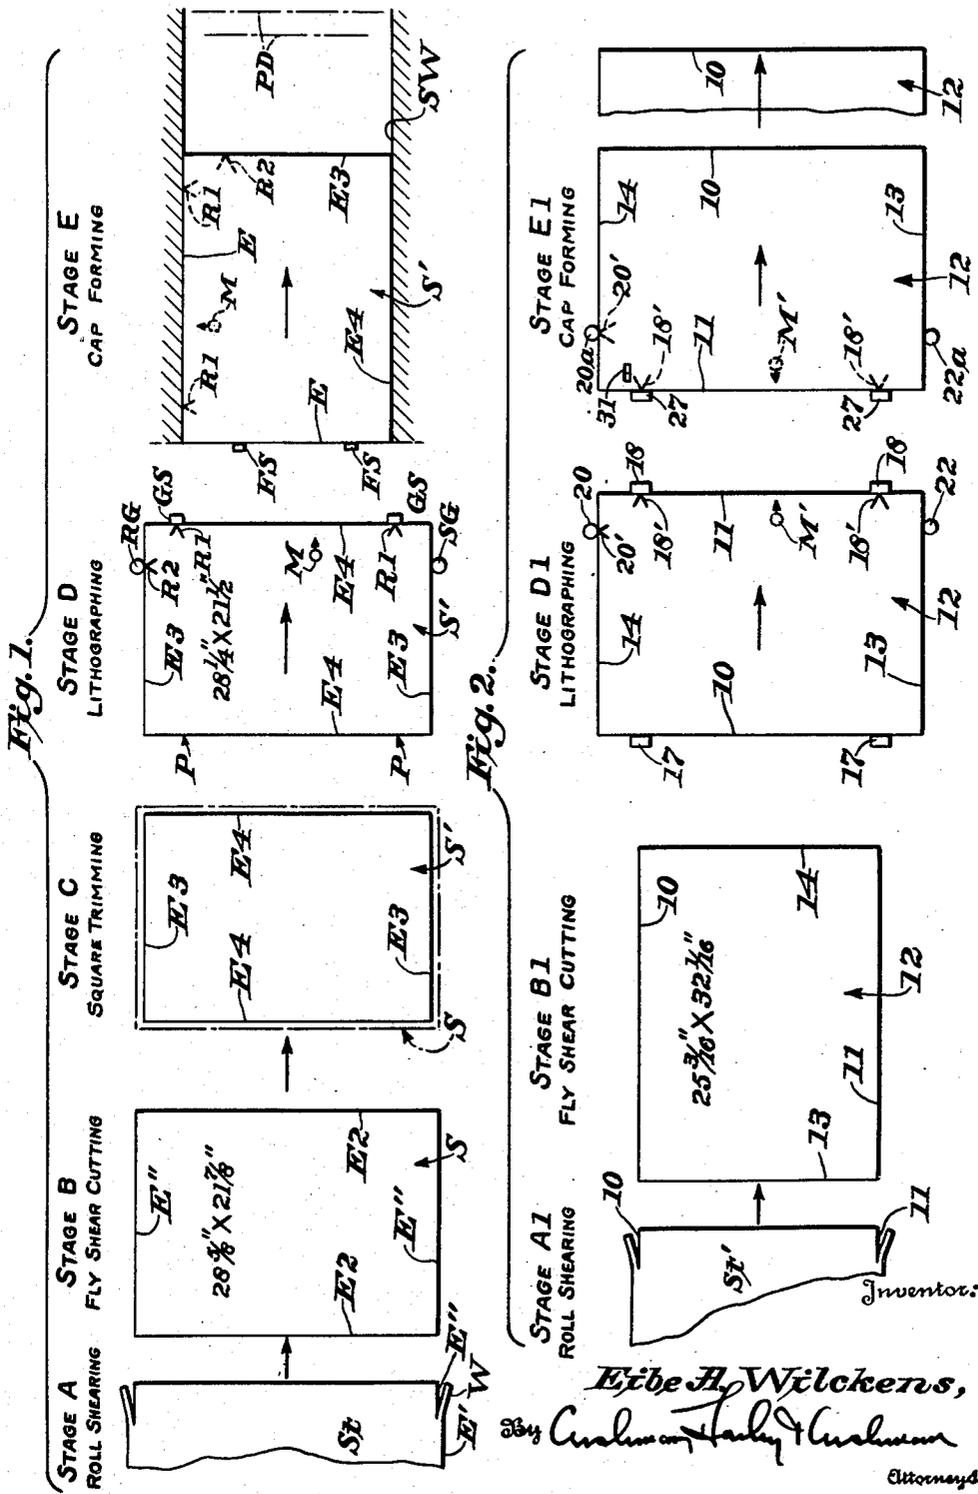

July 11, 1950



E. A. WILCKENS

2,514,819

APPARATUS FOR HANDLING SHEETS

Filed May 4, 1945

4 Sheets-Sheet 2

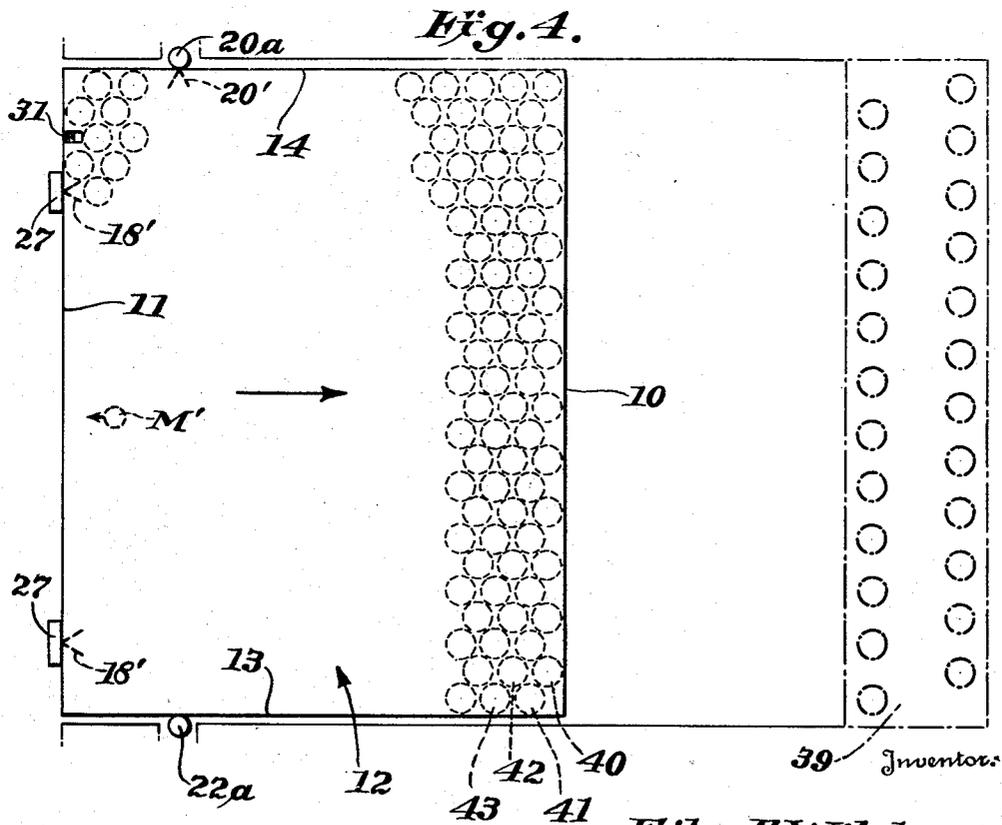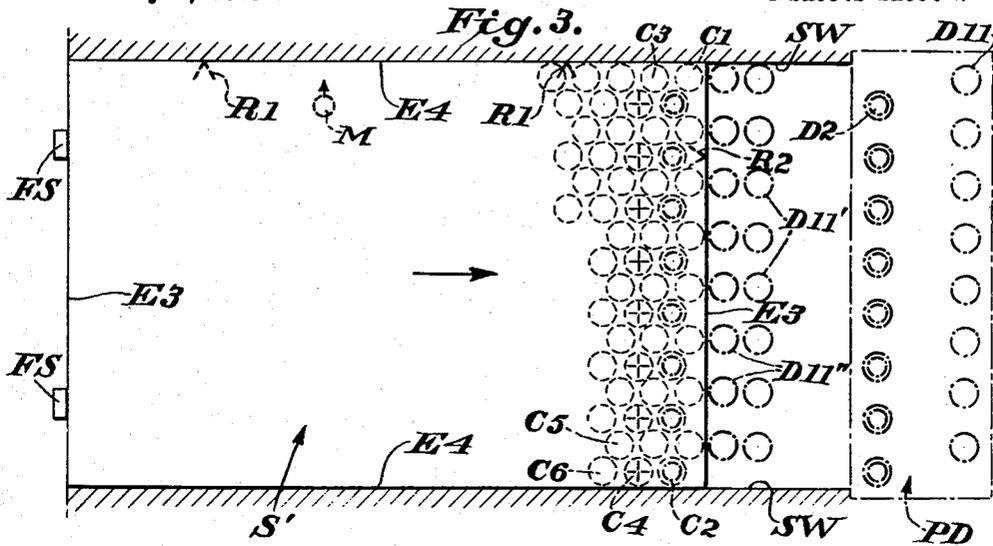

Inventor's
Ebbe H. Wilckens,
 by *Carlson, Taylor & Carlson*
 Attorneys.

July 11, 1950


E. A. WILCKENS

2,514,819

APPARATUS FOR HANDLING SHEETS

Filed May 4, 1945

4 Sheets-Sheet 3

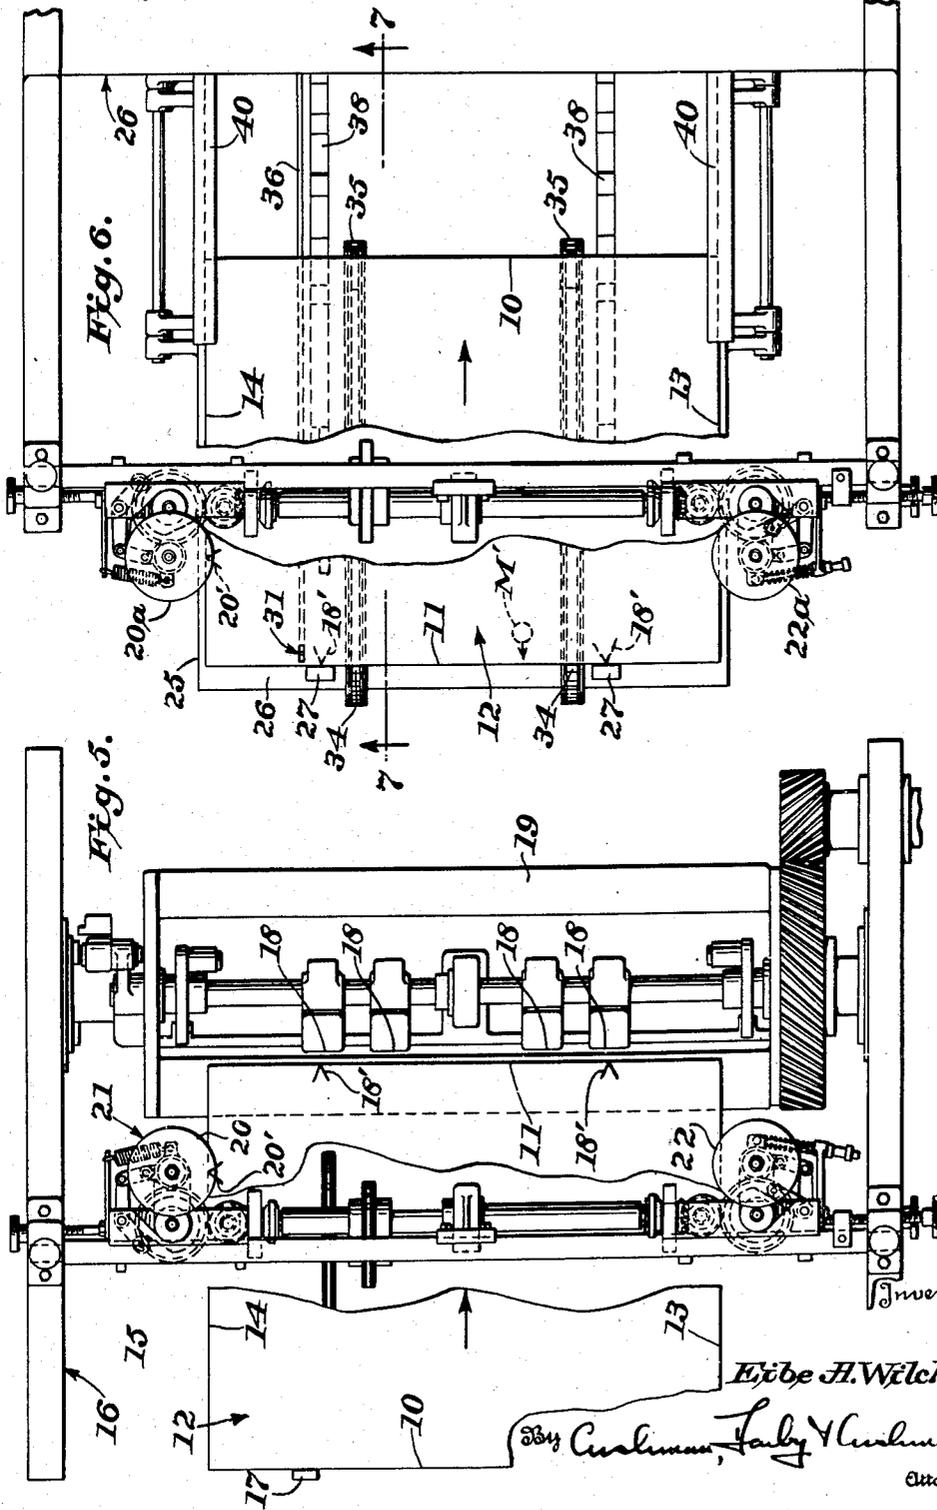

Inventor:

Ebbe H. Wilckens,

By Carlman, Fairly & Carlman
Attorneys

July 11, 1950

E. A. WILCKENS

2,514,819

APPARATUS FOR HANDLING SHEETS

Filed May 4, 1945

4 Sheets-Sheet 4

Fig. 9.

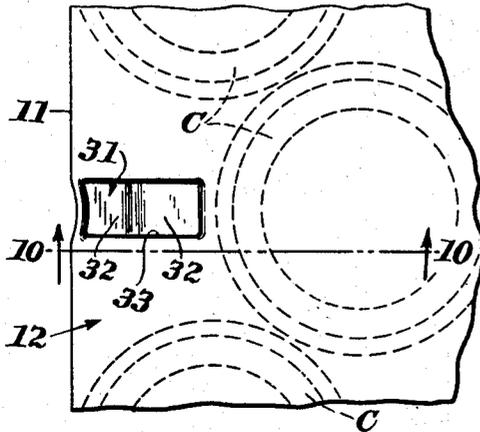


Fig. 11.

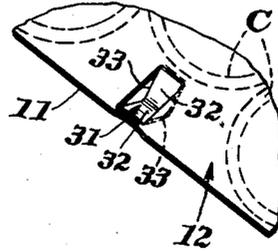


Fig. 10.

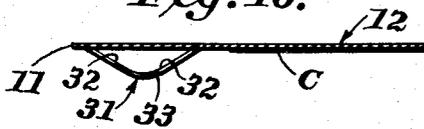


Fig. 7.


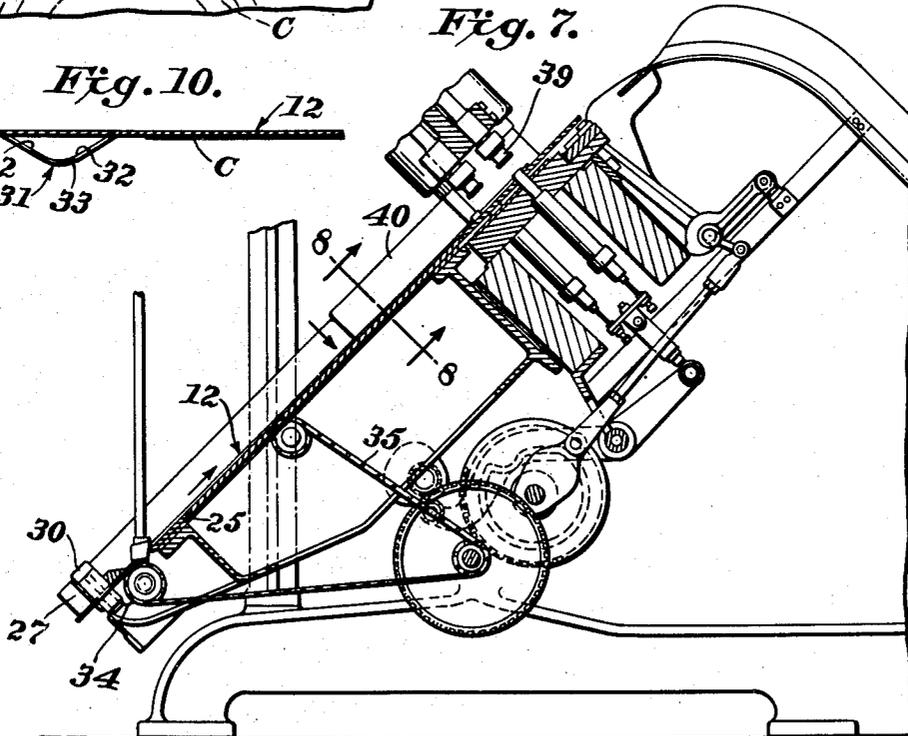


Fig. 8.

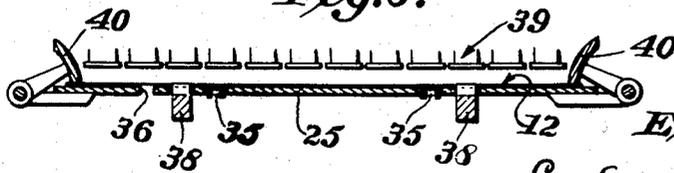

Inventor:

Eide H. Wilckens,

by *Cushman, Fairly & Cushman*

Attorneys

UNITED STATES PATENT OFFICE

2,514,819

APPARATUS FOR HANDLING SHEETS

Eibe A. Wilckens, Baltimore, Md., assignor to
Crown Cork & Seal Company, Inc., Baltimore,
Md., a corporation of New York

Application May 4, 1945, Serial No. 591,975

6 Claims. (Cl. 113—113)

1

The present invention relates to apparatus for handling sheets and, more particularly, for handling sheets during the performance of registered operations thereon.

Bottle caps of the crown type ordinarily have a beverage identifying design or label lithographed thereon. Such caps are produced by lithographing a metal sheet with several hundred of the cap designs arranged in rows and then passing the sheet through a cap forming press which punches out the designs and forms them into skirted caps. Naturally, it is necessary that the designs be centered upon the caps and this requires registration on the cap forming press identical with that which was had on the lithographing press.

Under prior practice, registration of the lithographed designs with the dies of the cap forming press depended primarily upon having each sheet an exact rectangle of true dimensions. In order to meet these requirements, it was necessary to trim all four edges of the sheet, which resulted in a waste of metal. Furthermore, if the trimming to square the sheet failed in any respect, at least a number of the caps would be imperfect.

A further difficulty arose from the fact that after a sheet was initially registered in the cap forming press, it could shift its position while it was advanced beneath the dies.

An object of the present invention is to provide an apparatus for handling sheets during operations performed by two apparatus and whereby the sheets will be held to the same registration on both apparatus.

Another object of the invention is to provide an apparatus for so handling sheets which are not true rectangles, not straight-edged, and not of exact dimension in one direction, that such sheets will be properly registered during two operations thereon.

It is well-known that roll shears, i. e., shears which trim the edges of a moving strip, are highly accurate in forming properly spaced parallel side edges on a strip of metal. By prior cap forming processes the two parallel edges formed on a sheet by such shears were later trimmed off during an operation intended to make the sheet an exact rectangle. As a result of this practice, the two parallel edges provided by the roll shears, and also a strip of metal extending entirely around the sheet, were wasted. Furthermore, the square-trimming performed after roll shearing necessitated a separate operation upon the sheet.

Another object of the present invention is to provide an apparatus whereby use is made of the two parallel edges formed by the usual roll shear and the spacing of these edges is relied upon during handling of the sheet.

A further object of the invention is to provide

2

an apparatus of handling a sheet during the formation of articles therefrom and whereby a minimum area of material will be wasted.

Another object of the invention is to provide sheets with guide means which will hold them against shifting during performance of an operation on the sheet.

Still another object of the invention is to provide a cap forming apparatus which is of such construction that sheets will be held against shifting during movement therethrough.

A further object of the invention is to increase the rate of production of cap forming presses.

The invention is described herein as applied to the formation of bottle caps from metal sheets. However, it will be perceived from the following description that the invention is applicable to the production of numerous types of articles from sheets of various materials, and particularly when it is necessary to register or align the sheet with one or more means to perform an operation thereon.

Other objects and advantages of the invention will be apparent from the following specification and accompanying drawings, wherein:

Figure 1 is a view diagrammatically illustrating the principal stages followed in the prior system of handling metal sheets during the production of bottle caps.

Figure 2 is a view diagrammatically illustrating the principal stages followed in the system of the present invention for handling metal sheets during the manufacture of articles therefrom.

Figure 3 diagrammatically shows the relation of a prior lithographed sheet of cap blanks to the cap punching dies.

Figure 4 diagrammatically shows the relation of a lithographed sheet to the cap dies by the procedure of the present invention.

Figure 5 is a plan view of the feed table of a lithograph press, the view illustrating the lowermost or impression cylinder and the sheet gripping device associated with that cylinder, the upper cylinders being omitted.

Figure 6 is a plan view of the feed table of a cap forming press constructed in accordance with the present invention, the dies being omitted.

Figure 7 is a vertical section view of the cap forming press of Figure 6, the section being taken on the line 7—7 of Figure 6. Figure 7 is on a smaller scale than Figure 6.

Figure 8 is a transverse sectional view on the line 8—8 of Figure 7.

Figure 9 is a fragmentary plan view showing a portion of a sheet provided with the guiding element of the present invention.

Figure 10 is a sectional view on line 10—10 of Figure 9, and

Figure 11 is a fragmentary perspective view of

3

a sheet provided with a guiding element of the present invention.

Referring to Figure 1, this figure diagrammatically illustrates the principal stages of the procedure heretofore used in forming the metal sheets, lithographing them and forming bottle caps therefrom. In stage A of Figure 1, the reference character *St* designates a strip of metal which is moving to the right from a large roll, not shown. In some instances, this strip may have already received a background color or finish. The strip *St* includes side edges *E'* which are the original edges of the strip and are uneven. By the operation of stage A, the strip was trimmed by roll shears, not shown, to provide the parallel and properly spaced edges *E''*.

In stage B of Figure 1, flying shears, not shown, cut the strip *St* cross-wise at longitudinally spaced points to form sheets *S* including the long edges *E²* formed by the fly shears. Because of the inaccuracies arising in the cutting of a rapidly moving strip by fly shears, the edges *E²* were not always parallel, properly spaced, or at right angles to the parallel edges *E''*. For that reason, the four-side square trimming indicated in stage C was performed to remove the material shown outside of the solid lines in stage C. This was intended to make the sheet a rectangle and provide it with short edges *E³* and long edges *E⁴*. About 1/8" of material had to be removed from each edge of a sheet *S* of the dimensions shown in stage B, resulting in a total loss and waste of about eighteen square inches of material, or over three per cent of the total sheet *S* of stage B. In addition, it wasted the perfectly parallel side edges *E''* provided by the roll shears in stage A. The "squared" sheet is designated *S'* in stage C.

Stage D of Figure 1 indicates how the rectangular sheet *S'* was registered in a lithograph press by the prior practice. As is diagrammatically indicated in stage D, the sheet *S'* was initially placed upon and moved across the feed table of the press in the direction of the central arrow by conveyor chains, not shown. Its trailing edge *E⁴* was then engaged by spring-loaded pushing elements *P* acting on the trailing edge at the points indicated by the arrows. However, immediately after the pushers *P* engaged the sheet, side gauging elements *RG* and *SG* moved in toward its side edges *E³*. Gauge *RG* assumed a rigid position, but the gauge *SG* was spring-loaded when adjacent the sheet and urged the sheet against *RG* while the sheet was moved to the right in stage D by the pushers *P* and toward the gripper stops *GS* carried on the impression roll of the press. The purpose of this combined action by the pushers *P* and spring-loaded side gauge *SG* was to place the leading edge *E⁴* firmly against all of the gripper stops *GS* and also properly position the sheet axially of the press roll, viz., against rigid side gauge *RG*. The grippers associated with the gripper stops *GS* then closed to grip the sheet and pull it through the press rolls to be lithographed on its top face. The side gauges *RG* and *SG* moved out of contact with the sheets immediately after the sheet was gripped.

It will be observed that by the above action, the leading edge of the sheet, i. e., one of the long edges *E⁴* formed during the square-trimming of stage C was registered at the two points *R¹* designated by V-marks. The other point of registration, i. e., by the rigid side gauge *RG*, is indicated by the V-mark *R²* on one short edge *E³*. After the grippers engaged the sheet and it was also engaged by the impression roll and blanket roll

4

of the press, it could not shift. Therefore, the rows of cap designs placed on the sheet *S'* by the lithograph press were in registration with the points *R¹* and *R²*.

After the sheet was lithographed, it was moved from the lithograph press through a long drying or baking oven including a conveyor on which the sheets stood on one long edge *E⁴* and were kept separated from each other. The sheets moved with the conveyor in the drying oven for a period of about ten minutes and were then individually removed by an attendant who stacked the sheets face upward. The attendant took each sheet from the drying oven in such a manner that they were all oriented in the same manner on the stack. Each sheet would have a mark such as *M* lithographed thereon (but at a point clear of the cap designs) to indicate which edges of the sheet were registered at the points *R¹* and *R²*. If the design to be applied required an additional lithographing step the mark *M* indicated the direction in which the sheets should be moved during that operation.

When all lithographing and drying or baking was completed, the sheets were then stacked with their lithographed faces downward and the stack of sheets was moved to a cap forming press.

Stage E of Figure 1 illustrates the prior handling of a sheet *S'* in the cap forming press, and in which press it was moved in the direction of the central arrow, i. e., to the right in Figure 1. It will be noted that one of its shorter edges *E³* thereby became the leading edge of the sheet.

In the cap forming press operation, the stack of lithographed sheets had the top sheet removed therefrom and positioned in the lower portion of an upwardly inclined feed table such as generally indicated in Figure 6, and with the lithographed side of the sheet *S'* turned down. As a result, one of the shorter edges *E³*, comprising the trailing edge, rested against fixed stops designated *FS* in stage E. Although stage E illustrates in dotted lines the registry points *R¹* and *R²* established on the sheet in the lithographing press, it will be clear from the following that these points had no significance whatever during registration in the punch press and that the sheet could be swung laterally 180° from the position illustrated.

The cap forming press feed table included two upstanding side walls designated *SW* which were spaced apart by a distance corresponding to the dimension which sheet *S'* was supposed to have between edges *E⁴*, plus clearance. The walls *SW* terminated immediately beyond the lines of punch dies indicated by the dot-dash lines *PD* in stage E of Figure 1. As a result of the above structure, when a sheet *S'* was placed on the cap forming press feed table, its long edges *E⁴* contacted with the side walls *SW* and its trailing short edge *E³* contacted with the fixed stops *FS*. A conveyor chain then moved the sheet upwardly, or to the right in stage E, until its lower edge was engaged by feed dogs which moved it step by step beneath the punch dies at *PD*. The registration was by the side walls *SW* and the feed dogs. Obviously, if the trimming of stage C which established the spacing between edges *E⁴* was inaccurate, a sheet *S'* could be so narrow that it would move laterally. The registration of the cap forming dies with the cap designs would thereby be inaccurate. Alternatively, if the sheet was slightly oversized, it would buckle or even become jammed between

5

the side walls SW. A still further difficulty could arise if the side edges E⁴ were not parallel, and particularly if the trailing portion of the sheet was thereby of less dimension between these side edges than was the case with the leading portion. In such a case, if the leading portion fitted exactly between the side walls SW so that the designs on that portion of the sheet were properly registered with the cap forming dies, nevertheless, after the leading portion moved past the upper ends of the walls SW, the trailing portion could shift so that poor registration occurred.

Summarizing the above-stated disadvantages of the prior system illustrated in Figure 1, it will be observed that by that system, registration in the cap forming press of stage E primarily relied upon having the sheets of exact dimensions and true rectangularity. This was a different type of registration from that used during the lithographing (stage D) wherein registration actually was solely dependent on having only two edges substantially at a right angle to each other, with no reliance upon the exact dimensions of those edges or the other edges. Also, in order to obtain proper registration during the cap forming operation, it was necessary that the trimming be accurate as to dimension and that all edges be square, which wasted metal and required the special operation of stage C. Finally, it was possible for the sheet to shift during the cap forming operation.

Still another disadvantage of the prior system is evident from Figure 3. Figure 3 is primarily an enlargement of stage E of Figure 1 but, in addition, shows the layout of the cap designs applied to the sheet S' during stage D of Figure 1 and also the layout arrangement of the cap forming dies PD. Because these designs are on the lower face, they are shown in dotted lines.

Referring to Figure 3, it will be observed that sheet S' has applied thereto a row C¹ of cap designs immediately adjacent the leading narrow edge E³. The next row C² has its designs staggered with respect to those of row C¹ and the designs of the two rows are also "nested," in that opposed portions of the cap design perimeters are extremely close to each other. For example, on a sheet of caps used on the usual soft-drink or beer bottle, which caps have their tops of a diameter of 26 millimeters, or approximately one inch, the design, on the sheet S' (including the portion to be formed into a skirt), was one-and-a-half inches in diameter. However, adjacent designs were only about one-half a millimeter apart. The designs in row C¹ were positioned equally as close to the edge E³ of the sheet and the design in row C¹ adjacent edge E⁴ was less than .1" from that edge. A third row C³ had its designs directly behind those of row C¹ and nested with respect to those of row C². A fourth row C⁴ had its designs in alignment with those of row C². Rows C⁵ and C⁶, with designs respectively behind those of rows C¹ and C³, are also illustrated.

Obviously, the rows of designs were too close together to enable closely adjacent rows to be stamped on the same stroke of the punches. For example, punch and die elements could not be positioned as closely together as the designs. This is clear from the right-hand portion of Figure 3, wherein row D¹¹ of the punches PD is shown spaced from row D² a distance corresponding to the spacing between rows C¹ and C⁶ of the designs on sheet S'. However, both rows

6

of punches reciprocated together on any stroke of the press.

The sheet S' was moved up the feed table by a conveyor chain until its trailing edge was engaged by a feed dog mechanism which so positioned the sheet that the design row C² was beneath the row D² of cap forming punches. The punches were then reciprocated so that row D² stamped caps from design row C². This action is indicated by the dot-and-dash line circles within the designs of row C². Simultaneously, the punches of row D¹¹ descended in the paths indicated by the dot-and-dash line circles D^{11'}. Then the sheet advanced to bring design row C⁴ beneath punch row D². The designs of this row, containing cross-marks in the drawing, were then punched out, while the row D¹¹ of punches descended in the paths indicated by the dot-and-dash circles D^{11''}. It will be observed from the circles D^{11''} that on this stroke the punches D¹¹ descended extremely close to the leading edge E³ of sheet S'. Obviously, if the length of sheet S' between its edges E³ was very slightly oversize, the punches D¹¹ would cut a sliver from the leading edge E³. Such a sliver would remain in the die and cause the next cap formed by the die to be ruined. Furthermore, it meant that all of the designs on the sheet would be slightly out of registration.

If the sheet was too short, the caps formed from leading row C¹ would have a portion missing from the leading sides of their skirts and all of the designs would also be out of registration.

The feed dogs then moved the sheet forward for a distance corresponding to the distance between the centers of rows C¹ and C³ and the third stroke of the punches punched out the designs in rows C¹ and C⁶. Succeeding movements of the sheet were of a distance corresponding to the space between the centers of rows C¹ and C³ so that the third and eighth, and then the fifth and tenth rows were punched. With thirty-six rows to a sheet, the thirty-sixth row had its designs in alignment with those of row D². On the next to the last, or nineteenth stroke, punch row D¹¹ would punch the thirty-third design row while punch row D² came down beyond the sheet, leaving only the thirty-fifth row to be punched. For the final punch stroke, the feed dogs moved the sheet forward a distance corresponding to the distance between rows C¹ and C³, and punch row D¹¹ punched the thirty-fifth design row.

Summarizing the above, if the sheet S' was either too long or too short, difficulties resulted which were of even more practical importance than the lack of registration discussed above. Therefore, the "square-trimming" of stage C (Figure 1) which established the distance between the edges E³ was regarded as extremely critical.

Figure 2 diagrammatically illustrates the steps followed by the procedure of the present invention. Figures 4 to 11 illustrate these steps in more detail and also illustrate the apparatus. Referring to the first step of the invention procedure, shown at the left of Figure 2 and designated stage A¹, a strip S^t moving from a roll, not shown, of the metal, is trimmed by roll shears to parallel and accurately spaced edges 10 and 11. The strip is then cut cross-wise by fly shears as indicated in stage B¹ to form the sheet designated by the numeral 12. Sheet 12 includes the long edges 10 and 11 formed by the roll shear and the short edges formed by the fly shear and designated 13 and 14, respectively. It will be ob-

7

served that the edges 10 and 11 are the edges formed by the roll shear in stage A¹. In some instances, the strip St' may have a background color applied thereto.

The sheets 12 are stacked and then, without any further trimming or squaring such as followed at stage C in the Figure 1 prior practice, are successively delivered to the feed table 15 of a lithograph press generally indicated by the numeral 16 in Figure 5. Stage D¹ of Figure 2 also indicates this positioning of the sheet. Although stage D¹ and Figure 5 show the sheet 12 oriented to have its long edge 10 trailing, the other long edge 11 could be the trailing edge during this stage.

It will be noted that the sheet 12 illustrated as used in the present invention is larger than that used with the prior system. The reasons for this are hereinafter explained.

Referring to Figure 5 and also to stage D¹ of Figure 2, the sheet 12 is moved to the right as shown by the central arrows in both figures by dog chains, not shown, and until its trailing edge 10 is engaged by spring loaded pushers 17 diagrammatically illustrated in both figures.

While sheet 12 is being moved to the right in Figure 5 and stage D¹, a side gauging device such as the driven roller 20 included in a gauging mechanism 21 is moved toward the edge 14 of sheet 12 and then becomes rigid in the position illustrated. At the same time, a gauge such as roller 22 moves in against the opposite side edge 13 of the sheet. Roller 22 is spring-loaded and thereby urges the sheet against the now rigid roll gauge 20.

Immediately before the gauges 20 and 22 have moved inwardly as described above, the spring-loaded pushers 17 will engage the trailing edge 10 of the sheet to move its leading edge 11 into contact with the gripper stops 18 mounted on impression roll 19 and associated with the usual sheet grippers.

The result of the above action will be that the leading edge 11 will be moved into contact with all the gripper stops and its side edge 14 will be positioned at a predetermined point axially of the press couple. In other words, the sheet will be registered at the points 18' and 20' indicated by the V-marks on stage D¹ of Figure 2. The side gauges 20 and 22 will move away from and out of contact with the sheet immediately after the sheet is gripped by the gripper stops 18. These gauges can be in contact with the sheet for some distance along its edges but the final gauging takes place at the instant the grippers close. Therefore, the side gauging takes place at a very definite point on the edge of the sheet. If the sheet is out of square, it may have a slight side-wise movement as it advances and until the grippers close. The instant the grippers close, the side gauges retreat.

The side gauges described above are similar to those disclosed in the application of Elbe A. Wilckens and Ellis M. Magill for "Sheet Feeding and Gauging Mechanisms," Serial No. 471,168, filed January 2, 1943, Patent No. 2,396,481, issued March 12, 1946. However, any suitable side gauging mechanism having the action described above may be used.

After the sheet 12 is gripped by the grippers associated with the gripper stops, it will be drawn through the press couple and lithographed on the face shown uppermost in stage D¹ and Figure 5. A register mark such as M' will be applied to the top and lithographed face of each

8

sheet by the transfer roll to indicate which edges were registered in the lithograph press. This mark will, of course, be at a point clear of the designs and is shown greatly enlarged.

It will be observed that the register and gauging mechanisms described above in connection with Figure 5 and stage D¹ of Figure 2 are substantially identical with those used and followed in the prior system described in connection with stage D of Figure 1.

After the sheets have been lithographed, they move through a drying or baking oven while standing on one edge and in the same manner as has been described above in connection with the prior practice of Figure 1. When drying or baking has been completed, the sheets are piled in a stack, all oriented in the same direction and with their lithographed faces turned up, in accordance with the usual practice. If further lithographing is required, it is carried out as has been described in connection with Figure 5 and stage D¹ of Figure 2 and the drying and subsequent stacking repeated. After final lithographing, the sheets are stacked with the lithographed side down.

Stage E¹ of Figure 2 and also Figure 4 illustrates the manner in which the sheets are handled in the cap forming press by the apparatus of the present invention. Figures 6 to 8 illustrate the construction of the cap forming press. Referring to the views mentioned, the stack of lithographed sheets is placed on the sheet feeder, not shown, of the punch press with their lithographed faces down and the registered edges 11 (marked M') to the left as viewed in stage E¹ and Figures 4 and 6. The top sheet is then delivered to the inclined feed table 25 of the punch press. Because of the manner in which the stack is oriented, this will cause the registered edge 11 to be lowermost or to the left as viewed in all these figures. In other words, the new orientation of the sheet shown in stage E¹ of Figure 2 may be compared with that in stage D¹ by stating that to reach the stage E¹ position, the sheet of stage D¹ will be turned over, with its edge 11 serving as the pivot, and so that its lithographed face will be lowermost in stage E¹. This change of position is apparent from a comparison of the position of the mark M' in stage D¹ with the mark M' of stage E¹.

The lower edge 26 of the feed table 25 is provided with rigid stops 27 with which the register points 18' will contact. In addition, feed table 25 is equipped with side gauging mechanisms including rollers 20a and 22a. The roller 20a is identical in action with the roller 20 of the lithograph press 16 and the roller 22a is identical with the roller 22 of the lithograph press. After the sheet is dropped on the inclined table 25, its registered edge 11 will, by gravity, slide into firm contact with the rigid stops 27. Then the roller 20a will move inwardly and laterally to a rigid position and roller 22a will move in under spring loading to contact with the opposite edge, thereby urging edge 14 of the sheet against the momentarily rigid roll 20a. It will be noted that roll 20a will contact with the edge 14 at the register point 20' established in the lithograph press. Because the other registered edge 11 is registered against the stops 27, the sheet is now registered at the same points at which it was registered in the lithograph press.

A die 30 including upper and lower cooperating die elements generally illustrated in Figure 7 is mounted at the lower edge of the feed table 25.

As soon as the spring-loaded side gauge 22a has urged the sheet 12 to the position illustrated in Figure 6, for example, this punch mechanism will be actuated in timed relation to the operation of the side gauges so as to provide a guiding means such as element 31 (Figures 9 to 11) in the sheet 12, preferably adjacent its registered edge 11. The guide tab or element 31 is in the form of a strap bent downwardly from the sheet and preferably of V-shaped form as viewed from one side to include legs 32 having opposite side edges 33. The side edges 33 lie in planes which are normal to a line passing through the register points 18'. In addition, the planes in which the edges 33 lie are at predetermined and fixed distances, respectively, from the registry point 20' on the edge 14.

Immediately after the punch 30 has formed the guide element 31, its punch elements move clear of the sheet. This entire punching action will occur immediately before the side gauges retract or immediately after they have retracted. In any event, a flight 34 on each of the two usual conveyor chains 35 of the cap forming press will now move into contact with the lower edge 11 of the sheet as shown in Figure 6 to move the sheet up the feed table 25. The feed table 25 is provided with a groove 36 in which the guide element 31 will move. The side walls of groove 36 are properly spaced to prevent the guide element 31 from moving or twisting laterally therein. In accordance with the usual practice, after chain 35 has moved the sheet upwardly a predetermined distance, the lower edge of the sheet will be engaged by feed dogs such as indicated at 38 and these dogs will move the sheet step by step beneath the punches 39 and over the cooperating dies in the same manner as followed in prior practice and described above in connection with Figure 3. Hold-down members 40 may move downwardly upon the side edges of the sheet as illustrated in Figures 6 and 7 and in the usual manner to prevent the sheet from buckling along a line cross-wise of the feed table as it is pushed upwardly. However, these members will not exert sufficient pressure to cause the sheet to be deviated from the straight line path imparted to it by the engagement of the side edges 33 of guide element 31 with the side walls of the groove 36. The side edges 13 and 14 need not be engaged by any guide means after guide element 31 has been formed.

The guide element 31 which is illustrated is readily formed by a die which makes two straight and parallel cuts and then presses the intermediate portion to a V-shape. It can be formed in between two cap designs of the row of designs nearest the registered edge 11 as shown in Figure 4. As shown in Figure 4, the lay-out of the cap designs on a sheet is such that the row of designs nearest an edge 11 or 10 is spaced a sufficient distance apart to provide adequate space between two adjacent designs for a tab of adequate width. Furthermore, the designs of the next row parallel to edge 11, although partially nested between those of the outer row as described in connection with Figure 3, are far enough from the edge 10 or 11 of the sheet to permit the guide element 31 to be of adequate length. The guiding element 31 included in the present invention is highly efficient because, with a minimum area, it provides optimum straight edge surfaces and sufficient depth to prevent the element 31 from rising entirely out of engagement with groove 36. In practice, a sheet approx-

imately $25\frac{1}{4}$ " by $32\frac{1}{4}$ " requires a guide element having a width of approximately $\frac{1}{4}$ " and a length less than one inch, with its greatest depth approximately $\frac{1}{4}$ ".

Placing the guiding means 31 adjacent registered edge 11 further prevents any deviation from the registration established in the lithograph press.

It will be perceived from the above that by the present invention, sheets will be registered in the cap forming press at the same points at which they were registered in the lithographing press. Therefore, it is not necessary that the sheet include perfectly straight and parallel side edges 13 and 14, or even that the two registered edges 11 and 14 be exactly at right angles to each other. Slight deviations in both these factors may be present so long as the sheet contains an area having the minimum dimensions necessary to produce the set number of caps for its size, i. e., in the present instance, an area measuring $25\frac{3}{8}$ " by $32\frac{1}{8}$ ". In short, the only exact characteristics required by the present apparatus and process are that the edges 10 and 11 which are the leading and trailing edges in the cap forming press, be parallel and exactly the proper distance apart. As has been stated above, roll shearing such as performed in Stage A1 is entirely efficient to provide such characteristics. It will be noted that one aspect of the invention is the use of the roll-shear-formed edges as the leading and trailing edges in the lithographing and cap forming stages, thereby making it feasible to leave the fly-shear-formed edges on the sheet to serve as side edges. As has been stated above, the use of the same registration system in both the lithographing and cap forming presses requires less perfection in these edges.

Figure 4 diagrammatically shows the lay-out of designs on the sheet 12 and the layout of the dies 39. The steps by which the sheet is moved beneath the punches and over the dies are the same as have been explained in connection with the prior practice system of Figure 3. In addition, the rows of cap designs are arranged in the same spacing as on the prior sheet S' of Figure 3, except that the rows of designs 40, 41, 42, 43, etc., extend parallel to the wide edges 10 and 11 of the sheet 12. Obviously, the invention could be used upon sheets having shorter edges 10 and 11 but, for increased production and operating efficiency, it is desirable to use as large sheets and as many dies as possible. With the present invention, use of larger sheets than have heretofore been used becomes possible, because (1) the roll-shear will uniformly produce parallel edges 10 and 11, (2) the system of registration enables such sheets to be accurately registered in both presses, and (3) the guiding element prevents the sheet from twisting or deviating from a straight path during cap punching.

Also, the fact that the procedure of the present invention enables a sheet to be moved through the cap forming press in the same manner in which it is moved through the lithograph press, i. e., with a wide edge cross-wise, makes registration more accurate. As shown in Figure 4, the cap forming press used with the sheet 12 may have two rows of dies, with twelve dies in each row, thereby forming twenty-four caps on each stroke of the press. The cap forming presses used with the prior sheet S' included two rows of only eight dies each.

Although the invention has been described as applied to cap forming, it will be apparent that

it is applicable to numerous types of apparatus wherein operations requiring registration are performed upon sheets of various materials.

It will also be noted that numerous phases of the invention are applicable in operations wherein no designs are applied to articles.

Subject matter disclosed but not claimed herein may be claimed in my divisional application for Apparatus and Methods for Handling Sheets, Serial Number 162,085, filed May 15, 1950.

The terminology used in the specification is for the purpose of description and not of limitation, the scope of the invention being indicated in the claims.

I claim:

1. Apparatus including means for performing an operation upon a sheet, a bed along which the sheet is to be fed to the operation performing means, means at one end of said bed arranged for registering the sheet in a position such that critical points on the sheet subsequently can be brought into exact registry with corresponding critical points of action of the operation performing means solely by a simple motion of translation of the sheet along the bed, means effective while the sheet is in contact with the register means to form a projection extending from one face of the sheet and which projection includes two parallel spaced apart side surfaces at substantially right angles to a face of the sheet and parallel to the direction of said simple motion of translation, said bed including a groove provided with parallel side walls adapted closely to engage said side surfaces of the sheet projection and lying parallel to the direction of said simple motion of translation, and means to move the groove-engaged sheet along said bed in a direction lengthwise of the bed groove from the registry means to the operation performing means.

2. Apparatus of the character described in claim 1 wherein the registry means of said bed includes an element provided with a surface lying on a line extending at right angles to the side walls of the bed groove.

3. Apparatus of the character described in claim 1 wherein the registry means of said bed includes an element provided with a surface lying on a line extending at right angles to the side walls of the bed groove, and a pair of elements respectively movable toward the side walls of the bed groove.

4. In an apparatus for punching cap devices from predetermined areas of a sheet, a bed, punch devices at one end of said bed, means at the opposite end of said bed arranged for registering the sheet at a position such that the predetermined areas of the sheet can be subsequently brought into exact registry with corresponding devices of said punch devices solely by a simple motion of translation of the sheet along the bed, means effective while the sheet is in contact with the registry means to form a projection extending from one face of the sheet and which projection lies intermediate adjacent of

said predetermined areas and includes two parallel spaced apart side surfaces at substantially right angles to a face of the sheet and parallel to the direction of said simple motion of translation, said bed including a groove provided with parallel side walls adapted closely to engage said side surfaces of the sheet projection and lying parallel to the direction of said simple motion of translation, and means to move the groove-engaged sheet along the bed in a direction lengthwise of the bed groove from the registry means to said punch devices.

5. Apparatus of the character described in claim 4 wherein the registry means includes an element provided with a surface lying on a line extending at right angles to the side walls of the bed groove.

6. Apparatus of the character described in claim 4 wherein the registry means of said bed includes an element provided with a surface lying on a line extending at right angles to the side walls of the bed groove, and a pair of elements respectively movable toward the side walls of the bed groove.

EIBE A. WILCKENS.

REFERENCES CITED

The following references are of record in the file of this patent:

UNITED STATES PATENTS

Number	Name	Date
250,304	Vieillemand	Nov. 29, 1881
271,782	Buchanan	Feb. 6, 1883
506,837	Allgire	Oct. 17, 1893
554,913	Dexter	Feb. 18, 1896
614,809	Henkle	Nov. 22, 1898
677,821	Tily et al.	July 2, 1901
994,590	Jackson	June 6, 1911
1,037,844	Adriance et al.	Sept. 10, 1912
1,098,060	Spiller	May 26, 1914
1,123,658	Banzett et al.	Jan. 5, 1915
1,200,758	Pringle	Oct. 10, 1916
1,288,316	Walsh	Dec. 17, 1918
1,680,032	Henderson	Aug. 7, 1928
1,778,493	Griffiths	Oct. 14, 1930
1,940,581	Carter	Dec. 19, 1933
2,034,269	Price	Mar. 17, 1936
2,119,662	Williams	June 7, 1938
2,150,016	Wood	Mar. 7, 1939
2,151,028	Hayward	Mar. 21, 1939
2,154,597	Barrett	Apr. 18, 1939
2,175,338	Booth	Oct. 10, 1939
2,243,175	Stewart	May 27, 1941
2,254,558	Williams	Sept. 2, 1941
2,396,481	Wilckens et al.	Mar. 12, 1946
2,400,927	Harrold	May 28, 1946
2,406,847	Neuhart	Sept. 3, 1946

FOREIGN PATENTS

Number	Country	Date
788,474	France	July 29, 1935
60,447	Norway	Feb. 13, 1939