



(43) International Publication Date
2 October 2014 (02.10.2014)

(51) International Patent Classification:

C01B 3/38 (2006.01) *B01J 19/00* (2006.01)
B01J 19/24 (2006.01) *B01J 8/06* (2006.01)

(21) International Application Number:

PCT/US2014/024165

(22) International Filing Date:

12 March 2014 (12.03.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/777,935 12 March 2013 (12.03.2013) US

(71) Applicant: **BATTELLE MEMORIAL INSTITUTE**
[US/US]; 505 King Avenue, Columbus, Ohio 43201-2693
(US).

(72) Inventors: **GEORGE II, Paul E.**; 505 King Avenue,
Columbus, Ohio 43201-2693 (US). **CONTINI, Vincent**;
505 King Avenue, Columbus, Ohio 43201-2693 (US).
GOSHE, Matthew E.; 505 King Avenue, Columbus, Ohio
43201-2693 (US).

(74) Agent: **KLEIN, Richard M.**; Fay Sharpe LLP, 1228 Euc-
lid Avenue 5th Floor, Cleveland, Ohio 44115 (US).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: REACTOR INCORPORATING A HEAT EXCHANGER

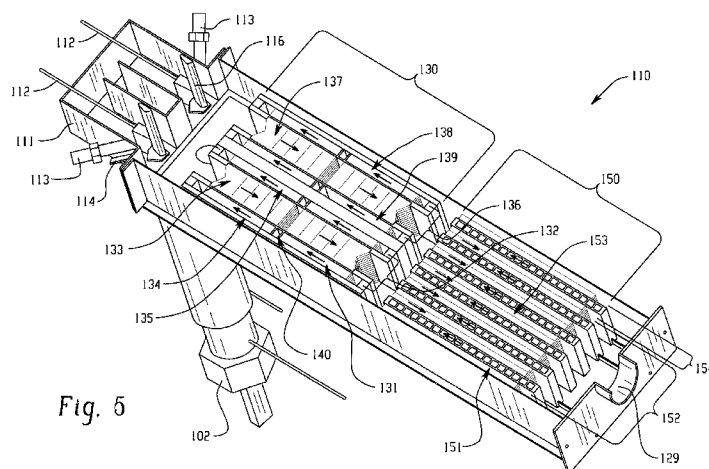

(57) Abstract: A reactor containing a heat exchanger is disclosed, which can be operated with co-current or counter-current flow. Also disclosed is a system that includes a reactor having a reformer and a vaporizer, a fuel supply, and a water supply. The reactor includes a source of combustion gas, a reformer operative to receive reformat, and a vaporizer operative to receive water. The re-former and vaporizer each include a stack assembly formed by a combination of separator shims and channel shims. The separator shims and channel shims are stacked in a regular pattern to form two sets of channels within the stack assembly. One set of channels will have vertical passageways at either end and a horizontal flowpath between them, while the other set of channels has only a horizontal flowpath.

REACTOR INCORPORATING A HEAT EXCHANGER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Patent Application Serial No. 61/777,935, filed March 12, 2013. The entirety of that application is hereby fully incorporated by reference herein.

BACKGROUND

[0002] The present disclosure relates to heat exchangers, systems, methods, and devices for performing an energy intensive reaction, either exothermic or endothermic. The devices disclosed herein are particularly applicable to steam / hydrocarbon reforming, and can also be used in other applications. Generally, the system may be used to generate electricity by reforming a mixture of steam and hydrocarbon fuel in a fuel processor that outputs hydrogen gas to a fuel cell. The method for forming the heat exchanger may include diffusion bonding of a stack of alternating shims of appropriate design. The heat exchanger can be used in a reactor usable in connection with different types of fuel cells, e.g., proton-exchange membrane fuel cell (PEMFC) and solid oxide fuel cell (SOFC), to generate electricity in an effective and low cost manner. The device may also include a counter-flow configuration and/or lateral heat transfer between reactant gases and combustion gases to enhance thermal flow and overall efficiency.

[0003] Fuel cells serve as a popular alternative to other energy sources due to their high efficiency and relatively benign reaction byproducts. Fuel cells produce electricity through an electrochemical reaction between a fuel input and an oxidant. Many fuel cells to date have been designed to use hydrogen as the fuel input. However, storing large quantities of needed hydrogen gas for the fuel cell has often proved to be impracticable. To address the known disadvantages of hydrogen gas storage, systems to produce hydrogen gas on-demand have been developed.

[0004] One type of fuel processor system generates hydrogen on-demand by reforming a hydrocarbon fuel into usable hydrogen. The hydrocarbon fuels used by this fuel processor system are easier to store using existing storage infrastructure relative to hydrogen gas. Reforming hydrocarbon fuel into hydrogen gas requires steam to oxidize

the hydrocarbon fuel into carbon monoxide (CO) and hydrogen (H₂), typically in the presence of a catalyst. Steam reforming is also a strongly endothermic reaction that must be performed at high temperature to improve the yield of hydrogen gas produced. Therefore, effective thermal management between reactant gas and combustion gas flowing within a fuel processor system is crucial to maintain reaction temperatures.

[0005] Current fuel processor systems include a fuel processor which receives a reformat input (steam and hydrocarbon fuel reactant mixture) and produces a syngas output (hydrogen and carbon monoxide). In some known systems, the hot combustion gas flows in channels that are perpendicular (i.e. at a 90° angle) to the channels through which the reformat input flows, a configuration referred to as a cross-flow panel configuration. In other known systems, the hot combustion gas flows in the same direction as reformat input along parallel channels, also known as co-flow. In yet other known systems, the hot combustion gas flows in an opposite direction to reformat input along parallel channels, a configuration referred to as counter-flow. Counter-flow may be a preferred method for reactions having a large temperature differential between hot combustion gas and reactant gas. Counter-flow is believed to be more advantageous than a cross-flow or co-flow configuration because it enables more efficient lateral heat transfer between reactant gases flowing within reaction channels and combustion gases flowing within combustion channels.

[0006] Current heat exchangers present many limitations, including high fabrication costs, large size, and sensitivity to carbon formation. These heat exchangers are also expensive to make. One reason for the high fabrication expense is the number of high-skilled welds, both internal and external, that are required. For example, pressure welds are currently used to fabricate fuel processors. A large number of high-skilled pressure welds are required to assemble reactor panels into panel sets and then panel assemblies.

[0007] It would be desirable to provide heat exchangers that are easier to make, less costly, and less sensitive to carbon formation. These heat exchangers may provide lateral heat transfer between reactant gases and combustion gases to enhance thermal flow and overall efficiency. The heat exchangers may be used as fuel processors for steam reforming or similar reactions.

BRIEF DESCRIPTION

[0008] The present disclosure relates to heat exchangers, systems, methods, and devices for transferring heat between two different flowpaths. Such devices can be useful in fuel reformation or other similar reactions. The present disclosure describes methods for forming stack assemblies employing diffusion bonding of simple shims as opposed to welding or bonding of finely-detailed shims as has been practiced previously. The simple shims can be designed for self-fixturing, which simplifies the bonding process and reduces costs. The configuration described may further allow for increased total catalyst loading for a reactor of given size. A shim design based on simple geometric scaling can cut the cost of traditional fabrication methods employing numerous high-skilled welds and fine-detailed shims. A reactor can include stacks of reformer and vaporizer shims arranged in a compact, linear configuration. The compact and low-cost nature of the device permits the device to be used for commercial applications or alternatively scaled up for industrial applications. For example, the reactor can be used as a fuel processor for fuel reformation. Heat transfer in the reactor can occur via co-flow or counter-flow configurations.

[0009] Disclosed in embodiments is a heat exchanger (**800, 110, 510, 610, 590**), comprising a first channel, a second channel, and a fin. The first channel (**810, 134, 135, 138, 139, 151**) has a flowpath, a first wall (**805**), a second wall (**832**) opposite the first wall, an inlet manifold (**812, 124, 120, 620, 640**) at a first end, and a outlet manifold (**814, 128, 122, 628, 648**) at a second opposite end. The inlet manifold and the outlet manifold are orthogonal to the flowpath of the first channel. The second channel (**820, 133, 137, 153**) has a flowpath parallel to the horizontal flow path of the first channel, the first channel and the second channel being separated by the first wall. The fin (**845, 341, 361, 556**) extends from the second channel into the first channel, the fin passing through the first wall (**805**) and extending to the second wall (**832**).

[0010] In embodiments, the first channel (**810, 134, 135, 138, 139, 151**) has a plurality of micro-channels (**811**) and the second channel (**820, 133, 137, 153**) has a plurality of micro-channels (**821**). The ratio of a first micro-channel width (**836**) to a first micro-channel height (**834**) is from 2:1 to 20:1.

[0011] The heat exchanger can be formed from a channel shim (830, 344, 364, 540) and a separator shim (840, 342, 362, 550), wherein the channel shim defines the first channel, wherein the separator shim includes the fin. In some embodiments, the ratio of a channel shim height (834) to a separator shim height (844) may be from 0.125 to 8, including from 0.5 to 2.

[0012] The channel shim (830, 344, 364, 540) may comprise at least one micro-channel (346, 348, 365, 547, 548) extending from a first end (541) of the channel shim to a second end (542) of the channel shim. The micro-channel (346, 348, 365) may further comprises a mixing manifold (347). The separator shim (840, 342, 362) may further comprise slots (386, 432, 434) that align with the micro-channel of the channel shim.

[0013] In some embodiments, the micro-channel (365) of the channel shim (364) can be formed from two longitudinal walls (366) joined together by at least one transverse support (367), the micro-channel thus being separated into a series of chambers, wherein the chamber at a first end of the micro-channel is shorter in length than the other chambers. The transverse supports also provide cross-support to the longitudinal walls to aid in maintaining their shape until they are bonded together.

[0014] In other embodiments, the channel shim (364, 540) has only one notch (369, 549) on an end. The channel shim (830, 344) can further comprise alignment tabs (383) on opposite corners. Sometimes, the channel shim (830, 344, 364) further comprises notches (381, 368, 369) on opposite ends.

[0015] The separator shim (840, 342, 362) can further comprise a mixing manifold (345). The separator shim (840, 342, 362) can sometimes further comprise alignment tabs (385) on opposite corners. The separator shim (840, 342, 362) could alternatively further comprise notches (387, 420, 422, 424) on opposite corners. The separator shim (840, 342, 362) may further comprise indents (380, 426) on an end.

[0016] The heat exchanger, in some embodiments, further comprises a combustion gas source (111, 202, 611) at an end of the heat exchanger opposite the inlet manifold (812, 124, 120, 620, 640) of the first channel.

[0017] In some embodiments, the channel shim (540) comprises: an entry end (541) and a return end (542); two outer walls (543) and a central wall (544) that define two

micro-channels (547, 548); and an alignment slot (545) in the central wall. In those embodiments, the separator shim (550) comprises: an entry end (551) and a return end (542); a central slot (557) at the return end; two recesses (553) at the entry end that align with the micro-channels (547, 548) of the channel shim (540); and an alignment slot (555) that aligns with the alignment slot (545) of the channel shim.

[0018] Also disclosed herein is a system (100, 200) for steam reforming, comprising: a reactor (110, 210) including a reformer (132, 136, 232, 236) and a vaporizer (152, 154, 252, 254); a fuel supply (171, 271) for providing fuel to the reactor; and a water supply (199, 299) for providing water to the reactor. The vaporizer (152) operates to generate steam from the water and the reformer (132) operates to generate hydrogen from a reformat mixture including the steam and the fuel.

[0019] The system may further comprise a start-up combustor (102) attached to the reactor (110). The reactor (110, 210) can alternatively include a burner (111, 202) for combusting scrap reformat. In another embodiment, the start-up combustor (102) acts to combust scrap reformat. The combustion gas provided by the start-up combustor (102) or the burner (111, 202) may flow counter-current to the flow of the reformat within the reactor (110). The combustion gas provided by the start-up combustor (102) or the burner (111, 202) may flow counter-current to the flow of the water within the reactor (110).

[0020] The system may further include a fuel cell assembly (181, 281) connected to the reactor (110, 210) for producing electricity. The fuel cell assembly (181) can include a proton exchange membrane fuel cell (PEMFC). In embodiments, the PEMFC is operative to generate from about 6 kW to about 8 kW of electricity. However, the PEMFC can be applied to generate power from about 1 kW to about 1 megawatt of electricity. Alternatively, the fuel cell assembly (281) includes a solid oxide fuel cell (SOFC).

[0021] The reformer (132, 136, 232, 236) or the vaporizer (152, 154, 252, 254) can include a stack assembly formed from a regular alternating pattern of a separator shim and a channel shim.

[0022] Also disclosed herein is a method (S100) for forming a reactor, comprising: alternately stacking reformer channel shims (344) and reformer separator shims (342)

to form a reformer shim stack (340); bonding the reformer shim stack (340) to reformer plates (332, 336) to form a reformer stack assembly (330); alternately stacking vaporizer channel shims (362) and vaporizer separator shims (364) to form a vaporizer shim stack (360); bonding the vaporizer shim stack (360) to vaporizer plates (352, 356) to form a vaporizer stack assembly (350); and arranging the reformer stack assembly (330) and vaporizer stack assembly (350) within a casing (119); wherein the reformer stack assembly includes a reaction channel and a combustion channel, wherein the vaporizer stack assembly includes a vaporizer channel and a combustion channel, and the reformer stack assembly combustion channel communicates with the vaporizer stack assembly combustion channel to direct flow from the reformer stack assembly combustion channel into the vaporizer stack assembly combustion channel.

[0023] The arranging may further include arranging the inlets and outlets of the stack assemblies (340, 360) so that reactants and water flow in a counter-current direction to combustion gas. The method can further comprise placing a second reformer stack assembly in series with the reformer stack assembly (340); or further comprise placing a second vaporizer stack assembly in series with the vaporizer stack assembly (360).

[0024] Any of the shims 342, 344, 362, 364 can be made by a wire electrical discharge machining (EDM), water jet, laser cutting, or stamping production method. The bonding of the reformer shim stack 340 or the vaporizer shim stack 360 can be performed by diffusion bonding or brazing. In some instances, automated welding may also be used. Sometimes, two channel shims (344) are stacked between each separator shim (342).

[0025] Also disclosed in various embodiments herein is a fuel processing device (800, 110, 510, 610), comprising: a combustion gas source (111, 102, 211, 202, 516, 611); a reaction channel (134, 135, 138, 139, 506, 632, 636) having an inlet (124) and an outlet (128); a vaporizer channel (151, 652, 654) having an inlet (120) and an outlet (122); and a combustion channel (133, 153, 502, 504); wherein combustion gas from the combustion gas source flows through the combustion channel. The reaction channel inlet and the vaporizer channel inlet can be arranged so that flow through the reaction channel and the vaporizer channel are counter-current to the combustion gas flow.

[0026] The combustion gas source may be at least one of a burner (111, 211) and start-up combustor (102, 202).

[0027] The device may further include at least one adiabatic reformer (117, 118) connected to the reaction channel outlet.

[0028] The reaction channel may include a catalyst (131), such as rhodium on spinel. The catalyst (131) can be inserted into the reaction channel as a catalyst insert (734). The catalyst insert (734) may comprise a corrugated center piece (730) coated on at least one side with the catalyst. The corrugated center piece (730) can be sandwiched between two flat shims (736), wherein an inner surface (735) of each flat shim is also coated with the catalyst. Alternatively, the surfaces of the channel (134) may be coated with catalyst.

[0029] In some embodiments, the combustion gas source is located at a burner end (505) of the device, and wherein the combustion channel (502, 504) includes (i) a first leg (521) running from the burner end to an opposite end (501) of the device and (ii) a second leg (523) returning from the opposite end to the burner end.

[0030] Sometimes, the reaction channel (506) and the vaporizer channel each include (i) a first leg (525) running from the burner end to an opposite end of the device and (ii) a second leg (527) returning from the opposite end to the burner end.

[0031] In some embodiments, the reaction channel (632, 636) flows counter-current to the first leg of the combustion channel and the vaporizer channel (652, 654) flows counter-current to the second leg of the combustion channel.

[0032] Also described herein is a heat exchanger assembly (800, 330, 350, 590) formed from a plurality of channel shims (344, 364, 540) and a plurality of separator shims (342, 362, 550). The channel shims and separator shims are stacked in a regular alternating pattern to form a shim stack (340, 360, 590). The channel shims and separator shims operate to form a first channel (810), a second channel (820), and a fin (845, 341, 361, 556) extending from the second channel into the first channel.

[0033] The assembly may further comprise a top plate (332, 352) above the shim stack and a bottom plate (336, 356) below the shim stack. The channel shims and the separator shims can be diffusion bonded together.

[0034] In embodiments, the first channel (810) has a plurality of micro-channels (811) and the second channel (820) has a plurality of micro-channels (821). The ratio of a first micro-channel width (836) to a first micro-channel height (834) can be from 2:1 to 20:1. The ratio of a channel shim height (834) to a separator shim height (844) can be from 0.125 to 8.

[0035] In some embodiments, the channel shim (344, 364) comprises a plurality of micro-channels (346, 348, 365) extending from a first end of the channel shim to a second end of the channel shim.

[0036] Each micro-channel (346, 348) can further comprise a mixing manifold (347).

[0037] Sometimes, two channel shims are placed between two separator shims and are used to form a single level between the separator shims.

[0038] The separator shim (342) can include a slot (386) at each end of the separator shim, each slot aligning with an end of a micro-channel of the channel shim. Sometimes, the separator shim (342) includes a mixing manifold (345) that aligns with a micro-channel of the channel shim. In addition, the separator shim (342) can include a thermal slot (343) at the center of the separator shim.

[0039] In some embodiments, each micro-channel (365) of the channel shim (364) is formed from two longitudinal walls (366) joined together by at least one transverse support (367), the micro-channel thus being separated into a series of chambers, wherein the chamber at a first end of the micro-channel is shorter in length than the other chambers. The channel shim (364) may have only one notch (369) on an end.

[0040] In other embodiments, the channel shim (364) includes a plurality of micro-channels (365) spaced such that when one channel shim is stacked upon another channel shim, the micro-channels are aligned with each other.

[0041] Sometimes, two channel shims (364) are placed between two separator shims, and are used to form two levels between the separator shims, the channel shims being rotated 180° with respect to each other. The separator shim (362) can include a slot (432, 434) at each end of the separator shim, each slot aligning with an end of a micro-channel of the channel shim.

[0042] In many different arrangements, the channel shim (344) further comprises alignment tabs (383) on opposite corners; and/or notches (381, 368) on opposite ends.

The separator shim (342, 362) can further comprise alignment tabs (385) on opposite corners; notches (387, 424) on opposite corners; and/or indents (380, 426) on an end.

[0043] In particular embodiments of the assembly (590), the channel shim (540) comprises: an entry end (541) and a return end (542); two outer walls (543) and a central wall (544) that define two micro-channels (547, 548); and an alignment slot (545) in the central wall. In other particular embodiments of the assembly (590), the separator shim (550) comprises: an entry end (551) and a return end (542); a central slot (557) at the return end; two recesses (553) at the entry end that align with the micro-channels (547, 548) of the channel shim (540); and an alignment slot (555) that aligns with the alignment slot (545) of the channel shim. One channel shim (540) may be used to form a single level between separator shims.

[0044] A single shim stack can be from about 1 inch to about 20 inches in height and from about 5 mm to about 15 mm in width. However, the dimensions of the shim stack can be varied in either direction to obtain the desired output.

[0045] These and other non-limiting aspects and/or objects of the disclosure are more particularly described below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0046] The following is a brief description of the drawings, which are presented for the purposes of illustrating the exemplary embodiments disclosed herein and not for the purposes of limiting the same.

[0047] **FIG. 1** is a diagram of a steam / hydrocarbon fuel reformation system that incorporates a proton exchange membrane fuel cell (PEMFC).

[0048] **FIG. 2** is a three-dimensional (3D) model of a first exemplary embodiment of a fuel processor of the present disclosure showing an external perspective view. In this embodiment, the channels in the reformer and vaporizer are arranged linearly.

[0049] **FIG. 3** is a plan view of the exterior of the fuel processor of **FIG. 2** (looking along the Y-axis).

[0050] **FIG. 4** is an X-Y plane cross-sectional view of the fuel processor of **FIG. 2**.

[0051] **FIG. 5** is an X-Z plane cross-sectional view of the fuel processor of **FIG. 2** showing internal components within the casing.

[0052] FIG. 6 is a diagram of a steam / hydrocarbon fuel reformation system that incorporates a solid oxide fuel cell (SOFC).

[0053] FIG. 7 is an external perspective view of a second exemplary embodiment of a fuel processor of the present disclosure. In this embodiment, the channels in the reformer and vaporizer are arranged linearly.

[0054] FIG. 8 is an X-Z plane cross-sectional view of the fuel processor of FIG. 7. Only a single layer of the reformer stack assembly and the vaporizer stack assembly are shown.

[0055] FIG. 9 is a diagram of an exemplary reformer stack assembly illustrated in an assembled view (left side) and an exploded view (right side).

[0056] FIG. 10 is a perspective view of top and bottom plates for the reformer stack assembly of FIG. 9.

[0057] FIG. 11 is a side cross-sectional view and magnified view of the reformer stack assembly of FIG. 9.

[0058] FIG. 12 is a diagram showing a shim stack for a reformer stack assembly, illustrated in an assembled view (left side) and an exploded view (right side) showing the separator shim and the channel shim.

[0059] FIG. 13 is an exploded view showing an exemplary vaporizer stack assembly.

[0060] FIG. 14 is a perspective view of top and bottom vaporizer plates for the vaporizer stack assembly of FIG. 12.

[0061] FIG. 15 is a side cross-sectional view and magnified view of the vaporizer stack assembly of FIG. 13.

[0062] FIG. 16 is a diagram showing an alternating shim stack for a vaporizer stack assembly, illustrated in an assembled view (left side) and an exploded view (right side) showing the separator shim and the channel shims.

[0063] FIG. 17 is a flow diagram for methods for forming a fuel processor.

[0064] FIG. 18 is a conceptual diagram of a third exemplary embodiment of a fuel processor of the present disclosure. In this embodiment, the channels in the reformer and vaporizer are arranged to provide a U-shaped flow.

[0065] FIG. 19 is a diagram of an alternating reformer shim stack used in the embodiment of FIG. 18, illustrated in an assembled view (right side) and an exploded view (left side) showing the separator shim and the channel shim.

[0066] FIG. 20 is a model of a fourth exemplary embodiment of a fuel processor of the present disclosure, wherein the reformer and vaporizer sections are placed side-by-side.

[0067] FIG. 21 is a cross-sectional view of an exemplary embodiment of a catalyst insert which can be inserted into a channel of the reformer or the vaporizer.

[0068] FIG. 22 is a conceptual diagram of a heat exchange assembly of the present disclosure.

[0069] FIG. 23 is a cross-sectional view of the heat exchange assembly taken along line A-A of FIG. 22.

DETAILED DESCRIPTION

[0070] A more complete understanding of the processes and apparatuses disclosed herein can be obtained by reference to the accompanying drawings. These figures are merely schematic representations based on convenience and the ease of demonstrating the existing art and/or the present development, and are, therefore, not intended to indicate relative size and dimensions of the assemblies or components thereof.

[0071] Although specific terms are used in the following description for the sake of clarity, these terms are intended to refer only to the particular structure of the embodiments selected for illustration in the drawings, and are not intended to define or limit the scope of the disclosure. In the drawings and the following description below, it is to be understood that like numeric designations refer to components of like function.

[0072] The modifier "about" used in connection with a quantity is inclusive of the stated value and has the meaning dictated by the context (for example, it includes at least the degree of error associated with the measurement of the particular quantity). When used with a specific value, it should also be considered as disclosing that value. For example, the term "about 2" also discloses the value "2" and the range "from about 2 to about 4" also discloses the range "from 2 to 4."

[0073] It should be noted that many of the terms used herein are relative terms. For example, the terms “interior” and “exterior”, or “central” and “end”, are relative to a center, and should not be construed as requiring a particular orientation or location of the structure. Similarly, the terms “upper” and “lower”, “top” and “bottom”, or “above” and “below” are relative to each other in orientation, i.e. an upper component is located at a higher elevation than a lower component in a given orientation, though the orientation can be changed (e.g. by flipping the components 180 degrees). The terms “inlet” and “outlet” are relative to a fluid flowing through them with respect to a given structure, e.g. a fluid flows through the inlet into the structure and flows through the outlet out of the structure. The terms “upstream” and “downstream” are relative to the direction in which a fluid flows through various components, i.e. the flow fluids through an upstream component prior to flowing through the downstream component.

[0074] The terms “horizontal” and “vertical” are also used to indicate direction relative to each other, and are not measured against an absolute reference. The term “horizontal” refers to a plane defined by a longitudinal axis and a transverse axis, and the term “vertical” refers to a lateral axis extending out of the “horizontal” plane. However, these terms should not be construed to require structures to be absolutely parallel or absolutely perpendicular to each other. For example, a first vertical structure and a second vertical structure are not necessarily parallel to each other. The term “orthogonal” is used to refer to two axes that are perpendicular to each other.

[0075] The present disclosure relates broadly to a heat exchanger. The heat exchanger can be used in a reactor which can be applied to fuel reforming applications, or to any set of reactions where one reaction is highly exothermic and another reaction is highly endothermic, or where one reaction is either significantly endothermic or exothermic and heat needs to be transferred to/from the reaction. The heat exchanger is also particularly useful when the primary reaction is carried out at a pressure significantly higher than the secondary reaction. The heat exchange can be operated using co-current flow (co-flow) or counter-current flow (counter-flow).

[0076] The heat exchanger design is broadly illustrated in the plan view of **FIG. 22** and the cross-sectional view of **FIG. 23** (taken along line A-A of **FIG. 22**). The heat exchanger **800** includes two channels, a first channel **810** and a second channel **820**.

Each channel has a height, length, and width. The first channel **810** and second channel **820** are separated by a first wall **805**. The two channels are defined by two shims having different shapes, a channel shim **830** and a separator shim **840**. The channel shim provides a second wall **832** opposite the first wall. The separator shim provides a fin **845** that extends from the second channel into the first channel, and passes through the first wall **805** and extends to the second wall **832**, and acts as a heat transfer surface. The heat transfer surface is present in both the first channel and the second channel.

[0077] The channel shim **830** and the separator shim **840** cooperate to form the first wall **805** that separates the first channel **810** from the second channel **820**. The first channel includes a horizontal flowpath, as does the second channel. In addition, an inlet manifold **812** is present at one end of the first channel, and an outlet manifold **814** is present at a second opposite end of the first channel. These manifolds extend orthogonally to the horizontal flowpath (i.e. vertically), and permit access to the first channel.

[0078] As seen in the cross-sectional view of **FIG. 23**, each channel **810**, **820** includes a plurality of micro-channels **811**, **821**. The separator shim **840** may be considered as providing a fin **845**, and the interleaving fins **845** and passages **811**, **821** allow for high heat transfer from one channel to the other channel. The micro-channels may be thought of as vertical layers that are combined to form the channel.

[0079] Generally, the channel shim defines the height of the micro-channels in the two channels. The channel shim has a height **834**. The channel shim also has a width **836**, which is measured between the two walls. The separator shim (i.e. fin) has a height **844**. The ratio of the channel shim width **836** to the channel shim height **834** may be from 2:1 to 20:1. The ratio of the channel shim height **834** to the fin height **844** may be from 0.125 to 8 (i.e. 0.125:1 to 8:1), or from 0.25 to 4 (i.e. 0.25:1 to 4:1), or in more specific embodiments from 0.5 to 2. In this regard, thick fins (i.e. a ratio of 1 or lower) may be needed to enable effective heat transfer for high temperature reactions, because materials that can withstand high temperatures typically have low thermal conductivity values.

[0080] The interleaved fins **845** and passages **811**, **821** allow a compact design that can operate at high pressure because the fins provide support for the walls **805**, **832** of the channels. This is different than the usual construction for a heat exchanger, where fins are only attached to a wall at one end (i.e. extend from a wall, with the other end hanging freely). Here, extending the fins **845** across the entire channel (i.e. from first wall **805** to second wall **832**) provides a strength benefit as well as a heat exchange benefit. Additionally, adjusting the channel shim height **834** and the thickness of the walls **805**, **832** enables a differential pressure between 1 and 50,000 PSI to be accommodated between the primary and secondary reaction occurring within the heat exchanger **800**.

[0081] The present disclosure also relates to heat exchangers that can be used as a fuel processor that accepts as inputs a hydrocarbon fuel and steam, and produces as outputs carbon monoxide and hydrogen gas. Generally, the fuel processor comprises a housing or casing in which a reformer assembly and a vaporizer assembly are located. Hot combustion gases flow from one end of the casing to the other end. The vaporizer assembly converts water to steam. The steam is combined with the hydrocarbon fuel and then travels through the reformer assembly to be converted into carbon monoxide and hydrogen gas. The water in the vaporizer assembly, and the fuel/steam mixture in the reformer assembly can flow counter-current (180 degrees in the opposite direction) to the flow of the hot combustion gas. The reformer assembly and the vaporizer assembly each act as heat exchangers to facilitate the reactions needed for fuel processing. Alternatively, the water and the fuel/steam mixture can flow co-current to the hot combustion gas.

[0082] The reformer assembly and the vaporizer assembly are formed by alternating two different shim structures (i.e. a channel shim and a separator shim) to form each assembly, and then joining the shims together. Previous shims have included fine-detailed geometry that limit fabrication options. Shim geometry is further complicated by in-channel catalyst stand-offs, and chemical etching processes are the only way to make some features of current shims. Many pieces must be assembled individually into the combustion duct of current fuel processors, and these pieces often occupy too large of a volume in order to achieve hot gas uniformity and between-panel spacing, making

the reactor too large. Additionally, prior shims have long lengths of metal; when exposed to heat, such shims are heated to different temperatures along their length, which show a potential for thermal expansion stress of the shim and subsequent failure of the reactor. The present disclosure reduces such problems.

[0083] **FIG. 1** is a diagram of a steam / hydrocarbon fuel reformation system that incorporates a proton exchange membrane fuel cell (PEMFC). The system **100** includes a fuel processor assembly **101**, a fuel supply **171**, a fuel cell assembly **181**, an air supply **191**, and a water supply **199**. The fuel processor assembly **101** includes a reactor **110** that operates as a fuel processor herein. This figure includes flow of four different fluids: air (marked A); water / steam (marked B); fuel or reformat (marked C); and combustion gas (marked D).


[0084] The system **100** begins with the fuel processor assembly **101** receiving fuel from fuel supply **171** and receiving air from air supply **191**, which are fed directly to the start-up combustor **102**. The fuel supply **171** can be JP8 low sulfur content fuel (approximately 125 ppm sulfur), more preferably sulfur-free JP8, or generally any other combustible hydrocarbon. Initially, the fuel processor assembly is at roughly room temperature. However, the steam / hydrocarbon reformation reaction requires a temperature of about 300°C when using fuels such as methanol and between 300°C and 850°C when using fuels such as natural gas before the overall system becomes self-sustaining. Thus, the start-up combustor burns fuel to heat up the fuel processor **110** for the subsequent steam-hydrocarbon fuel reformation reaction.

[0085] The start-up combustor **102** is also used to initially provide hot combustion gas through the fuel processor **110**. As the overall reformation reaction continues, air from the air supply **191** and scrap reformat from main separator **107** are supplied to a burner **111** in fuel processor **110**. Scrap reformat gas includes mostly carbon monoxide gas, methane (CH₄) gas, and residual hydrogen gas. The burner **111** ignites the scrap reformat to provide hot combustion gas within the fuel processor **110**. Once the combustion reaction within burner **111** is self-sustainable, the start-up combustor **102** is no longer needed.

[0086] Continuing at the bottom left of **FIG. 1**, hot combustion gas traveling through the fuel processor **110** heats up the vaporizer sections **152**, **154**. These vaporizer


sections receive water from water supply **199**, which is heated to become hot steam. This hot steam can optionally be sent to steam superheater **103** for additional heating before traveling to a fuel-steam mixer **104**. Alternatively, the steam from vaporizers **152**, **154** can travel directly to the fuel-steam mixer **104** without being superheated. Steam may also be sent to the hydrodesulfurization (HDS) reactor **105** to pre-heat the HDS reactor **105** for HDS reactions to occur and to assist with the separation of hydrogen from reformat. Please note that although only one arrow is drawn from vaporizer section **152** to steam superheater **103**, the steam from vaporizer section **154** can also be sent to steam superheater **103**. Similarly, the steam from vaporizer section **152** can also be sent to HDS reactor **105**. It should be noted that the HDS reactor **105** is optional, and is not needed if the presence of sulfur is acceptable.

[0087] At the fuel-steam mixer **104**, steam is mixed with fuel from the fuel supply **171** to form reformat. The reformat is sent to reformer sections **132**, **136** where the steam and fuel react with each other under high temperature, in the presence of catalyst, to produce hydrogen gas (H₂) and carbon monoxide (CO) according to the classical steam reformation reaction in **EQN. 1**:



[0088] The output of the reformer sections **132**, **136** may include the products of the reformation reaction (H₂(g) and CO(g)), as well as residual methane (CH₄(g)), carbon dioxide (CO₂(g)), and steam (H₂O(g)). The output of reformer sections **132**, **136** optionally can be sent through the steam superheater **103** to participate in a heat exchange reaction with the steam that will be used to make new reformat. The output may then optionally go to a hydrodesulfurization (HDS) reactor **105**. At the HDS reactor **105**, a portion of the gaseous reformer output may be combined with raw fuel which contains sulfur. With the appropriate catalyst and processing conditions, the raw fuel is desulfurized for use later. Alternatively, a portion of the hydrogen may be extracted from the reformat to assist with the desulfurization reaction. For the PEM system of **FIG. 1**, the reformer output also passes through at least one of a water-gas shift (WGS) reactor **106** or main separator **107**. The separator in **FIG. 1** separates hydrogen from



the reformat which is directed to the fuel cell assembly **181**. The remaining components and any hydrogen not removed from the reformat by the separator are directed to the burner to provide the heat needed for the steam reforming reaction. The purpose of the shift reactor **106** is to increase the hydrogen content of the reformat via a well known shift reaction:



[0089] At the main separator **107**, hydrogen gas (H_2) is separated from the reformer output and routed to the fuel cell **181**. The main separator **107** routes the other components, including CO not converted by the WGS reactor, methane (CH_4) gas, and residual hydrogen gas not used by the fuel cell assembly **181**, back to the burner **111** as scrap reformat fuel for another steam / fuel reformation reaction cycle.

[0090] In **FIG. 1**, the fuel cell assembly **181** includes a proton exchange membrane fuel cell (PEMFC) which allows the system **100** to produce approximately a 6 kW to 8 kW net output of electricity. The amount of electricity produced by the system **100** may be increased with more PEMFCs which can be fed with hydrogen gas input produced by the fuel processor assembly **101**. As needed, additional reformer sections can be added to the fuel processor **110**. Alternatively, the reformer sections **132**, **136** can be increased in dimension to produce additional hydrogen gas.

[0091] The chemical reaction occurring at the fuel cell assembly **181** when including a PEMFC is represented by **EQN. 2**:



(EQN. 2)

[0092] Hydrogen gas provided from the main separator **107** enters a gas diffusion anode of the PEMFC assembly **181** where it is electrolyzed into protons and electrons in the presence of metal catalyst, e.g., platinum. Protons produced at the anode travel across a proton exchange membrane to a gas diffusion cathode, thereby “exchanging”

protons from the anode to the cathode. Air from air supply **191** is provided to the cathode of the PEMFC assembly **181**, which combines with protons to form water and heat. Electrons produced at the anode travel to the cathode through an electron bridge, the flow of electrons creating an electrical current. In one embodiment, fuel processor **110** is used to produce approximately 6 kW of net output electricity within system **100** when fuel cell assembly **181** includes a PEMFC.

[0093] **FIGs. 2-5** are different views of a first exemplary embodiment of a fuel processor. **FIG. 2** is an external perspective view. **FIG. 3** is an external plan view of the top of the fuel processor. **FIG. 4** is a side cross-sectional view. **FIG. 5** is a perspective cross-sectional view.

[0094] Referring now to **FIG. 1** and **FIG. 2** together, the fuel processor **110** includes the burner **111** and optionally two adiabatic reformers **117**, **118** which are disposed upon the top of the casing **119**. The burner **111** may include one or more gas inlets **112** for receiving the scrap reformat fuel from the main separator **107**. The burner **111** may further include one or more igniters **113**, thermocouple tubes **114**, and air inlets **115** (which supply air from air supply **191**). The start-up combustor **102** is shown as being integrally attached to the bottom of the casing, though this location can be changed as desired. The burner is located at one end of the casing. Combustion gas provided by either the startup combustor **102** or combustion of scrap reformat fuel input by the burner **111** flows through the casing **119** and exits at an exhaust port **129** located at the end of the casing opposite the burner. The casing **119** may be made from any suitable casing material, including any suitable metal known to one having ordinary skill in the art.

[0095] Referring to **FIG. 3**, vaporizer inlets **120** are shown here as being located at the end of the casing **119** adjacent the exhaust port **129**. Vaporizer outlets **122** are located closer to the center of the casing **119**. Reformer inlets **124** are also located near the center of the casing. As shown here, there are a total of four reformer inlets, with two of them being considered inner reformer inlets **125**. Reformer outlets **128** are located at the end of the casing **119** adjacent the burner **111**. As shown here, there are a total of four reformer outlets, with two of them being considered inner reformer outlets

127. Sample outlets **126** are also provided between the reformer inlets **125** and the reformer outlets **128**. The two adiabatic reformers **117**, **118** are also visible.

[0096] Referring now to **FIG. 1** and **FIG. 3** together, water from the water supply **199** enters the vaporizer **152/154** at vaporizer inlets **120**. The water is heated by hot combustion gases within fuel processor **110**, and exits the vaporizer outlets **122** as steam. This steam can be sent to steam superheater **103**, fuel-steam mixer **104**, or HDS reactor **105** as previously described. The reformat produced at the fuel-steam mixer **104** enters the reformer **132**, **136** through reformer inlets **124**. The reformat will travel through one of the reformer sections from an inlet **124** to the reformer outlet **128** while being heated by surrounding combustion gases within fuel processor **110**. A majority of the reformat is converted to products H_2 (g) and CO (g) according to **EQN. 1** by the time the reformat reaches reformer outlets **128**. Experimental samples may be taken through sample outlets **126** to access the progress of the reformation reaction. The output from reformer outlet **128** may then be directed to an adiabatic reformer **117**, **118** which provides additional reaction time at high temperature to continue the reforming reaction. The use of adiabatic reactor(s) as shown is considered as an optional cost reduction measure applicable to some configurations. The reformat and/or reformation products subsequently travels back to another reformer inlet (here, inner reformer inlet **125**) and then travels again through the interior of the casing **119** for another reformation reaction cycle. In the second cycle, the reformat exits from inner reformat outlets **127**. The reformation products then travel to either the optional steam superheater **103** or the HDS reactor **105**.

[0097] Referring now to **FIG. 4**, the fuel processor **110** includes the burner **111** at one end and the exhaust port **129** at the opposite end of the casing. Located adjacent the burner is the reformer stack assembly **130**. As explained further herein, the reformer stack assembly is comprised of stacked metal shims which are bonded together by, for example, diffusion bonding. The reformer outlets **128**, sample outlets **126**, and reformer inlets **124** travel down the vertical height (y-axis) of the reformer stack assembly **130**. The fuel processor **110** also includes a vaporizer stack assembly **150** which, similar to the reformer stack assembly **130**, is comprised of stacked metal

shims which are diffusion bonded together. Vaporizer outlets **122** and vaporizer inlets **120** travel down the vertical height (y-axis) of the vaporizer stack assembly **150**.

[0098] The perspective view of **FIG. 5** through fuel processor **110** shows the reactor sections **132**, **136** and vaporizer sections **152**, **154** within reformer stack assembly **130** and vaporizer stack assembly **150**, respectively (see **FIG. 1**).

[0099] Referring now to **FIG. 1**, **FIG. 3**, and **FIG. 5** together, counter-current flow (i.e. counter-flow) of the reactant gases and combustion gases within fuel processor **110** can be visualized. The reformer stack assembly **130** of **FIG. 5** includes the reformer sections **132**, **136** of **FIG. 1**. Reformer section **132** (**FIG. 1**) includes a reformer combustion channel **133** surrounded on two sides by an outer reaction channel **134** and an inner reaction channel **135** (**FIG. 5**) along the width of the processor. Similarly, reformer section **136** includes a reformer combustion channel **137** surrounded on two sides horizontal passageway by an outer reaction channel **138** and an inner reaction channel **139**.

[0100] Referring to **FIG. 5**, the reaction channels **134**, **135**, **138**, **139** are accessed by orthogonal passageways at either end of the channels. Put another way, fluid flows through each reaction channel through the vertical passageways and a horizontal flowpath between the two vertical passageways, in a U-shape. Fluid will flow through each combustion channel **133**, **137** in a straight line from one end to the other, i.e. through only a horizontal passageway. Again, these orientations are relative, not absolute. The reaction channel and the combustion channel can also be described as having parallel flowpaths, with the reaction channel also including orthogonal passageways for accessing the flowpath.

[0101] In use, reformat will enter the outer reaction channel **134** of reformer section **132** at reformer inlet **124** and, in a first cycle, travel to reformer outlet **128**. As seen in **FIG. 3**, the reformat from outlet **128** will then travel through adiabatic reformer **117** and then enter reformer section **136** through inner reformer inlet **125**. In a second cycle, the reformat then travels through inner reaction channel **139** towards inner reformer outlet **127**. Concurrently, hot combustion gas originates from either start-up combustor **102** or burner **111** and travels through reformer combustion channels **133**, **137** towards exhaust port **129**. The combustion gas travels in the direction from burner **111** to

exhaust port **129**. The reactant gases travel in the direction from exhaust port **129** towards burner **111**, i.e. 180 degrees different from the combustion gas. The two flow paths are parallel to each other, but in opposite directions, i.e. counter-current flow. Of course, the fuel processor could be operated in co-current flow by reversing the locations of the burner **111** and the exhaust port **129**, and maintaining the direction of flow in the reaction channels.

[0102] FIG. 5 reveals additional details of the burner **111**. Burners **116** are located adjacent reformer sections **132**, **136**. Burners **116** combust scrap reformat coming from gas inlets **112**, and the hot combustion gas flows through the combustion reactor channels **133**, **137** and through fuel processor **110** towards exhaust port **129**. Other burners known to one having ordinary skill in the art may be used in this position if they provide appropriate flame geometry.

[0103] The concept of counter-current flow also applies to the vaporizer. The vaporizer stack assembly **150** of FIG. 5 includes the vaporizer sections **152**, **154** of FIG. 1. The vaporizer stack assembly includes an alternating series of vaporizer water channels **151** and vaporizer combustion channels **153** across its width. The channels **151**, **153** of the vaporizer stack assembly are along the same axis as the channels **133**, **134**, **135**, **137**, **138**, **139** of the reformer stack assembly, or put another way the channels are parallel. Water enters the vaporizer water channel **151** through vaporizer inlet **120** and travels to vaporizer outlet **122**. Combustion gas traveling through vaporizer combustion channels **153** will transform the water to water/steam mixture or steam.

[0104] Reaction channels **134**, **135**, **138**, **139** differ from vaporizer water channels **151** in the presence of catalyst **131**. The catalyst **131** catalyzes the highly endothermic reformation reaction in EQN. 1. The catalyst **131** is preferably a highly active precious metal catalyst known to one having ordinary skill in the art. For example, the catalyst may be a spinel catalyst. The catalyst **131** may be coated on a corrugated material which is inserted into reaction channels **134**, **135**, **138**, **139**. The catalyst **131** can also be coated on a flat rectangular material that is inserted into the reaction channels **134**, **135**, **138**, **139** on either side of the catalyst-coated corrugated material to provide a flow passage completely surrounded by catalyst. Alternatively, the catalyst **131** is directly

coated onto walls of reaction channels **134**, **135**, **138**, **138** to provide equivalent configuration in combination with the catalyst-coated corrugated material. Catalyst-coated corrugated materials may be preferable due to open flow passages yielding low pressure drop and good catalyst contacts. Alternate catalyst support materials such as metal foam or a metal screen may be beneficial. The metal screen may be corrugated, or the metal foam may be a simple insert.

[0105] The reaction channels **134**, **135**, **138**, **139** also differ from vaporizer water channels **151** in the presence of a mixing manifold **140** within each channel **134**, **135**, **138**, **139** (shown here at the center of the channel). The mixing manifold **140** provides some mixing between the various micro-channels / levels / layers within each channel. The mixing manifold also provides an entry point for samples to be extracted through sample outlets **126** (see **FIG. 3**) to assess reformation reaction progress if desired. Additionally, the catalyst **131** may be placed into the mixing manifold along a retainer. Some vertical mixing may also occur. However, it should be noted that the presence of the mixing manifold **140** is not necessary.

[0106] **FIG. 6** is a diagram of a steam / hydrocarbon fuel reformation system that incorporates a solid oxide fuel cell (SOFC). The fuel processor assembly **201** includes a reactor **210** that operates as a fuel processor herein. This figure includes flow of five different fluids: air (marked A); water / steam (marked B); fuel or reformat (marked C); combustion gas (marked D); and hydrogen (marked E).

[0107] The system **200** includes a fuel processor assembly **201**, a fuel supply **271**, a fuel cell assembly **281**, an air supply **291**, and a water supply **299**. The system **200** begins with the clean fuel burner **202** receiving fuel, which may be from a separate burner, or the fuel supply **271** (not shown). Hot combustion gas travels from clean fuel burner **202** to fuel processor **210**, where the combustion gas flows through the fuel processor **210**. Water from water supply **299** enters vaporizer sections **252**, **254** and is heated to steam by the hot combustion gas flowing counter-current to the water flow. The steam optionally travels to a steam superheater **203** for further heating before traveling to a fuel-steam mixer **204**.


[0108] At fuel-steam mixer **204**, the steam is mixed with fuel supplied by fuel supply **271**. The steam / fuel mixture enters reformer sections **232**, **236**. The steam/fuel

mixture reacts under high temperature in the presence of a catalyst (not shown) to produce hydrogen gas (H₂) and carbon monoxide (CO) according to the classical steam reformation reaction in **EQN. 1**.

[0109] The output of the reformer sections **232**, **236** includes the products of the reformation reaction (H₂(g) and CO(g)), as well as residual methane (CH₄(g)), carbon dioxide (CO₂(g)), and steam (H₂O(g)). The output of reformer sections **232**, **236** optionally travels to the reformater recuperator **209** and then to the HDS assembly **205** where the reformater is cooled and some hydrogen is extracted while at pressure. The reformater then flows back to the reformater recuperator **209** and is reheated. The reheated, now low pressure reformater can then pass through the adiabatic reformer **208** to react more of the methane into hydrogen and CO (greater methane reforming is possible at lower pressure) before entering the fuel cell assembly **281**.

[0110] The fuel cell assembly **281** includes a solid oxide fuel cell (SOFC) which allows system **200** to produce approximately 2 kW to 4 kW net output of electricity, though the system can be scaled to produce between 1 kW and several megawatts of electricity. The amount of electricity produced by system **200** may be increased with more SOFCs which can be fed with a hydrogen gas or reformater input. Again, more hydrogen can be produced by adding more reformer sections or by increasing the dimensions of the existing reformer sections.

[0111] The chemical reaction occurring at the fuel cell assembly **281** when including a SOFC is represented by **EQN. 3**:

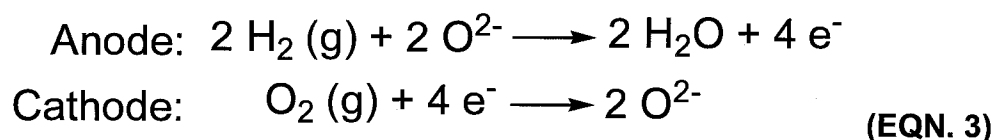

[0112] Air from air supply **291** is provided to a cathode of the SOFC assembly **281**, where it breaks up to produce oxygen ions. The oxygen ions pass through a solid ceramic electrolyte to get to an anode. Hydrogen gas or reformater provided from the adiabatic reformer **208** then enters the anode of the SOFC assembly **281** and breaks apart into ions. Hydrogen ions at the anode combine with oxygen ions traveling from the

cathode to produce water. The water and any excess fuel leave the anode and are sent to the clean fuel burner **202** for combustion (in the presence of air from air supply **291**), restarting the fuel cycle. Splitting apart the hydrogen atoms at the anode produces electrons and electrical current. The electrons are routed back to the cathode through a bridge and are consumed when oxygen is split into ions at the cathode. In embodiments, fuel processor **210** can produce 2 kW of net output electricity within system **200** when fuel cell assembly **218** includes a SOFC.

[0113] **FIG. 7** and **FIG. 8** are different views of a second exemplary embodiment of a fuel processor. **FIG. 7** is an external perspective view. **FIG. 8** is an internal view through the X-Z plane.

[0114] Referring to **FIG. 7**, the fuel processor **210** can be attached to a fuel burner **202** that provides hot combustion gas, without a separate burner or start-up combustor (see reference numerals **111**, **102** in **FIG. 2**). Fuel processor **210** includes a casing **219** upon which are disposed reformer outlets **228**, sample outlets **226**, reformer inlets **224**, vaporizer outlets **222**, and vaporizer inlets **220**. The casing **219** further includes an exhaust port **229** opposite the fuel burner **202**. As seen by the number of inlets and outlets, this casing would hold two reformer sections and three vaporizer sections.

[0115] Referring to **FIG. 8**, the interior of fuel processor **210** is visible and shows locations for a reformer stack assembly **230** and a vaporizer stack assembly **250**. These sections are smaller in this embodiment compared to that seen in **FIG. 5**. Tabs **255** are present for use when placing the reformer stack assembly **230** into the casing **219**, to fix the assembly in place. The casing **219** here is shown as being made in two pieces, and a bolt/washer/nut assembly **257** is used to secure the two pieces together. In other embodiments, the casing **219** is made from four pieces. Other securing arrangements can also be used.

[0116] **FIG. 9** shows a heat exchanger / reformer stack assembly **330** illustrated in an assembled view (left side) and an exploded view (right side). The reformer stack assembly **330** provides the reformat reaction channels and reformat combustion channels. The reformer stack assembly **330** may be fabricated by diffusion bonding an alternating stack of shims **340** of appropriate design. Each shim **342**, **344** may be manufactured by wire electrical discharge machining (EDM) in stacks of 10 to 200 at

one time. Other shim manufacturing methods include water jet, laser cutting, or stamping/punching production methods.

[0117] The reformer stack assembly **330** may be assembled with the aid of alignment pins **335** used to align plates **332**, **336** and shims **342**, **344**. The pins **335** can be removed after assembly. Care should be taken to minimize shifting of the alternating shim stack **340** during the bonding process.

[0118] As seen on the right side, the reformer stack assembly **330** is assembled by first inserting the bottom plate **336** upon the alignment pins **335**. Two types of shims are used, a channel shim **344** and a separator/fin shim **342**. These shims are used to form levels, with the shim in each level being alternated. As illustrated here, one channel shim **344** is placed above bottom plate **336** to form one level. Next, one separator shim **342** is placed above the channel shims to form the next level. The shims are alternated to form the shim stack **340**. The top plate **332** is finally placed. The alternating stack **340** can be formed by an appropriate numbers of separator shim/fins **342**, e.g. 25-54 separator shim/fins **342**, and 52-110 channel shims **344** stacked between each other. The alignment pins **335** are shown here as being removed from the stack **340**. This alternating pattern of shims creates the reaction channels and combustion channels seen in **FIG. 5** in the reformer stack assembly, with each channel being formed of vertical layers / micro-channels through which fluid can pass. This structure can also be seen in **FIG. 23**.

[0119] **FIG. 10** is a perspective view of the top plate **332** and the bottom plate **336**. Plates **332**, **336** may be manufactured from 0.125 mm thick rolled annealed (RA) Inconel 625 high performance alloy or other oxidation resistant material as appropriate for the temperature of the reaction being supported. For example, if the reforming reaction is being performed on methanol, the reaction temperature of approximately 300°C may allow the use of common stainless steel such as 316. Other reactions may require other materials such as 309 or 310 stainless steel or other various materials as are well known to one having ordinary skill in the art.

[0120] The top plate **332** and the bottom plate **336** are similar in many respects to each other and to the separator shim **342**. The central portion of each plate, where the channels will be located, includes a surface. Each plate includes two alignment tabs

333 on opposite sides which can be visually inspected during bonding to ensure that all shims **342**, **344** in alternating shim stack **340** are aligned properly. Each plate includes four notches **331** on opposite ends through which the alignment pins **335** are inserted. Each plate also includes two indents **370** (here having a triangular shape) on opposite ends as a visual indication of where the combustion channel will be located. Several slits **372** are made in the plate along the linear axis corresponding to the combustion channel. These slits allow for differential thermal expansion between the hotter fin material and the cooler reactor channel. The slits also limit longitudinal conduction in the fin and improve heat transfer performance.

[0121] T-slot **374** is designed to interact with the tab **255** of the casing. After the stack of shims are bonded together, the ends of the stack are machined away to reveal an open manifold on either end. With the manifold open, catalyst supports can be inserted in the reaction micro-channels. The manifold can then be closed up by sliding in the tab **255** and sealed by welding it closed.

[0122] The top plate **332** also includes features that are not present on the bottom plate **336**. More particularly, the top plate includes holes **337**, **338**, and **339** that allow access to the channels in the reformer section. Holes **337**, **338**, and **339** correspond to reformer outlets **128**, sample outlets **126**, and reformer inlets **124** of **FIG. 4**, respectively.

[0123] Referring now to **FIG. 11**, the reformer stack assembly **330** in one specific embodiment may be approximately 15.222 mm in width and between 2.54 and 5.15 mm in height. Due to the design of the reformer stack assembly **330**, the micro-channels may be made wider than in prior art devices for similar temperature and pressure operating conditions while maintaining lower material stresses.

[0124] **FIG. 12** shows a partially exploded view of the shim stack **340** of **FIG. 9**. To properly interface with the top plate **332** and bottom plate **336**, the bottom layer and the top layer of the shim stack **340** must be channel shims **344**. As illustrated here, two channel shims **344** are used between each separator shim/fin **342**. This allows the combustion gases to flow through the micro-channels formed by the channel shims.

[0125] Each channel shim **344** defines a first reaction micro-channel **346** and a second reaction micro-channel **348** with characteristic dimensions on the order of 0.5 to

2 mm in height and a width of 5 mm to 25 mm. A mixing manifold **347** is indicated in each micro-channel (as a square), and forms an orthogonal passageway/channel through which a sample volume can be obtained from the reaction channel (i.e. this is the channel to which sample outlet **126** of **FIG. 1** connects). The channel shim also includes alignment tabs **383** on opposite corners, and notches **381** on opposite ends of the shim through which the alignment pins **335** are inserted.

[0126] Separator shim **342** serves to laterally conduct heat from a combustion gas pathway into reaction micro-channels **346**, **348** through fin **341** which extends into and across the reaction channels when shims **342**, **344** are stacked into the final alternating shim assembly **340**. The separator shim is very similar in structure to the top plate **332** of **FIG. 10**. The separator shim includes a fin that provides a heat transfer surface. Two alignment tabs **385** are present along opposite sides of the separator shim which can be visually inspected during bonding to ensure that all shims are aligned properly. The separator shim includes four notches **387** in the corners through which the alignment pins **335** may be inserted. The separator shim also includes indent **380** (again shown as a triangular shape) on opposite ends as a visual indication of where the combustion channel will be located. Several slits **384** are made in the separator shim along the linear axis corresponding to the combustion channel. These slits allow for differential thermal expansion between the hotter fin material and the cooler reactor channel temperature. The slits also limit longitudinal conduction in the fin and improve heat transfer performance.

[0127] The separator shim **342** includes eight slots **386**, four each on opposite ends along the linear axis. These slots align with the micro-channels **346**, **348** of the channel shim **344**. Referring to **FIG. 4**, these slots correspond to the locations for the reformer outlets **128** and the reformer inlets **124**, and subsequently form vertical passageways at both ends of the reaction channel. A mixing manifold slot **345** is also included along the center of the shim, which is slightly more elongated along the linear axis than the mixing manifold **347** of channel shim **344**. This extra length permits sample mixing as reformat passes between stacked shims **342**, **344**. A thermal slot **343** is also present along the center of the shim, extending slightly in the transverse axis. This thermal slot **343** permits mixing of combustion gases as they flow through the micro-channels **334**

within reformer stack assembly **330**. The thermal slot **343** may also be used to reduce heat transfer to the mixing manifold **347** where carbon formation may occur. The combination of reaction micro-channels forms the reaction channel, and the combination of combustion micro-channels forms the combustion channel. The slots **386** and indent **380** could be described as forming a transverse line at each end of the separator shim. The mixing manifolds **345** and thermal slot **343** could be described as forming a transverse line at a central portion of the separator shim.

[0128] FIG. 13 shows an exploded view of a heat exchanger / vaporizer stack assembly **350**. The vaporizer stack assembly **350** may be made in a similar manner as the reformer stack assembly **330** described in FIGs. 9-12. Top plate **352** is placed upon alternating shim stack **360**, where the alternating shim stack includes 58 separator shims **362** and 118 channel shims **364** (as depicted here). Alignment pins **355** are used to guide the stacking of shims **362**, **364** between plates **352**, **356**. As will be discussed further herein, here, two levels are made of channel shims **364**, then one layer is made of separator shim **362**, and the levels alternate in this manner.

[0129] FIG. 14 is a perspective view of the vaporizer top plate **352** and bottom plate **356**. Plates **352**, **356** may be manufactured from 11 gauge (0.120 mm) thick, 316/316L cold rolled & annealed stainless steel sheet. Scratches, deposits, and oxidation on the surface of plates **352**, **356** should be avoided.

[0130] The top plate **352** and the bottom plate **356** are similar in many respects. Each plate includes two alignment notches **400**, **402** which can be visually inspected during bonding to ensure that all shims **362**, **364** in alternating shim stack **360** are aligned properly. The alignment notches **400**, **402** are offset from each other, or in other words are on opposite ends and opposite sides of the shim. Each plate also includes four notches **404** on opposite ends through which the alignment pins **355** are inserted. Each plate also includes indents **406** (here having a rectangular shape) on one end as a visual indication of where the combustion channel will be located.

[0131] Several slits **408** are made in the plate along the linear axis corresponding to the combustion channel. The slits **408** may allow for differential thermal expansion between the hotter fin and the cooler reactor channel. The slits **408** also limit longitudinal conduction in the fin and improve heat transfer performance. In addition,

alignment recesses **410** are present in the corners of the plates, which can interact with tabs on the interior of the casing to fix the stacks in place. The ends of the stack assembly will then be machined away to expose the micro-channels.

[0132] The top plate **332** also includes features that are not present on the bottom plate **336**. More particularly, the top plate includes holes **412**, **414** that correspond to vaporizer inlets **120** and vaporizer outlets **122** of **FIG. 4**, respectively.

[0133] With reference to **FIG. 15**, the bonded vaporizer stack assembly **350** in one embodiment may be approximately 5.11 mm in width and approximately 5.15 mm in height. Due to the design of the vaporizer stack assembly **350**, the micro-channels may be made wider than in prior art devices for similar temperature and pressure operating conditions while maintaining lower material stresses.

[0134] **FIG. 16** is an exploded view of the alternating shim stack **360** of **FIG. 13**. In one embodiment, 118 channel shims **364** and 58 separator shims **354** are alternately stacked upon each other in a 2:1 ratio. The separator shim/fin **354** can be manufactured from 18 gauge (0.48 mm) thick 316/316L cold rolled and annealed stainless steel sheet or other materials appropriate to the operating temperature. The channel shim **364** can be manufactured from 26 gauge (0.018 mm) thick 316/316L cold rolled and annealed stainless steel sheet or other material appropriate to the operating temperature. The alternating shim stack **360** must begin and end with channel shims **364** to properly interface with top **352** and bottom **356** plates.

[0135] Each channel shim **364** is shaped to create a series of combustion micro-channels **363** and vaporizer micro-channels **365** extending between opposite ends of the shim. Combustion gas passes through the combustion micro-channels, while water flows through the vaporizer micro-channels and is converted to steam. Each vaporizer micro-channel **365** is formed by two longitudinal walls **366** which are joined together by at least one transverse support **367**. This causes the vaporizer micro-channel to be separated into a series of chambers. All of the end chambers **358** at one a first end of the channel shim **364** are shorter in length than the other chambers **359**. This is because the longitudinal walls **366** and the transverse support **367** are the same height. As a result, when two channel shims are stacked upon each other, but are rotated 180 degrees in the same plane with respect to each other, the end chambers **358** are on

opposite ends of the vaporizer channel **365**. This permits water to flow up and down over the transverse supports, which would otherwise act as barriers to fluid flow, and travel in a tortuous path all the way through the micro-channel. Put another way, the channel shims must be rotated about the lateral axis or flipped along the transverse axis, not flipped along the longitudinal axis.

[0136] Thus, the channel shim includes only one notch **369** on one end of the shim. This provides another visual indicator to confirm that the channel shims are properly stacked upon each other. Thus, the alternating stack **360** includes two levels of channel shims **364**, then one level of separator shim **362**, then two levels of channel shims **364**, etc. Each channel shim **364** also includes four notches **368** in the corners through which the alignment pins **355** may be inserted. The combination of vaporizer micro-channels forms the vaporizer water channel, and the combination of combustion micro-channels forms the combustion channel.

[0137] Separator shim **362** serves to laterally conduct heat from a combustion gas pathway into vaporizer water channels through fin **361** which extends into and across the water channels when shims **362**, **364** are stacked into the final alternating shim assembly **360**. The separator shim **362** is very similar to the top plate **352** in many respects except thickness. The shim includes two alignment notches **420**, **422** which can be visually inspected during bonding to ensure that all shims **362**, **364** in alternating shim stack **360** are aligned properly. The alignment notches **420**, **422** are offset from each other, or in other words are on opposite ends and opposite sides (i.e. opposing corners) of the shim. Each plate also includes four notches **424** in the corners through which the alignment pins **355** are inserted. Each plate also includes indents **426** (here having a rectangular shape) on one end as a visual indication of where the combustion channels will be located. Several slits **428** are made in the plate along the linear axis corresponding to the combustion channels to permit differential thermal expansion. Slots **432**, **434** are provided that correspond to vaporizer inlets **120** and vaporizer outlets **122** of **FIG. 4**, respectively.

[0138] Again, the assembly forms two types of channels, water channels and combustion channels. The water channels (formed from the micro-channels **365**) will have a horizontal flowpath and two orthogonal (i.e. vertical) passageways, while the

combustion channels (formed from the micro-channels **363**) will have only a horizontal flowpath and does not have vertical passageways.

[0139] The processing capacity of the heat exchangers and fuel processors described herein can be scaled as desired to any convenient size in at least two different ways. First, the alternating channel shims and separator shims can be stacked vertically to any desired height to provide the requisite number of channels and change the size of the reformer / vaporizer. Alternatively, the total number of channels defined by the channel shims and separator shims can be increased to provide the desired capacity. For example, the embodiment of **FIG. 12** has four reaction channels, and the embodiment of **FIG. 16** has six reaction channels. In other words, the device can be made either taller or wider.

[0140] **FIG. 17** is a chart illustrating a general method for forming a reactor, which starts at **S101**. First, the stack assemblies that make up the reformer and the vaporizer are made. At **S102**, the channel shims **344, 364** and separator shims **342, 362** for the respective assembly are generated. At **S104**, the channel shims **344, 364** and separator shims **342, 362** are stacked alternately between the top plate **332, 352** and the bottom plate **336, 356**. In optional step **S106**, catalyst inserts may be inserted into the desired channels (see discussion of **FIG. 21** below). Next, at **S108**, the shims and plates are bonded together to form the stack assembly **330, 350**. Bonding may occur through diffusion bonding, with or without the help of alignment pins **335**. At **S110**, post-processing of the stack assembly occurs. This may entail removing excess material, opening manifolds, and attaching appropriate flow connections.

[0141] Next, the reactor can be formed. At **S112**, the reformer assembly and the vaporizer assembly are made, as described above. At **S114**, the inlets and outlets of the reformer and vaporizer assemblies **340, 360** are arranged so that reactants/water flow counter-current or co-current past the combustion channels in the two assemblies. The arrangement may involve binding the assemblies to the manifold or casing **119, 219** of a fuel processor assembly **110, 210**, inserting the inlet/outlet tubes, and connecting the reactant/water supply sources to the appropriate end of the assemblies. At **S116**, if desired, additional reformer assemblies **340** can be arranged in series with the reformer assembly **340** to increase the output of hydrogen gas produced by the fuel

processor. This may be performed to meet greater fuel input demands by a fuel cell assembly **181**, **281** capable of generating more electricity. Additional vaporizer assemblies **360** may also be added in series with the reformer assemblies **340** to provide more hot steam input to reformer assemblies **340**.

[0142] **FIG. 18** is a plan view of a third exemplary embodiment of a fuel processor **510** having counter-current flow between the combustion gas and the reactants/water. This embodiment differs from the prior embodiments in that the flow path is U-shaped, rather than linear. Put another way, the burner and the exhaust port are on the same end of the casing instead of on opposite ends. This embodiment shows only the half of the fuel processor that contains the reformer section; the other half is of a similar construction but contains the vaporizer section. **FIG. 19** shows a channel shim and a separator shim used in this embodiment, which may be helpful in visualizing the flow paths.

[0143] A burner **516** provides hot combustion gas which flows (indicated as dotted arrow) through two combustion channels **502**, **504**. The combustion channels are optionally separated by a separator panel **508**, which may be a ceramic panel used to direct hot combustion gas flow through the combustion channels. The ceramic panel may also radiate thermal energy to increase net heat transfer in the combustion channel. As shown here, each combustion channel **502**, **504** starts near the center of the processor and travels down a first leg **521** from the burner to the opposite end **501** of the casing. The combustion channel then makes a U-turn and returns down a second leg **523** to the burner end **505** of the casing **503** near the outside of the processor.

[0144] A reaction channel **506** is surrounded by the combustion channel **502**. The reaction channel also has a first leg **525** and a second leg **527**. As illustrated here (solid arrows), the steam/fuel mixture enters the reaction channel at the burner end near the outside of the processor and flows counter-current to the combustion gas down the first leg. At the opposite end **501**, the reaction channel makes a U-turn and returns to the burner end **505** near the center of the processor in the second leg. A central slot **511** is present here. Catalyst **519** is present within the reaction channel, as described above with respect to **FIG. 5**.

[0145] At the center of the reaction channel **506** is a separating wall **510**. The U-turn for the reaction channel goes around this separating wall. As seen later, the separating wall serves to align the shims of this processor.

[0146] As noted above, **FIG. 18** shows only the section of the processor that performs reformation. The section of the processor that contains the vaporizer and produces the steam has essentially the same construction. The only difference is that instead of a steam/fuel mixture entering the reaction channel **506**, water enters the vaporizer channel of the vaporizer. The steam is then produced by heat transfer from the combustion channel of the vaporizer. The vaporizer and reformer sections can share the same burner, which provides the combustion gas to both sections. The two sections would be separated from each other by a wall. Alternatively, hot combustion gas leaving the reformer can be directed to a vaporizer so that the vaporizer is essentially in series with the combustion gases of the reformer.

[0147] Referring now to **FIG. 19**, a perspective view of the channel shim **540** (top left) and the separator shim **550** (bottom left) are provided, along with a partial assembly view (right side) of the heat exchanger assembly **590** formed therefrom.

[0148] The channel shim **540** has an entry end **541** and a return end **542**. There are two outer walls **543** and a central wall **544** having an alignment slot **545**. These walls create two micro-channels **547**, **548**. Two wings **546** are present extending from the outer walls **543** on the entry end **541**. A notch **549** is present on the outer edge of the return end aligned with the central wall **544**.

[0149] The separator shim **550** has an entry end **551** and a return end **552**. The entry end includes two recesses **553** that align with the micro-channels in the channel shim. An alignment slot **555** is present in the center, and aligns with the alignment slot **545** of the channel shim. The return end can be described as having fins **556**. A central slot **557** is located at the return end, and aligns with the micro-channels in the channel shim. A notch **559** is present on the center of the outer edge of the return end.

[0150] As seen on the right side of **FIG. 19**, the channel shim **540** and separator shim **550** are alternated. Their alignment slots **545**, **555** align so that the separating wall **510** passes through the slots. The reformat will first pass through the micro-channel **547**. At the return end **542**, **552**, the reformat can pass through the central

slot **557** to move from micro-channel **547** to micro-channel **548** and flow back towards the entry end. The reformat inlet **560** and reformat outlet **562** are marked. The combustion channel is on the exterior, surrounding the reformat channel **547/548**.

[0151] In this regard, because the combustion channel contains relatively hotter combustion gas on the beginning leg compared to the return leg, the reformer can be divided into a hot side and a cold side (hot and cold being relative terms). Referring back to **FIG. 19**, the hot side **570** is proximate the center of the processor, while the cold side **572** is near the outside of the processor. It should be noted that the separator shim **550** will transfer heat laterally from the hot side to the cold side as the combustion gas travels from the burner to the opposite end **501** of the casing. The resulting heat gradients in the reaction channel **506** are designed so that relatively hotter reformat passes through the hot side **570**, so that overall the reformat is more gently heated. This should reduce excessive carbon deposits on catalyst **519**.

[0152] In one embodiment of fuel processor **510**, the channel shims **540** are fabricated from 0.040 inch thick sheet while the separator/fin shims **550** are made from 0.050 inch thick sheet, allowing the combustion channels **502, 504** to see a stack of fins spaced 0.040 inch apart which provides significant extended heat transfer surface area. The thicker separator/fin shims **550** allow for effective heat transfer using high temperature materials, e.g. Inconel and the like, that have low thermal conductivity.

[0153] In another embodiment of fuel processor **510**, the catalyst **519** is supplied on shims that are approximately 3-1/2 inches long and 3/8 inch wide. In yet another embodiment, the catalyst **519** adopts an alternative configuration with longer, narrower shims. A larger catalyst **519** insert width is convenient for insertion into long reaction channels. Because the pressure above and below the separator shim **550** is the same, there is no strength issue with additional catalyst **519** as long as heat from hot combustion gas can be transferred effectively to the catalysts **519**. In yet another embodiment of fuel processor **510**, the catalyst **519** inserts are expanded metal that have been corrugated parallel to the reaction channels to provide consistent flow space. The catalyst **519** insets could be a variety of different shapes and supports. Alternatively, the catalyst **519** can be an insert positioned vertically across the center of

the channel inlets on a support such as a thin rod. This aspect is further described in **FIG. 21** below.

[0154] **FIG. 20** shows a fourth exemplary embodiment of a fuel processor **610** that allows for counter-current flow of reactant and combustion gases while having a non-linear arrangement of reformation reactors and vaporizers. Fuel processor **610** may be expanded in width, rather than length, to include more reformer sections and/or vaporizer sections as it is scaled up for more commercial applications. This embodiment differs from that of **FIG. 18** in that the reformer and vaporizer sections are each linear (rather than including a U-turn) and the entire processor is shown (not just half of the processor). Generally, a square cross-section (to gas flow) is desired for minimal heat loss. Thus, the vaporizer/reformer section height is first increased, then the number of vaporizer/reformer sections side-by-side (i.e. width), then the number of vaporizer/reformer sections in series is increased.

[0155] Fuel processor **610** includes burner **611** which receives air from air inlet **615** and gas from gas inlet **612** to produce hot combustion gas. The flow of hot combustion is directed to reformer sections **632**, **636** by an optional separator plate **608** gas and moves across reformer sections **632**, **636** in a direction away from burner **611**. While combustion gas flows, reformer sections **632**, **636** receive reformat at reformat inputs **620**. Reformat flows counter-current to hot combustion gas towards reformat outlets **628**. Sample points **626** are located mid-way through reformer sections **632**, **636** to allow the progress of the underlying reformation reaction to be assessed. Put another way, the reformat outlets **628** are proximate the burner **611**.

[0156] After flowing past reformer sections **632**, **636**, the hot combustion gas makes a U-turn (indicated by arrow) and travels in the opposite direction towards exhaust points **629**. While combustion gas flows in the opposite direction, vaporizer sections **652**, **654** receive water at vaporizer inlets **640**. Water flows counter-current to the hot combustion gas towards the vaporizer outlets **648**. Put another way, the vaporizer inlets are proximate the burner **611**. After flowing past the vaporizer sections, the hot combustion gas leaves fuel processor **610** at exhaust points **629**.

[0157] **FIG. 21** is a conceptual drawing of an exemplary embodiment of a catalyst insert **734** that could be used to place catalyst within a channel. Referring back to **FIG.**

19, this insert would be placed within the channel defined by two separator shims and one channel shim.

[0158] The corrugated catalyst insert **734** includes a corrugated center piece **730** that is coated on at least one side (and usually both) with catalyst **731**. The corrugated insert **734** is sandwiched between two flat shims **736**. The inner surface **735** of each shim **736** is also illustrated as being coated with catalyst **731**. This insert is then placed into the channel, with the outer surface **739** of each shim **736** contacting the sides of the channel (not shown). Alternatively, the side shims **736** may be removed, and the catalyst insert may be only the corrugated center piece **730**. It is also contemplated, as previously noted, that catalyst could be coated directly upon the channel shim and separator shims that make up the channel.

[0159] Catalyst-coated corrugated materials may be preferable due to open flow passages yielding low pressure drop and good catalyst contacts. The corrugated catalyst insert **734** may be suitable for insertion into reaction channels **134**, **135**, **138**, **139** in the fuel processor **110** of **FIG. 5**, or in the fuel processor **210** of **FIG. 8** and the fuel processor **610** of **FIG. 20**.

[0160] The various heat exchanger and fuel processor designs illustrated herein are particularly useful for certain reactions which require a managed temperature gradient to avoid "thermal shock". For example, steam reforming of higher hydrocarbons is a reaction that is particularly sensitive to rapid heating (e.g. $C_{12}H_{26} + 12 H_2O \rightarrow 12 CO + 25 H_2$). Contact with hot surfaces (needed for rapid heating) can cause cracking of the hydrocarbon molecule and deposition of carbon leading to deactivation of the catalyst and plugging of the channels in the reactor. Counter-current flow heats the steam/hydrocarbon mixture more gently with a lower temperature gradient (compared to co-current or cross-current flow type heat exchangers) until the reforming reaction is reasonably well underway. After some hydrogen and CO have been created from the reforming reaction, carbon formation is less likely and the heating can continue at higher temperatures. The hydrocarbon/steam mixture enters the reactor channel and is exposed to a relatively low temperature, and the temperature then increases through the length of the channel.

[0161] Another exemplary reaction where a managed temperature gradient is useful is water-gas shift: $\text{CO} + \text{H}_2\text{O} \rightarrow \text{CO}_2 + \text{H}_2$. This reaction favors hydrogen production at low temperatures, but reaction rates are slow. The overall size of the heat exchanger may be minimized in some cases by initiating the reaction at a high temperature and gradually reducing the temperature as the reaction proceeds. In this case, the reactants enter one reactor channel at a high temperature, and temperature decreases through the length of the channel, a coolant being used in counter-current flow to obtain the temperature gradient. Again, however, although counter-current flow is used in the figure to illustrate the operation of the heat exchangers and reactors, co-current flow is also contemplated.

[0162] As previously stated, the heat exchangers of the present disclosure may be made from the regular assembly of different shims that are punched through, stacked in a regular pattern, and bonded. **FIGURES 10-17** illustrate different possible configurations for forming the heat exchangers by bonding. Bonding may be by diffusion bonding (a well-known industrial process) or brazing (also well known), with diffusion bonding being preferred for high temperature reactions. Another feature of the assemblies disclosed herein is that when diffusion bonding occurs, there are no “unsupported bond areas”. The diffusion bonding process presses the shims together with significant force and at high temperature. The catalyst may be inserted into the reactor channels after bonding as pre-coated inserts, may be inserted either before bonding, or the catalyst can be coated in-situ. Whether or not the catalyst can be inserted before bonding depends on the catalyst type and the bonding atmosphere. Generally, diffusion bonding temperature may be detrimental to catalyst performance; hence, it may be advantageous to install the catalyst after bonding.

[0163] As previously stated, longer channels are generally preferred, because they permit more gradual heating. However, practical limitations on catalyst insertion or fabrication equipment size may limit the length of a given channel. However, channels may be formed in series, sometimes with an opportunity for inter-channel mixing between sets of channels. Thus, an effective length/width ratio can be any desired value without practical limitation. For example, the channels **138**, **139** in the fuel processor **110** of **FIG. 5** can each be 3.5 inches long, and are connected in series to

each other through tubing. This configuration heats the first set of channels **138** to a relatively high temperature to perform initial reforming then introduces the partially reformed gas into the second set of channels **139** at relatively high temperature to complete the reforming reaction. This is essentially a parallel series configuration where the combustion path channels **133**, **137** are parallel to the reaction channels **138**, **139**, but the reaction channels are in series with each other. The embodiment of **FIG. 5** has proven to be effective and yields a more compact overall system configuration with lower overall heat loss, and additionally better efficiency.

[0164] The present disclosure has been described with reference to exemplary embodiments. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. It is intended that the present disclosure be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

CLAIMS:

1. A system (100, 200), comprising:
a reactor (110, 210, 510, 610) that includes a combustion gas source (102, 111, 202, 211, 516, 611), a reformer (132, 136, 232, 236) and a vaporizer (152, 154, 252, 254);
wherein the reformer and the vaporizer each comprise:
a reaction channel (810, 134, 135, 138, 139, 151) having a flowpath, a first wall (805), a second wall (832) opposite the first wall, an inlet manifold (812, 124, 120, 620, 640) at a first end, and an outlet manifold (814, 128, 122, 628, 648) at a second opposite end, the inlet manifold and the outlet manifold running orthogonal to the flowpath;
a combustion channel (820, 133, 137, 153) having a flowpath parallel to the flowpath of the reaction channel, the reaction channel and the combustion channel being separated by the first wall; and
a fin (845, 341, 361, 556) extending from the combustion channel into the reaction channel, the fin passing through the first wall and extending to the second wall; and
wherein combustion gas from the combustion gas source flows through the combustion channel.
2. The system of claim 1, further including at least one adiabatic reformer (117, 118) connected to the reaction channel outlet manifold.
3. The system as in any one of claims 1-2, wherein the reaction channel includes a catalyst (131).
4. The system of claim 3, wherein the catalyst (131) is rhodium on spinel.
5. The system as in any one of claims 3-4, wherein the catalyst (131) is inserted into the reaction channel as a catalyst insert (734).

6. The system of claim 5, wherein the catalyst insert (734) comprises a corrugated center piece (730) coated on at least one side with the catalyst.

7. The system of claim 6, wherein the corrugated center piece (730) is sandwiched between two flat shims (736), and an inner surface (735) of each flat shim is also coated with the catalyst.

8. The system as in any one of claims 1-7, wherein the inlet manifolds of the reformer and the vaporizer are arranged so that fluids flowing through the reaction channels of the reformer and the vaporizer flow in a counter-current direction to combustion gas from the combustion gas source.

9. The system as in any one of claims 1-8, further comprising a fuel-steam mixer (104, 204) that connects to the inlet manifold of the reformer reaction channel.

10. The system of claim 9, further comprising a steam superheater (103, 203) that connects to the outlet manifold of the vaporizer reaction channel and feeds the fuel-steam mixer.

11. The system as in any one of claims 9-10, further comprising a fuel supply (171, 271) that feeds the fuel-steam mixer.

12. The system as in any one of claims 1-11, further comprising a water supply (199, 299) that connects to the inlet manifold of the vaporizer reaction channel.

13. The system of claim 1, further comprising
a fuel-steam mixer (**104, 204**);
a water supply (**199, 299**) for providing water to the vaporizer; and
a fuel supply (**171, 271**) for providing fuel to the fuel-steam mixer;
wherein the vaporizer generate steam from the water, the fuel-steam mixer forms a reformat mixture from the steam and the fuel which is sent to the reformer, and the reformer operates to generate hydrogen from the reformat mixture.

14. The system as in any one of claims 1-13, further comprising a fuel cell assembly (**181, 281**) connected to the reactor for producing electricity.

15. The system of claim 14, wherein the fuel assembly includes a proton exchange membrane fuel cell (PEMFC) or a solid oxide fuel cell (SOFC).

16. The system as in any one of claims 1-15, wherein the combustion gas source is located at one end of the reactor, an exhaust port is located at an opposite end of the reactor, and the reformer combustion channel and the vaporizer combustion channel are located in series between the combustion gas source and the exhaust port.

17. The system as in any one of claims 1-15, wherein the combustion gas source is located at a burner end (**505**) of the device, and wherein the combustion channel (**502, 504**) includes (i) a first leg (**521**) running from the burner end to an opposite end (**501**) of the device and (ii) a second leg (**523**) returning from the opposite end to the burner end.

18. The system of claim 17, wherein the reaction channel (**506**) and the vaporizer channel each include (i) a first leg (**525**) running from the burner end to an opposite end of the device and (ii) a second leg (**527**) returning from the opposite end to the burner end.

19. The system of claim 17, wherein the reaction channel (**632**, **636**) flows counter-current to the first leg of the combustion channel and the vaporizer channel (**652**, **654**) flows counter-current to the second leg of the combustion channel.

20. The system as in any one of claims 1-19, wherein the reformer or the vaporizer is a stack assembly formed from a regular alternating pattern of a separator shim and a channel shim.

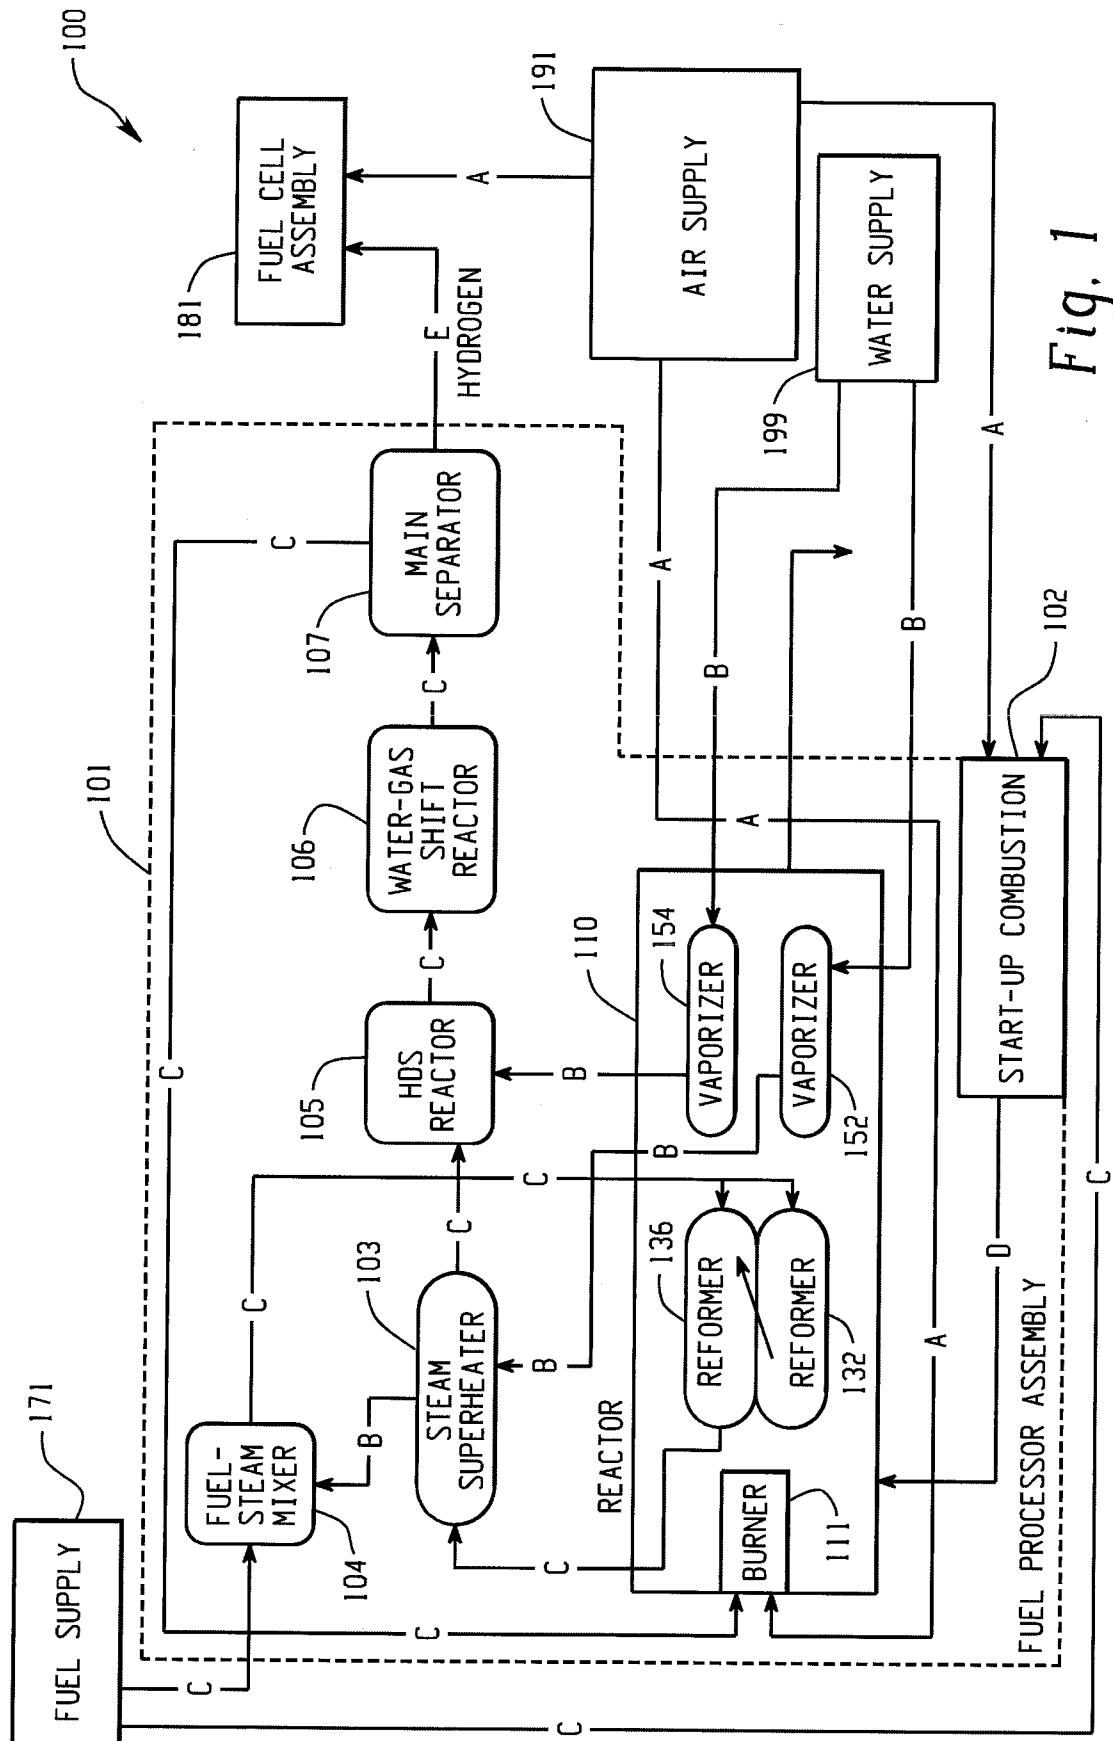


Fig. 1

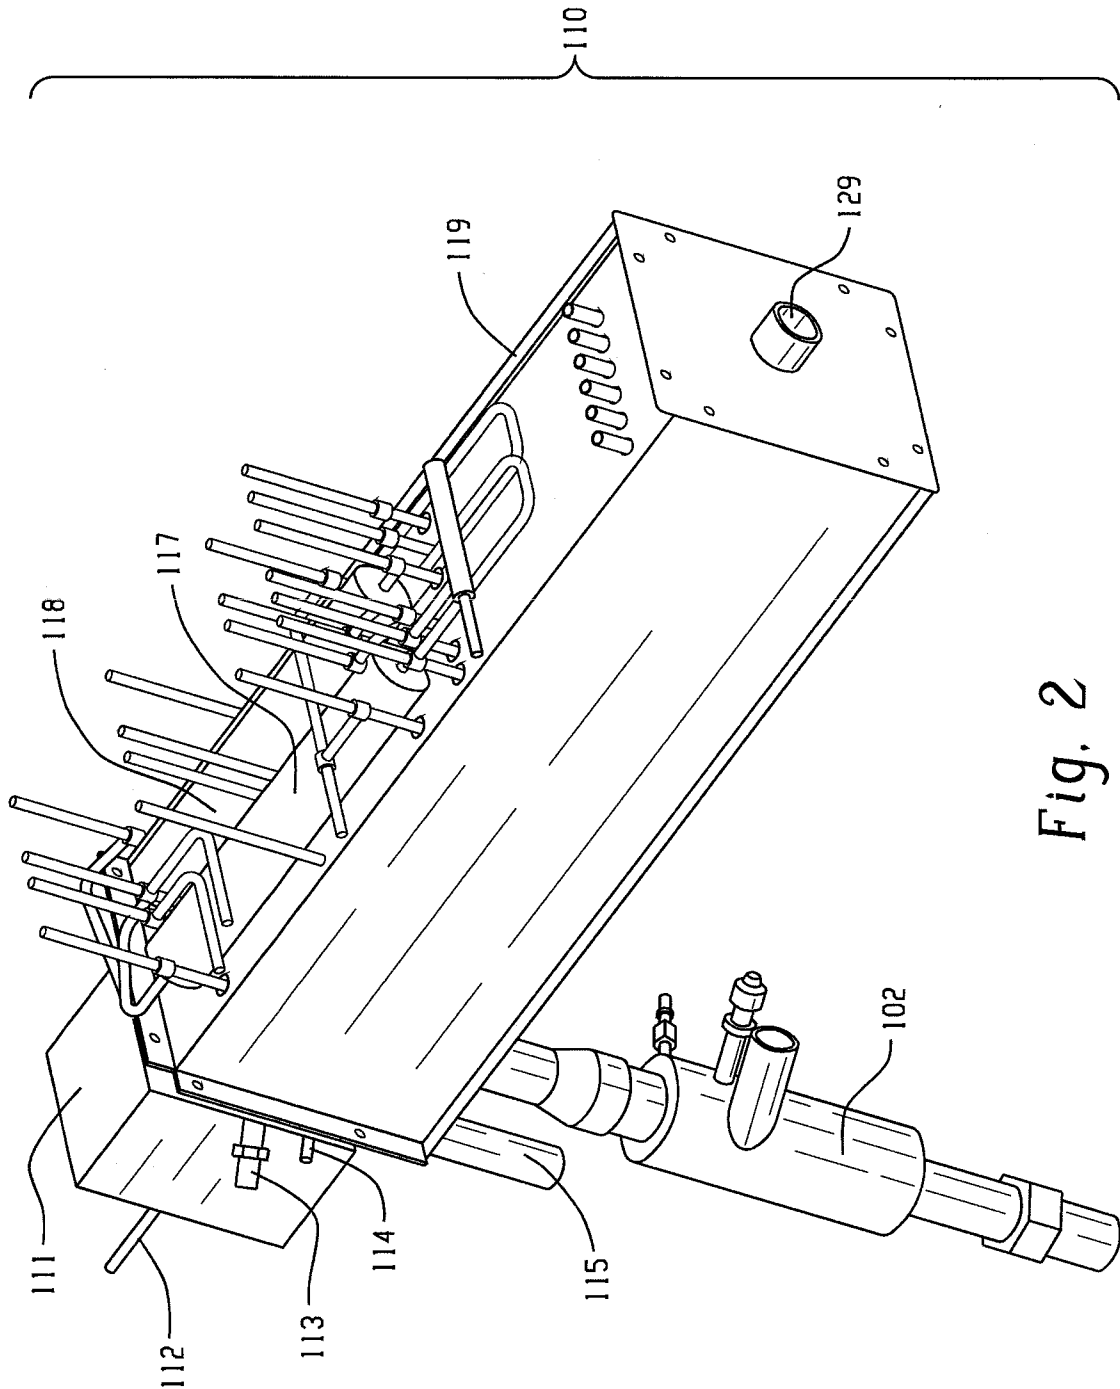


Fig. 2

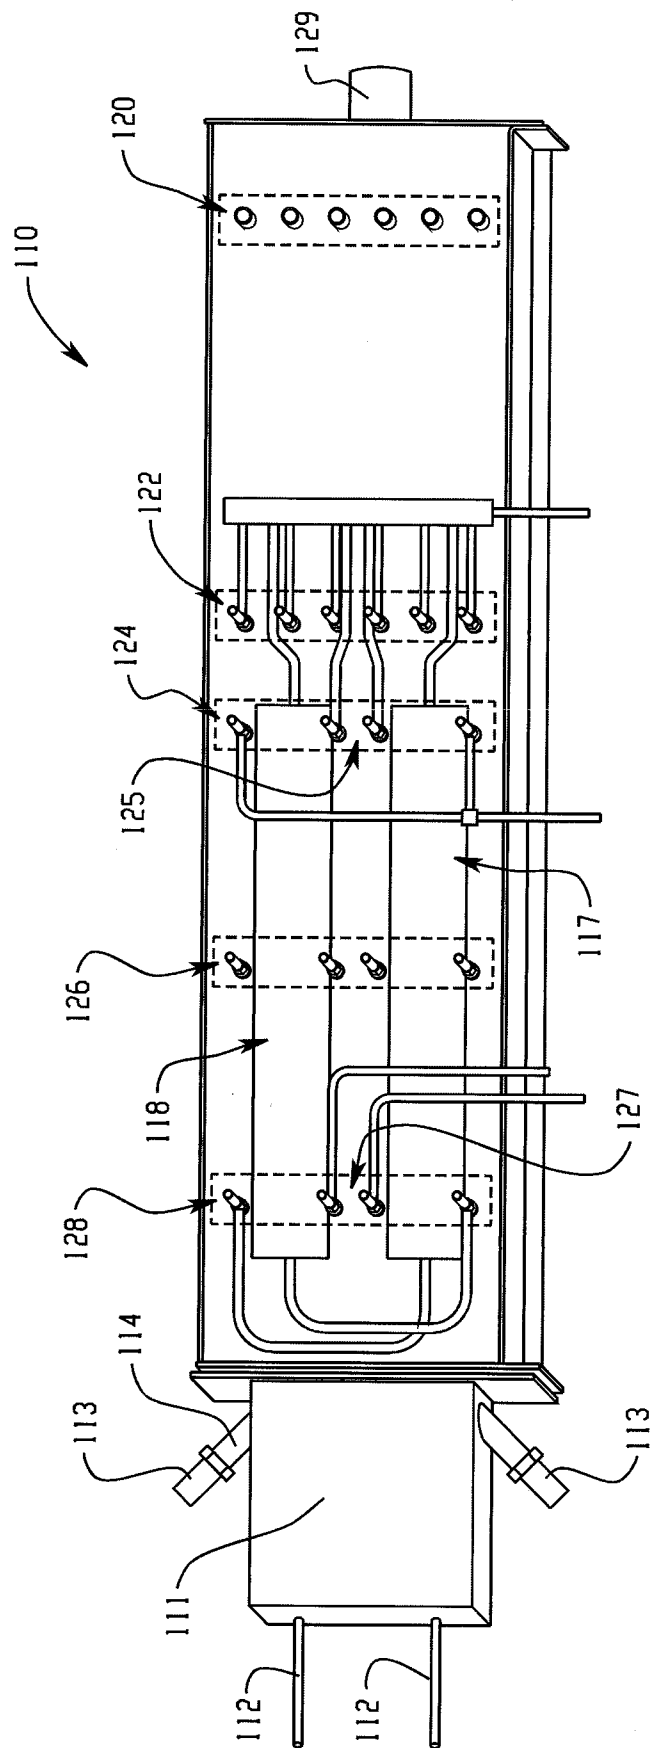


Fig. 3

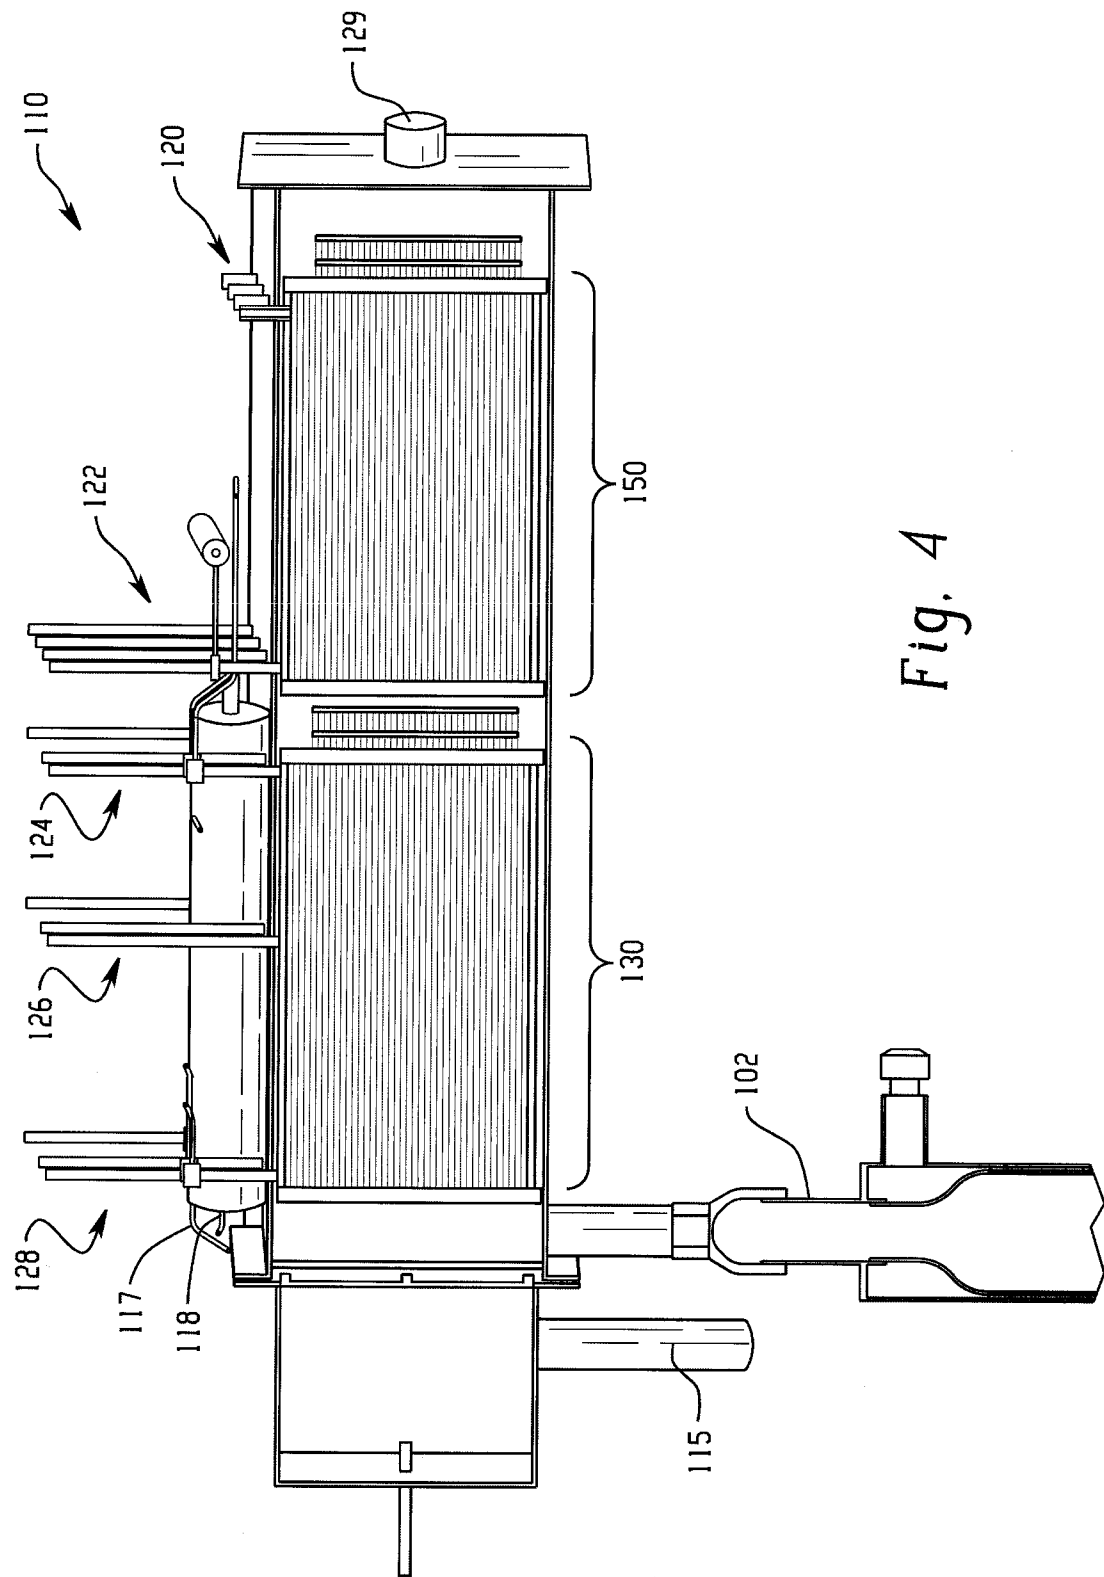


Fig. 4

5/23

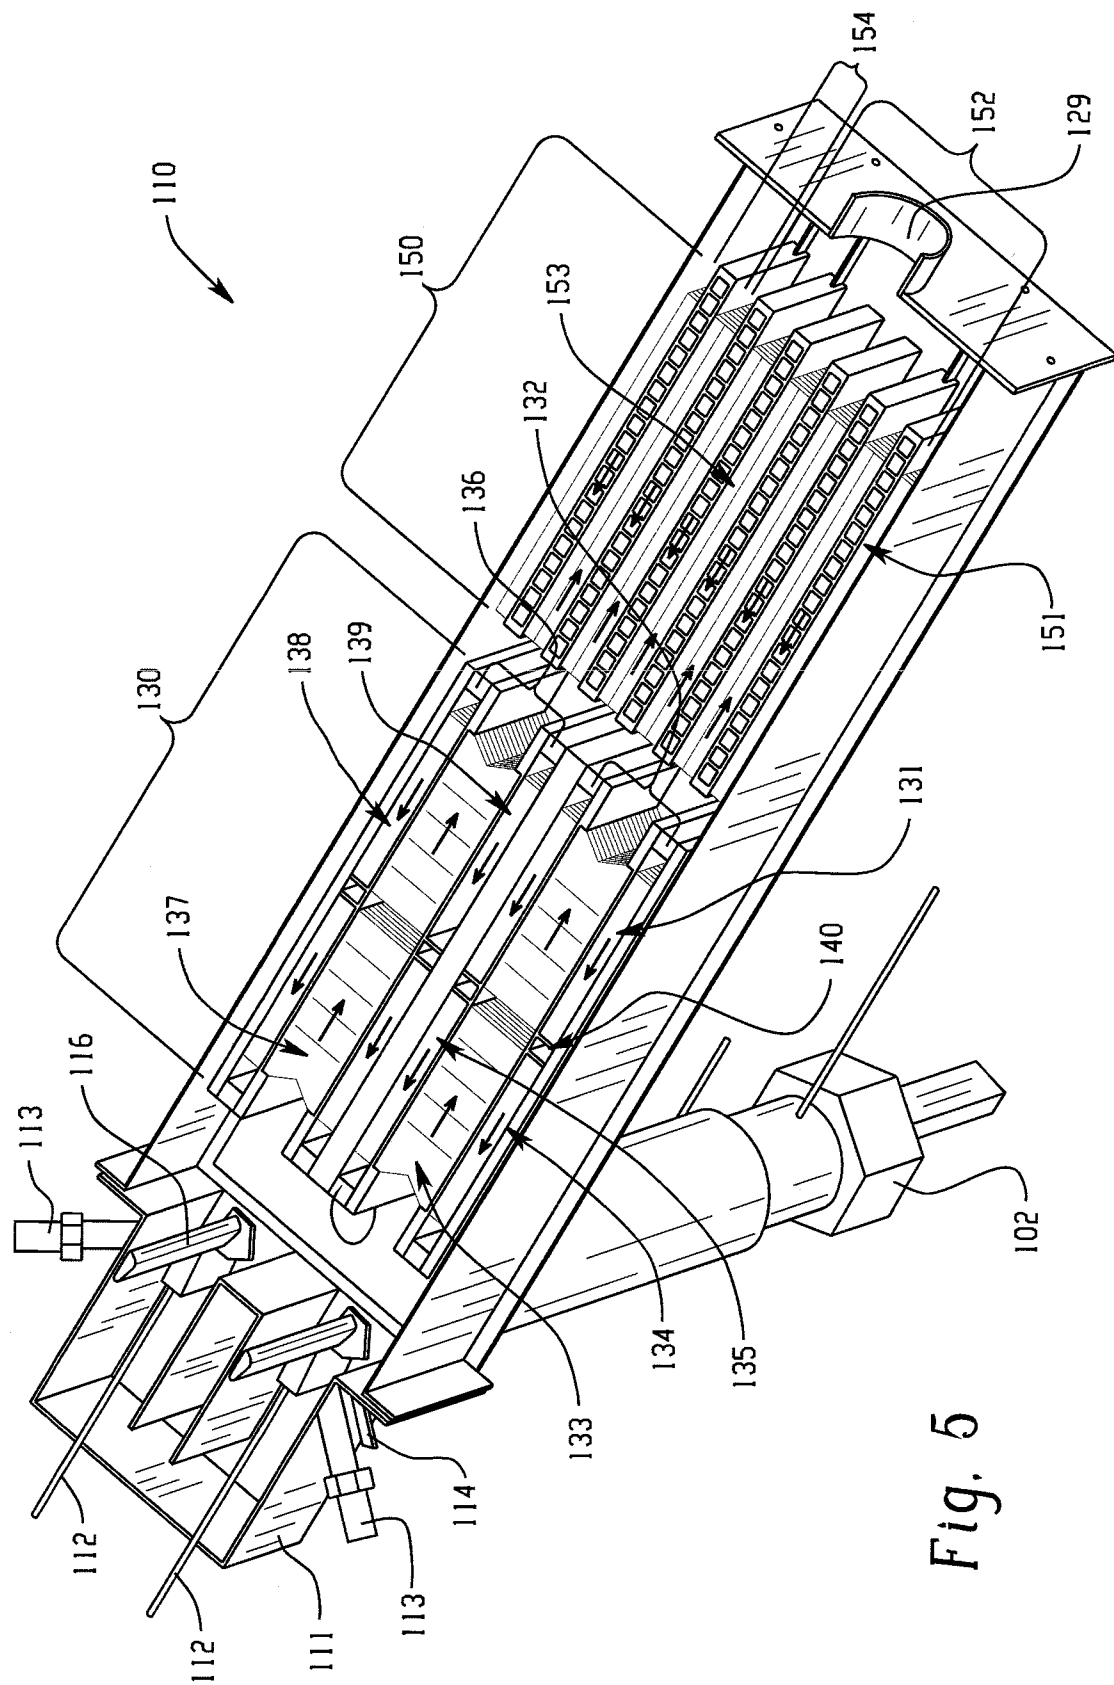


Fig. 5

6/23

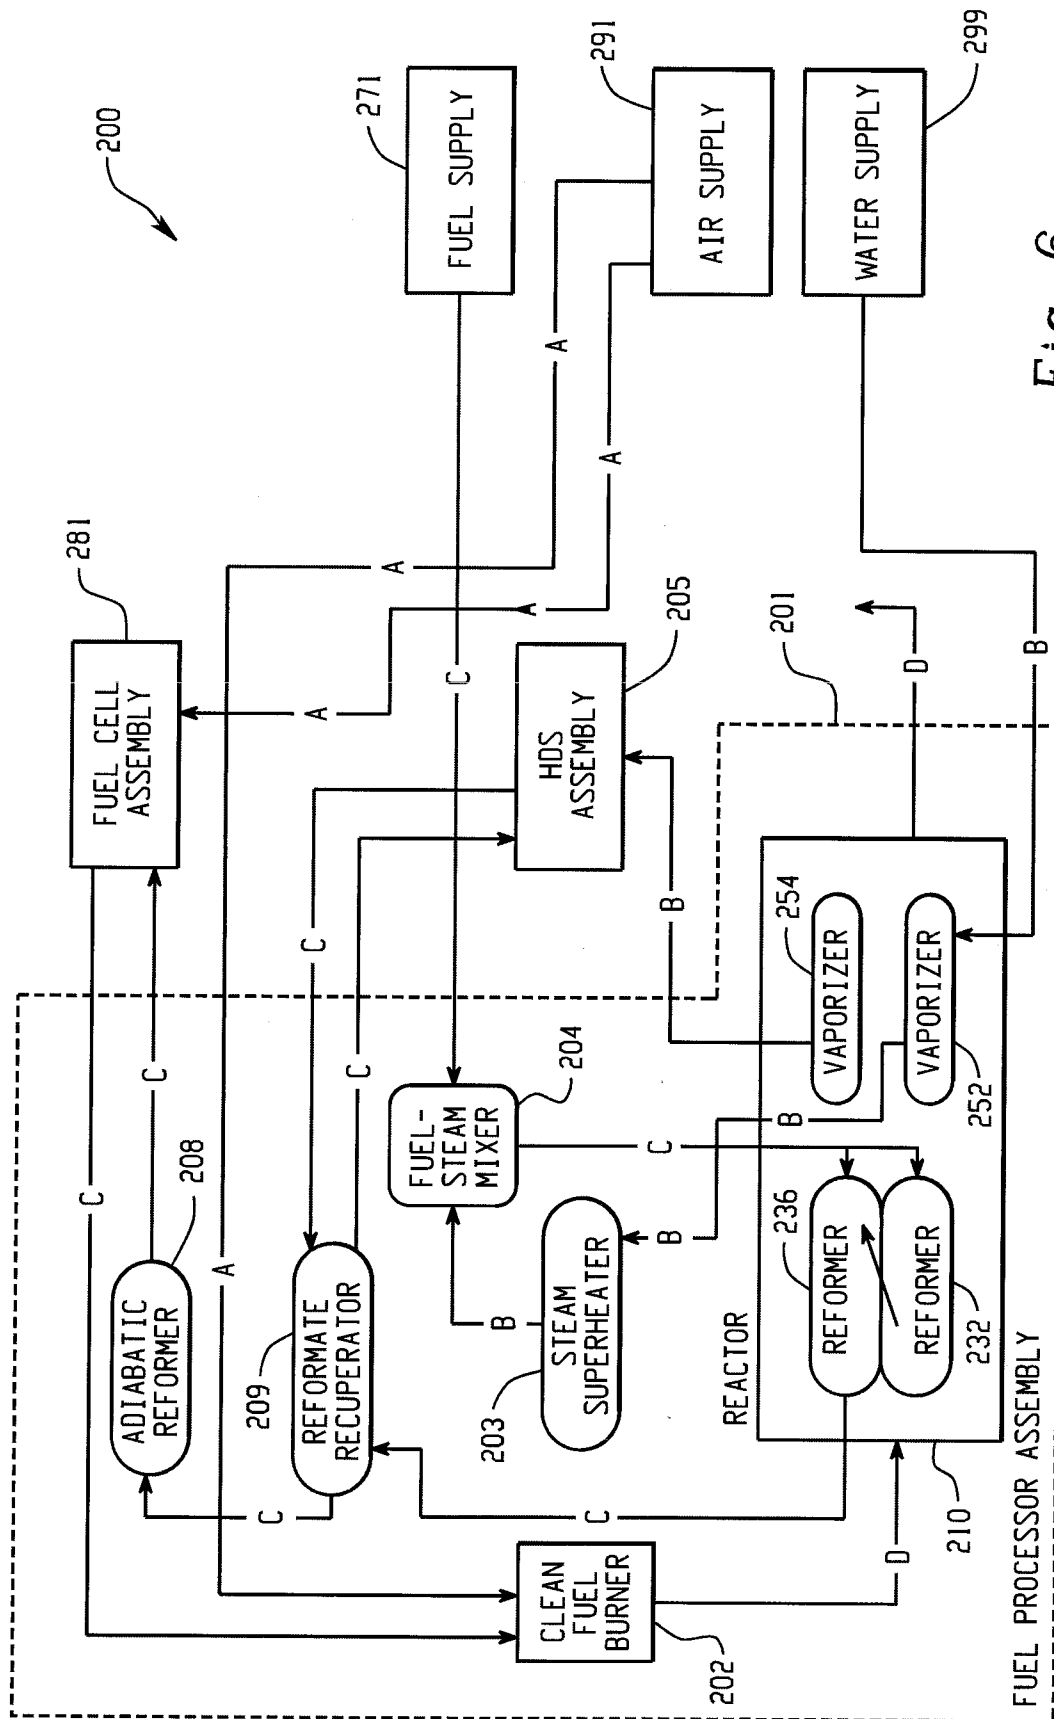


Fig. 6

7/23

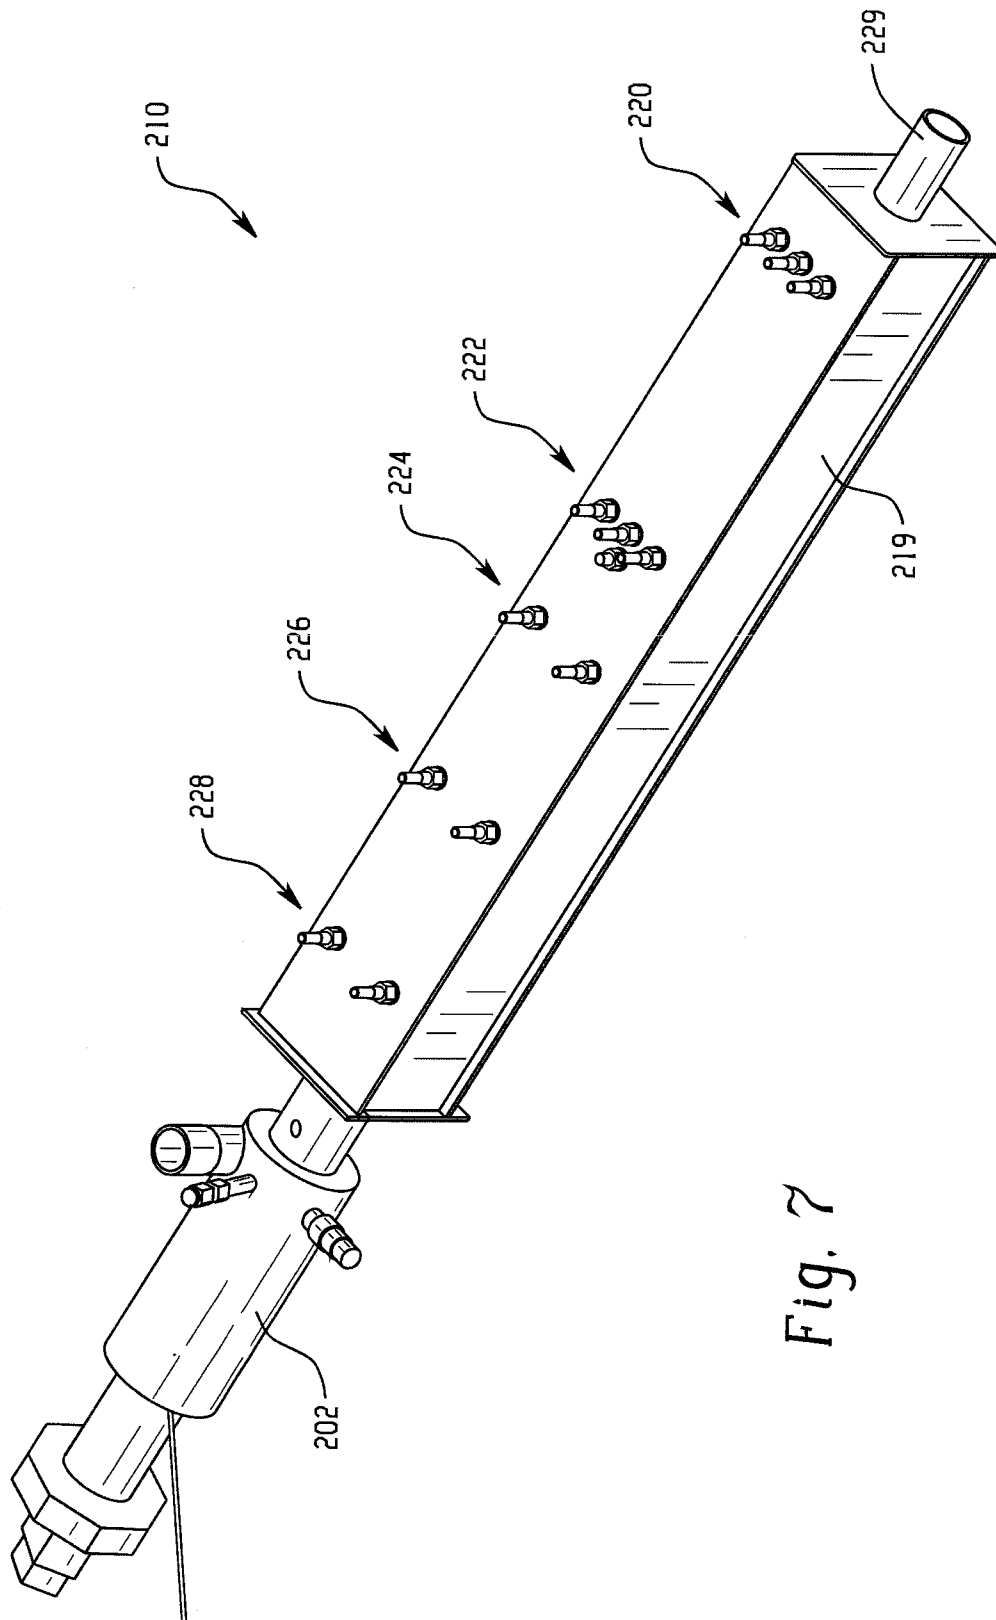


Fig. 7

8/23

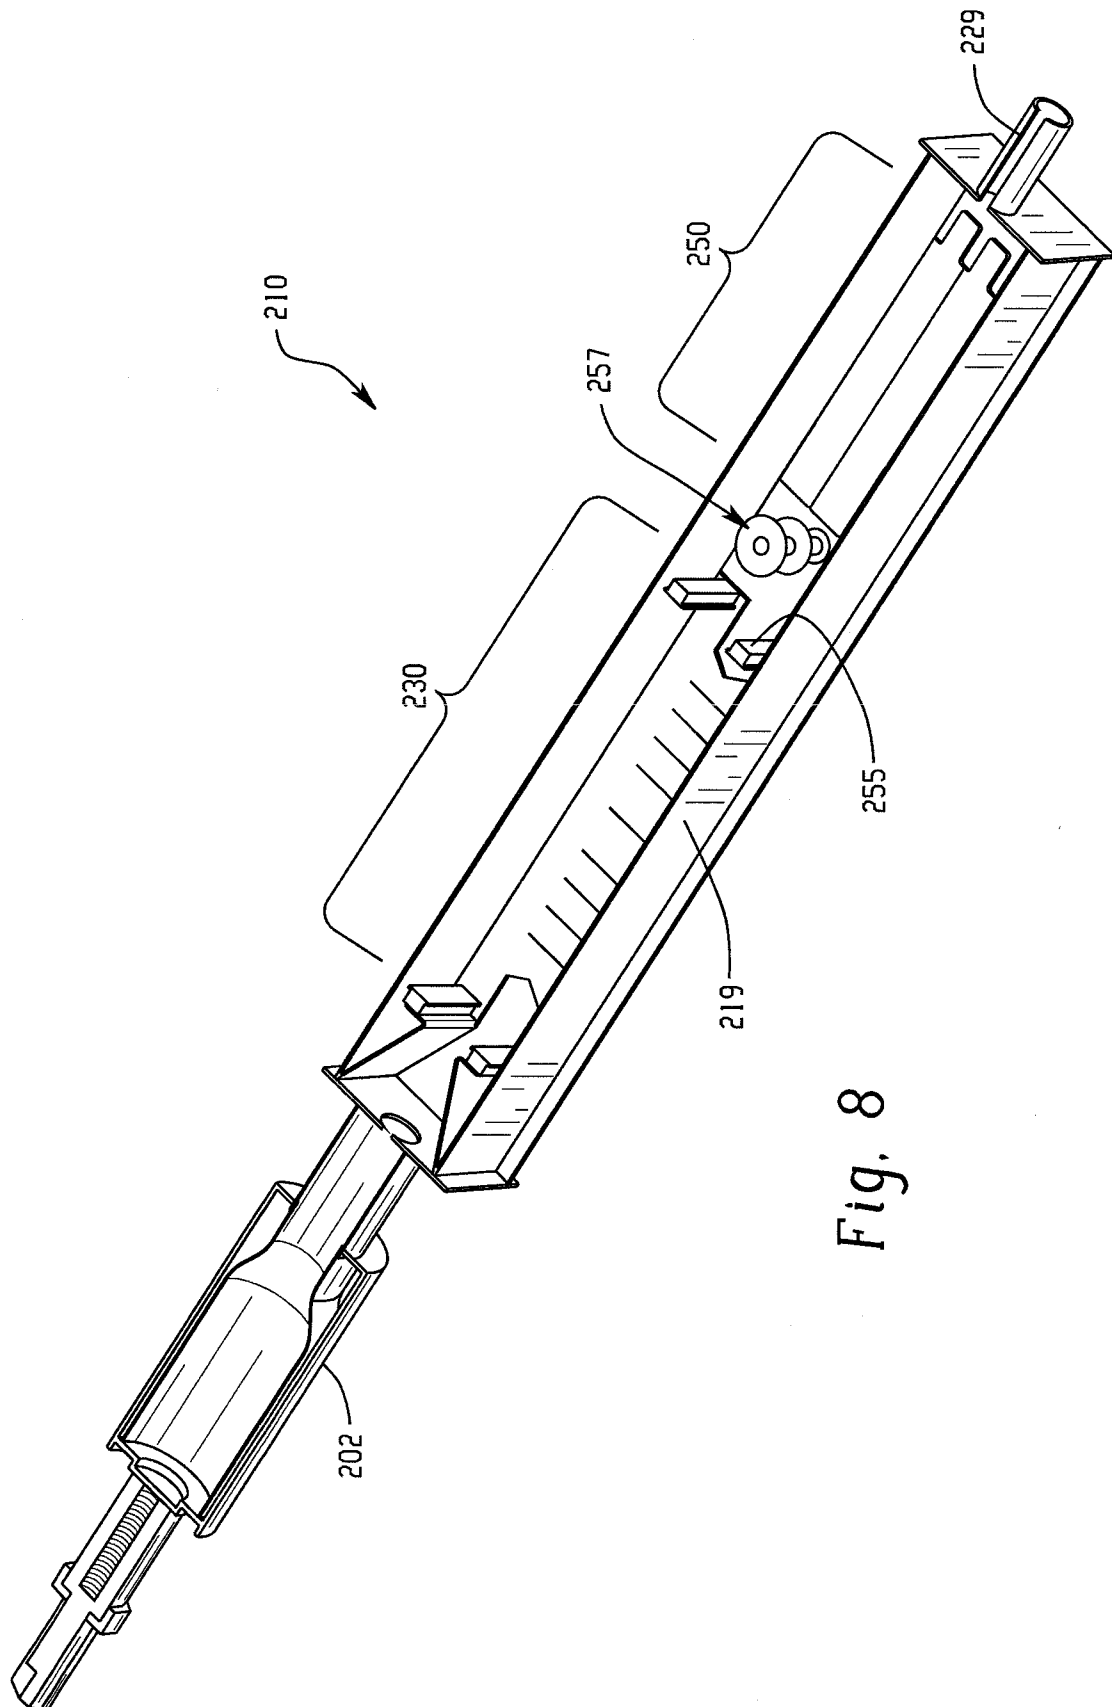


Fig. 8

9/23

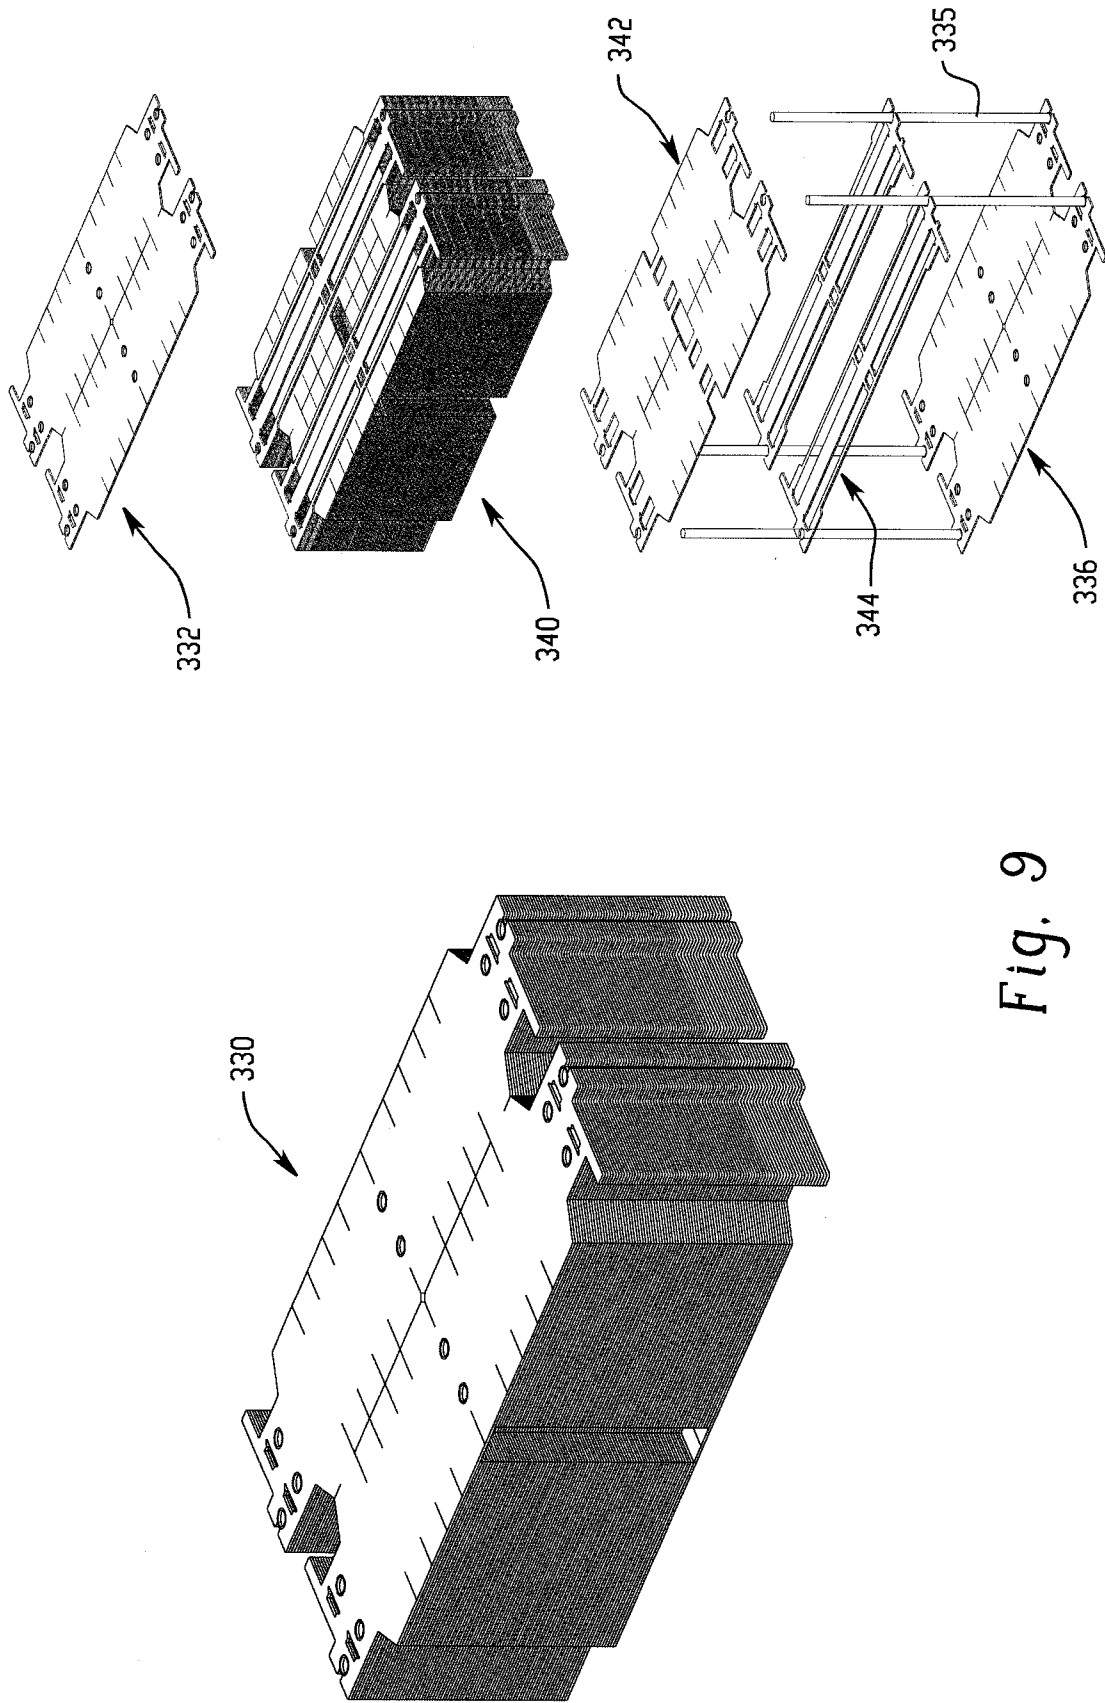


Fig. 9

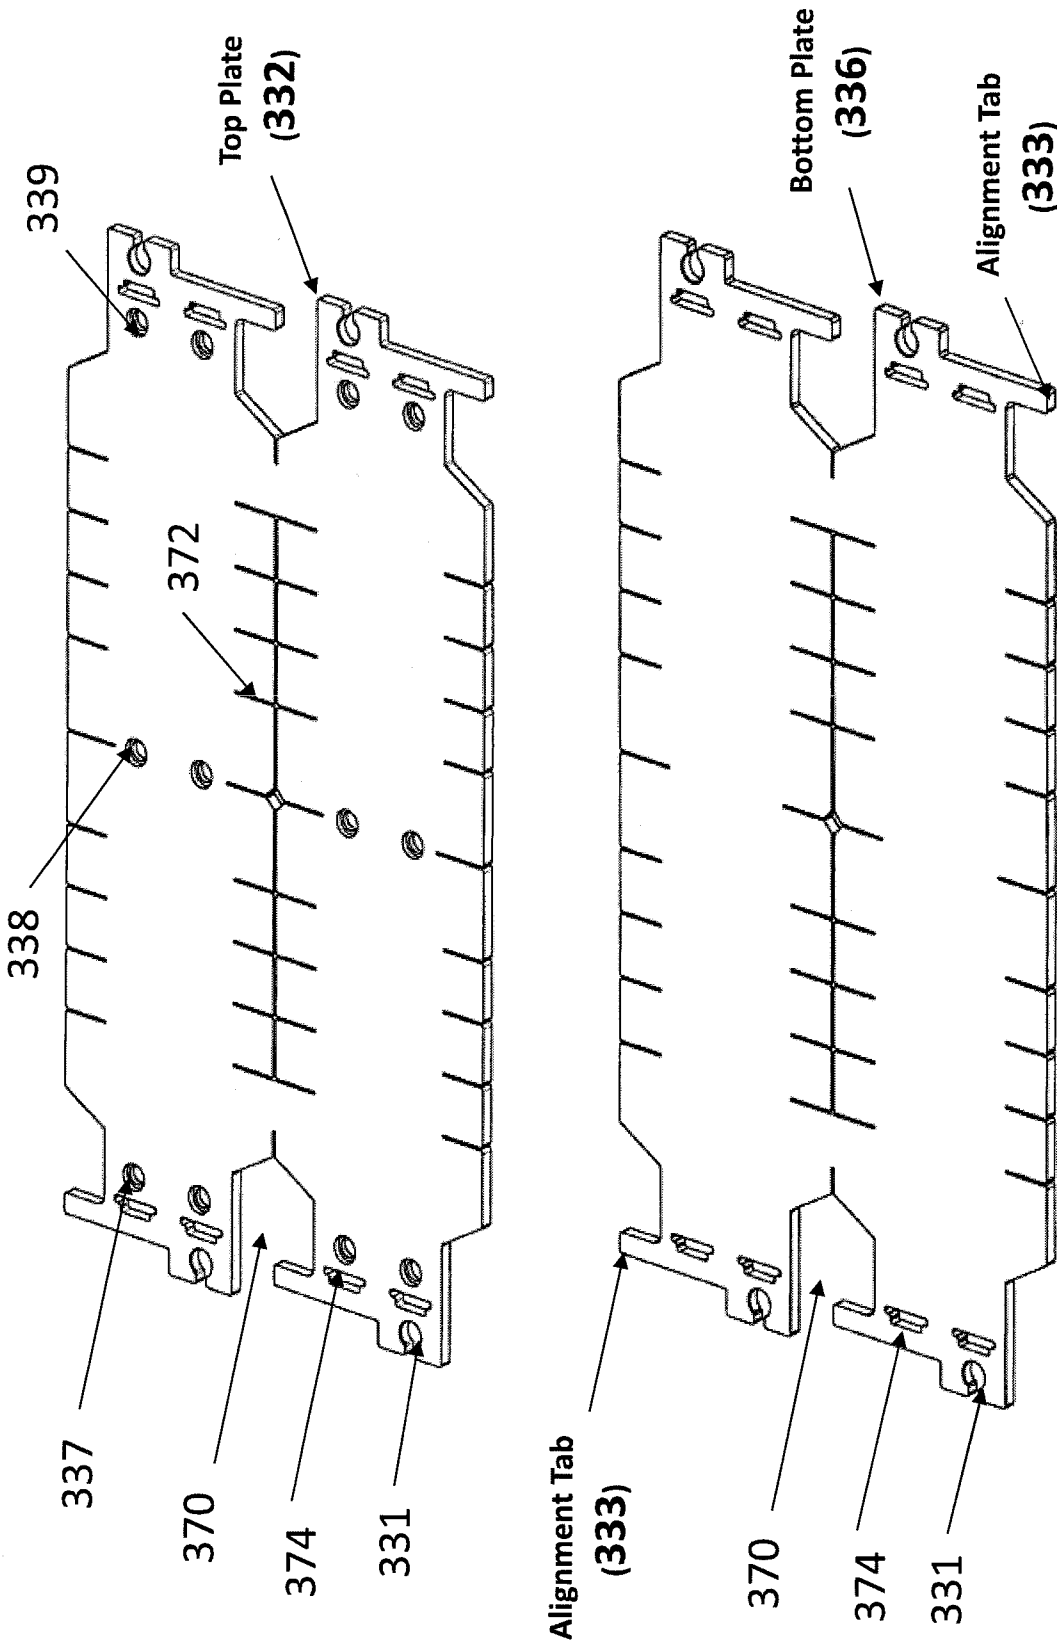


FIG. 10

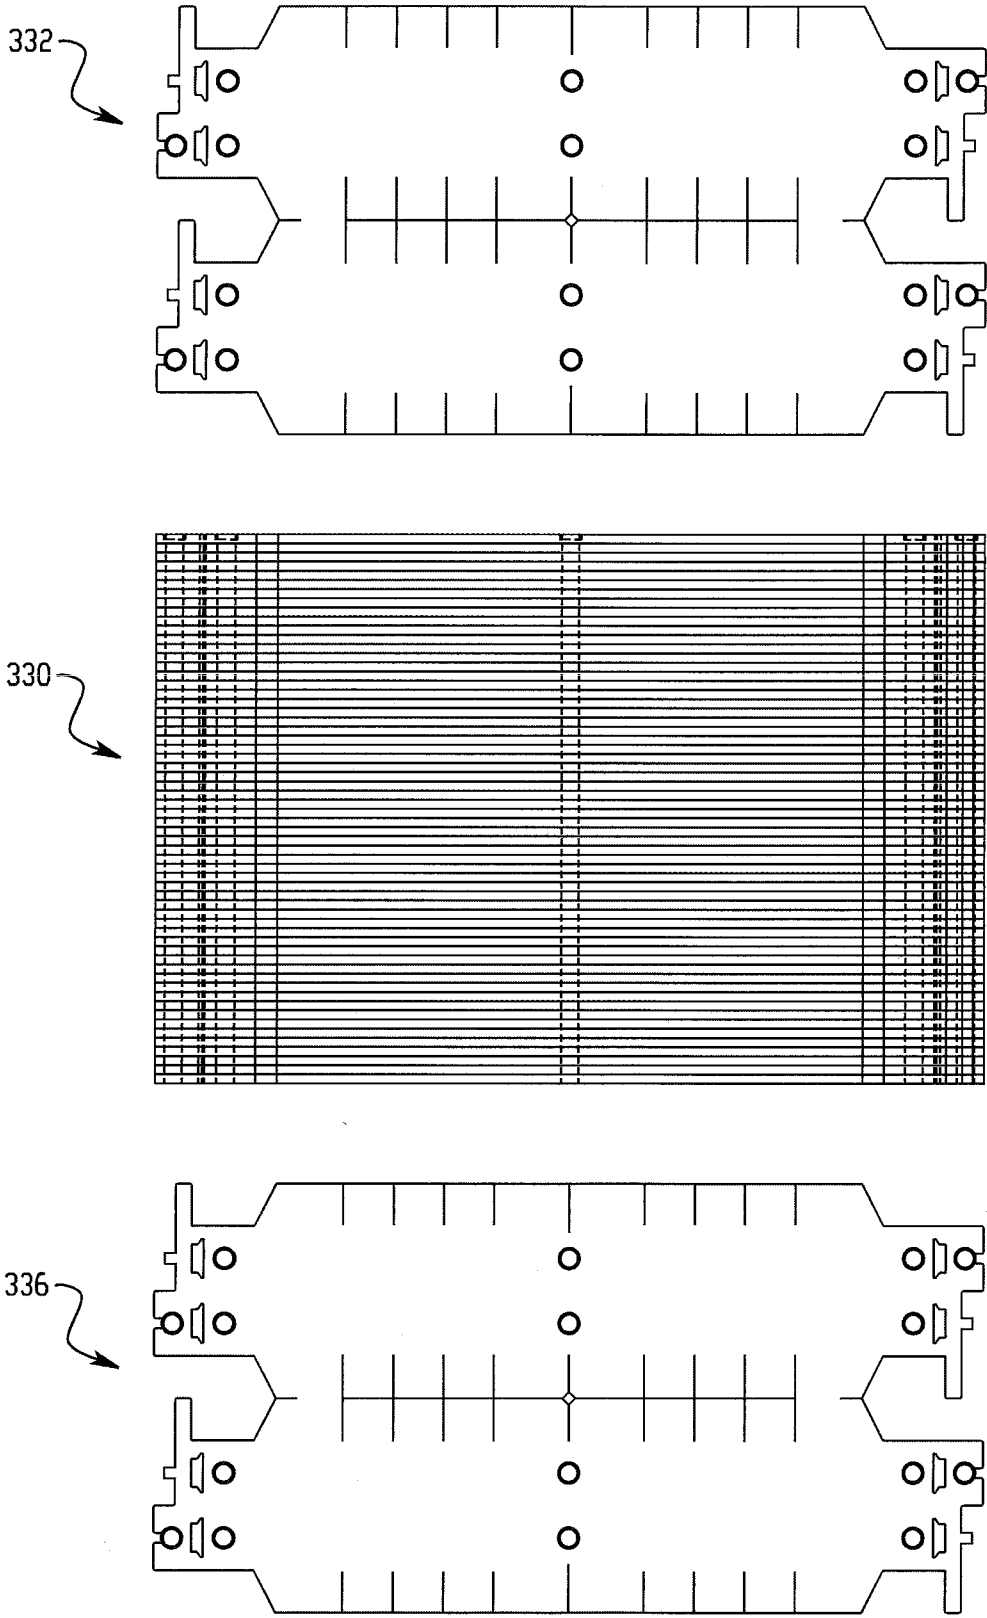


Fig. 11

12/23



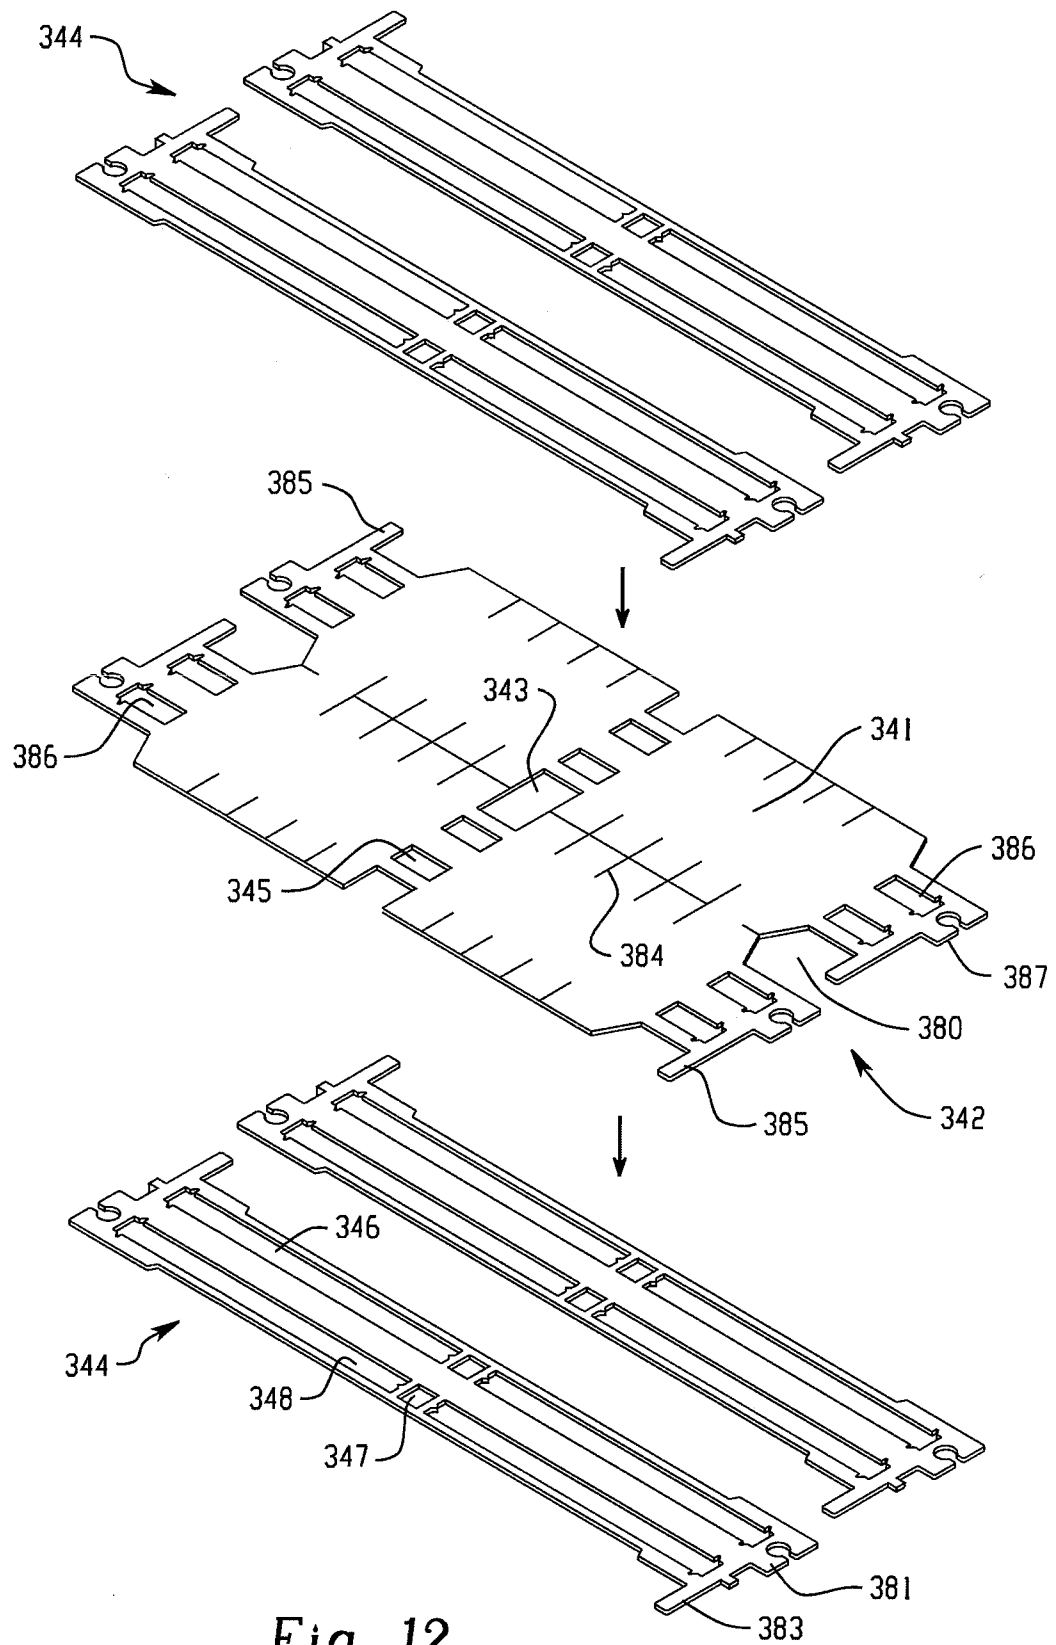


Fig. 12

13/23

*Fig. 13*

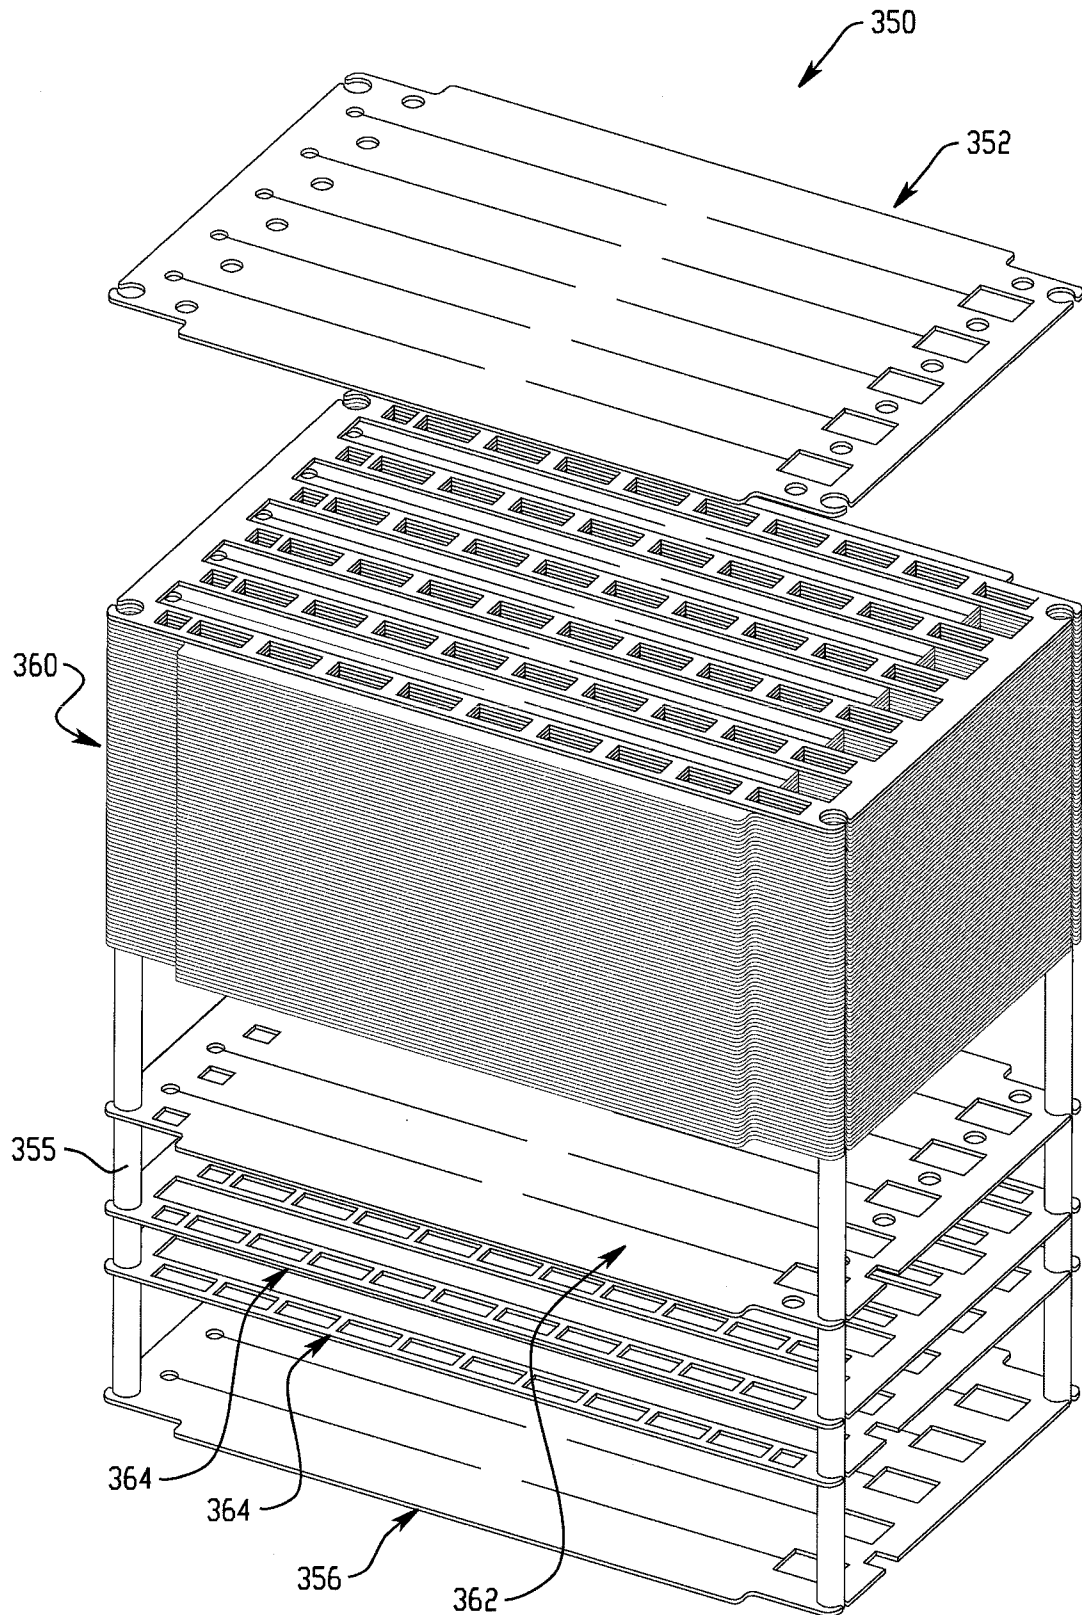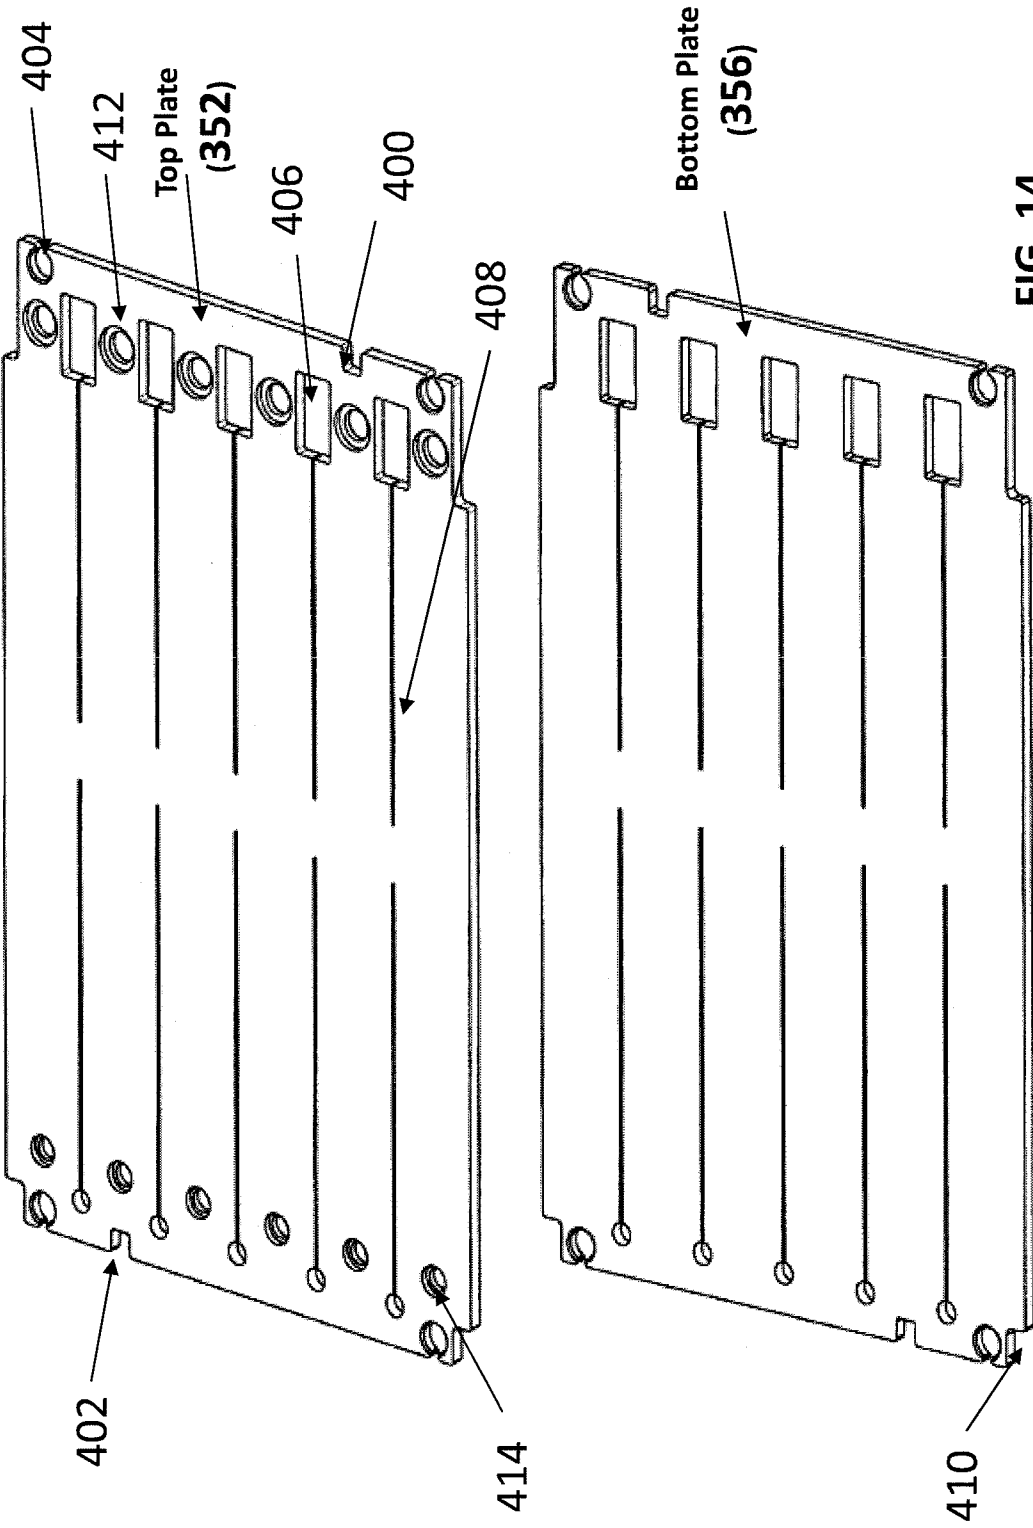

15/23

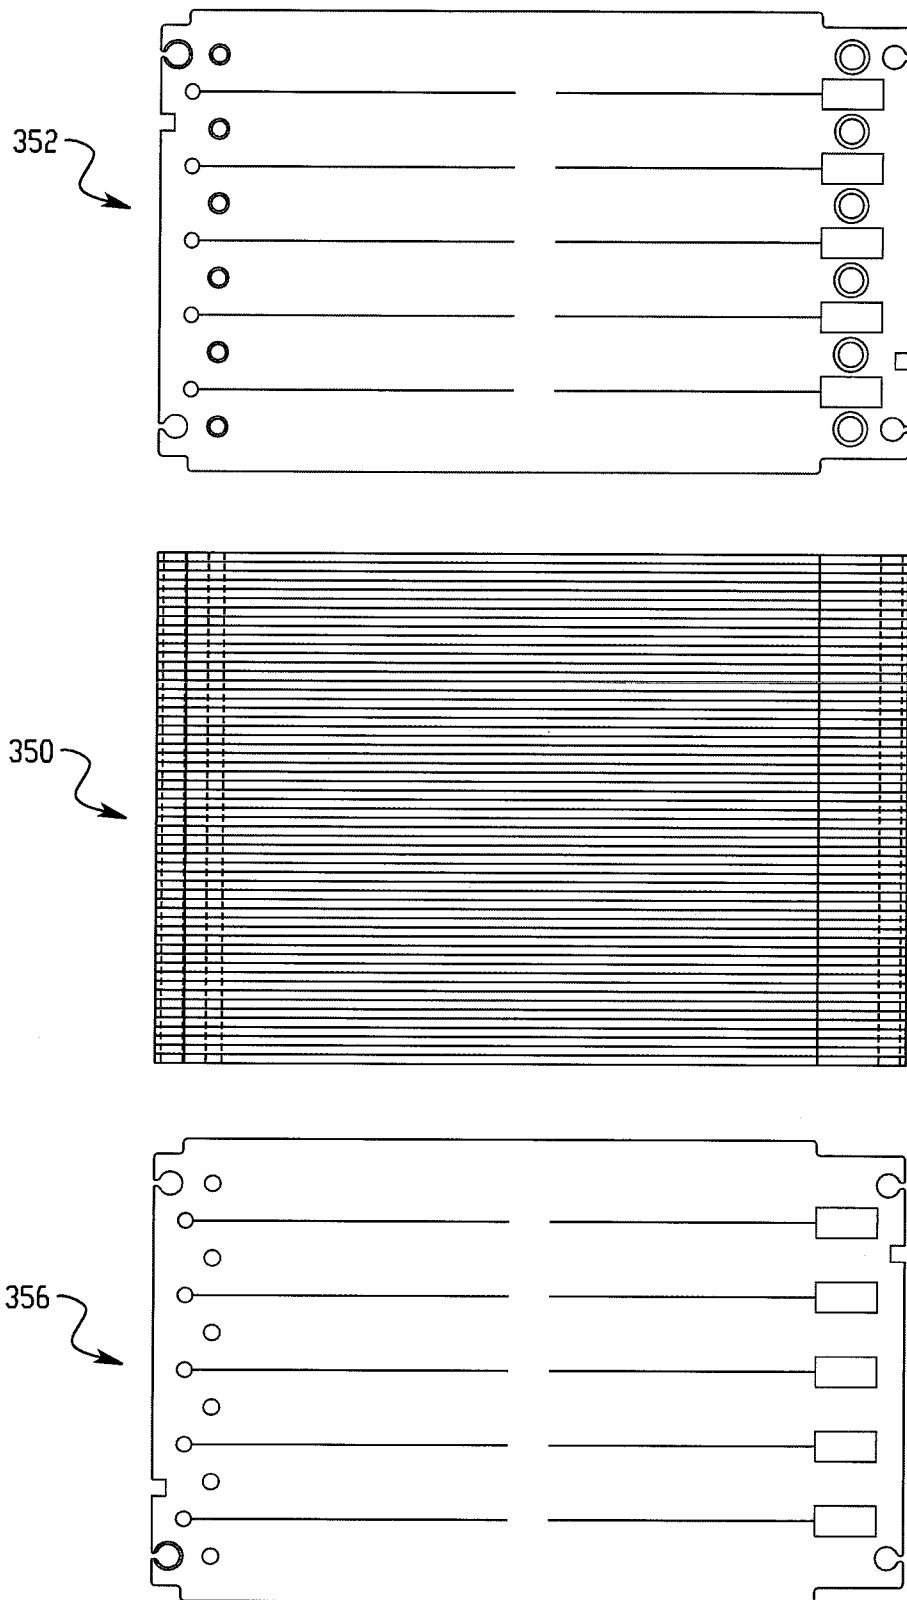
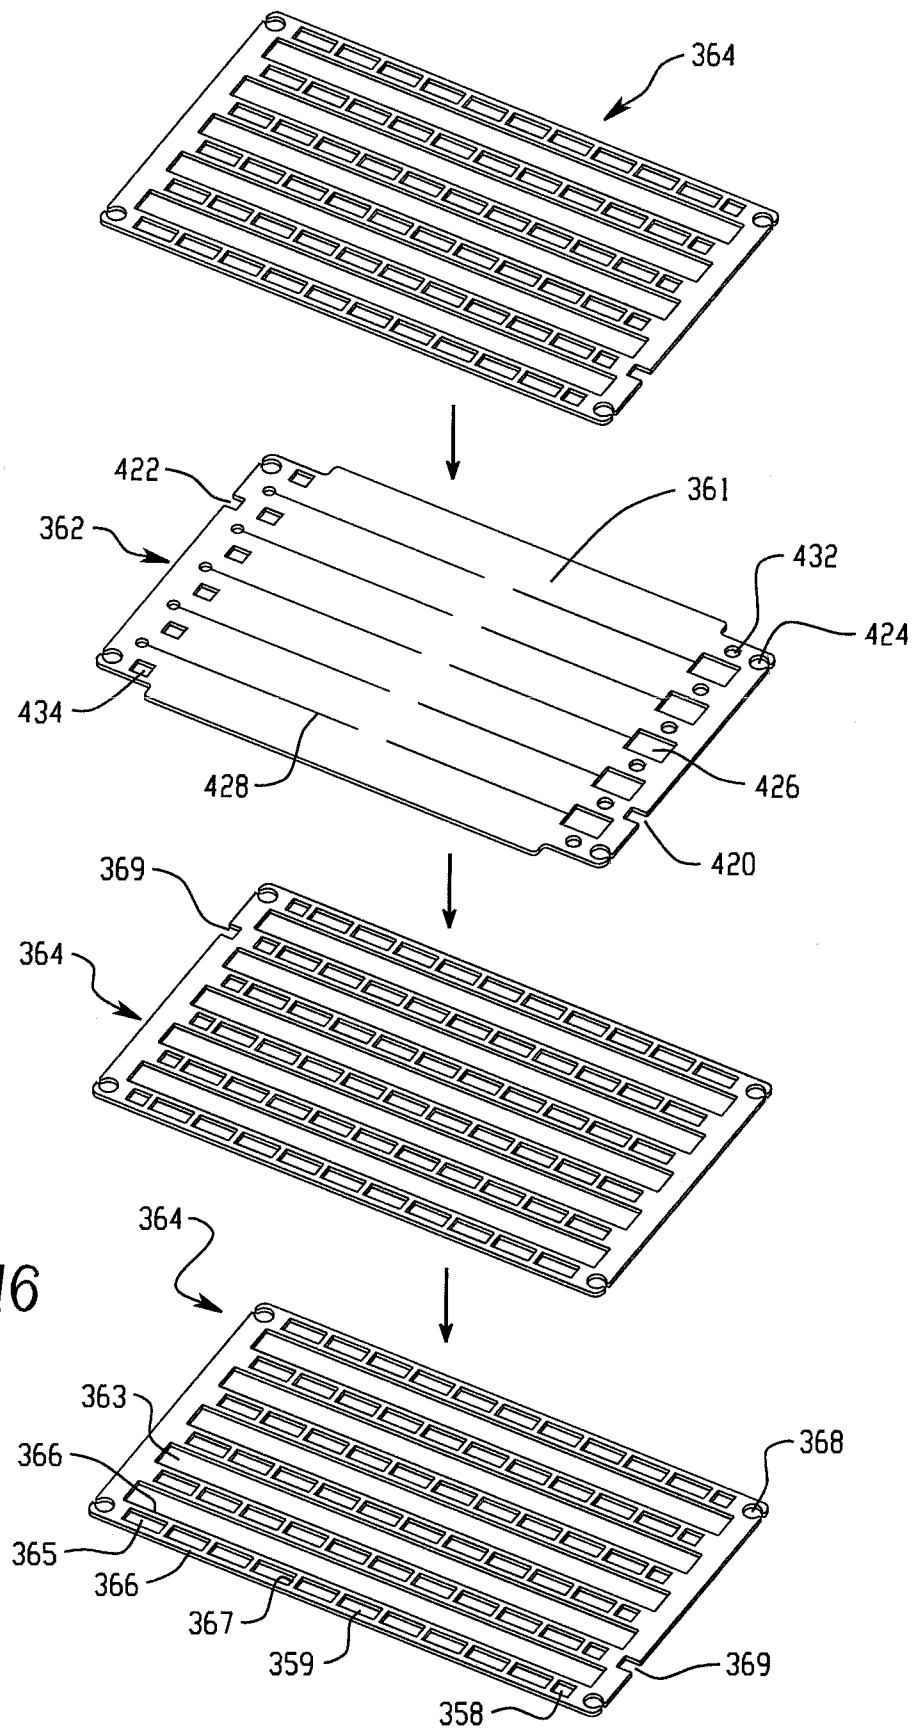


Fig. 15

16/23



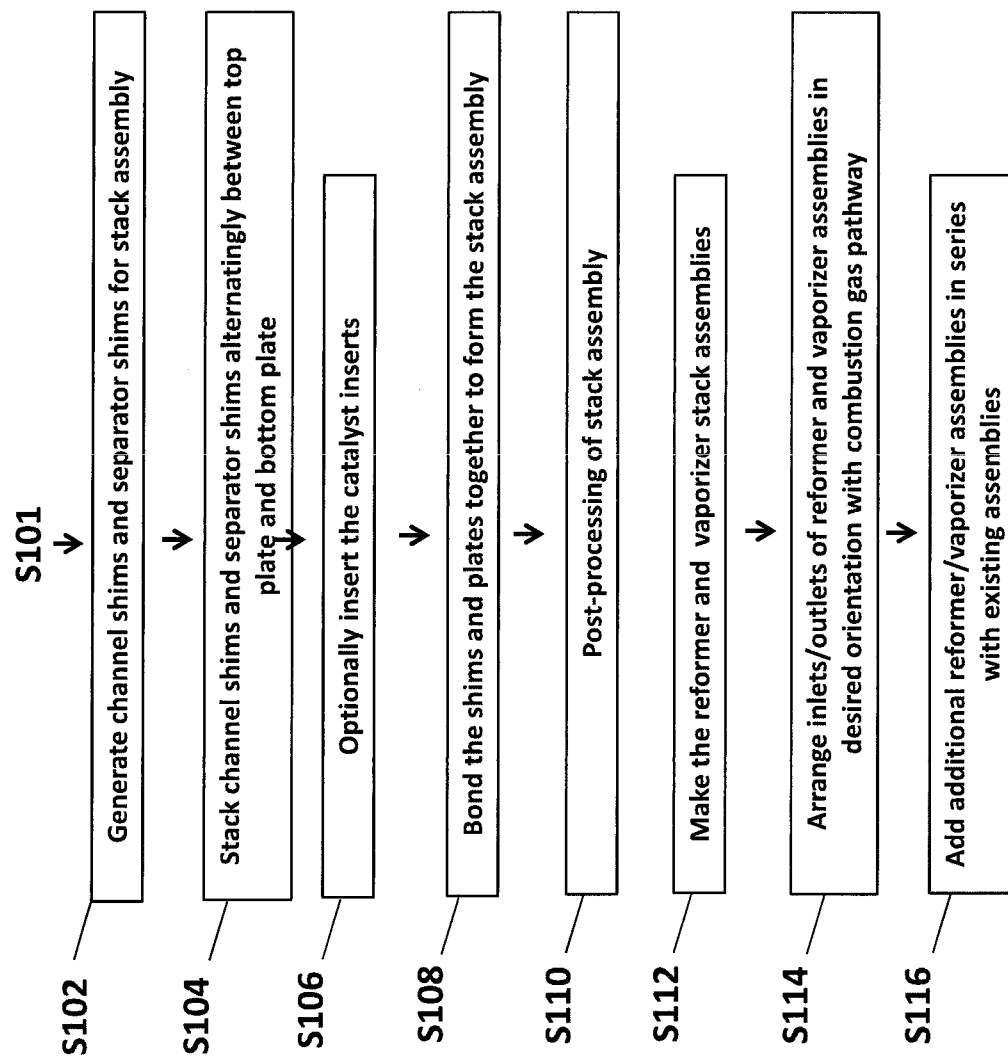


FIG. 17

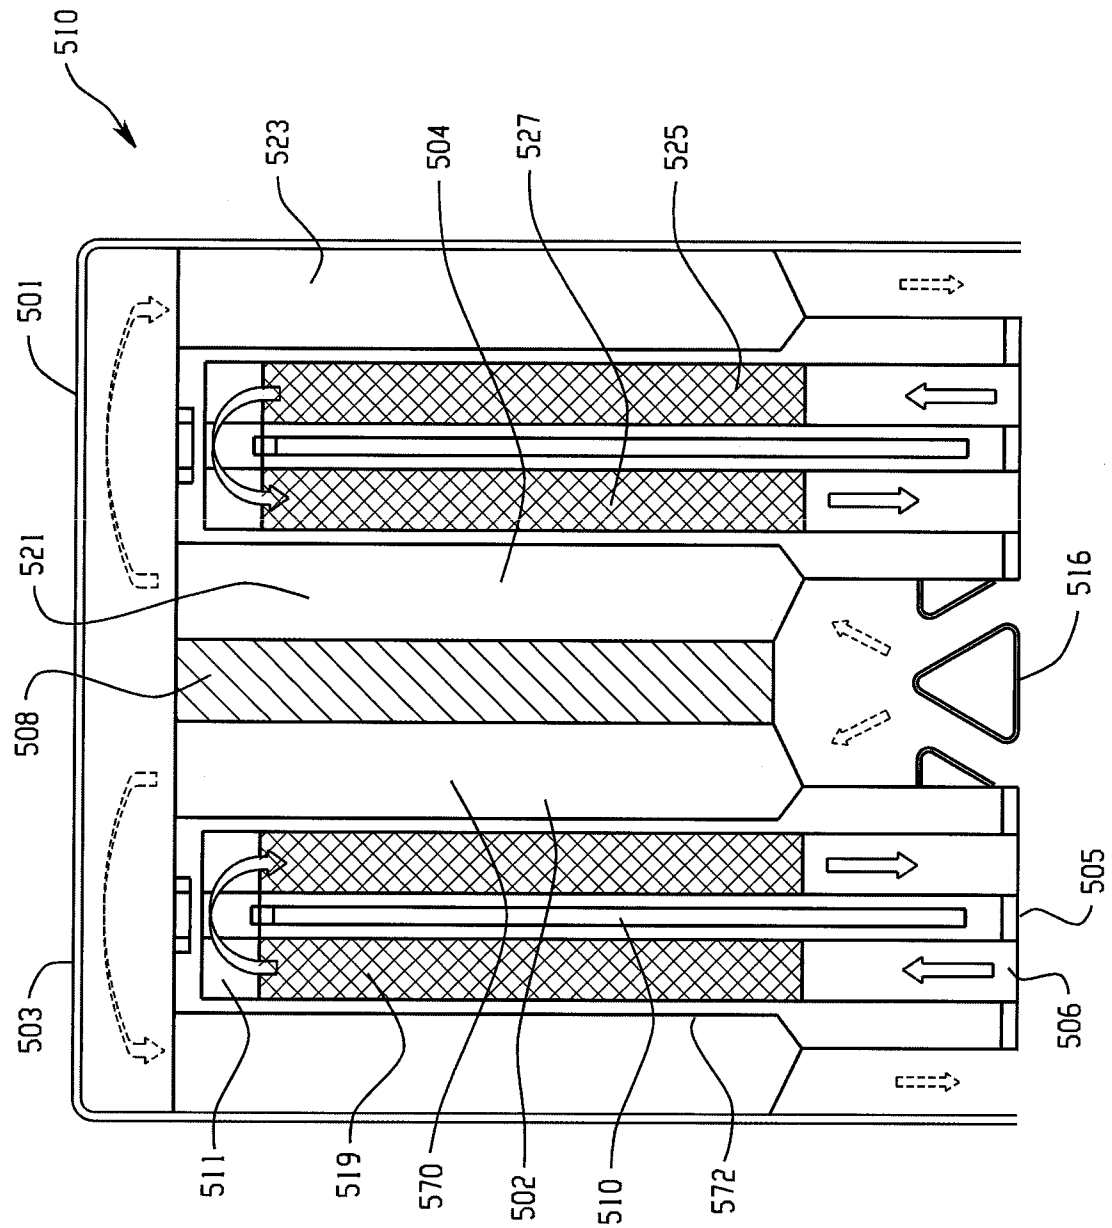


Fig. 18

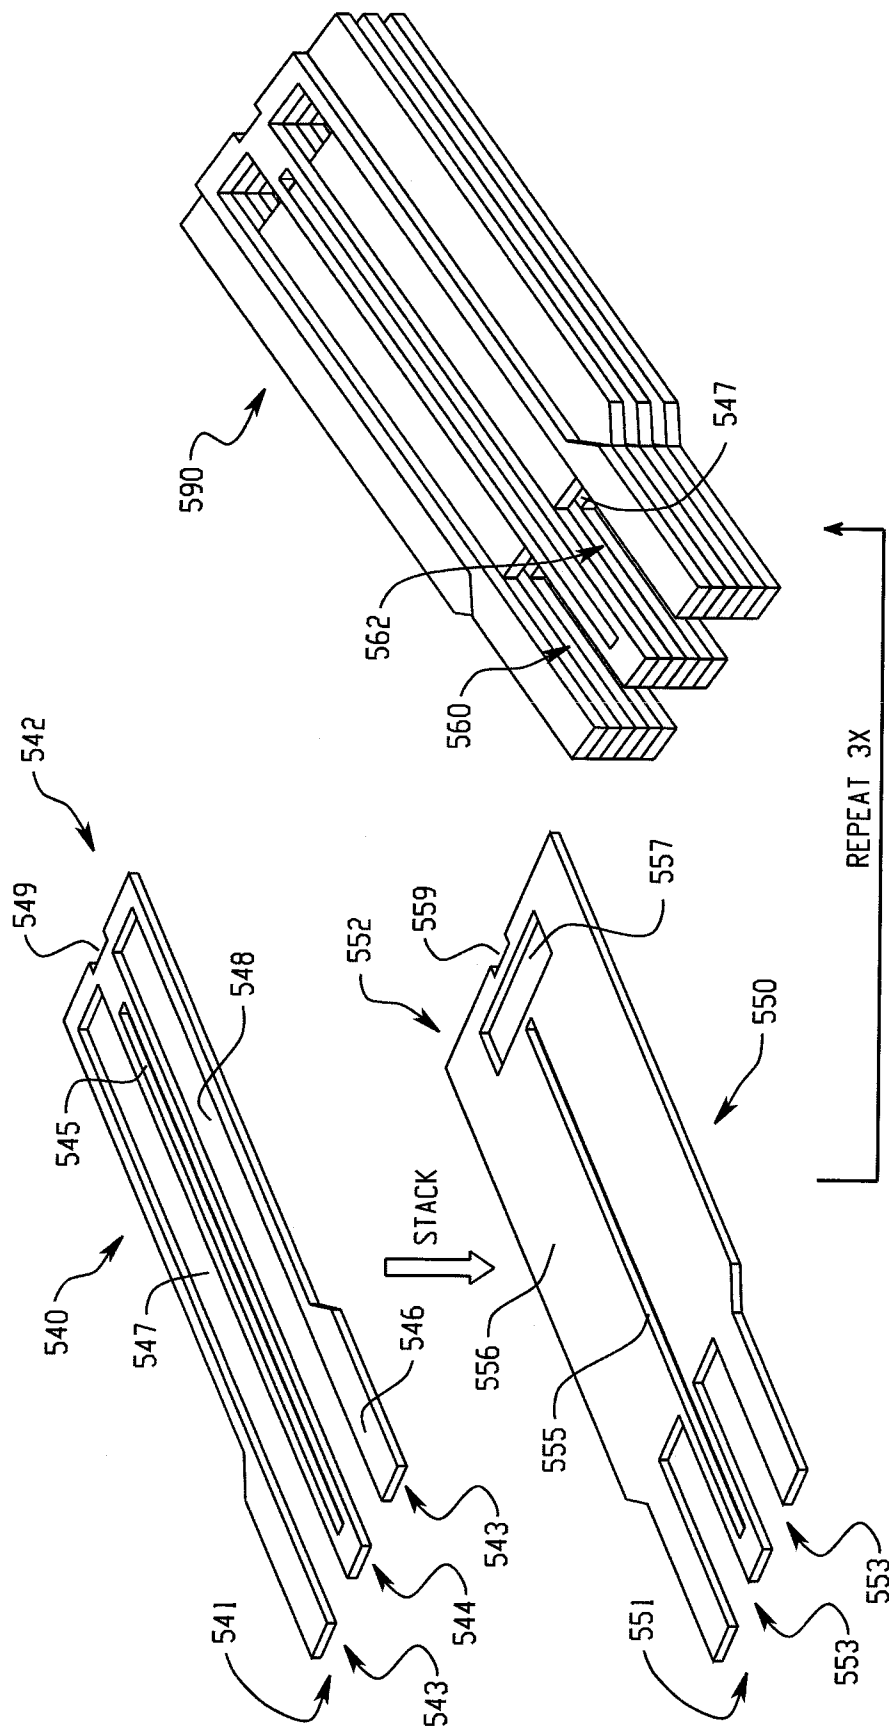
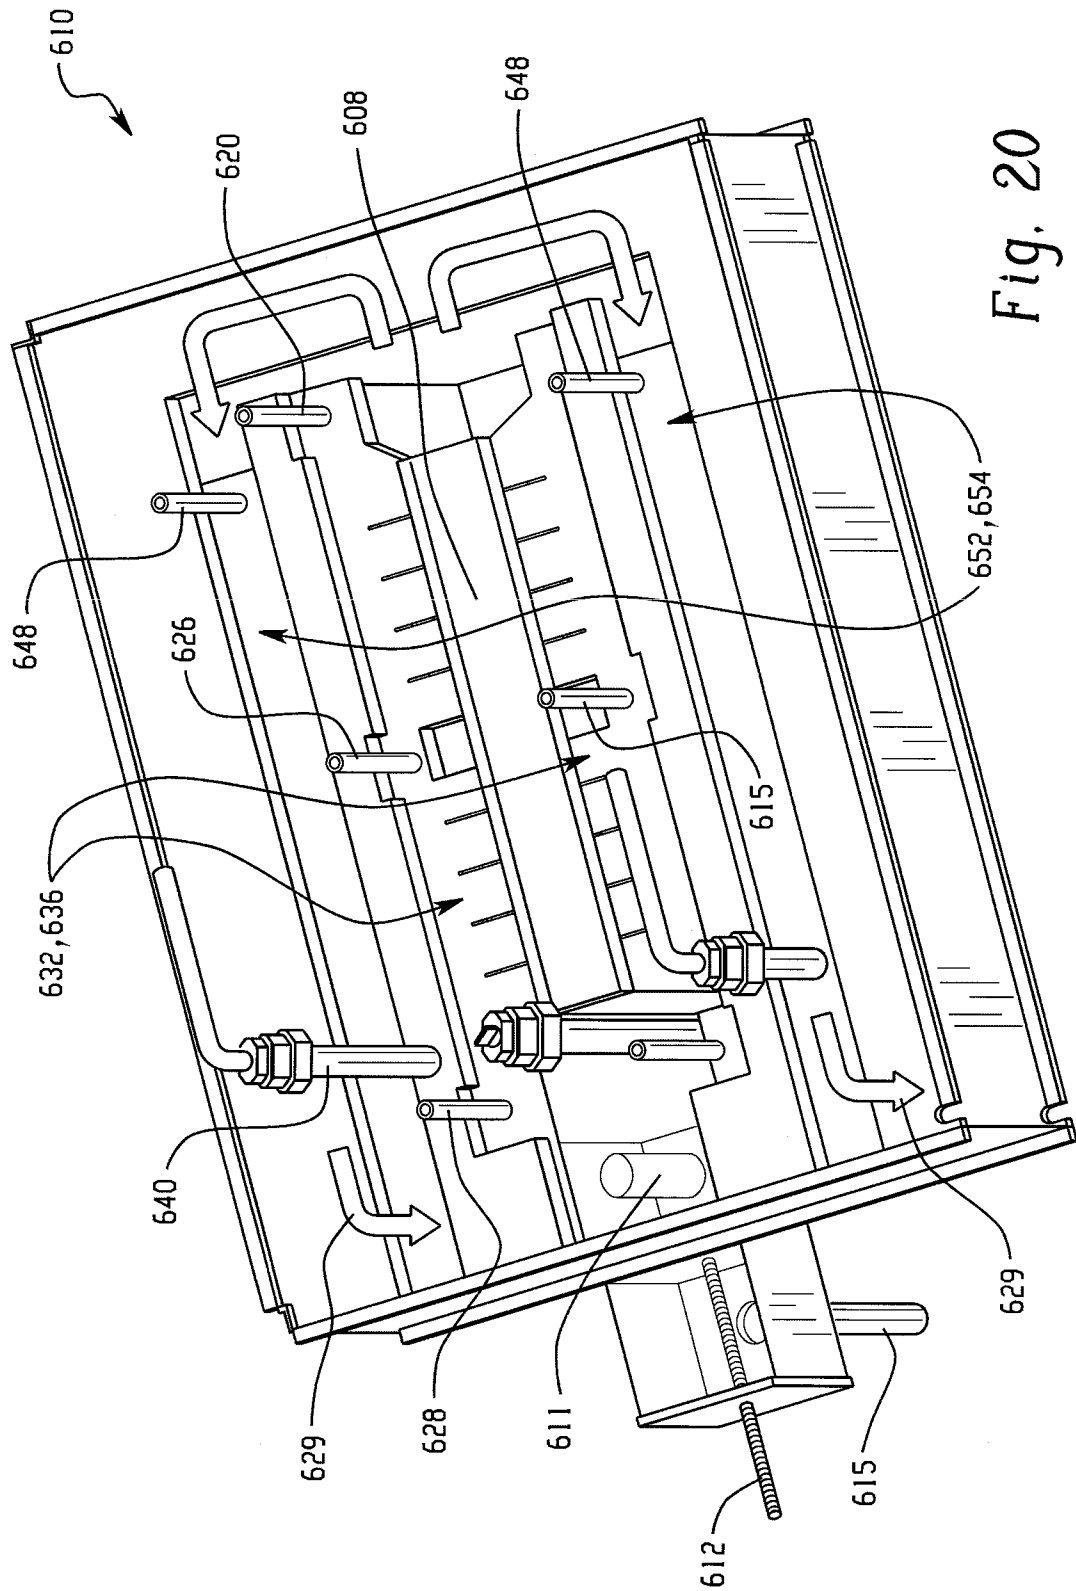


Fig. 19



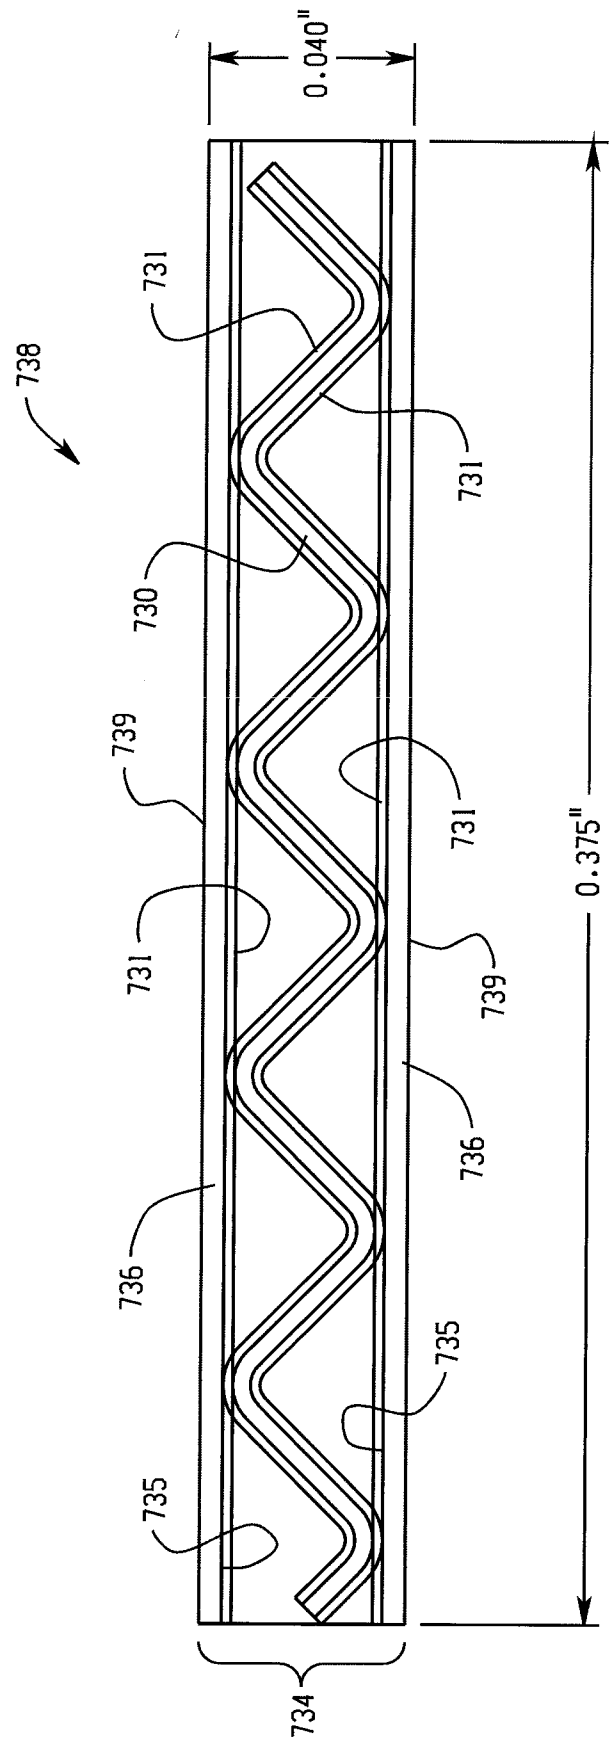


Fig. 21

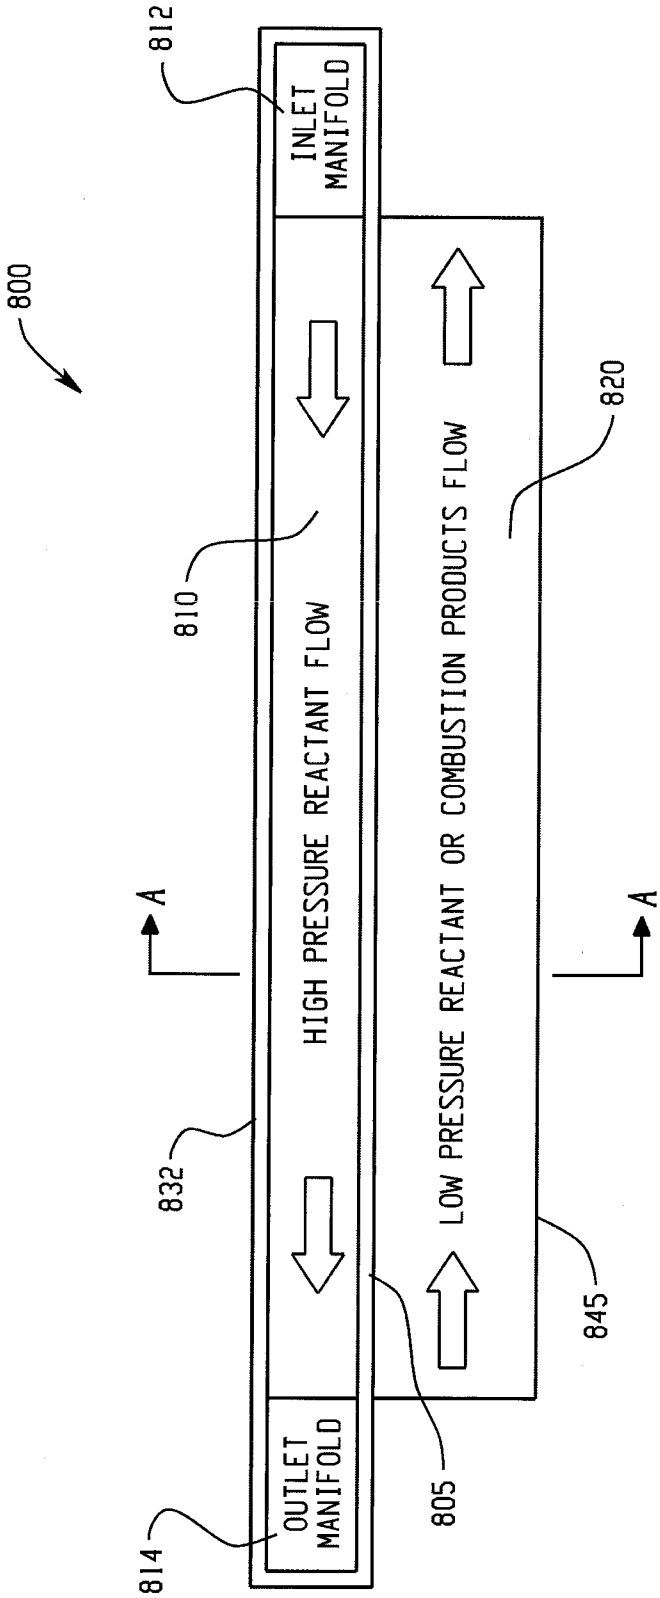


Fig. 22

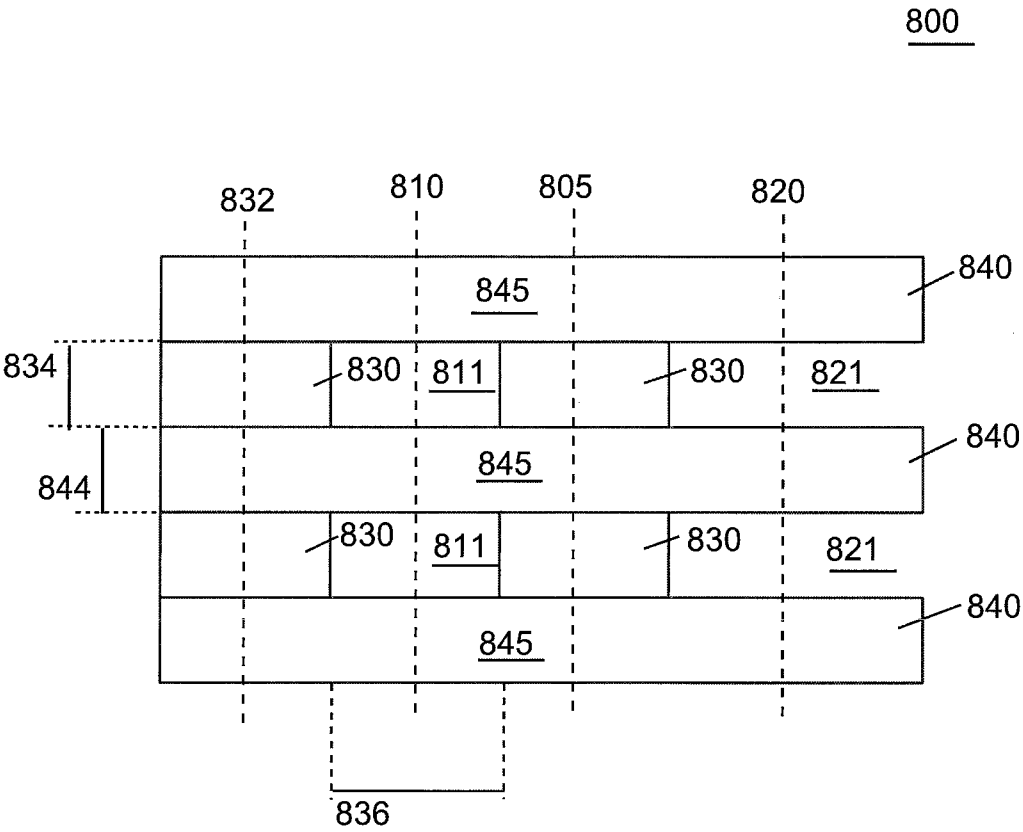


FIG. 23

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/024165

A. CLASSIFICATION OF SUBJECT MATTER

INV. C01B3/38 B01J19/24 B01J19/00 B01J8/06
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C01B B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/247552 A1 (TEGROTENHUIS WARD E [US] ET AL) 10 November 2005 (2005-11-10)	1,3-5,8
Y	paragraphs [0035], [0037] - [0040]	9-16
A	figures 1,2,4	2,6,7, 17-20
Y	----- WO 2004/104140 A1 (BATTELLE MEMORIAL INSTITUTE [US]; WHYATT GREG A [US]; FISCHER CHRISTOP) 2 December 2004 (2004-12-02) the whole document	9-16
A	----- WO 97/14497 A1 (BATTELLE MEMORIAL INSTITUTE [US]) 24 April 1997 (1997-04-24) page 17, line 30 - page 18, line 18; figure 9	1-20
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 May 2014

Date of mailing of the international search report

10/06/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Harf-Bapin, E

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2014/024165

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/064248 A2 (BATTELLE MEMORIAL INST) 22 August 2002 (2002-08-22) the whole document -----	1-20
A	EP 2 161 061 A1 (SAMSUNG SDI CO LTD [KR]) 10 March 2010 (2010-03-10) the whole document -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/024165

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005247552	A1	10-11-2005	NONE
WO 2004104140	A1	02-12-2004	CA 2520597 A1 02-12-2004 EP 1629068 A1 01-03-2006 JP 2007504635 A 01-03-2007 KR 20060007376 A 24-01-2006 US 2006179718 A1 17-08-2006 US 2010248083 A1 30-09-2010 US 2012028142 A1 02-02-2012 WO 2004104140 A1 02-12-2004
WO 9714497	A1	24-04-1997	AT 313775 T 15-01-2006 AT 417662 T 15-01-2009 AU 706870 B2 24-06-1999 BR 9611049 A 28-12-1999 CA 2234831 A1 24-04-1997 DE 69635629 T2 06-07-2006 EP 0862493 A1 09-09-1998 EP 1281922 A2 05-02-2003 EP 1632276 A2 08-03-2006 JP 3710485 B2 26-10-2005 JP 2000506432 A 30-05-2000 KR 20040104739 A 10-12-2004 KR 20060012678 A 08-02-2006 NZ 323724 A 26-05-2000 US 5811062 A 22-09-1998 WO 9714497 A1 24-04-1997
WO 02064248	A2	22-08-2002	BR 0207276 A 20-04-2004 CA 2438733 A1 22-08-2002 CA 2795630 A1 22-08-2002 EP 1360001 A2 12-11-2003 JP 2004537392 A 16-12-2004 KR 20030084934 A 01-11-2003 MX 246820 B 29-06-2007 NO 20033481 A 16-10-2003 RU 2290257 C2 27-12-2006 US 2003072699 A1 17-04-2003 US 2006153751 A1 13-07-2006 US 2011236279 A1 29-09-2011 US 2014134547 A1 15-05-2014 WO 02064248 A2 22-08-2002
EP 2161061	A1	10-03-2010	AT 505245 T 15-04-2011 EP 2161061 A1 10-03-2010 JP 5147804 B2 20-02-2013 JP 2010059050 A 18-03-2010 US 2010058663 A1 11-03-2010