


April 5, 1932.

F. C. COSEO

1,852,699

CUT-OUT

Original Filed Dec. 16, 1925 2 Sheets-Sheet 1

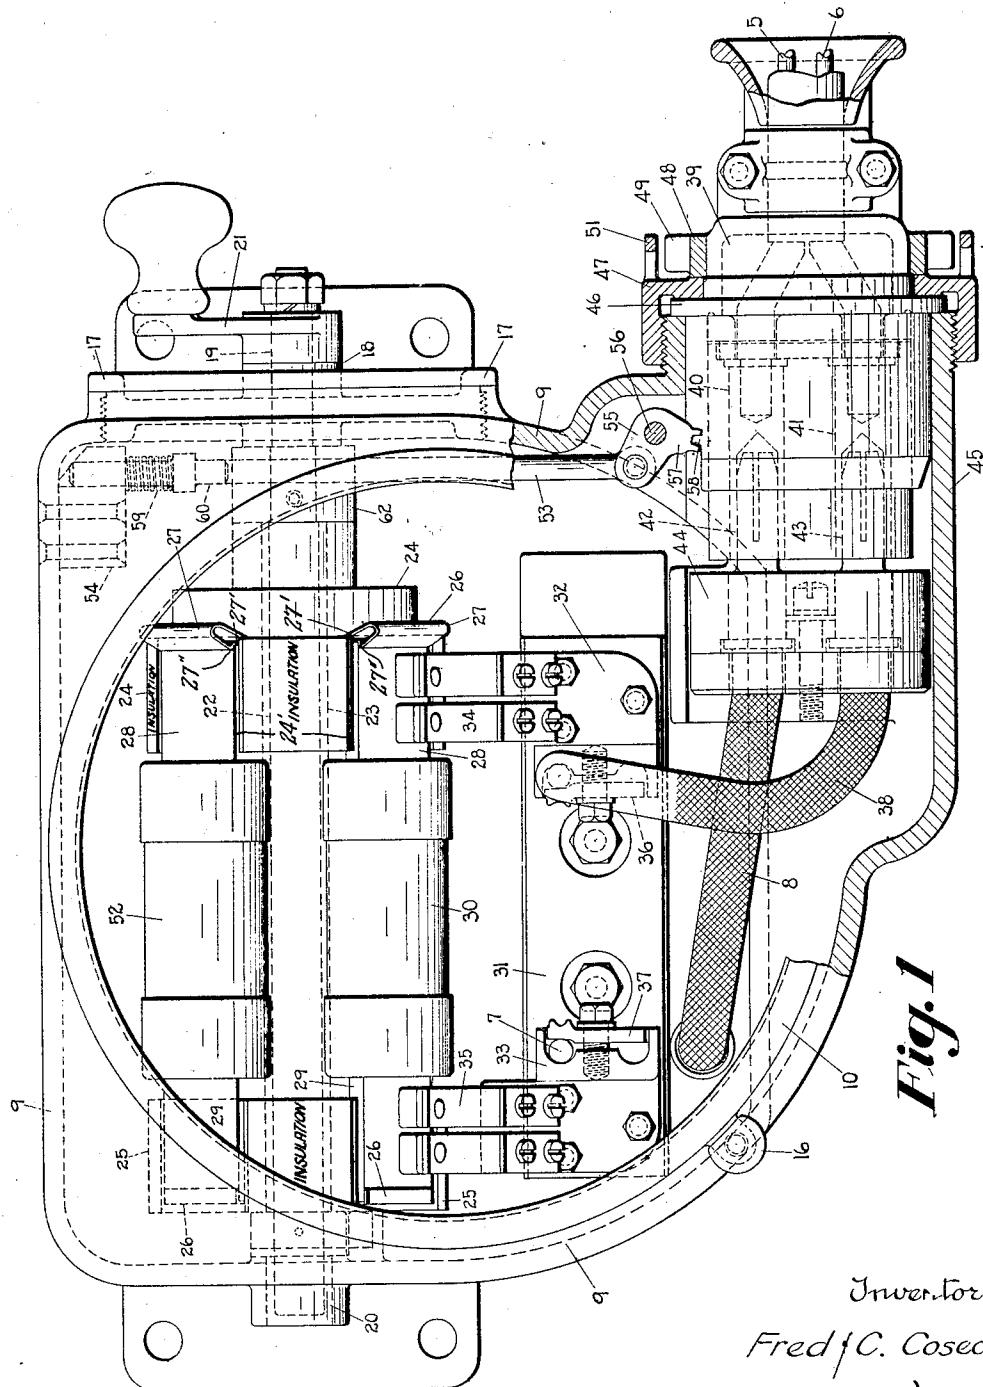

### Inventor

Fred J. C. Coseo.

Cushman, Bryant & Darby  
Attorneys

April 5, 1932.

F. C. COSEO

1,852,699

CUT-OUT

Original Filed Dec. 16, 1925 2 Sheets-Sheet 2

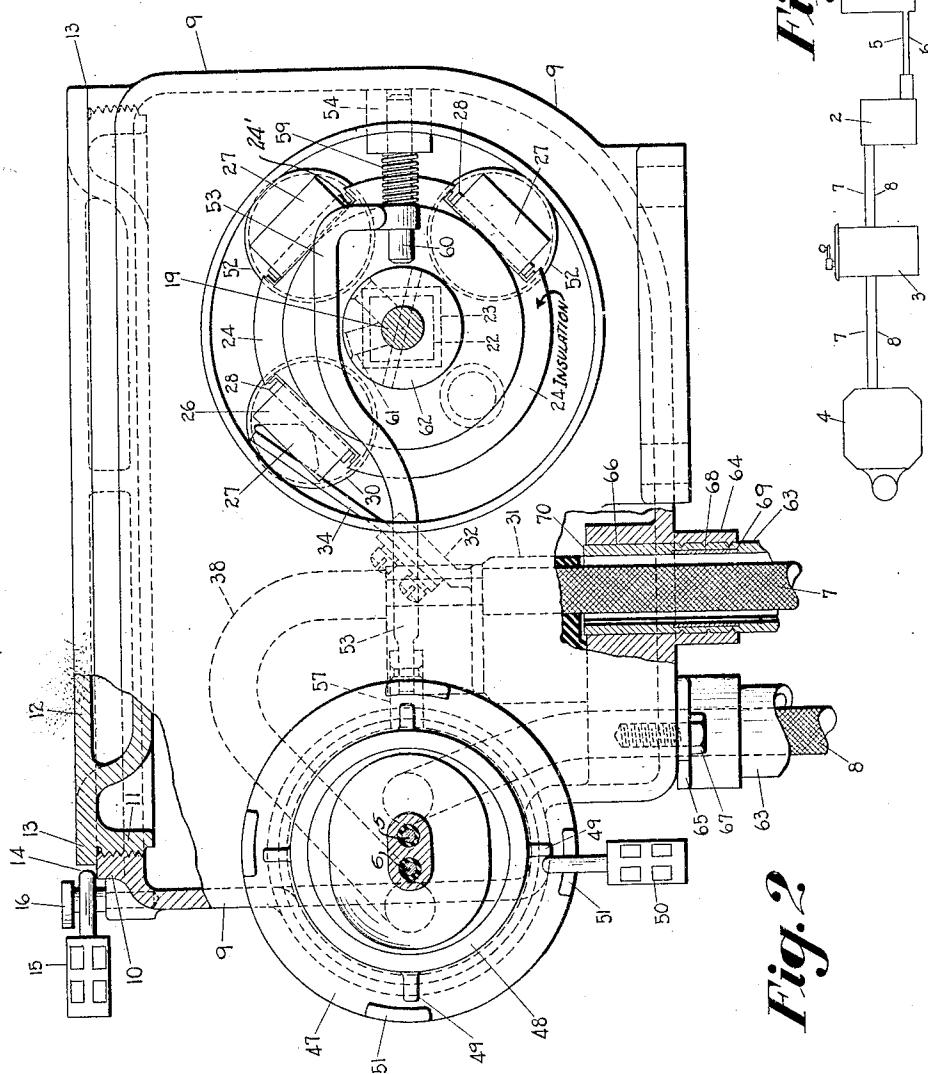


Fig. 2

Fig. 3

Inventor

Fred C. Coseo.

Leinenweber, Bryant & Darby

Attorney

## UNITED STATES PATENT OFFICE

FRED C. COSEO, OF COLUMBUS, OHIO, ASSIGNOR TO THE JEFFREY MANUFACTURING COMPANY, OF COLUMBUS, OHIO, A CORPORATION OF OHIO

## CUT-OUT

Original application filed December 16, 1925, Serial No. 75,828. Divided and this application filed December 12, 1929. Serial No. 413,625.

The present invention relates to certain new and useful improvements in cut-outs adapted to the protection of electric circuits, and particularly to cut-outs of the type having sections of readily fusible conductors adapted to be ruptured by excessive flow of current therethrough.

5 The especial object of this invention is to provide a cut-out having a plurality of fuses adapted to be successively and expeditiously connected into an electric circuit.

10 A further object is to provide a cut-out enclosed in a gas tight casing adapted to exclude explosive gas laden atmosphere of a coal mine from contact with elements subject to electric charge, and having means whereby the successive fuses may be connected into a circuit without admitting the mine atmosphere to the interior of the casing.

15 20 A further object is to provide apparatus such as above described with means to insure against accidental or unauthorized admission of the external atmosphere to the interior of the casing.

25 The means whereby I attain these objects are fully set forth in the following specification, and illustrated in the accompanying drawings of which—

30 Fig. 1 is a front elevational view of the preferred embodiment of my invention, showing the front cover removed and certain parts of the casing broken away to reveal the interior mechanism.

35 Fig. 2 is an end view of the apparatus disclosed in Fig. 1, partly in section, and having the operating handle and top cover plate removed to reveal the interior mechanism.

40 Fig. 3 is a diagrammatic illustration of an electric circuit which includes my improved cutout.

Like numerals refer to similar parts in the several figures.

In my co-pending application, Ser. No. 75,828, filed December 16th, 1925, of which 45 this application is a division, I have shown an electric cut-out enclosed in an explosion proof case to which is connected two conduits equipped with the devices of my present invention.

50 To facilitate the description of my im-

proved cut-out I have provided, in Fig. 3 of the drawings, a diagrammatic illustration of the principal electric circuits of a locomotive adapted to the haulage of coal in a mine.

55 In this diagram the numeral 1 indicates a storage battery, or other suitable and convenient source of electric current supply. The numeral 2 indicates, as an entirety, a cut-out of the class to which my invention relates. The numeral 3 indicates a controller of the common and well known type whereby the flow of electric current may be regulated in the motor 4. The battery 1 is connected with the cut-out 2 by two conductors 5 and 6 which are preferably encased in a flexible 60 conductor cable of the type commonly used in coal mining apparatus, and the cut-out 2 is connected with the controller 3 and motor 4 through the conductors 7 and 8 which are preferably a part of the permanent wiring of 65 the locomotive.

70 In Figs. 1 and 2 of the drawings the numeral 9 refers to a casing which is preferably formed of cast metal, but which may, if desired, be fabricated in any other convenient 75 manner. The casing 9 has a relatively large circular window at its front side to afford access to the mechanism mounted within. On the edge 10 of the circular window are formed screw threads adapted to engage corresponding threads formed on an annular flange 11 of the circular cover plate 12. Formed on the cover plate 12 and projecting beyond the annular flange 11, is a circular 80 flange 13 the face of which is finished to engage a correspondingly finished face of the casing 9 to form a gas tight joint when the cover plate 12 is screwed firmly to place. The flange 13 is notched at 14 to receive the 85 hasp of a padlock 15 when it is placed upon the studs 16 of the casing, and by that engagement prevents rotation of the plate in the unscrewing direction to break the seal of the casing.

90 Formed in one end of the casing 9 is a second circular aperture having a cover plate 17 screw threaded in place and adapted to form a gas tight joint in the same manner as that above described. At the center of the 95 cover plate 17 there is formed a journal bear- 100

ing 18 in which is rotatively mounted a shaft 19 which projects on both sides of said cover plate. When the cover plate 17 is in operative position, the inner end of the shaft 19 is engaged by a journal bearing 20 formed in the metal of the opposite wall of the casing, and to the outer end of this shaft 19 is fixed an operating handle 21 whereby said shaft may be conveniently rotated. The middle portion 22 of the shaft 19, between the journal bearings 18 and 20, is preferably formed square for the more convenient attachment of parts intended to rotate with the shaft, and this square portion 22 is preferably encased in an insulating sleeve 23 to insure against its accidental connection with the electrically charged parts of the apparatus. Mounted upon the square portion 22 of the shaft 19 are two suitably shaped blocks 24 and 25 formed of suitable insulating material, and spaced apart longitudinally of the shaft, to each of which is attached a plurality of metal plates 26. Upon each of the plates 26 is formed a spring clip 27 adapted to receive and securely hold in place the axially projecting metallic terminal strips 28 and 29 of the cylindrical fuse cartridge 30 of the common and well known type. A block of suitable insulating material 31 rigidly attached to the back walls of the casing 9, supports two brush holders 32 and 33 to which are secured the brushes 34 and 35 respectively. The brushes 34 and 35 are of the type commonly used in electric controllers and similar apparatus, and are adapted to simultaneously contact with the terminals 28 and 29 of one of the fuse cartridges 30, in such manner that by rotation of the shaft 19 the cartridges 30 may be successively connected between the brush holders 32 and 33. The brush holders 32 and 33 are each provided with clamping members 36 and 37 whereby permanent connection is made with the conductors 7 and 38.

As shown in Figure 2, block 24 is circular and is provided on its circumferential face with recesses 24' in which the ends 28 of the fuses are seated. Block 25 is similar in form to block 24. The clips 27 which are positioned above the recesses have offset portions 27' which engage the ends of the terminal strips to prevent longitudinal displacement of the fuses and shoulders 27'' which engage over the ends to prevent radial movement of the fuses away from the holder. The terminal strips are released by pressing clips 27 toward plate 26.

As may be seen by reference to Figure 2, recesses 24' are of such depth that the top lateral edges of the terminal strips are flush with the marginal portions of the block adjacent the recesses, so that the brushes may ride smoothly on and off the strips.

In the illustration of my invention here presented provision is made for the con-

nection of the cut-out 2 with a source of electric supply by means of a removable plug 39 having, in this instance, two contact members 40 and 41 which are normally soldered to the ends of the conductors 5 and 6 of the flexible conductor cable above referred to. The contact members 40 and 41 are adapted to engage with metallic studs 42 and 43 supported upon an insulating base 44 positioned in the cylindrical extension 45 of the casing. These parts are so proportioned that when the plug 39 is thrust into the cylindrical extension 45 to cause the connection of the members 40 and 41 with the studs 42 and 43, said plugs will effectively close said cylindrical extension to prevent the passage of gases to or from the interior of the casing. A flange 46 formed upon the plug 39 projects over the end of the cylindrical casing 45 and this flange is engaged by a ring 47 which is screw threaded and adapted to engage corresponding screws formed on the outside of the extension 45 to securely hold the plug 39 in its operative position. A collar 48 pinned to the plug 39 prevents the accidental separation of the ring 47 from the plug 39, and on this collar is formed a plurality of radially extending projections 49 each adapted to engage the hasp of a padlock 50 when it is in place upon a lug 51 formed on the ring 47. By such engagement of one of the projections 49 with the padlock 50 rotative movement of ring 47 is limited to such an extent as to insure against the unauthorized removal of the plug 39 from the cylindrical extension 45. A conductor 38 extends from the stud 43 to the brush holder 32, and the other stud 42 is in permanent connection with the conductor 8 of the locomotive circuit. By the arrangement of parts above described the battery 1 may be connected with the controller 3 and motor 4 in such manner as to include one of the fuses 30, and thereby protect the apparatus from injury by an excessive flow of electric current. If a fuse 30 is burned in service, due to overload, rotation of the handle 21 will remove the terminals 28 and 29 of the burnt fuse from contact with the brushes 34 and 35 and move a second fuse 52 into operative relation therewith, restoring the insurance against possible ignition of an explosive atmosphere by the accidental formation of electric arc at the terminals of the fuse.

To insure the opening of the electric circuit before the removal of the plugs 39, I have provided interlocking mechanism connecting said plug with the shaft 19, comprising a rod 53 one end of which is slidable in a bearing 54 of the casing, and the other end pivotally attached to one arm of a bell crank 55 which is mounted upon the pivot 56 of the casing. On the arm 57 of the bell crank 55 is formed fingers adapted to engage a lug 58 formed upon the side of the plug 39, in such manner that when said plug is in opera-

tive position the rod 53 will be held at one extremity of its longitudinal movement. A spring 59 is arranged to move said rod longitudinally in the opposite direction when the plug 39 is withdrawn from the casing. A lug 60 formed on the rod 53 is adapted, by its engagement with an aperture 61 in the collar 62 fixed to the shaft 19, when the plug is withdrawn, to prevent rotation of said shaft, and the parts are so shaped and arranged as to prevent withdrawal of the plug 39 when the shaft 19 is so turned that the aperture 61 is out of alignment with the plug 60. By this arrangement of parts the plug 39 may not be withdrawn from the cylindrical extension 45 of the casing while the brushes 34 and 35 are in contact with the terminals 28 and 29 of the fuse cartridge 30, nor can the fuse cartridge 30 be moved into connection with the brushes 34 and 35 while the plug 39 is withdrawn from the casing.

In order to complete the gas proof enclosure of the apparatus, I have provided conduits 63 extending from the casing 9 of the cut-out 2 to the gas tight casing of the controller 3 and the motor 4. These conduits 63 are preferably formed of flexible tubing, such for example as rubber and fabric hose, which is impervious to gas and affords desirable mechanical protection against abrasion of the insulation of the enclosed conductors. Adjacent the end of the conduit 63 is placed a coupling fitting having a sleeve 64 which closely fits the outside of the conduit, and a flange 65 which is faced to form a gas tight joint with a suitable finished surface surrounding an aperture 66 of the casing 9, and is securely clamped thereto by suitable machine screws 67. On the inner surface of the sleeve 64 there are formed one or more annular flanges 68 adapted to be forced into the material of the conduit by the expansion of a thimble 69 which is rolled into the conduit when the parts are assembled, to securely hold the parts together and insure the joint against leakage. A projecting end 70 of the conduit extends through the aperture 66 to afford mechanical protection to the installation of the conductor. The connections of the conduits 63 with the casing of the controller, motor, or other elements of the apparatus, may be made in the same manner as with the cut-out 2, thereby providing a complete unitary system of protection from explosion for the entire apparatus, whereby the said apparatus may be protected, not only from accidental ignition of the gas charged atmosphere, but also from unauthorized or malicious tampering with the protecting agencies.

I claim:

1. In apparatus of the class described, the combination with a fuse cartridge having axially projecting terminal strips, of a movable support for said cartridge comprising

spaced blocks provided with recesses for receiving the strips in flush relation to the adjacent block surfaces, means for retaining the strips in said recesses with a face portion of each strip exposed, and brushes arranged to ride on or off said exposed portions from or to the adjacent block surfaces upon movement of the support. 70

2. In apparatus of the class described, the combination with a fuse cartridge having axially projecting terminal strips, of a movable support for said cartridge comprising spaced blocks provided with recesses for receiving the strips in flush relation to the block surfaces, means gripping the longitudinal extremities of the strips for retaining the strips in said recesses with a face portion of each strip intermediate the cartridge end and gripping means exposed, and brushes arranged to ride on or off said exposed portions from or to the adjacent block surfaces upon movement of the support. 80

3. In apparatus of the class described, the combination with a fuse cartridge having axially projecting terminal strips, of a movable support for said cartridge comprising spaced blocks upon which said strips rest, means gripping the longitudinal extremities of the strips for holding them on the blocks with a face portion of each strip intermediate the cartridge end and gripping means exposed, and brushes arranged for cooperation with said exposed portions. 90

4. In apparatus of the class described, the combination with a fuse cartridge having axially projecting terminal strips, of a movable support for said cartridge comprising spaced blocks upon which said strips rest, and spring clips mounted on the blocks and having shoulder portions engageable over the strip extremities to hold the strips on the blocks with face portions thereof exposed, and brushes arranged for cooperation with said exposed portions. 100

5. In apparatus of the class described, the combination with a fuse cartridge having axially projecting terminal strips, of a rotary support for said cartridge comprising spaced circular blocks in coaxial relation and provided with recesses for receiving the strips in flush relation to the adjacent block surfaces, means for retaining the strips in said recesses with a face portion of each strip exposed, and brushes arranged to ride on or off said exposed portions from or to the adjacent block surfaces upon movement of the support. 110

In testimony whereof I have hereunto set my hand.

FRED C. COSEO. 125