

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 May 2003 (30.05.2003)

PCT

(10) International Publication Number  
WO 03/044071 A1

(51) International Patent Classification<sup>7</sup>: C08G 18/10, 18/75, G02B 1/04

(21) International Application Number: PCT/US02/36471

(22) International Filing Date:  
14 November 2002 (14.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/332,827 16 November 2001 (16.11.2001) US  
10/287,880 5 November 2002 (05.11.2002) US

(71) Applicant: PPG INDUSTRIES OHIO, INC. [US/US];  
3800 West 143rd Street, Cleveland, OH 44111 (US).

(72) Inventors: NAGPAL, Vidhu, J.; 5005 Impala Drive, Murrysville, PA 15668 (US). MCDONALD, William, H.; 803 Dog Wood Trail, Cranberry Township, PA 16066 (US). SMITH, Robert, A.; 3517 McElroy Drive, Murrysville, PA 15668 (US).

(74) Agents: MARMO, Carol, A. et al.; PPG Industries, Inc., One PPG Place, Pittsburgh, PA 15272 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 03/044071 A1

(54) Title: IMPACT RESISTANT POLYUREAURETHANE AND METHOD OF PREPARATION

(57) Abstract: The present invention relates to a polyether-containing polyureaurethane. The polyureaurethane can include a prepolymer comprising a polyisocyanate and a polyether-containing polyol material. The prepolymer can be reacted with an amine-containing curing agent to produce the polyureaurethane of the present invention. In an embodiment, the polyether-containing polyureaurethane when at least partially cured and when tested as a lens with a hard coating on both surfaces having a maximum center thickness of 2.2 mm in a plano configuration, can have an impact resistance of at least 148 feet per second as defined by The High Impact Test.

IMPACT RESISTANT POLYUREAURETHANE  
AND METHOD OF PREPARATION

5        This application is a conversion of United States Provisional Patent Application having Serial No. 60/332,827, filed on November 16, 2001.

      The present invention relates to a polyether-containing polyureaurethane.

      In general, an optically transparent plastic material is characterized by its impact resistance, and the temperature and pressure at which the material undergoes 10 distortion.

      There is a need for a polyureaurethane having a high impact resistance.

      It is noted that, as used in this specification and the appended claims, the singular forms "a," "an," and "the" include plural referents unless expressly and unequivocally limited to one referent.

15      For the purposes of this specification, unless otherwise indicated, all numbers expressing quantities of ingredients, reaction conditions, and so forth used in the specification and claims are to be understood as being modified in all instances by the term "about." Accordingly, unless indicated to the contrary, the numerical parameters set forth in the following specification and attached claims are 20 approximations that may vary depending upon the desired properties sought to be obtained by the present invention. At the very least, and not as an attempt to limit the application of the doctrine of equivalents to the scope of the claims, each numerical parameter should at least be construed in light of the number of reported significant digits and by applying ordinary rounding techniques.

25      Notwithstanding that the numerical ranges and parameters setting forth the broad scope of the invention are approximations, the numerical values set forth in the specific examples are reported as precisely as possible. Any numerical value, however, inherently contain certain errors necessarily resulting from the standard deviation found in their respective testing measurements.

30      The present invention includes a polyether-containing polyureaurethane, said polyether-containing polyureaurethane when at least partially cured and when tested

- 2 -

as a lens with a hard coating on both surfaces having a maximum center thickness of 2.2 mm in a plano configuration, has an impact resistance of at least 148 feet per second as defined by The High Impact Test.

Further, the present invention includes a polyether-containing

5 polyureaurethane comprising the reaction product of:

- a. a polyureaurethane prepolymer comprising a polyisocyanate and at least one polyether-containing polyol material; and
- b. an amine-containing curing agent,

wherein said prepolymer has a NCO to OH equivalent ratio of from 2.0 to less

10 than 4.5.

Further, the present invention includes a method of preparing a polyether-containing polyureaurethane comprising the steps of:

- a. reacting a polyisocyanate with at least one polyether-containing polyol to form a polyether-containing polyureaurethane prepolymer; and
- b. reacting said prepolymer with an amine-containing curing agent,

wherein said prepolymer has a NCO to OH equivalent ratio of from 2.0 to less

15 than 4.5.

In non-limiting embodiments, the polyether-containing polyureaurethane of the present invention can be used for transparency applications such as architectural

20 glazings, vehicle glazings, riot shields, aircraft canopies, face masks, visors, ophthalmic and sun lenses, protective eyewear, and transparent armor. It has been found that the polyether-containing polyureaurethane of the present invention can demonstrate at least one of the following characteristics: optical clarity, good ballistic properties, good chemical resistance, and acceptable heat distortion temperatures.

25 Polyisocyanates useful in the preparation of the polyureaurethane of the present invention are numerous and widely varied. Non-limiting examples can include but are not limited to aliphatic polyisocyanates, cycloaliphatic polyisocyanates wherein one or more of the isocyanato groups are attached directly to the cycloaliphatic ring, cycloaliphatic polyisocyanates wherein one or more of the


30 isocyanato groups are not attached directly to the cycloaliphatic ring, aromatic polyisocyanates wherein one or more of the isocyanato groups are attached directly to

- 3 -

the aromatic ring, and aromatic polyisocyanates wherein one or more of the isocyanato groups are not attached directly to the aromatic ring, and mixtures thereof. In a non-limiting embodiment, when an aromatic polyisocyanate is used, generally care should be taken to select a material that does not cause the polyureaurethane to 5 color (e.g., yellow).

In alternate non-limiting embodiments of the present invention, the polyisocyanate can include but is not limited to aliphatic or cycloaliphatic diisocyanates, aromatic diisocyanates, cyclic dimers and cyclic trimers thereof, and mixtures thereof. Non-limiting examples of suitable polyisocyanates can include but 10 are not limited to Desmodur N 3300 (hexamethylene diisocyanate trimer) which is commercially available from Bayer; Desmodur N 3400 (60% hexamethylene diisocyanate dimer and 40% hexamethylene diisocyanate trimer). In a non-limiting embodiment, the polyisocyanate can include dicyclohexylmethane diisocyanate and isomeric mixtures thereof. As used herein and the claims, the term "isomeric mixtures" 15 refers to a mixture of the cis-cis, trans-trans, and cis-trans isomers of the polyisocyanate. Non-limiting examples of isomeric mixtures for use in the present invention can include the trans-trans isomer of 4,4'-methylenebis(cyclohexyl isocyanate), hereinafter referred to as "PICM" (paraisocyanato cyclohexylmethane), the cis-trans isomer of PICM, the cis-cis isomer of PICM, and mixtures thereof. 20 Suitable isomers for use in the present invention include but are not limited to the following three isomers of 4,4'-methylenebis(cyclohexyl isocyanate).

- 4 -

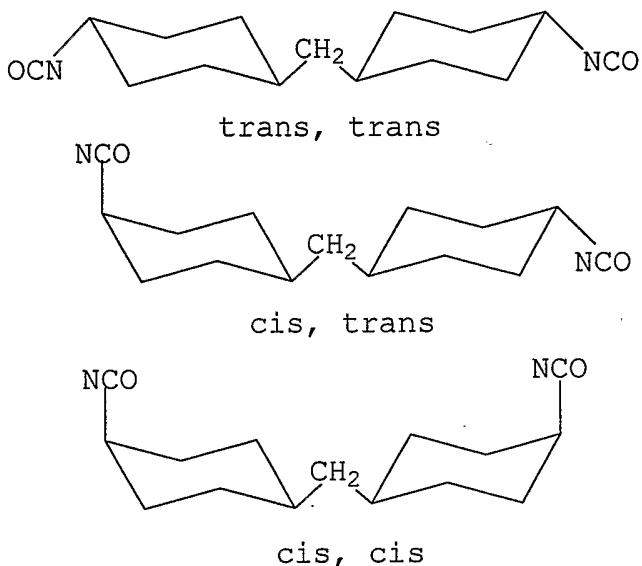

In one non-limiting embodiment, the PICM used in this invention can be prepared by phosgenating 4,4'-methylenebis(cyclohexyl amine) (PACM) by procedures well known in the art such as the procedures disclosed in United States

- 5 Patents 2,644,007; 2,680,127; and 2,908,703; which are incorporated herein by reference. The PACM isomer mixtures, upon phosgenation, can produce PICM in a liquid phase, a partially liquid phase, or a solid phase at room temperature. In alternate non-limiting embodiments, the PACM isomer mixtures can be obtained by the hydrogenation of methylenedianiline and/or by fractional crystallization of PACM
- 10 isomer mixtures in the presence of water and alcohols such as methanol and ethanol.

Additional aliphatic and cycloaliphatic diisocyanates that can be used in alternate non-limiting embodiments of the present invention include 3-isocyanato-methyl-3,5,5-trimethyl cyclohexyl-isocyanate ("IPDI") which is commercially available from Arco Chemical, and meta-tetramethylxylene diisocyanate (1,3-bis(1-isocyanato-1-methylethyl)-benzene) which is commercially available from Cytec Industries Inc. under the tradename TMXDI.RTM. (Meta) Aliphatic Isocyanate.

As used herein and the claims, the term "aliphatic and cycloaliphatic diisocyanates" refers to 6 to 100 carbon atoms linked in a straight chain or cyclized having two diisocyanate reactive end groups. In a non-limiting embodiment of the


20 present invention, the aliphatic and cycloaliphatic diisocyanates for use in the present

- 5 -

invention can include TMXDI and compounds of the formula R-(NCO)<sub>2</sub> wherein R represents an aliphatic group or a cycloaliphatic group.

Polyether-containing polyols and methods for their preparation are known to those skilled in the art. Many polyether-containing polyols of various types and 5 molecular weight are commercially available from various manufacturers. Non-limiting examples of polyether-containing polyols can include but are not limited to polyoxyalkylene polyols, and polyalkoxylated polyols. Polyoxyalkylene polyols can be prepared in accordance with known methods. In a non-limiting embodiment, a polyoxyalkylene polyol can be prepared by condensing an alkylene oxide, or a 10 mixture of alkylene oxides, using acid- or base-catalyzed addition with a polyhydric initiator or a mixture of polyhydric initiators, such as but not limited to ethylene glycol, propylene glycol, glycerol, and sorbitol. Non-limiting examples of alkylene oxides can include ethylene oxide, propylene oxide, butylene oxide, amylene oxide, aralkylene oxides, such as but not limited to styrene oxide, mixtures of ethylene oxide 15 and propylene oxide. In a further non-limiting embodiment, polyoxyalkylene polyols can be prepared with mixtures of alkylene oxide using random or step-wise oxyalkylation. Non-limiting examples of such polyoxyalkylene polyols include polyoxyethylene, such as but not limited to polyethylene glycol, polyoxypropylene, such as but not limited to polypropylene glycol.

20 In a non-limiting embodiment, polyalkoxylated polyols can be represent by the following general formula I:

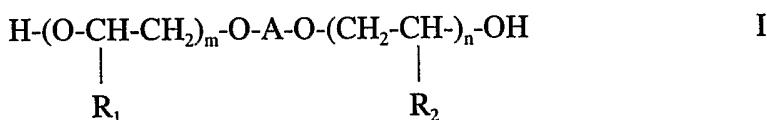

25 wherein m and n can each be a positive integer, the sum of m and n being from 5 to 70; R<sub>1</sub> and R<sub>2</sub> can each be hydrogen, methyl or ethyl; and A can be a divalent linking group such as a straight or branched chain alkylene which can contain from 1 to 8 carbon atoms, phenylene, and C<sub>1</sub> to C<sub>9</sub> alkyl-substituted phenylene. The chosen 30 values of m and n, in combination with the chosen divalent linking group, can determine the molecular weight of the polyol.

Polyalkoxylated polyols can be prepared by methods that are known in the art. In a non-limiting embodiment, a polyol such as 4,4'-isopropylidenediphenol can be reacted with an oxirane-containing material such as but not limited to ethylene oxide, propylene oxide and butylene oxide, to form what is commonly referred to as an 5 ethoxylated, propoxylated or butoxylated polyol having hydroxy functionality. Non-limiting examples of polyols suitable for use in preparing polyalkoxylate polyols can include those polyols described in United States Patent 6,187,444 B1 at column 10, lines 1-20, which disclosure is incorporated herein by reference.

As used herein and the claims, the term "polyether-containing polyols" can 10 include the generally known poly(oxytetramethylene) diols prepared by the polymerization of tetrahydrofuran in the presence of Lewis acid catalysts such as but not limited to boron trifluoride, tin (IV) chloride and sulfonyl chloride. Also included are the polyethers prepared by the copolymerization of cyclic ethers such as but not limited to ethylene oxide, propylene oxide, trimethylene oxide, and tetrahydrofuran 15 with aliphatic diols such as but not limited to ethylene glycol, 1,3-butanediol, 1,4-butanediol, diethylene glycol, dipropylene glycol, 1,2-propylene glycol and 1,3-propylene glycol. Compatible mixtures of polyether-containing polyols can also be used. As used herein, the term "compatible" means that the polyols are mutually soluble in each other so as to form a single phase.

20 In a non-limiting embodiment, the polyether-containing polyol for use in the present invention can comprise polyester polyols, polycaprolacton polyols, polycarbonate polyols, and mixtures thereof.

Polyester polyols such as but not limited to polyester glycols can include the 25 esterification products of one or more dicarboxylic acids having from four to ten carbon atoms, such as adipic, succinic or sebacic acids, with one or more low molecular weight glycols having from two to ten carbon atoms, such as ethylene glycol, propylene glycol, diethylene glycol, 1,4-butanediol, neopentyl glycol, 1,6-hexanediol and 1,10-decanediol. Known esterification procedures for producing 30 polyester polyols is described, for example, in the article D.M. Young, F. Hostettler et al., "Polyesters from Lactone," Union Carbide F-40, p. 147.

Polycarbonate polyols are known in the art and are commercially available such as Ravecarb<sup>TM</sup> 107 (Enichem S.p.A.). In a non-limiting embodiment, the polycarbonate polyol can be produced by reacting an organic glycol such as a diol, such as those described hereinafter and in connection with the glycol component of 5 the polyureaurethane, and a dialkyl carbonate, such as described in United States Patent 4,160,853. In a non-limiting embodiment, the polyol can include polyhexamethyl carbonate such as H-(O-C(O)-O-(CH<sub>2</sub>)<sub>6</sub>)-OH, wherein n is an integer from 4 to 24, or from 4 to 10, or from 5 to 7.

In a non-limiting embodiment, the glycol material can comprise low molecular 10 weight polyols such as polyols having a molecular weight of less than 500, and compatible mixtures thereof. As used herein, the term "compatible" means that the glycols are mutually soluble in each other so as to form a single phase. Non-limiting examples of these polyols can include but are not limited to low molecular weight diols and triols. In a further non-limiting embodiment, the amount of triol chosen is 15 such as to avoid a high degree of cross-linking in the polyurethane. A high degree of cross-linking can result in a thermoset polyurethane that is not formable by moderate heat and pressure. The organic glycol typically contains from 2 to 16, or from 2 to 6, or from 2 to 10, carbon atoms. Non-limiting examples of such glycols can include but are not limited to ethylene glycol, propylene glycol, diethylene glycol, triethylene 20 glycol, tetraethylene glycol, dipropylene glycol, tripropylene glycol, 1,2-, 1,3- and 1,4-butanediol, 2,2,4-trimethyl-1,3-pantanediol, 2-methyl-1,3-pantanediol, 1,3- 2,4- and 1,5-pantanediol, 2,5- and 1,6-hexanediol, 2,4-heptanediol, 2-ethyl-1,3- hexanediol, 2,2-dimethyl-1,3-propanediol, 1,8-octanediol, 1,9-nanediol, 1,10-decanediol, 1,4-cyclohexanediol, 1,4-cyclohexanediol, 1,2-bis(hydroxyethyl)- 25 cyclohexane, glycerin, tetramethylolmethane, such as but not limited to pentaerythritol, trimethylolethane and trimethylolpropane; and isomers thereof.

In alternate non-limiting embodiments, the polyether-containing polyol material can have a weight average molecular weight of at least 200, or at least 1000, or at least 2000. In alternate non-limiting embodiments, the polyether-containing 30 polyol material can have a weight average molecular weight of less than 10000, or less than 15000, or less than 20000, or less than 32000.

- 8 -

In a non-limiting embodiment, the polyether-containing polyol material for use in the present invention can include teresters produced from at least one low molecular weight dicarboxylic acid, such as adipic acid.

Polyether glycols for use in the present invention can include but are not 5 limited to polytetramethylene ether glycol.

In a non-limiting embodiment, the polyether-containing polyol can comprise block polymers including blocks of ethylene oxide-propylene oxide and/or ethylene oxide-butylene oxide. In a non-limiting embodiment, the polyether-containing polyol can comprise a block polymer of the following chemical formula:

10



wherein R can represent hydrogen or  $C_1-C_6$  alkyl; Y can represent  $CH_2$ ; n can be an integer from 0 to 6; a, b, and c can each be an integer from 0 to 300, wherein 15 a, b and c are chosen such that the weight average molecular weight of the polyol does not exceed 32,000.

In a further non-limiting embodiment, Pluronic R, Pluronic L62D, Tetronic R and Tetronic, which are commercially available from BASF, can be used as the polyether-containing polyol material in the present invention.


20 In the present invention, the equivalent ratio of NCO (i.e., isocyanate) to OH present in the polyether-containing polyureaurethane prepolymer can be an amount of from 2.0 to less than 4.5 NCO/1.0 OH.

Suitable amine-containing curing agents for use in the present invention are numerous and widely varied. Non-limiting examples include but are not limited to 25 polyamines having more than one amino group per molecule, each amino group being independently selected from primary amino ( $-NH_2$ ) and secondary amine ( $-NH-$ ) groups. In alternate non-limiting embodiments, the amine-containing curing agent can be chosen from aliphatic polyamines, cycloaliphatic polyamines, aromatic polyamines, and mixtures thereof. In a further non-limiting embodiment, the amino 30 groups are all primary groups. In an embodiment wherein it is desirable to produce a polyureaurethane having low color, the amine-curing agent can be chosen such that it

- 9 -

has relatively low color and/or it can be manufactured and/or stored in a manner as to prevent the amine from developing a color (e.g., yellow).

Suitable amine-containing curing agents for use in the present invention can include but are not limited to materials having the following chemical formula:

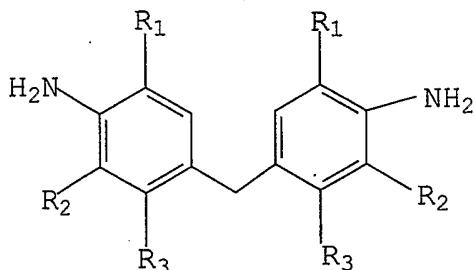

5

wherein R<sub>1</sub> and R<sub>2</sub> can each be independently chosen from methyl, ethyl, propyl, and isopropyl groups, and R<sub>3</sub> can be chosen from hydrogen and chlorine. Non-limiting examples of amine-containing curing agents for use in the present invention include the following compounds, manufactured by Lonza Ltd. (Basel, Switzerland):

10 LONZACURE.RTM. M-DIPA: R<sub>1</sub>=C<sub>3</sub> H<sub>7</sub>; R<sub>2</sub>=C<sub>3</sub> H<sub>7</sub>; R<sub>3</sub>=H  
 LONZACURE.RTM. M-DMA: R<sub>1</sub>=CH<sub>3</sub>; R<sub>2</sub>=CH<sub>3</sub>; R<sub>3</sub>=H  
 LONZACURE.RTM. M-MEA: R<sub>1</sub>=CH<sub>3</sub>; R<sub>2</sub>=C<sub>2</sub> H<sub>5</sub>; R<sub>3</sub>=H  
 LONZACURE.RTM. M-DEA: R<sub>1</sub>=C<sub>2</sub> H<sub>5</sub>; R<sub>2</sub>=C<sub>2</sub> H<sub>5</sub>; R<sub>3</sub>=H  
 LONZACURE.RTM. M-MIPA: R<sub>1</sub>=CH<sub>3</sub>; R<sub>2</sub>=C<sub>3</sub> H<sub>7</sub>; R<sub>3</sub>=H  
 15 LONZACURE.RTM. M-CDEA: R<sub>1</sub>=C<sub>2</sub> H<sub>5</sub>; R<sub>2</sub>=C<sub>2</sub> H<sub>5</sub>; R<sub>3</sub>=Cl

wherein R<sub>1</sub>, R<sub>2</sub> and R<sub>3</sub> correspond to the aforementioned chemical formula.


In a non-limiting embodiment, the amine-containing curing agent can include but is not limited to a diamine curing agent such as 4,4'-methylenebis(3-chloro-2,6-diethylaniline), (Lonzacure.RTM. M-CDEA), which is available in the United States 20 from Air Products and Chemical, Inc. (Allentown, Pa.). In alternate non-limiting embodiments, the amine-containing curing agent for use in the present invention can include 2,4-diamino-3,5-diethyl-toluene, 2,6-diamino-3,5-diethyl-toluene and mixtures thereof (collectively "diethyltoluenediamine" or "DETDA"), which is commercially available from Albemarle Corporation under the trade name Ethacure 25 100; dimethylthiotoluenediamine (DMTDA) , which is commercially available from Albemarle Corporation under the trade name Ethacure 300; 4,4'-methylene-bis-(2-

- 10 -

chloroaniline) which is commercially available from Kingyorker Chemicals under the trade name MOCA. DETDA can be a liquid at room temperature with a viscosity of 156 cPs at 25°C. DETDA can be isomeric, with the 2,4-isomer range being from 75 to 81 percent while the 2,6-isomer range can be from 18 to 24 percent.

5 In a non-limiting embodiment, the color stabilized version of Ethacure 100 (i.e., formulation which contains an additive to reduce yellow color), which is available under the name Ethacure 100S may be used in the present invention.

10 In another embodiment, the amine-containing curing agent for use in the present invention can be chosen from DEDTA, compounds having the following structure

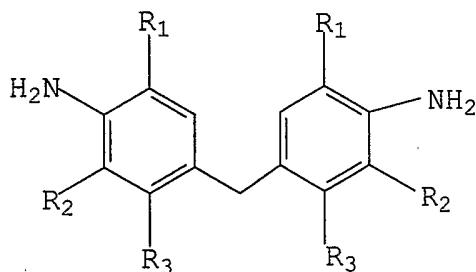

and mixtures thereof.

15 The polyureaurethane of the present invention can be prepared by one shot, quasi-prepolymer or full prepolymer methods, all of which are known in the art and disclosed in United States Patent 5,962,617; which disclosure is herein incorporated by reference. In the one shot method, all of the reactants can be mixed together at one time. In the quasi-prepolymer method, generally 30 to 80 percent of the total amount of polyol is reacted with the polyisocyanate to form a prepolymer, and then the remaining 20 to 70 percent of the polyol can be added to the prepolymer with the 20 amine-containing curing agent. In alternate non-limiting embodiments, a polyisocyanate (i.e., NCO) can be mixed with a polyether-containing polyol material in an equivalent ratio of from greater than 1 to less than 4.5 NCO/1.0 OH, or from 2.0 to 4.0 NCO/1.0 OH, and heated to a temperature within the range of from 190°F to 300°F. The period of time for heating the mixture can vary greatly. In general, at 25 lower temperatures the mixture can be heated for a longer period of time than can be employed at higher temperatures. For example, at a temperature of from 260 to

265°F, the mixture can be heated for 5 to 10 hours, and at a temperature of from 275 to 290°F, for a period of 3 to 5 hours. In a non-limiting embodiment, the mixture can be heated under dry nitrogen to facilitate the reaction of the polyisocyanate with the polyether-containing polyol material to form a prepolymer. The heat source can 5 then be removed and the prepolymer can be cooled. In a further non-limiting embodiment, the prepolymer can be cooled to a temperature of 160°F. The prepolymer can be maintained at that temperature for 24 hours. Following cooling, the amount of NCO present in the prepolymer can be determined by a variety of methods known in the art. In one non-limiting embodiment, the NCO present in the 10 prepolymer then can be determined by a variety of methods known in the art such as ASTM-D-2572-91.

In a non-limiting embodiment of the present invention, the NCO present in the prepolymer can be determined as follows. A 2-gram sample of the polyureaurethane can be added to an Erlenmeyer flask. The sample can be purged with nitrogen and 15 several glass beads (5mm) then can be added. To this mixture can be added 20 mL of 1N dibutylamine (in toluene) with a pipet. The mixture can be swirled and capped. The flask then can be placed on a heating source and the flask can be heated to slight reflux, held for 15 minutes at this temperature and then cooled to room temperature. A piece of Teflon can be placed between the stopper and joint to prevent pressure 20 buildup while heating. During the heating cycle, the contents can be frequently swirled in an attempt for complete solution and reaction. Blank values can be obtained and determined by the direct titration of 20 mL of pipeted 1N dibutylamine (DBA) plus 50 mL of methanol with 1N hydrochloric acid (HCl) using the Titrino 751 dynamic autotitrator. The average values for the HCl normalities and DBA 25 blanks can be calculated, and the values can be programmed into the autotitrator. After the sample has cooled, the contents can be transferred into a beaker with approximately 50 to 60 mL of methanol. A magnetic stirring bar can be added and the sample can be titrated with 1N HCl using a preprogrammed Titrino 751 autotitrator. The percent NCO and IEW (isocyanate equivalent weight) can be 30 calculated in accordance with the following formulas:

- 12 -

%NCO=(mLs blank-mLs sample)(Normality HCl)(4.2018)/sample wt., grams;

IEW=(sample wt., grams)1000/(mLs blank-mLs sample)(Normality HCl).

5

The “Normality HCl” value can be determined as follows. To a pre-weighed beaker can be added 0.4 grams of  $\text{Na}_2\text{CO}_3$  primary standard and the weight can be recorded. To this can be added 50 mL of deionized water and the  $\text{Na}_2\text{CO}_3$  can be dissolved with magnetic stirring. The Titrino 751 autotitrator can be used to titrate 10 the primary standard with the 1N HCl and the volume can be recorded. This procedure can be repeated two additional times for a total of three titrations and the average can be used as the normality according to the following formula:

Normality HCl=standard wt., grams/(mLs HCl)(0.053).

15

In a non-limiting embodiment, additional polyisocyanate can be added to the prepolymer to achieve a different (e.g., higher or lower) equivalent weight of NCO/OH. The prepolymer can then be reacted at a temperature of from about 160°F to 180°F, with an amine-containing curing agent such as a diamine curing agent. In 20 alternate non-limiting embodiments, the amine-containing curing agent can be present in an equivalent ratio of from 0.60 to 1.20  $\text{NH}_2$  /1.0.NCO, or 0.90 to 1.0  $\text{NH}_2$  /1.0 NCO, or 0.92 to 0.96  $\text{NH}_2$  /1.0 NCO. The polyureaurethane can then be cured at a temperature of from 230 to 300°F for a period of from 4 to 24 hours.

In a non-limiting embodiment, the polyether-containing polyureaurethane 25 prepolymer can be prepared by reacting an excess amount of polyisocyanate with a polyether-containing polyol material at a temperature of 130°C or less, to produce a free-flowing prepolymer. As used herein and the claims, the term “free-flowing” refers to a non-gelled substance. Heating the prepolymer to a temperature above 130°C can accelerate the reaction rate between the polyisocyanate and the polyether-containing polyol material, which can result in premature gelation of the prepolymer 30

- 13 -

and subsequent polyureaurethane. In regards to a lens casting process, premature gelation of the prepolymer and subsequent polyureaurethane, can produce a defective lens.

In alternate non-limiting embodiments, the polyisocyanate can be present in 5 excess with the polyether-containing polyol material to produce a prepolymer having a viscosity of less than 2000 cPs, or less than 600 cPs, or less than 300 cPs, as measured using a Brookfield Viscosimeter at a temperature of 73°C. The excess amount of polyisocyanate used can be from 2.0 to less than 4.5 NCO/1.0 OH equivalent ratio. The viscosity of the prepolymer can be dependent on the particular 10 polyisocyanate and polyether-containing polyol material chosen. In a non-limiting embodiment, a mixture having a NCO/OH equivalent ratio at the higher end of the aforementioned range, can form a prepolymer having a viscosity within the lower end of the aforementioned range.

Suitable urethane-forming catalysts can be used in the present invention to 15 enhance the reaction of the polyurethane-forming materials. Suitable urethane-forming catalysts can be those catalysts that are specific for the formation of urethane by reaction of the NCO and OH-containing materials, and which have little tendency to accelerate side reactions leading to allophonate and isocyanate formation. Non-limiting examples of suitable catalysts can be chosen from the group of Lewis bases, 20 Lewis acids and insertion catalysts as described in Ullmann's Encyclopedia of Industrial Chemistry, 5<sup>th</sup> Edition, 1992, Volume A21, pp. 673 to 674. In a non-limiting embodiment, the catalyst can be a stannous salt of an organic acid, such as but not limited to stannous octoate, dibutyl tin dilaurate, dibutyl tin diacetate, dibutyl 25 tin mercaptide, dibutyl tin dimaleate, dimethyl tin diacetate, dimethyl tin dilaurate, 1,4-diazabicyclo[2.2.2]octane, and mixtures thereof. In alternate non-limiting embodiments, the catalyst can be zinc octoate, bismuth, or ferric acetylacetone.

Further non-limiting examples of suitable catalysts can include tertiary amines such as but not limited to triethylamine, triisopropylamine and N,N-dimethylbenzylamine. Such suitable tertiary amines are disclosed in United States 30 Patent 5,693,738 at column 10, lines 6-38, the disclosure of which is incorporated herein by reference.

In a non-limiting embodiment, the catalyst can be incorporated into the amine-containing curing agent. The amount of catalyst can vary widely depending on the particular catalyst chosen. In alternate non-limiting embodiments, the amount of catalyst can be less than 5% by weight, or less than 3% by weight, or less than 1% 5 by weight, based on the total weight of the reaction mixture. For example, dibutyltin dilaurate can be employed in amounts of from 0.0005 to 0.02 parts per 100 parts of the polyurethane-forming materials. The amount of catalyst used can be dependent on the curing temperature employed.

The polyether-containing polyureaurethane of this invention can be formed 10 into an article by a variety of methods including but not limited to casting, compression molding, extruding or injection molding. In a non-limiting embodiment, the polyether-containing polyureaurethane can be cast into lenses. Casting of the polyether-containing polyureaurethane can produce a lens having good optical characteristics.

15 In a non-limiting embodiment of the casting process, the polyether-containing polyureaurethane prepolymer and amine-containing curing agent mixture can be cast into a mold prior to curing. In a further non-limiting embodiment, the polyether-containing polyureaurethane of the invention can be partially cured, by choosing an appropriate curing time and temperature, and then the polyether-containing 20 polyureaurethane can be removed from the casting molds and formed into a desired shape. The polyether-containing polyureaurethane can be formed into a simple or complex shape and can then be fully cured.

The lens can be coated on the front side and/or backside with an abrasion-resistant coating such as an organo-silane-type abrasion-resistant coating that is known 25 in the art to protect plastic surfaces from abrasions and scratches. Organo-silane abrasion-resistant coatings can be referred to as hard coats and are known in the art. Various organo-silane hard coatings are disclosed in United States Patent 4,756,973 at column 5, lines 1-45; and United States Patent 5,462,806 at column 1, lines 58 through column 2, line 8 and column 3, line 52 through column 5, line 50, which 30 disclosures are incorporated herein by reference. Further non-limiting examples of organo-silane hard coatings are disclosed in United States Patents 4,731,264;

- 15 -

5,134,191; and 5,231,156 which disclosures are also incorporated herein by reference. In a non-limiting embodiment, the frontside and backside of the lens can be coated with SDC 1154 which is commercially available from SDC Coatings, Incorporated or HiGard 1080 which is commercially available from PPG Industries, 5 Incorporated.

Other coatings that provide abrasion and scratch resistance, such as polyfunctional acrylic hard coatings, melamine-based hard coatings, urethane-based hard coatings, alkyl-based coatings, silica sol-based hard coatings or other organic or inorganic/organic hybrid hard coatings can be used as the abrasion-resistant coating.

10 In a further non-limiting embodiment, additional coatings such as antireflective coatings can be applied to the hard coat layer. Examples of antireflective coatings are described in United States Patent 6,175,450, the disclosure of which is incorporated herein by reference. In a non-limiting embodiment, the front side and/or backside of the lens can be coated with Essilor's Reflection Free 15 anti-reflective coating which can be applied using Essilor's Reflection Free Process.

In a non-limiting embodiment, front side and/or backside of the lens can be coated with an ultraviolet light curable hardcoat such as but not limited to UVX and UVNVS which are commercially available from UltraOptics.

20 In general, the impact resistance of an uncoated lens can be higher than the impact resistance of a coated lens. The application of a hard coat to the lens can result in a decrease in the impact strength of the lens. The impact strength can be further decreased by the application of an antireflective coating onto the hard coated lens. The amount of decrease in the impact strength can be dependent on the particular hard and antireflective coatings selected for application to the lens.

25 The polyether-containing polyureaurethane of the present invention can have a good impact resistance. In alternate non-limiting embodiments, the polyether-containing polyureaurethane when at least partially cured and tested as a lens having a thickness of from 2.0 to 2.2 mm and having a hard coating on both surfaces, can withstand an impact of at least 148 feet per second, or at least 170 feet per second, or 30 at least 300 feet per second, as measured by the High Impact Test. As used herein and the claims, the "High Impact Test" refers to the following procedure which is

conducted in accordance with Z87.1-200X, September 12, 2002, Committee Ballot Draft Revision of ANSI Z87.1-1989 (R1998), sections 7.5.2.1 "High Velocity Impact" and 14.3 "Test for High Impact Prescription Lenses". A Universal Lens

Tester (ULT-II) as manufactured by International Certification Services Laboratories,

5 Incorporated is used in the procedure. Plano power lenses having a maximum base curve of 6.25 can be edged round with an industrial safety bevel to a diameter of 55 mm +0.04 mm/-0.25 mm. Each lens can be tested once with a new lens being used for each additional impact. Each lens can be mounted in a test holder such that the test lens is held firmly against the bevel of the lens holder. The high velocity impact

10 test includes propelling a missile at a velocity of 150 feet per second on the center of each lens. The missile consists of a 6.35 mm (0.25 inch) steel ball weighing 1.06 gram (0.037 ounce). The test can be repeated with two additional sample lenses.

The lens can be considered to have failed the test if there is any posterior displacement of the lens completely through the test holder; any fracture of the lens;

15 any detachment of a portion of the lens from its inner surface; or any full thickness penetration of a lens. As used herein, "fracture" refers to a crack through the entire thickness of the lens into two or more separate pieces, or detachment from the inner surface of any lens material visible to the naked eye. Failure of any one lens constitutes a failure. If all test lenses pass, then any prescription lens of the same or

20 greater thickness at its thinnest point, which is made by the same manufacturer, from the same material, with the same coatings and processes can bear a "+" mark.

In a non-limiting embodiment, small amounts of at least one tri-functional or higher functional polyol such as but not limited to a triol, tetrol, pentrol and mixtures thereof can be added to the polyether-containing polyureaurethane prepolymer in an amount sufficient to produce cross-linking based upon equivalents of reactants. In a further non-limiting embodiments, at least one of these materials is added to produce at least 0.01 percent, or at least 0.5 percent, or less than 99 percent, or less than 5 percent cross-linking by weight based on the total reactants. Suitable non-limiting examples include trimethylol propane, trimethylol ethane, glycerine, pentaerytheritol, dipentaerytheritol, sorbitol, sucrose, mannitol, and mixtures thereof. Further non-limiting examples include these materials chain extended with ethylene, propylene or

- 17 -

butylenes oxide. The addition of at least one of these materials to the prepolymer can increase the heat distortion temperature and in some cases can improve the ballastic properties of the cured polyurethane.

In alternate non-limiting embodiments of the present invention, a variety of 5 additives known in the art can be utilized in preparation of the polyether-containing polyureaurethane of the present invention. Non-limiting examples include various anti-oxidants, ultraviolet stabilizers, color blockers, optical brightners, and mold release agents. In one non-limiting embodiment, at least one anti-oxidant can be added to the prepolymer in an amount of 5% or less by weight based on the total 10 reactants. Suitable anti-oxidants that can be used in the present invention include but are not limited to those of the multifunctional hindered phenol type. One non-limiting example of a multifunctional hindered phenol type anti-oxidant can include Irganox 1010 which is commercially available from Ciba Geigy.

In alternate non-limiting embodiments, a UV-stabilizer can be added to the 15 polyether-containing polyureaurethane prepolymer, either prior to or during the curing step, in an amount of 5.0% or less by weight based on the total reactants, or from 0.5 to 4.0% by weight based on the total reactants. Suitable UV-stabilizers for use in the present invention include but are not limited to benzotriazoles. Non-limiting examples of benzotriazole UV-stabilizers include Cyasorb 5411, Cyasorb 3604, and 20 Tinuin 328. Cyasorb 5411 and 3604 are commercially available from American Cyanamid, and Tinuin 328 is commercially available from Ciba Geigy.

In an alternate non-limiting embodiment, a hindered amine light stabilizer can be added to enhance UV protection. A non-limiting example of a hindered amine light stabilizer can include Tinuin 765 which is commercially available from Ciba-Geigy.

25 The polyether-containing polyureaurethane of the present invention can be used in producing a photochromic article. United States Patent Applications having Serial Nos. 09/793,886 and 09/794,026 both filed on March 20, 2000 and pending in the United States Patent and Trademark Office, disclose the production of photochromic articles. These two applications are incorporated herein by reference.

30 When used to prepare photochromic articles, e.g., lenses, the polyureaurethane should be transparent to that portion of the electromagnetic

- 18 -

spectrum which activates the photochromic substance(s) incorporated in the matrix, i.e., that wavelength of ultraviolet (UV) light that produces the colored or open form of the photochromic substance and that portion of the visible spectrum that includes the absorption maximum wavelength of the photochromic substance in its UV activated form, i.e., the open form. Photochromic substances that may be utilized with the polyureaurethane of the present invention are organic photochromic compounds or substances containing same that may be incorporated, e.g., dissolved, dispersed or diffused into such polyureaurethane.

A first group of organic photochromic substances contemplated for use to form the photochromic articles of the present invention are those having an activated absorption maximum within the visible range of greater than 590 nanometers, e.g., from 590 to 700 nanometers. These materials typically exhibit a blue, bluish-green, or bluish-purple color when exposed to ultraviolet light in an appropriate solvent or matrix. Non-limiting examples of classes of such substances that are useful in the present invention include but are not limited to spiro(indoline)naphthoxazines and spiro(indoline)benzoxazines. These and other classes of such photochromic substances are known. See, for example, U.S. Patents: 3,562,172; 3,578,602; 4,215,010; 4,342,668; 5,405,958; 4,637,698; 4,931,219; 4,816,584; 4,880,667; 4,818,096.

A second group of organic photochromic substances contemplated for use to form the photochromic articles of the present invention are those having at least one absorption maximum and two absorption maxima, within the visible range of between 400 and less than 500 nanometers. These materials typically exhibit a yellow-orange color when exposed to ultraviolet light in an appropriate solvent or matrix. Such compounds include but are not limited to certain chromenes, i.e., benzopyrans and naphthopyrans. Many of such chromenes are known, e.g., U.S. Patents 3,567,605; 4,826,977; 5,066,818; 4,826,977; 5,066,818; 5,466,398; 5,384,077; 5,238,931; and 5,274,132.

A third group of organic photochromic substances contemplated for use to form the photochromic articles of the present invention are those having an absorption maximum within the visible range of between 400 to 500 nanometers and another

absorption maximum within the visible range of between 500 to 700 nanometers. These materials typically exhibit color(s) ranging from yellow/brown to purple/gray when exposed to ultraviolet light in an appropriate solvent or matrix. Non-limiting examples of these substances include certain benzopyran compounds, having 5 substituents at the 2-position of the pyran ring and a substituted or unsubstituted heterocyclic ring, such as a benzothieno or benzofurano ring fused to the benzene portion of the benzopyran. Such materials are described in U.S. Patent No. 5,429,774.

Other photochromic substances contemplated include photochromic organo-10 metal dithizonates, i.e., (arylazo)-thioformic arylhydrazides, e.g., mercury dithizonates which are described in, for example, U.S. Patent 3,361,706. Fulgides and fulgimides, e.g. the 3-furyl and 3-thienyl fulgides and fulgimides which are described in U.S. Patent 4,931,220 at column 20, line 5 through column 21, line 38.

The disclosures relating to such photochromic substances in the afore-15 described patents are incorporated herein by reference. The photochromic articles of the present invention may contain one photochromic substance or a mixture of photochromic substances. Mixtures of photochromic substances may be used to attain certain activated colors such as a near neutral gray or brown.

Each of the photochromic substances described herein may be used in amounts 20 and in a ratio (when mixtures are used) such that a polyurethane/polymerizate to which the mixture of compounds is applied or in which they are incorporated exhibits a desired resultant color, e.g., a substantially neutral color such as shades of gray or brown when activated with unfiltered sunlight, i.e., as near a neutral color as possible given the colors of the activated photochromic substances. The relative amounts of 25 the aforesaid photochromic substances used will vary and depend in part upon the relative intensities of the color of the activated species of such compounds, and the ultimate color desired.

The photochromic compounds or substances described herein may be applied 30 to or incorporated into a polyurethane/polymerizate by various methods described in the art. Such methods include but are not limited to dissolving or dispersing the substance within the polyurethane/polymerizate, e.g., imbibition of the photochromic

- 20 -

substance into the polyurethane/polymerizate by immersion of the polyurethane/polymerizate in a hot solution of the photochromic substance or by thermal transfer; providing the photochromic substance as a separate layer between adjacent layers of the polymerizate, e.g., as a part of a polymer film; and applying

5 the photochromic substance as a coating or as part of a coating placed on the surface of the polyurethane/polymerizate. The term "imbibition" or "imbibe" is intended to mean and include permeation of the photochromic substance alone into the polyurethane/polymerizate, solvent assisted transfer absorption of the photochromic substance into a porous polymer, vapor phase transfer, and other such transfer

10 mechanisms. One non-limiting example of an imbibing method includes the steps of coating the photochromic article with the photochromic substance; heating the surface of the photochromic article; and removing the residual coating from the surface of the photochromic article.

The amount of photochromic substance or composition containing the same applied to or incorporated into the polyurethane/polymerizate is not critical provided that a sufficient amount is used to produce a photochromic effect discernible to the naked eye upon activation. Generally such amount can be described as a photochromic amount. The particular amount used depends often upon the intensity of color desired upon irradiation thereof and upon the method used to incorporate or

20 apply the photochromic substances. Typically, the more photochromic substance applied or incorporated, the greater is the color intensity. Generally, the amount of total photochromic substance incorporated into or applied to a photochromic optical polyurethane/polymerizate may range from 0.15 to 0.35 milligrams per square centimeter of surface to which the photochromic substance(s) is incorporated or

25 applied.

It is also contemplated that photochromic substances can be added to the multi-component organic composition prior to polymerizing, e.g., cast curing, the composition. However, when this is done it is typical that the photochromic substance(s) be resistant to potentially adverse interactions with, for example,

30 initiator(s) that may be present and / or the isocyanate, isothiocyanate and amine groups of the first and second components. These adverse interactions can result in

deactivation of the photochromic substance(s), e.g., by trapping them in either an open or closed form. Photochromic substances can also include photochromic pigments and organic photochromic substances encapsulated in metal oxides, the latter of which are described in U.S. Patents 4,166,043 and 4,367,170. Organic 5 photochromic substances sufficiently encapsulated within a matrix of an organic polyurethane/polymerizate, as described in U.S. Patent 4,931,220, can also be incorporated into the multi-component composition of the present invention prior to curing. If photochromic substances are added to the multi-component organic composition of the present invention prior to curing, they are typically incorporated 10 into the second component prior to mixing the first and second components together.

#### EXAMPLES

In each of the following examples, the NCO concentration of Component A was determined using the following titrimetric procedure in accordance with ASTM-15 D-2572-91. The titrimetric method consisted of adding a 2 gram sample of Component A to an Erlenmeyer flask. This sample was purged with nitrogen and several glass beads (5mm) were then added. To this mixture was added 20 mL of 1N dibutylamine (in toluene) with a pipet. The mixture was swirled and capped. The flask was then placed on a heating source and the flask was heated to slight reflux, 20 held for 15 minutes at this temperature and then cooled to room temperature. Note, a piece of Teflon was placed between the stopper and joint to prevent pressure buildup while heating. During the heating cycle, the contents were frequently swirled in an attempt for complete solution and reaction. Blank values were obtained and determined by the direct titration of 20 mL of pipeted 1N dibutylamine (DBA) plus 25 50 mL of methanol with 1N hydrochloric acid (HCl) using the Titrino 751 dynamic autotitrator. Once the average values for the HCl normalities and DBA blanks were calculated, the values were programmed into the autotitrator. After the sample had cooled, the contents were transferred into a beaker with approximately 50-60 mL of methanol. A magnetic stirring bar was added and the sample titrated with 1N HCl 30 using the preprogrammed Titrino 751 autotitrator. The percent NCO and IEW

- 22 -

(isocyanate equivalent weight) were calculated automatically in accordance with the following formulas:

5                   %NCO=(mLs blank-mLs sample)(Normality HCl)(4.2018)/sample wt.,  
                  grams

10                  IEW=(sample wt., grams)1000/(mLs blank-mLs sample)(Normality HCl).

The "Normality HCl" value was determined as follows. To a pre-weighed beaker was added 0.4 grams of Na<sub>2</sub>CO<sub>3</sub> primary standard and the weight was recorded. To this was added 50 mL of deionized water and the Na<sub>2</sub>CO<sub>3</sub> was dissolved with magnetic stirring. An autotitrator (i.e., Metrohm GPD Titrino 751 dynamic autotitrator with 50 mL buret) equipped with a combination pH electrode (i.e., Metrohm combination glass electrode No. 6.0222.100), was used to titrate the primary standard with the 1N HCl and the volume was recorded. This procedure was repeated two additional times for a total of three titrations and the average was used as the normality according to the following formula:

15

Normality HCl=standard wt., grams/(mLs HCl)(0.053).

Further, in each of the following examples, the following lens casting process was used to produce six semi-finished lenses from the Component A prepolymer.

20                  Component A and DETDA (referred to as Component B) were injected into a specially designed molding machine from Max Machinery. The DETDA was obtained from Albemarle Corporation. The molding machine was a Urethane Processor, Model No. 601-000-232, which was obtained from Max Machinery in Healdsburg, California. Components A and B were added to the machine and mixed 25 with high shear for a short period of time. Component B and Component A were present in a molar ratio of 0.95 to 1.0. The blended mixture was then injected into lens molds. The molds were placed in a convection oven for six hours at a temperature of 130°C. The cast semi-finished lenses were then removed from the oven and allowed to cool. The front side of the lens was coated with a commercial 30 hard coat obtained from SDC Incorporated under the tradename of SDC 1154. The coating was applied by spinning the lens at 1100 rpm for 13 seconds using a spin

- 23 -

coating device followed by a three-hour curing period at a temperature of 120°C. The lenses were then sent to 20/20 Optical Laboratory where they were cut to a 55mm diameter circle and surfaced to a plano power having a center thickness of 2.1mm. The backside of each lens was hard coated with a commercial UV curable 5 coating manufactured by UltraOptics under the tradename of UVX. These lenses were then sent to Essilor and were coated with Essilor's Reflection Free anti-reflective coating using Essilor's Reflection Free Process.

The cast lenses were then tested for impact strength by the High Impact Test. The "High Impact Test" refers to the following procedure which was conducted in 10 accordance with Z87.1-200X, September 12, 2002, Committee Ballot Draft Revision of ANSI Z87.1-1989 (R1998), sections 7.5.2.1 "High Velocity Impact" and 14.3 "Test for High Impact Prescription Lenses". A Universal Lens Tester (ULT-II) as manufactured by International Certification Services Laboratories, Incorporated was used in the procedure. Plano power lenses having a maximum base curve of 6.25 15 were edged round with an industrial safety bevel to a diameter of 55 mm +0.04 mm/-0.25 mm. Each lens was tested once with a new lens being used for each additional impact. Each lens was mounted in a test holder such that the test lens was held firmly against the bevel of the lens holder. The high velocity impact test included propelling a missile at a velocity of 150 feet per second on the center of each lens. The missile 20 consisted of a 6.35 mm (0.25 inch) steel ball weighing 1.06 gram (0.037 ounce). The lens was considered to have failed the test if there was any posterior displacement of the lens completely through the test holder; any fracture of the lens; any detachment of a portion of the lens from its inner surface; or any full thickness penetration of a lens. As used herein, "fracture" refers to a crack through the entire thickness of the 25 lens into two or more separate pieces, or detachment from the inner surface of any lens material visible to the naked eye. Failure of any one lens constituted a failure.

Example 1

In a reactor vessel which contained a nitrogen blanket, 4.5 equivalents of 400 30 MW polycaprolactone, 0.58 equivalents of 750 MW polycaprolactone, 3.387 equivalents of trimethylol propane, 1.695 equivalents of Pluracol P2000 and 27.44

- 24 -

equivalents of Desmodur W were mixed together at room temperature. Desmodur W represents 4,4'-methylenebis(cyclohexyl isocyanate) containing 20 weight percent of the trans-trans isomer and 80 weight percent of the cis-cis and cis-trans isomers. Desmodur W was obtained from Bayer Corporation and Pluracol P2000 was obtained 5 from BASF. The reaction mixture was heated to a temperature of 78°C to obtain a substantially clear mixture. To this mixture was added 20 ppm dibutyltinlaureate catalyst and the heat was removed. The catalyst addition produced an exothermic reaction and the temperature began to rise and peaked at 123°C. The reaction was carried out with continuous stirring and allowed to cool under ambient conditions. At 10 a temperature of about 116°C, the following materials were added: 0.5 wt% Irganox 1010 (obtained from Ciba Geigy), 2 wt% UV absorber Cyasorb 5411 (obtained from American Cyanamid/Cytec) and 1.5 ppm Exalite Blue 78-13 (obtained from Exciton). The mixture was stirred for an additional hour at 100°C and then allowed to cool to room temperature. This mixture was referred to as the Component A prepolymer. 15 The isocyanate (NCO) concentration of the Component A prepolymer was determined in accordance with the procedure described above. The theoretical % NCO was determined to be 10.3 and the experimental % NCO was 10.1. The Component A prepolymer was then used in the lens casting process described above and the resultant lenses were high impact tested using the subject procedure described above. 20 The lenses were able to withstand a maximum velocity of 150 feet per second.

#### Example 2

The same procedure as described in Example 1 was used for Example 2 with the exception that 1.695 of Pluronic L62D was used in place of the Pluracol P2000. 25 The theoretical % NCO was determined to be 10.3 and the experimental % NCO was 10.1. The Component A prepolymer was then used in the lens casting process described above and the resultant lenses were high impact tested using the subject procedure described above. The lenses did not fail and/or fracture at a velocity of 300 feet per second.

- 25 -

Examples 3

The same procedure as described in Example 1 was used for Example 3, with the exception that a blend of 1.356 equivalents of Pluracol P2000 and 0.338 equivalents of Pluracol E2000 was used in place of the Pluracol P2000. The 5 theoretical % NCO was determined to be 10.3 and the experimental % NCO was 9.02. The Component A prepolymer was then used in the lens casting process described above and the resultant lenses were high impact tested using the subject procedure described above. The lenses were able to withstand a maximum velocity of 137 feet per second.

10

Example 4

The same procedure as described in Example 1 was used for Example 4, with the exception that 1.695 equivalents of Tone<sup>TM</sup> Polyol 0241 was used in place of the Pluracol P2000. The Component A prepolymer was used in the lens casting process 15 described above and the resultant lenses were high impact tested using the subject procedure described above. The lenses were able to withstand a maximum velocity of 146 feet per second.

In the claims:

1. A polyether-containing polyureaurethane, said polyureaurethane when at least partially cured and when tested as a lens with a hard coating on both surfaces having a maximum center thickness of 2.2 mm in a plano configuration, has an impact resistance of at least 148 feet per second as defined by The High Impact Test.
- 5 2. The polyether-containing polyureaurethane of claim 1 comprising block moieties derived from a polyether polyol.
- 10 3. The polyether-containing polyureaurethane of claim 2 wherein said polyether polyol comprises the following formula:



15 wherein R can represent hydrogen or C<sub>1</sub>-C<sub>6</sub> alkyl; Y can represent CH<sub>2</sub>; n can be an integer from 0 to 6; a, b, and c can each be an integer from 0 to 300, wherein a, b and c are chosen such that the weight average molecular weight of the polyol does not exceed 32,000.

4. The polyether-containing polyureaurethane of claim 1 having a viscosity of less than 2,000 cPs at 73°C.
- 20 5. The polyether-containing polyureaurethane of claim 1 comprising a prepolymer and an amine-containing curing agent.
6. The polyether-containing polyureaurethane of claim 5 wherein said prepolymer comprises a polyisocyanate and at least one polyether-containing polyol material.
- 25 7. The polyether polyureaurethane of claim 6 wherein said polyisocyanate is chosen from aliphatic polyisocyanates, cycloaliphatic polyisocyanates, aromatic polyisocyanates, and mixtures thereof.
8. The polyether polyureaurethane of claim 7 wherein said polyisocyanate is chosen from aliphatic diisocyanates, cycloaliphatic diisocyanates, and mixtures thereof.

- 27 -

5 9. The polyether polyureaurethane of claim 7 wherein said polyisocyanate is chosen from cyclohexylmethane and isomeric mixtures thereof.

10 10. The polyether-containing polyureaurethane of claim 7 wherein said polyisocyanate is chosen from trans-trans isomer of 4,4'-methylenebis(cyclohexyl isocyanate).

11. The polyether-containing polyureaurethane of claim 7 wherein said polyisocyanate is chosen from 3-isocyanato-methyl-3,5,5-trimethyl cyclohexyl-isoxyanate; meta-tetramethylxylene diisocyanate (1,3-bis(1-isocyanato-1-methylethyl)-benzene) and mixtures thereof.


10 12. The polyether-containing polyureaurethane of claim 5 wherein said prepolymer has an NCO/OH equivalent ratio of from 2.0 to less than 4.5.

13. The polyether-containing polyureaurethane of claim 5 wherein said polyether-containing polyol material is chosen from polyether polyols and mixtures thereof.

15 14. The polyether-containing polyureaurethane of claim 6 wherein said polyether-containing polyol material has a weight average molecular weight of from 200 to 32,000.

15. The polyether-containing polyureaurethane of claim 14 wherein said polyether-containing polyol material has a number average molecular weight of from 2,000 to 15,000.

20 16. The polyether-containing polyureaurethane of claim 5 wherein said amine-containing curing agent is chosen from materials having the following chemical formula and mixtures thereof:

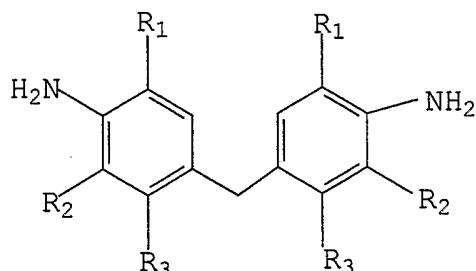

- 28 -

wherein R<sub>1</sub> and R<sub>2</sub> are each independently chosen from methyl, ethyl, propyl, and isopropyl groups, and R<sub>3</sub> is chosen from hydrogen and chlorine.

17. The polyether-containing polyurethane of claim 5 wherein said amine-containing curing agent is 4,4'-methylenebis(3-chloro-2,6-diethylaniline).  
5
18. The polyether-containing polyurethane of claim 5 wherein said amine-containing curing agent is chosen from 2,4-diamino-3,5-diethyl-toluene; 2,6-diamino-3,5-diethyl-toluene and mixtures thereof.
19. The polyether-containing polyurethane of claim 5 wherein said amine-containing curing agent has a NCO/NH<sub>2</sub> equivalent ratio of from 1.0  
10 NCO/0.60 NH<sub>2</sub> to 1.0 NCO/1.20 NH<sub>2</sub>.
20. A polyether-containing polyurethane comprising the reaction product  
of:
  - (a) a prepolymer comprising a polyisocyanate and at least one  
15 polyether-containing polyol; and
  - (b) an amine-containing curing agent,  
wherein said prepolymer has a NCO/OH equivalent ratio of from 2.0 to  
less than 4.5.
21. The polyether-containing polyurethane of claim 20 having a NCO/OH  
20 equivalent ratio of from 2.1 to 4.0.
22. The polyether-containing polyurethane of claim 20 comprising block  
moieties derived from a polyether polyol.
23. The polyether-containing polyurethane of claim 22 wherein said  
polyether polyol comprises the following formula:  
25




wherein R can represent hydrogen or C<sub>1</sub>-C<sub>6</sub> alkyl; Y can represent CH<sub>2</sub>; n can be an integer from 0 to 6; a, b, and c can each be an integer from 0 to 300, wherein a, b and c are chosen such that the weight average molecular weight of the polyol does not exceed 32,000.

24. The polyether-containing polyureaurethane of claim 20 having a viscosity of less than 2,000 cPs at 73°C.
25. The polyether-containing polyureaurethane of claim 20 wherein said polyether-containing polyureaurethane comprises a prepolymer and an amine-containing curing agent.
- 5 26. The polyether-containing polyureaurethane of claim 25 wherein said prepolymer comprises a polyisocyanate and at least one polyether-containing polyol material.
- 10 27. The polyether-containing polyureaurethane of claim 26 wherein said polyisocyanate is chosen from aliphatic polyisocyanates, cycloaliphatic polyisocyanates, aromatic polyisocyanates, and mixtures thereof.
28. The polyether polyureaurethane of claim 27 wherein said polyisocyanate is chosen from aliphatic diisocyanates, cycloaliphatic diisocyanates, and mixtures thereof.
- 15 29. The polyether-containing polyureaurethane of claim 26 wherein said polyisocyanate is chosen from cyclohexylmethane and isomeric mixtures thereof.
30. The polyether-containing polyureaurethane of claim 26 wherein said polyisocyanate is chosen from trans, trans isomer of 4,4'-methylenebis(cyclohexyl isocyanate).
- 20 31. The polyether-containing polyureaurethane of claim 26 wherein said polyisocyanate is chosen from 3-isocyanator-methyl-3,5,5-trimethyl cyclohexyl-isoxyanate; meta-tetramethylxylene diisocyanate (1,3-bis(1-isocyanato-1-methylethyl)-benzene) and mixtures thereof.
- 25 32. The polyether-containing polyureaurethane of claim 25 wherein said prepolymer has an NCO/OH equivalent ratio of from 2.0 to less than 4.5.
33. The polyether-containing polyureaurethane of claim 26 wherein said polyether-containing polyol material is chosen from polyether polyols and mixtures thereof.

- 30 -

- 34. The polyether-containing polyureaurethane of claim 26 wherein said polyether-containing polyol material has a weight average molecular weight of from 200 to 32,000.
- 5 35. The polyether-containing polyureaurethane of claim 29 wherein said polyether-containing polyol material has a number average molecular weight of from 2,000 to 15,000.
- 36. The polyether-containing polyureaurethane of claim 25 wherein said amine-containing curing agent is chosen from materials having the following chemical formula and mixtures thereof:

10

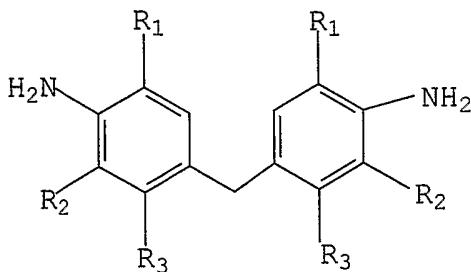

wherein R<sub>1</sub> and R<sub>2</sub> are each independently chosen from methyl, ethyl, propyl, and isopropyl groups, and R<sub>3</sub> is chosen from hydrogen and chlorine.

- 15 37. The polyether-containing polyureaurethane of claim 25 wherein said amine-containing curing agent is 4,4'-methylenebis(3-chloro-2,6-diethylaniline).
- 38. The polyether-containing polyureaurethane of claim 25 wherein said amine-containing curing agent is chosen from 2,4-diamino-3,5-diethyltoluene; 2,6-diamino-3,5-diethyl-toluene and mixtures thereof.
- 20 39. The polyether-containing polyureaurethane of claim 25 wherein said amine-containing curing agent has a NCO/NH<sub>2</sub> equivalent ratio of from 1.0 NCO/0.60 NH<sub>2</sub> to 1.0 NCO/1.20 NH<sub>2</sub>.
- 40. A method of preparing a polyether-containing polyureaurethane comprising the steps of:

25

- 31 -

- (a) reacting a polyisocyanate with at least one polyether-containing polyol to form a polyether-containing polyurea prepolymer; and
- (b) reacting said prepolymer with an amine-containing curing agent,

5

wherein said prepolymer has a NCO/OH equivalent ratio of from 2.0 to less than 4.5.

- 41. The polyether-containing polyureaurethane of claim 40 having a viscosity of less than 2,000 cPs.
- 10 42. The polyether-containing polyureaurethane of claim 40 wherein said polyether-containing polyureaurethane comprises a prepolymer and an amine-containing curing agent.
- 43. The polyether-containing polyureaurethane of claim 42 wherein said prepolymer comprises a polyisocyanate and at least one polyether-containing polyol material.
- 15 44. The polyether-containing polyureaurethane of claim 43 wherein said polyisocyanate is chosen from aliphatic polyisocyanates, cycloaliphatic polyisocyanates, aromatic polyisocyanates, and mixtures thereof.
- 45. The polyether-containing polyureaurethane of claim 44 wherein said polyisocyanate is chosen from aliphatic diisocyanates, cycloaliphatic diisocyanates, and mixtures thereof.
- 20 46. The polyether-containing polyureaurethane of claim 43 wherein said polyisocyanate is chosen from cyclohexylmethane and isomeric mixtures thereof.
- 47. The polyether-containing polyureaurethane of claim 43 wherein said polyisocyanate is chosen from trans- trans isomer of 4,4'-methylenebis(cyclohexyl isocyanate).
- 25 48. The polyether-containing polyureaurethane of claim 43 wherein said polyisocyanate is chosen from 3-isocyanato-methyl-3,5,5-trimethyl cyclohexyl-isoxyanate; meta-tetramethylxylene diisocyanate (1,3-bis(1-isocyanato-1-methylethyl)-benzene) and mixtures thereof.

30


- 32 -

49. The polyether-containing polyureaurethane of claim 42 wherein said prepolymer has an NCO/OH equivalent ratio of from 2.1 to less than 4.0.
50. The polyether-containing polyureaurethane of claim 43 wherein said polyether-containing polyol material is chosen from polyether polyols and mixtures thereof.
51. The polyether-containing polyureaurethane of claim 43 wherein said polyether-containing polyol material has a number average molecular weight of from 200 to 32,000.
52. The polyether-containing polyureaurethane of claim 46 wherein said polyether-containing polyol material has a number average molecular weight of from 2,000 to 15,000.
53. The polyether-containing polyureaurethane of claim 43 comprising block moieties derived from a polyether polyol.
54. The polyether-containing polyureaurethane of claim 43 wherein said polyether polyol comprises the following formula:



55. wherein R can represent hydrogen or C<sub>1</sub>-C<sub>6</sub> alkyl; Y can represent CH<sub>2</sub>; n can be an integer from 0 to 6; a, b, and c can each be an integer from 0 to 300, wherein a, b and c are chosen such that the weight average molecular weight of the polyol does not exceed 32,000.
56. The polyether-containing polyureaurethane of claim 42 wherein said amine-containing curing agent is chosen from materials having the following chemical formula and mixtures thereof:

- 33 -

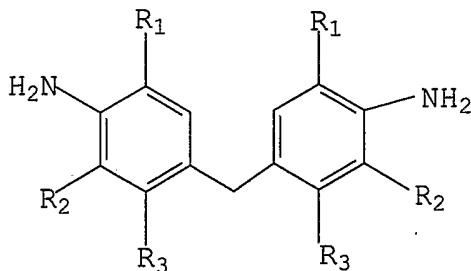

wherein R<sub>1</sub> and R<sub>2</sub> are each independently chosen from methyl, ethyl, propyl, and isopropyl groups, and R<sub>3</sub> is chosen from hydrogen and chlorine.

5        57. The polyether-containing polyurethane of claim 42 wherein said amine-containing curing agent is 4,4'-methylenebis(3-chloro-2,6-diethylaniline).

58. The polyether-containing polyurethane of claim 42 wherein said amine-containing curing agent is chosen from 2,4-diamino-3,5-diethyltoluene; 2,6-diamino-3,5-diethyl-toluene and mixtures thereof.

10        59. The polyether-containing polyurethane of claim 42 wherein said amine-containing curing agent has a NCO/NH<sub>2</sub> equivalent ratio of from 1.0 NCO/0.60 NH<sub>2</sub> to 1.0 NCO/1.20 NH<sub>2</sub>.

60. An optical article comprising a polyether-containing polyurethane, said polyether-containing polyurethane when at least partially cured and when tested as a lens with a hard coating on both surfaces having a maximum center thickness of 2.2 mm in a plano configuration, has an impact resistance of at least 148 feet per second as defined by The High Impact Test.

15        61. An optical article comprising a polyether-containing polyurethane comprising the reaction product of:

(a) a prepolymer comprising an polyisocyanate and at least one polyether-containing polyol; and

(b) an amine-containing curing agent,

20        wherein said prepolymer has a NCO/OH equivalent ratio of from 2.0 to 4.5.

- 34 -

62. A photochromic article comprising a polyether-containing polyureaurethane, said polyether-containing polyureaurethane when at least partially cured and when tested as a lens with a hard coating on both surfaces having a maximum center thickness of 2.2 mm in a plano configuration, has an impact resistance of at least 148 feet per second as defined by The High Impact Test.
- 5 63. A photochromic article comprising a polyether-containing polyureaurethane comprising the reaction product of:
  - (a) a prepolymer comprising an polyisocyanate and at least one polyether-containing polyol; and
  - (b) an amine-containing curing agent,  
wherein said prepolymer has a NCO/OH equivalent ratio of from 10 2.0 to 4.5.

15

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 02/36471A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 C08G18/10 C08G18/75 G02B1/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08G G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	EP 1 197 505 A (TALEX OPTICAL) 17 April 2002 (2002-04-17)  page 2, line 37 -page 3, line 40; claims; examples ---	1-17, 19-37, 39, 60-63
X	WO 00 14137 A (SIMULA) 16 March 2000 (2000-03-16) page 3, line 1 -page 12, line 3; claims 1-37 ---	1-63
A	WO 00 17249 A (SIMULA) 30 March 2000 (2000-03-30) page 5, line 6 -page 15, line 11 page 31, line 14 -page 35, line 14; claims 1, 2 ---	1 -/-

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

## ° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

17 February 2003

03/03/2003

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Bourgonje, A

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 02/36471

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 208 507 A (STUTZ ET AL) 17 June 1980 (1980-06-17) column 1, line 35 -column 5, line 4; claims 1-4; examples 1-4,6,7 -----	1-16
A	US 3 866 242 A (SLAGEL) 18 February 1975 (1975-02-18) column 1, line 42 -column 3, line 4; claim 1 -----	1

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

 International Application No  
 PCT/US 02/36471

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
EP 1197505	A 17-04-2002	AU 7829201	A	18-04-2002	
		EP 1197505	A1	17-04-2002	
		JP 2002187931	A	05-07-2002	
		US 2002068809	A1	06-06-2002	
WO 0014137	A 16-03-2000	US 6127505	A	03-10-2000	
		AU 9514498	A	27-03-2000	
		CA 2342851	A1	16-03-2000	
		CN 1314922	T	26-09-2001	
		EP 1137684	A1	04-10-2001	
		JP 2002524591	T	06-08-2002	
		NO 20011064	A	23-04-2001	
		WO 0014137	A1	16-03-2000	
WO 0017249	A 30-03-2000	US 6258917	B1	10-07-2001	
		EP 1131365	A1	12-09-2001	
		JP 2002526575	T	20-08-2002	
		WO 0017249	A1	30-03-2000	
US 4208507	A 17-06-1980	DE 2731815	A1	01-02-1979	
		CA 1134540	A1	26-10-1982	
		EP 0000360	A1	24-01-1979	
		ES 471695	A1	01-10-1979	
		IT 1105235	B	28-10-1985	
US 3866242	A 18-02-1975	CA 999029	A1	26-10-1976	
		DE 2349327	A1	22-05-1974	
		FR 2205172	A5	24-05-1974	
		GB 1424246	A	11-02-1976	
		IT 996272	B	10-12-1975	
		JP 1093252	C	16-04-1982	
		JP 49080739	A	03-08-1974	
		JP 56034800	B	12-08-1981	