

(12) **United States Patent**
Cofer, Jr. et al.

(10) **Patent No.:** **US 11,466,600 B1**
(45) **Date of Patent:** **Oct. 11, 2022**

- (54) **LUBRICATION FLUID FILTER BYPASS SYSTEM**
- (71) Applicant: **Cummins Inc.**, Columbus, IN (US)
- (72) Inventors: **Stephen D. Cofer, Jr.**, Sugar Grove, PA (US); **Ella Michelle Morris**, Louisville, KY (US); **Nickolas A. Springmeyer**, Greensburg, IN (US)
- (73) Assignee: **Cummins Inc.**, Columbus, IN (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

3,485,324 A * 12/1969 Novak F01P 3/08
123/196 R
3,741,342 A 6/1973 Maddalozzo
7,883,621 B2 2/2011 Bontaz et al.
8,387,571 B2 3/2013 Ulrey et al.
2008/0053753 A1 3/2008 Chevalier et al.
2010/0294231 A1 11/2010 Kusel
2012/0138010 A1* 6/2012 Ulrey F01M 5/02
123/196 R

FOREIGN PATENT DOCUMENTS

JP 49-50335 U 5/1974

OTHER PUBLICATIONS

International Search Report and Written Opinion, PCT Appln. No. PCT/US22/016719, dated May 25, 2022, 12 pgs.

* cited by examiner

Primary Examiner — Yi-Kai Wang
(74) *Attorney, Agent, or Firm* — Taft Stettinius & Hollister LLP

- (21) Appl. No.: **17/202,522**
- (22) Filed: **Mar. 16, 2021**
- (51) **Int. Cl.**
F01M 1/10 (2006.01)
F01M 1/08 (2006.01)
F01M 11/02 (2006.01)

- (52) **U.S. Cl.**
CPC **F01M 1/10** (2013.01); **F01M 1/08** (2013.01); **F01M 11/02** (2013.01); **F01M 2001/083** (2013.01); **F01M 2001/1092** (2013.01); **F01M 2011/022** (2013.01)

- (58) **Field of Classification Search**
CPC . F01M 1/10; F01M 1/08; F01M 11/02; F01M 2001/083; F01M 2001/1092; F01M 2011/022
USPC 123/196 A
See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

3,065,743 A 11/1962 Brehm et al.
3,453,995 A * 7/1969 Pekar, Jr. F01P 3/08
184/104.1

(57) **ABSTRACT**

An internal combustion engine includes an engine lubrication fluid system with a main rifle for distribution of filtered lubrication fluid to a plurality of engine components through a plurality of secondary rifles connected to the main rifle. The system also includes a bypass for bypassing the filter in response to certain engine operating conditions. The bypass is connected to at least one of the secondary rifles so that unfiltered lubrication fluid is not provided to certain engine components under filter bypass conditions, and provided directly to certain other engine components for which unfiltered lubrication fluid is less problematic.

20 Claims, 4 Drawing Sheets

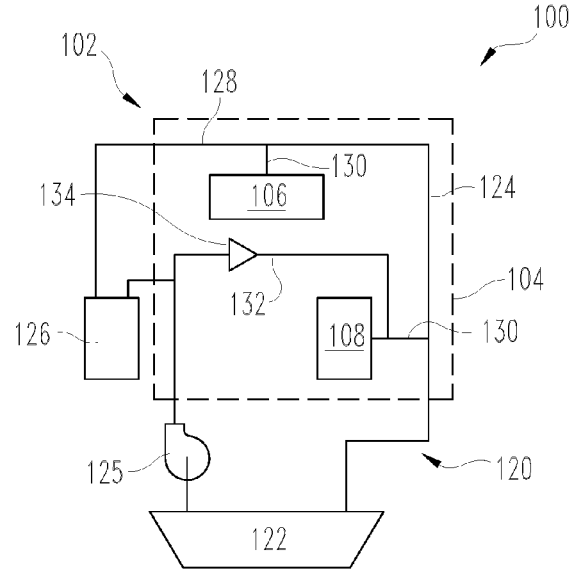

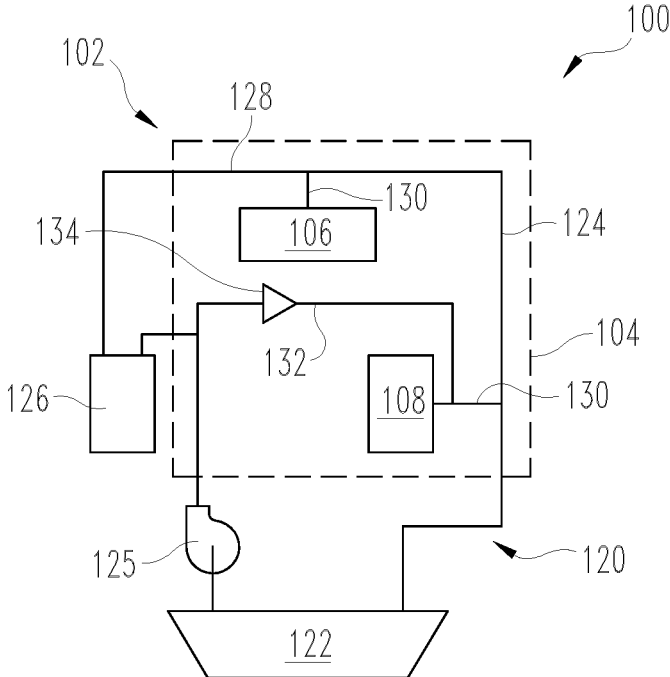


Fig. 1

140 UNFILTERED OIL
150 FILTERED OIL

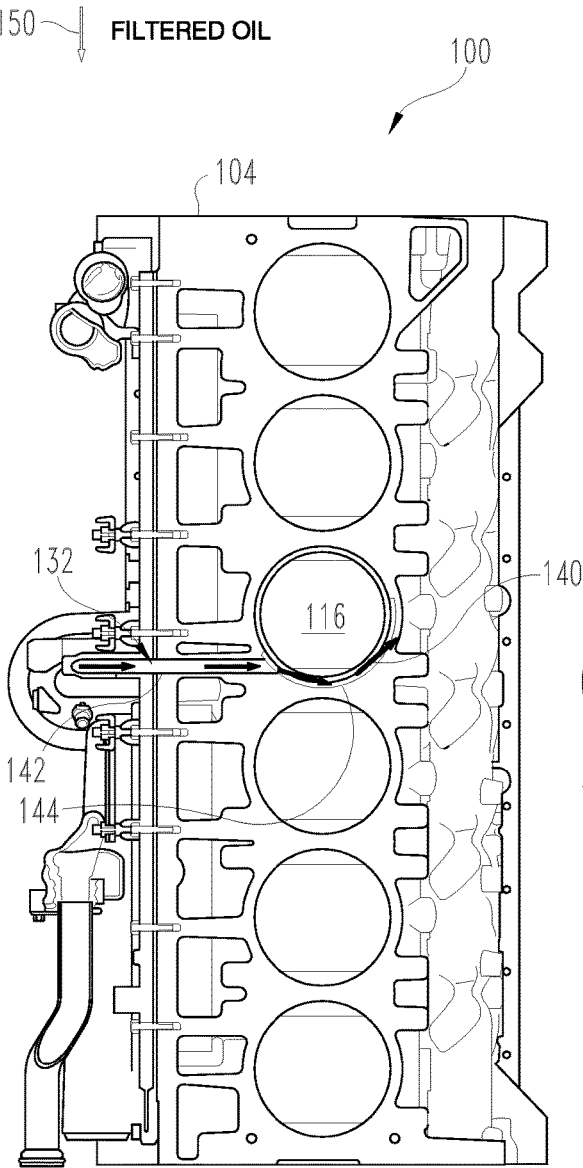


Fig. 2A

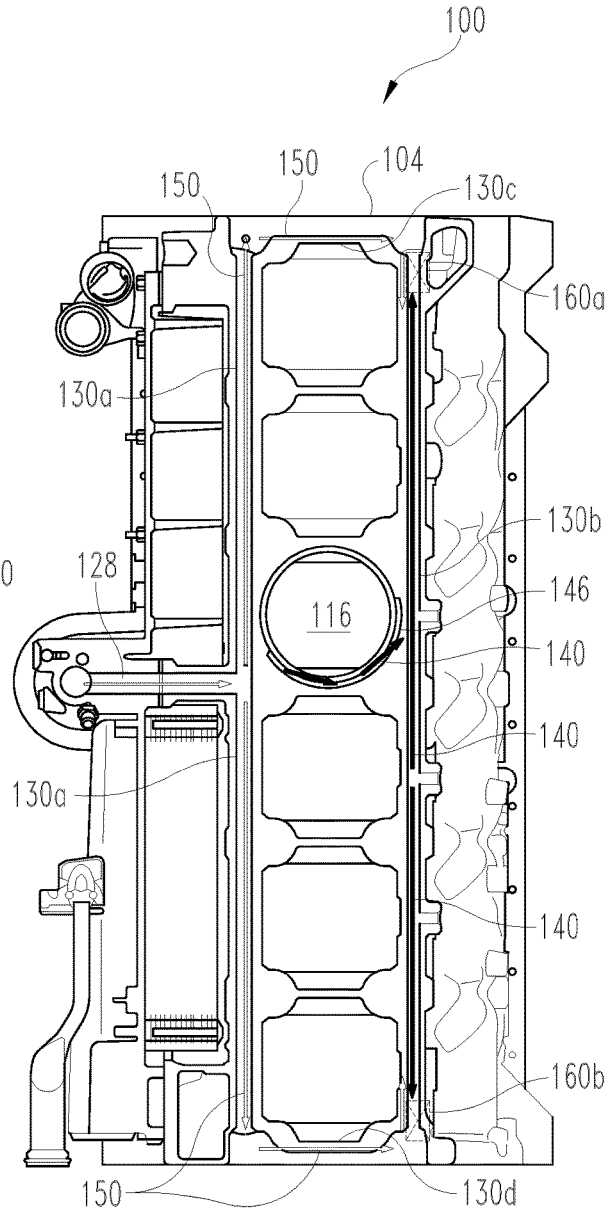


Fig. 2B

140 UNFILTERED OIL
150 FILTERED OIL

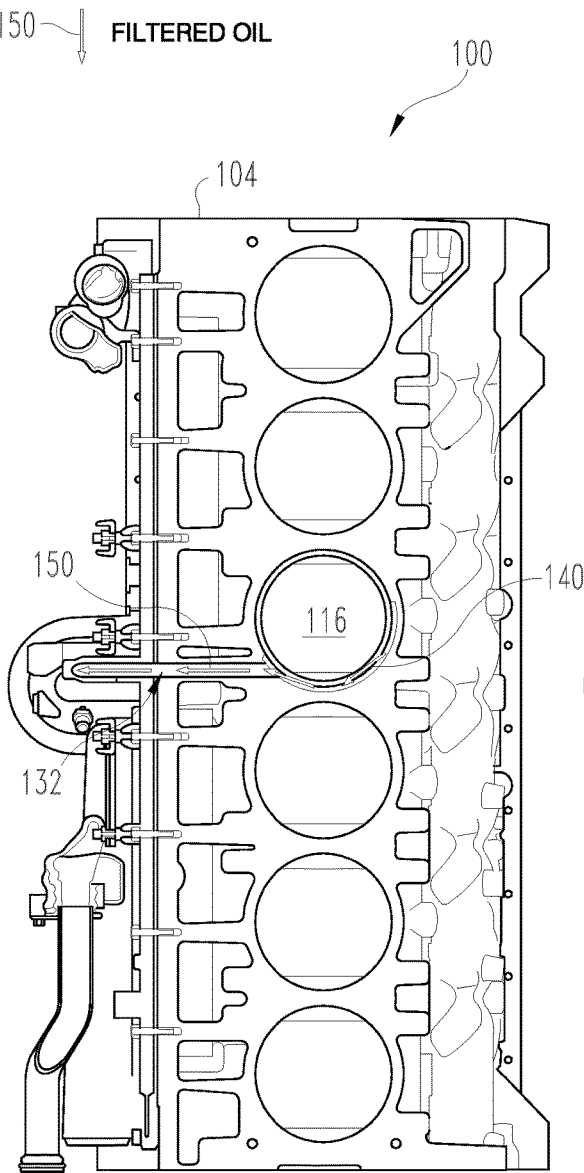


Fig. 3A

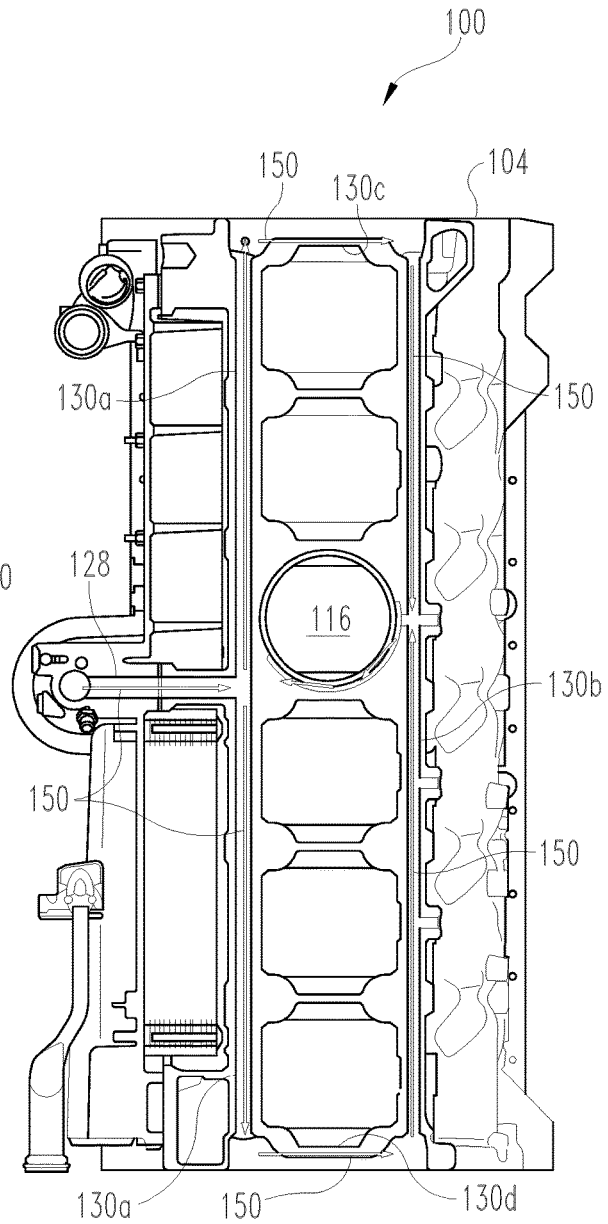


Fig. 3B

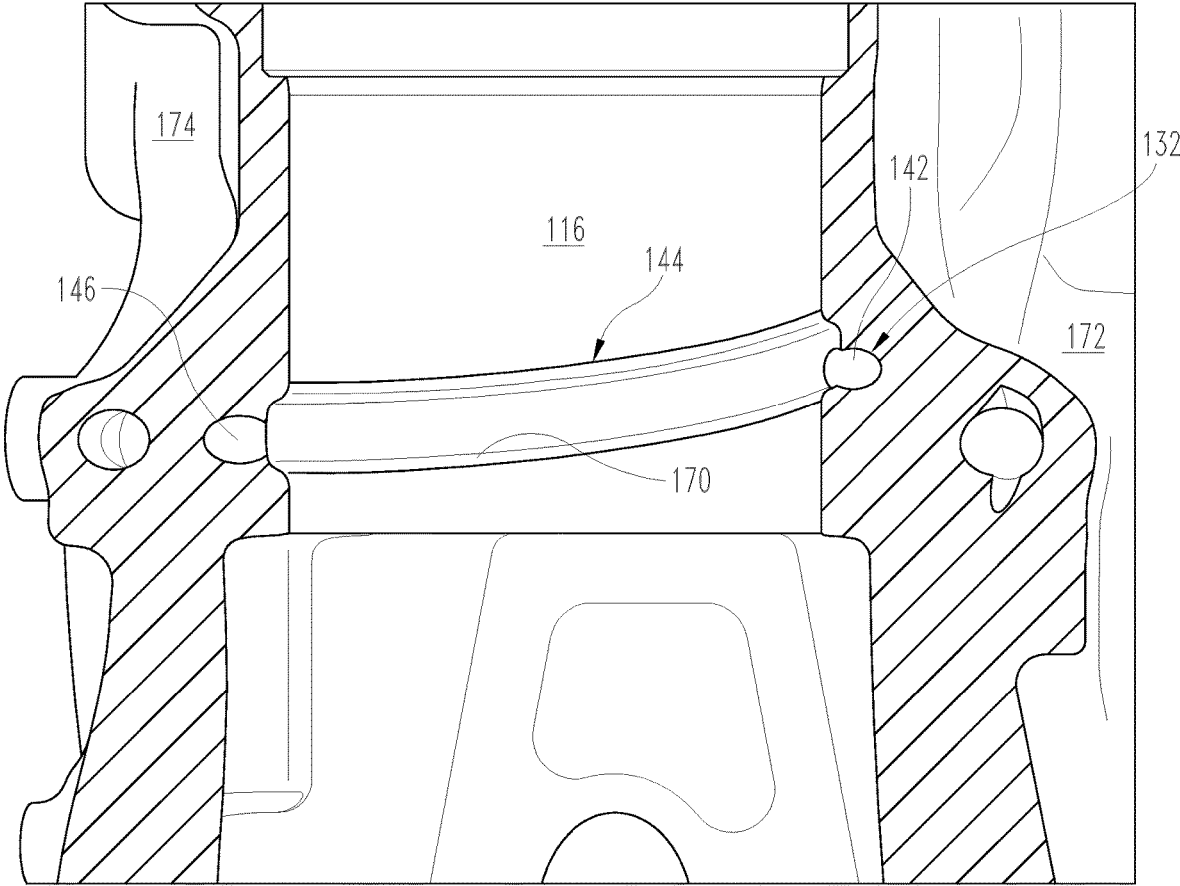


Fig. 4

1

LUBRICATION FLUID FILTER BYPASS SYSTEM

FIELD OF THE INVENTION

This invention relates to an internal combustion engine including a lubrication system, and more particularly to a filter bypass system for an engine lubrication fluid.

BACKGROUND

In an internal combustion engine, a supply of lubrication fluid, such as engine oil, is provided in an oil pan or sump at the bottom of the engine. The cylinders and other components in an internal combustion engine require lubrication and/or cooling with the lubrication fluid to be able to operate properly. During engine operation, a pump is used to carry the lubrication fluid from the sump, through a filter, and into the working portions of the engine in order to lubricate the engines moving parts and to provide other functions. The lubrication fluid is continuously supplied to these moving components, and the lubrication fluid is returned to the sump through various paths by gravity flow.

In order to maintain the filter in working order and to allow engine lubrication in the event the filter is clogged, a filter bypass is provided. The filter bypass typically opens automatically in response to high fluid pressure conditions at the filter, and allows unfiltered lubrication fluid to bypass the filter and flow directly to the main rifle for distribution of the unfiltered lubrication fluid to the engine components. As a result, any debris in the bypassed lubrication fluid is circulated to each of the engine components connected to the lubrication circuit. Therefore, further improvements in lubrication fluid circulation during filter bypass conditions are needed.

SUMMARY

Embodiments include an internal combustion engine including an engine lubrication fluid system with a filter and a filter bypass in a lubrication fluid circuit. The filter is connected to the main rifle of the lubrication fluid circuit so filtered fluid is circulated to all the engine components connected to the lubrication fluid circuit. The bypass is connected directly to a secondary rifle, such as the piston cooling nozzle rifle, of the lubrication fluid circuit downstream of the main rifle. Bypassed, unfiltered lubrication fluid bypasses the main rifle and is sent through the bypass directly to secondary component(s) for which unfiltered lubrication fluid is less problematic, such as the piston cooling nozzles. As a result, the main bearings and other components connected to the main rifle upstream of the secondary component(s) are not sent unfiltered lubrication fluid during filter bypass operating conditions.

This summary is provided to introduce a selection of concepts that are further described below in the illustrative embodiments. This summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used as an aid in limiting the scope of the claimed subject matter. Further embodiments, forms, objects, features, advantages, aspects, and benefits shall become apparent from the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic depiction of an internal combustion engine lubrication fluid system with a filter and a filter bypass.

2

FIGS. 2A and 2B are sectional views through an internal combustion engine showing flow paths for the lubrication fluid with the filter bypass open.

FIGS. 3A and 3B are sectional views through the internal combustion engine showing flow paths for the lubrication fluid with the filter bypass closed.

FIG. 4 is a sectional view of a cylinder showing the part of the bypass around a cylinder of the engine block.

DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended, any alterations and further modifications in the illustrated embodiments, and any further applications of the principles of the invention as illustrated therein as would normally occur to one skilled in the art to which the invention relates are contemplated herein.

Referring to FIG. 1 an internal combustion engine system **100** includes an internal combustion engine **102** with a block **104** housing and/or supporting a plurality of components **106**, **108** such as crankshaft(s), a plurality of cylinders, pistons, bearings, valve trains, gears, piston cooling nozzles, pumps, housings, turbines, etc. that would normally be found on an internal combustion engine. The system **100** further includes a lubrication fluid system **120** for lubrication and/or cooling.

The lubrication fluid system **120** circulates a lubrication fluid, such as oil, to the plurality of components **106**, **108** and receives the lubrication fluid from the plurality of components **106**, **108** for filtering and/or recirculation. In an embodiment discussed herein, first component(s) **106** may include, for example, bearings and/or overhead valve train components. Second components **108** may include, for example, piston cooling nozzle(s). First component(s) **106** are normally upstream of the second component(s) **108**, and circulation of unfiltered lubrication fluid to first component(s) **106** is typically more problematic than it is for second component(s) **108** since second component(s) **108** are less sensitive to debris in the lubrication fluid.

The internal combustion engine **102** may be any type of internal combustion engine that requires lubrication, including at least a diesel, gasoline, or natural gas engine, and/or combinations thereof. The internal combustion engine **102** can include a single cylinder bank, a dual cylinder bank, or any cylinder bank arrangement. Any numbers of cylinders and cylinder arrangements are contemplated for internal combustion engine **102**.

The lubrication fluid system **120** includes a sump **122** that is connected to the plurality of components **106**, **108** with a fluid circuit **124**. The fluid circuit **124** includes a filter **126** connected to the sump **122**. A pump **125** can provide lubrication fluid to filter **126** to filter the lubrication fluid before circulation to components **106**, **108**. The outlet of filter **126** is connected to a main rifle **128** that may be formed wholly or in part in block **104**. The filtered lubrication fluid is provided to main rifle **128** for distribution to the plurality of components **106**, **108** via a plurality of secondary rifles **130a**, **130b** that may be formed wholly or in part in block **104**. The lubrication fluid drains from the plurality of components **106**, **108** for collection at sump **122**.

The lubrication fluid system **120** further includes a bypass **132** formed wholly or in part by a rifle in block **104**. Bypass

132 includes a pressure-responsive bypass valve **134** that normally prevents lubrication fluid from flowing into bypass **132**. Therefore, lubrication fluid is normally filtered and provided to main rifle **128** from filter **126**. However, in response to high pressure conditions in the fluid circuit **124** at filter **126**, such as due to a clogged filter **126** and/or cold start conditions, bypass valve **134** opens so that lubrication fluid bypasses the filter **126** and is circulated into bypass **132**, bypassing the main rifle **128**.

Bypass **132** is not connected to main rifle **128**, therefore the unfiltered lubrication fluid is not circulated to all of the plurality of components **106**, **108**. Instead, bypass **132** is connected to at least one of the secondary rifles **130b** such that the unfiltered lubrication fluid is provided directly to second component(s) **108**, and therefore the first component(s) **106** are not provided unfiltered lubrication fluid, at least under most filter bypass operating conditions. In an embodiment, the at least one secondary rifle **130b** is a piston cooling nozzle rifle and the second component(s) **108** are piston cooling nozzles.

Referring further to FIGS. 2A-2B, the lubrication fluid circuit **124** is shown in when bypass valve **134** is open. Block **104** includes bypass **132** (FIG. 2A) that is formed in block **104** at a location that is offset in elevation above main rifle **128** (FIG. 2B). Block **104** includes a piston cooling nozzle secondary rifle **130b** that is connected to bypass **132**. Block **104** also includes a plurality of secondary rifles **130a**, **130c**, **130d** connected to main rifle **128** at the same elevation as main rifle **128**, as shown in FIG. 2B. Secondary rifles **130c**, **130d** are also connected to opposite ends of secondary rifle **130b**.

Unfiltered lubrication fluid **140** is provided directly to bypass **132** for distribution directly to the secondary rifle **130b** for distribution to the piston cooling nozzles. Since the secondary rifle **130b** is on the side of block **104** that is opposite of the filter **126**, the bypass **132** traverses the block **104** for direct connection to secondary rifle **130b**. Bypass **132** is formed by a rifle with a first part **142** extending from bypass valve **134** to cylinder **116**, a second part **144** extending around cylinder **116**, and a third part **146** extending from cylinder **116** to secondary rifle **130b**. Unfiltered lubrication fluid **140** fills secondary rifle **130b** directly from bypass **132** for distribution to the second component(s) **108**, such as the piston cooling nozzles. Meanwhile, filtered lubrication fluid **150** is maintained in main rifle **128** and in the other secondary rifles **130a**, **130c**, **130d** for distribution to the first component(s) **106**.

Although not required, check valves **160a**, **160b** (FIG. 2B) may be provided at the junction of secondary rifle **130b** with secondary rifles **130c**, **130d**. The check valves **160a**, **160b** can assist in preventing or reducing reverse flow of unfiltered lubrication fluid **140** from secondary rifle **130b** to the first component(s) **106**. However, check valves **160a**, **160b** are not required in all embodiments, and some embodiments envision some mixing of filtered and unfiltered lubrication fluid in all or a part of the secondary rifles **130a**, **130b**, **130c**, **130d**. The pressure differential between the filtered and unfiltered lubrication fluid can be maintained to prevent the flow of unfiltered lubrication fluid from secondary rifle **130b** to first component(s) **106** under most operating conditions.

Referring further to FIGS. 3A-3B, the lubrication fluid circuit **124** is shown in a condition in which bypass valve **134** is closed. With the bypass valve **134** closed, no unfiltered lubrication fluid enters the lubrication fluid circuit **124** via bypass **132**. Filtered lubrication fluid **150** is provided from filter **126** to main rifle **128**, and then to secondary rifles

130a, **130c**, **130d** for distribution to the first component(s) **106** and to second component(s) **108** via secondary rifle **130b**. Any unfiltered lubrication fluid **140** is forced from secondary rifle **130b** back into bypass **132**, and into filter **126**.

Referring to FIG. 4, an embodiment of bypass **132** is shown in which the outer side of the second part **144** of bypass **132** is formed as a groove **170** cast in or otherwise formed by block **104**. Groove **170** extends around a part of an outer perimeter of cylinder **116**. The inner or other side of the passage defined by second part **144** is formed by the liner (not shown) of cylinder **116**. Unfiltered lubrication fluid **140** enters the second part **144** of bypass **132** on the hot or exhaust side **172** of cylinder **116**. Second part **144** slopes downwardly in elevation to an exit at the cold or intake side **174** of cylinder **116** that is connected to secondary rifle **130d**. The sloped arrangement of bypass **132** allows unfiltered lubrication fluid to drain into the secondary rifle **130b** and into second component(s) **108** when the engine is shut down.

Various aspects of the present disclosure are contemplated as indicated in the claims appended hereto. According one aspect, a system includes an internal combustion engine including a block, a plurality of components supported by the block, and a lubrication fluid for lubricating the plurality of components. The system also includes a lubrication fluid circuit for circulating a supply of the lubrication fluid to lubricate the plurality of components. The lubrication fluid circuit includes a sump for storing lubrication fluid to be filtered, a filter connected to the sump for filtering lubrication fluid upstream of the plurality of components, a main rifle in the block connected to the filter for receiving filtered lubrication fluid for distribution to the plurality of components through a plurality of secondary rifles in the block that are connected to the main rifle, and a bypass connected to receive unfiltered lubrication fluid that bypasses the filter. The bypass is directly connected to at least one of the plurality of secondary rifles downstream of the main rifle.

In an embodiment, the bypass includes a pressure-responsive valve that normally blocks the flow of lubrication fluid through the bypass, and the pressure-responsive valve automatically opens in response to a lubrication fluid pressure above a predetermined threshold.

In an embodiment, the plurality of components includes a number of piston cooling nozzles and the at least one of the plurality of secondary rifles that is connected directly to the bypass is a piston cooling nozzle rifle.

In an embodiment, the bypass includes a first portion in the block extending from a cylinder housed by the block toward the filter, a second portion extending from the cylinder to the piston cooling nozzle rifle, and a third portion connecting the first and second portions that is formed around the cylinder between the block and a liner of the cylinder. In an embodiment, the third portion changes in elevation from the first portion to the second portion. In an embodiment, the third portion is wrapped around a part of a perimeter of the cylinder.

In an embodiment, the plurality of secondary rifles includes: a first secondary rifle along a first side of a plurality of cylinders housed in the block; a second secondary rifle extending from a first end of the first secondary rifle along a first end of the block; a third secondary rifle extending from a second end of the first secondary rifle along a second end of the block; and a piston cooling nozzle rifle along a second side of the plurality of cylinders that connects the second secondary rifle and the third secondary rifle. The bypass is directly connected to the piston cooling nozzle rifle.

In an embodiment, a check valve or orifice at each end of the piston cooling nozzle rifle to restrict lubrication fluid flow from the piston cooling nozzle rifle into the second and third secondary rifles. In an embodiment, the bypass extends through the block and around a side of one of the cylinders for connection to the piston cooling nozzle rifle. In an embodiment, the bypass is not directly connected to the main rifle.

In another aspect, a lubrication system for an internal combustion engine includes a sump for storing lubrication fluid, a filter device for filtering lubrication fluid from the sump, a main rifle in the engine connected to the filter device to receive filtered lubrication fluid from the filter device, a plurality of secondary rifles connecting the main rifle to a plurality of engine components to provide filtered lubrication fluid to the plurality of engine components, and a bypass connected to one of the secondary rifles to bypass the filter and the main rifle and circulate unfiltered lubrication fluid directly to the connected one of the secondary rifles.

In an embodiment, the bypass includes a pressure-responsive valve that automatically opens in response to a pressure of the lubrication fluid exceeding a threshold pressure. In an embodiment, the one of the secondary rifles is a piston cooling nozzle rifle connected to piston cooling nozzles.

In an embodiment, the bypass is formed in part by a rifle through a block of the engine and in part by a passage between the block and a cylinder liner of a cylinder of the internal combustion engine. In an embodiment, the passage changes in elevation from one side of the cylinder to another side of the cylinder. In an embodiment, the passage gravity drains into the one of the secondary rifles.

In an embodiment, the bypass is not directly connected to the main rifle.

In another aspect, a method for circulating lubrication fluid in a lubrication fluid system of an internal combustion engine includes circulating filtered lubrication fluid from a filter device through a main rifle of the internal combustion engine to a plurality of components of the internal combustion engine; and, in response to a filter bypass condition, bypassing the filter device and the main rifle to circulate unfiltered lubrication fluid to a first subset of the plurality of components that are downstream of a second subset of the plurality of components.

In one embodiment, the method includes opening a valve in response to the filter bypass condition to bypass the filter device and the main rifle to circulate the unfiltered lubrication fluid. In an embodiment, the filter bypass condition is a pressure of the lubrication fluid exceeding a threshold pressure.

Any of the embodiments disclosed herein may be combined with one or more other embodiments unless otherwise excluded.

While the invention has been illustrated and described in detail in the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character, it being understood that only certain exemplary embodiments have been shown and described. Those skilled in the art will appreciate that many modifications are possible in the example embodiments without materially departing from this invention. Accordingly, all such modifications are intended to be included within the scope of this disclosure as defined in the following claims.

In reading the claims, it is intended that when words such as “a,” “an,” “at least one,” or “at least one portion” are used there is no intention to limit the claim to only one item unless specifically stated to the contrary in the claim. When the language “at least a portion” and/or “a portion” is used the

item can include a portion and/or the entire item unless specifically stated to the contrary.

What is claimed is:

1. A system, comprising:
 - a an internal combustion engine including a block, a plurality of components supported by the block, and a lubrication fluid for lubricating the plurality of components;
 - a a lubrication fluid circuit for circulating a supply of the lubrication fluid to lubricate the plurality of components, the lubrication fluid circuit including:
 - a a sump for storing lubrication fluid to be filtered;
 - a a filter connected to the sump for filtering lubrication fluid upstream of the plurality of components;
 - a a main rifle in the block connected to the filter for receiving filtered lubrication fluid for distribution to the plurality of components through a plurality of secondary rifles in the block that are connected to the main rifle; and
 - a a bypass connected to receive unfiltered lubrication fluid that bypasses the filter, wherein the bypass is directly connected to at least one of the plurality of secondary rifles downstream of the main rifle.
2. The system of claim 1, wherein the bypass includes a pressure-responsive valve that normally blocks the flow of lubrication fluid through the bypass, the pressure-responsive valve automatically opening in response to a lubrication fluid pressure above a predetermined threshold.
3. The system of claim 1, wherein the plurality of components includes a number of piston cooling nozzles and the at least one of the plurality of secondary rifles that is connected directly to the bypass is a piston cooling nozzle rifle.
4. The system of claim 3, wherein the bypass includes a first part in the block extending from a cylinder housed by the block toward the filter, a second part extending from the cylinder to the piston cooling nozzle rifle, and a third part connecting the first and second parts that is formed around the cylinder between the block and a liner of the cylinder.
5. The system of claim 4, wherein the third part changes in elevation from the first part to the second part.
6. The system of claim 4, wherein the third part is wrapped around a part of a perimeter of the cylinder.
7. The system of claim 1, wherein the bypass is not directly connected to the main rifle.
8. The system of claim 1, wherein the plurality of secondary rifles includes:
 - a a first secondary rifle along a first side of a plurality of cylinders housed in the block;
 - a a second secondary rifle extending from a first end of the first secondary rifle along a first end of the block;
 - a a third secondary rifle extending from a second end of the first secondary rifle along a second end of the block; and
 - a a piston cooling nozzle rifle along a second side of the plurality of cylinders that connects the second secondary rifle and the third secondary rifle, wherein the bypass is directly connected to the piston cooling nozzle rifle.
9. The system of claim 8, further comprising a check valve or orifice at each end of the piston cooling nozzle rifle to restrict lubrication fluid flow from the piston cooling nozzle rifle into the second and third secondary rifles.
10. The system of claim 8, wherein the bypass extends through the block and around a side of one of the cylinders for connection to the piston cooling nozzle rifle.

11. A lubrication system for an internal combustion engine, comprising:

- a sump for storing lubrication fluid;
- a filter device for filtering lubrication fluid from the sump;
- a main rifle in the engine connected to the filter device to receive filtered lubrication fluid from the filter device;
- a plurality of secondary rifles connecting the main rifle to a plurality of engine components to provide filtered lubrication fluid to the plurality of engine components; and
- a bypass connected to one of the secondary rifles downstream of the main rifle to bypass the filter and the main rifle and circulate unfiltered lubrication fluid directly to the connected one of the secondary rifles.

12. The system of claim **11**, wherein the bypass includes a pressure-responsive valve that automatically opens in response to a pressure of the lubrication fluid exceeding a threshold pressure.

13. The system of claim **11**, wherein the one of the secondary rifles is a piston cooling nozzle rifle connected to piston cooling nozzles.

14. The system of claim **11**, wherein the bypass is formed in part by a rifle through a block of the engine and in part by a passage between the block and a cylinder liner of a cylinder of the internal combustion engine.

15. The system of claim **14**, wherein the passage changes in elevation from one side of the cylinder to another side of the cylinder.

16. The system of claim **15**, wherein the passage gravity drains into the one of the secondary rifles.

17. The system of claim **11**, wherein the bypass is not directly connected to the main rifle.

18. A method for circulating lubrication fluid in a lubrication fluid system of an internal combustion engine, comprising:

- circulating filtered lubrication fluid from a filter device through a main rifle of the internal combustion engine to a plurality of components of the internal combustion engine; and

in response to a filter bypass condition, bypassing the filter device and the main rifle to circulate unfiltered lubrication fluid to a first subset of the plurality of components that are downstream of a second subset of the plurality of components, wherein the first subset of the plurality of components are connected to at least one secondary rifle that receives the bypassed unfiltered lubrication fluid downstream of the main rifle.

19. The method of claim **18**, further comprising opening a valve in response to the filter bypass condition to bypass the filter device and the main rifle to circulate the unfiltered lubrication fluid.

20. The method of claim **19**, wherein the filter bypass condition is a pressure of the lubrication fluid exceeding a threshold pressure.

* * * * *