

(19)



(11)

EP 4 197 801 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

04.12.2024 Bulletin 2024/49

(51) International Patent Classification (IPC):

B41J 19/00^(2006.01) B41J 29/10^(2006.01)

(21) Application number: **21216158.2**

(52) Cooperative Patent Classification (CPC):

B41J 19/00; B41J 29/02

(22) Date of filing: **20.12.2021**

(54) PRINTER AND GUIDANCE RAIL FOR A PRINT HEAD CARRIAGE

DRUCKER UND FÜHRUNGSSCHIENE FÜR EINEN DRUCKKOPFWAGEN

IMPRIMANTE ET RAIL DE GUIDAGE POUR UN CHARIOT DE TÊTE D'IMPRESSION

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

• **ROSENBOOM, Fabian T.**

Venlo (NL)

• **ALBERS, Antonius G.H.**

Venlo (NL)

(43) Date of publication of application:

21.06.2023 Bulletin 2023/25

(74) Representative: **Canon Production Printing IP**

Department

Canon Production Printing Netherlands B.V.

Van der Grintenstraat 10

5914 HH Venlo (NL)

(73) Proprietor: **Canon Production Printing Holding B.V.**

5914 HH Venlo (NL)

(72) Inventors:

• **VAN BOMMEL, Ton A.J.J.**

Venlo (NL)

(56) References cited:

US-A1- 2011 181 659 US-A1- 2011 249 054

US-A1- 2017 106 686 US-A1- 2020 047 527

EP 4 197 801 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention generally pertains to a printer with a print head carriage movably mounted on two guidance rails with reduced susceptibility to vibrations.

BACKGROUND ART

[0002] In many types of printers, a print head carriage is moved relative to a medium such as a sheet or a roll of paper or foil of plastic or the like. Such printers are also sometimes designated as "scanning printing systems". The "scanning printing systems" comprise a carriage configured to, in printing operation, move in reciprocation in a main scanning direction over the medium. The print head carriage carries a print head, which marks the medium with a marking agent such as ink or a conductive paste in order to create text, patterns, colors, images, electrical circuits and/or the like on the medium.

[0003] The print head carriage typically moves bidirectionally along a linear path and is typically mounted between two so-called runner blocks, which in turn are moveably arranged on a respective one of two guidance rails installed in parallel in the printer. The mounting of such a guidance rail in a carriage printing system is usually designed to be equidistant, for example with a mounting pitch of 60 millimeters.

[0004] EP 3 564 038 A1 discloses a guiding structure for a print head carriage in which equidistant mounting sites are provided for an array of mounting bodies for mounting the guiding structure to the rest of the printer.

[0005] US 2018/079 240 A1 describes an assembly for moving a carriage of a printer. Regarding a vibration problem that may arise when the carriage moves, it is suggested to include a flexible support element and a tensioner assembly for tensioning the flexible support element. By controlling the tension of the flexible support element, it is endeavored to dampen vibrations of the assembly caused by the movement of the carriage.

[0006] US 2020/047527 A1 discloses a printer with a guiding structure according to the preamble of claim 1.

SUMMARY OF THE INVENTION

[0007] It has been found by the inventors that the typical equidistant arrangement of the mounting sites of the guidance rail may lead to an undesired increase in vibration in and of the guidance rail due to the movement of the print head carriage. In particular, when the print head carriage is moving with a constant speed along the guidance rail for an extended period of time, this induces vibrations in the guidance rail. Since the guidance rail is fixated at each of the mounting sites which are equidistant in the prior art, this creates a regular pattern of fixed points. Between these fixed points at the mounting sites,

the guidance rail is comparatively freer to shift. Consequently, such a guidance rail installed in a printer is susceptible to particular vibration frequencies induced by the print head carriage, in particular to frequencies that are integer multiples of the base distance between the mounting sites. Vibrations in the guidance rail, in turn, negatively affect the longevity and the precision of the print head carriage.

[0008] It is therefore an objective of the present invention to provide a printer with a guidance rail, which are less susceptible to these types of vibrations.

[0009] Accordingly, the invention provides a printer according to claim 1.

[0010] In other words, the mounting sites of the guidance rail are non-equidistant overall as there is at least one distance between one pair of adjacent mounting sites which is different from at least one other distance between one other pair of adjacent mounting sites (wherein the one pair and the other pair may have at most one mounting site in common).

[0011] Advantageously, by arranging the mounting sites non-equidistant, the strict regularity of the arrangement of mounting sites is removed and the susceptibility of the guidance rail to vibrations is reduced. It is preferred that there is a plurality of first distances between adjacent mounting sites which are different from a plurality of second distances between adjacent mounting sites. In general, the less regular the arrangement of mounting sites on the guidance rail is, the less susceptible the guidance rail is to vibrations.

[0012] The mounting site being arranged essentially in a row may be understood to mean that they are arranged in a strict row as much as usual tolerances allow or that they are arranged in a row with perpendicular deviations of each mounting site from an ideal, strict row between (including) zero and a maximum deviation value, MDV. The MDV may as low as zero and as large as, for example, the size of the mounting site in the direction perpendicular to the ideal, strict row. This direction may also be simply designated as the "perpendicular direction", i.e., perpendicular to the longitudinal direction along which the guidance rail itself extends. Thus, the maximum distance between any two mounting sites in the perpendicular direction may be two times MDV, in case that one of the mounting site is maximally deviated in the positive perpendicular direction and another one of the mounting sites is maximally deviated in the negative perpendicular direction.

[0013] In some advantageous embodiments, refinements, or variants of embodiments, equidistant center positions for the mounting sites are defined, each mounting site is arranged within a predefined tolerance interval around a respective one of the center positions, and the relative position of each mounting site to the respective center position is different for at least two of the mounting sites. In each tolerance interval, there is only a single center position and only a single mounting site.

[0014] The equidistant center positions have the effect

that the guidance rail is, on average, fastened to the printer at regular (equidistant) intervals such that at no point of the guidance rail there is an excess of play. On the other hand, since the mounting sites are not arranged exactly at the center positions but at (at least partially, i.e., at least for some mounting sites) different relative positions thereto, the strict regularity of the mounting sites is advantageously broken, and the guidance rail is less susceptible to vibrations.

[0015] Taking this idea further, more preferably each mounting site is randomly arranged within the predefined tolerance interval around its respective center position. This strongly reduces the chances that the guidance rail has any resonance frequency that can be excited by the movement of the carriage. The term "randomly" shall here be understood to include both true randomness as well as pseudo-randomness in the mathematical sense.

[0016] In some advantageous embodiments, refinements, or variants of embodiments, each distance between any two adjacent mounting sites is different. This is another way to strongly reduce the chances that the guidance rail has any resonance frequency that can be excited by the movement of the print head carriage.

[0017] In some advantageous embodiments, refinements, or variants of embodiments, at least two different distance values are defined for adjacent mounting sites, and wherein the at least two different distance values alternate regularly along the row of mounting sites. It should be noted that whenever herein distances between mounting sites are discussed, this pertains to distances between adjacent mounting sites unless explicitly specified otherwise. Two different distances values A, B mean that the distances between pairs of adjacent mounting sites along the longitudinal direction vary as A-B-A-B-A... and so on. For three different distances values A, B, and C, the order may be A-B-C-A-B-C-A ... and so on. The largest resonance frequency would be the largest common divisor of A, B, C, ... and so on which will in general be the smaller, the more different distance values, A, B, C, D, ... and so on are present.

[0018] Advantageously, the ratio of adjacently applied distance values (i.e. the ratio of A:B, of B:C, .. and so on) is between 1:1 and 1:5, preferably between 1:2 and 1:4, more preferably between 1:3 and 1:4. These values empirically provide a good balance between the advantages of fixing the guidance rail at equidistant mounting sites for reasons of stability and the advantages of reducing its susceptibility to vibrations.

[0019] In some advantageous embodiments, refinements, or variants of embodiments, the mounting sites are configured as holes or bores through which mounting elements for mounting the guidance rail to the printer can be inserted. The mounting elements may in particular be mounting means such as screws, bolts, and/or the like. The extent of the hole or bore in the perpendicular direction, as a percentage of the extent of the guidance rail itself along the perpendicular direction, is preferably larger than 50%, more preferably larger than 70%.

[0020] The invention further provides a printer comprising at least one guidance rail according to an embodiment of the present invention, the at least one guidance rail being mounted to the printer by mounting elements attached at the mounting sites of the guidance rail. Preferably, at least (or exactly) two guidance rails are provided and mounted to the printer, more preferably in parallel for providing additional stability to the moving print head carriage.

[0021] It is further preferred that the first, second, third, ... and so on mounting sites of the first guidance rail are positioned at different positions along the longitudinal direction than the respective first, second, third, ... and so on mounting sites of the second guidance rail. This will further reduce the susceptibility of the assembly of the guidance rails and the print head carriage to vibrations. In other words, starting from a mounting site of a first guidance rail and moving towards another guidance rail along the perpendicular direction, it is preferred if no other mounting site is encountered at the same position with respect to the longitudinal direction.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The present invention will become more fully understood from the detailed description given hereinbelow and the accompanying schematic drawings which are given by way of illustration only, and thus are not limitative of the present invention, and wherein:

- Fig. 1 schematically illustrates a part of a printer according to an embodiment of the present invention, which comprises two guidance rails according to the present invention;
- Fig. 2 schematically illustrates a guidance rail of Fig. 1 in more detail;
- Fig. 3 schematically illustrates a guidance rail according to the prior art;
- Fig. 4 schematically illustrates a guidance rail according to an embodiment of the present invention; and
- Fig. 5 schematically illustrates a guidance rail according to another embodiment of the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

[0023] The present invention will now be described with reference to the accompanying drawings, wherein the same reference numerals have been used to identify the same or similar elements throughout the several views, and in some instances throughout the several embodiments.

[0024] Fig. 1 schematically illustrates a part of a printer 100 according to an embodiment of the present invention. Parts of the printer 100 which are well known but not essential for the description of the present invention are omitted for the sake of clarity. For example, no housing,

medium transport system, print head and so on are shown although they will typically be present in the printer 100.

[0025] What is shown in Fig. 1 is that the printer comprises, among other parts, two guidance rails 10 arranged in parallel to one another, each extending along a (the same) longitudinal direction L but at a perpendicular distance from one another. Along each guidance rail 10, mounting sites 12 are provided which will be described in more detail in the following. A print head carriage 150 is moveably mounted between the guidance rails 10 such as to be moveable by an actuator (not shown) bidirectionally in the longitudinal direction L. In the shown depiction, the print head carriage 150 would carry a print head configured to eject the marking agent (e.g. ink) in the downward direction. The distances between the mounting sites 12 are not shown to scale in Fig. 1.

[0026] Fig. 2 shows further details of the assembly shown in Fig. 1, with the print head carriage 150 now left out. In this embodiment, the mounting sites 12 are provided as holes or bores in the guidance rail 10. The holes or bores may be punched out of a blank metal strip to produce a metal guidance rail 10, or they may be bored out of a blank metal strip. The guidance rail 10 could also be made from plastic in which case the mounting sites 12 may be cut into a blank plastic strip to produce a plastic guidance rail 10, or the guidance rail 10 may be produced by injections molding as already comprising the holes, or the guidance rail 10 may be produced by additive manufacturing (e.g. "3D printing") from a material comprising (or consisting of) metal, plastic and/or ceramics as already comprising the holes.

[0027] Fig. 2 also shows that the guidance rail 10 may be mounted to a framework 110 of the printer 100 (or any other part of the printer 100) using mounting elements 13. These mounting elements 13 may be any type of mounting means, for example, screws or bolts. A runner block 14 is moveably mounted to the guidance rail 10 such as to be able to move along the longitudinal direction L. The print head carriage 150 may be mounted on at least one runner block 14 on each guidance rail 10.

[0028] Fig. 3 schematically illustrates a guidance rail 1 according to the prior art (e.g. according to EP 3 564 038 A1), wherein mounting sites 4 are arranged at equidistant intervals. A schematic graph 5 indicates in an exaggerated manner how much play the different portions of the guidance rail 1 have due to the positioning of the mounting sites 4: the play is minimal at each mounting site 4, increases up towards a maximum precisely halfway between that mounting site 4 and the next, and then decreases again to the minimum. The regularity of this graph 5 indicates the susceptibility of the guidance rail 1 of the prior art to vibrations, as the graph 5 can also be interpreted to show the fundamental vibration mode between adjacent mounting sites 4.

[0029] Fig. 4 schematically illustrates a guidance rail 10 according to an embodiment of the present invention.

Along the guidance rail 10, equidistant center positions 16-1, 16-2, 16-3, ... (in short: 16-i) are defined for the mounting sites 12-1, 12-2, ... (in short: 12-i). The center positions 16-i are marked by diamond symbols and the mounting sites 12-i by circles. Each center position 16-i is at the center of a periodically repeating cell 15. Both the center positions 16-i and the cell 15 are not necessarily marked on the guidance rail in any way but are defined and described in order to understand the embodiment better.

[0030] Each mounting site 12-i is arranged within a predefined tolerance interval around a (or: its) respective one of the center positions 16-i. The tolerance interval in this respect is preferably only considered along the longitudinal direction L. The tolerance interval is preferably arranged symmetrically around its respective center position 16-i, or, in other words, each center position 16-i is arranged at the center (in the longitudinal direction L) of its respective tolerance interval.

[0031] The relative position of each mounting site 12-i to the (or: its) respective center position 16-i is different for at least two of the mounting sites 12-i. As an example, Fig. 4 shows a distance d_{12} between a first mounting site 12-1 and a second mounting site 12-2 being smaller than a distance d_{23} between the second mounting site 12-2 and a third mounting site 12-3.

[0032] The tolerance interval may extend up to half the distance between the center position 16-i and the respective next center position 16-j, with $j=i+1$ or $j=i-1$. Preferably, the total width of the tolerance interval is smaller than the (constant and equal throughout the guidance rail 10) distance between two adjacent center positions 16-i, 16-(i+1), more preferably smaller than 75% of that distance, most preferably smaller than 50% of that distance. Again, this provides a suitable balance between the advantages of different distances d_{12} , d_{23} , ... between the mounting sites 12-1, 12-2, ... (in order to reduce vibration) and the advantages of equidistant distances (in order to provide stability of the mounting of the guidance rail 10 to the printer 100). Preferably, each mounting site 12-i (and only one) is randomly arranged within the predefined tolerance interval around its respective center position 16-i.

[0033] In Fig. 4 a graph 5 has been included as well which, as in Fig. 3, indicates (in an exaggerated manner) the play that the guidance rail 10 has in the perpendicular direction P and, consequently, also the fundamental mode of vibration. Because of the different distances d_{12} , d_{23} , ... it is evident that also these fundamental modes of graph 5 in Fig. 4 are (preferably) all different and that therefore no vibrational mode of the guidance rail 10 as a whole can be induced.

[0034] Fig. 5 schematically illustrates a guidance rail 20 according to another embodiment of the present invention.

[0035] In the guidance rail 20 of Fig. 5, two different distance values (e.g. designated as A and B) are defined for adjacent mounting sites 12-i, and the two different

distance values A and B alternate regularly along the row of mounting sites 12-i. This means that $d_{12}=A$, $d_{23}=B$, $d_{34}=A$, ... and so on. The ratio of adjacently applied distance values (here: the ratio of A:B) is between 1:1 and 1:5, preferably between 1:2 and 1:4, more preferably between 1:3 and 1:4. Although the guidance rail 20 of the embodiment of Fig. 5 (or any other embodiment with a larger number of regularly alternating distance values A, B, C, ...) will in general be more susceptible to vibrations than the still less regular embodiment of Fig. 4, it has the advantage that its manufacture may be easier, as also in the manufacturing, the present regularities can be exploited to reduce the manufacturing effort.

[0036] While detailed embodiments of the present invention are disclosed herein, it is to be understood that the disclosed embodiments are merely exemplary of the invention, which can be embodied in various forms. Therefore, specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one skilled in the art to variously employ the present invention in virtually any appropriately detailed structure. In particular, features presented and described in separate dependent claims may be applied in combination and any advantageous combination of such claims are herewith disclosed.

[0037] It will be evident that the described embodiments may be varied in many ways. All such modifications as would be evident to one skilled in the art starting from what is explicitly described are intended to be included.

[0038] One basic idea of the invention may be summarized as follows: distances between mounting sites of a guidance rail for a print head carriage are provided non-equidistantly in order to reduce vibration modes and therefore reduce the chances and intensity of vibrations induced in the guidance rail by the dynamic movement of the print head carriage.

List of reference signs

[0039]

1	guidance rail of the prior art
4	mounting site of the prior art
5	graph showing play of guidance rail
10	guidance rail
12	mounting site
12-i	mounting site
13	mounting element
14	runner block
15	cell
16-i	center position
20	guidance rail
100	printer
110	framework
150	print head carriage

L longitudinal direction
P perpendicular direction

5 **Claims**

1. A printer (100) comprising a print head carriage (150) and further comprising two guidance rails (10; 20) arranged in parallel, wherein at least one runner block (14) is movably mounted on each guidance rail (10; 20), and the print head carriage (150) is mounted on the at least two runner blocks (16), the two guidance rails (10; 20) being mounted to the printer (100) by mounting elements (13) attached at mounting sites (12-i) of the guidance rail (10; 20), the mounting sites (12-i) being arranged essentially in a row and configured for applying mounting elements (13) for mounting the guidance rail (10; 20) to the printer (100), **characterized in that** at least two distances (d_{12} , d_{23} , d_{34}) between any adjacent mounting sites (12-i, 12-(i+1)) are non-equal.
2. The printer (10; 20) of claim 1, wherein equidistant center positions (16-i) for the mounting sites (12-i) are defined, each mounting site (12-i) is arranged within a predefined tolerance interval around a respective one of the center positions (16-i), and the relative position of each mounting site (12-i) to the respective center position (16-i) is different for at least two of the mounting sites (12-i).
3. The printer (10; 20) of claim 2, wherein each mounting site (12-i) is randomly arranged within the predefined tolerance interval around its respective center position (16-i).
4. The printer (10; 20) of any of claims 1 to 3, wherein each distance (d_{12} , d_{23}) between any two adjacent mounting sites (12-1, 12-2) is different.
5. The printer (10; 20) of claim 1, wherein at least two different distance values (A, B) are defined for adjacent mounting sites (12-i), and wherein the at least two different distance values (A, B) alternate regularly along the row of mounting sites (12-i).
6. The printer (10; 20) of claim 5, wherein the ratio of adjacently applied distance values (A, B) is between 1:1 and 1:5, preferably between 1:2 and 1:4, more preferably between 1:3 and 1:4.
7. The printer (10; 20) of any of claims 1 to 5, wherein the mounting sites (12-i) are configured as holes or bores through which mounting elements (13) for mounting the guidance rail (10; 20) to the printer (100) can be inserted.

Patentansprüche

1. Drucker (100) mit einem Druckkopfwagen (150) und mit zwei parallel angeordneten Führungsschienen (10; 20), wobei auf jeder Führungsschiene (10; 20) mindestens ein Führungswagen (14) beweglich gelagert ist und der Druckkopfwagen (150) auf den mindestens zwei Führungswagen (16) gelagert ist, wobei die beiden Führungsschienen (10; 20) durch an Montagestellen (12-i) der Führungsschiene (10; 20) angebrachte Montageelemente (13) an dem Drucker (100) montiert sind,

wobei die Befestigungsstellen (12-i) im Wesentlichen in einer Reihe angeordnet und zum Anbringen von Befestigungselementen (13) für die Befestigung der Führungsschiene (10; 20) am Drucker (100) ausgebildet sind,

dadurch gekennzeichnet, dass mindestens zwei Abstände (d12, d23, d34) zwischen beliebigen benachbarten Einbaustellen (12-i, 12-(i+1)) ungleich sind.

2. Der Drucker (10; 20) nach Anspruch 1, wobei äquidistante Mittelpositionen (16-i) für die Montagestellen (12-i) definiert sind, jede Montagestelle (12-i) innerhalb eines vordefinierten Toleranzintervalls um eine jeweilige der Mittelpositionen (16-i) angeordnet ist und die relative Position jeder Montagestelle (12-i) zu der jeweiligen Mittelposition (16-i) für mindestens zwei der Montagestellen (12-i) unterschiedlich ist.

3. Der Drucker (10; 20) nach Anspruch 2, wobei jede Montagestelle (12-i) zufällig innerhalb des vordefinierten Toleranzintervalls um ihre jeweilige Mittelposition (16-i) angeordnet ist.

4. Der Drucker (10; 20) nach einem der Patentansprüche 1 bis 3, wobei jeder Abstand (d12, d23) zwischen zwei benachbarten Montageplätzen (12-1, 12-2) unterschiedlich ist.

5. Der Drucker (10; 20) nach Anspruch 1, wobei mindestens zwei unterschiedliche Abstandswerte (A, B) für benachbarte Montagestellen (12-i) definiert sind, und wobei die mindestens zwei unterschiedlichen Abstandswerte (A, B) regelmäßig entlang der Reihe von Montagestellen (12-i) abwechseln.

6. Der Drucker (10; 20) nach Anspruch 5, wobei das Verhältnis der nebeneinander liegenden Abstandswerte (A, B) zwischen 1:1 und 1:5, vorzugsweise zwischen 1:2 und 1:4, besonders bevorzugt zwischen 1:3 und 1:4 liegt.

7. Der Drucker (10; 20) nach einem der Patentansprüche 1 bis 5, wobei die Befestigungsstellen (12-i) als Löcher oder Bohrungen ausgebildet sind, durch die Befestigungselemente (13) zur Befestigung der Führungsschiene (10; 20) an dem Drucker (100) eingesetzt werden können.

10 Revendications

1. Imprimante (100) comprenant un chariot de tête d'impression (150) et comprenant en outre deux rails de guidage (10 ; 20) disposés en parallèle, dans laquelle au moins un bloc de roulement (14) est monté mobile sur chaque rail de guidage (10 ; 20), et le chariot de tête d'impression (150) est monté sur les au moins deux blocs de roulement (16), les deux rails de guidage (10 ; 20) étant montés sur l'imprimante (100) par des éléments de montage (13) fixés sur les sites de montage (12-i) du rail de guidage (10 ; 20),

les sites de montage (12-i) sont disposés essentiellement en rangée et configurés pour appliquer des éléments de montage (13) afin de monter le rail de guidage (10 ; 20) sur l'imprimante (100),

caractérisé par le fait que

au moins deux distances (d12, d23, d34) entre des sites de montage adjacents (12-i, 12-(i+1)) ne sont pas égales.

2. L'imprimante (10 ; 20) de la revendication 1, dans lequel des positions centrales équidistantes (16-i) sont définies pour les sites de montage (12-i), chaque site de montage (12-i) est disposé dans un intervalle de tolérance prédéfini autour d'une des positions centrales respectives (16-i), et la position relative de chaque site de montage (12-i) par rapport à la position centrale respective (16-i) est différente pour au moins deux des sites de montage (12-i).

3. L'imprimante (10 ; 20) de la revendication 2, où chaque site de montage (12-i) est disposé au hasard dans l'intervalle de tolérance prédéfini autour de sa position centrale respective (16-i).

4. L'imprimante (10 ; 20) de l'une des revendications 1 à 3, où chaque distance (d12, d23) entre deux sites de montage adjacents (12-1, 12-2) est différente.

5. L'imprimante (10 ; 20) de la revendication 1, dans lequel au moins deux valeurs de distance différentes (A, B) sont définies pour les sites de montage adjacents (12-i), et dans lequel les au moins deux valeurs de distance différentes (A, B) alternent

régulièrement le long de la rangée de sites de montage (12-i).

6. L'imprimante (10 ; 20) de la revendication 5, dans lequel le rapport des valeurs de distance appliquées de manière adjacente (A, B) est compris entre 1:1 et 1:5, de préférence entre 1:2 et 1:4, plus préférentiellement entre 1:3 et 1:4. 5
7. L'imprimante (10 ; 20) de l'une quelconque des revendications 1 à 5, dans lequel les sites de montage (12-i) sont configurés comme des trous ou des alésages à travers lesquels les éléments de montage (13) pour le montage du rail de guidage (10 ; 20) sur l'imprimante (100) peuvent être insérés. 10 15

20

25

30

35

40

45

50

55

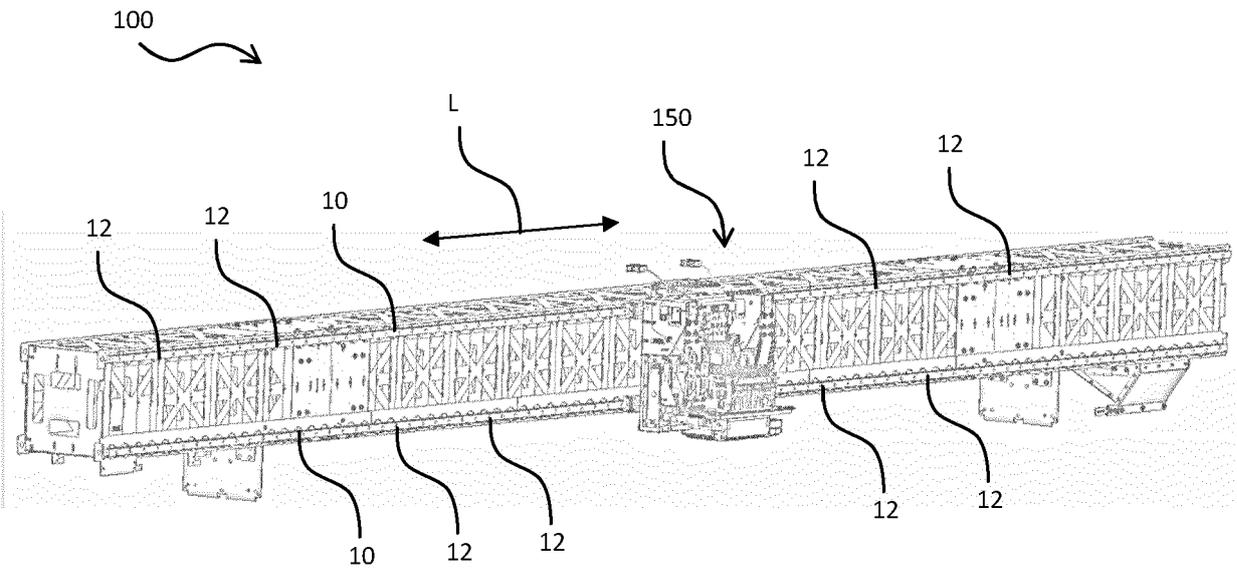


Fig. 1

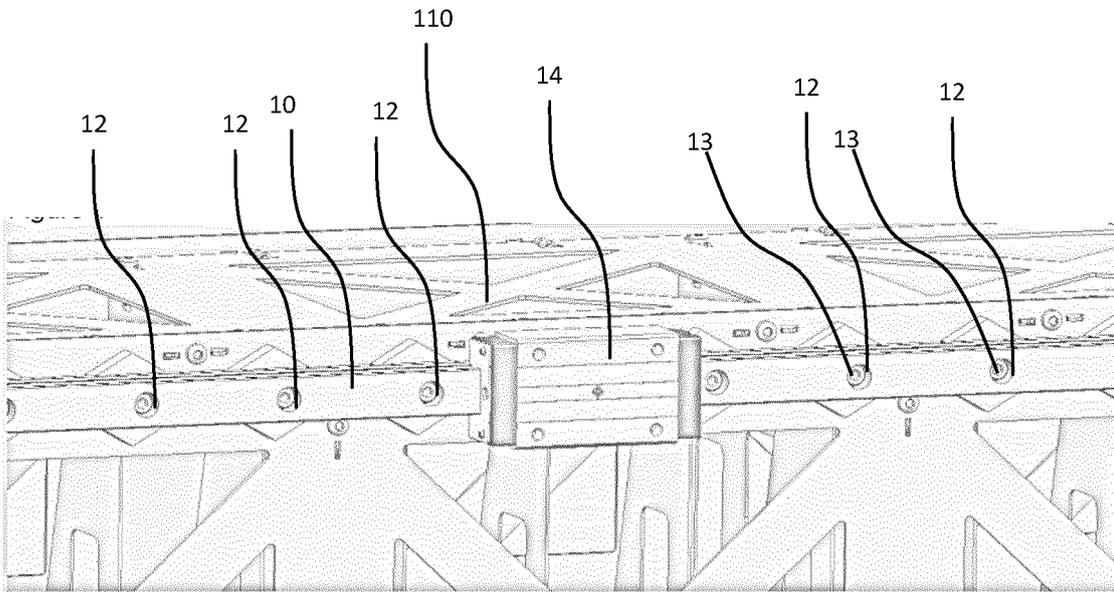


Fig. 2

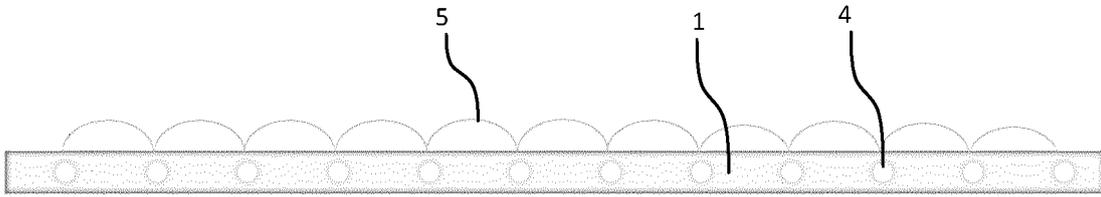


Fig. 3

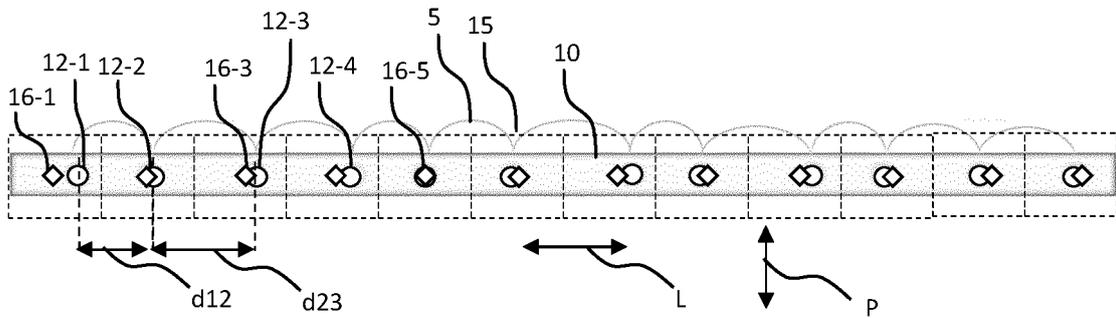


Fig. 4

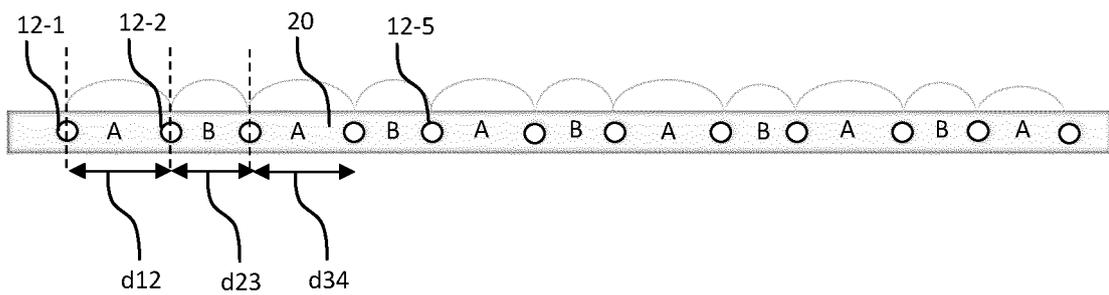


Fig. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 3564038 A1 [0004] [0028]
- US 2018079240 A1 [0005]
- US 2020047527 A1 [0006]