

(19)



(11)

**EP 3 647 153 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**29.09.2021 Bulletin 2021/39**

(51) Int Cl.:  
**B61L 15/00** <sup>(2006.01)</sup> **B61L 23/04** <sup>(2006.01)</sup>  
**B61L 23/34** <sup>(2006.01)</sup>

(21) Application number: **19203745.5**

(22) Date of filing: **17.10.2019**

**(54) TRAIN COUPLING SUPPORT SYSTEM**

**ZUGKUPPLUNGSUNTERSTÜTZUNGSSYSTEM**

**SYSTÈME DE SUPPORT DE COUPLAGE DE TRAIN**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GR  
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL  
PT RO RS SE SI SK SM TR**

(30) Priority: **01.11.2018 GB 201817853**

(43) Date of publication of application:  
**06.05.2020 Bulletin 2020/19**

(73) Proprietors:  
• **Hitachi Rail Ltd.**  
**London, Greater London EC4M 7AW (GB)**  
• **Hitachi, Ltd.**  
**Tokyo 100-8280 (JP)**

(72) Inventors:  
• **NAOI, Hironori**  
**London, Greater London EC4M 7AW (GB)**

• **KONISHI, Kenta**  
**London, Greater London EC4M 7AW (GB)**  
• **IWASAKI, Mitsuo**  
**London, Greater London EC4M 7AW (GB)**  
• **MOCHIDA, Toshihiko**  
**Chiyoda-ku, Tokyo 100-8280 (JP)**

(74) Representative: **Mewburn Ellis LLP**  
**Aurora Building**  
**Counterslip**  
**Bristol BS1 6BX (GB)**

(56) References cited:  
**DE-A1-102007 039 687 DE-A1-102012 009 114**  
**JP-A- 2011 254 666**

**EP 3 647 153 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### Field of the Present Disclosure

**[0001]** The present disclosure relates to a support system for supporting a coupling operation between a first train unit and a second train unit.

### Background

**[0002]** DE 10 2012 009114 A1 proposes a method for coupling rail vehicles. DE 10 2007 039687 A1 proposes an image recording device for recording surroundings in front of a rail vehicle. Generally, high speed and medium speed trains are provided with end car coupler covers which have a closed configuration to improve the aerodynamics of the end car, and an open configuration in which a coupler is revealed to allow coupling of the end car to another end car.

**[0003]** In a coupling operation, the driver of one train unit drives that unit slowly toward the other, stationary, train unit. During this operation, the driver visually checks that the coupler cover of the stationary unit is open. If the open or closed status of the coupler cover of the driven unit is not visible from the driver's cab, track-side personnel may provide confirmation of its open configuration status during the operation.

**[0004]** Evidently, it is important to avoid a situation in which the train units are brought together with either or both coupler covers closed. The checking of the coupler cover configuration status relies on the visual checking performed by the driver and sometimes also the track-side personnel. In the event this visual check is not performed correctly, there is a risk that a coupler cover will be damaged/broken. The train unit cannot then be used for service operation until the cover is repaired, which negatively impacts on transportation services. The present disclosure addresses these issues, and especially seeks to avoid a situation train units are coupled in error with closed coupler covers.

### Summary

**[0005]** A first aspect of the present invention provides a support system according to claim 1 for supporting a coupling operation between a first train unit and a second train unit, each train unit having a respective coupler for coupling to the coupler of the other train unit, and a respective coupler cover which is movable between a closed configuration in which the cover covers its coupler and an open configuration in which the coupler is revealed to allow coupling.

**[0006]** Advantageously, by combining in this way the distance measurement with the coupler cover configuration status it is possible to reduce the risk of damage to the first train unit's coupler cover even if the driver or track-side personnel perform the visual check of the coupler cover configuration status incorrectly.

**[0007]** A second aspect of the present invention provides a train unit having:

a coupler for coupling to the coupler of another train unit;  
a coupler cover which is movable between a closed configuration in which the cover covers the coupler and an open configuration in which the coupler is revealed to allow coupling; and  
the support system of the first aspect mounted there-to for supporting a coupling operation between the train unit and the other train unit.

**[0008]** The support system may further include a driver alert sub-system connected to the protection sub-system, the driver alert sub-system issuing a warning to a driver of the first train unit on receipt of the coupling stop signal. For example, the driver alert sub-system can include a speaker which issues an audible warning signal and/or visual warning signal e.g. in the form of a warning light or a message on a screen monitor.

**[0009]** The support system may further include a brake sub-system connected to the protection sub-system, the brake sub-system applying brakes of the first train unit on receipt of the coupling stop signal.

**[0010]** The distance measuring device comprises a camera which obtains an image of the front of the second train unit, and an image processing unit which determines the distance between the first train unit and the second train unit from the obtained image. The image processing unit also determines the open or closed configuration status of the coupler cover of the second train unit from the obtained image, and the protection sub-system also issues the coupling stop signal when the distance measurement is less than a predetermined threshold distance and the image processing unit determines the second train unit's coupler cover is closed. In this way, the protection afforded by the support system can be extended to the second train unit.

**[0011]** The support system may have one or more means for reducing the probability of false positive coupling stop signal being issued. For example, the protection sub-system may receive a signal indicating whether a traction sub-system of the first train unit is operating or not operating, and then may only issue the coupling stop signal when the traction sub-system is operating. As another example, the protection sub-system may receive a signal indicating whether brakes of the first train unit are on or off, and then may only issue the coupling stop signal when the brakes are off. And as another example, the protection sub-system may receive a signal indicating a running direction of a train of which the first train unit is a component, and then may only issue the coupling stop signal when the train running direction indicates that the first train unit is a head unit of the train.

### Brief Description of the Drawings

**[0012]** Embodiments of the present disclosure will now be described by way of example with reference to the accompanying drawings in which:

The following first embodiment and corresponding figures 1 to 4 are not according to the invention and are present for illustration purposes only.

Figure 1 shows schematically a first embodiment of a coupling support system installed on a train unit;

Figure 2 shows examples of camera images taken by a front camera used to measure the distance between a train unit and another train;

Figure 3 shows schematically an example logic structure for sending a coupling stop signal in the form of an alarm signal from a Train Monitoring System (TMS) to a Cab Speaker, and a brake command signal to a brake sub-system;

Figure 4 shows schematically a variant logic structure in which an alarm signal is sent from a CCTV to a Cab Monitor;

Figure 5 shows schematically a second embodiment of a coupling support system installed on a train unit;

Figure 6 shows schematically an example logic structure for sending a coupling stop signal in the form of an alarm signal to the Cab Speaker and a brake command signal to the brake sub-system;

Figure 7 shows schematically a variant logic structure in which an alarm signal is sent from the CCTV to the Cab Monitor;

Figure 8 shows schematically a third embodiment of a coupling support system installed on a train unit;

Figure 9 shows schematically an example logic structure for sending a coupling stop signal in the form of an alarm signal from the TMS to the Cab Speaker and the Cab Monitor, and a brake command signal to the brake sub-system;

Figure 10 shows schematically another example logic structure for the case when the CCTV has the ability to detect the coupler cover configuration of an opposing train by using a camera image from a front camera;

Figure 11 shows schematically a fourth embodiment of a coupling support system installed on a train unit;

Figure 12 shows schematically an example logic structure for sending a coupling stop signal in the

form of an alarm signal from the CU to the Cab Speaker and the Cab Monitor; and

Figure 13 shows schematically another example logic structure for the case when the CCTV has the ability to detect the coupler cover configuration of an opposing train by using a camera image from a front camera.

### Detailed Description and Further Optional Features

**[0013]** Figures 1 to 4 relate to a first embodiment of a coupling support system for supporting a coupling operation between a first train unit and a second train unit.

**[0014]** Figure 1 shows schematically an example of the coupling support system. In this example, the first train unit is one of the end units (Car 1) of a multi-car train (having Cars 1 to X). The other end unit (Car X) of the train has a similar coupling support system. Each of the end units has a respective coupler and a respective coupler cover which is movable between a closed configuration in which the cover covers its coupler and an open configuration in which the coupler is revealed to allow coupling. The support system comprises the following sub-systems and devices:

- Train Monitoring System (TMS): The TMS is connected with a brake sub-system and other sub-systems (doors, traction system etc.) via a communication network. It transfers control signals to the brake sub-system and the other sub-systems, and detects statuses of the brake sub-system and the other sub-systems.
- Coupler Cover Monitoring Device: The Coupler Cover Monitoring Device 10 detects the opened or closed configuration status of the coupler cover. For example, the Coupler Cover Monitoring Device 10 can include one or more limit switches. The, or each, limit switch has an arm coupled to the coupler cover. Moving the coupler cover between its open and closed configurations operates the arm such that the limit switch is moved between corresponding ON and OFF states. The limit switch therefore detects the open or closed configuration status of the coupler cover on the basis of this state.
- Man-Machine Interface (MMI): The MMI includes Cab Speakers and Cab Monitors which respectively output audible and visual warnings to the train unit driver. A Master Controller used by the driver of the train unit for controlling the train can include a driver key receiver for use in detecting the running direction of the train.
- Closed-Circuit Television (CCTV): The CCTV includes one or more Front Cameras taking forward images from the train unit, an Image Processor which

processes images taken by the Front Cameras, and a Control Unit (CU) for controlling the CCTV and interfacing with the TMS and the MMI.

**[0015]** The TMS is connected with the MMIs in both end units (Car 1, Car X) through the communication network. For example, the driver needs to present the driver key to the Master Controller of one of the MMIs when he/she starts the train. The TMS then receives notice from that Master Controller that a key has been received by its driver key receiver, and determines the train running direction based on the train unit location of the Master Controller. Therefore, when the driver key is received by the Master Controller of Car 1 the direction from Car X to Car 1 is determined as being the running direction, and when the driver key is received by the Master Controller of Car X the direction from Car 1 to Car X is determined as being the running direction.

**[0016]** If the Master Controller has an input switch which is moveable between "Forward" and "Backward" positions, the TMS can detect the running direction based on this inputted information. Therefore, when "Forward" is inputted from the Master Controller of Car 1, the direction from Car X to Car 1 is determined as being the running direction, and when "Backward" is inputted from the Master Controller of Car 1, the direction from Car 1 to Car X is determined as being the running direction. Alternatively, when "Forward" is inputted from the Master Controller of Car X, the direction from Car 1 to Car X is determined as being the running direction, and when "Backward" is inputted from the Master Controller of Car X, the direction from Car 1 to Car X is determined as being the running direction.

**[0017]** During a coupling operation, the head unit of one train (Car 1 in this example) is driven towards a stationary end unit of another train. The coupling support system on the driven unit is used for coupling support.

**[0018]** For example, the Cab Speaker of the MMI can be connected with the TMS through the communication network. In contrast, the Cab Monitor of the MMI, which displays to the driver images, such as one or more front image taken by the front cameras etc., can be connected with the CU of the CCTV through the communication network. Therefore, the information for the Cab Speaker is transferred from the TMS, and the information for the Cab Monitor is transferred from the CU of the CCTV. Although, the information for the Cab Speaker and the Cab Monitor are sent from different sub-systems, the coupling support system as a whole can provide visual and sound alarms at effectively the same time, because the TMS and the CU of the CCTV are synchronized with each other over a short time cycle, as discussed in more detail below. In addition, the TMS can output a brake command to the brake sub-system through the communication network to stop movement of the train.

**[0019]** For synchronisation of the TMS and the CCTV, the TMS transfers Train Status Information (TSI) over the short time cycle (e.g. every 200 millisecond) to the

CU. The TSI includes information such as: the train configuration, train unit identification, status of the driver key, clock time of the TMS, running speed of the train, location of the train (e.g. detected by GPS or other means), and open/closed configuration status of the coupler cover. When the CU receives the TSI, the CU transfers System Status Information (SSI) of systems managed by the CCTV, such as the front cameras, as a response signal against the train status information (TSI). Thus this response signal is also transferred every 200 millisecond. The open/closed configuration status provided by the coupler cover monitoring device 10 can be used for alarm processing by the TMS and/or by the CCTV. In particular, when the driver key is received by the MMI of Car 1, the TMS and/or the CU uses the open/closed configuration status received from the coupler cover monitoring device 10 of Car 1 to perform alarm processing for the MMI of Car 1, and optionally also to perform brake command processing for the brake sub-system.

**[0020]** The front camera continuously transfers camera images to the Image Processor while the train unit is energized. The Image Processor stores head shape data of an end car in its memory, and compares this head shape data with image data captured by the front camera for determining whether another train is in front of the train unit. Thus when there is a match between the stored head shape data and the front camera image data the Image Processor detects that another train is in front the train unit, and when there is no match the Image Processor detects no such train in front of the train unit. On detection by the Image Processor of another train, the Image Processor then measures the distance between the train unit and the other train based on camera image data received from the front camera. The Image Processor transfers this measured distance information to the CU in real time.

**[0021]** Figure 2 shows an example of how camera images taken by the front camera can be used to measure the distance between the train unit and the other train. Figure 2 shows at left a camera image when the inter-train distance is relatively far, and at right a camera image when the inter-train distance is relatively short. The Image Processor processes the camera images taken by the front camera to detect two predetermined characteristic locations on the other train, and then measures the spacing between the characteristic locations. For example, if opposing side edges of the front windscreen of the other train are the characteristic locations, the Image Processor measures the spacing between these side edges on the camera image. The Image Processor stores in memory a look-up table that relates inter-train train distance to spacing of the windscreen side edges. The Image processor can thus measure the inter-train distance by reference to the look-up table.

**[0022]** The CCTV and the TMS together form a protection sub-system of the coupling support system, the protection sub-system receiving the inter-train distance measured by the Image Processor and a configuration

status from the coupler cover monitoring device 10, and issuing a coupling stop signal when the measured distance is less than a predetermined threshold distance and the configuration status indicates the first train unit's coupler cover is closed. More particularly, Figure 3 shows schematically an example logic structure for sending an alarm signal from the TMS to the Cab Speaker, and for sending a brake command signal to the brake sub-system. If the inter-train distance becomes less than a predetermined value, the CU of the CCTV includes an alarm flag with the SSI. The TMS has an AND logic circuit 101, and when this flag is received by the circuit and the coupler cover monitoring device 10 detects that the coupler cover is closed, the TMS sends the coupling stop signal in the form of an alarm signal to the Cab Speaker and a brake command signal to the brake sub-system via the communication network.

**[0023]** The AND logic circuit 101 is used instead of an OR circuit in order to reduce the likelihood that the Cab Speaker outputs unnecessary alarms, and thereby unnecessarily distracting the driver. For example, an alarm is not needed when the inter-train distance is far enough, even if the coupler cover is closed.

**[0024]** Optionally, as shown in Figure 3, a traction status signal indicating whether the train unit is moving can be added as an input to the AND logic circuit 101. For example, a traction ON signal received from the traction sub-system or a brake OFF signal received from the brake sub-system can also be inputted to the AND logic circuit 101. By including the traction status signal, the likelihood of unnecessary alarms (in particular when the train is started but is not ready to move) can be further reduced.

**[0025]** Figure 4 shows schematically a variant logic structure in which an alarm signal is sent from the CCTV to the Cab Monitor. When the coupler cover monitoring device 10 detects that the cover is closed, the TMS includes an alarm flag in the TSI. Optionally, a traction status signal indicating whether the train unit is moving can be used to decide whether the TMS should include the alarm flag in the TSI. In this case, the TMS can have an AND logic circuit 102 which receives the cover configuration status and the traction status signal.

**[0026]** The CCTV has an AND logic circuit 103 which sends an alarm signal to the Cab monitor when the alarm flag is included in the TSI from the TMS, and the inter-train distance measured by the Image Processor is less than a predetermined threshold value. The inter-train distance can be displayed on the Cab Monitor in real time, which helps the driver to confirm the distance objectively.

**[0027]** Figures 5 to 7 relate to a second embodiment of a coupling support system.

**[0028]** The second embodiment is similar to the first embodiment, except that the CCTV has an ability to detect the coupler cover configuration status of the other train by using the camera image from the front camera.

**[0029]** The Image Processor stores camera images of train head shapes when another opposing train's coupler

cover is open and/or closed. Figure 5 shows schematically at left a front camera image when the coupler cover of the other train is open, and at right when it is closed. The Image Processor can thus detect the coupler cover configuration status of the other train by matching the stored head shape image with camera image received from the front camera. For example, the Image Processor can detect that a coupler cover is open if a stored camera image with the cover open matches a received camera image, whereas if there is no match the coupler cover is detected as closed. As another example, the Image Processor can detect that a coupler cover is closed if a stored camera image with the cover closed matches a received camera image, whereas if there is no match the coupler cover is detected as open.

**[0030]** Figure 6 shows schematically an example logic structure for sending a coupling stop signal in the form of an alarm signal to the Cab Speaker and a brake command signal to the brake sub-system. The CU in the CCTV includes an alarm flag 1 in the SSI which is sent to the TMS when the inter-train distance measured by the Image Processor becomes less than a predetermined threshold value. The CU has an AND logic circuit 104 and when the inter-train distance measured by the Image Processor becomes less than the predetermined threshold value, and the Image Processor detects that the other train's coupler cover is closed, the CU also includes an alarm flag 2 in the SSI which is sent to the TMS.

**[0031]** TMS has an AND logic circuit 105 and an OR logic circuit 106. The AND logic circuit 105 send a flag signal to the OR logic circuit 106 when the alarm flag signal 1 is included in the SSI and the coupler cover monitoring device 10 detects that the train unit's own cover is closed. The OR logic circuit 106 then outputs the alarm signal to the Cab Speaker and the brake command signal to the brake sub-system via the communication network in the train when it receives the flag signal from the AND logic circuit 105 or the alarm flag 2 is included in the SSI received from the CU.

**[0032]** Optionally, as shown in Figure 6, a traction ON signal and/or a brake OFF signal from the MMI can be included as an input to the AND logic circuit 105 in order to further reduce the likelihood of unnecessary alarms.

**[0033]** Figure 7 shows schematically a variant logic structure in which an alarm signal is sent from the CCTV to the Cab Monitor. The TMS includes an alarm flag in the TSI when the coupler cover monitoring device 10 detects that the train unit's own cover is closed. Optionally, a traction ON signal and/or a brake OFF signal from the MMI can be required in order that the alarm flag is included. For example, the TMS can have an AND logic circuit 107 which outputs the alarm flag on detection of a closed cover and the traction ON signal and/or the brake OFF signal.

**[0034]** The CU in the CCTV has an AND logic circuit 108, an AND logic circuit 109 and an OR logic circuit 110. The AND logic circuit 109 sends a flag to the OR logic circuit 110 when the alarm flag included in the TSI re-

ceived from the TMS and the inter-train distance measured by the Image Processor is less than predetermined threshold value. The other AND logic circuit 108 sends a flag to the OR logic circuit 110 when the Image Processor detects that the coupler cover of the other train is closed and the inter-train distance measured by the Image Processor is less than a predetermined threshold value. The OR logic circuit 110 sends a coupling stop signal in the form of an alarm signal to the Cab Monitor when the OR logic circuit 110 receives the respective flag from either or both of AND logic circuit 108 and AND logic circuit 109.

**[0035]** Again, the inter-train distance can be displayed on the Cab Monitor in real time.

**[0036]** In the second embodiment, the coupler cover configuration of the other train can be detected by the front camera. Even if the driver of the train unit forgets to check the other train's coupler cover, the coupling support system can warn the driver and avoid damage to the other train.

**[0037]** Figures 8 to 10 relate to a third embodiment of a coupling support system.

**[0038]** In the first and second embodiments discussed above, the coupling support system sends an alarm signal to Cab Speaker or the CU of the CCTV sends an alarm signal to Cab Monitor. However, in the third embodiment, the TMS sends an alarm signal to both the Cab Speaker and the Cab Monitor. This can reduce the total processing load on the coupling support system. Figure 8 shows schematically one example of the coupling support system of the third embodiment. The main difference compared to the system of Figure 1 is that the CU now communicates with the Cab Monitor via the TMS.

**[0039]** Figure 9 shows schematically an example logic structure for sending an alarm signal from the TMS to the Cab Speaker and the Cab Monitor, and for sending a brake command signal to the brake sub-system. The logic structure for deciding if the alarm signal should be sent or not is the same as that of Figure 3. However, when it is determined that an alarm signal is to be sent by the TMS, this signal is sent to the Cab Speaker and the Cab Monitor.

**[0040]** Figure 10 shows schematically another example logic structure showing the ability of the CCTV to detect the coupler cover configuration of the other opposing train by using the camera image from the front camera. The logic structure for deciding if the alarm signal should be sent or not is the same as that of Figure 6. However, again, when it is determined that an alarm signal is to be sent by the TMS, this signal is sent to the Cab Speaker and the Cab Monitor.

**[0041]** Figures 11 to 13 relate to a fourth embodiment of a coupling support system. In the first and second embodiments discussed above, the coupling support system sends an alarm signal to Cab Speaker or the CU of the CCTV sends an alarm signal to Cab Monitor. However, in the fourth embodiment, the CU of the CCTV sends an alarm signal to both the Cab Speaker and the

Cab Monitor. This can also reduce the total processing load on the coupling support system. Figure 11 shows schematically one example of the coupling support system of the fourth embodiment. The main difference compared to the system of Figure 1 is that the TMS now communicates with the Cab Speaker via the CU. Figure 12 shows schematically an example logic structure for sending an alarm signal from the CU to the Cab Speaker and the Cab Monitor. The logic structure for deciding if the alarm signal should be sent or not is the same as that of Figure 4. However, when it is determined that an alarm signal is to be sent by the CU, this signal is sent to the Cab Speaker and the Cab Monitor.

**[0042]** Figure 13 shows schematically another example logic structure showing the ability of the CCTV to detect the coupler cover configuration of the other opposing train by using the camera image from the front camera. The logic structure for deciding if the alarm signal should be sent or not is the same as that of Figure 7. However, again, when it is determined that an alarm signal is to be sent by the TMS, this signal is sent to the Cab Speaker and the Cab Monitor.

**[0043]** While the disclosure has been described in conjunction with the exemplary embodiments described above, many equivalent modifications and variations will be apparent to those skilled in the art when given this disclosure. Accordingly, the exemplary embodiments of the disclosure set forth above are considered to be illustrative and not limiting.

## Claims

1. A support system for supporting a coupling operation between a first train unit (Car 1) and a second train unit, each train unit having a respective coupler for coupling to the coupler of the other train unit, and a respective coupler cover which is movable between a closed configuration in which the cover covers its coupler and an open configuration in which the coupler is revealed to allow coupling, the support system including:

a distance measuring device mountable at a front of the first train unit and operable to measure a distance between the first train unit and the second train unit;

a coupler cover monitoring device (10) mountable to the first train unit (Car 1) and operable to detect an open or closed configuration status of the first train unit's coupler cover; and

a protection sub-system mountable to the first train unit (Car 1), the protection sub-system being configured to receive a distance measurement from the distance measuring device and a configuration status from the coupler cover monitoring device (10), and issue a coupling stop signal when the distance measurement is less

than a predetermined threshold distance and the configuration status indicates the first train unit's coupler cover is closed;

**characterised in that** the distance measuring device comprises a camera which is configured to obtain an image of the front of the second train unit, and an image processing unit which is configured to determine the distance between the first train unit and the second train unit from the obtained image, and to determine the open or closed configuration status of the coupler cover of the second train unit from the obtained image, the protection sub-system being also configured to issue the coupling stop signal when the distance measurement is less than a predetermined threshold distance and the image processing unit determines the second train unit's coupler cover is closed.

2. The support system according to claim 1 further including a driver alert sub-system connected to the protection sub-system, the driver alert sub-system being configured to issue a warning to a driver of the first train unit on receipt of the coupling stop signal.
3. The support system according to claim 1 or 2 further including a brake sub-system connected to the protection sub-system, the brake sub-system being configured to apply brakes of the first train unit (Car 1) on receipt of the coupling stop signal.
4. The support system according to any one of the previous claims, wherein the protection sub-system is configured to receive a signal indicating whether a traction sub-system of the first train unit (Car 1) is operating or not operating, and only issue the coupling stop signal when the traction sub-system is operating.
5. The support system according to any one of the previous claims, wherein the protection sub-system is configured to receive a signal indicating whether brakes of the first train unit are on or off, and only issue the coupling stop signal when the brakes are off.
6. The support system according to any one of the previous claims, wherein the protection sub-system is configured to receive a signal indicating a running direction of a train of which the first train unit (Car 1) is a component, and only issue the coupling stop signal when the train running direction indicates that the first train unit is a head unit of the train.

7. A train unit (Car 1) having:

a coupler for coupling to the coupler of another train unit;

a coupler cover which is movable between a closed configuration in which the cover covers the coupler and an open configuration in which the coupler is revealed to allow coupling; and the support system of any one of the previous claims mounted thereto for supporting a coupling operation between the train unit (Car 1) and the other train unit.

## Patentansprüche

1. Unterstützungssystem zum Unterstützen eines Kupplungsvorgangs zwischen einer ersten Zugeinheit (Wagen 1) und einer zweiten Zugeinheit, wobei jede Zugeinheit eine entsprechende Kupplung zum Kuppeln an die Kupplung der anderen Zugeinheit und eine entsprechende Kupplungsabdeckung aufweist, die zwischen einer geschlossenen Anordnung, in der die Abdeckung die Kupplung abdeckt, und einer offenen Anordnung, in der die Kupplung freigelegt wird, um das Kuppeln zu ermöglichen, bewegbar ist, wobei das Unterstützungssystem Folgendes umfasst:

eine Abstandsmessvorrichtung, die an einer Vorderseite der ersten Zugeinheit anbringbar und betriebsbereit ist, um einen Abstand zwischen der ersten Zugeinheit und der zweiten Zugeinheit zu messen;

eine Kupplungsabdeckungsüberwachungsvorrichtung (10), die an der ersten Zugeinheit (Wagen 1) anbringbar und betriebsbereit ist, um einen geöffneten oder geschlossenen Anordnungsstatus der Kupplungsabdeckung der ersten Zugeinheit zu detektieren; und

ein untergeordnetes Schutzsystem, das an der ersten Zugeinheit (Wagen 1) anbringbar ist, wobei das untergeordnete Schutzsystem ausgelegt ist, um eine Abstandsmessung von der Abstandsmessvorrichtung und einen Anordnungsstatus von der Kupplungsabdeckungsüberwachungsvorrichtung (10) zu empfangen und ein Kuppelstoppsignal auszugeben, wenn die Abstandsmessung kleiner als ein vorbestimmter Abstandsschwellwert ist und der Anordnungsstatus angibt, dass die Kupplungsabdeckung der ersten Zugeinheit geschlossen ist;

**dadurch gekennzeichnet, dass** die Abstandsmessvorrichtung eine Kamera, die ausgelegt ist, um ein Bild der Vorderseite der zweiten Zugeinheit zu erhalten, und eine Bildverarbeitungseinheit umfasst, die ausgelegt ist, um den Abstand zwischen der ersten Zugeinheit und der zweiten Zugeinheit anhand des erhaltenen Bilds zu bestimmen und den offenen oder geschlossenen Anordnungsstatus der Kupplungsabdeckung der zweiten Zugeinheit anhand des er-

haltenen Bilds zu bestimmen, wobei das untergeordnete Schutzsystem auch ausgelegt ist, um das Kuppelstoppsignal auszugeben, wenn die Abstandsmessung kleiner als ein vorbestimmter Abstandsschwellenwert ist und die Bildverarbeitungseinheit bestimmt, dass die Kuppelungsabdeckung der zweiten Zugeinheit geschlossen ist.

2. Unterstützungssystem nach Anspruch 1, das ferner ein untergeordnetes Fahrerwarnsystem umfasst, das mit dem untergeordneten Schutzsystem verbunden ist, wobei das untergeordnete Fahrerwarnsystem ausgelegt ist, um bei Empfang des Kuppelstoppsignals eine Warnung an einen Fahrer einer ersten Zugeinheit auszugeben.
3. Unterstützungssystem nach Anspruch 1 oder 2, das ferner ein untergeordnetes Bremssystem umfasst, das mit dem untergeordneten Schutzsystem verbunden ist, wobei das untergeordnete Bremssystem ausgelegt ist, um bei Empfang des Kuppelstoppsignals die Bremsen der ersten Zugeinheit (Wagen 1) anzuwenden.
4. Unterstützungssystem nach einem der vorangegangenen Ansprüche, wobei das untergeordnete Schutzsystem ausgelegt ist, um ein Signal zu empfangen, das angibt, ob ein untergeordnetes Traktionsystem der ersten Zugeinheit (Wagen 1) in Betrieb ist oder nicht, und nur das Koppelstoppsignal auszugeben, wenn das untergeordnete Traktionsystem in Betrieb ist.
5. Unterstützungssystem nach einem der vorangegangenen Ansprüche, wobei das untergeordnete Schutzsystem ausgelegt ist, um ein Signal zu empfangen, das angibt, ob die Bremsen der ersten Zugeinheit eingeschaltet oder ausgeschaltet sind, und nur ein Koppelstoppsignal auszugeben, wenn die Bremsen ausgeschaltet sind.
6. Unterstützungssystem nach einem der vorangegangenen Ansprüche, wobei das untergeordnete Schutzsystem ausgelegt ist, um ein Signal zu empfangen, das eine Fahrtrichtung eines Zugs angibt, von dem die erste Zugeinheit (Wagen 1) ein Teil ist, und das Koppelstoppsignal nur auszugeben, wenn die Zugfahrtrichtung angibt, dass die erste Zugeinheit eine führende Einheit des Zugs ist.
7. Zugeinheit (Wagen 1), die Folgendes aufweist:

eine Kupplung zum Kuppeln an die Kupplung einer anderen Zugeinheit;  
eine Kupplungsabdeckung, die zwischen einer geschlossenen Anordnung, in der die Abdeckung die Kupplung abdeckt, und einer offenen

Anordnung, in der die Kupplung freigelegt ist, um das Koppeln zu ermöglichen, bewegbar ist; und  
ein Unterstützungssystem nach einem der vorangegangenen Ansprüche, das daran angebracht ist, um den Kuppelvorgang zwischen der Zugeinheit (Wagen 1) und der anderen Zugeinheit zu unterstützen.

## Revendications

1. Système de support pour supporter une opération de couplage entre une première unité de train (Wagon 1) et une seconde unité de train, chaque unité de train ayant un coupleur respectif pour un couplage au coupleur de l'autre unité de train, et un couvercle de coupleur respectif qui est mobile entre une configuration fermée dans laquelle le couvercle recouvre son coupleur et une configuration ouverte dans laquelle le coupleur est révélé pour permettre un couplage, le système de support comprenant :

un dispositif de mesure de distance pouvant être monté à l'avant de la première unité de train et opérationnel pour mesurer une distance entre la première unité de train et la seconde unité de train ;

un dispositif de surveillance de couvercle de coupleur (10) pouvant être monté sur la première unité de train (Wagon 1) et opérationnel pour détecter un état de configuration ouverte ou fermée du couvercle de coupleur de la première unité de train ; et

un sous-système de protection pouvant être monté sur la première unité de train (Wagon 1), le sous-système de protection étant configuré pour recevoir une mesure de distance provenant du dispositif de mesure de distance et un état de configuration provenant du dispositif de surveillance de couvercle de coupleur (10), et émettre un signal d'arrêt de couplage lorsque la mesure de distance est inférieure à une distance de seuil prédéterminée et l'état de configuration indique que le couvercle de coupleur de la première unité de train est fermé ;

**caractérisé en ce que** le dispositif de mesure de distance comprend un dispositif de prise de vue qui est configuré pour obtenir une image de l'avant de la seconde unité de train, et une unité de traitement d'image qui est configurée pour déterminer la distance entre la première unité de train et la seconde unité de train à partir de l'image obtenue, et pour déterminer l'état de configuration ouverte ou fermée du couvercle de coupleur de la seconde unité de train à partir de l'image obtenue, le sous-système de protection étant également configuré pour émettre le

signal d'arrêt de couplage lorsque la mesure de distance est inférieure à une distance de seuil prédéterminée et l'unité de traitement d'image détermine que le couvercle de coupleur de la seconde unité de train est fermé.

5

des revendications précédentes monté sur celui-ci pour supporter une opération de couplage entre l'unité de train (Wagon 1) et l'autre unité de train.

2. Système de support selon la revendication 1, comprenant en outre un sous-système d'alerte de conducteur connecté au sous-système de protection, le sous-système d'alerte de conducteur étant configuré pour émettre un avertissement à un conducteur de la première unité de train concernant la réception du signal d'arrêt de couplage. 10
3. Système de support selon la revendication 1 ou 2, comprenant en outre un sous-système de freinage connecté au sous-système de protection, le sous-système de freinage étant configuré pour appliquer des freins de la première unité de train (Wagon 1) lors de la réception du signal d'arrêt de couplage. 15  
20
4. Système de support selon l'une quelconque des revendications précédentes, dans lequel le sous-système de protection est configuré pour recevoir un signal indiquant si un sous-système de traction de la première unité de train (Wagon 1) est en fonctionnement ou non, et pour émettre le signal d'arrêt de couplage uniquement lorsque le sous-système de traction est en fonctionnement. 25  
30
5. Système de support selon l'une quelconque des revendications précédentes, dans lequel le sous-système de protection est configuré pour recevoir un signal indiquant si des freins de la première unité de train sont activés ou désactivés, et pour émettre le signal d'arrêt de couplage uniquement lorsque les freins sont désactivés. 35
6. Système de support selon l'une quelconque des revendications précédentes, dans lequel le sous-système de protection est configuré pour recevoir un signal indiquant une direction de circulation d'un train dont la première unité de train (Wagon 1) est un composant, et pour émettre le signal d'arrêt de couplage uniquement lorsque la direction de circulation de train indique que la première unité de train est une unité de tête du train. 40  
45
7. Unité de train (Wagon 1) ayant : 50
  - un coupleur destiné à être couplé au coupleur d'une autre unité de train ;
  - un couvercle de coupleur qui est mobile entre une configuration fermée dans laquelle le couvercle recouvre le coupleur et une configuration ouverte dans laquelle le coupleur est révélé pour permettre un couplage ; et
  - le système de support selon l'une quelconque

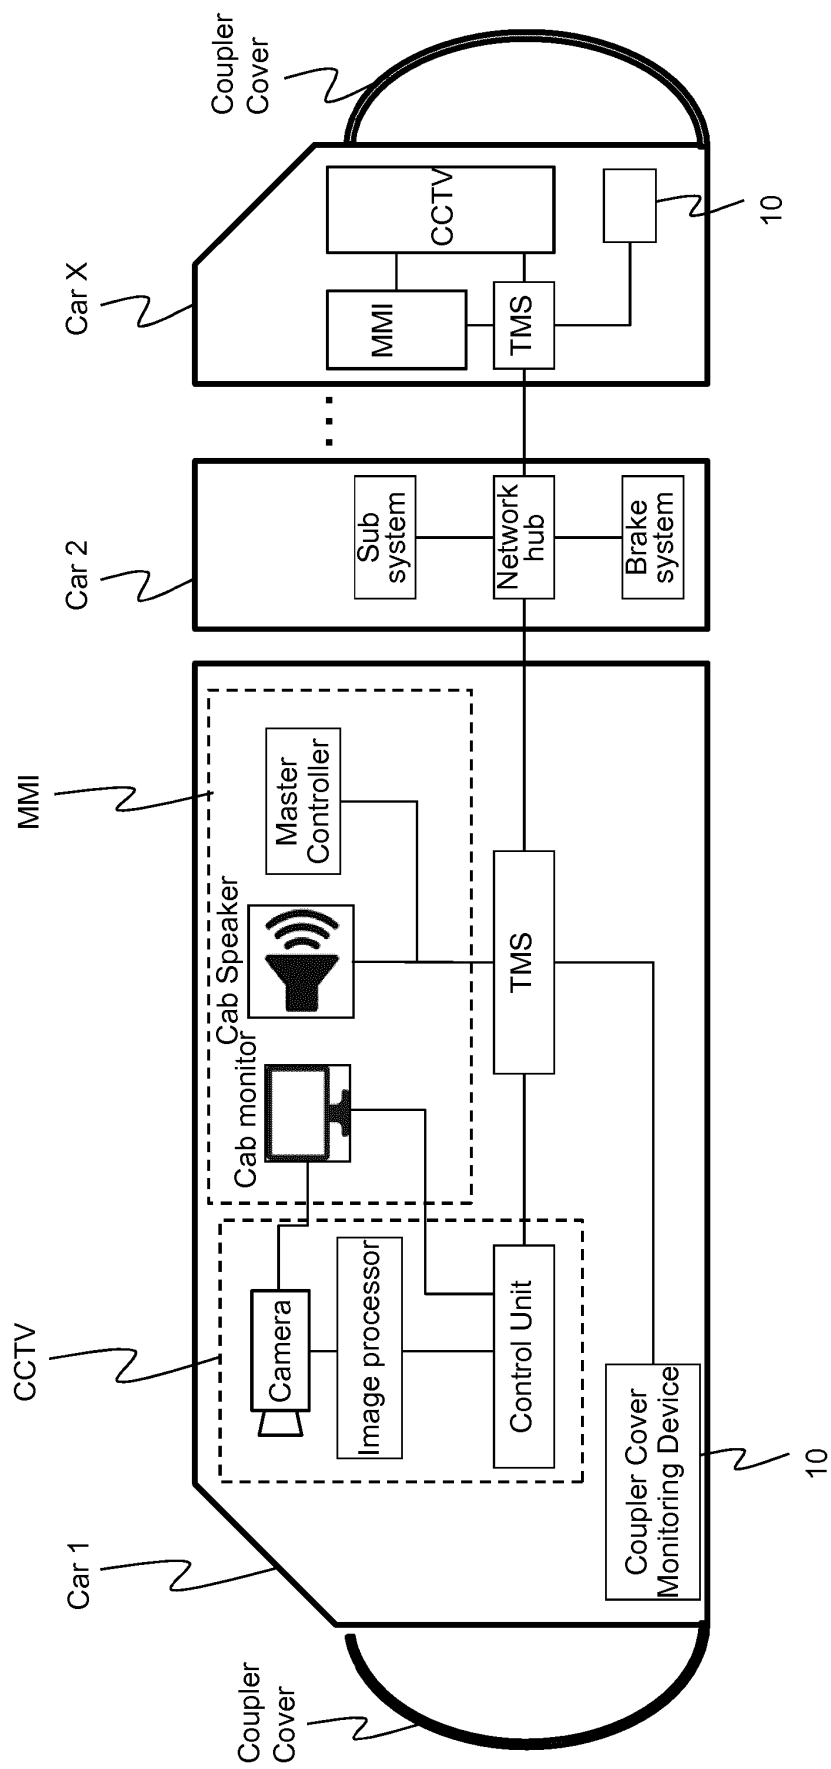


Fig. 1

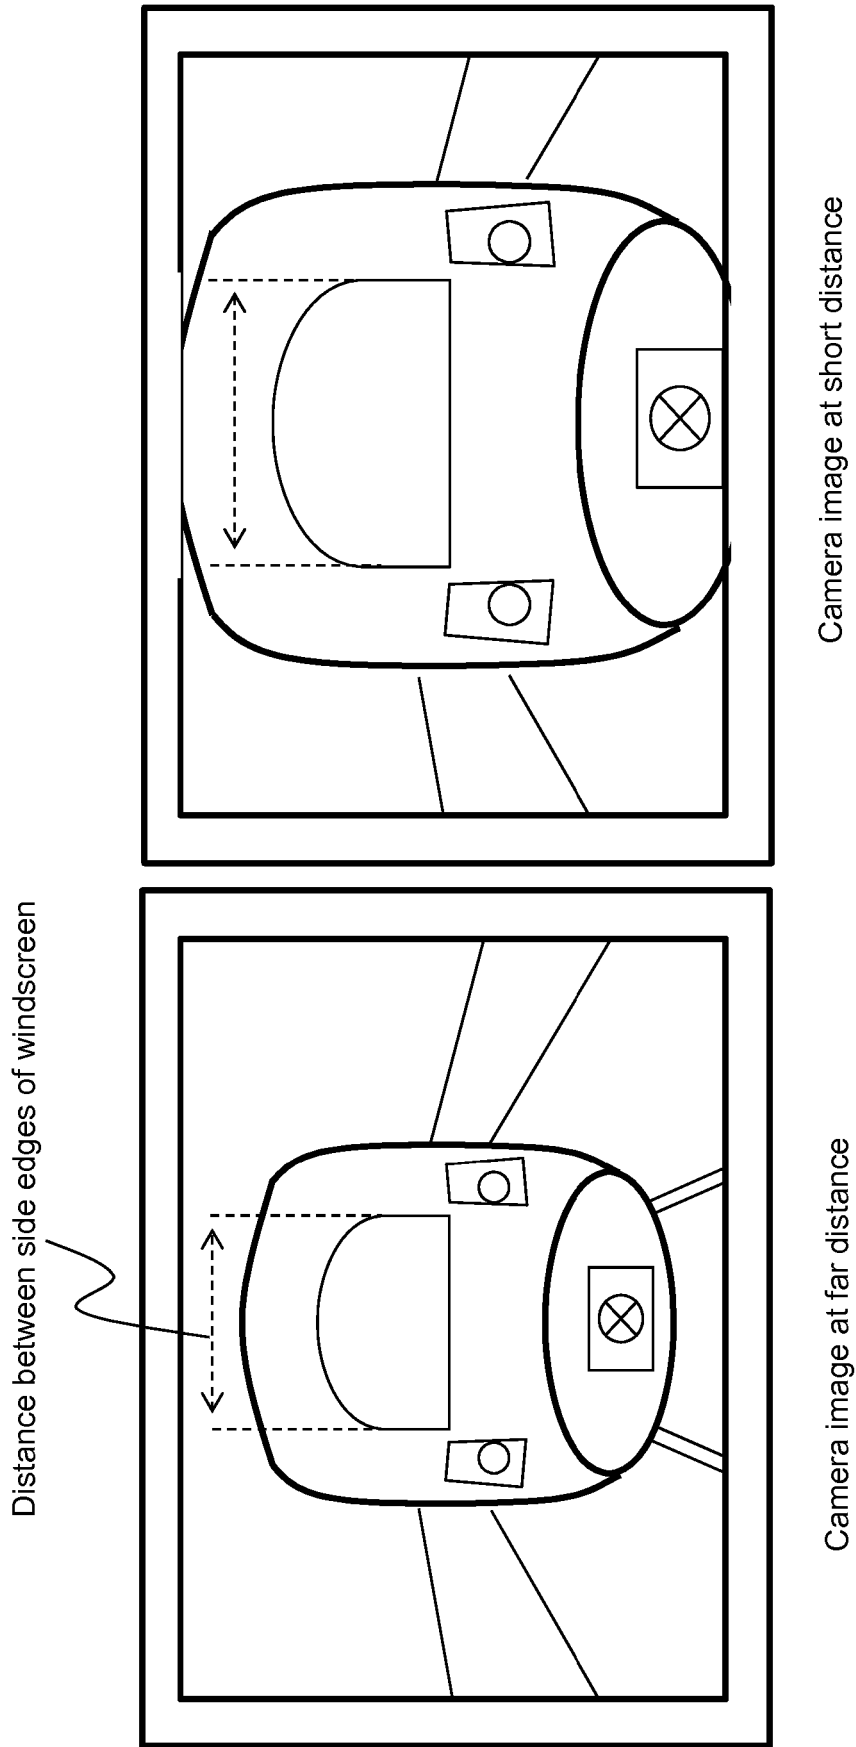


Fig. 2

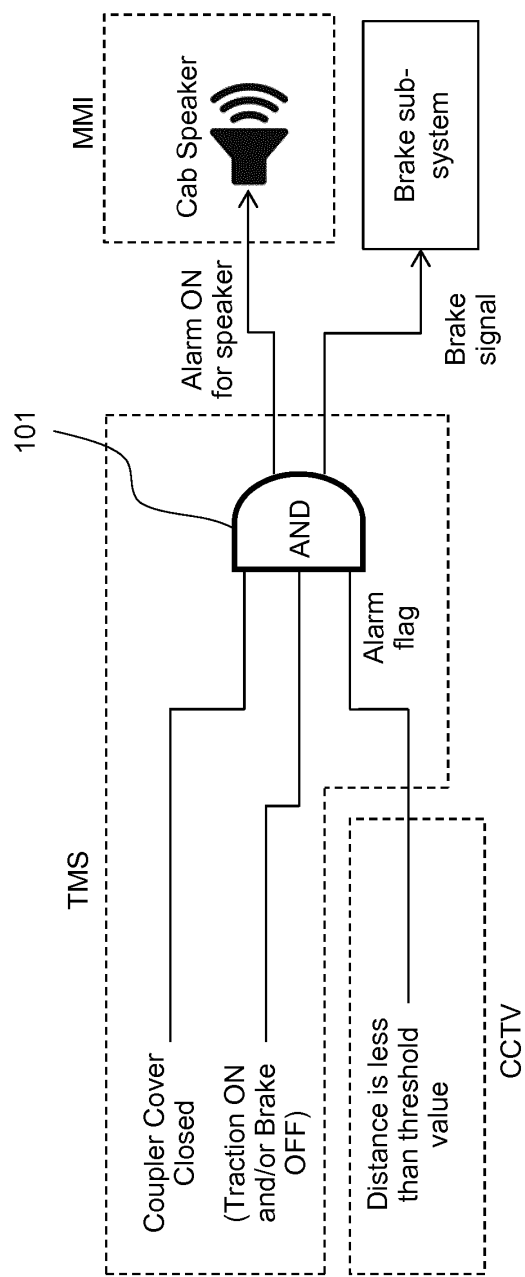


Fig. 3

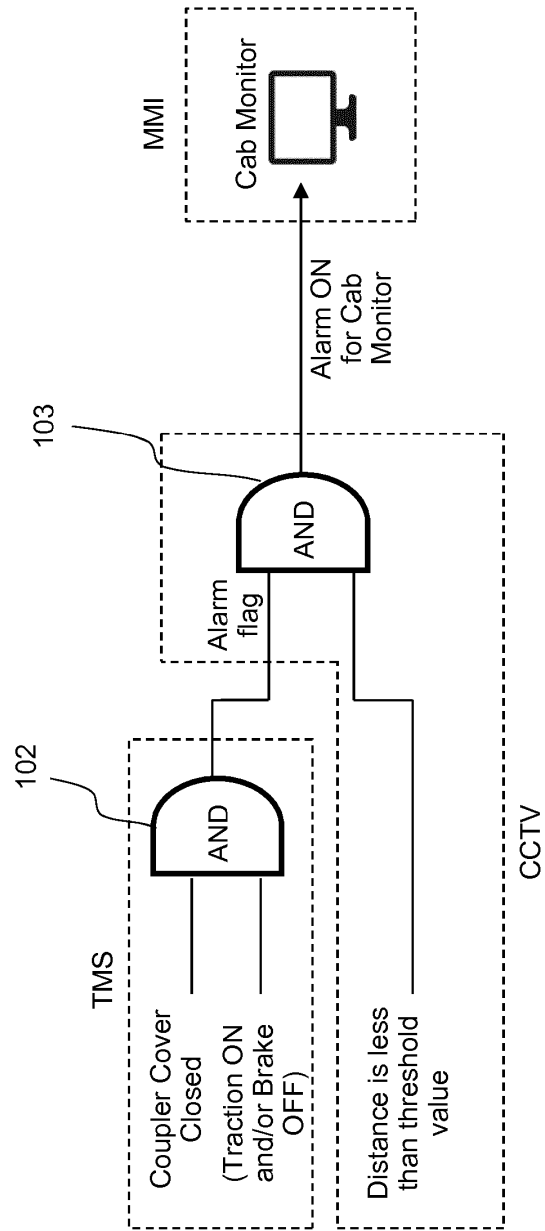


Fig. 4

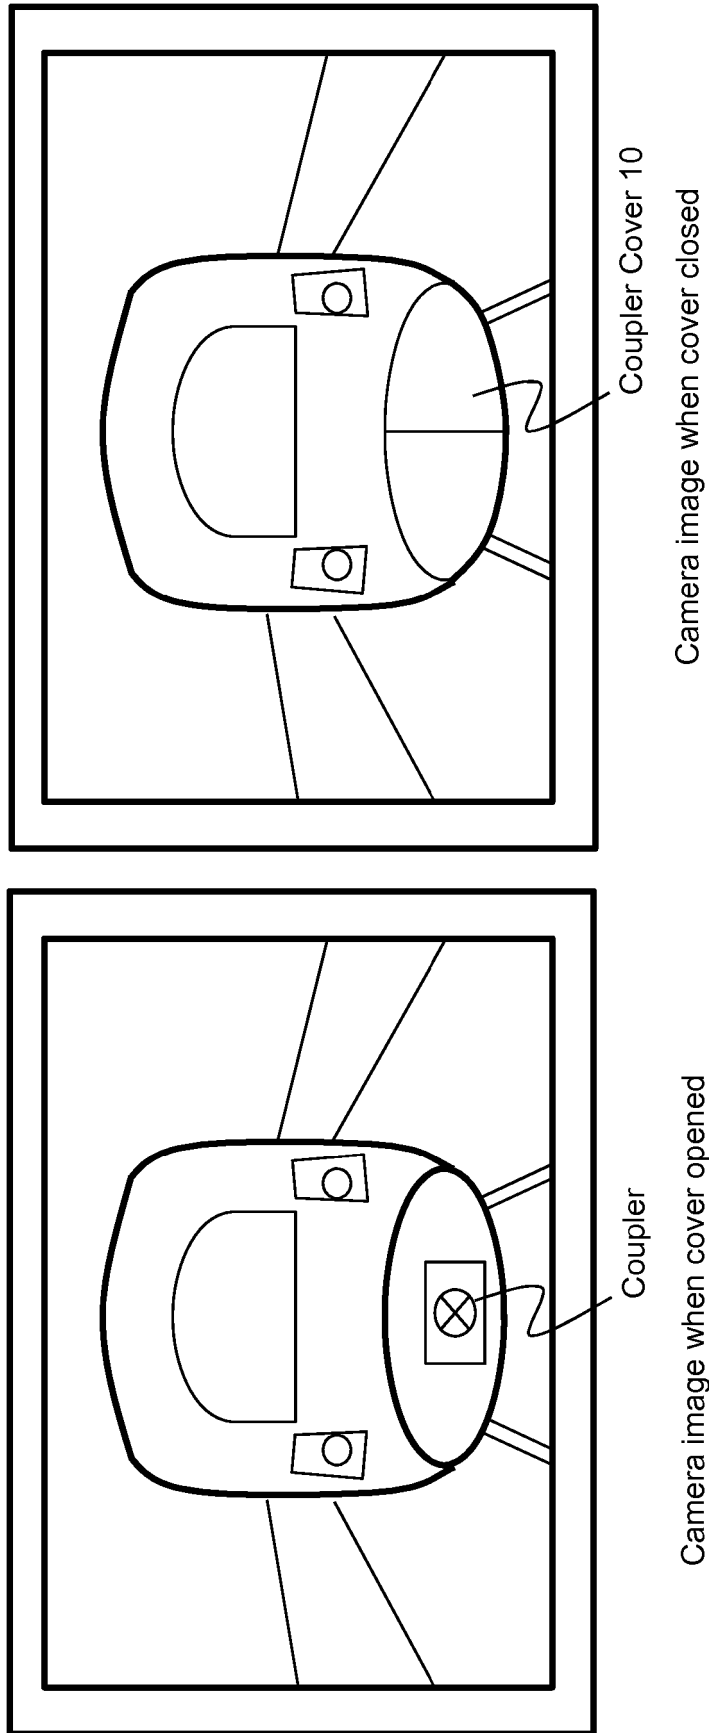


Fig. 5

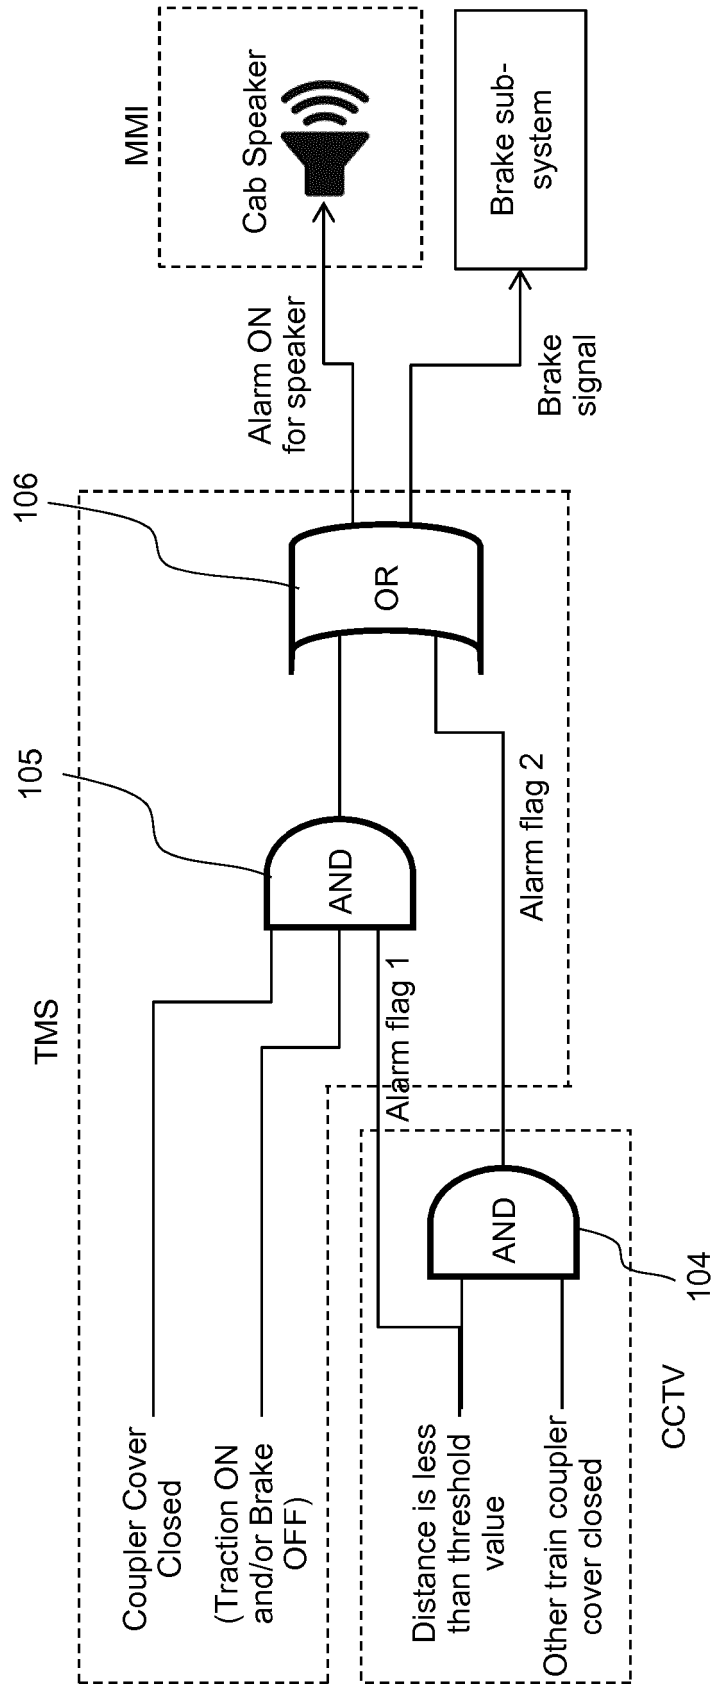


Fig. 6

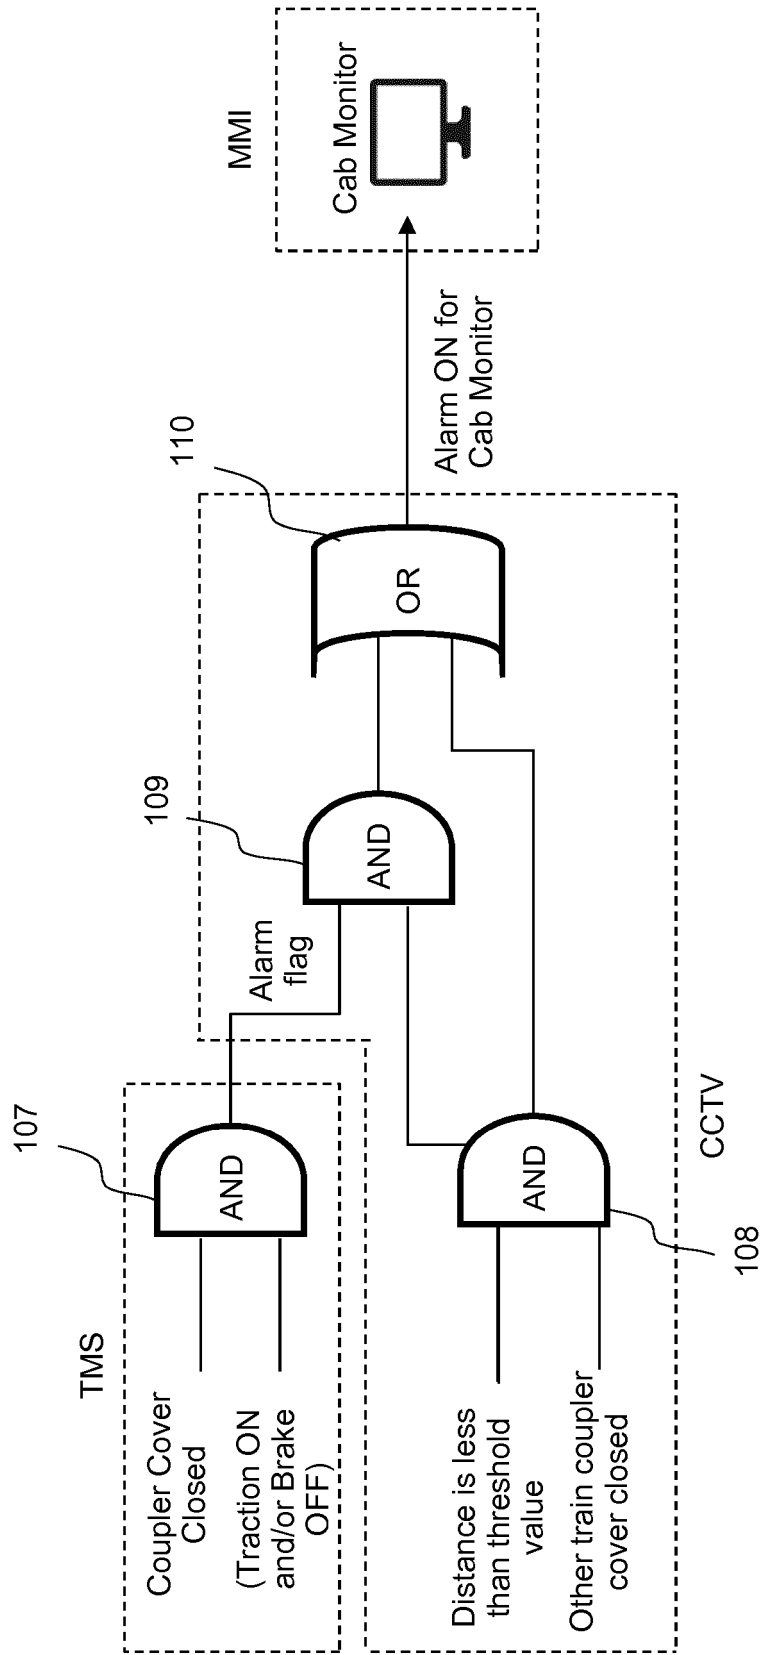


Fig. 7

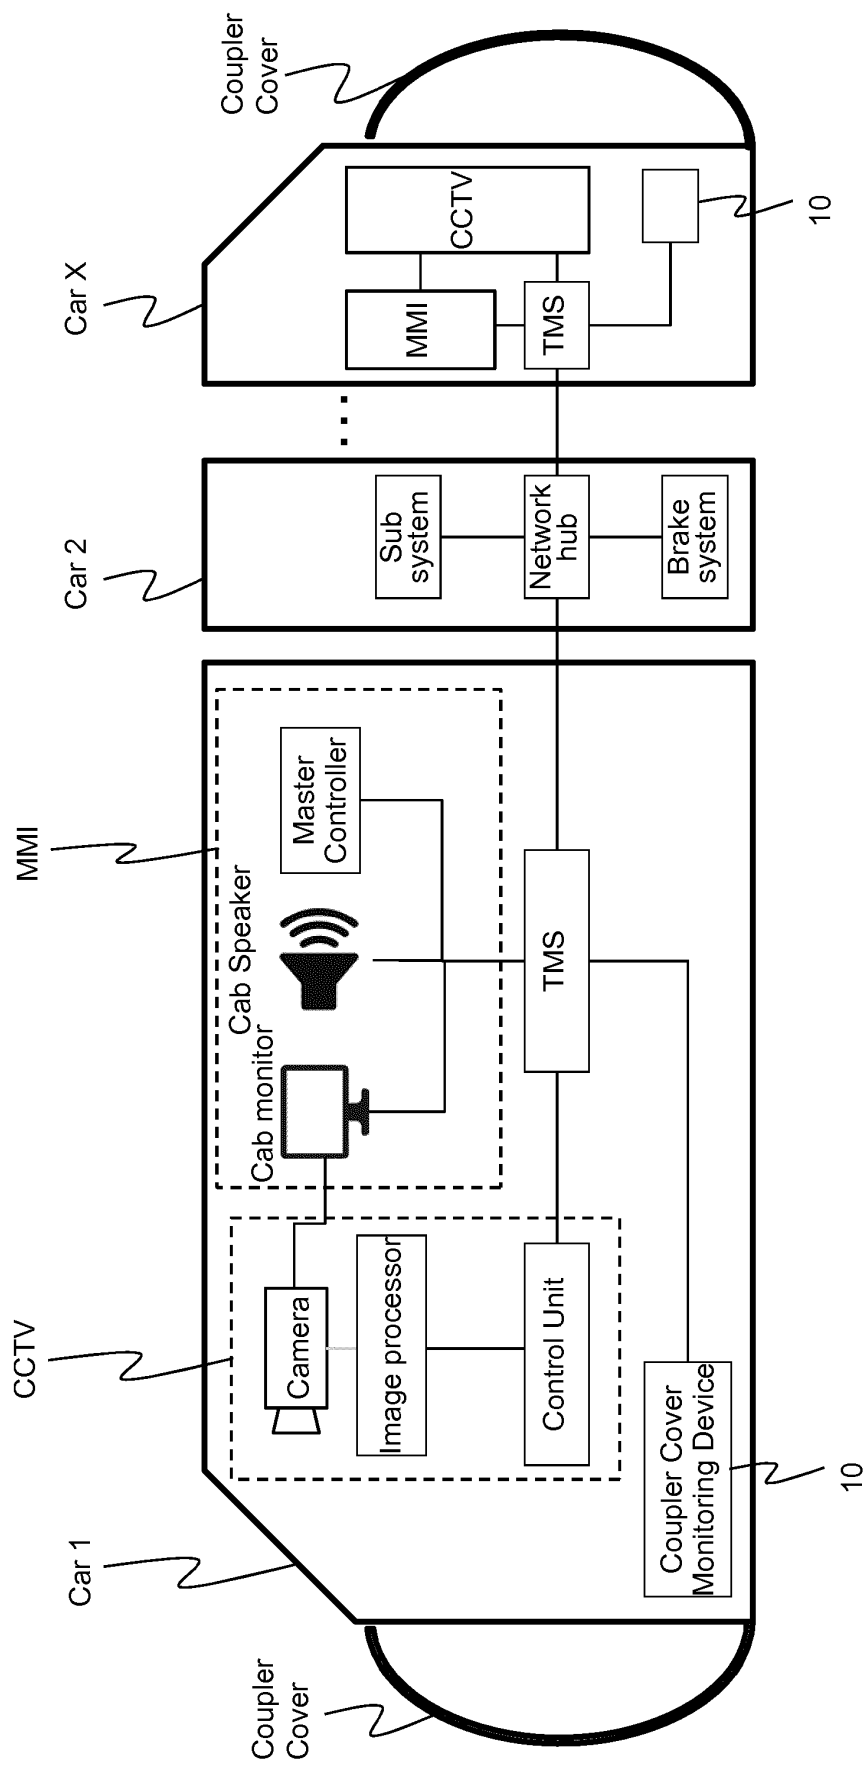


Fig. 8

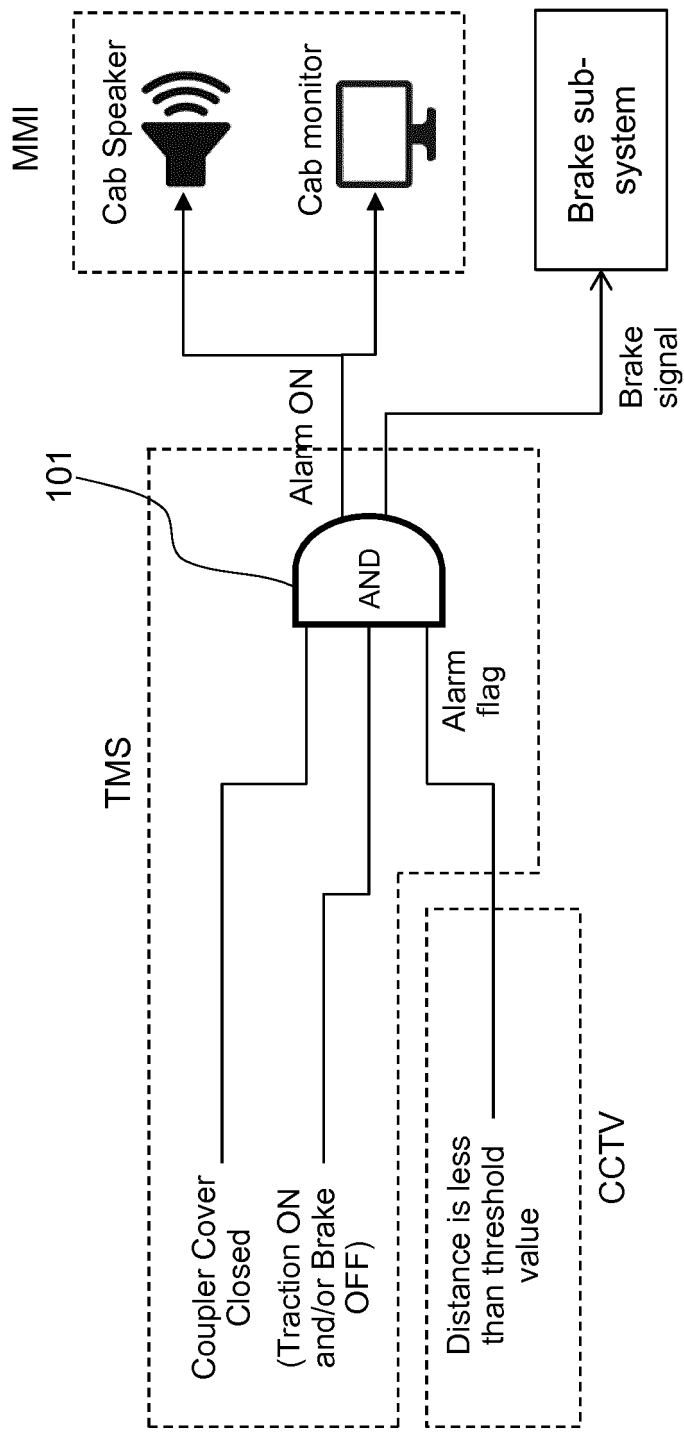


Fig. 9

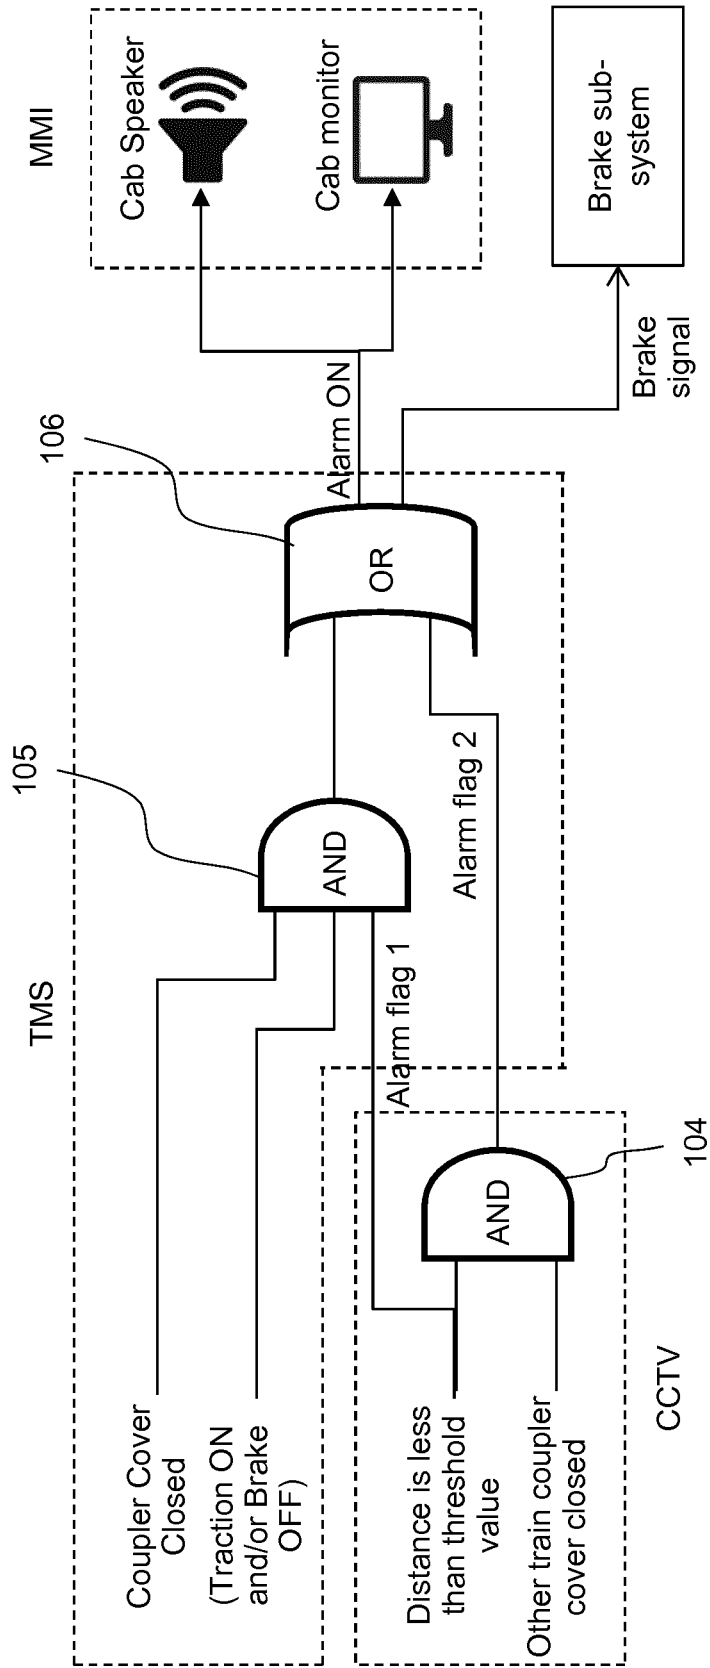


Fig. 10

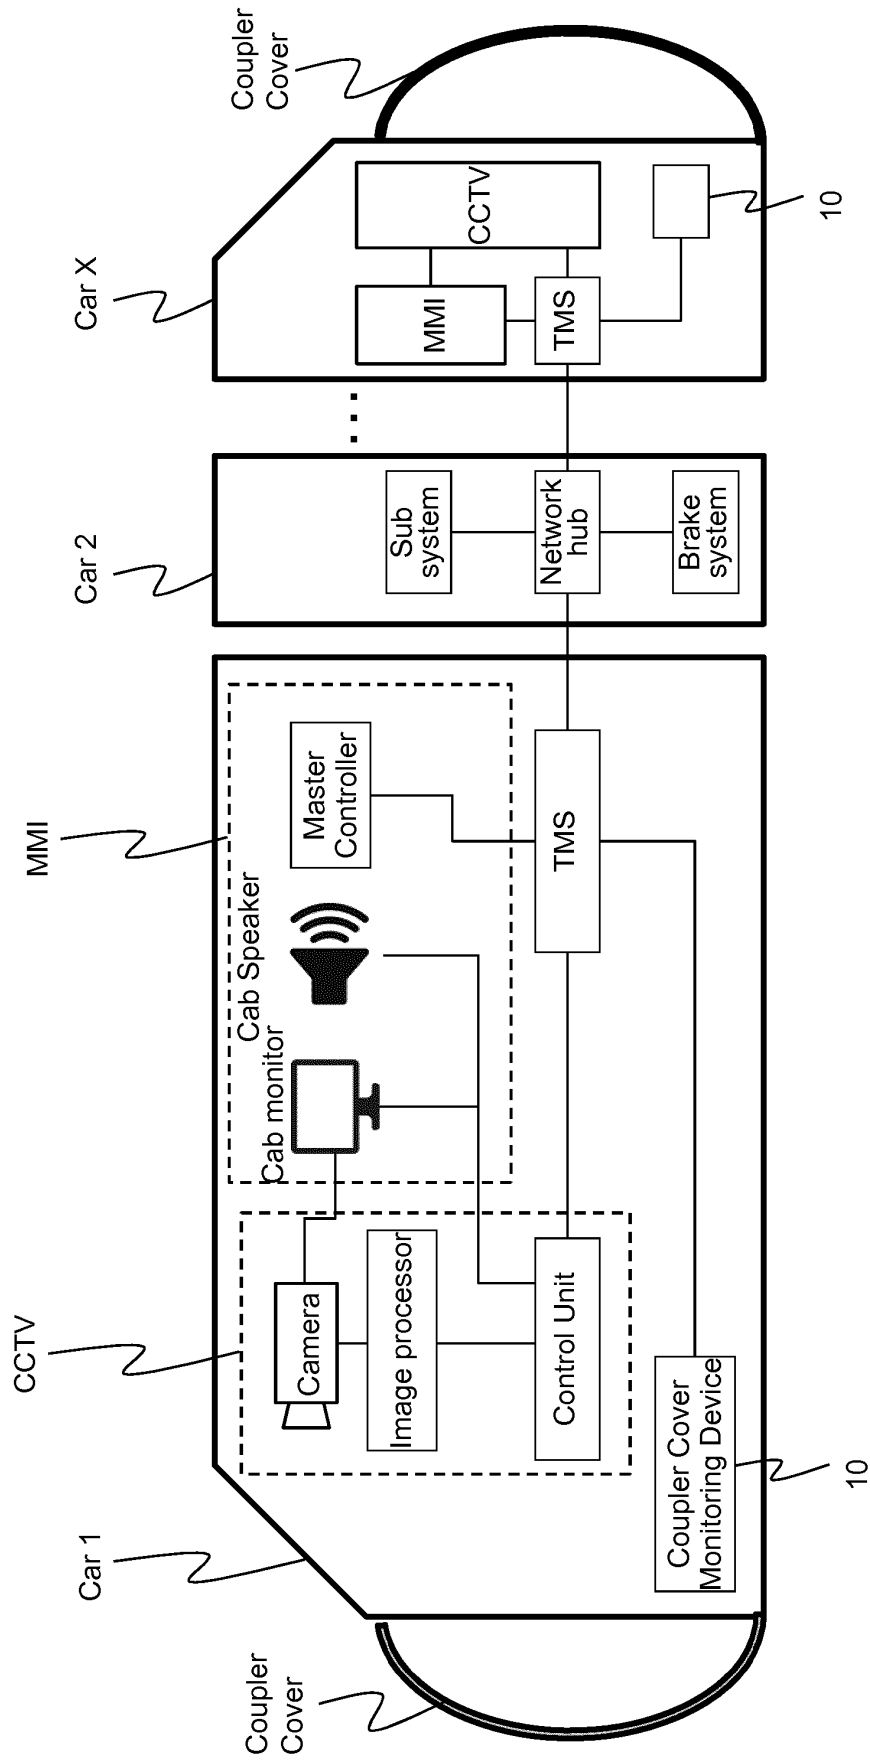


Fig. 11

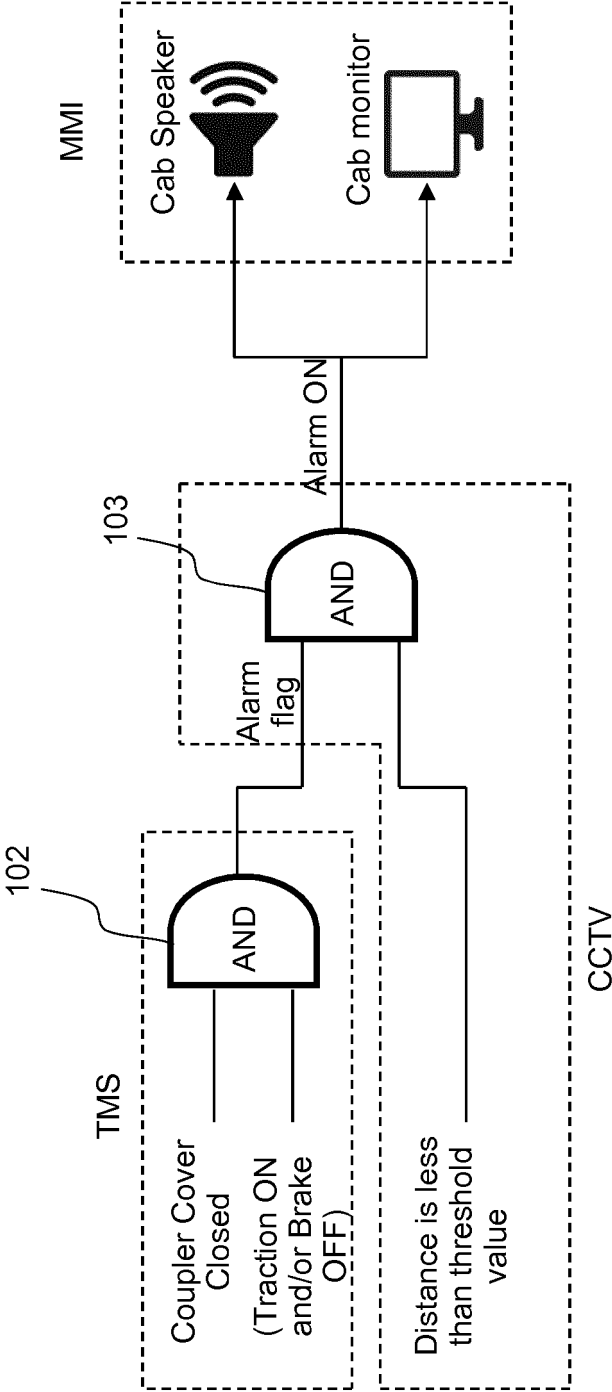


Fig. 12

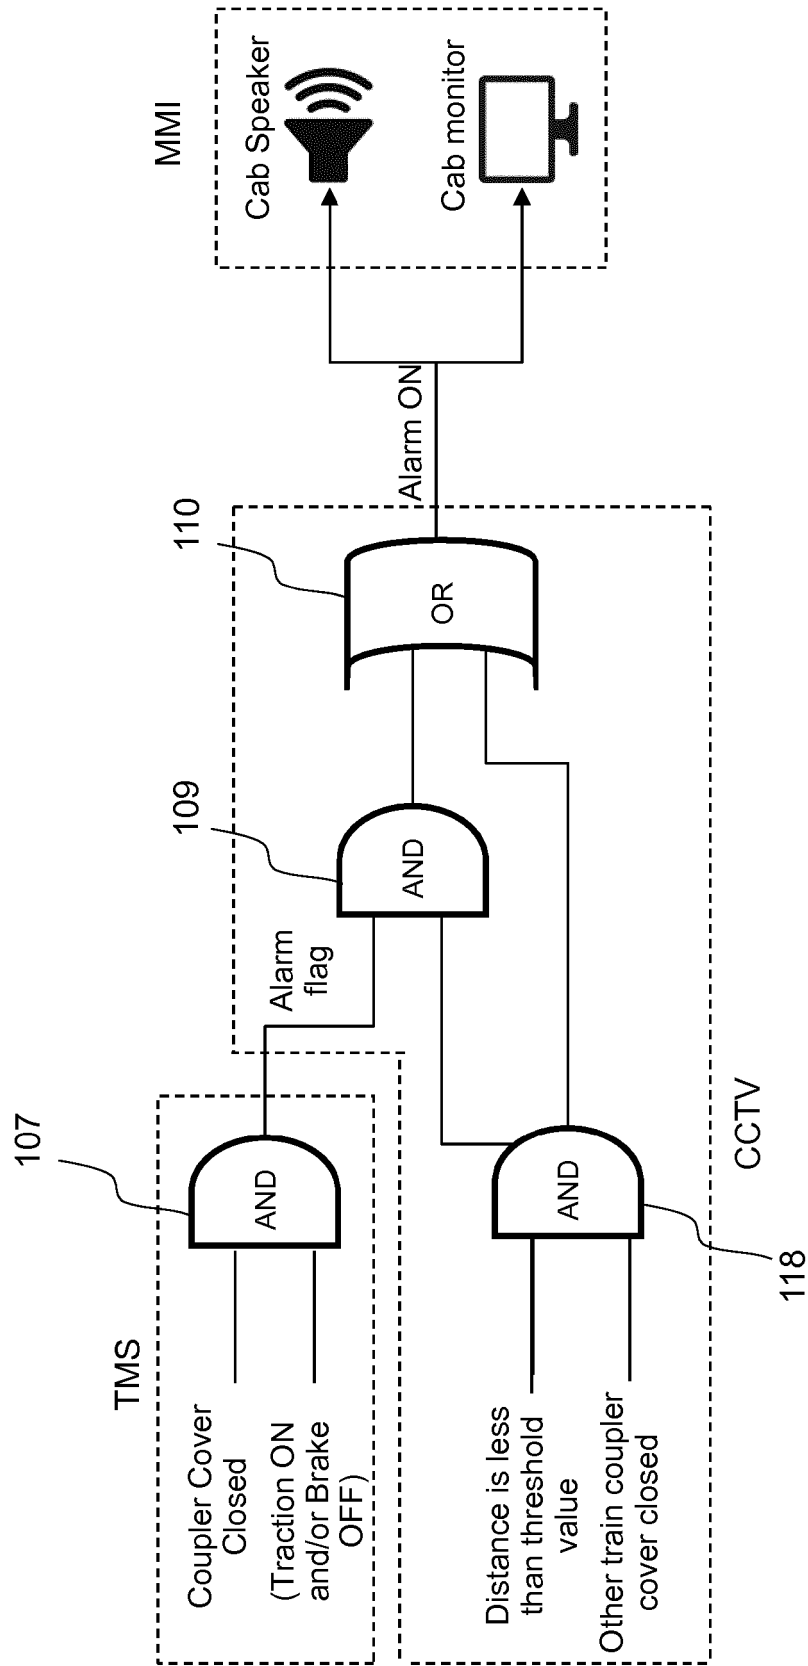


Fig. 13

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- DE 102012009114 A1 [0002]
- DE 102007039687 A1 [0002]