




(86) Date de dépôt PCT/PCT Filing Date: 2008/05/01
(87) Date publication PCT/PCT Publication Date: 2008/11/20
(45) Date de délivrance/Issue Date: 2012/03/13
(85) Entrée phase nationale/National Entry: 2009/09/22
(86) N° demande PCT/PCT Application No.: GB 2008/001527
(87) N° publication PCT/PCT Publication No.: 2008/139141
(30) Priorité/Priority: 2007/05/14 (US11/748,087)

(51) Cl.Int./Int.Cl. *E21B 43/114* (2006.01),
E21B 43/26 (2006.01)
(72) Inventeur/Inventor:
SURJAATMADJA, JIM B., US
(73) Propriétaire/Owner:
HALLIBURTON ENERGY SERVICES, INC., US
(74) Agent: NORTON ROSE CANADA
S.E.N.C.R.L., S.R.L./LLP

(54) Titre : OUTIL A HYDROJET POUR ENVIRONNEMENT FORTEMENT EROSIF
(54) Title: HYDRAJET TOOL FOR ULTRA HIGH EROSIIVE ENVIRONMENT

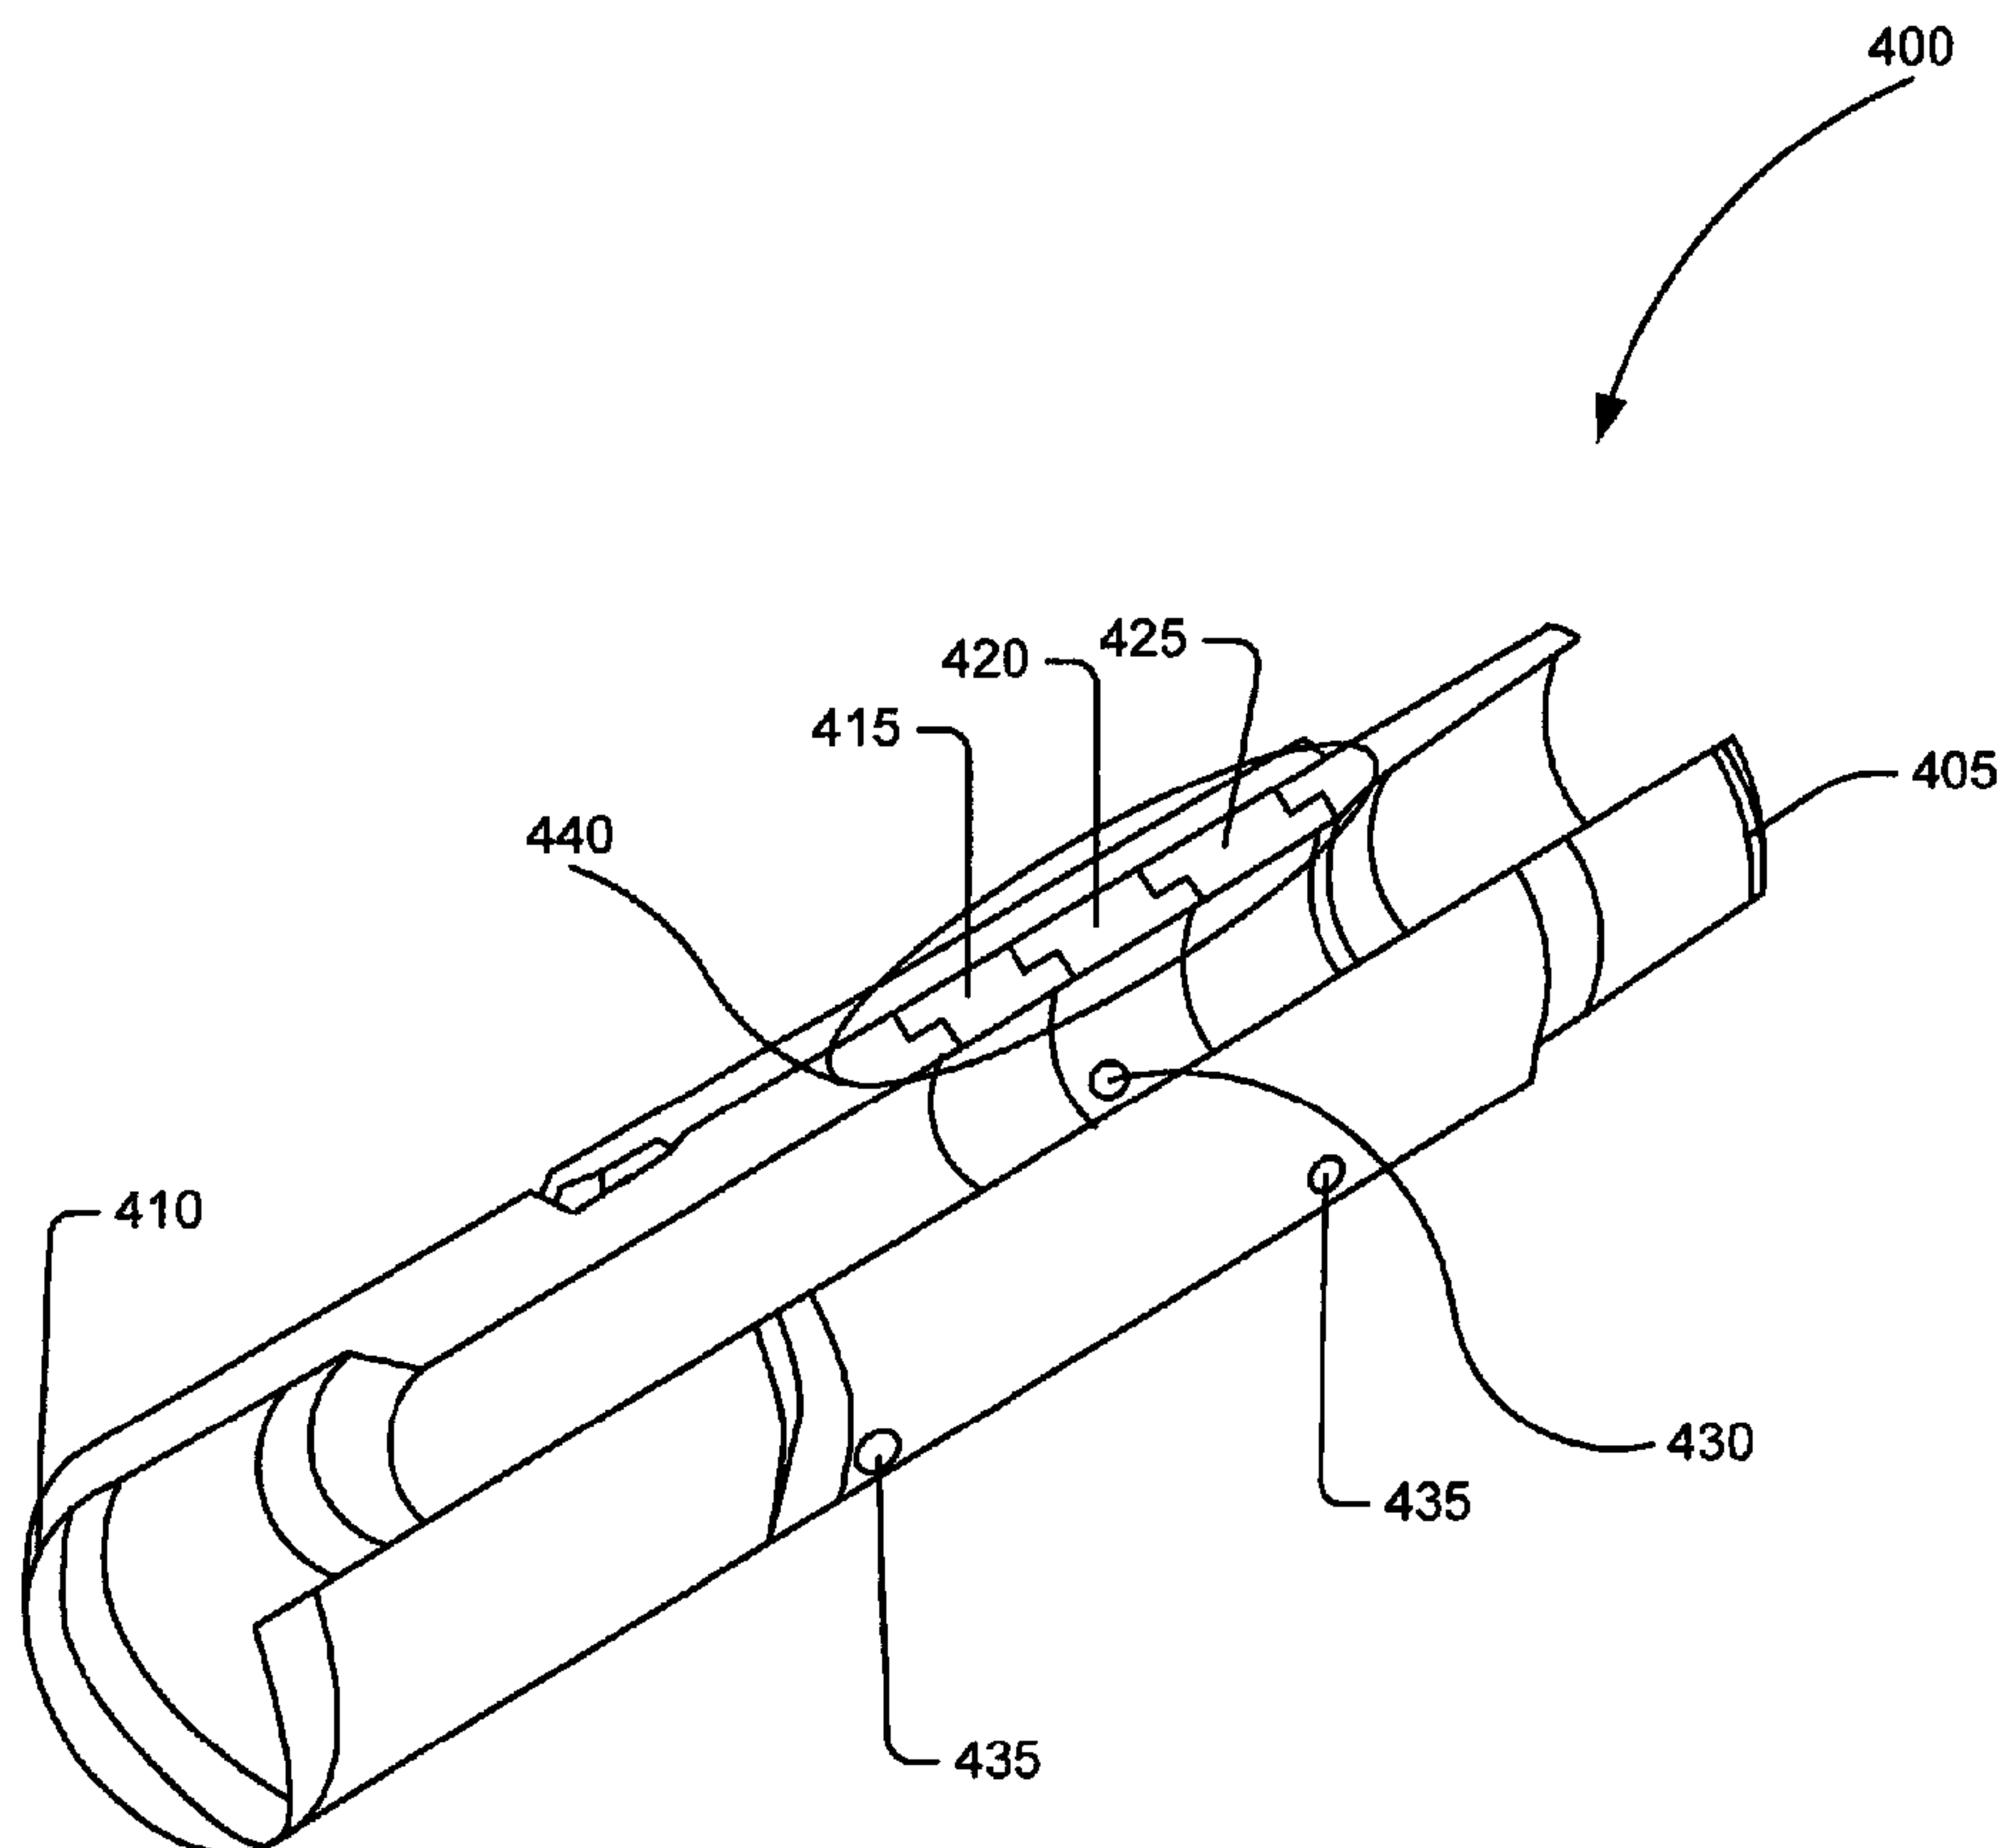

(57) Abrégé/Abstract:

The present invention relates to an improved method and system for perforating, slotting, and cutting steel and subterranean rock; and also for fracturing a subterranean formation to stimulate the production of desired fluids therefrom. The invention involves a fluid jetting device with a sleeve composed of a hard material. The sleeve includes at least one hole and a fluid flowing through the jetting device is emitted through the hole in the sleeve.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 November 2008 (20.11.2008)

PCT

(10) International Publication Number
WO 2008/139141 A1

(51) International Patent Classification:
E21B 43/114 (2006.01) *E21B 43/26* (2006.01)

(74) Agents: CURTIS, Philip, Anthony et al.; A A Thornton & Co., 235 High Holborn, London WC1V 7LE (GB).

(21) International Application Number:
PCT/GB2008/001527

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 1 May 2008 (01.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/748,087 14 May 2007 (14.05.2007) US

(71) Applicant (*for all designated States except US*): HAL-LIBURTON ENERGY SERVICES, INC. [US/US]; P.O. Box 1431, Duncan, OK 73533 (US).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for MW only*): CURTIS, Philip, Anthony [GB/GB]; A A Thornton & Co, 235 High Holborn, London WC1V 7LE (GB).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): SURJAATMADJA, Jim, B. [US/US]; 1105 Timbercreek Drive, Duncan, OK 73533 (US).

Published:

— with international search report

(54) Title: HYDRAJET TOOL FOR ULTRA HIGH EROSIVE ENVIRONMENT

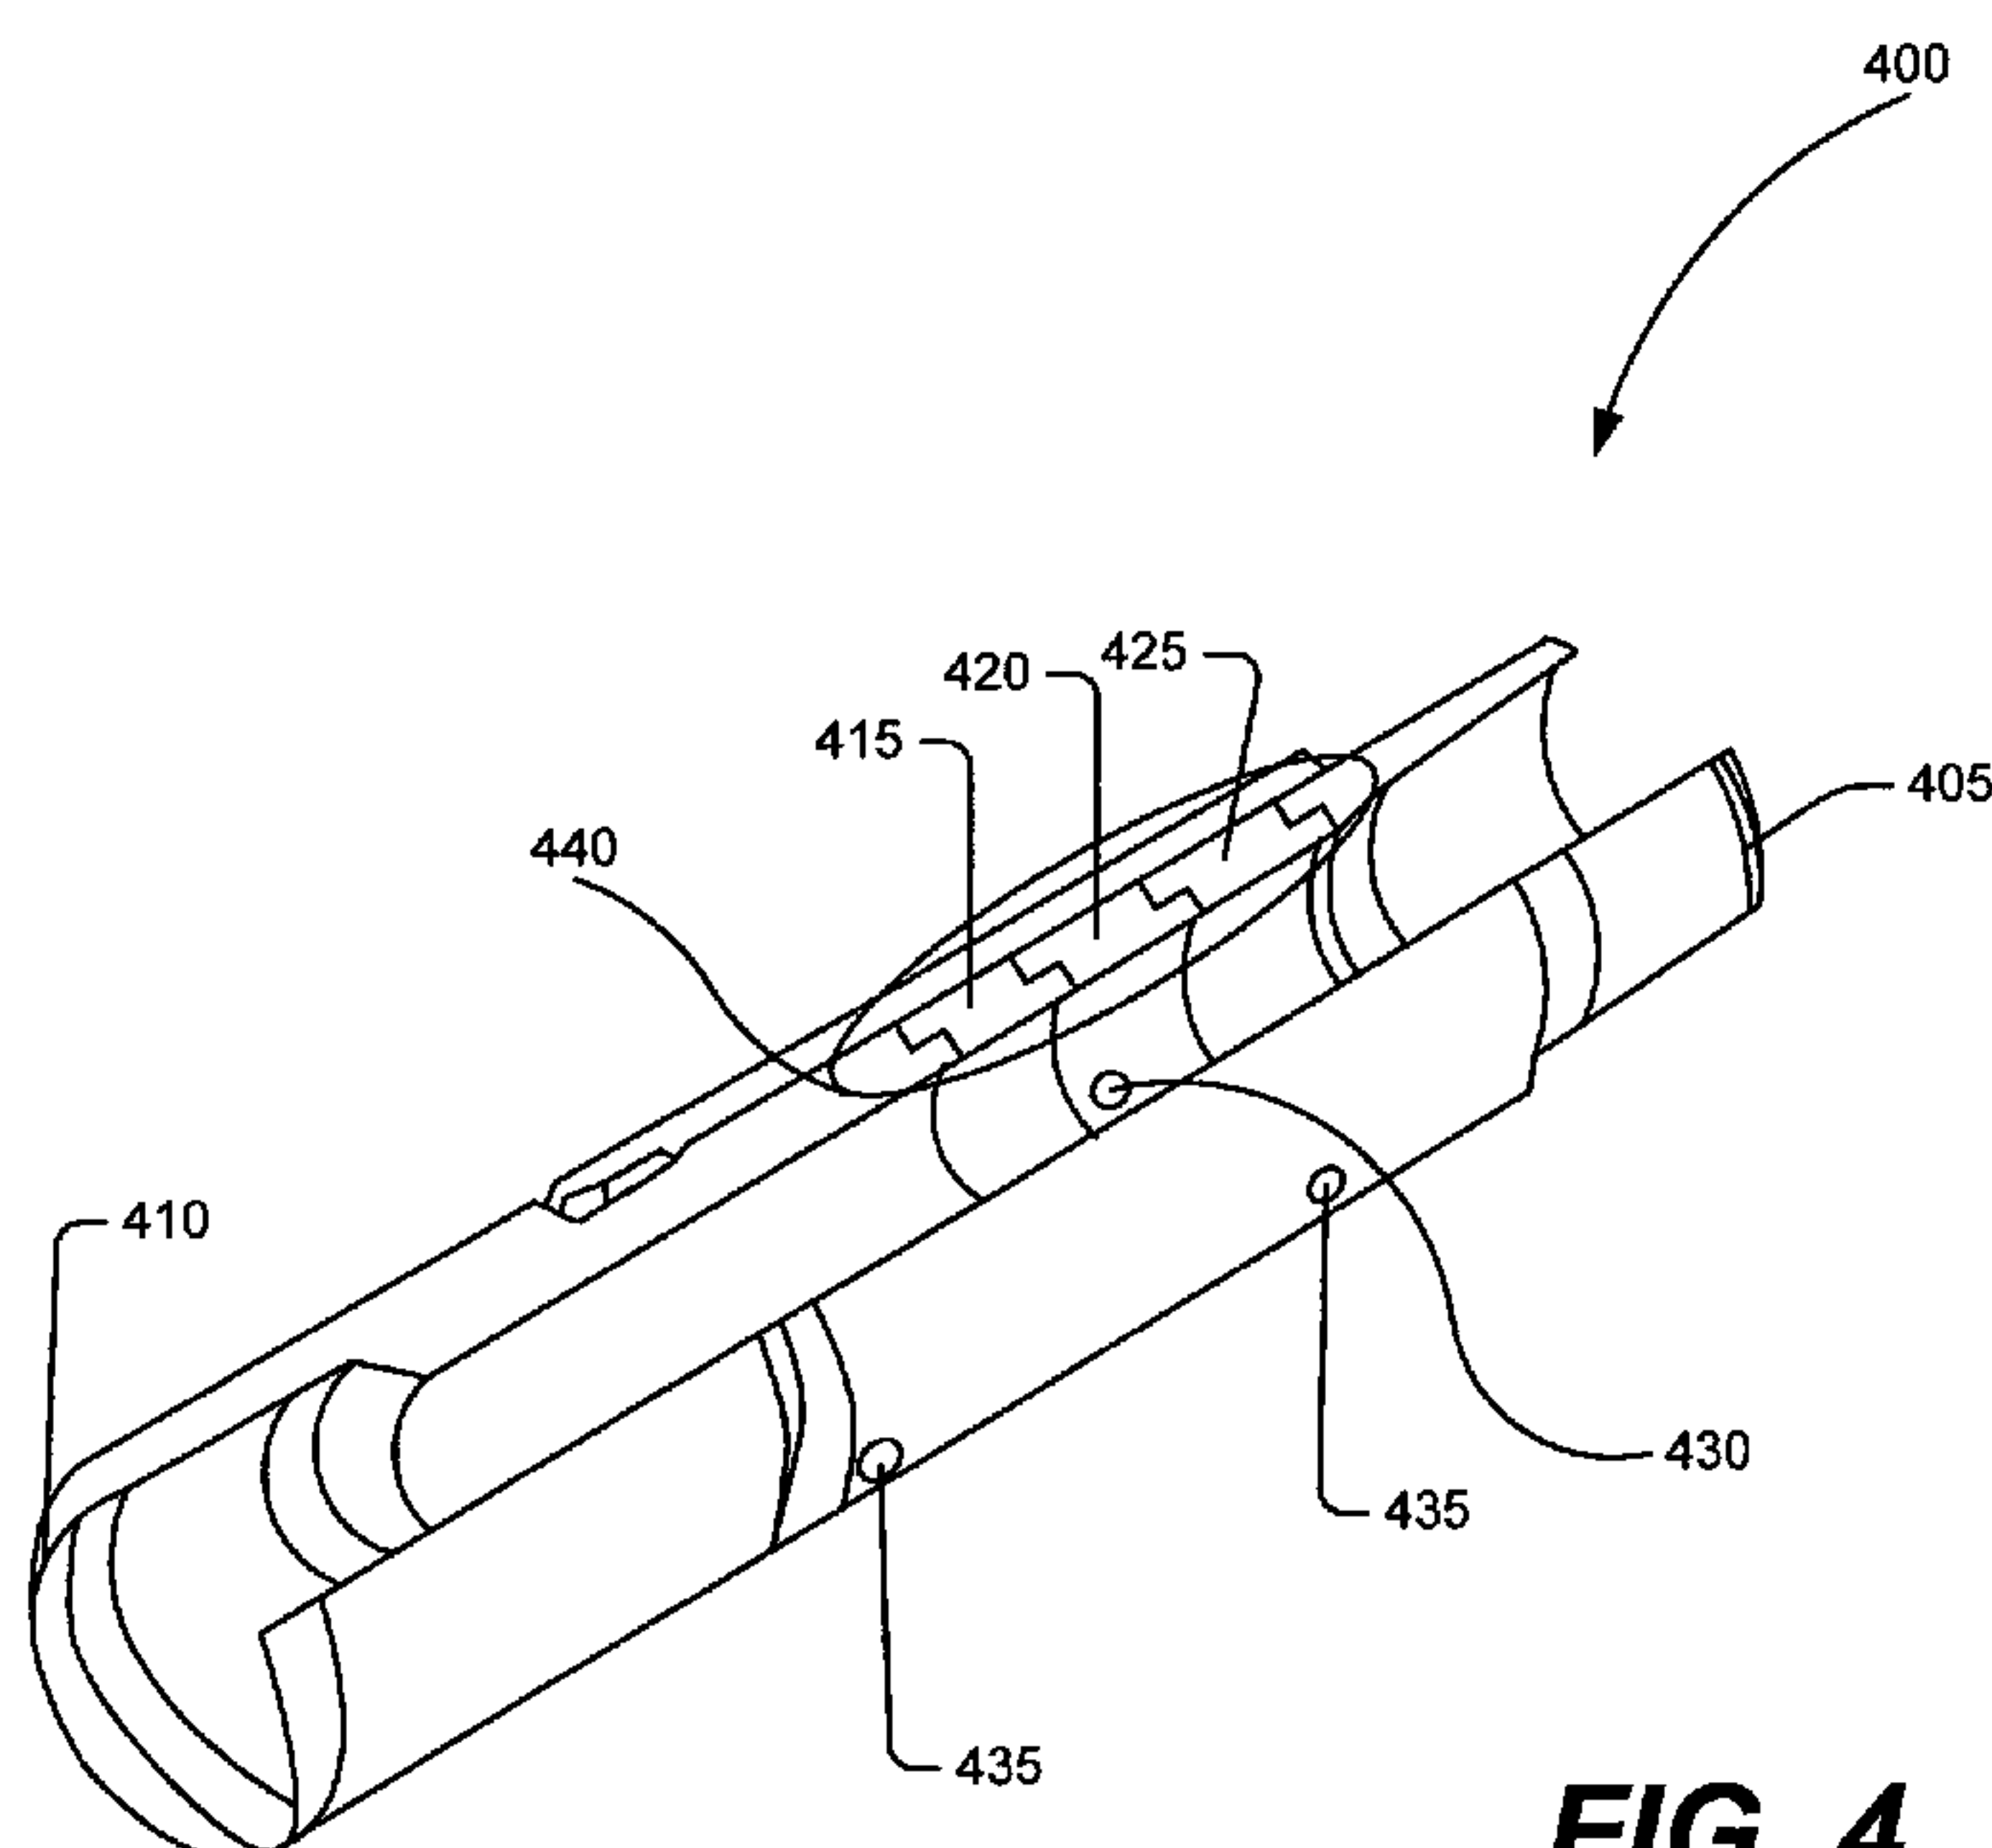


FIG. 4

(57) Abstract: The present invention relates to an improved method and system for perforating, slotting, and cutting steel and subterranean rock; and also for fracturing a subterranean formation to stimulate the production of desired fluids therefrom. The invention involves a fluid jetting device with a sleeve composed of a hard material. The sleeve includes at least one hole and a fluid flowing through the jetting device is emitted through the hole in the sleeve.

WO 2008/139141 A1

HYDRAJET TOOL FOR ULTRA HIGH EROSION ENVIRONMENT

BACKGROUND OF THE INVENTION

[0001] The present invention primarily relates to mining and subterranean well formations. More particularly, the present invention relates to an improved method and system for perforating, slotting, and cutting steel and subterranean rock; and also for fracturing a subterranean formation to stimulate the production of desired fluids therefrom.

[0002] Jetting tools are used in a number of different industries and have a variety of different applications. For instance, jetting tools are used in subterranean operations such as perforating and hydraulic fracturing.

[0003] Hydraulic fracturing is often utilized to stimulate the production of hydrocarbons from subterranean formations penetrated by well bores. Typically, in performing hydraulic fracturing treatments, the well casing, where present, such as in vertical sections of wells adjacent the formation to be treated, is perforated. This perforating operation can be performed using explosive means or hydrazetting. Where only one portion of a formation is to be fractured as a separate stage, it is then isolated from the other perforated portions of the formation using conventional packers or the like, and a fracturing fluid is pumped into the well bore through the perforations in the well casing and into the isolated portion of the formation to be stimulated at a rate and pressure such that fractures are formed and extended in the formation. A propping agent may be suspended in the fracturing fluid which is deposited in the fractures. The propping agent functions to prevent the fractures from closing, thereby providing conductive channels in the formation through which produced fluids can readily flow to the well bore. In certain formations, this process is repeated in order to thoroughly populate multiple formation zones or the entire formation with fractures.

[0004] One method for fracturing formations may be found in United States Patent No. 5,765,642 whereby a hydrazetting tool is utilized to jet fluid through a nozzle against a subterranean formation at a pressure sufficient to form a cavity and fracture the formation using stagnation pressure in the cavity.

[0005] Hydrajetting in oil field applications often involves long duration jetting for cutting a multitude of casing strings and perforations. This problem is greatly magnified when a hydrajetting tool is utilized to form a cavity and fracture the formation using the stagnation pressure in the cavity as discussed in U.S. Patent No. 5,765,642. This is because millions of pounds of proppants may be flowing through the hydrajetting tool at very high velocities in order to form a cavity and fracture the formation. One solution for withstanding the abrasive forces encountered during the jetting process is to make the jetting tool from an ultra-hard material. However, the jetting tool cannot be made of a very hard material to avoid erosion because such materials are brittle and will shatter during jetting operations or when the jetting tool is moved in and out of the jetting location. Consequently, the current jetting tools comprise a cylindrical structure which cannot withstand the abrasive forces. In some applications a fluid jet that is made of a hard material is installed on the cylindrical structure. Hence, one disadvantage of the current hydrajetting methods is that the jetting tool is eroded during operation. In order to deal with this erosion the jetting tool must be extracted from the hole to be repaired or replaced. The extraction of the jetting tool can be expensive and could also lead to a job failure. In such situations it would be desirable to have a method and tool for delivering fluids to the formation to be fractured which could withstand the impact of the erosive forces.

SUMMARY

[0006] The present invention primarily relates to mining and subterranean well formation. More particularly, the present invention relates to an improved method and system for perforating, slotting, and cutting steel and subterranean rock; and also for fracturing a subterranean formation to stimulate the production of desired fluids therefrom.

[0007] In one embodiment, the present invention is directed to an abrasive resistance jetting tool which includes a sleeve. The sleeve is composed of a material with a hardness greater than 75 Rockwell A and has at least one hole in its wall. A fluid flowing through the sleeve can exit through the hole.

[0008] In another embodiment the present invention is directed to a fluid jetting device with a cylindrical body having a hardness greater than 75 Rockwell A. A fluid flowing through the cylindrical body is emitted through an orifice in the cylindrical body.

[0009] In certain embodiments the present invention may include a holder enclosing the jetting device. The holder includes holes that align with the holes in the sleeve in order to allow the emission of a fluid from the sleeve.

[0010] The features and advantages of the present invention will be apparent to those skilled in the art from the description of the preferred embodiments which follows when taken in conjunction with the accompanying drawings. While numerous changes may be made by those skilled in the art, such changes are within the spirit of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] These drawings illustrate certain aspects of some of the embodiments of the present invention, and should not be used to limit or define the invention.

[0012] FIGURE 1 illustrates a hydrajetting tool in accordance with the prior art.

[0013] FIGURE 2 illustrates the impact of damage causing factors on a hydrajetting tool in accordance with the prior art.

[0014] FIGURE 3 illustrates the result of straight jetting and angled jetting using a hydrajetting tool in accordance with the prior art.

[0015] FIGURE 4 illustrates a cutaway view of an improved jetting tool in accordance with an embodiment of the present invention depicting the solid sleeve, holders and associated parts.

[0016] FIGURE 5 illustrates the impact of damage causing factors on an improved jetting tool in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

[0017] The present invention primarily relates to mining and subterranean well formation. More particularly, the present invention relates to an improved method and system for perforating, slotting, and cutting steel and subterranean rock; and also for fracturing a subterranean formation to stimulate the production of desired fluids therefrom.

[0018] In wells penetrating certain formations, and particularly deviated wells, it is often desirable to create a number of structures, including perforations, small fractures, large fractures, or a combination thereof. Oftentimes, these structures are created by operations that are performed using a hydrajert tool.

[0019] One of the most severe jetting applications is encountered when using the hydrajert tool as a fracturing tool as discussed in United States Patent No. 5,765,642. During the fracturing process the fracturing tool is positioned within a formation to be fractured and fluid is then jetted through the fluid jet against the formation at a pressure sufficient to cut through the casing and cement sheath and form a cavity therein. The pressure must be high enough to also be able to fracture the formation by stagnation pressure in the cavity. A high stagnation pressure is produced at the tip of a cavity in a formation being fractured because of the jetted fluids being trapped in the cavity as a result of having to flow out of the cavity in a direction generally opposite to the direction of the incoming jetted fluid. The high pressure exerted on the formation at the tip of the cavity causes a fracture to be formed and extend some distance into the formation. In certain situations, a propping agent is suspended in the fracturing fluid which is deposited in the fracture. The propping agent may be a granular substance such as, for example, sand grains, ceramic or bauxite or other man-made grains, walnut shells, or other material carried in suspension by the fracturing fluid. The propping agent functions to prevent the fractures from closing and thereby provides conductive channels in the formation through which produced fluids can readily flow to the well bore. The presence of the propping agent also increases the erosive effect of the jetting fluid.

[0020] In order to extend the fracture formed as described above further into the formation in accordance with this invention, a fracturing fluid is pumped through the fracturing tool and into the well bore to raise the ambient fluid pressure exerted on the

formation. The fluid is pumped into the fracture at a rate and high pressure sufficient to extend the fracture an additional distance from the well bore into the formation.

[0021] The details of the present invention will now be discussed with reference to the figures. Turning to Figure 1, a hydrajetting tool in accordance with the prior art is shown generally by reference numeral 100. Nozzle 130 may extend beyond the surface of the outer wall as depicted in Figure 1, or nozzle 130 may extend only to the surface of the outer wall of the hydrajetting tool 100. The orientation of nozzle 130 may be modified depending upon the formation to be fractured. The nozzle 130 has an exterior opening which acts as a nozzle opening 150 that allows the passage of fluids from the inner side of hydrajetting tool 100 through the nozzle 130. Typically, the nozzle 130 may be composed of any material that is capable of withstanding the stresses associated with fluid fracture, the abrasive nature of the fracturing or other treatment fluids and any proppants or other fracturing agents used. The materials that can be used for construction of the nozzle 130 may include, but are not limited to tungsten carbide, diamond composites, and certain ceramics.

[0022] Although the nozzle 130 is often composed of abrasion resistive materials such as tungsten carbide, or other certain ceramics, such materials are expensive and brittle. As a result, a tool wholly made of such substances will likely shatter as it cannot withstand the forces encountered as it moves down to the site to be fractured. Consequently, the body of the hydrajetting tool 100 is typically made of steel or similar materials that although not brittle, are not strong enough to withstand the abrasive forces encountered during the hydrajetting process.

[0023] Shown in Figure 2, is the impact of damage causing factors on a hydrajetting tool in accordance with the prior art. Arrows are used to show the direction of the fluid flow as the fluid approaches and exits the nozzle 130 through the nozzle opening 150. Typically, there are three distinct phenomena that damage the hydrajetting tool 100 as the fluid exits the nozzle 130.

[0024] First, as the fluid approaches the nozzle opening 150 it tends to rapidly turn the corner in order to exit the nozzle 130 through the nozzle opening 150. As the fluid 220 turns to exit the nozzle opening 150, some of the fluid overshoots as depicted by arrows

210. This fluid overshoot also causes erosion 215 on the inner wall of the hydrajetting tool 100.

[0025] Secondly, a slight movement of the hydrajetting tool 100 can initiate a Coriolis swirling effect. The hydrajetting tool 100 is not completely stationary during the jetting process. For example, the tool may move due to vibrations resulting from the jetting process. If the hydrajetting tool 100 turns during the jetting process it will cause the fluid to start swirling, thereby creating a tornado effect 240. As the fluid swirls 240 it further erodes the inner walls 245 of the hydrajetting tool 100 along its circumference.

[0026] The third major source of damage to the hydrajetting tool 100 results from the reflection of the emitted fluid 250 from the perforations 255. As the fluid reflects 230 from the perforation it erodes 235 the hydrajetting tool 100. As discussed above, in some hydrajetting tools the direction of the nozzle opening 150 may be altered depending on the formation to be fractured. The damage resulting from the reflection of the fluid is shown in more detail in Figure 3. Depicted in Figure 3 is a diagram showing the damage to the hydrajetting tool 100 due to reflected fluids from the perforations 255 with the nozzle 300, 315 at different angles. The reflection of the fluid onto the hydrajetting tool 100 is the least when the nozzle 300 shoots the fluid 305 straight into the perforation 255. However, at this angle the splashback fluid 310 which is moving in a direction opposite to that of the jet 305 reduces the effectiveness of the jet 305 leading to an ineffective cutting of the perforation 255. Jet 300 also reduces the effectiveness of the splashback fluid 310 in damaging the tool near the fluid exit of the jet. Massive erosion on the tool 235 still occur around the perimeter of the nozzle. On the other hand, applying the jet 320 at an angle makes the cutting process highly effective. However, due to angling the nozzle 315 the effect of fluid 325 reflected onto the hydrajetting tool 100 increases as the splashback fluid 325 is undeterred. Because the fluid 325 is shooting back at the hydrajetting tool 100 at full velocity, it will cut 330 the hydrajetting tool in a short amount of time.

[0027] Shown in FIGURE 4 is a cutaway view of an improved jetting tool in accordance with an embodiment of the present invention shown generally with reference numeral 400. The improved jetting tool 400 includes a solid sleeve 440 comprising a plurality of hard material parts 415, 420 and 425. The hard material parts are made from a

material having a hardness greater than 75 Rockwell A. The materials that may be used to make the hard material parts 415, 420, 425 include, but are not limited to, carbide or other ceramics with a high resistance to abrasive forces. The carbide used to make the hard material parts 415, 420 and 425 may be of all grades and may be a carbide with different types of binders or without binders. In an embodiment where a carbide with binders is used to make the hard material parts 415, 420 and 425, the binder may be made of a variety of suitable materials including, but not limited to, Molybdenum and Cobalt. Although the exemplary solid sleeve comprises three hard material parts 415, 420, 425, it would be readily apparent to one skilled in the art with the benefit of this disclosure that a different number of hard material parts can be used depending on the desired length of the jetting tool 400 and other factors such as the nature of the formation being fractured.

[0028] As discussed above, the suitable hard materials such as carbide or other ceramics are brittle and easily shatter. This problem is resolved by enclosing the solid sleeve 440 between a first holder 405 on one side and a second holder 410 on the other side. The holders 405, 410 act as a carrier and sacrificial body on the outside of the solid sleeve 440. The primary purpose of the holders 405, 410 is to protect the solid sleeve 440 against shattering during the jetting process and as the tool is moved to and returned from a desired location. The holders may be made of a variety of materials including but not limited to steel, fiberglass, or other suitable materials.

[0029] In the exemplary embodiment, one of the hard material parts 420 includes a hole 430. There are also holes 435 created on the body of the holders 405, 410 which are aligned to match the holes of the solid sleeve 440. The number of the holes and the angles at which the holes are located can be varied depending on the nature of the formation and other relevant factors in order to achieve a desirable performance. Because holes are created directly in the body of the jetting tool 400, a nozzle need not be used and the fluid can flow out of the jetting tool 400 through the holes in the walls.

[0030] Shown in FIGURE 5 is the impact of damage causing factors on an improved jetting tool 400 in accordance with an embodiment of the present invention. The fluid 500 flows through the improved jetting tool 400 and exits through the hole 435 in the wall of the jetting tool 400. The causes of damage are the same as that discussed with regard

to the Prior Art, namely, the fluid rapidly turning the corner 520, the fluid overshoot 510, the Coriolis swirling of the fluid 540 and the reflection of the fluid 530 from the perforations 255.

[0031] However, because the solid sleeve 440 is composed of hard materials, it will not be eroded by the fluid turning the corner 520, the Coriolis swirling 540, or the overshoot fluid 510. Moreover, although the reflection of the fluid 530 from the perforations 255 impacts the holder 405 and erodes 535 it, this erosion will not impact the performance of the jetting tool 400. Specifically, although the reflected fluid 530 may completely erode the holder 405, it cannot erode the hard material below it, and hence, cannot impact the operation of the jetting mechanism which is composed of the hard material forming the solid sleeve 440. The main purpose of the holder 405 is to prevent the shattering of the solid sleeve 440 and the holder 405 can perform that function despite having parts of its surface eroded 535 by the reflected fluid 530. As a result, the improved jetting tool 400 can withstand a long duration of jetting and need not be removed from the hole for part replacement until the job is completed. Moreover, any damage to holders 405, 410 can easily be repaired by simply replacing them as they are made from cheap material and are easily separable from the solid sleeve 440.

[0032] Although the present invention is described above in the context of hydrojetting and fracturing in a subterranean formation, as would be appreciated by those of ordinary skill in the art with the benefit of this disclosure, the improved jetting tool may be used in many other applications and industries.

[0033] Therefore, the present invention is well-adapted to carry out the objects and attain the ends and advantages mentioned as well as those which are inherent therein. While the invention has been depicted and described by reference to exemplary embodiments of the invention, such a reference does not imply a limitation on the invention, and no such limitation is to be inferred. The invention is capable of considerable modification, alternation, and equivalents in form and function, as will occur to those ordinarily skilled in the pertinent arts and having the benefit of this disclosure. The depicted and described embodiments of the invention are exemplary only, and are not exhaustive of the scope of the invention.

The terms in the claims have their plain, ordinary meaning unless otherwise explicitly and clearly defined by the patentee.

CLAIMS:

1. A jetting tool for perforating, slotting and cutting steel and subterranean rock; or fracturing a subterranean formation to stimulate the production of desired fluids therefrom, comprising a sleeve having at least one hole in a wall of the sleeve;
wherein the sleeve comprises a material with a hardness greater than 75 Rockwell A; and
whereby a fluid flowing in the sleeve can exit through the hole.
2. The jetting tool of claim 1, wherein the sleeve is cylindrical.
3. The jetting tool of claim 1, wherein the material comprises a ceramic.
4. The jetting tool of claim 3, wherein the ceramic comprises a carbide.
5. The jetting tool of claim 4, wherein the carbide comprises a carbide without a binder.
6. The jetting tool of claim 4, wherein the carbide comprises a carbide with a binder.
7. The jetting tool of claim 6, wherein the binder is one of cobalt or molybdenum.
8. The jetting tool of claim 1, wherein the jetting tool is a hydrojetting tool.
9. The jetting tool of claim 1, wherein the sleeve is enclosed in a holder.
10. The jetting tool of claim 9, wherein the holder comprises a first part and a second part.

11. The jetting tool of claim 9, wherein a hole in the holder is aligned with a hole in the sleeve.
12. The jetting tool of claim 9, wherein the holder is separable from the sleeve.
13. The jetting tool of claim 1, wherein the material has a hardness greater than 80 Rockwell A.
14. The jetting tool of claim 1, wherein the jetting tool is a fracturing tool.
15. A method for perforating, slotting and cutting steel and subterranean rock; or fracturing a subterranean formation to stimulate the production of desired fluids therefrom, using a jetting tool comprising a sleeve, characterized in that the method comprises fluid flowing through the sleeve and exiting the sleeve through at least one hole in a wall of the sleeve; and wherein the sleeve comprises a material with a hardness greater than 75 Rockwell A.

1/5


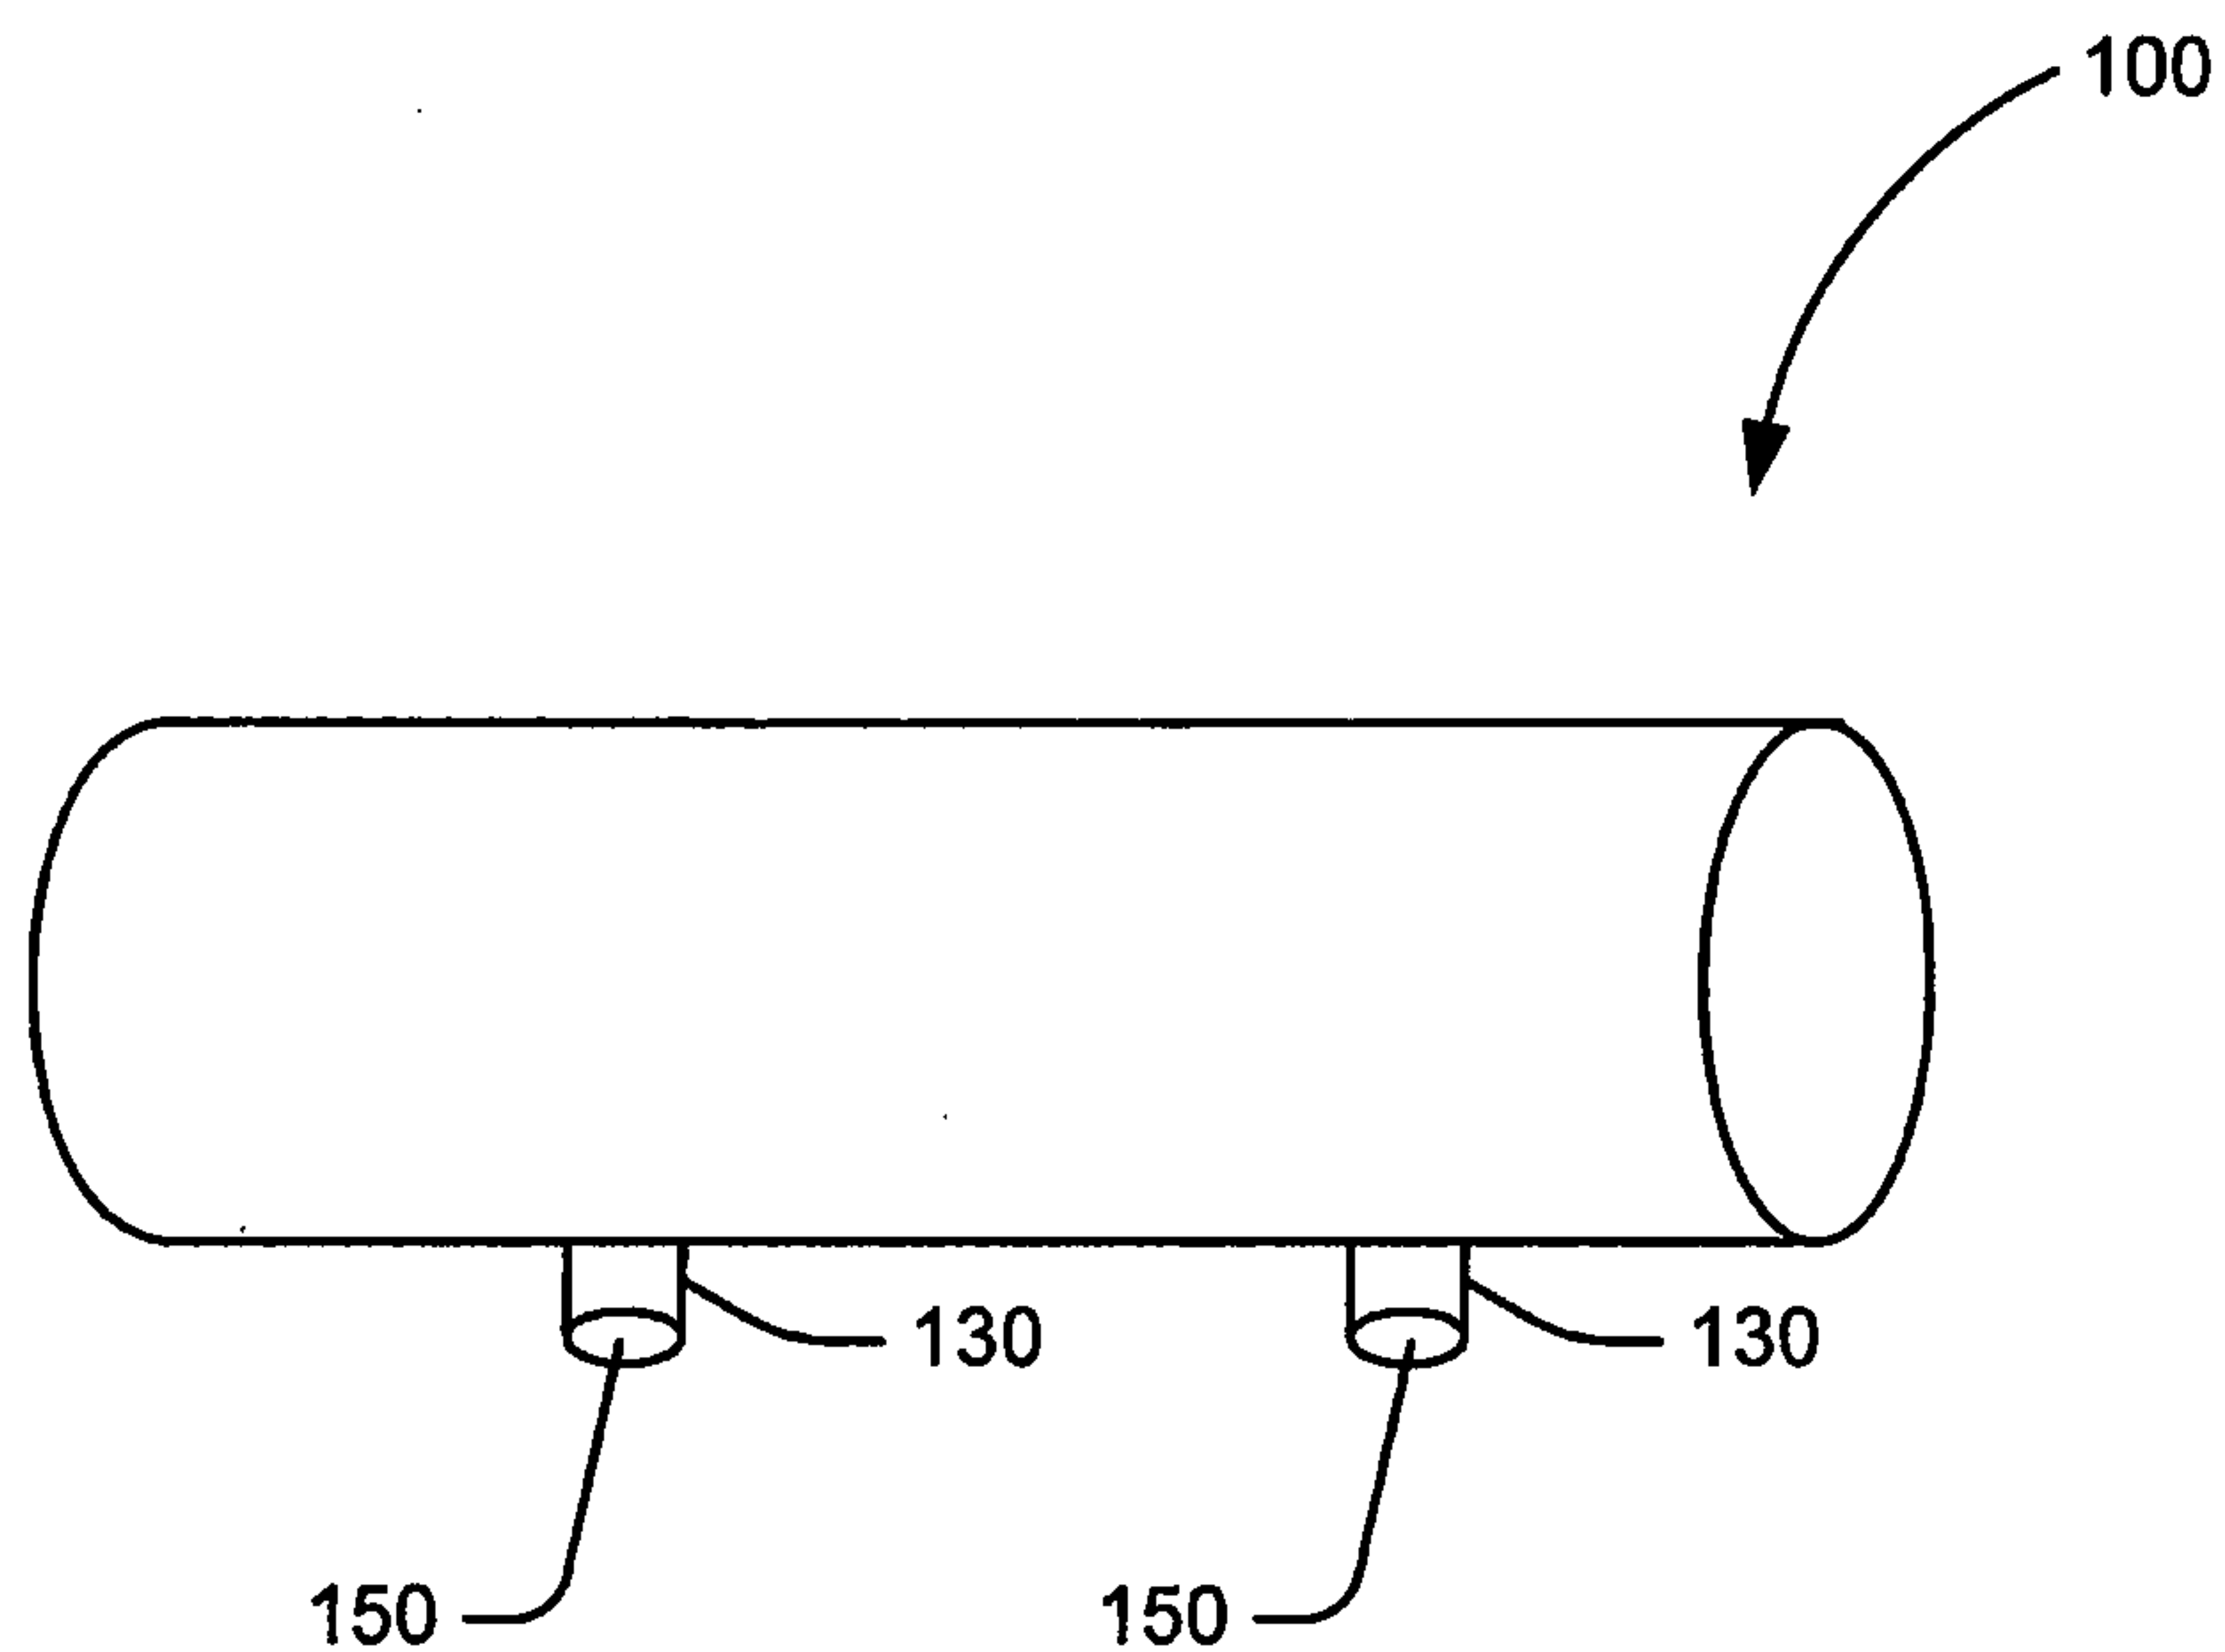


FIG. 1
(PRIOR ART)

2/5

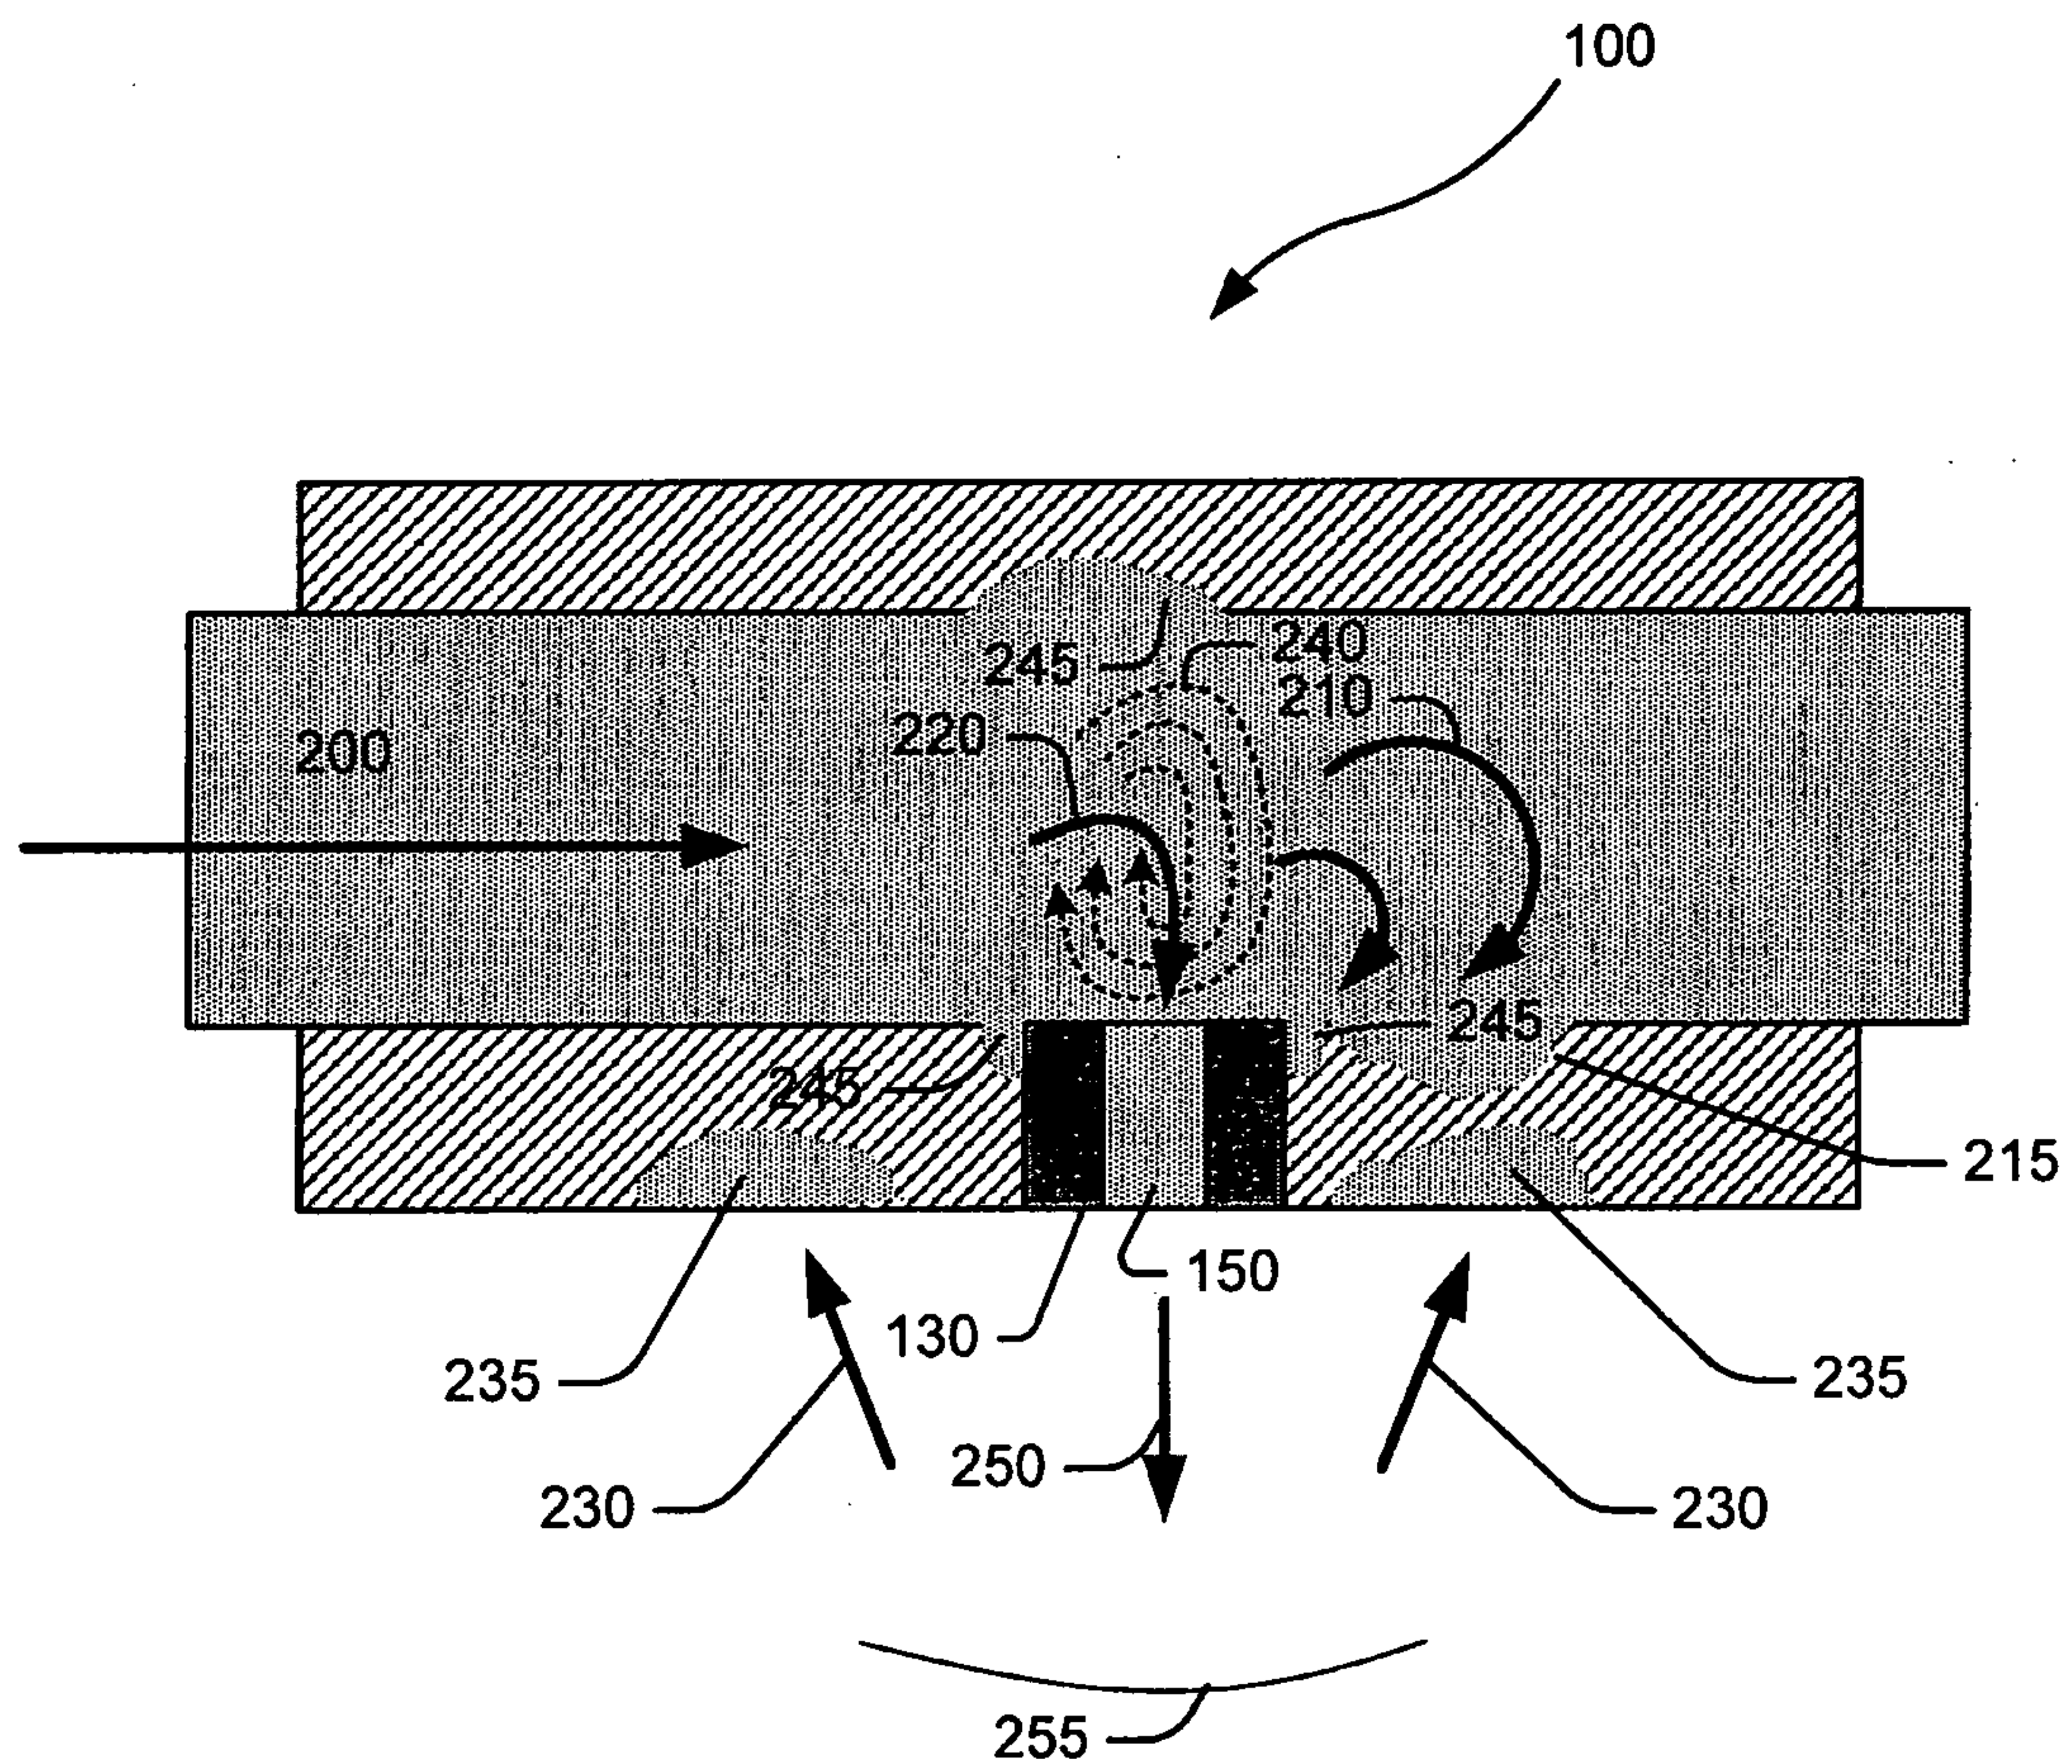

3/5

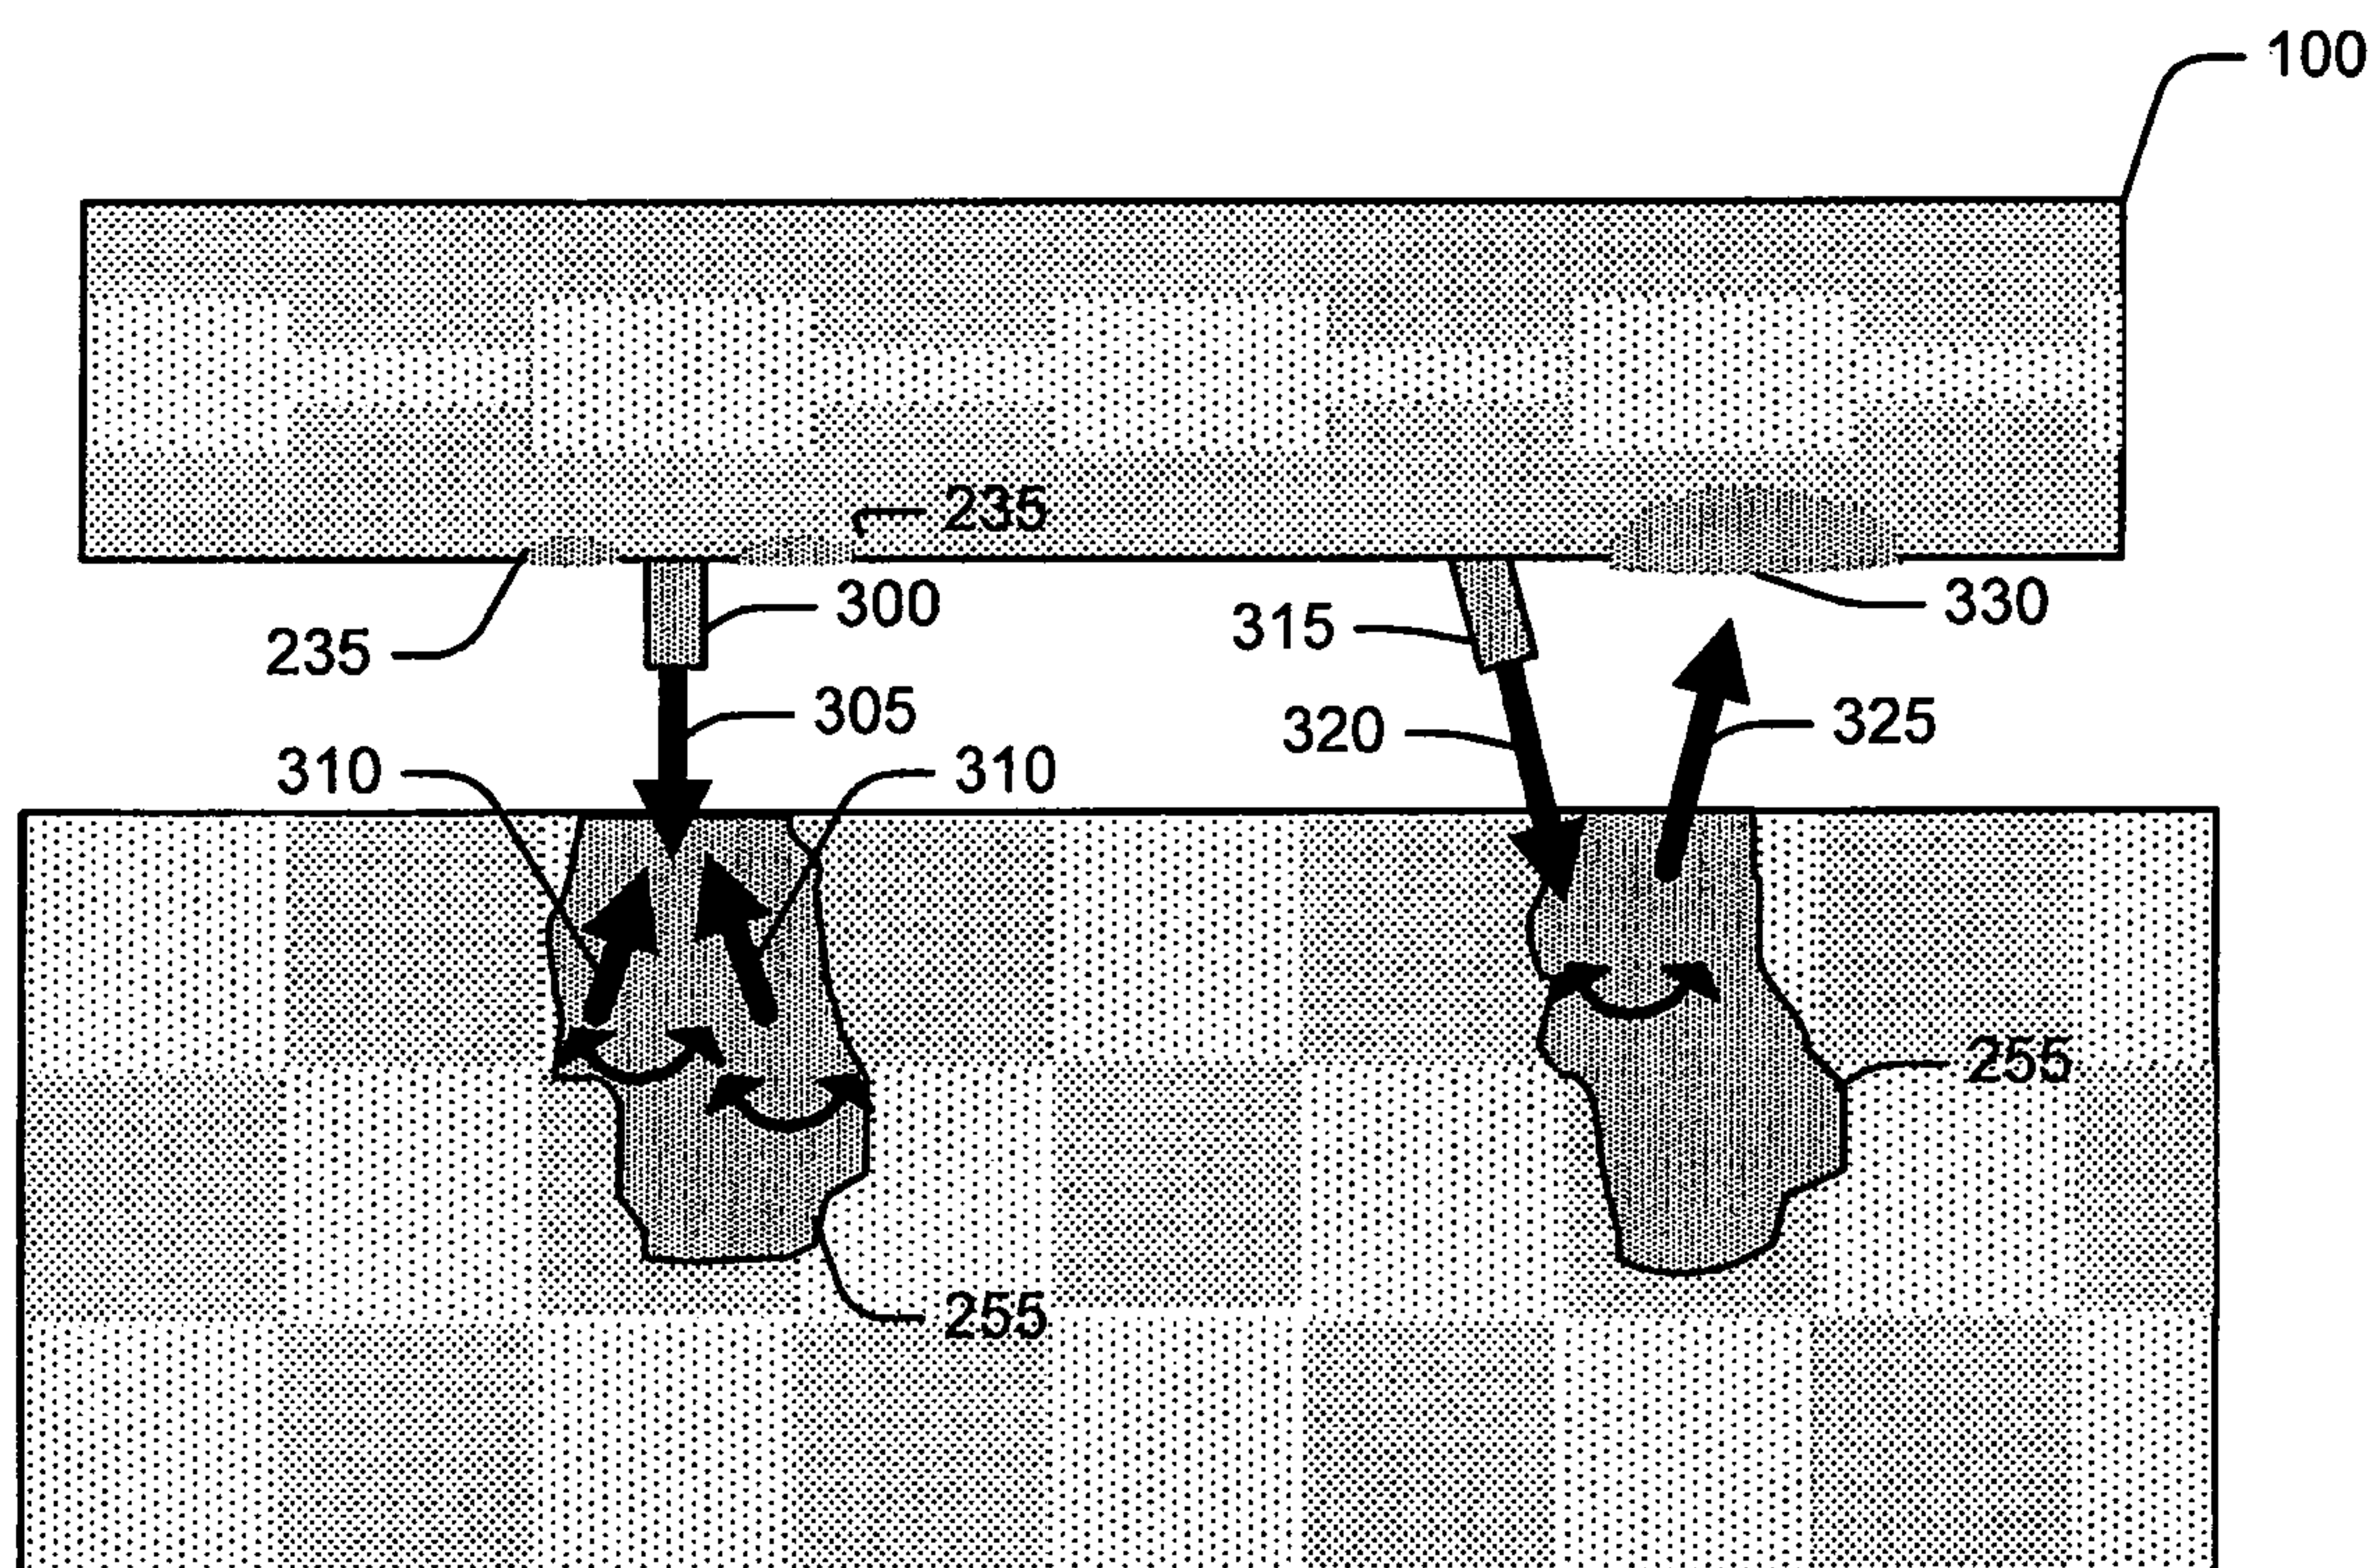
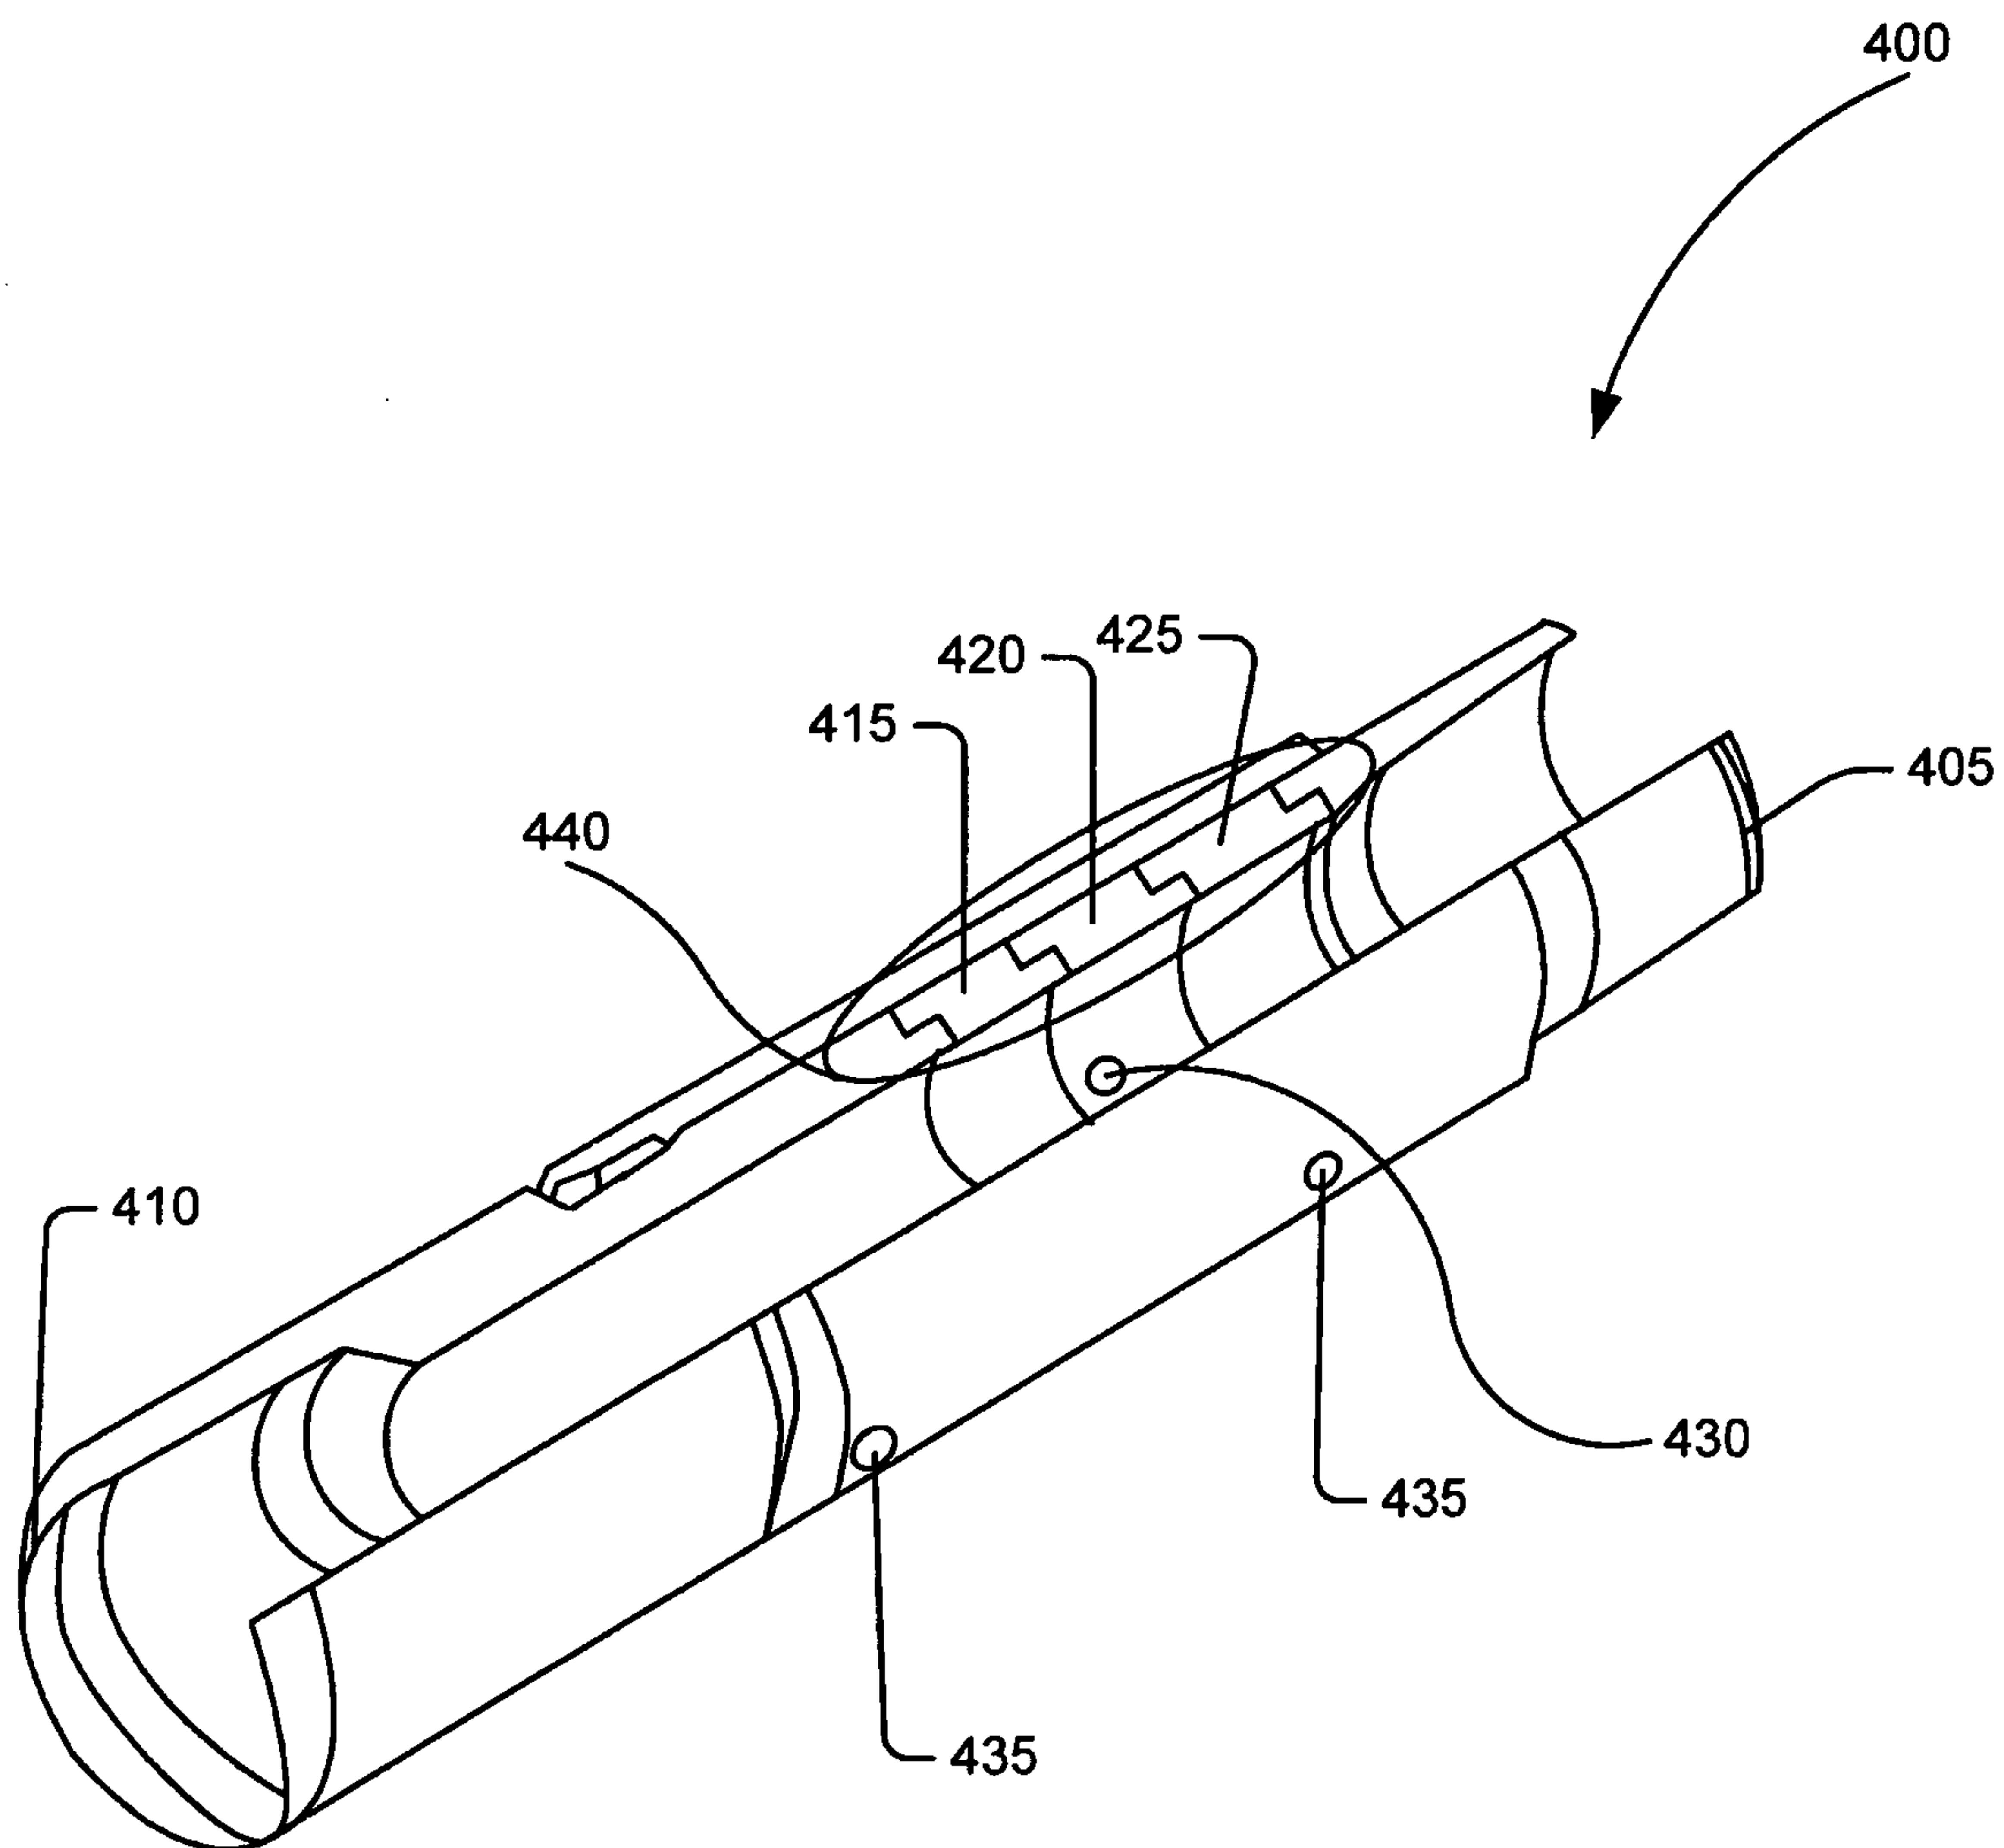


FIG. 3
PRIOR ART

4/5

**FIG. 4**

5/5

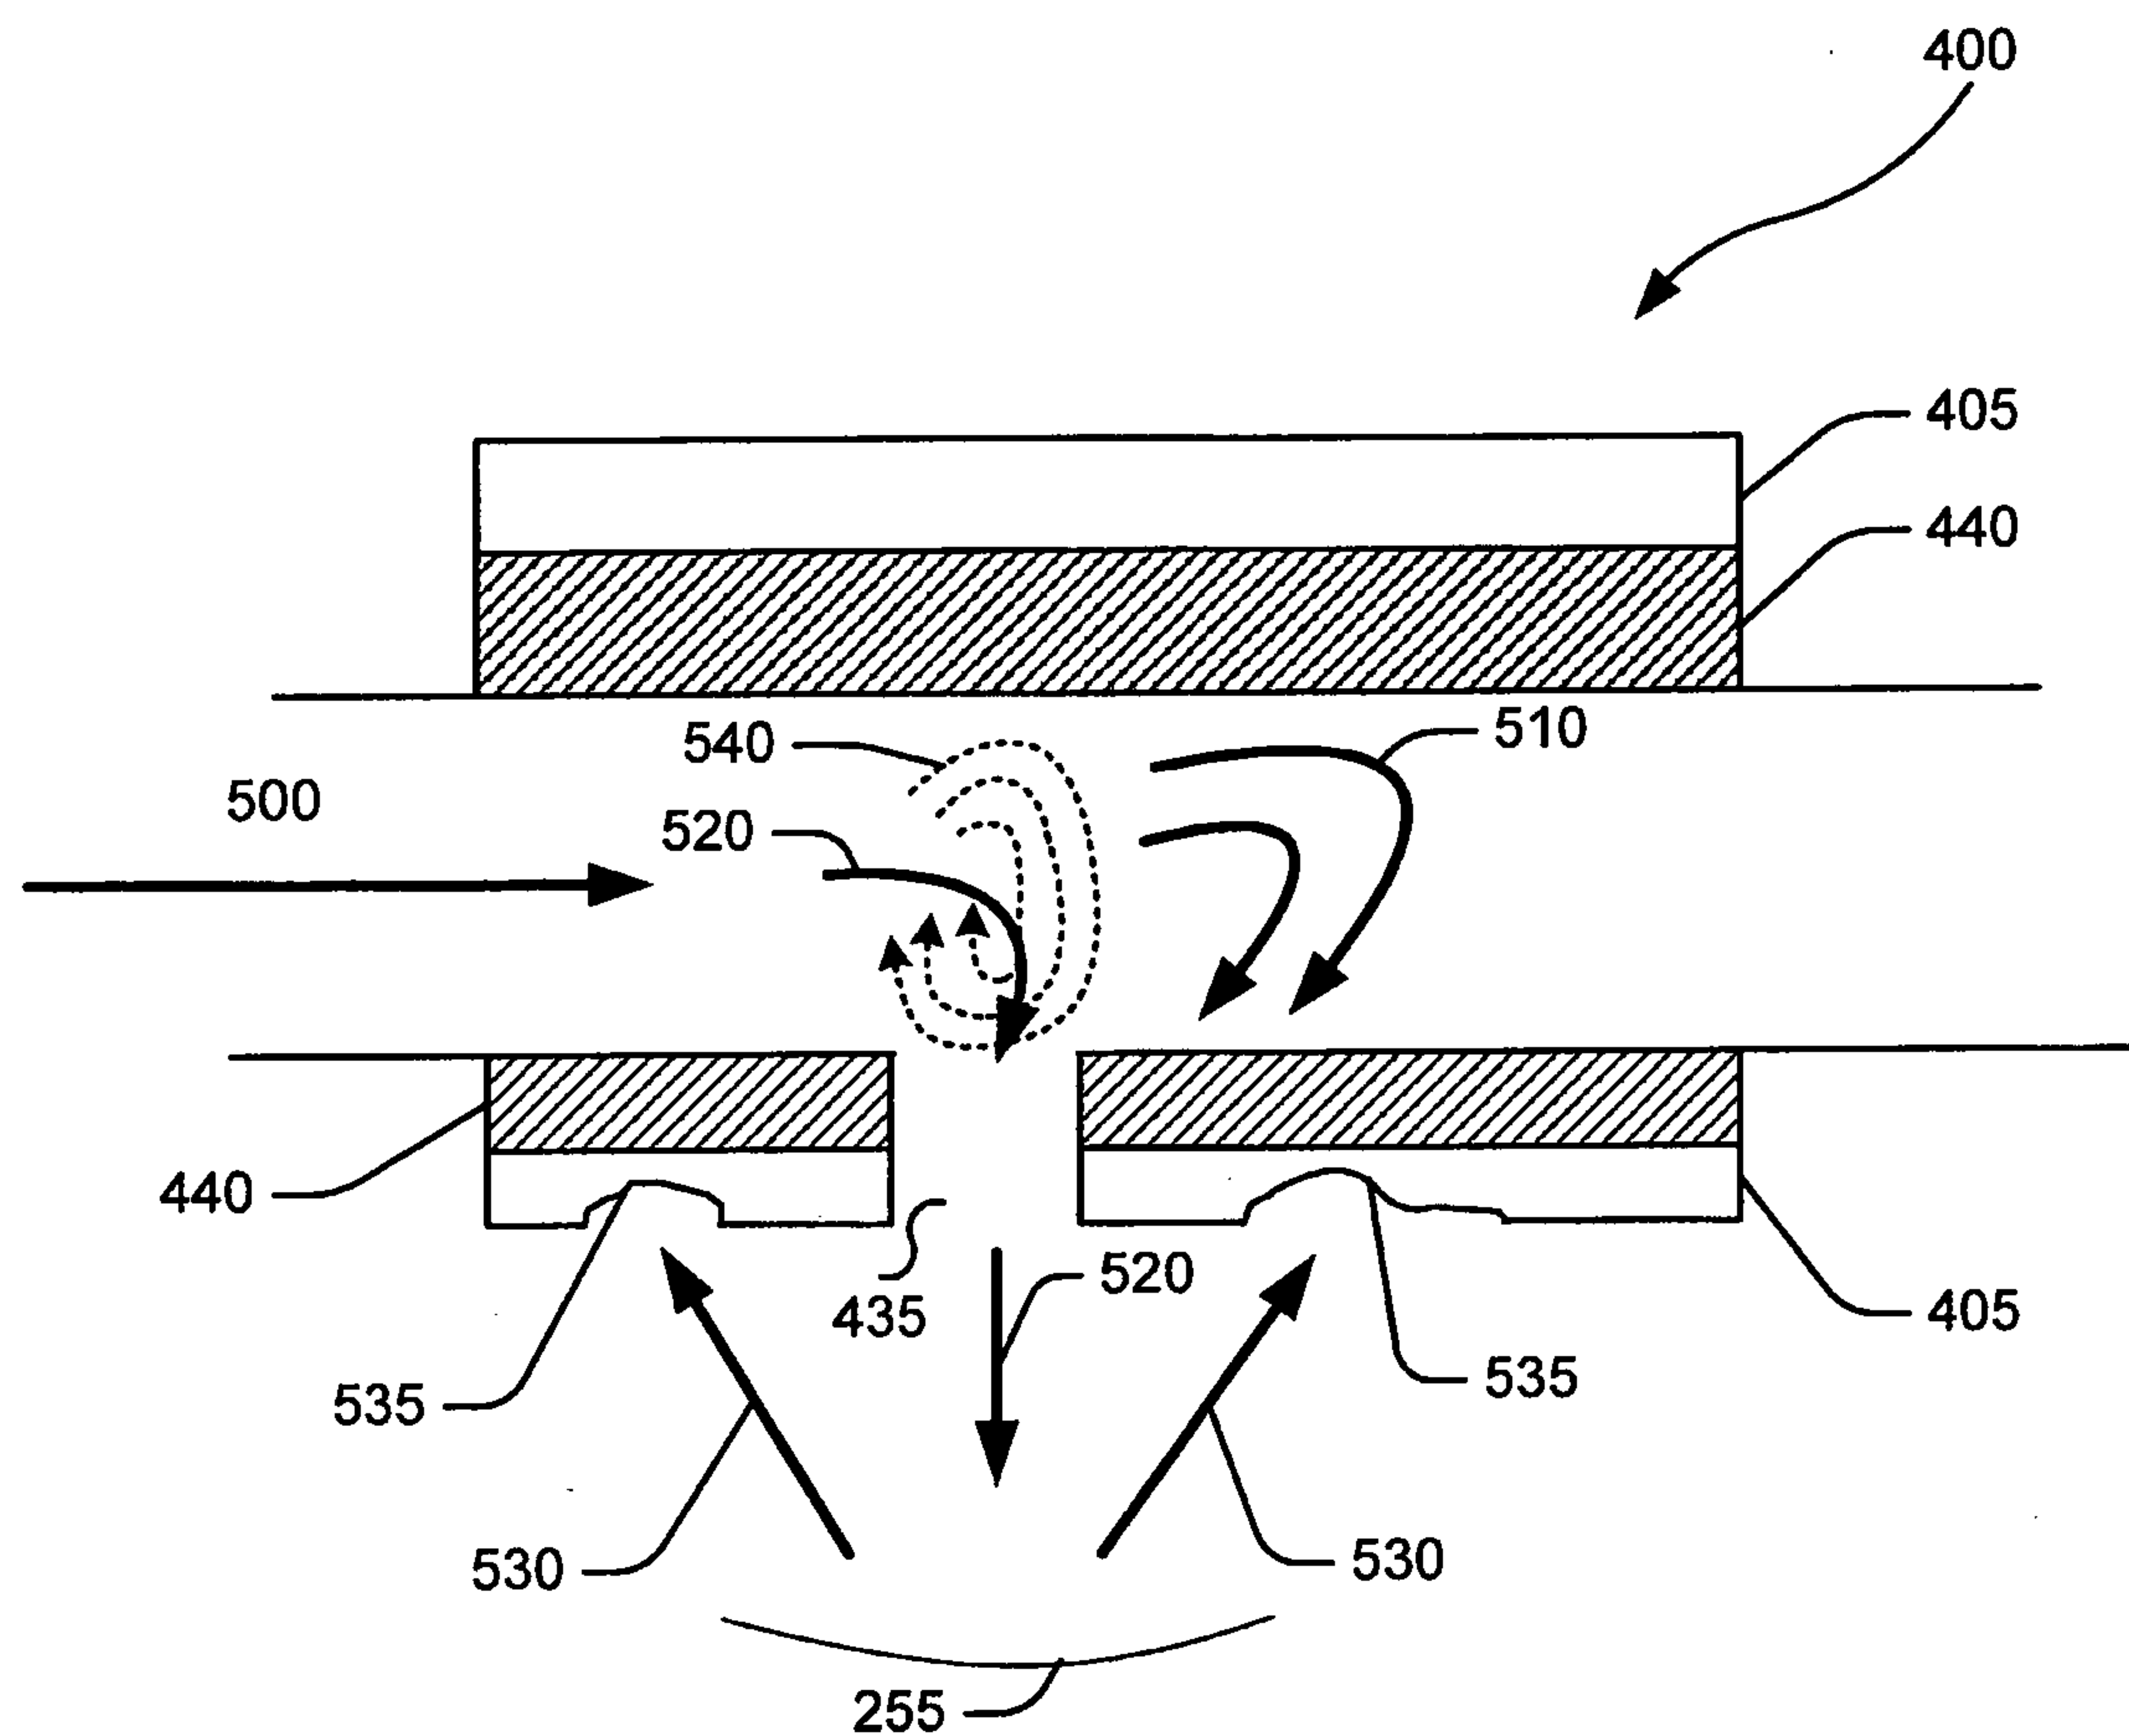


FIG. 5

