





(72) GOHRES, HANS-WERNER, DE
(72) DIVJAK, FRANZ-JOSEF, DE
(72) KRISTINAT, DETLEF, DE
(71) MANNESMANN AKTIENGESELLSCHAFT, DE
(51) Int.Cl.⁶ B22D 41/00, C21C 5/46
(30) 1997/02/06 (19706056.0) DE
(54) **CUVE POUR LA METALLURGIE**
(54) **VESSEL FOR METALLURGICAL PURPOSES**

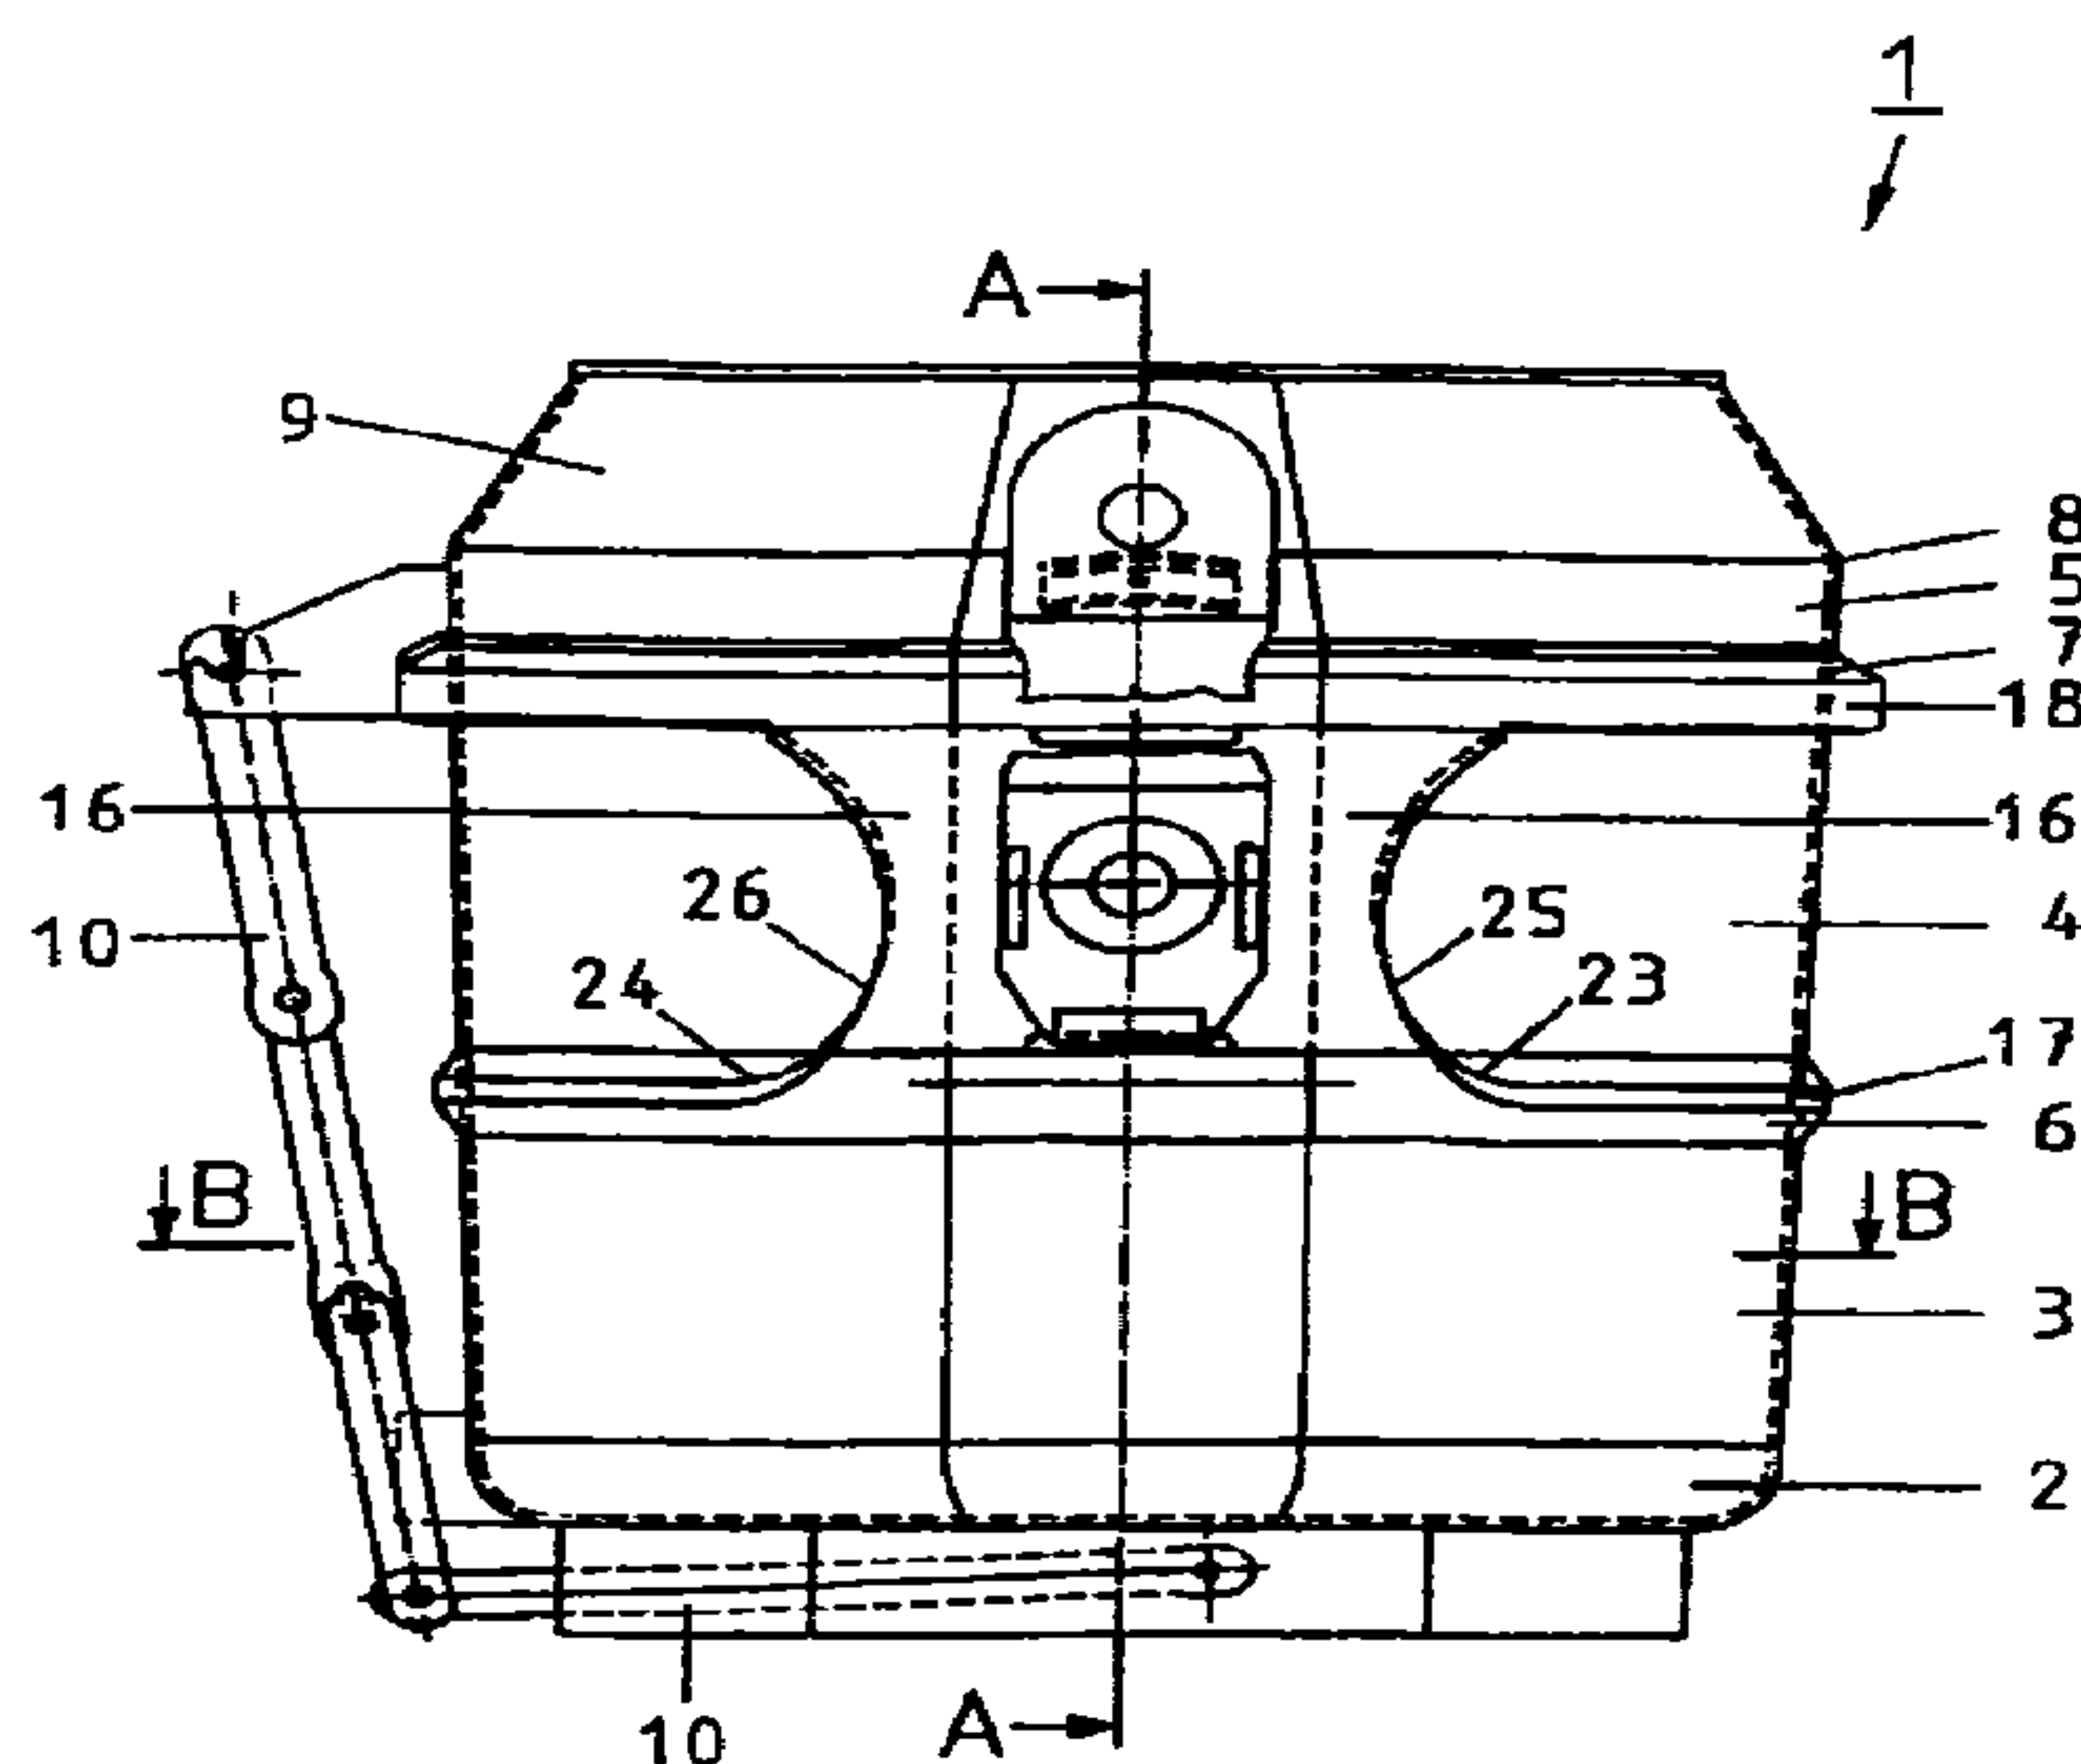

(57) L'invention concerne une cuve destinée à la métallurgie, pour le transport de métaux en fusion, pourvue d'une enveloppe dans laquelle se loge une garniture résistant à la chaleur, cette enveloppe étant constituée de tronçons tubulaires individuels assemblés et comportant deux anneaux de rigidification intégrés dans ladite enveloppe, séparés axialement l'un de l'autre et s'étendant dans le sens circonférentiel. Sur le côté extérieur de ladite enveloppe, sont disposés deux tourillons de support opposés qui sont supportés chacun au moyen d'une plaque reliée aux anneaux de rigidification, une pièce rapportée de couverture étant

(57) The invention relates to a vessel for metallurgical purposes to transport molten metals, comprising a metal jacket consisting of individual tubular sections with a heat-resistant lining. Said jacket has two peripheral integrated axially-spaced reinforcing rings and two supporting journals which are placed opposite each other on the outside of said jacket, both journals being supported by a plate that is connected to the reinforcing rings. Optionally, a lid with a conical section is fastened to the rim of the vessel. The first reinforcing ring (6) that lies closest to the bottom (2) has a lug-shaped extension (17) directed upwards in the area of the plate which is

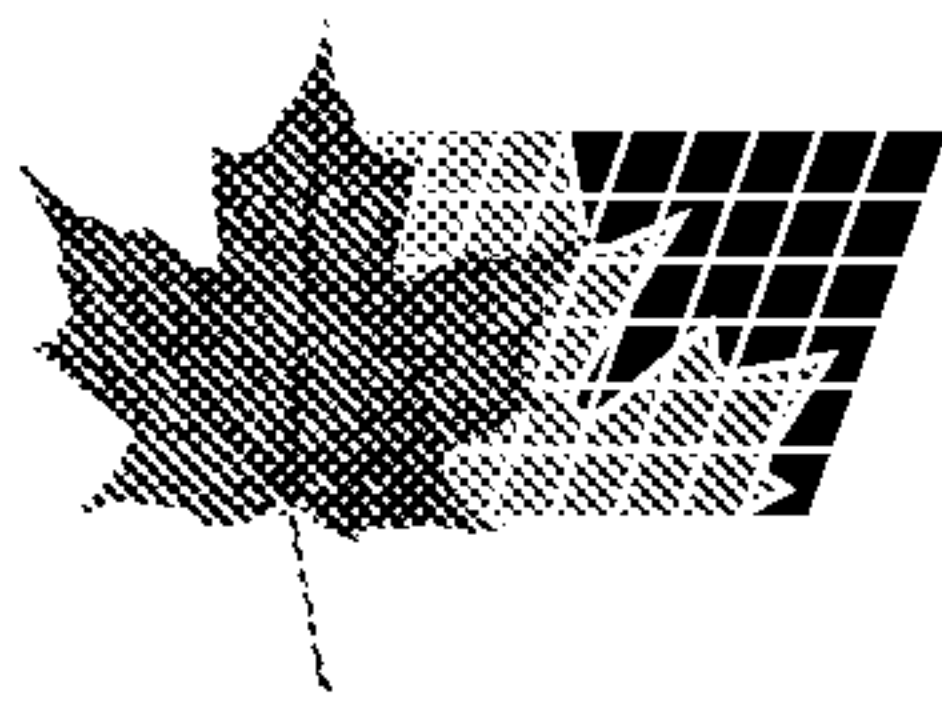

(21) (A1) **2,280,168**
(86) 1998/01/29
(87) 1998/08/13

éventuellement fixée au bord de la cuve et présentant une section du type cône. Le premier anneau de rigidification (6), qui est le plus proche du fond (2), présente, dans la zone de la plaque se présentant sous la forme d'un segment de blindage (16, 16'), un prolongement (17) dirigé vers le haut, en forme de tenon, et le second anneau de rigidification (7), qui est le plus éloigné du fond (2), présente, dans la zone du segment de blindage (16, 16'), un prolongement (18) dirigé vers le bas, en forme de tenon, le segment de blindage étant soudé entre les deux prolongements (17, 18). La zone de transition entre un prolongement (17, 18) et son anneau de rigidification (6, 7) est arrondie aussi bien vue en coupe longitudinale qu'en plan, et la transition entre les parties arrondies (23, 24) et les parties arrondies (25, 26) correspondantes du segment de blindage (16, 16') se fait sans coude.

configured as a shield segment (16, 16'). The second reinforcing ring (7) that lies furthest from the bottom (2) has a lug-shaped extension (18) directed downwards in the area of the shield segment (16, 16') and the shield segment is welded between the extensions (17, 18). The transition between each respective extension (17, 18) and the respective reinforcing ring (6, 7) is rounded off both in the longitudinal section and when seen from the top. Said round-offs (23, 24) fit into corresponding round-offs (25, 26) in the shield segment (16, 16') without buckling.



Abstract

The invention relates to a vessel for metallurgical purposes, for transporting molten metals, having a metal casing which accommodates a refractory lining, is composed of individual tubular lengths, has two reinforcement rings which run in the circumferential direction and are integrated in the metal casing at an axial distance from one another, and on which two bearing lugs are arranged opposite one another on the outside and are supported by means of in each case one plate which is connected to the reinforcement rings, and if appropriate a lid attachment is fastened to the vessel edge, which lid attachment is frustoconical in cross section. In this case, the first reinforcement ring (6), which lies closer to the base (2), having an upwardly directed extension (17), which is designed in the form of a projection, in the area of the plate, which is designed as a shield segment (16, 16'), and the second reinforcement ring (7), which lies further away from the base (2), has a downwardly directed extension (18), which is designed in the form of a projection, in the area of the shield segment (16, 16'), and the shield segment is welded in between the extensions (17, 18), the transition from the respective extension (17, 18) into the respective reinforcement ring (6, 7) being rounded both in longitudinal section and in plan view, and the latter rounded sections (23, 24) merging smoothly into corresponding rounded sections (25, 26) of the shield segment (16, 16').

Figure 1

-2-

Key to figures:

Schnitt → Section

FILE, ~~PIN~~ IN THIS AMENDED-
TEXT TRANSLATION

Vessel for metallurgical purposes

Description

The invention relates to a vessel for metallurgical purposes, for transporting molten metals, in accordance with the preamble of patent claim 1.

Vessels of this nature are used not only to transport molten metals, such as for example pig iron, from the blast furnace to the pig iron mixer or from the pig iron mixer to the converter, but may also be a metallurgical treatment vessel. In particular, as the demands imposed on the level of purity increase and the levels of dissolved gases are reduced, vacuum treatment has become increasingly important. In this method, the thermal load on the treatment vessel is particularly high, since the process involves a high overheating temperature.

To solve this problem, a metal for metallurgical purposes has been proposed (DE 195 38 530 C1) in which, in contrast to the conventional design, the reinforcement rings are not welded onto the outside of the circumferential surface, but rather are integrated in the metal casing. Furthermore, the plate which supports the vessel bearing lugs is at a short distance from the metal casing, and the upper and lower peripheral areas, which are of rim-like design, of the plate are connected to the adjoining reinforcement rings, the vessel bearing lug which is attached to the plate only

-2-

extending outward. With regard to the thickness of the reinforcement rings, the thickness of the reinforcement ring which is closer to the base is greater by a factor of up to 4, and the thickness of the second reinforcement ring, which lies further away from the base, is greater by a factor of up to 6, than the thickness of the adjoining metal casing, the axial extent of the first reinforcement ring being greater than or equal to that of the second. If the vessel is being used as a steel-casting ladle, the vessel edge is connected to a lid attachment, which is preferably frustoconical in cross section. The arrangement of a further reinforcement ring at the edge of the vessel is provided for in order to reinforce this area.

This known vessel, when subjected to combined load and heat stress, is stressed uniformly and is able to withstand being heated to a temperature of up to 400°C. A drawback of this design is that the weld joints between the reinforcement rings and the plate are exposed to high levels of load and the transition from the reinforcement ring to the plate is unfavorable in terms of its lines of force.

Starting from the known vessel, the object of the invention is to improve the design in such a way that the above-mentioned drawbacks are avoided and production of the vessel is simplified.

-3-

This object is achieved by means of the features specified in the defining part of patent claim 1. Advantageous refinements form the subject matter of subclaims.

The essential novel modification to the design which is known per se relates to the design of the reinforcement rings in the area of the plate, which is designed as a shield segment. Both reinforcement rings have an extension in the form of a projection, one extension being directed upward and the other being directed downward. The shield segment is welded in between the two extensions. In this way, the connecting weld seams are placed in a zone which is subject to lower loads, so that the fatigue strength of this area is increased. Secondly, the transition from the reinforcement ring to the shield segment is highly rounded, this rounding continuing in the shield segment. This type of design improves the lines of force so that a virtually isotensoid design is produced. The particular shape and position of the two reinforcement rings, in conjunction with the shield segment, makes it possible to dispense with the reinforcement ring arranged on the vessel edge which is otherwise customary. Even in the case of vessels without an annular cover, the vessel is strong enough in the upper peripheral area for the arrangement of a boundary angle plate to be sufficient.

-4-

A further feature relates to the nature of the connection between the vessel bearing lug and the shield segment. In contrast to the known prior art, the bearing lug is not welded onto a plate, but rather is welded into a hole in the shield segment. In order also to relieve the load on these weld seams, the weld-in area of the vessel bearing lug is designed as a flange of larger diameter. To improve the quality of the weld seam, the periphery of the flange is of roof-like design, so that it can firstly be welded in from one side, then the root is turned out, and finally the mating bearing is welded on from the other side.

It has also proven advantageous if the reinforcement rings are composed of segments. This applies in particular to vessels which are oval in cross section. The individual segments of the reinforcement rings then have different radii, thus simplifying production of the reinforcement rings, in particular, in this way, making it possible to produce the area with the extension in the form of a projection separately. To achieve an optimum filling volume for the vessel, it is advantageous for the individual tube lengths to be of cylindrical design, as seen in longitudinal section.

The advantage of the vessel according to the invention lies in the fact that, firstly, there is no impermissible deformation even when it is heated to high

-5-

temperatures, and the stress in the material of the vessel is distributed uniformly. A consequence of this is that the geometry of the vessel does not change even under high weight and temperature loads. This can be seen in particular from the fact that the bearing lugs remain horizontal. Furthermore, production is simplified, since it is possible to dispense with the reinforcement ring arranged on the vessel edge which is otherwise customary.

The vessel for metallurgical purposes which is designed according to the invention is explained in more detail with reference to an exemplary embodiment illustrated in the drawing, in which:

Figure 1 shows a view of a vessel which is designed according to the invention

Figure 2 shows a section on line B-B in Figure 1

Figure 3 shows a section on line A-A in Figure 1

Figure 4 shows the design of the bearing lug, including its joint with the shield segment, on an enlarged scale

Figure 5 shows the bearing lug on an enlarged scale.

Figure 1 shows a view of a metallurgical vessel which is designed according to the invention and in this case is used, for example, as a steel-casting ladle 1. The steel-casting ladle 1 comprises a metal casing and a ladle base 2. In this exemplary embodiment, the metal casing is divided into three tube lengths 3-5 of different widths. Depending on

-6-

the ladle height and design, the number of tube lengths may be smaller or greater. Two reinforcement rings 6, 7 are integrated in the metal casing between the tube lengths 3-5. In this exemplary embodiment, the upper edge 8 of the vessel is connected to a lid attachment, which is designed as an annular cover 9. Preferably, this annular cover 9 is frustoconical in cross section. A tiltable linkage 10 is arranged on the outside, in this case on the left, in order to be able to tilt the steel-casting ladle 1 by means of a crane (not shown here).

Figure 2 shows a section in direction B-B in Figure 1, illustrating the particular cross section of the steel-casting ladle 1 illustrated here. The cross section is elliptical, that area of the middle tube length 4 which lies behind the respective shield segment 16, 16' having a very large radius R for static reasons. For such a configuration, it is advantageous for the reinforcement rings 6, 7 to be composed of segments, the individual segments having different radii r, R. Figure 3 shows a section in direction A-A in Fig. 1, illustrating the same steel-casting ladle 1 shown in Figure 1. This representation provides a better illustration of the individual components of the steel-casting ladle 1. This includes the particular design of the reinforcement rings 6, 7 and the way in which the respective bearing lug 11, 11' is welded into the respective shield

- 7 -

segment 16, 16'. The feet are denoted by 13, 13'.

That part of the steel-casting ladle 1 which is designed according to the invention is illustrated on an enlarged scale in Figure 4. The one essential aspect relates to the extension 17, 18, in the form of a projection, of the respective reinforcement ring 6, 7, which extensions extend upward, in the case of the reinforcement ring 6 which lies closer to the ladle base 2, and downward in the case of the reinforcement ring 7 which lies further away from the ladle base 2. The transition from the respective extension 17, 18 into the actual reinforcement ring 6, 7, which transition can be seen in longitudinal section, is provided with a corresponding radius 19, 20. This type of design of the reinforcement rings 6, 7 in the area of the respective shield segment 16, 16' has allowed the connecting weld seams 21, 22 to be positioned in a zone which is subjected to lower loads. The second aspect relates to the rounded section 23, 24, which is horizontal in the view shown in Figure 1, of the respective extension 17, 18, which rounded section 23, 24 carries on continuously into a corresponding rounded section 25, 26 of the shield segment 16.

The third aspect relates to the way in which the respective bearing lug 11, 11' is welded into a hole 27 in the respective shield segment 16, 16'. Advantageously, for this purpose, that end area of the bearing lug 11' which

-8-

faces toward the steel-casting ladle 1 is designed as a flange 28 of larger diameter. In order to achieve a high quality of weld seam, the periphery 29 of the flange 28 has a roof-like contour. As a result, it is possible firstly to provide one side with a weld seam, then to turn out the root of this first weld seam and then to weld on the mating bearing from the other side. In order to minimize the contact friction between bearing lug 11' and strap 12', the bearing lug 11' is provided with a bearing shell 30. A strip plate 31, which is fixed in place by means of a holding plate 32 attached to the end side of the bearing lug 11', forms the lateral support for the strap 12'. In this exemplary embodiment, the attachment is effected by means of screws 33.

In the production phase of the steel-casting ladle 1, the middle tube length 4 of the metal casing is provided with a small hole 34 (Fig. 4) which is aligned with a larger longitudinal hole 35 arranged in the respective bearing lug 11, 11'. A measuring device can be inserted into this longitudinal hole 35 in order to check that the two opposite bearing lugs 11, 11' are correctly aligned. After the measurement, the hole 34 in the metal casing is closed again.

-9-

Patent claims

1. A vessel for metallurgical purposes, for transporting molten metals, having a metal casing which accommodates a refractory lining, is composed of individual tubular lengths, has two reinforcement rings which run in the circumferential direction and are integrated in the metal casing at an axial distance from one another, and on which two bearings lugs are arranged opposite one another on the outside and are supported by means of in each case one plate which is connected to the reinforcement rings, the plate being at a short distance from the metal casing and the thickness of the reinforcement ring which lies closer to the base being greater by up to a factor of 4, and the thickness of the second reinforcement ring which lies further away from the base being greater by a factor of 6 than the thickness of the adjoining metal casing, and the axial extent of the first reinforcement ring being greater than or equal to that of the second reinforcement ring, and if appropriate a lid attachment being fastened to the vessel edge, which lid attachment is frustoconical in cross section, wherein the first reinforcement ring (6), which lies closer to the base (2), having an upwardly directed extension (17), which is designed in the form of a projection, in the area of the plate, which is designed as a shield segment (16, 16'), and

-10-

the second reinforcement ring (7), which lies further away from the base (2), has a downwardly directed extension (18), which is designed in the form of a projection, in the area of the shield segment (16, 16'), and the shield segment is welded in between the extensions (17, 18), the transition from the respective extension (17, 18) into the respective reinforcement ring (6, 7) being rounded both in longitudinal section and in plan view, and the latter rounded sections (23, 24) merging smoothly into corresponding rounded sections (25, 26) of the shield segment (16, 16').

2. The vessel as claimed in claim 1, wherein the bearing lug (11, 11') is welded into a hole (27) in the shield segment (16, 16').

3. The vessel as claimed in claim 2, wherein that end region of the bearing lug (11, 11') which faces toward the shield segment (16, 16') is designed with a flange (28) which has a larger diameter.

4. The vessel as claimed in claim 3, wherein the peripheral area (29) of the flange (28) is of roof-like design, as seen in cross section.

5. The vessel as claimed in claim 1, wherein the reinforcement rings (6, 7) are composed of individual segments.

6. The vessel as claimed in claim 5, wherein the individual segments have different radii r , R .

-11-

7. The vessel as claimed in one of claims 1 to 6, wherein the tube lengths (3, 4, 5) are cylindrical in longitudinal section.

8. The vessel as claimed in one of claims 1 to 7, wherein a boundary angle plate is welded onto the free end of the upper tube length (5).

Fetherstonhaugh & Co.
Ottawa, Canada
Patent Agents

1/5

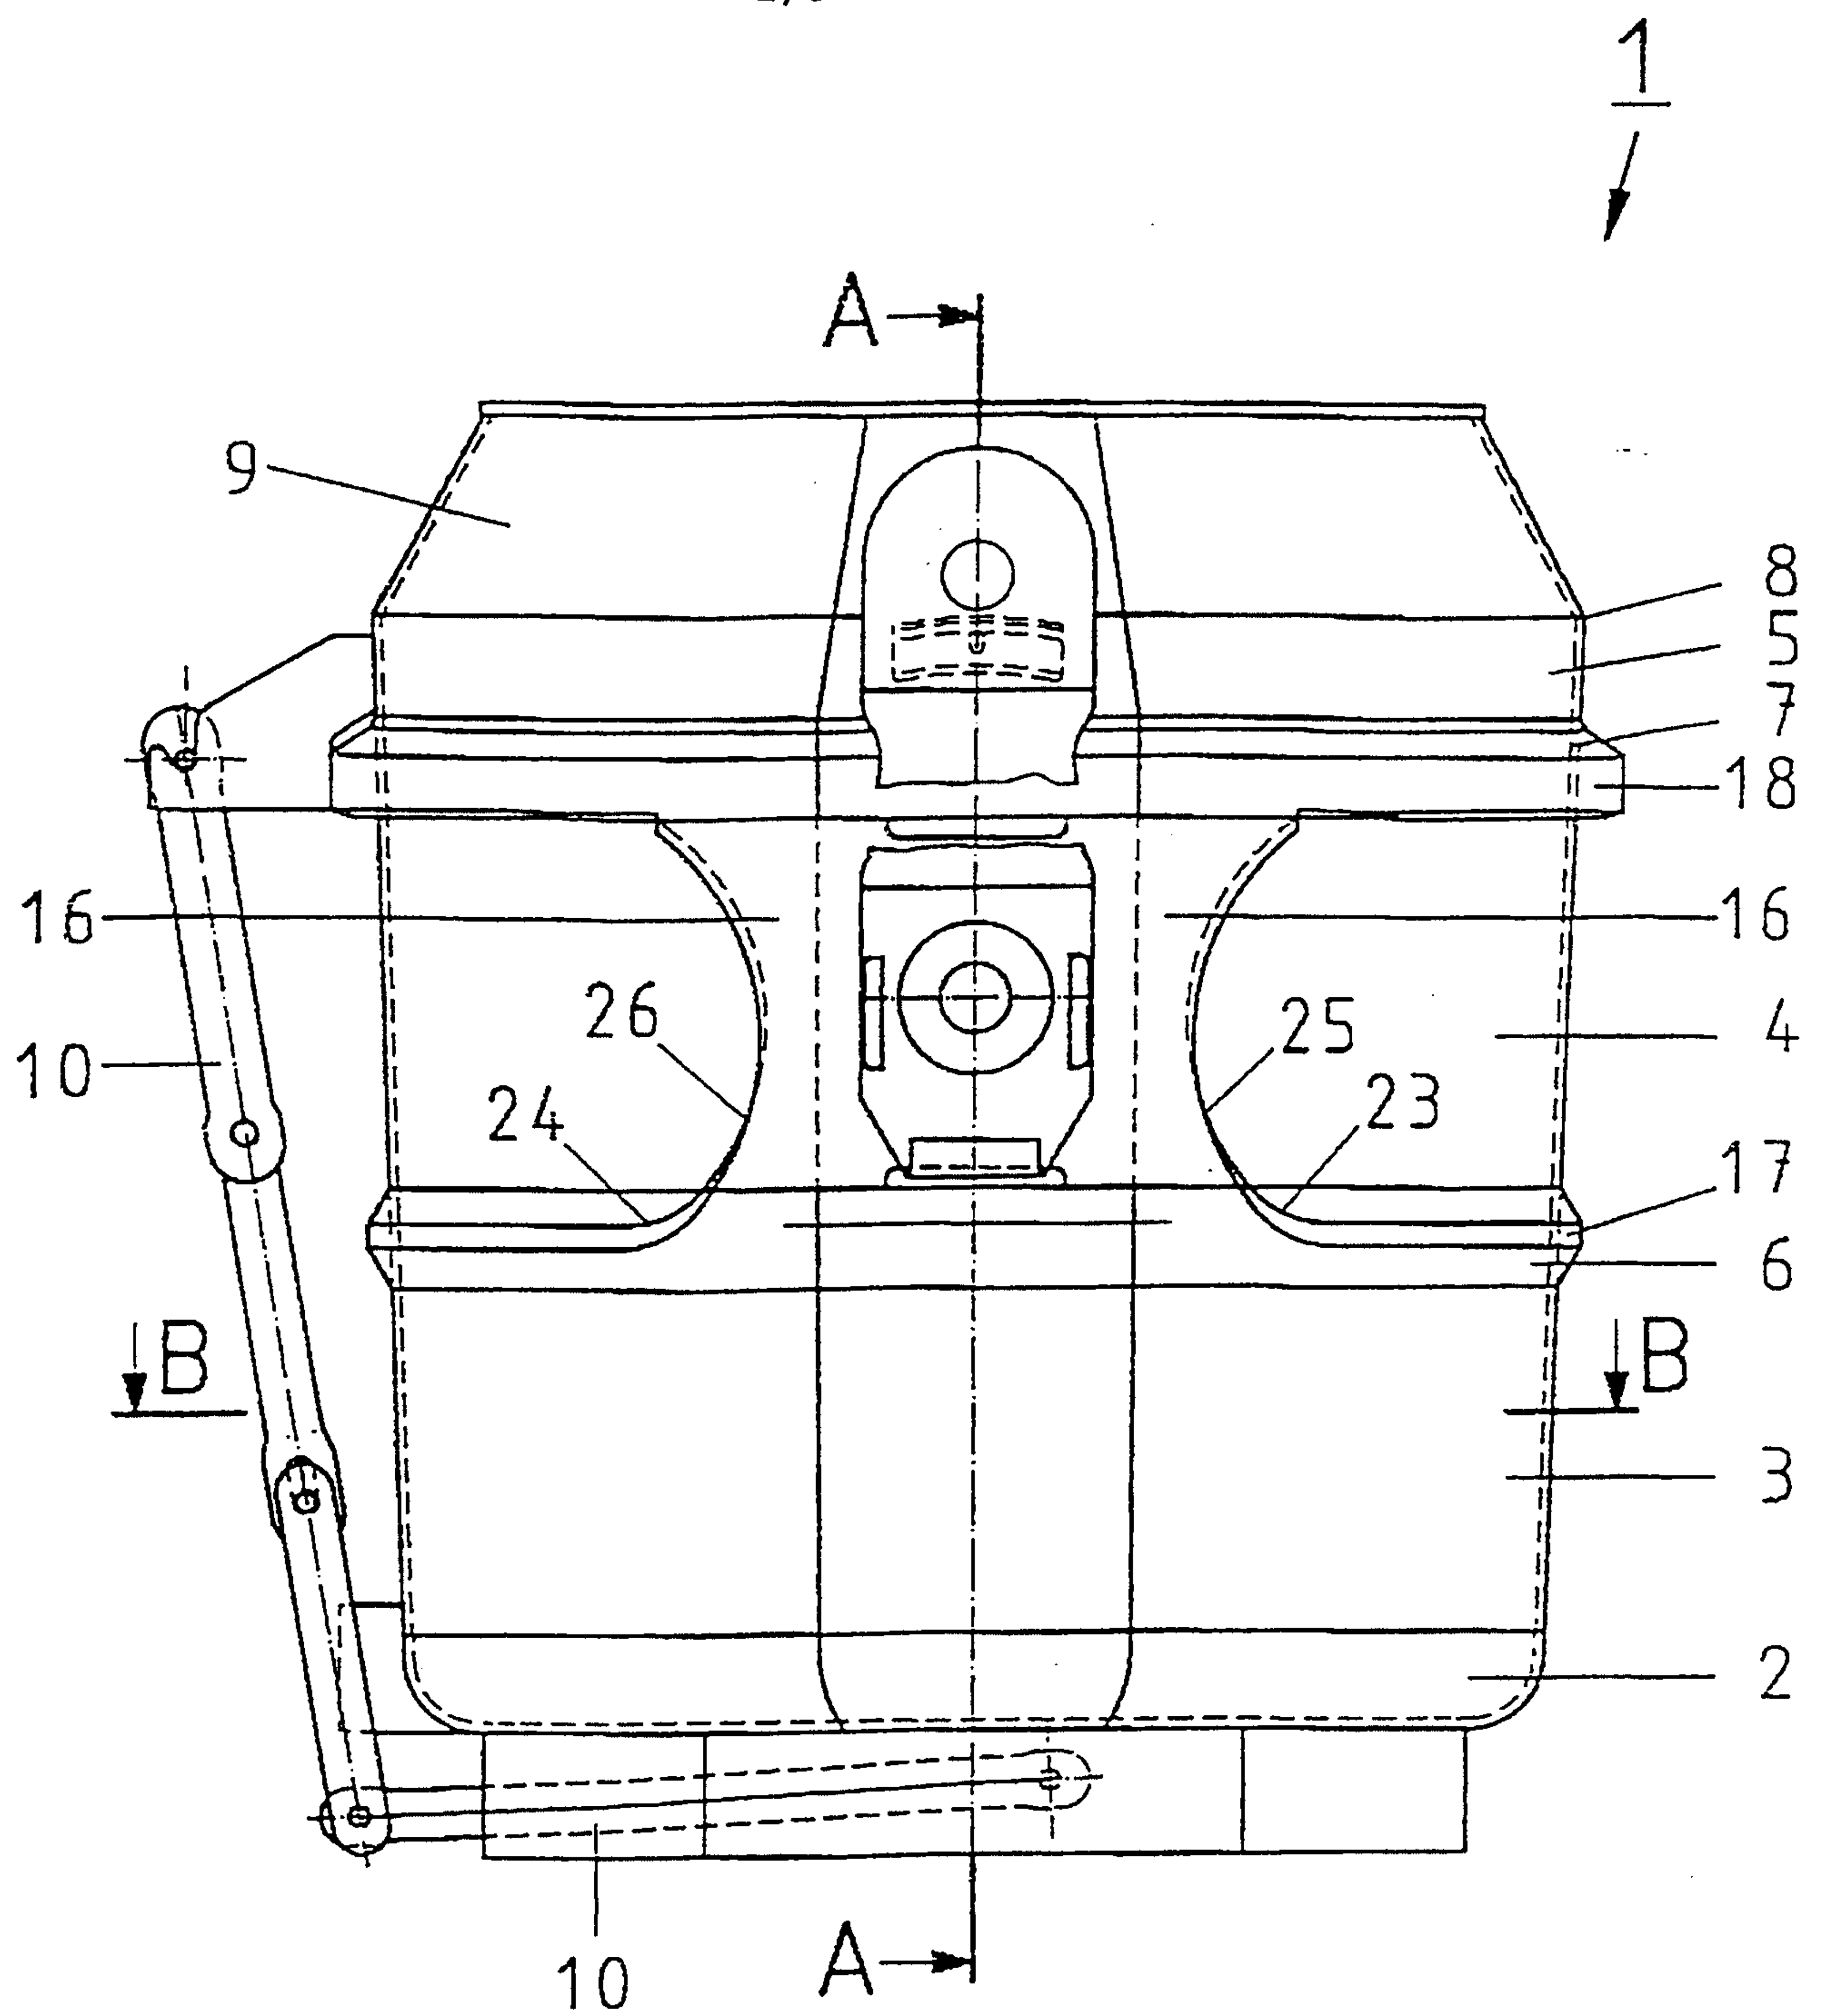


Fig. 1

Schnitt B-B

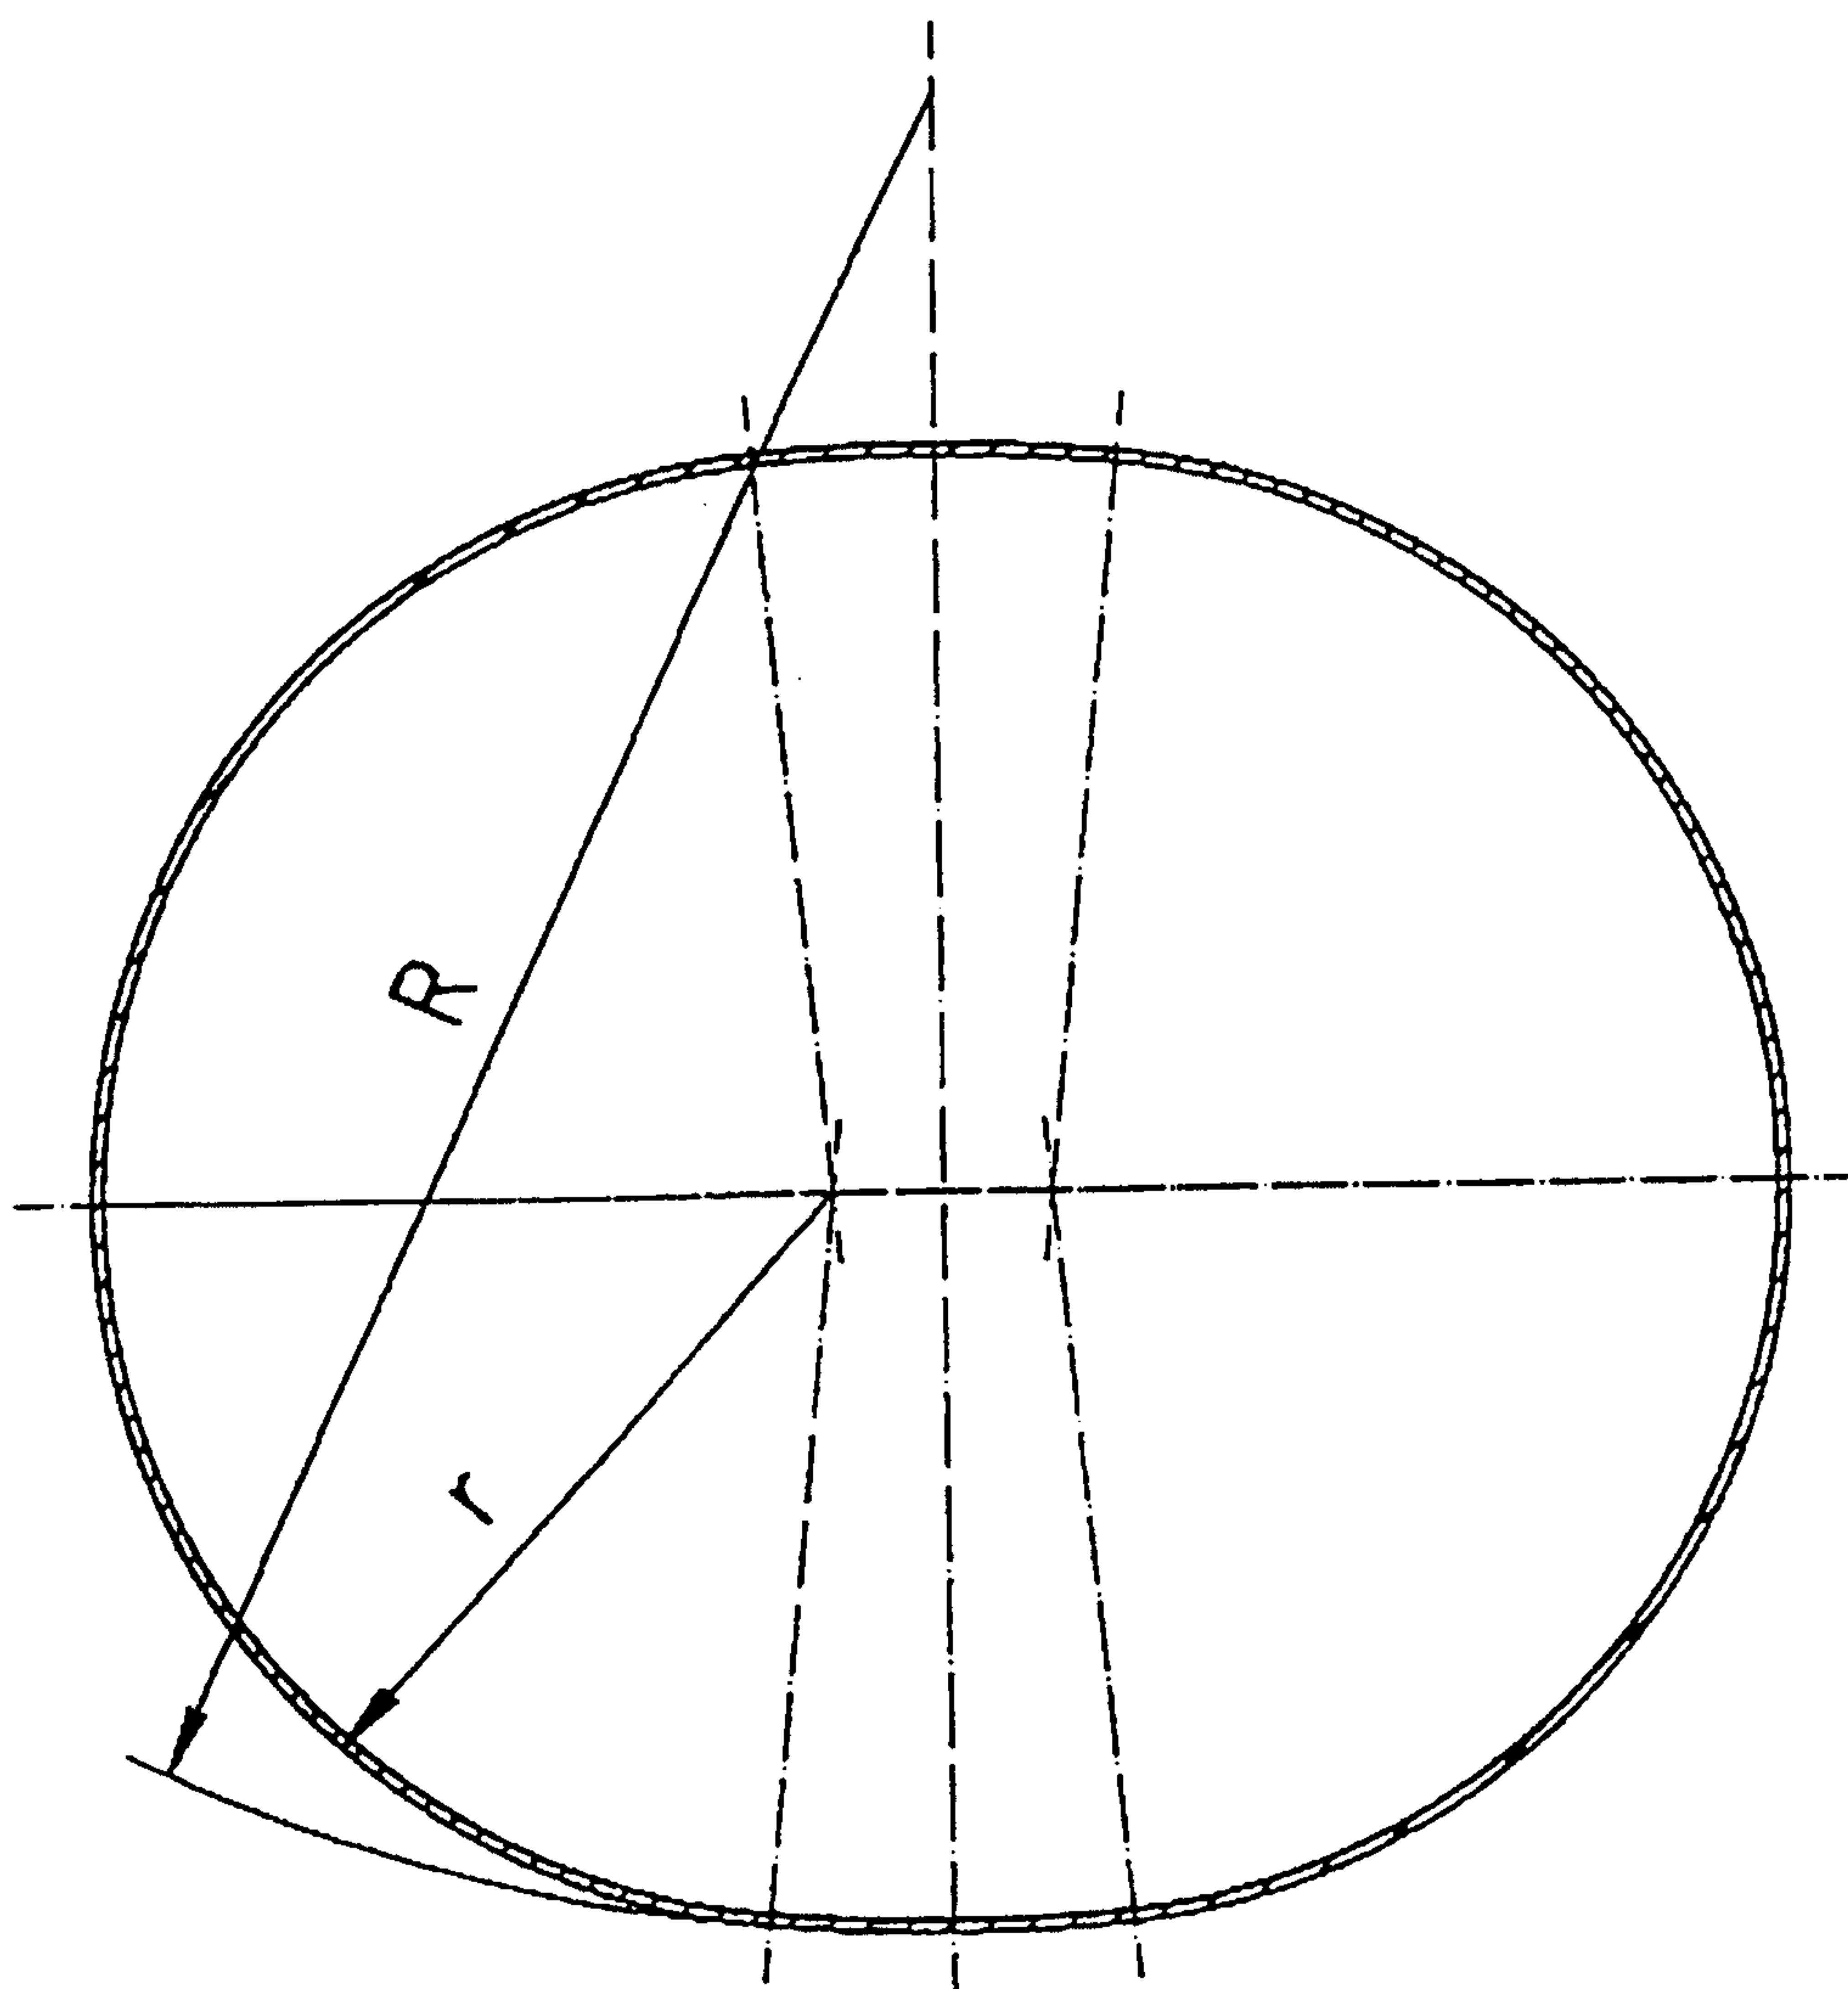


Fig. 2

3/5

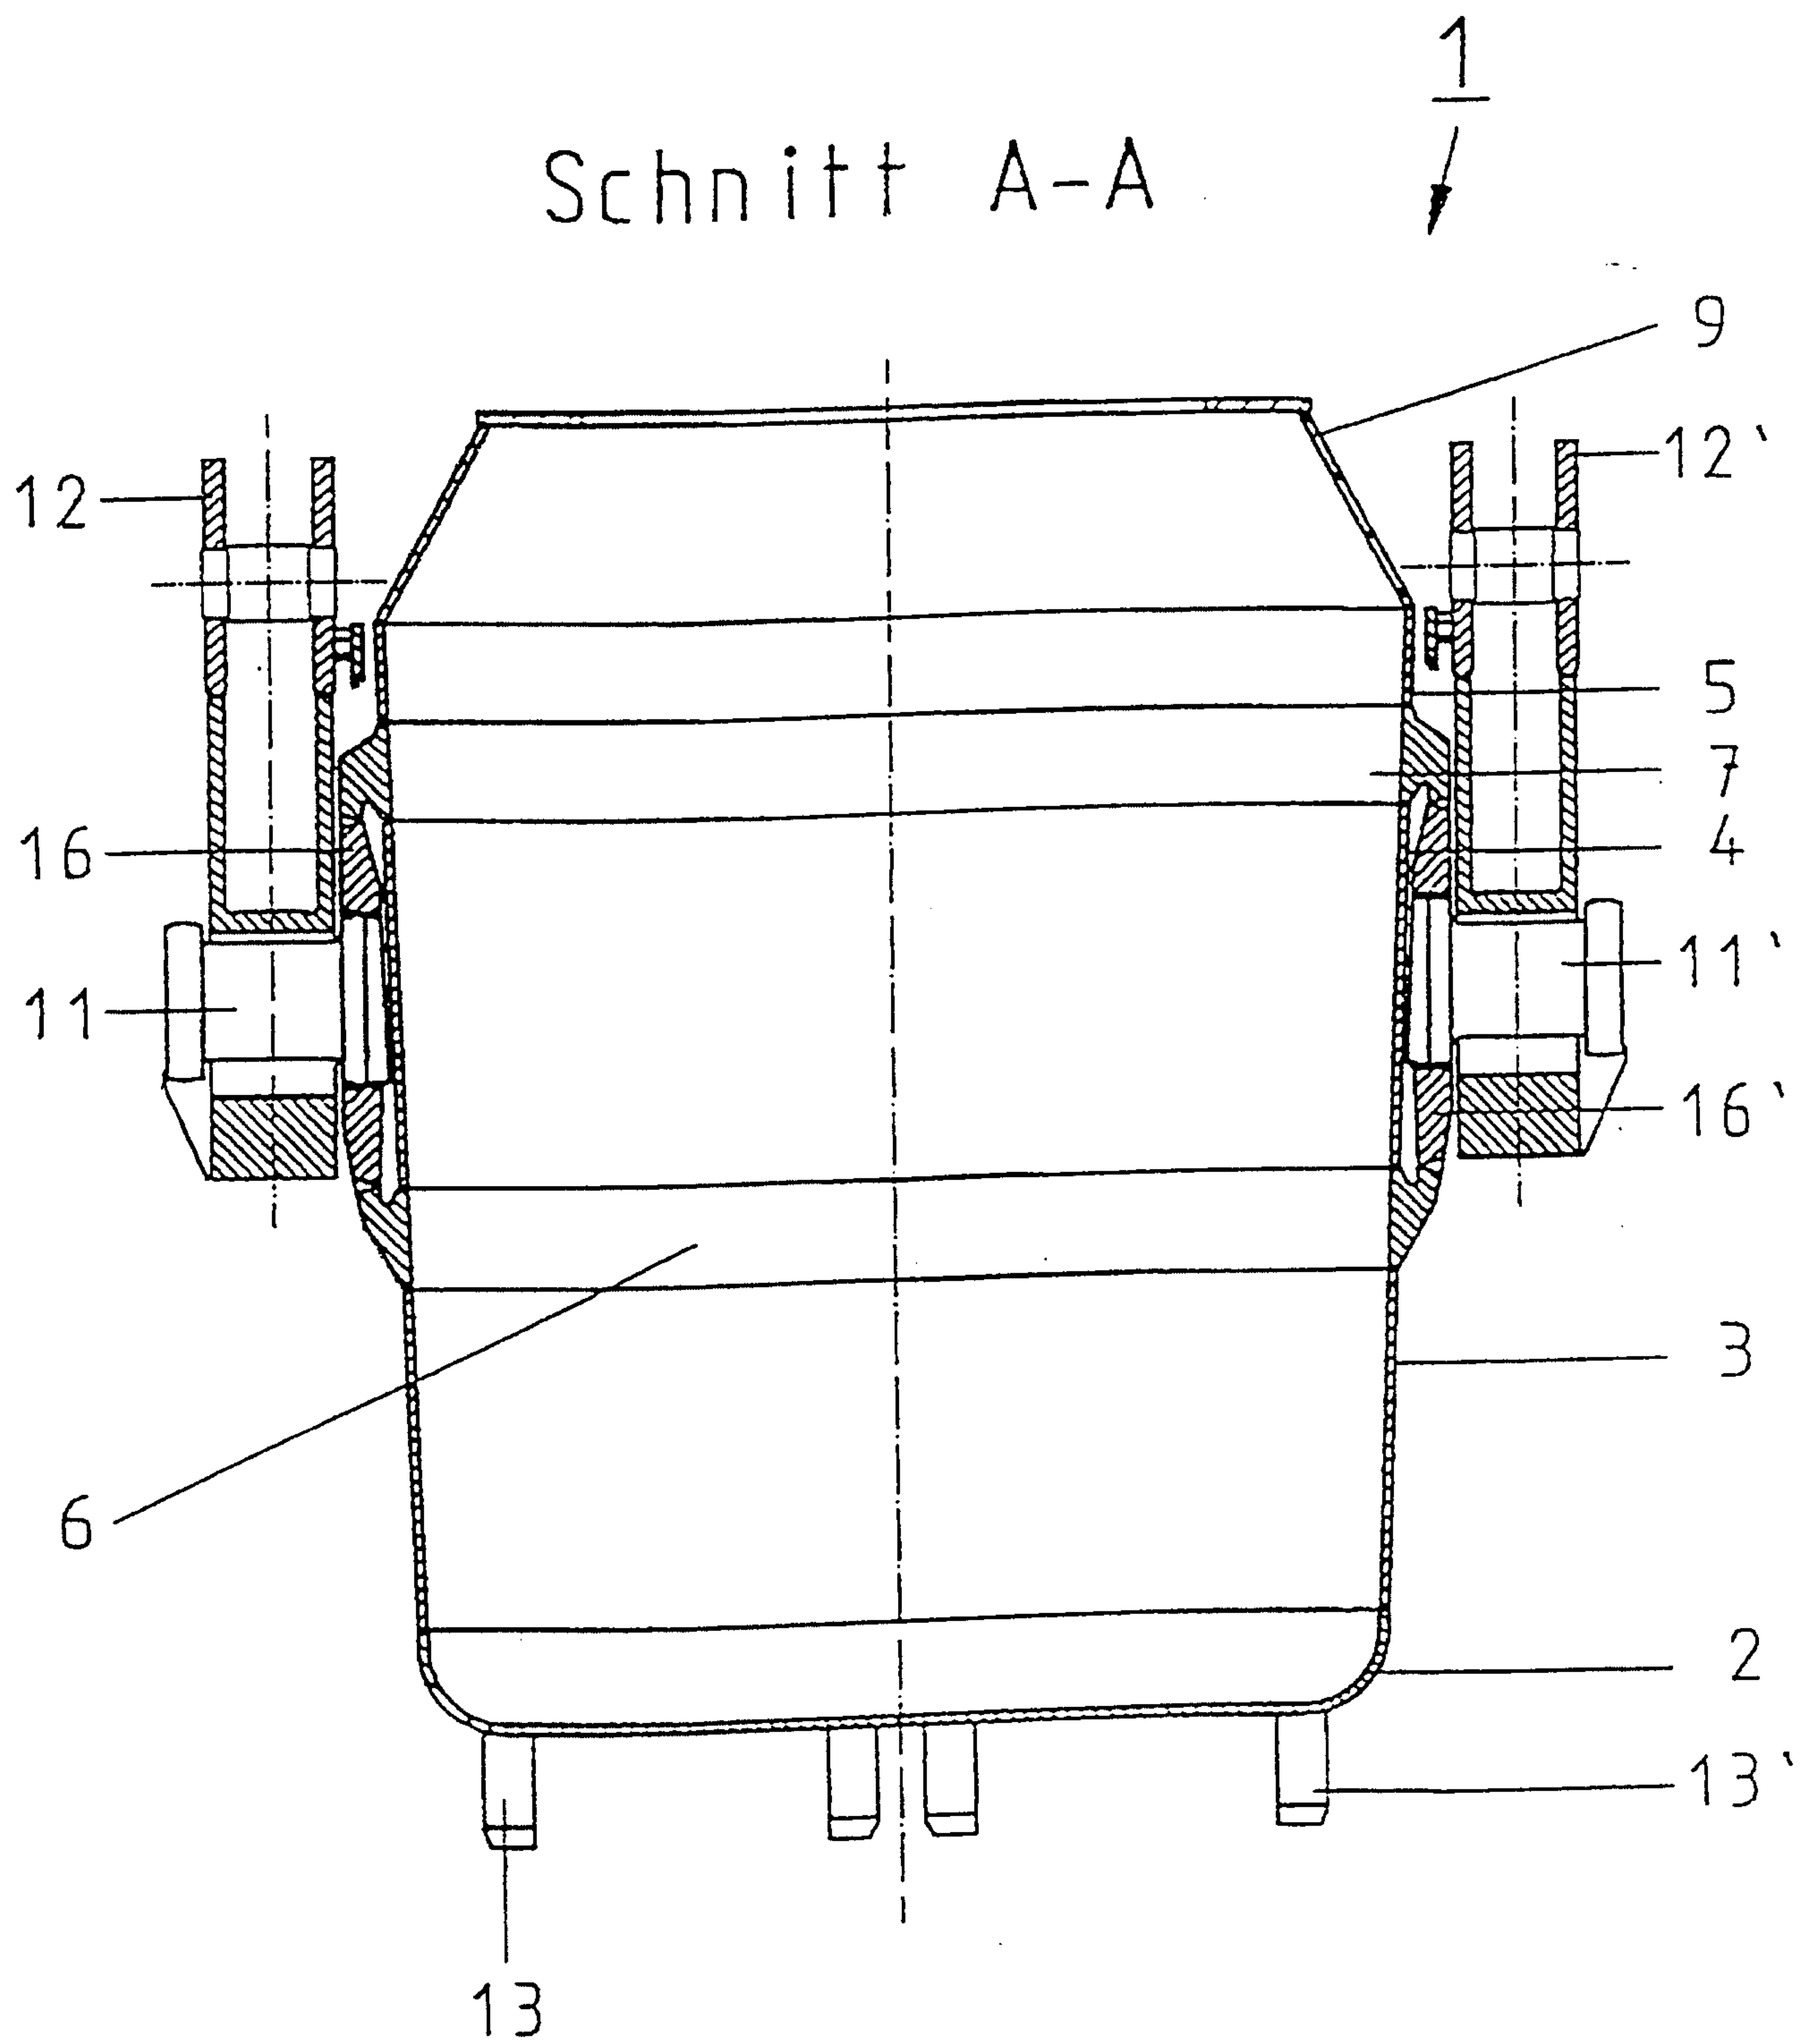


Fig. 3

4 / 5

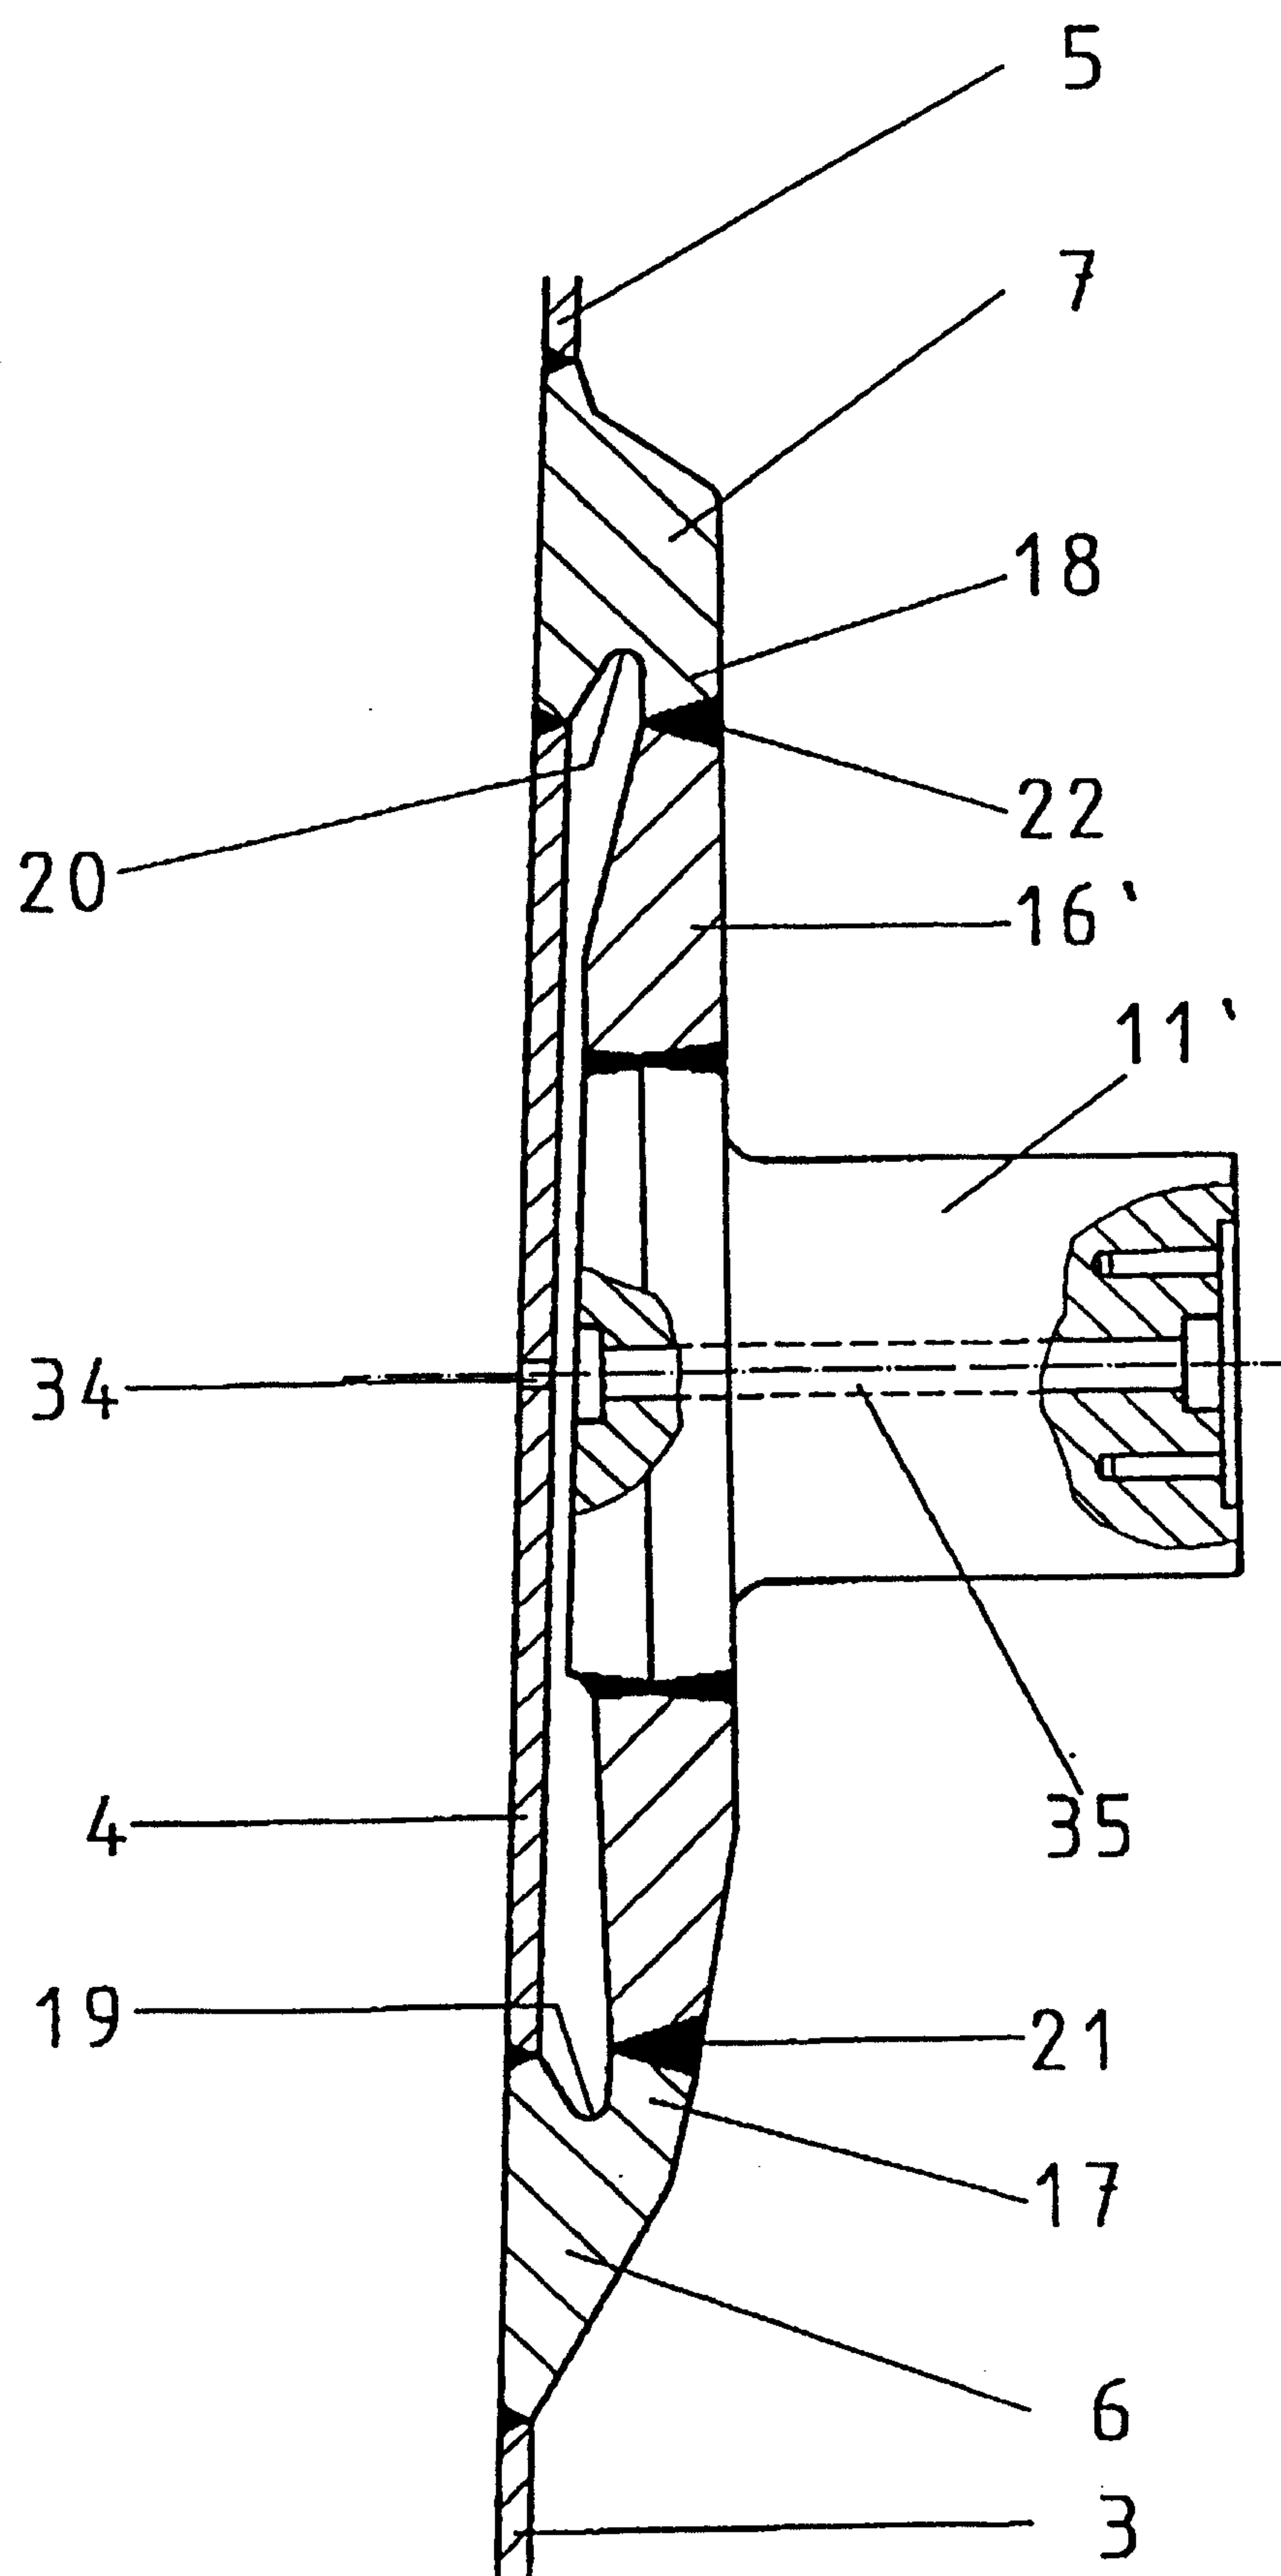


Fig. 4

5 / 5

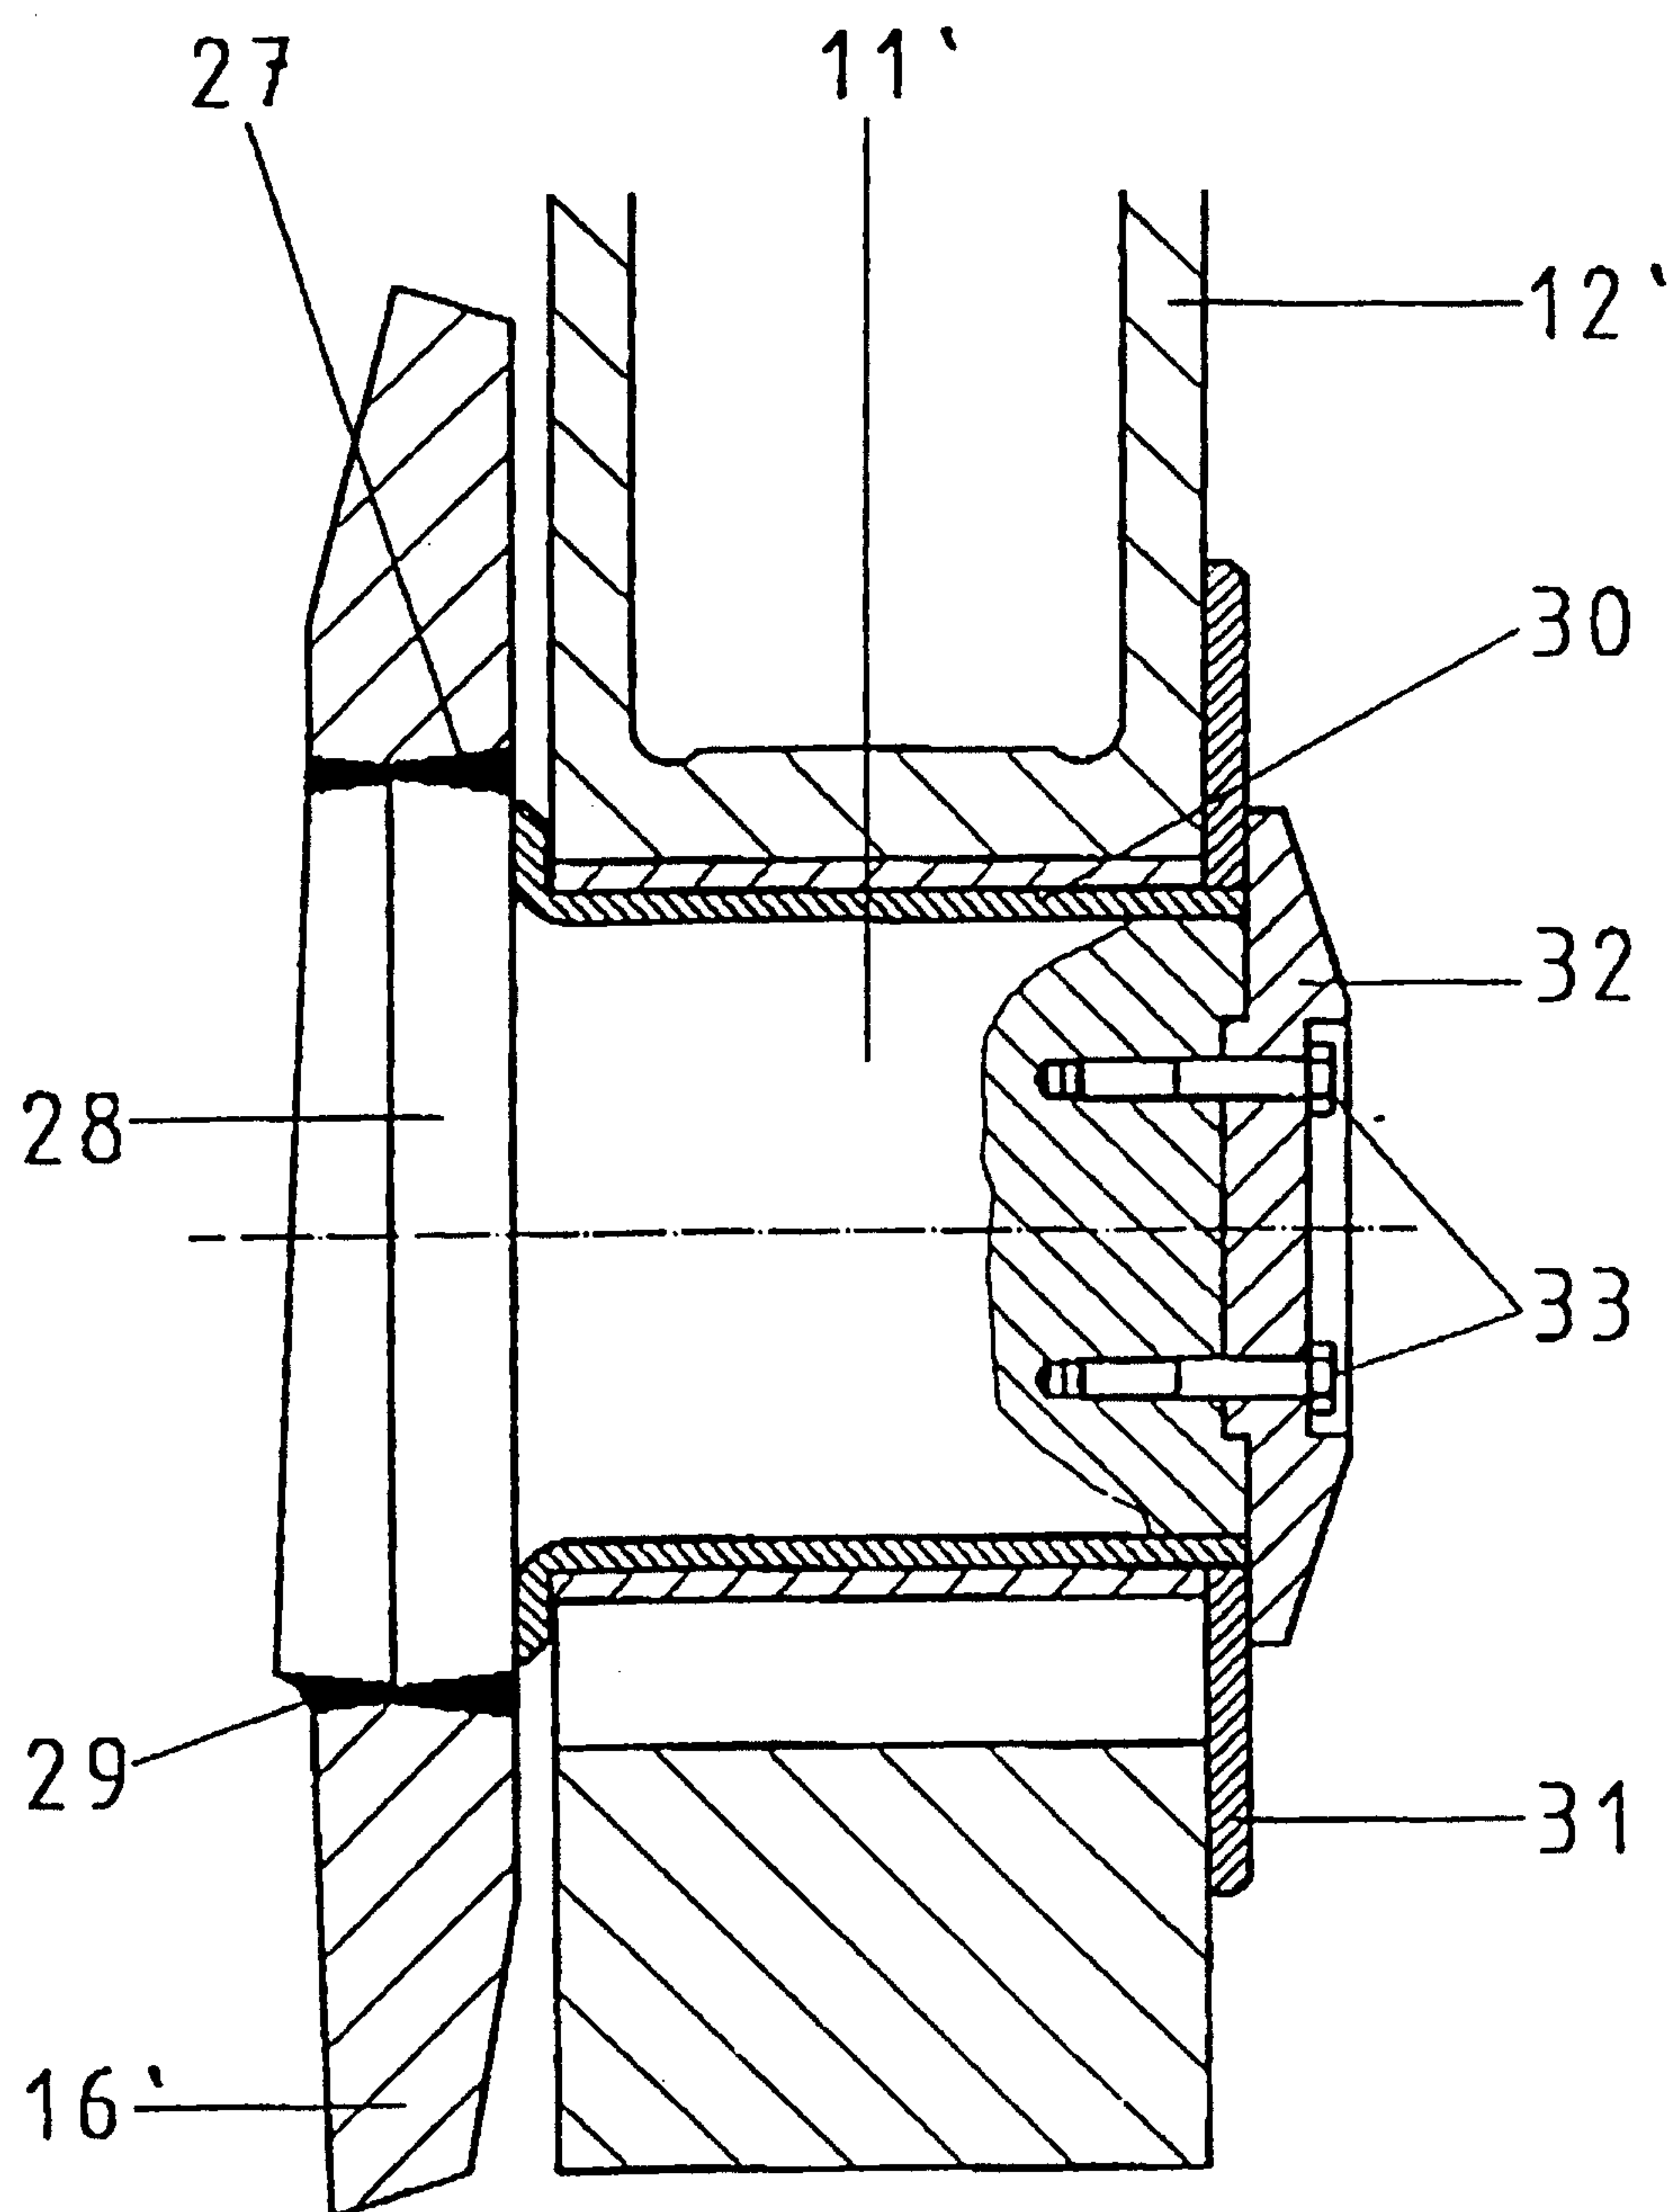


Fig. 5