

(19) World Intellectual Property Organization
International Bureau



PCT



(43) International Publication Date
13 November 2008 (13.11.2008)

(10) International Publication Number
WO 2008/134792 A1

(51) International Patent Classification:
B41J 2/05 (2006.01)

(74) Agent: **SILVERBROOK RESEARCH PTY LTD**; 393
Darling Street, Balmain, New South Wales 2041 (AU).

(21) International Application Number:
PCT/AU2008/000515

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC,
LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN,
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(22) International Filing Date: 14 April 2008 (14.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/744,885 7 May 2007 (07.05.2007) US

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (for all designated States except US): **SILVER-
BROOK RESEARCH PTY LTD** [AU/AU]; 393 Darling
Street, Balmain, New South Wales 2041 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SILVERBROOK,
Kia** [AU/AU]; 393 Darling Street, Balmain, New South
Wales 2041 (AU).

Published:
— with international search report

(54) Title: **INKJET PRINthead WITH LOW VOLTAGE INK VAPORIZING HEATERS**

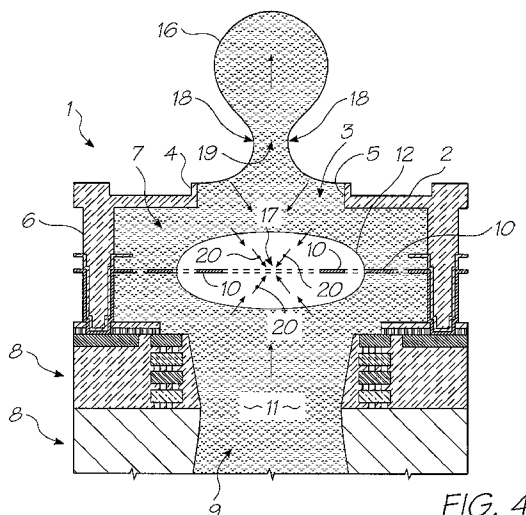

(57) Abstract: There is disclosed an ink jet printhead which comprises a plurality of nozzles and one or more heater elements (10) corresponding to each nozzle. Each heater element (10) is configured to heat a bubble forming liquid (11) in the printhead to a temperature above its boiling point to form a gas bubble (12) therein. The generation of the bubble (12) causes the ejection of a drop of an ejectable liquid (such as ink) through an ejection aperture (5) in each nozzle, to effect printing. In each nozzle, the heater element (10) requires an electrical pulse with a voltage less than 10 volts and a duration less than 1.5 microseconds, to form the vapor bubble that causes the ejection of the drop. With the realization that drive pulse voltages above, say, 12 volts are not a fixed parameter of printhead design, the benefits of low voltage printhead operation can be incorporated into a design that yields efficiencies that negate the circumstances that created the initial demand for high voltage operation.

WO 2008/134792 A1

INKJET PRINthead WITH LOW VOLTAGE INK VAPORIZING HEATERS

FIELD OF THE INVENTION

5 The present invention relates to a thermal ink jet printhead, to a printer system incorporating such a printhead, and to a method of ejecting a liquid drop (such as an ink drop) using such a printhead.

BACKGROUND TO THE INVENTION

10 The present invention involves the ejection of ink drops by way of forming gas or vapor bubbles in a bubble forming liquid. This principle is generally described in US 3,747,120 (Stemme).

15 There are various known types of thermal ink jet (bubblejet) printhead devices. Two typical devices of this type, one made by Hewlett Packard and the other by Canon, have ink ejection nozzles and chambers for storing ink adjacent the nozzles. Each chamber is covered by a so-called nozzle plate, which is a separately fabricated item and which is mechanically secured to the walls of the chamber. In certain prior art devices, the top plate is made of Kapton TM which is a Dupont trade name for a polyimide film, which has been laser-drilled to form the nozzles. These devices also include heater elements in thermal contact with ink that is disposed adjacent the nozzles, for heating the ink thereby forming gas bubbles in the ink. The gas bubbles generate pressures in the ink causing ink drops to be ejected through the nozzles.

20 The heater elements are embedded in the printhead substrate and covered for protection from the corrosive environment they create in the chamber. High temperatures and frequently vaporizing ink (typically water based) will quickly oxidate most heater materials. The severe hydraulic forces from the cavitation of collapsing bubbles is also highly corrosive to the heater elements. To prevent the heaters from failing prematurely, they are covered with a protective barrier such as tantalum pentoxide.

25 The pulse of electrical energy sent to each heater element needs to vaporize the ink by heating it through the protective layer(s). The pulse duration should be as short as possible to maximize print speed. This requires the power of the drive pulse to be relatively high. Unfortunately, high voltage drive pulses require larger drive transistors. High voltages also create the potential for arcing and other breakdown mechanisms. For example, the heater must be electrically insulated from the ink because a high voltage causes electrolytic breakdown of the materials in the ink and chamber.

30 The voltages can be reduced and the current increased to give a pulse of the same power, but high currents induce electromigration above a certain threshold (electromigration is an atomic migration away from points of high current density that eventually thins and ultimately fractures the heater element), higher parasitic resistances (in the heater contacts etc), the drive transistor operates less efficiently and the 'ground bounce' is more severe. Ground bounce is inductance in the common ground connection of the heater elements. This can keep the drain voltage from the drive transistor bouncing above zero, or ground. In the extreme, ground bounce can make the drive logic read the voltage at the drain as '1' instead of '0'.

40

In light of the problems associated with high current drive pulses, the drive pulses have a voltage of at least 12 Volts and the large drive transistors they require are tolerated.

5 SUMMARY OF THE INVENTION

According to a first aspect, the present invention provides an inkjet printhead comprising:

a plurality of nozzles,

at least one heater element corresponding to each of the nozzles respectively, the heater element configured for thermal contact with an ejectable liquid; such that,

10 heating the heater element to a temperature above the ejectable liquid's boiling point forms a vapor bubble that ejects a drop of the ejectable liquid through the nozzle corresponding to that heater element; wherein,

the heater element requires an electrical pulse with a voltage less than 10 volts and a duration less than 1.5 microseconds, to form the vapor bubble that causes the ejection of the drop.

15

The invention is predicated on reducing the drive voltage while improving the efficiency of the drop ejection process such that the drive current remains manageably low. With the realization that high drive pulse voltage is not a fixed parameter of printhead design, the benefits of low voltage printhead operation can be incorporated into a design that yields efficiencies that negate the circumstances that created the initial demand for high voltage operation. The low voltage operation of the heater elements is more compatible with the high density CMOS (complimentary metal-oxide semiconductor) devices used in the printhead. The drive transistors for each nozzle can be significantly smaller and this in turn improves the nozzle density. A lower voltage drive pulse allows the heater to directly contact the ink without electrolytic breakdown. Having both the drive transistors for the heater elements and the rest of the CMOS devices in the drive circuitry operate at relatively low voltages simplifies the power supply to the printhead as a whole. This allows a more compact printhead design and has significant fabrication cost advantages.

20

25

Optionally, the electrical pulse has a voltage less than 8 volts and duration less than 1.5 microseconds.

30

Optionally, the electrical pulse has a voltage less than 5 volts and duration less than 1.5 microseconds.

Optionally, the electrical pulse has a voltage less than 3 volts and duration less than 1.5 microseconds.

In some embodiments, the printhead is configured to print on a page and to be a page-width printhead.

35

Preferably, each heater element is in the form of a beam. In a further preferred form, each of the nozzles defines an ejection aperture positioned less than 50 microns from the heater element.

In a particularly preferred form, the printhead is configured to receive a supply of the ejectable liquid at an ambient temperature, wherein each heater element is configured such that the energy required to be applied thereto to heat said part to cause the ejection of a said drop is less than the energy required to heat a volume of said ejectable liquid equal to the volume of the said drop, from a temperature equal to said ambient

40

temperature to said boiling point. The ordinary worker will appreciate that this allows the printhead to be self cooling. The energy that the heater inputs to the chamber is removed by the ejected drop. Hence overheating is not an issue and print speeds are limited only by the ink refill rate of the nozzles.

- 5 Optionally, the printhead further comprises a substrate having a substrate surface, wherein the areal density of the nozzles relative to the substrate surface exceeds 10,000 nozzles per square cm of substrate surface.

In a particularly preferred form, each heater element is a generally planar beam extending between its two ends which are supported such that during use the beam is immersed in the ejectable liquid. Preferably, each
10 heater element is a generally planar structure configured such that the plane of the heater element is parallel to the plane of the nozzle corresponding to that heater element.

In some embodiments, the heater element has a generally planar structure that is formed by chemical vapor deposition (CVD). Preferably, the printhead also has a wafer substrate supporting the nozzle and the heater
15 element, the nozzle being formed in a nozzle plate, the nozzle plate being parallel to and spaced less than 10 microns from the wafer substrate.

Optionally, the printhead has a plurality of nozzle chambers each corresponding to a respective nozzle, and a plurality of said heater elements being disposed within each chamber, the heater elements within each
20 chamber being formed on different respective layers to one another.

Optionally, each heater element is formed of solid material more than 90% of which, by atomic proportion, is constituted by at least one periodic element having an atomic number below 50. Preferably, each heater
25 element includes solid material and is configured for a mass of less than 10 nanograms of the solid material of that heater element to be heated to a temperature above said boiling point thereby to heat said part of the bubble forming liquid to a temperature above said boiling point to cause the ejection of a said drop.

Preferably the electrical pulse has less than 200 nano-Joules of energy. In a further preferred form, the electrical pulse has less than 150 nano-Joules of energy, and in a still further preferred form, the electrical
30 pulse has less than 100 nano-Joules of energy. The Applicant has developed embodiments of the printhead (described below) so efficient that the electrical pulse has less than 80 nano-Joules of energy.

As will be understood by those skilled in the art, the ejection of a drop of the ejectable liquid as described herein, is caused by the generation of a vapor bubble in a bubble forming liquid, which, in embodiments, is
35 the same body of liquid as the ejectable liquid. The generated bubble causes an increase in pressure in ejectable liquid, which forces the drop through the relevant nozzle. The bubble is generated by Joule heating of a heater element which is in thermal contact with the ink. The electrical pulse applied to the heater is of brief duration, typically less than 2 microseconds. Due to stored heat in the liquid, the bubble expands for a few microseconds after the heater pulse is turned off. As the vapor cools, it recondenses, resulting in bubble
40 collapse. The bubble collapses to a point determined by the dynamic interplay of inertia and surface tension of the ink. In this specification, such a point is referred to as the "point of collapse" of the bubble.

The printhead according to the invention comprises a plurality of nozzles, as well as a chamber and one or more heater elements corresponding to each nozzle. Each portion of the printhead pertaining to a single nozzle, its chamber and its one or more elements, is referred to herein as a “unit cell”.

5

In this specification, where reference is made to parts being in thermal contact with each other, this means that they are positioned relative to each other such that, when one of the parts is heated, it is capable of heating the other part, even though the parts, themselves, might not be in physical contact with each other.

10

Also, the term “ink” is used to signify any ejectable liquid, and is not limited to conventional inks containing colored dyes. Examples of non-colored inks include fixatives, infra-red absorber inks, aluminium based chemicals, adhesives, biological fluids, water and other solvents, and so on. The ink or ejectable liquid also need not necessarily be a strictly a liquid, and may contain a suspension of solid particles or be solid at room temperature and liquid at the ejection temperature.

15

In this specification, the term “periodic element” refers to an element of a type reflected in the periodic table of elements.

BRIEF DESCRIPTION OF THE DRAWINGS

20

Preferred embodiments of the invention will now be described, by way of example only, with reference to the accompanying representations. The drawings are described as follows.

Figure 1 is a schematic cross-sectional view through an ink chamber of a unit cell of a printhead according to an embodiment of the invention, at a particular stage of operation.

25

Figure 2 is a schematic cross-sectional view through the ink chamber Figure 1, at another stage of operation.

Figure 3 is a schematic cross-sectional view through the ink chamber Figure 1, at yet another stage of operation.

30

Figure 4 is a schematic cross-sectional view through the ink chamber Figure 1, at yet a further stage of operation.

35

Figure 5 is a diagrammatic cross-sectional view through a unit cell of a printhead in accordance with the an embodiment of the invention showing the collapse of a vapor bubble.

Figures 6, 8, 10, 11, 13, 14, 16, 18, 19, 21, 23, 24, 26, 28 and 30 are schematic perspective views (Figure 30 being partly cut away) of a unit cell of a printhead in accordance with an embodiment of the invention, at various successive stages in the production process of the printhead.

40

Figures 7, 9, 12, 15, 17, 20, 22, 25, 27, 29 and 31 are each schematic plan views of a mask suitable for use in performing the production stage for the printhead, as represented in the respective immediately preceding figures.

- 5 Figure 32 is a further schematic perspective view of the unit cell of Figure 30 shown with the nozzle plate omitted.

Figure 33 is a schematic perspective view, partly cut away, of a unit cell of a printhead according to the invention having another particular embodiment of heater element.

10

Figure 34 is a schematic plan view of a mask suitable for use in performing the production stage for the printhead of Figure 33 for forming the heater element thereof.

- 15 Figure 35 is a schematic perspective view, partly cut away, of a unit cell of a printhead according to the invention having a further particular embodiment of heater element.

Figure 36 is a schematic plan view of a mask suitable for use in performing the production stage for the printhead of Figure 35 for forming the heater element thereof.

- 20 Figure 37 is a further schematic perspective view of the unit cell of Figure 35 shown with the nozzle plate omitted.

Figure 38 is a schematic perspective view, partly cut away, of a unit cell of a printhead according to the invention having a further particular embodiment of heater element.

25

Figure 39 is a schematic plan view of a mask suitable for use in performing the production stage for the printhead of Figure 38 for forming the heater element thereof.

- 30 Figure 40 is a further schematic perspective view of the unit cell of Figure 38 shown with the nozzle plate omitted.

Figure 41 is a schematic section through a nozzle chamber of a printhead according to an embodiment of the invention showing a suspended beam heater element immersed in a bubble forming liquid.

- 35 Figure 42 is schematic section through a nozzle chamber of a printhead according to an embodiment of the invention showing a suspended beam heater element suspended at the top of a body of a bubble forming liquid.

- 40 Figure 43 is a diagrammatic plan view of a unit cell of a printhead according to an embodiment of the invention showing a nozzle.

Figure 44 is a diagrammatic plan view of a plurality of unit cells of a printhead according to an embodiment of the invention showing a plurality of nozzles.

5 Figure 45 is a diagrammatic section through a nozzle chamber not in accordance with the invention showing a heater element embedded in a substrate.

Figure 46 is a diagrammatic section through a nozzle chamber in accordance with an embodiment of the invention showing a heater element in the form of a suspended beam.

10 Figure 47 is a diagrammatic section through a nozzle chamber of a prior art printhead showing a heater element embedded in a substrate.

Figure 48 is a diagrammatic section through a nozzle chamber in accordance with an embodiment of the invention showing a heater element defining a gap between parts of the element.

15 Figure 49 is a diagrammatic section through a nozzle chamber not in accordance with the invention, showing a thick nozzle plate.

20 Figure 50 is a diagrammatic section through a nozzle chamber in accordance with an embodiment of the invention showing a thin nozzle plate.

Figure 51 is a diagrammatic section through a nozzle chamber in accordance with an embodiment of the invention showing two heater elements.

25 Figure 52 is a diagrammatic section through a nozzle chamber of a prior art printhead showing two heater elements.

30 Figure 53 is a diagrammatic section through a pair of adjacent unit cells of a printhead according to an embodiment of the invention, showing two different nozzles after drops having different volumes have been ejected therethrough.

Figures 54 and 55 are diagrammatic sections through a heater element of a prior art printhead.

35 Figure 56 is a diagrammatic section through a conformally coated heater element according to an embodiment of the invention.

Figure 57 is a diagrammatic elevation of a heater element, connected to electrodes, of a printhead according to an embodiment of the invention.

40 Figure 58 is a schematic exploded perspective view of a printhead module of a printhead according to an embodiment of the invention.

- Figure 59 is a schematic perspective view the printhead module of Figure 58 shown unexploded.
- Figure 60 is a schematic side view, shown partly in section, of the printhead module of Figure 58.
- 5 Figure 61 is a schematic plan view of the printhead module of Figure 58.
- Figure 62 is a schematic exploded perspective view of a printhead according to an embodiment of the invention.
- 10 Figure 63 is a schematic further perspective view of the printhead of Figure 62 shown unexploded.
- Figure 64 is a schematic front view of the printhead of Figure 62.
- 15 Figure 65 is a schematic rear view of the printhead of Figure 62.
- Figure 66 is a schematic bottom view of the printhead of Figure 62.
- Figure 67 is a schematic plan view of the printhead of Figure 62.
- 20 Figure 68 is a schematic perspective view of the printhead as shown in Figure 62, but shown unexploded.
- Figure 69 is a schematic longitudinal section through the printhead of Figure 62.
- 25 Figure 70 is a block diagram of a printer system according to an embodiment of the invention.
- Figure 71 is a schematic, partially cut away, perspective view of a further embodiment of a unit cell of a printhead.
- 30 Figure 72 is a schematic, partially cut away, exploded perspective view of the unit cell of Figure 71.
- Figure 73 is a schematic, partially cut away, perspective view of a further embodiment of a unit cell of a printhead.
- 35 Figure 74 is a schematic, partially cut away, exploded perspective view of the unit cell of Figure 73.
- Figure 75 is a schematic, partially cut away, perspective view of a further embodiment of a unit cell of a printhead.
- 40 Figure 76 is a schematic, partially cut away, exploded perspective view of the unit cell of Figure 75.

Figure 77 is a schematic, partially cut away, perspective view of a further embodiment of a unit cell of a printhead.

5 Figure 78 is a schematic, partially cut away, perspective view of a further embodiment of a unit cell of a printhead.

Figure 79 is a schematic, partially cut away, exploded perspective view of the unit cell of Figure 78.

10 Figures 80 to 90 are schematic perspective views of the unit cell shown in Figures 78 and 79, at various successive stages in the production process of the printhead.

Figures 91 and 92 show schematic, partially cut away, schematic perspective views of two variations of the unit cell of Figures 78 to 90.

15 Figure 93 is a schematic, partially cut away, perspective view of a further embodiment of a unit cell of a printhead.

Figure 94 is a schematic, partially cut away, perspective view of a further embodiment of a unit cell of a printhead.
20

DETAILED DESCRIPTION

In the description that follows, corresponding reference numerals, or corresponding prefixes of reference numerals (i.e. the parts of the reference numerals appearing before a point mark) which are used in different figures relate to corresponding parts. Where there are corresponding prefixes and differing suffixes to the
25 reference numerals, these indicate different specific embodiments of corresponding parts.

Overview of the invention and general discussion of operation

With reference to Figures 1 to 4, the unit cell 1 of a printhead according to an embodiment of the invention
30 comprises a nozzle plate 2 with nozzles 3 therein, the nozzles having nozzle rims 4, and apertures 5 extending through the nozzle plate. The nozzle plate 2 is plasma etched from a silicon nitride structure which is deposited, by way of chemical vapor deposition (CVD), over a sacrificial material which is subsequently etched.

35 The printhead also includes, with respect to each nozzle 3, side walls 6 on which the nozzle plate is supported, a chamber 7 defined by the walls and the nozzle plate 2, a multi-layer substrate 8 and an inlet passage 9 extending through the multi-layer substrate to the far side (not shown) of the substrate. A looped, elongate heater element 10 is suspended within the chamber 7, so that the element is in the form of a suspended beam. The printhead as shown is a microelectromechanical system (MEMS) structure, which is
40 formed by a lithographic process which is described in more detail below.

When the printhead is in use, ink 11 from a reservoir (not shown) enters the chamber 7 via the inlet passage 9, so that the chamber fills to the level as shown in Figure 1. Thereafter, the heater element 10 is heated for somewhat less than 1 microsecond, so that the heating is in the form of a thermal pulse. It will be appreciated that the heater element 10 is in thermal contact with the ink 11 in the chamber 7 so that when the element is heated, this causes the generation of vapor bubbles 12 in the ink. Accordingly, the ink 11 constitutes a bubble forming liquid. Figure 1 shows the formation of a bubble 12 approximately 1 microsecond after generation of the thermal pulse, that is, when the bubble has just nucleated on the heater elements 10. It will be appreciated that, as the heat is applied in the form of a pulse, all the energy necessary to generate the bubble 12 is to be supplied within that short time.

Turning briefly to Figure 34, there is shown a mask 13 for forming a heater 14 (as shown in Figure 33) of the printhead (which heater includes the element 10 referred to above), during a lithographic process, as described in more detail below. As the mask 13 is used to form the heater 14, the shape of various of its parts correspond to the shape of the element 10. The mask 13 therefore provides a useful reference by which to identify various parts of the heater 14. The heater 14 has electrodes 15 corresponding to the parts designated 15.34 of the mask 13 and a heater element 10 corresponding to the parts designated 10.34 of the mask. In operation, voltage is applied across the electrodes 15 to cause current to flow through the element 10. The electrodes 15 are much thicker than the element 10 so that most of the electrical resistance is provided by the element. Thus, nearly all of the power consumed in operating the heater 14 is dissipated via the element 10, in creating the thermal pulse referred to above.

When the element 10 is heated as described above, the bubble 12 forms along the length of the element, this bubble appearing, in the cross-sectional view of Figure 1, as four bubble portions, one for each of the element portions shown in cross section.

The bubble 12, once generated, causes an increase in pressure within the chamber 7, which in turn causes the ejection of a drop 16 of the ink 11 through the nozzle 3. The rim 4 assists in directing the drop 16 as it is ejected, so as to minimize the chance of a drop misdirection.

The reason that there is only one nozzle 3 and chamber 7 per inlet passage 9 is so that the pressure wave generated within the chamber, on heating of the element 10 and forming of a bubble 12, does not effect adjacent chambers and their corresponding nozzles.

The advantages of the heater element 10 being suspended rather than being embedded in any solid material, is discussed below.

Figures 2 and 3 show the unit cell 1 at two successive later stages of operation of the printhead. It can be seen that the bubble 12 generates further, and hence grows, with the resultant advancement of ink 11 through the nozzle 3. The shape of the bubble 12 as it grows, as shown in Figure 3, is determined by a combination of the inertial dynamics and the surface tension of the ink 11. The surface tension tends to minimize the

surface area of the bubble 12 so that, by the time a certain amount of liquid has evaporated, the bubble is essentially disk-shaped.

- The increase in pressure within the chamber 7 not only pushes ink 11 out through the nozzle 3, but also pushes some ink back through the inlet passage 9. However, the inlet passage 9 is approximately 200 to 300 microns in length, and is only approximately 16 microns in diameter. Hence there is a substantial viscous drag. As a result, the predominant effect of the pressure rise in the chamber 7 is to force ink out through the nozzle 3 as an ejected drop 16, rather than back through the inlet passage 9.
- Turning now to Figure 4, the printhead is shown at a still further successive stage of operation, in which the ink drop 16 that is being ejected is shown during its "necking phase" before the drop breaks off. At this stage, the bubble 12 has already reached its maximum size and has then begun to collapse towards the point of collapse 17, as reflected in more detail in Figure 5.
- The collapsing of the bubble 12 towards the point of collapse 17 causes some ink 11 to be drawn from within the nozzle 3 (from the sides 18 of the drop), and some to be drawn from the inlet passage 9, towards the point of collapse. Most of the ink 11 drawn in this manner is drawn from the nozzle 3, forming an annular neck 19 at the base of the drop 16 prior to its breaking off.
- The drop 16 requires a certain amount of momentum to overcome surface tension forces, in order to break off. As ink 11 is drawn from the nozzle 3 by the collapse of the bubble 12, the diameter of the neck 19 reduces thereby reducing the amount of total surface tension holding the drop, so that the momentum of the drop as it is ejected out of the nozzle is sufficient to allow the drop to break off.
- When the drop 16 breaks off, cavitation forces are caused as reflected by the arrows 20, as the bubble 12 collapses to the point of collapse 17. It will be noted that there are no solid surfaces in the vicinity of the point of collapse 17 on which the cavitation can have an effect.

Manufacturing process

- Relevant parts of the manufacturing process of a printhead according to embodiments of the invention are now described with reference to Figures 6 to 29.
- Referring to Figure 6, there is shown a cross-section through a silicon substrate portion 21, being a portion of a Memjet printhead, at an intermediate stage in the production process thereof. This figure relates to that portion of the printhead corresponding to a unit cell 1. The description of the manufacturing process that follows will be in relation to a unit cell 1, although it will be appreciated that the process will be applied to a multitude of adjacent unit cells of which the whole printhead is composed.
- Figure 6 represents the next successive step, during the manufacturing process, after the completion of a standard CMOS fabrication process, including the fabrication of CMOS drive transistors (not shown) in the

region 22 in the substrate portion 21, and the completion of standard CMOS interconnect layers 23 and passivation layer 24. Wiring indicated by the dashed lines 25 electrically interconnects the transistors and other drive circuitry (also not shown) and the heater element corresponding to the nozzle.

- 5 Guard rings 26 are formed in the metallization of the interconnect layers 23 to prevent ink 11 from diffusing from the region, designated 27, where the nozzle of the unit cell 1 will be formed, through the substrate portion 21 to the region containing the wiring 25, and corroding the CMOS circuitry disposed in the region designated 22.
- 10 The first stage after the completion of the CMOS fabrication process consists of etching a portion of the passivation layer 24 to form the passivation recesses 29.

Figure 8 shows the stage of production after the etching of the interconnect layers 23, to form an opening 30. The opening 30 is to constitute the ink inlet passage to the chamber that will be formed later in the process.

- 15 Figure 10 shows the stage of production after the etching of a hole 31 in the substrate portion 21 at a position where the nozzle 3 is to be formed. Later in the production process, a further hole (indicated by the dashed line 32) will be etched from the other side (not shown) of the substrate portion 21 to join up with the hole 31, to complete the inlet passage to the chamber. Thus, the hole 32 will not have to be etched all the way from
- 20 the other side of the substrate portion 21 to the level of the interconnect layers 23.

- If, instead, the hole 32 were to be etched all the way to the interconnect layers 23, then to avoid the hole 32 being etched so as to destroy the transistors in the region 22, the hole 32 would have to be etched a greater distance away from that region so as to leave a suitable margin (indicated by the arrow 34) for etching
- 25 inaccuracies. But the etching of the hole 31 from the top of the substrate portion 21, and the resultant shortened depth of the hole 32, means that a lesser margin 34 need be left, and that a substantially higher packing density of nozzles can thus be achieved.

- Figure 11 shows the stage of production after a four micron thick layer 35 of a sacrificial resist has been
- 30 deposited on the layer 24. This layer 35 fills the hole 31 and now forms part of the structure of the printhead. The resist layer 35 is then exposed with certain patterns (as represented by the mask shown in Figure 12) to form recesses 36 and a slot 37. This provides for the formation of contacts for the electrodes 15 of the heater element to be formed later in the production process. The slot 37 will provide, later in the process, for the formation of the nozzle walls 6, that will define part of the chamber 7.

- 35 Figure 13 shows the stage of production after the deposition, on the layer 35, of a 0.25 micron thick layer 38 of heater material, which, in the present embodiment, is of titanium nitride.

- Figure 14 shows the stage of production after patterning and etching of the heater layer 38 to form the heater
- 40 14, including the heater element 10 and electrodes 15.

Figure 16 shows the stage of production after another sacrificial resist layer 39, about 1 micron thick, has been added.

Figure 18 shows the stage of production after a second layer 40 of heater material has been deposited. In a preferred embodiment, this layer 40, like the first heater layer 38, is of 0.25 micron thick titanium nitride.

Figure 19 then shows this second layer 40 of heater material after it has been etched to form the pattern as shown, indicated by reference numeral 41. In this illustration, this patterned layer does not include a heater layer element 10, and in this sense has no heater functionality. However, this layer of heater material does assist in reducing the resistance of the electrodes 15 of the heater 14 so that, in operation, less energy is consumed by the electrodes which allows greater energy consumption by, and therefore greater effectiveness of, the heater elements 10. In the dual heater embodiment illustrated in Figure 38, the corresponding layer 40 does contain a heater 14.

Figure 21 shows the stage of production after a third layer 42, of sacrificial resist, has been deposited. The uppermost level of this layer will constitute the inner surface of the nozzle plate 2 to be formed later. This is also the inner extent of the ejection aperture 5 of the nozzle. The height of this layer 42 must be sufficient to allow for the formation of a bubble 12 in the region designated 43 during operation of the printhead. However, the height of layer 42 determines the mass of ink that the bubble must move in order to eject a droplet. In light of this, the printhead structure of the present invention is designed such that the heater element is much closer to the ejection aperture than in prior art printheads. The mass of ink moved by the bubble is reduced. The generation of a bubble sufficient for the ejection of the desired droplet will require less energy, thereby improving efficiency.

Figure 23 shows the stage of production after the roof layer 44 has been deposited, that is, the layer which will constitute the nozzle plate 2. Instead of being formed from 100 micron thick polyimide film, the nozzle plate 2 is formed of silicon nitride, just 2 microns thick.

Figure 24 shows the stage of production after the chemical vapor deposition (CVD) of silicon nitride forming the layer 44, has been partly etched at the position designated 45, so as to form the outside part of the nozzle rim 4, this outside part being designated 4.1

Figure 26 shows the stage of production after the CVD of silicon nitride has been etched all the way through at 46, to complete the formation of the nozzle rim 4 and to form the ejection aperture 5, and after the CVD silicon nitride has been removed at the position designated 47 where it is not required.

Figure 28 shows the stage of production after a protective layer 48 of resist has been applied. After this stage, the substrate portion 21 is then ground from its other side (not shown) to reduce the substrate portion from its nominal thickness of about 800 microns to about 200 microns, and then, as foreshadowed above, to etch the hole 32. The hole 32 is etched to a depth such that it meets the hole 31.

Then, the sacrificial resist of each of the resist layers 35, 39, 42 and 48, is removed using oxygen plasma, to form the structure shown in Figure 30, with walls 6 and nozzle plate 2 which together define the chamber 7 (part of the walls and nozzle plate being shown cut-away). It will be noted that this also serves to remove the resist filling the hole 31 so that this hole, together with the hole 32 (not shown in Figure 30), define a passage
5 extending from the lower side of the substrate portion 21 to the nozzle 3, this passage serving as the ink inlet passage, generally designated 9, to the chamber 7.

Figure 32 shows the printhead with the nozzle guard and chamber walls removed to clearly illustrate the vertically stacked arrangement of the heater elements 10 and the electrodes 15.

10

While the above production process is used to produce the embodiment of the printhead shown in Figure 30, further printhead embodiments, having different heater structures, are shown in Figure 33, Figures 35 and 37, and Figures 38 and 40.

15 *Control of ink drop ejection*

Referring once again to Figure 30, the unit cell 1 shown, as mentioned above, is shown with part of the walls 6 and nozzle plate 2 cut-away, which reveals the interior of the chamber 7. The heater 14 is not shown cut away, so that both halves of the heater element 10 can be seen.

20

In operation, ink 11 passes through the ink inlet passage 9 (see Figure 28) to fill the chamber 7. Then a voltage is applied across the electrodes 15 to establish a flow of electric current through the heater element 10. This heats the element 10, as described above in relation to Figure 1, to form a vapor bubble in the ink within the chamber 7.

25

The various possible structures for the heater 14, some of which are shown in Figures 33, 35 and 37, and 38, can result in there being many variations in the ratio of length to width of the heater elements 10. Such variations (even though the surface area of the elements 10 may be the same) may have significant effects on the electrical resistance of the elements, and therefore on the balance between the voltage and current to
30 achieve a certain power of the element.

Modern drive electronic components tend to require lower drive voltages than earlier versions, with lower resistances of drive transistors in their "on" state. Thus, in such drive transistors, for a given transistor area, there is a tendency to higher current capability and lower voltage tolerance in each process generation.

35

Figure 36, referred to above, shows the shape, in plan view, of a mask for forming the heater structure of the embodiment of the printhead shown in Figure 35. Accordingly, as Figure 36 represents the shape of the heater element 10 of that embodiment, it is now referred to in discussing that heater element. During operation, current flows vertically into the electrodes 15 (represented by the parts designated 15.36), so that
40 the current flow area of the electrodes is relatively large, which, in turn, results in there being a low electrical

14

resistance. By contrast, the element 10, represented in figure 36 by the part designated 10.36, is long and thin, with the width of the element in this embodiment being 1 micron and the thickness being 0.25 microns.

It will be noted that the heater 14 shown in Figure 33 has a significantly smaller element 10 than the element 10 shown in Figure 35, and has just a single loop 36. Accordingly, the element 10 of Figure 33 will have a much lower electrical resistance, and will permit a higher current flow, than the element 10 of Figure 35. It therefore requires a lower drive voltage to deliver a given energy to the heater 14 in a given time.

In Figure 38, on the other hand, the embodiment shown includes a heater 14 having two heater elements 10.1 and 10.2 corresponding to the same unit cell 1. One of these elements 10.2 is twice the width as the other element 10.1, with a correspondingly larger surface area. The various paths of the lower element 10.2 are 2 microns in width, while those of the upper element 10.1 are 1 micron in width. Thus the energy applied to ink in the chamber 7 by the lower element 10.2 is twice that applied by the upper element 10.1 at a given drive voltage and pulse duration. This permits a regulating of the size of vapor bubbles and hence of the size of ink drop ejected due to the bubbles.

Assuming that the energy applied to the ink by the upper element 10.1 is X, it will be appreciated that the energy applied by the lower element 10.2 is about 2X, and the energy applied by the two elements together is about 3X. Of course, the energy applied when neither element is operational, is zero. Thus, in effect, two bits of information can be printed with the one nozzle 3.

As the above factors of energy output may not be achieved exactly in practice, some "fine tuning" of the exact sizing of the elements 10.1 and 10.2, or of the drive voltages that are applied to them, may be required.

It will also be noted that the upper element 10.1 is rotated through 180° about a vertical axis relative to the lower element 10.2. This is so that their electrodes 15 are not coincident, allowing independent connection to separate drive circuits.

Features and advantages of particular embodiments

Discussed below, under appropriate headings, are certain specific features of embodiments of the invention, and the advantages of these features. The features are to be considered in relation to all of the drawings pertaining to the present invention unless the context specifically excludes certain drawings, and relates to those drawings specifically referred to.

Suspended beam heater

With reference to Figure 1, and as mentioned above, the heater element 10 is in the form of a suspended beam, and this is suspended over at least a portion (designated 11.1) of the ink 11 (bubble forming liquid). The element 10 is configured in this way rather than forming part of, or being embedded in, a substrate as is the case in existing printhead systems made by various manufacturers such as Hewlett Packard, Canon and

Lexmark. This constitutes a significant difference between embodiments of the present invention and the prior ink jet technologies.

5 The main advantage of this feature is that a higher efficiency can be achieved by avoiding the unnecessary heating of the solid material that surrounds the heater elements 10 (for example the solid material forming the chamber walls 6, and surrounding the inlet passage 9) which takes place in the prior art devices. The heating of such solid material does not contribute to the formation of vapor bubbles 12, so that the heating of such material involves the wastage of energy. The only energy which contributes in any significant sense to the generation of the bubbles 12 is that which is applied directly into the liquid which is to be heated, which
10 liquid is typically the ink 11.

In one preferred embodiment, as illustrated in Figure 1, the heater element 10 is suspended within the ink 11 (bubble forming liquid), so that this liquid surrounds the element. This is further illustrated in Figure 41. In another possible embodiment, as illustrated in Figure 42, the heater element 10 beam is suspended at the
15 surface of the ink (bubble forming liquid) 11, so that this liquid is only below the element rather than surrounding it, and there is air on the upper side of the element. The embodiment described in relation to Figure 41 is preferred as the bubble 12 will form all around the element 10 unlike in the embodiment described in relation to Figure 42 where the bubble will only form below the element. Thus the embodiment of Figure 41 is likely to provide a more efficient operation.

20 As can be seen in, for example, with reference to Figures 30 and 31, the heater element 10 beam is supported only on one side and is free at its opposite side, so that it constitutes a cantilever. This $\square$ luminium any direct contact with, and hence reduces heat transfer to, the solid material of the nozzle.

25 Efficiency of the printhead

The printhead of the present invention has a design that configures the nozzle structure for enhanced efficiency. Using this configuration, less than 200 nanojoules (nJ) is required to be applied to the element to heat it sufficiently to form a bubble 12 in the ink 11, so as to eject a drop 16 of ink through a nozzle 3. In one
30 preferred embodiment, the required energy is less than 150 nJ, while in a further embodiment, the energy is less than 100 nJ. In a particularly preferred embodiment the energy required is less than 80 nJ.

It will be appreciated by those skilled in the art that prior art devices generally require over 5 microjoules to heat the element sufficiently to generate a vapor bubble 12 to eject an ink drop 16. Thus, the energy
35 requirements of the present invention are an order of magnitude lower than that of known thermal ink jet systems. This lower energy consumption allows lower operating costs, smaller power supplies, and so on, but also dramatically simplifies printhead cooling, allows higher densities of nozzles 3, and permits printing at higher resolutions.

40 The heater element 10 and nozzle plate 2 are positioned to allow for bubble generation while $\square$ luminium $\square$ the mass of ink that needs to be displaced. As a result, the distance between the heater elements and the

16

ejection aperture is relatively short. Preferably, the distance between the heater elements and the ejection aperture is less than 50 microns. In a further preferred form, the distance is less than 25 microns, and in some embodiments the distance is less than 10 microns. In a particularly preferred embodiment, the distance is less than 5 microns.

5

These advantages of the present invention are especially significant in embodiments where the individual ejected ink drops 16, themselves, constitute the major cooling mechanism of the printhead, as described further below.

10 Self-cooling of the printhead

This feature of the invention provides that the energy applied to a heater element 10 to form a vapor bubble 12 so as to eject a drop 16 of ink 11 is removed from the printhead by a combination of the heat removed by the ejected drop itself, and the ink that is taken into the printhead from the ink reservoir (not shown). The result of this is that the net "movement" of heat will be outwards from the printhead, to provide for automatic cooling. Under these circumstances, the printhead does not require any other cooling systems.

15

As the ink drop 16 ejected and the amount of ink 11 drawn into the printhead to replace the ejected drop are constituted by the same type of liquid, and will essentially be of the same mass, it is convenient to express the net movement of energy as, on the one hand, the energy added by the heating of the element 10, and on the other hand, the net removal of heat energy that results from ejecting the ink drop 16 and the intake of the replacement quantity of ink 11. Assuming that the replacement quantity of ink 11 is at ambient temperature, the change in energy due to net movement of the ejected and replacement quantities of ink can conveniently be expressed as the heat that would be required to raise the temperature of the ejected drop 16, if it were at ambient temperature, to the actual temperature of the drop as it is ejected.

20

25

It will be appreciated that a determination of whether the above criteria are met depends on what constitutes the ambient temperature. In the present case, the temperature that is taken to be the ambient temperature is the temperature at which ink 11 enters the printhead from the ink storage reservoir (not shown) which is connected, in fluid flow communication, to the inlet passages 9 of the printhead. Typically the ambient temperature will be the room ambient temperature, which is usually roughly 20 degrees C (Celsius).

30

However, the ambient temperature may be less, if for example, the room temperature is lower, or if the ink 11 entering the printhead is refrigerated.

35

In one preferred embodiment, the printhead is designed to achieve complete self-cooling (i.e. where the outgoing heat energy due to the net effect of the ejected and replacement quantities of ink 11 is equal to the heat energy added by the heater element 10).

40

By way of example, assuming that the ink 11 is the bubble forming liquid and is water based, thus having a boiling point of approximately 100 degrees C, and if the ambient temperature is 40 degrees C, then there is a

maximum of 60 degrees C from the ambient temperature to the ink boiling temperature and that is the maximum temperature rise that the printhead could undergo.

It is desirable to avoid having ink temperatures within the printhead (other than at time of ink drop 16 ejection) which are very close to the boiling point of the ink 11. If the ink 11 were at such a temperature, then temperature variations between parts of the printhead could result in some regions being above boiling point, with the unintended, and therefore undesirable, formation of vapor bubbles 12. Accordingly, a preferred embodiment of the invention is configured such that complete self-cooling, as described above, can be achieved when the maximum temperature of the ink 11 (bubble forming liquid) in a particular nozzle chamber 7 is 10 degrees C below its boiling point when the heating element 10 is not active.

The main advantage of the feature presently under discussion, and its various embodiments, is that it allows for a high nozzle density and for a high speed of printhead operation without requiring elaborate cooling methods for preventing undesired boiling in nozzles 3 adjacent to nozzles from which ink drops 16 are being ejected. This can allow as much as a hundred-fold increase in nozzle packing density than would be the case if such a feature, and the temperature criteria mentioned, were not present.

Areal density of nozzles

This feature of the invention relates to the density, by area, of the nozzles 3 on the printhead. With reference to Figure 1, the nozzle plate 2 has an upper surface 50, and the present aspect of the invention relates to the packing density of nozzles 3 on that surface. More specifically, the areal density of the nozzles 3 on that surface 50 is over 10,000 nozzles per square cm of surface area.

In one preferred embodiment, the areal density exceeds 20,000 nozzles 3 per square cm of surface 50 area, while in another preferred embodiment, the areal density exceeds 40,000 nozzles per square cm. In a preferred embodiment, the areal density is 48 828 nozzles per square cm.

When referring to the areal density, each nozzle 3 is taken to include the drive-circuitry corresponding to the nozzle, which consists, typically, of a drive transistor, a shift register, an enable gate and clock regeneration circuitry (this circuitry not being specifically identified).

With reference to Figure 43 in which a single unit cell 1 is shown, the dimensions of the unit cell are shown as being 32 microns in width by 64 microns in **length**. The nozzle 3 of the next successive row of nozzles (not shown) immediately juxtaposes this nozzle, so that, as a result of the dimension of the outer periphery of the printhead chip, there are 48,828 nozzles 3 per square cm. This is about 85 times the nozzle areal density of a typical thermal ink jet printhead, and roughly 400 times the nozzle areal density of a piezoelectric printhead.

The main advantage of a high areal density is low manufacturing cost, as the devices are batch fabricated on silicon wafers of a particular size.

The more nozzles 3 that can be accommodated in a square cm of substrate, the more nozzles can be fabricated in a single batch, which typically consists of one wafer. The cost of manufacturing a CMOS plus MEMS wafer of the type used in the printhead of the present invention is, to some extent, independent of the nature of patterns that are formed on it. Therefore if the patterns are relatively small, a relatively large number of nozzles 3 can be included. This allows more nozzles 3 and more printheads to be manufactured for the same cost than in cases where the nozzles had a lower areal density. The cost is directly proportional to the area taken by the nozzles 3.

Bubble formation on opposite sides of heater element

According to the present feature, the heater 14 is configured so that when a bubble 12 forms in the ink 11 (bubble forming liquid), it forms on both sides of the heater element 10. Preferably, it forms so as to surround the heater element 10 where the element is in the form of a suspended beam.

The formation of a bubble 12 on both sides of the heater element 10 as opposed to on one side only, can be understood with reference to Figures 45 and 46. In the first of these figures, the heater element 10 is adapted for the bubble 12 to be formed only on one side as, while in the second of these figures, the element is adapted for the bubble 12 to be formed on both sides, as shown.

In a configuration such as that of Figure 45, the reason that the bubble 12 forms on only one side of the heater element 10 is because the element is embedded in a substrate 51, so that the bubble cannot be formed on the particular side corresponding to the substrate. By contrast, the bubble 12 can form on both sides in the configuration of Figure 46 as the heater element 10 here is suspended.

Of course where the heater element 10 is in the form of a suspended beam as described above in relation to Figure 1, the bubble 12 is allowed to form so as to surround the suspended beam element.

The advantage of the bubble 12 forming on both sides is the higher efficiency that is achievable. This is due to a reduction in heat that is wasted in heating solid materials in the vicinity of the heater element 10, which do not contribute to formation of a bubble 12. This is illustrated in Figure 45, where the arrows 52 indicate the movements of heat into the solid substrate 51. The amount of heat lost to the substrate 51 depends on the thermal conductivity of the solid materials of the substrate relative to that of the ink 11, which may be water based. As the thermal conductivity of water is relatively low, more than half of the heat can be expected to be absorbed by the substrate 51 rather than by the ink 11.

Prevention of cavitation

As described above, after a bubble 12 has been formed in a printhead according to an embodiment of the present invention, the bubble collapses towards a point of collapse 17. According to the feature presently being addressed, the heater elements 10 are configured to form the bubbles 12 so that the points of collapse

17 towards which the bubbles collapse, are at positions spaced from the heater elements. Preferably, the printhead is configured so that there is no solid material at such points of collapse 17. In this way cavitation, being a major problem in prior art thermal ink jet devices, is largely eliminated.

- 5 Referring to Figure 48, in a preferred embodiment, the heater elements 10 are configured to have parts 53 which define gaps (represented by the arrow 54), and to form the bubbles 12 so that the points of collapse 17 to which the bubbles collapse are located at such gaps. The advantage of this feature is that it substantially avoids cavitation damage to the heater elements 10 and other solid material.
- 10 In a standard prior art system as shown schematically in Figure 47, the heater element 10 is embedded in a substrate 55, with an insulating layer 56 over the element, and a protective layer 57 over the insulating layer. When a bubble 12 is formed by the element 10, it is formed on top of the element. When the bubble 12 collapses, as shown by the arrows 58, all of the energy of the bubble collapse is $\square$ luminu onto a very small point of collapse 17. If the protective layer 57 were absent, then the mechanical forces due to the cavitation
- 15 that would result from the $\square$ luminu of this energy to the point of collapse 17, could chip away or erode the heater element 10. However, this is prevented by the protective layer 57.

- Typically, such a protective layer 57 is of tantalum, which oxidizes to form a very hard layer of tantalum pentoxide (Ta_2O_5). Although no known materials can fully resist the effects of cavitation, if the tantalum
- 20 pentoxide should be chipped away due to the cavitation, then oxidation will again occur at the underlying tantalum metal, so as to effectively repair the tantalum pentoxide layer.

- Although the tantalum pentoxide functions relatively well in this regard in known thermal ink jet systems, it has certain disadvantages. One significant disadvantage is that, in effect, virtually the whole protective layer
- 25 57 (having a thickness indicated by the reference numeral 59) must be heated in order to transfer the required energy into the ink 11, to heat it so as to form a bubble 12. This layer 57 has a high thermal mass due to the very high atomic weight of the tantalum, and this reduces the efficiency of the heat transfer. Not only does this increase the amount of heat which is required at the level designated 59 to raise the temperature at the level designated 60 sufficiently to heat the ink 11, but it also results in a substantial thermal loss to take place
- 30 in the directions indicated by the arrows 61. This disadvantage would not be present if the heater element 10 was merely supported on a surface and was not covered by the protective layer 57.

- According to the feature presently under discussion, the need for a protective layer 57, as described above, is avoided by generating the bubble 12 so that it collapses, as illustrated in Figure 48, towards a point of
- 35 collapse 17 at which there is no solid material, and more particularly where there is the gap 54 between parts 53 of the heater element 10. As there is merely the ink 11 itself in this location (prior to bubble generation), there is no material that can be eroded here by the effects of cavitation. The temperature at the point of collapse 17 may reach many thousands of degrees C, as is demonstrated by the phenomenon of sonoluminescence. This will break down the ink components at that point. However, the volume of extreme
- 40 temperature at the point of collapse 17 is so small that the destruction of ink components in this volume is not significant.

The generation of the bubble 12 so that it collapses towards a point of collapse 17 where there is no solid material can be achieved using heater elements 10 corresponding to that represented by the part 10.34 of the mask shown in Figure 34. The element represented is symmetrical, and has a hole represented by the
 5 reference numeral 63 at its center. When the element is heated, the bubble forms around the element (as indicated by the dashed line 64) and then grows so that, instead of being of annular (doughnut) shape as illustrated by the dashed lines 64 and 65) it spans the element including the hole 63, the hole then being filled with the vapor that forms the bubble. The bubble 12 is thus substantially disc-shaped. When it collapses, the collapse is directed so as to minimize the surface tension surrounding the bubble 12. This involves the
 10 bubble shape moving towards a spherical shape as far as is permitted by the dynamics that are involved. This, in turn, results in the point of collapse being in the region of the hole 63 at the center of the heater element 10, where there is no solid material.

The heater element 10 represented by the part 10.31 of the mask shown in Figure 31 is configured to achieve
 15 a similar result, with the bubble generating as indicated by the dashed line 66, and the point of collapse to which the bubble collapses being in the hole 67 at the center of the element.

The heater element 10 represented as the part 10.36 of the mask shown in Figure 36 is also configured to achieve a similar result. Where the element 10.36 is dimensioned such that the hole 68 is small,
 20 manufacturing inaccuracies of the heater element may affect the extent to which a bubble can be formed such that its point of collapse is in the region defined by the hole. For example, the hole may be as little as a few microns across. Where high levels of accuracy in the element 10.36 cannot be achieved, this may result in bubbles represented as 12.36 that are somewhat lopsided, so that they cannot be directed towards a point of collapse within such a small region. In such a case, with regard to the heater element represented in Figure
 25 36, the central loop 49 of the element can simply be omitted, thereby increasing the size of the region in which the point of collapse of the bubble is to fall.

Chemical vapor deposited nozzle plate, and thin nozzle plates

30 The nozzle ejection aperture 5 of each unit cell 1 extends through the nozzle plate 2, the nozzle plate thus constituting a structure which is formed by chemical vapor deposition (CVD). In various preferred embodiments, the CVD is of silicon nitride, silicon dioxide or oxi-nitride.

The advantage of the nozzle plate 2 being formed by CVD is that it is formed in place without the
 35 requirement for assembling the nozzle plate to other components such as the walls 6 of the unit cell 1. This is an important advantage because the assembly of the nozzle plate 2 that would otherwise be required can be difficult to effect and can involve potentially complex issues. Such issues include the potential mismatch of thermal expansion between the nozzle plate 2 and the parts to which it would be assembled, the difficulty of successfully keeping components aligned to each other, keeping them planar, and so on, during the curing
 40 process of the adhesive which bonds the nozzle plate 2 to the other parts.

The issue of thermal expansion is a significant factor in the prior art, which limits the size of ink jets that can be manufactured. This is because the difference in the coefficient of thermal expansion between, for example, a nickel nozzle plate and a substrate to which the nozzle plate is connected, where this substrate is of silicon, is quite substantial. Consequently, over as small a distance as that occupied by, say, 1000 nozzles, the relative thermal expansion that occurs between the respective parts, in being heated from the ambient temperature to the curing temperature required for bonding the parts together, can cause a dimension mismatch of significantly greater than a whole nozzle length. This would be significantly detrimental for such devices.

Another problem addressed by the features of the invention presently under discussion, at least in embodiments thereof, is that, in prior art devices, nozzle plates that need to be assembled are generally laminated onto the remainder of the printhead under conditions of relatively high stress. This can result in breakages or undesirable deformations of the devices. The depositing of the nozzle plate 2 by CVD in embodiments of the present invention avoids this.

A further advantage of the present features of the invention, at least in embodiments thereof, is their compatibility with existing semiconductor manufacturing processes. Depositing a nozzle plate 2 by CVD allows the nozzle plate to be included in the printhead at the scale of normal silicon wafer production, using processes normally used for semi-conductor manufacture.

Existing thermal ink jet or bubble jet systems experience pressure transients, during the bubble generation phase, of up to 100 atmospheres. If the nozzle plates 2 in such devices were applied by CVD, then to withstand such pressure transients, a substantial thickness of CVD nozzle plate would be required. As would be understood by those skilled in the art, such thicknesses of deposited nozzle plates would give rise certain problems as discussed below.

For example, the thickness of nitride sufficient to withstand a 100 atmosphere pressure in the nozzle chamber 7 may be, say, 10 microns. With reference to Figure 49, which shows a unit cell 1 that is not in accordance with the present invention, and which has such a thick nozzle plate 2, it will be appreciated that such a thickness can result in problems relating to drop ejection. In this case, due to the thickness of nozzle plate 2, the fluidic drag exerted by the nozzle 3 as the ink 11 is ejected therethrough results in significant losses in the efficiency of the device.

Another problem that would exist in the case of such a thick nozzle plate 2, relates to the actual etching process. This is assuming that the nozzle 3 is etched, as shown, perpendicular to the wafer 8 of the substrate portion, for example using a standard plasma etching. This would typically require more than 10 microns of resist 69 to be applied. To expose that thickness of resist 69, the required level of resolution becomes difficult to achieve, as the focal depth of the stepper that is used to expose the resist is relatively small. Although it would be possible to expose this relevant depth of resist 69 using x-rays, this would be a relatively costly process.

A further problem that would exist with such a thick nozzle plate 2 in a case where a 10 micron thick layer of nitride were CVD deposited on a silicon substrate wafer, is that, because of the difference in thermal expansion between the CVD layer and the substrate, as well as the inherent stress of within thick deposited layer, the wafer could be caused to bow to such a degree that further steps in the lithographic process would become impractical. Thus, a 10 micron thick nozzle plate 2 is possible but (unlike in the present invention), disadvantageous.

With reference to Figure 50, in a Memjet thermal ink ejection device according to an embodiment of the present invention, the CVD nitride nozzle plate layer 2 is only 2 microns thick. Therefore the fluidic drag through the nozzle 3 is not particularly significant and is therefore not a major cause of loss.

Furthermore, the etch time, and the resist thickness required to etch nozzles 3 in such a nozzle plate 2, and the stress on the substrate wafer 8, will not be excessive.

The relatively thin nozzle plate 2 in this invention is enabled as the pressure generated in the chamber 7 is only approximately 1 atmosphere and not 100 atmospheres as in prior art devices, as mentioned above.

There are many factors which contribute to the significant reduction in pressure transient required to eject drops 16 in this system. These include:

1. small size of chamber 7;
2. accurate fabrication of nozzle 3 and chamber 7;
3. stability of drop ejection at low drop velocities;
4. very low fluidic and thermal crosstalk between nozzles 3;
5. optimum nozzle size to bubble area;
6. low fluidic drag through thin (2 micron) nozzle 3;
7. low pressure loss due to ink ejection through the inlet 9;
8. self-cooling operation.

As mentioned above in relation the process described in terms of Figures 6 to 31, the etching of the 2-micron thick nozzle plate layer 2 involves two relevant stages. One such stage involves the etching of the region designated 45 in Figures 24 and 50, to form a recess outside of what will become the nozzle rim 4. The other such stage involves a further etch, in the region designated 46 in Figures 26 and 50, which actually forms the ejection aperture 5 and finishes the rim 4.

Nozzle plate thicknesses

As addressed above in relation to the formation of the nozzle plate 2 by CVD, and with the advantages described in that regard, the nozzle plates in the present invention are thinner than in the prior art. More particularly, the nozzle plates 2 are less than 10 microns thick. In one preferred embodiment, the nozzle plate 2 of each unit cell 1 is less than 5 microns thick, while in another preferred embodiment, it is less than 2.5 microns thick. Indeed, a preferred thickness for the nozzle plate 2 is 2 microns thick.

Heater elements formed in different layers

According to the present feature, there is a plurality of heater elements 10 disposed within the chamber 7 of each unit cell 1. The elements 10, which are formed by the lithographic process as described above in relation to Figure 6 to 31, are formed in respective layers.

In preferred embodiments, as shown in Figures 38, 40 and 51, the heater elements 10.1 and 10.2 in the chamber 7, are of different sizes relative to each other.

10

Also as will be appreciated with reference to the above description of the lithographic process, each heater element 10.1, 10.2 is formed by at least one step of that process, the lithographic steps relating to each one of the elements 10.1 being distinct from those relating to the other element 10.2.

15 The elements 10.1, 10.2 are preferably sized relative to each other, as reflected schematically in the diagram of Figure 51, such that they can achieve binary weighted ink drop volumes, that is, so that they can cause ink drops 16 having different, binary weighted volumes to be ejected through the nozzle 3 of the particular unit cell 1. The achievement of the binary weighting of the volumes of the ink drops 16 is determined by the relative sizes of the elements 10.1 and 10.2. In Figure 51, the area of the bottom heater element 10.2 in contact with the ink 11 is twice that of top heater element 10.1.

20

One known prior art device, patented by Canon, and illustrated schematically in Figure 52, also has two heater elements 10.1 and 10.2 for each nozzle, and these are also sized on a binary basis (i.e. to produce drops 16 with binary weighted volumes). These elements 10.1, 10.2 are formed in a single layer, adjacent to each other in the nozzle chamber 7. It will be appreciated that the bubble 12.1 formed by the small element 10.1, only, is relatively small, while that 12.2 formed by the large element 10.2, only, is relatively large. The bubble generated by the combined effects of the two elements, when they are actuated simultaneously, is designated 12.3. Three differently sized ink drops 16 will be caused to be ejected by the three respective bubbles 12.1, 12.2 and 12.3.

30

It will be appreciated that the size of the elements 10.1 and 10.2 themselves are not required to be binary weighted to cause the ejection of drops 16 having different sizes or the ejection of useful combinations of drops. Indeed, the binary weighting may well not be represented precisely by the area of the elements 10.1, 10.2 themselves. In sizing the elements 10.1, 10.2 to achieve binary weighted drop volumes, the fluidic characteristics surrounding the generation of bubbles 12, the drop dynamics characteristics, the quantity of liquid that is drawing back into the chamber 7 from the nozzle 3 once a drop 16 has broken off, and so forth, must be considered. Accordingly, the actual ratio of the surface areas of the elements 10.1, 10.2, or the performance of the two heaters, needs to be adjusted in practice to achieve the desired binary weighted drop volumes.

40

Where the size of the heater elements 10.1, 10.2 is fixed and where the ratio of their surface areas is therefore fixed, the relative sizes of ejected drops 16 may be adjusted by adjusting the supply voltages to the two elements. This can also be achieved by adjusting the duration of the operation pulses of the elements 10.1, 10.2 - i.e. their pulse widths. However, the pulse widths cannot exceed a certain amount of time, because
5 once a bubble 12 has nucleated on the surface of an element 10.1, 10.2, then any duration of pulse width after that time will be of little or no effect.

On the other hand, the low thermal mass of the heater elements 10.1, 10.2 allows them to be heated to reach, very quickly, the temperature at which bubbles 12 are formed and at which drops 16 are ejected. While the
10 maximum effective pulse width is limited, by the onset of bubble nucleation, typically to around 0.5 microseconds, the minimum pulse width is limited only by the available current drive and the current density that can be tolerated by the heater elements 10.1, 10.2. .

As shown in Figure 51, the two heaters elements 10.1, 10.2 are connected to two respective drive circuits 70.
15 Although these circuits 70 may be identical to each other, a further adjustment can be effected by way of these circuits, for example by sizing the drive transistor (not shown) connected to the lower element 10.2, which is the high current element, larger than that connected to the upper element 10.1. If, for example, the relative currents provided to the respective elements 10.1, 10.2 are in the ratio 2:1, the drive transistor of the circuit 70 connected to the lower element 10.2 would typically be twice the width of the drive transistor (also
20 not shown) of the circuit 70 connected to the other element 10.1.

In the prior art described in relation to Figure 52, the heater elements 10.1, 10.2, which are in the same layer, are produced simultaneously in the same step of the lithographic manufacturing process. In the embodiment of the present invention illustrated in Figure 51, the two heaters elements 10.1, 10.2, as mentioned above, are
25 formed one after the other. Indeed, as described in the process illustrated with reference to Figures 6 to 31, the material to form the element 10.2 is deposited and is then etched in the lithographic process, whereafter a sacrificial layer 39 is deposited on top of that element, and then the material for the other element 10.1 is deposited so that the sacrificial layer is between the two heater element layers. The layer of the second element 10.1 is etched by a second lithographic step, and the sacrificial layer 39 is removed.

30 Referring once again to the different sizes of the heater elements 10.1 and 10.2, as mentioned above, this has the advantage that it enables the elements to be sized so as to achieve multiple, binary weighted drop volumes from one nozzle 3.

35 It will be appreciated that, where multiple drop volumes can be achieved, and especially if they are binary weighted, then photographic quality can be obtained while using fewer printed dots, and at a lower print resolution.

Furthermore, under the same circumstances, higher speed printing can be achieved. That is, instead of just
40 ejecting one drop 14 and then waiting for the nozzle 3 to refill, the equivalent of one, two, or three drops might be ejected. Assuming that the available refill speed of the nozzle 3 is not a limiting factor, ink ejection,

and hence printing, up to three times faster, may be achieved. In practice, however, the nozzle refill time will typically be a limiting factor. In this case, the nozzle 3 will take slightly longer to refill when a triple volume of drop 16 (relative to the minimum size drop) has been ejected than when only a minimum volume drop has been ejected. However, in practice it will not take as much as three times as long to refill. This is due to the inertial dynamics and the surface tension of the ink 11.

Referring to Figure 53, there is shown, schematically, a pair of adjacent unit cells 1.1 and 1.2, the cell on the left 1.1 representing the nozzle 3 after a larger volume of drop 16 has been ejected, and that on the right 1.2, after a drop of smaller volume has been ejected. In the case of the larger drop 16, the curvature of the air bubble 71 that has formed inside the partially emptied nozzle 3.1 is larger than in the case of air bubble 72 that has formed after the smaller volume drop has been ejected from the nozzle 3.2 of the other unit cell 1.2.

The higher curvature of the air bubble 71 in the unit cell 1.1 results in a greater surface tension force which tends to draw the ink 11, from the refill passage 9 towards the nozzle 3 and into the chamber 7.1, as indicated by the arrow 73. This gives rise to a shorter refilling time. As the chamber 7.1 refills, it reaches a stage, designated 74, where the condition is similar to that in the adjacent unit cell 1.2. In this condition, the chamber 7.1 of the unit cell 1.1 is partially refilled and the surface tension force has therefore reduced. This results in the refill speed slowing down even though, at this stage, when this condition is reached in that unit cell 1.1, a flow of liquid into the chamber 7.1, with its associated momentum, has been established. The overall effect of this is that, although it takes longer to completely fill the chamber 7.1 and nozzle 3.1 from a time when the air bubble 71 is present than from when the condition 74 is present, even if the volume to be refilled is three times larger, it does not take as much as three times longer to refill the chamber 7.1 and nozzle 3.1.

25 Heater elements formed from materials constituted by elements with low atomic-numbers

This feature involves the heater elements 10 being formed of solid material, at least 90% of which, by weight, is constituted by one or more periodic elements having an atomic number below 50. In a preferred embodiment the atomic weight is below 30, while in another embodiment the atomic weight is below 23.

The advantage of a low atomic number is that the atoms of that material have a lower mass, and therefore less energy is required to raise the temperature of the heater elements 10. This is because, as will be understood by those skilled in the art, the temperature of an article is essentially related to the state of movement of the nuclei of the atoms. Accordingly, it will require more energy to raise the temperature, and thereby induce such a nucleus movement, in a material with atoms having heavier nuclei than in a material having atoms with lighter nuclei.

Materials currently used for the heater elements of thermal ink jet systems include tantalum aluminum alloy (for example used by Hewlett Packard), and hafnium boride (for example used by Canon). Tantalum and hafnium have atomic numbers 73 and 72, respectively, while the material used in the Memjet heater elements 10 of the present invention is titanium nitride. Titanium has an atomic number of 22 and nitrogen has an

atomic number of 7, these materials therefore being significantly lighter than those of the relevant prior art device materials.

Boron and aluminum, which form part of hafnium boride and tantalum aluminum, respectively, like nitrogen, are relatively light materials. However, the density of tantalum nitride is 16.3 g/cm^3 , while that of titanium nitride (which includes titanium in place of tantalum) is 5.22 g/cm^3 . Thus, because tantalum nitride has a density of approximately three times that of the titanium nitride, titanium nitride will require approximately three time less energy to heat than tantalum nitride. As will be understood by a person skilled in the art, the difference in energy in a material at two different temperatures is represented by the following equation:

10

$$E = \Delta T \times C_p \times \text{VOL} \times \rho,$$

where ΔT represents the temperature difference, C_p is the specific heat capacity, VOL is the volume, and ρ is the density of the material. Although the density is not determined only by the atomic numbers as it is also a function of the lattice constants, the density is strongly influenced by the atomic numbers of the materials involved, and hence is a key aspect of the feature under discussion.

Low heater mass

20 This feature involves the heater elements 10 being configured such that the mass of solid material of each heater element that is heated above the boiling point of the bubble forming liquid (i.e. the ink 11 in this embodiment) to heat the ink so as to generate bubbles 12 therein to cause an ink drop 16 to be ejected, is less than 10 nanograms.

25 In one preferred embodiment, the mass is less than 2 nanograms, in another embodiment the mass is less than 500 picograms, and in yet another embodiment the mass is less than 250 picograms.

The above feature constitutes a significant advantage over prior art inkjet systems, as it results in an increased efficiency as a result of the reduction in energy lost in heating the solid materials of the heater elements 10.

30 This feature is enabled due to the use of heater element materials having low densities, due to the relatively small size of the elements 10, and due to the heater elements being in the form of suspended beams which are not embedded in other materials, as illustrated, for example, in Figure 1.

Figure 34 shows the shape, in plan view, of a mask for forming the heater structure of the embodiment of the printhead shown in Figure 33. Accordingly, as Figure 34 represents the shape of the heater element 10 of that embodiment, it is now referred to in discussing that heater element. The heater element as represented by reference numeral 10.34 in Figure 34 has just a single loop 49 which is 2 microns wide and 0.25 microns thick. It has a 6 micron outer radius and a 4 micron inner radius. The total heater mass is 82 picograms. The corresponding element 10.2 similarly represented by reference numeral 10.39 in Figure 39 has a mass of 229.6 picograms and that heater element represented by reference numeral 10.36 in Figure 36 has a mass of 225.5 picograms.

When the elements 10.1, 10.2 represented in Figures 38 and 39, for example, are used in practice, the total mass of material of each such element which is in thermal contact with the ink 11 (being the bubble forming liquid in this embodiment) that is raised to a temperature above that of the boiling point of the ink, will be slightly higher than the above discussed masses as the elements will be coated with an electrically insulating, chemically inert, thermally conductive material. This coating increases, to some extent, the total mass of material raised to the higher temperature.

Conformally coated heater element

10

This feature involves each element 10 being covered by a conformal protective coating, this coating having been applied to all sides of the element simultaneously so that the coating is seamless. The coating 10, preferably, is electrically non-conductive, is chemically inert and has a high thermal conductivity. In one preferred embodiment, the coating is of aluminium nitride, in another embodiment it is of diamond-like carbon (DLC), and in yet another embodiment it is of boron nitride.

15

Referring to Figures 54 and 55, there are shown schematic representations of a prior art heater element 10 that is not conformally coated as discussed above, but which has been deposited on a substrate 78 and which, in the typical manner, has then been conformally coated on one side with a CVD material, designated 76. In contrast, the coating referred to above in the present instance, as reflected schematically in Figure 56, this coating being designated 77, involves conformally coating the element on all sides simultaneously. However, this conformal coating 77 on all sides can only be achieved if the element 10, when being so coated, is a structure isolated from other structures - i.e. in the form of a suspended beam, so that there is access to all of the sides of the element.

25

It is to be understood that when reference is made to conformally coating the element 10 on all sides, this excludes the ends of the element (suspended beam) which are joined to the electrodes 15 as indicated diagrammatically in Figure 57. In other words, what is meant by conformally coating the element 10 on all sides is, essentially, that the element is fully surrounded by the conformal coating along the length of the element.

30

The primary advantage of conformally coating the heater element 10 may be understood with reference, once again, to Figures 54 and 55. As can be seen, when the conformal coating 76 is applied, the substrate 78 on which the heater element 10 was deposited (i.e. formed) effectively constitutes the coating for the element on the side opposite the conformally applied coating. The depositing of the conformal coating 76 on the heater element 10 which is, in turn, supported on the substrate 78, results in a seam 79 being formed. This seam 79 may constitute a weak point, where oxides and other undesirable products might form, or where delamination may occur. Indeed, in the case of the heater element 10 of Figures 54 and 55, where etching is conducted to separate the heater element and its coating 76 from the substrate 78 below, so as to render the element in the form of a suspended beam, ingress of liquid or hydroxyl ions may result, even though such materials could not penetrate the actual material of the coating 76, or of the substrate 78.

40

The materials mentioned above (i.e. aluminum nitride or diamond-like carbon (DLC)) are suitable for use in the conformal coating 77 of the present invention as illustrated in Figure 56 due to their desirably high thermal conductivities, their high level of chemical inertness, and the fact that they are electrically non-conductive. Another suitable material, for these purposes, is boron nitride, also referred to above. Although the choice of material used for the coating 77 is important in relation to achieving the desired performance characteristics, materials other than those mentioned, where they have suitable characteristics, may be used instead.

10 *Example printer in which the printhead is used*

The components described above form part of a printhead assembly shown in Figure 62 to 69. The printhead assembly 19 is used in a printer system 140 shown in Figure 70. The printhead assembly 19 includes a number of printhead modules 80 shown in detail in Figures 58 to 61. These aspects are described below.

Referring briefly to Figure 44, the array of nozzles 3 shown is disposed on the printhead chip (not shown), with drive transistors, drive shift registers, and so on (not shown), included on the same chip, which reduces the number of connections required on the chip.

Figures 58 and 59 show an exploded view and a non-exploded view, respectively, a printhead module assembly 80 which includes a MEMS printhead chip assembly 81 (also referred to below as a chip). On a typical chip assembly 81 such as that shown, there are 7680 nozzles, which are spaced so as to be capable of printing with a resolution of 1600 dots per inch. The chip 81 is also configured to eject 6 different colors or types of ink 11.

A flexible printed circuit board (PCB) 82 is electrically connected to the chip 81, for supplying both power and data to the chip. The chip 81 is bonded onto a stainless-steel upper layer sheet 83, so as to overlie an array of holes 84 etched in this sheet. The chip 81 itself is a multi-layer stack of silicon which has ink channels (not shown) in the bottom layer of silicon 85, these channels being aligned with the holes 84.

The chip 81 is approximately 1 mm in width and 21 mm in length. This length is determined by the width of the field of the stepper that is used to fabricate the chip 81. The sheet 83 has channels 86 (only some of which are shown as hidden detail) which are etched on the underside of the sheet as shown in Figure 58. The channels 86 extend as shown so that their ends align with holes 87 in a mid-layer 88. The channels 86 align with respective holes 87. The holes 87, in turn, align with channels 89 in a lower layer 90. Each channel 89 carries a different respective color of ink, except for the last channel, designated 91. This last channel 91 is an air channel and is aligned with further holes 92 in the mid-layer 88, which in turn are aligned with further holes 93 in the upper layer sheet 83. These holes 93 are aligned with the inner parts 94 of slots 95 in a top channel layer 96, so that these inner parts are aligned with, and therefore in fluid-flow communication with, the air channel 91, as indicated by the dashed line 97.

The lower layer 90 has holes 98 opening into the channels 89 and channel 91. Compressed filtered air from an air source (not shown) enters the channel 91 through the relevant hole 98, and then passes through the holes 92 and 93 and slots 95, in the mid layer 88, the sheet 83 and the top channel layer 96, respectively, and is then blown into the side 99 of the chip assembly 81, from where it is forced out, at 100, through a nozzle guard 101 which covers the nozzles, to keep the nozzles clear of paper dust. Differently colored inks 11 (not shown) pass through the holes 98 of the lower layer 90, into the channels 89, and then through respective holes 87, then along respective channels 86 in the underside of the upper layer sheet 83, through respective holes 84 of that sheet, and then through the slots 95, to the chip 81. It will be noted that there are just seven of the holes 98 in the lower layer 90 (one for each color of ink and one for the compressed air) via which the ink and air is passed to the chip 81, the ink being directed to the 7680 nozzles on the chip.

Figure 60, in which a side view of the printhead module assembly 80 of Figures 58 and 59 is schematically shown, is now referred to. The center layer 102 of the chip assembly is the layer where the 7680 nozzles and their associated drive circuitry is disposed. The top layer of the chip assembly, which constitutes the nozzle guard 101, enables the filtered compressed air to be directed so as to keep the nozzle guard holes 104 (which are represented schematically by dashed lines) clear of paper dust.

The lower layer 105 is of silicon and has ink channels etched in it. These ink channels are aligned with the holes 84 in the stainless steel upper layer sheet 83. The sheet 83 receives ink and compressed air from the lower layer 90 as described above, and then directs the ink and air to the chip 81. The need to funnel the ink and air from where it is received by the lower layer 90, via the mid-layer 88 and upper layer 83 to the chip assembly 81, is because it would otherwise be impractical to align the large number (7680) of very small nozzles 3 with the larger, less accurate holes 98 in the lower layer 90.

The flex PCB 82 is connected to the shift registers and other circuitry (not shown) located on the layer 102 of chip assembly 81. The chip assembly 81 is bonded by wires 106 onto the PCB flex and these wires are then encapsulated in an epoxy 107. To effect this encapsulating, a dam 108 is provided. This allows the epoxy 107 to be applied to fill the space between the dam 108 and the chip assembly 81 so that the wires 106 are embedded in the epoxy. Once the epoxy 107 has hardened, it protects the wire bonding structure from contamination by paper and dust, and from mechanical contact.

Referring to Figure 62, there is shown schematically, in an exploded view, a printhead assembly 19, which includes, among other components, printhead module assemblies 80 as described above. The printhead assembly 19 is configured for a page-width printer, suitable for A4 or US letter type paper.

The printhead assembly 19 includes eleven of the printhead modules assemblies 80, which are glued onto a substrate channel 110 in the form of a bent metal plate. A series of groups of seven holes each, designated by the reference numerals 111, are provided to supply the 6 different colors of ink and the compressed air to the chip assemblies 81. An extruded flexible ink hose 112 is glued into place in the channel 110. It will be noted that the hose 112 includes holes 113 therein. These holes 113 are not present when the hose 112 is first connected to the channel 110, but are formed thereafter by way of melting, by forcing a hot wire structure

(not shown) through the holes 111, which holes then serve as guides to fix the positions at which the holes 113 are melted. When the printhead assembly 19 is assembled, the holes 113 are in fluid-flow communication with the holes 98 in the lower layer 90 of each printhead module assembly 80, via holes 114 (which make up the groups 111 in the channel 110).

5

The hose 112 defines parallel channels 115 which extend the length of the hose. At one end 116, the hose 112 is connected to ink containers (not shown), and at the opposite end 117, there is provided a channel extrusion cap 118, which serves to plug, and thereby close, that end of the hose.

10 A metal top support plate 119 supports and locates the channel 110 and hose 112, and serves as a back plate for these. The channel 110 and hose 112, in turn, exert pressure onto an assembly 120 which includes flex printed circuits. The plate 119 has tabs 121 which extend through notches 122 in the downwardly extending wall 123 of the channel 110, to locate the channel and plate with respect to each other.

15 An extrusion 124 is provided to locate copper bus bars 125. Although the energy required to operate a printhead according to the present invention is an order of magnitude lower than that of known thermal ink jet printers, there are a total of about 88,000 nozzles in the printhead array, and this is approximately 160 times the number of nozzles that are typically found in typical printheads. As the nozzles in the present invention may be operational (i.e. may fire) on a continuous basis during operation, the total power
20 consumption will be an order of magnitude higher than that in such known printheads, and the current requirements will, accordingly, be high, even though the power consumption per nozzle will be an order of magnitude lower than that in the known printheads. The busbars 125 are suitable for providing for such power requirements, and have power leads 126 soldered to them.

25 Compressible conductive strips 127 are provided to abut with contacts 128 on the upperside, as shown, of the lower parts of the flex PCBs 82 of the printhead module assemblies 80. The PCBs 82 extend from the chip assemblies 81, around the channel 110, the support plate 119, the extrusion 124 and busbars 126, to a position below the strips 127 so that the contacts 128 are positioned below, and in contact with, the strips 127.

30

Each PCB 82 is double-sided and plated-through. Data connections 129 (indicated schematically by dashed lines), which are located on the outer surface of the PCB 82 abut with contact spots 130 (only some of which are shown schematically) on a flex PCB 131 which, in turn, includes a data bus and edge connectors 132 which are formed as part of the flex itself. Data is fed to the PCBs 131 via the edge connectors 132.

35

A metal plate 133 is provided so that it, together with the channel 110, can keep all of the components of the printhead assembly 19 together. In this regard, the channel 110 includes twist tabs 134 which extend through slots 135 in the plate 133 when the assembly 19 is put together, and are then twisted through approximately 45 degrees to prevent them from being withdrawn through the slots.

40

By way of summary, with reference to Figure 68, the printhead assembly 19 is shown in an assembled state. Ink and compressed air are supplied via the hose 112 at 136, power is supplied via the leads 126, and data is provided to the printhead chip assemblies 81 via the edge connectors 132. The printhead chip assemblies 81 are located on the eleven printhead module assemblies 80, which include the PCBs 82.

5

Mounting holes 137 are provided for mounting the printhead assembly 19 in place in a printer (not shown). The effective length of the printhead assembly 19, represented by the distance 138, is just over the width of an A4 page (that is, about 8.5 inches).

10

Referring to Figure 69, there is shown, schematically, a cross-section through the assembled printhead 19. From this, the position of a silicon stack forming a chip assembly 81 can clearly be seen, as can a longitudinal section through the ink and air supply hose 112. Also clear to see is the abutment of the compressible strip 127 which makes contact above with the busbars 125, and below with the lower part of a flex PCB 82 extending from a the chip assembly 81. The twist tabs 134 which extend through the slots 135 in the metal plate 133 can also be seen, including their twisted configuration, represented by the dashed line 139.

15

Printer system

20

Referring to Figure 70, there is shown a block diagram illustrating a printhead system 140 according to an embodiment of the invention.

Shown in the block diagram is the printhead 141, a power supply 142 to the printhead, an ink supply 143, and print data 144 (represented by the arrow) which is fed to the printhead as it ejects ink, at 145, onto print

25

media in the form, for example, of paper 146.

Media transport rollers 147 are provided to transport the paper 146 past the printhead 141. A media pick up mechanism 148 is configured to withdraw a sheet of paper 146 from a media tray 149.

30

The power supply 142 is for providing DC voltage which is a standard type of supply in printer devices.

The ink supply 143 is from ink cartridges (not shown) and, typically various types of information will be provided, at 150, about the ink supply, such as the amount of ink remaining. This information is provided via a system controller 151 which is connected to a user interface 152. The interface 152 typically consists of a number of buttons (not shown), such as a "print" button, "page advance" button, an so on. The system controller 151 also controls a motor 153 that is provided for driving the media pick up mechanism 148 and a motor 154 for driving the media transport rollers 147.

35

40

It is necessary for the system controller 151 to identify when a sheet of paper 146 is moving past the printhead 141, so that printing can be effected at the correct time. This time can be related to a specific time that has elapsed after the media pick up mechanism 148 has picked up the sheet of paper 146. Preferably,

however, a paper sensor (not shown) is provided, which is connected to the system controller 151 so that when the sheet of paper 146 reaches a certain position relative to the printhead 141, the system controller can effect printing. Printing is effected by triggering a print data formatter 155 which provides the print data 144 to the printhead 141. It will therefore be appreciated that the system controller 151 must also interact with the print data formatter 155.

The print data 144 emanates from an external computer (not shown) connected at 156, and may be transmitted via any of a number of different connection means, such as a USB connection, an ETHERNET connection, a IEEE1394 connection otherwise known as firewire, or a parallel connection. A data communications module 157 provides this data to the print data formatter 155 and provides control information to the system controller 151.

Features and advantages of further embodiments

Figures 71 to 94 show further embodiments of unit cells 1 for thermal inkjet printheads, each embodiment having particular functional advantages. These advantages will be discussed in detail below, with reference to each individual embodiment. However, the basic construction of each embodiment is best shown in Figures 72, 74, 76 and 79. The manufacturing process is substantially the same as that described above in relation to Figures 6 to 31 and for consistency; the same reference numerals are used in Figures 71 to 94 to indicate corresponding components. In the interests of brevity, the fabrication stages have been shown for the unit cell of Figure 78 only (see Figures 80 to 90). It will be appreciated that the other unit cells will use the same fabrication stages with different masking. Again, the deposition of successive layers shown in Figures 80 to 90 need not be described in detail below given that the lithographic process largely corresponds to that shown in Figures 6 to 31.

Referring to Figures 71 and 72, the unit cell 1 shown has the chamber 7, ink supply passage 32 and the nozzle rim 4 positioned mid way along the length of the unit cell 1. As best seen in Figure 72, the drive circuitry is partially on one side of the chamber 7 with the remainder on the opposing side of the chamber. The drive circuitry 22 controls the operation of the heater 14 through vias in the integrated circuit metallisation layers of the interconnect 23. The interconnect 23 has a raised metal layer on its top surface. Passivation layer 24 is formed in top of the interconnect 23 but leaves areas of the raised metal layer exposed. Electrodes 15 of the heater 14 contact the exposed metal areas to supply power to the element 10.

Alternatively, the drive circuitry 22 for one unit cell is not on opposing sides of the heater element that it controls. All the drive circuitry 22 for the heater 14 of one unit cell is in a single, undivided area that is offset from the heater. That is, the drive circuitry 22 is partially overlaid by one of the electrodes 15 of the heater 14 that it is controlling, and partially overlaid by one or more of the heater electrodes 15 from adjacent unit cells. In this situation, the center of the drive circuitry 22 is less than 200 microns from the center of the associate nozzle aperture 5. In most Memjet printheads of this type, the offset is less than 100 microns and in many cases less than 50 microns, preferably less than 30 microns.

Configuring the nozzle components so that there is significant overlap between the electrodes and the drive circuitry provides a compact design with high nozzle density (nozzles per unit area of the nozzle plate 2). This also improves the efficiency of the printhead by shortening the length of the conductors from the circuitry to the electrodes. The shorter conductors have less resistance and therefore dissipate less energy.

5

The high degree of overlap between the electrodes 15 and the drive circuitry 22 also allows more vias between the heater material and the CMOS metalization layers of the interconnect 23. As best shown in Figures 79 and 80, the passivation layer 24 has an array of vias to establish an electrical connection with the heater 14. More vias lowers the resistance between the heater electrodes 15 and the interconnect layer 23 which reduces power losses.

10

In Figures 73 and 74, the unit cell 1 is the same as that of Figures 71 and 72 apart from the heater element 10. The heater element 10 has a bubble nucleation section 158 with a smaller cross section than the remainder of the element. The bubble nucleation section 158 has a greater resistance and heats to a temperature above the boiling point of the ink before the remainder of the element 10. The gas bubble nucleates at this region and subsequently grows to surround the rest of the element 10. By controlling the bubble nucleation and growth, the trajectory of the ejected drop is more predictable.

15

The heater element 10 is configured to accommodate thermal expansion in a specific manner. As heater elements expand, they will deform to relieve the strain. Elements such as that shown in Figures 71 and 72 will bow out of the plane of lamination because its thickness is the thinnest cross sectional dimension and therefore has the least bending resistance. Repeated bending of the element can lead to the formation of cracks, especially at sharp corners, which can ultimately lead to failure. The heater element 10 shown in Figures 73 and 74 is configured so that the thermal expansion is relieved by rotation of the bubble nucleation section 158, and slightly splaying the sections leading to the electrodes 15, in preference to bowing out of the plane of lamination. The geometry of the element is such that miniscule bending within the plane of lamination is sufficient to relieve the strain of thermal expansion, and such bending occurs in preference to bowing. This gives the heater element greater longevity and reliability by minimizing bend regions, which are prone to oxidation and cracking.

20

25

Referring to Figures 75 and 76, the heater element 10 used in this unit cell 1 has a serpentine or 'double omega' shape. This configuration keeps the gas bubble centered on the axis of the nozzle. A single omega is a simple geometric shape which is beneficial from a fabrication perspective. However the gap 159 between the ends of the heater element means that the heating of the ink in the chamber is slightly asymmetrical. As a result, the gas bubble is slightly skewed to the side opposite the gap 159. This can in turn affect the trajectory of the ejected drop. The double omega shape provides the heater element with the gap 160 to compensate for the gap 159 so that the symmetry and position of the bubble within the chamber is better controlled and the ejected drop trajectory is more reliable.

30

35

Figure 77 shows a heater element 10 with a single omega shape. As discussed above, the simplicity of this shape has significant advantages during lithographic fabrication. It can be a single current path that is

40

relatively wide and therefore less affected by any inherent inaccuracies in the deposition of the heater material. The inherent inaccuracies of the equipment used to deposit the heater material result in variations in the dimensions of the element. However, these tolerances are fixed values so the resulting variations in the dimensions of a relatively wide component are proportionally less than the variations for a thinner
5 component. It will be appreciated that proportionally large changes of components dimensions will have a greater effect on their intended function. Therefore the performance characteristics of a relatively wide heater element are more reliable than a thinner one.

The omega shape directs current flow around the axis of the nozzle aperture 5. This gives good bubble
10 alignment with the aperture for better ejection of drops while ensuring that the bubble collapse point is not on the heater element 10. As discussed above, this avoids problems caused by cavitation.

Referring to Figures 78 to 91, another embodiment of the unit cell 1 is shown together with several stages of the etching and deposition fabrication process. In this embodiment, the heater element 10 is suspended from
15 opposing sides of the chamber. This allows it to be symmetrical about two planes that intersect along the axis of the nozzle aperture 5. This configuration provides a drop trajectory along the axis of the nozzle aperture 5 while avoiding the cavitation problems discussed above. Figures 92 and 93 show other variations of this type of heater element 10.

Figure 93 shows a unit cell 1 that has the nozzle aperture 5 and the heater element 10 offset from the center of the nozzle chamber 7. Consequently, the nozzle chamber 7 is larger than the previous embodiments. The heater 14 has two different electrodes 15 with the right hand electrode 15 extending well into the nozzle chamber 7 to support one side of the heater element 10. This reduces the area of the vias contacting the electrodes which can increase the electrode resistance and therefore the power losses. However, laterally
25 offsetting the heater element from the ink inlet 31 increases the fluidic drag retarding flow back through the inlet 31 and ink supply passage 32. The fluidic drag through the nozzle aperture 5 comparatively much smaller so little energy is lost to a reverse flow of ink through the inlet when a gas bubble form on the element 10.

The unit cell 1 shown in Figure 94 also has a relatively large chamber 7 which again reduces the surface area of the electrodes in contact with the vias leading to the interconnect layer 23. However, the larger chamber 7 allows several heater elements 10 offset from the nozzle aperture 5. The arrangement shown uses two heater elements 10; one on either side of the chamber 7. Other designs use three or more elements in the chamber. Gas bubbles nucleate from opposing sides of the nozzle aperture and converge to form a single bubble. The
35 bubble formed is symmetrical about at least one plane extending along the nozzle axis. This enhances the control of the symmetry and position of the bubble within the chamber 7 and therefore the ejected drop trajectory is more reliable.

Although the invention is described above with reference to specific embodiments, it will be understood by
40 those skilled in the art that the invention may be embodied in many other forms. For example, although the

above embodiments refer to the heater elements being electrically actuated, non-electrically actuated elements may also be used in embodiments, where appropriate.

CLAIMS

1. An inkjet printhead comprising:
a plurality of nozzles,
5 at least one heater element corresponding to each of the nozzles respectively, the heater element configured for thermal contact with an ejectable liquid; such that,
heating the heater element to a temperature above the ejectable liquid's boiling point forms a vapor bubble that ejects a drop of the ejectable liquid through the nozzle corresponding to that heater element;
wherein,
10 the heater element requires an electrical pulse with a voltage less than 10 volts and a duration less than 1.5 microseconds, to form the vapor bubble that causes the ejection of the drop.
2. A printhead according to claim 1 wherein the electrical pulse has a voltage less than 8 volts and duration less than 1.5 microseconds.
- 15 3. A printhead according to claim 1 wherein the electrical pulse has a voltage less than 5 volts and duration less than 1.5 microseconds.
4. A printhead according to claim 1 wherein the electrical pulse has a voltage less than 3 volts and
20 duration less than 1.5 microseconds.
5. A printhead according to claim 1 being configured to print on a page and to be a page-width printhead.
- 25 6. A printhead according to claim 1 wherein each heater element is in the form of a beam.
7. A printhead according to claim 1 wherein each of the nozzles defines an ejection aperture positioned less than 50 microns from the heater element.
- 30 8. A printhead according to claim 1 configured to receive a supply of the ejectable liquid at an ambient temperature, wherein each heater element is configured such that the energy required to be applied thereto to heat said part to cause the ejection of a said drop is less than the energy required to heat a volume of said ejectable liquid equal to the volume of the said drop, from a temperature equal to said ambient temperature to said boiling point.
- 35 9. A printhead according to claim 1 further comprising a substrate having a substrate surface, wherein the areal density of the nozzles relative to the substrate surface exceeds 10,000 nozzles per square cm of substrate surface.
- 40 10. A printhead according to claim 1 wherein each heater element is a generally planar beam extending between its two ends which are supported such that during use the beam is immersed in the ejectable liquid.

11. A printhead according to claim 1 wherein each heater element is a generally planar structure configured such that the plane of the heater element is parallel to the plane of the nozzle corresponding to that heater element.
- 5
12. A printhead according to claim 1 wherein the heater element has a generally planar structure that is formed by chemical vapor deposition (CVD).
13. A printhead according to claim 1 further comprising a wafer substrate supporting the nozzle and the heater element, the nozzle being formed in a nozzle plate, the nozzle plate being parallel to and spaced less than 10 microns from the wafer substrate.
- 10
14. A printhead according to claim 1 further comprising a plurality of nozzle chambers each corresponding to a respective nozzle, and a plurality of said heater elements being disposed within each chamber, the heater elements within each chamber being formed on different respective layers to one another.
- 15
15. A printhead according to claim 1 wherein each heater element is formed of solid material more than 90% of which, by atomic proportion, is constituted by at least one periodic element having an atomic number below 50.
- 20
16. A printhead according to claim 1 wherein each heater element includes solid material and is configured for a mass of less than 10 nanograms of the solid material of that heater element to be heated to a temperature above said boiling point thereby to heat said part of the bubble forming liquid to a temperature above said boiling point to cause the ejection of a said drop.
- 25
17. A printhead according to claim 1 wherein the electrical pulse has less than 200 nano-Joules of energy.
- 30
18. A printhead according to claim 1 wherein the electrical pulse has less than 150 nano-Joules of energy.
19. A printhead according to claim 1 wherein the electrical pulse has less than 100 nano-Joules of energy.
- 35
20. A printhead according to claim 1 wherein the electrical pulse has less than 80 nano-Joules of energy.

1/66

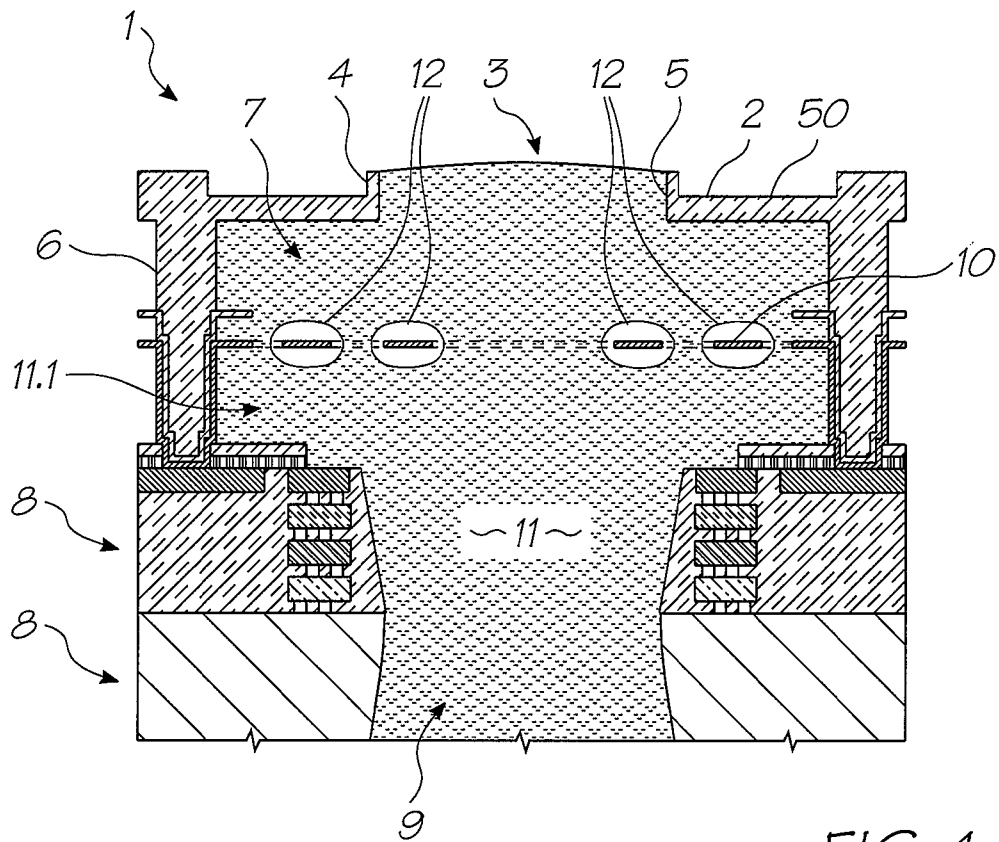


FIG. 1

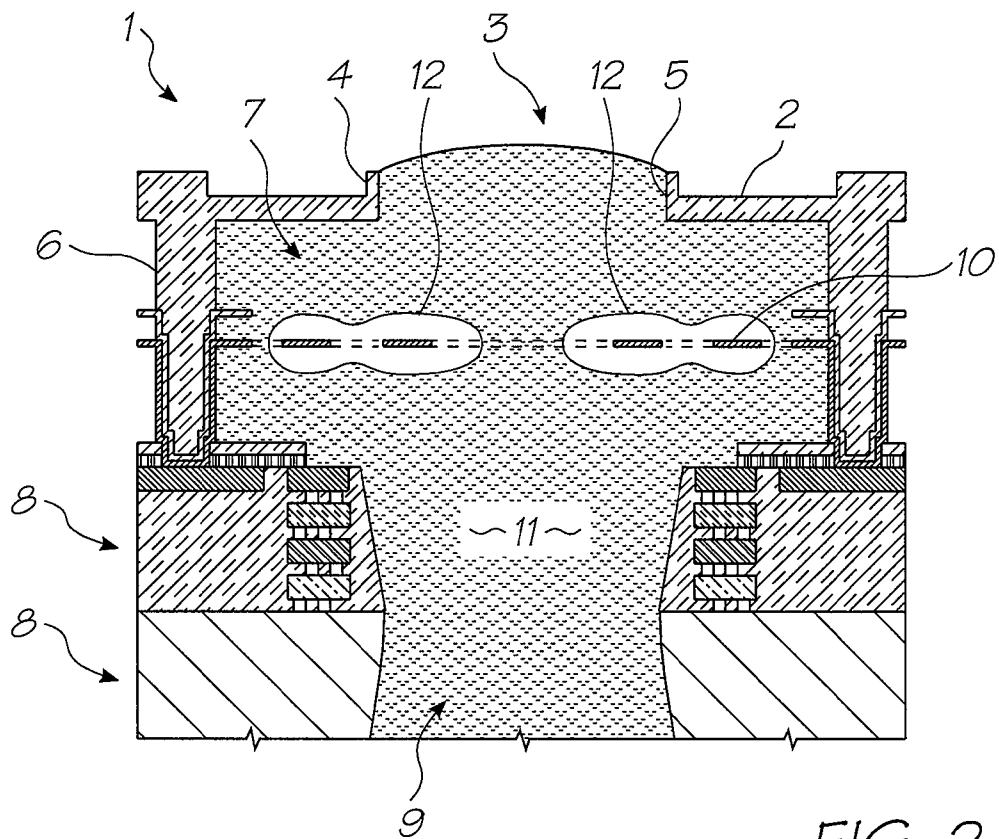


FIG. 2

2/66

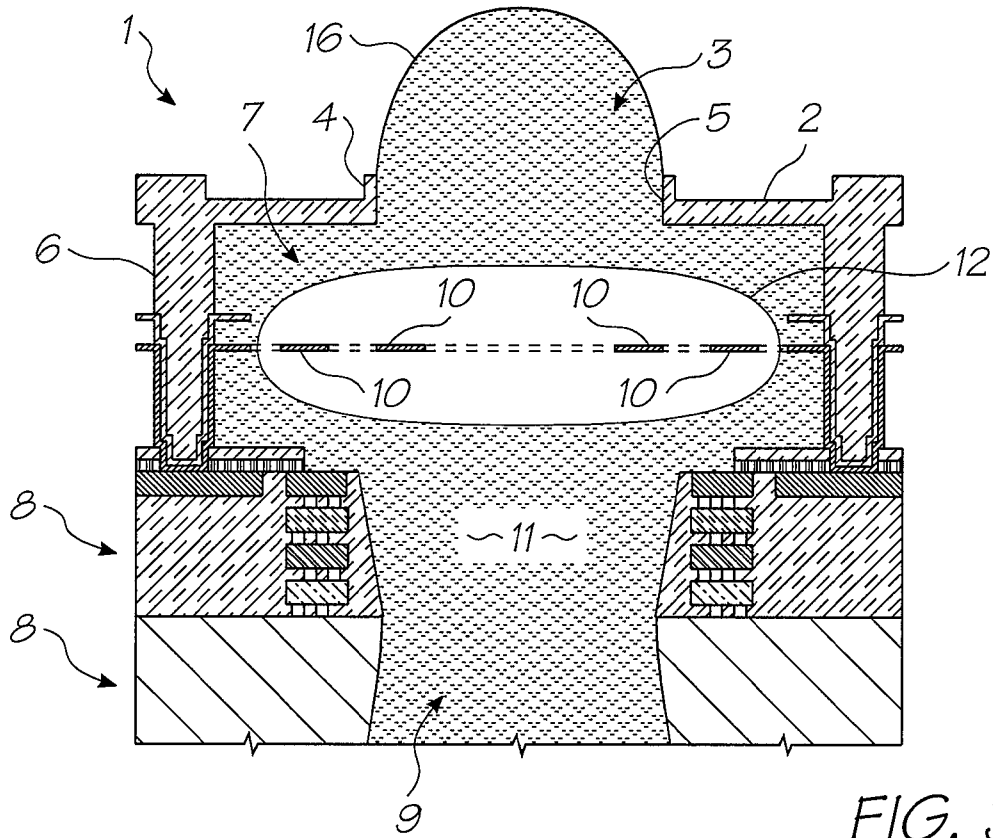


FIG. 3

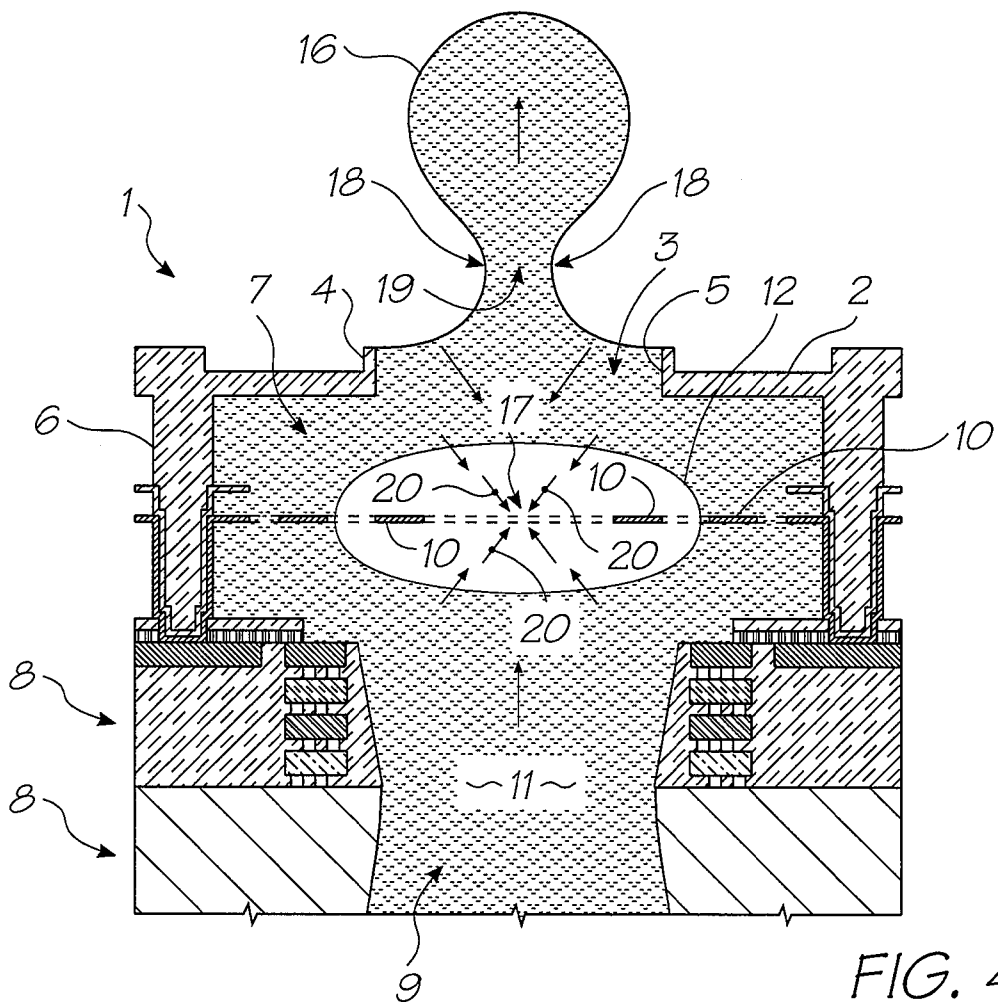


FIG. 4

3/66

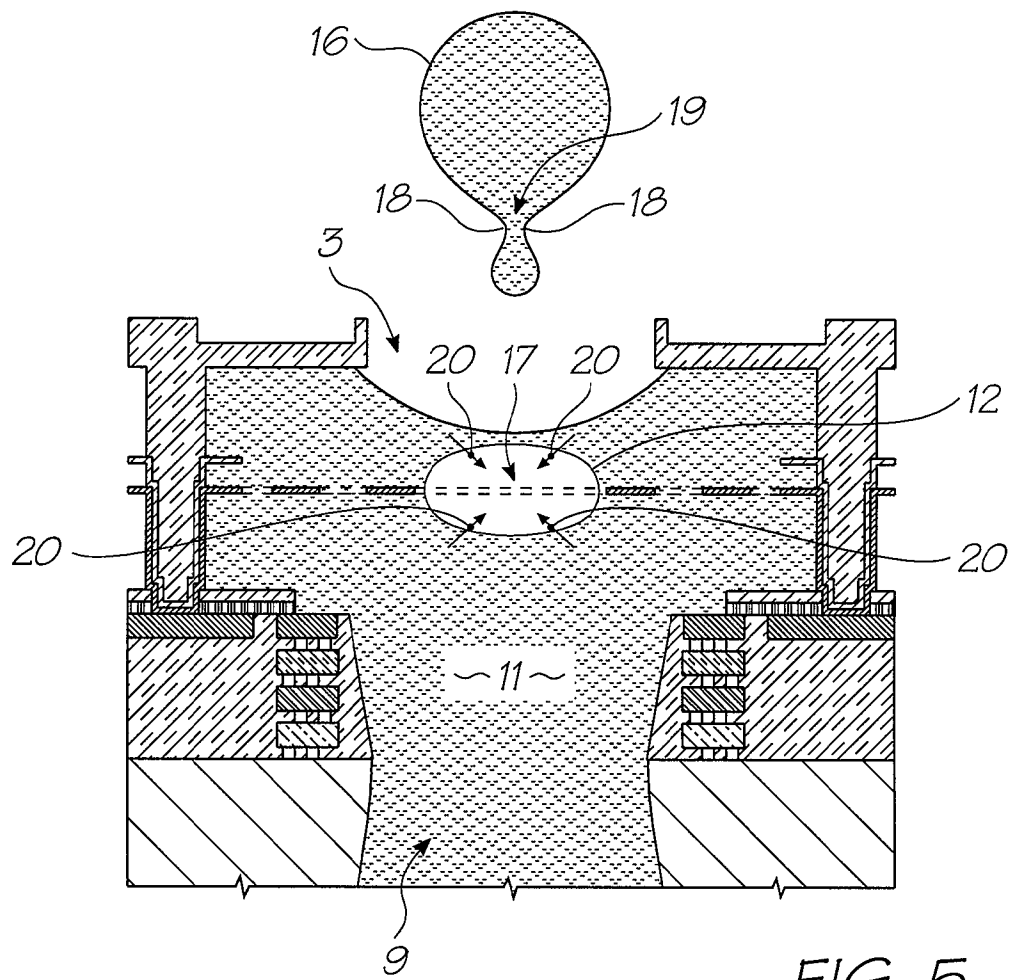


FIG. 5

4/66

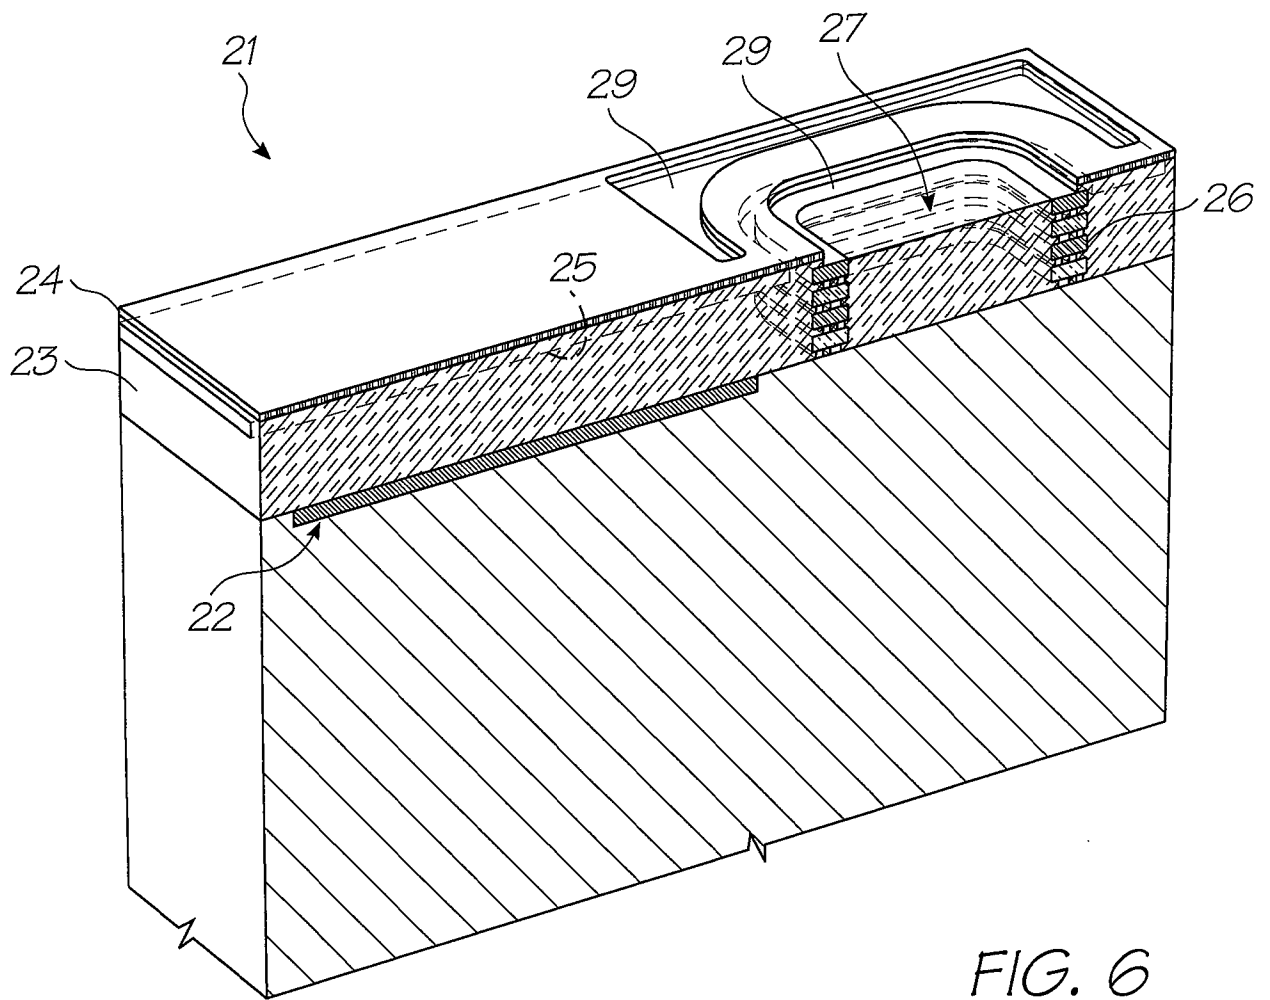


FIG. 6

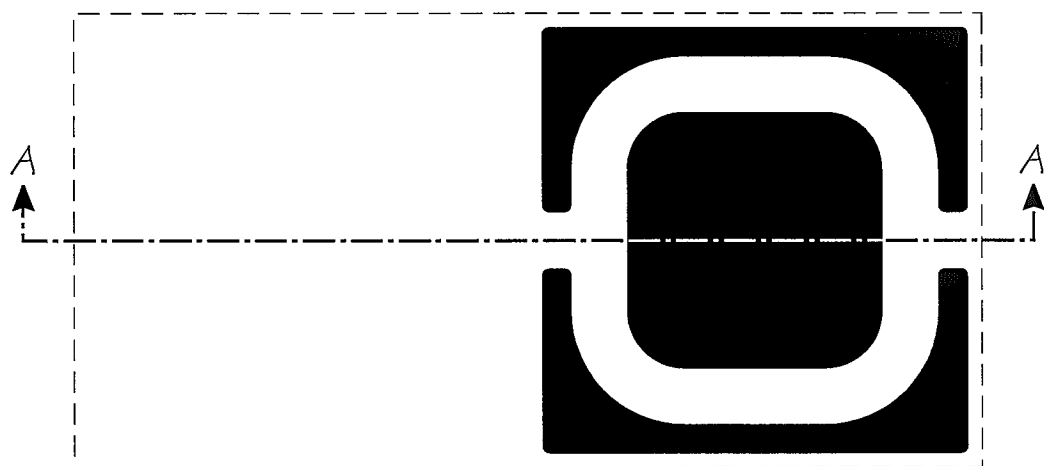


FIG. 7

5/66

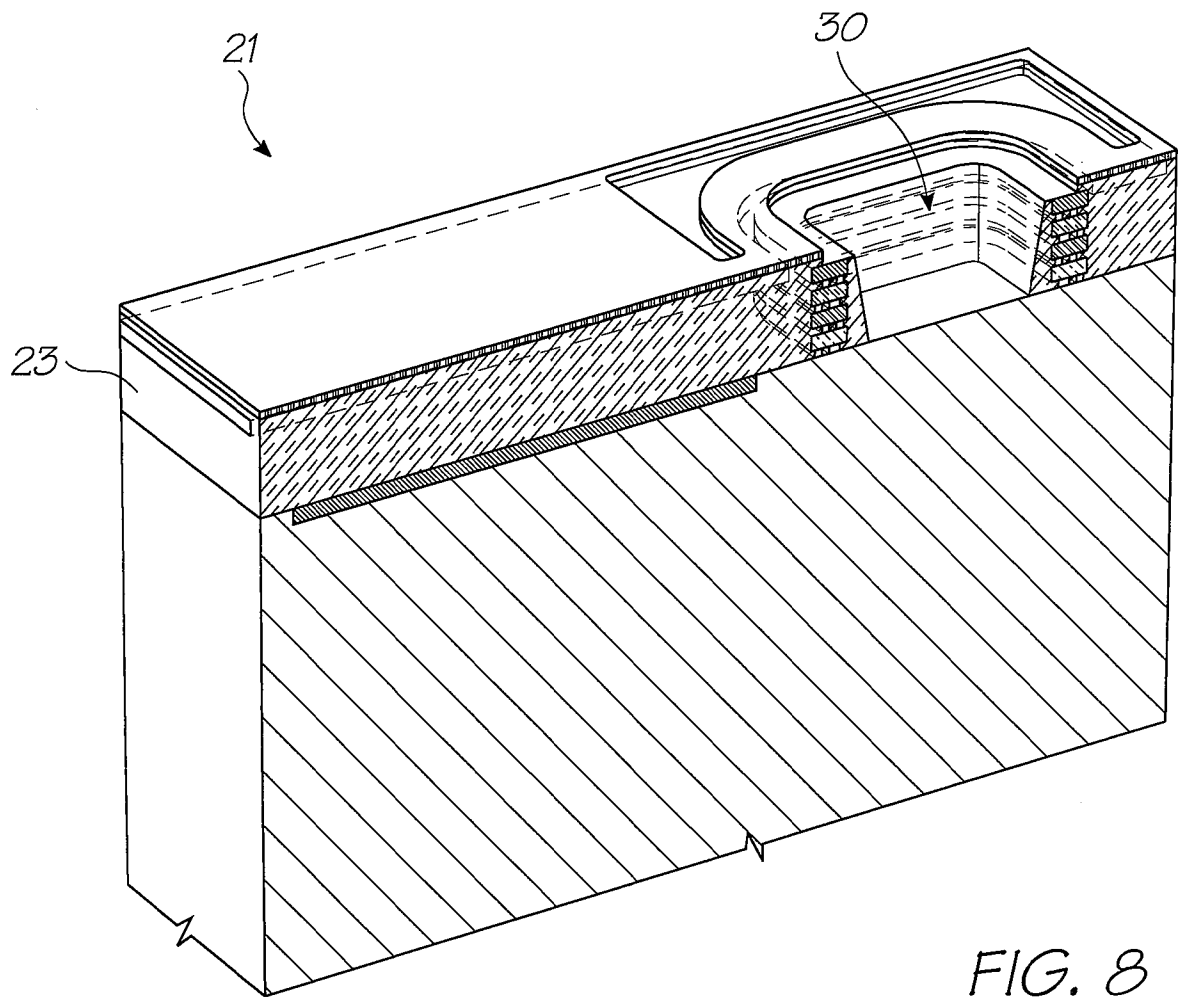


FIG. 8

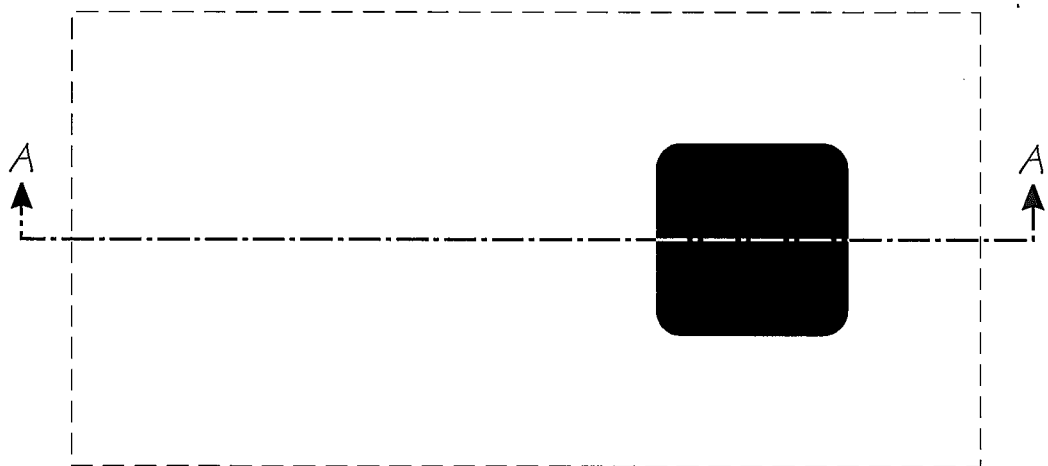


FIG. 9

6/66



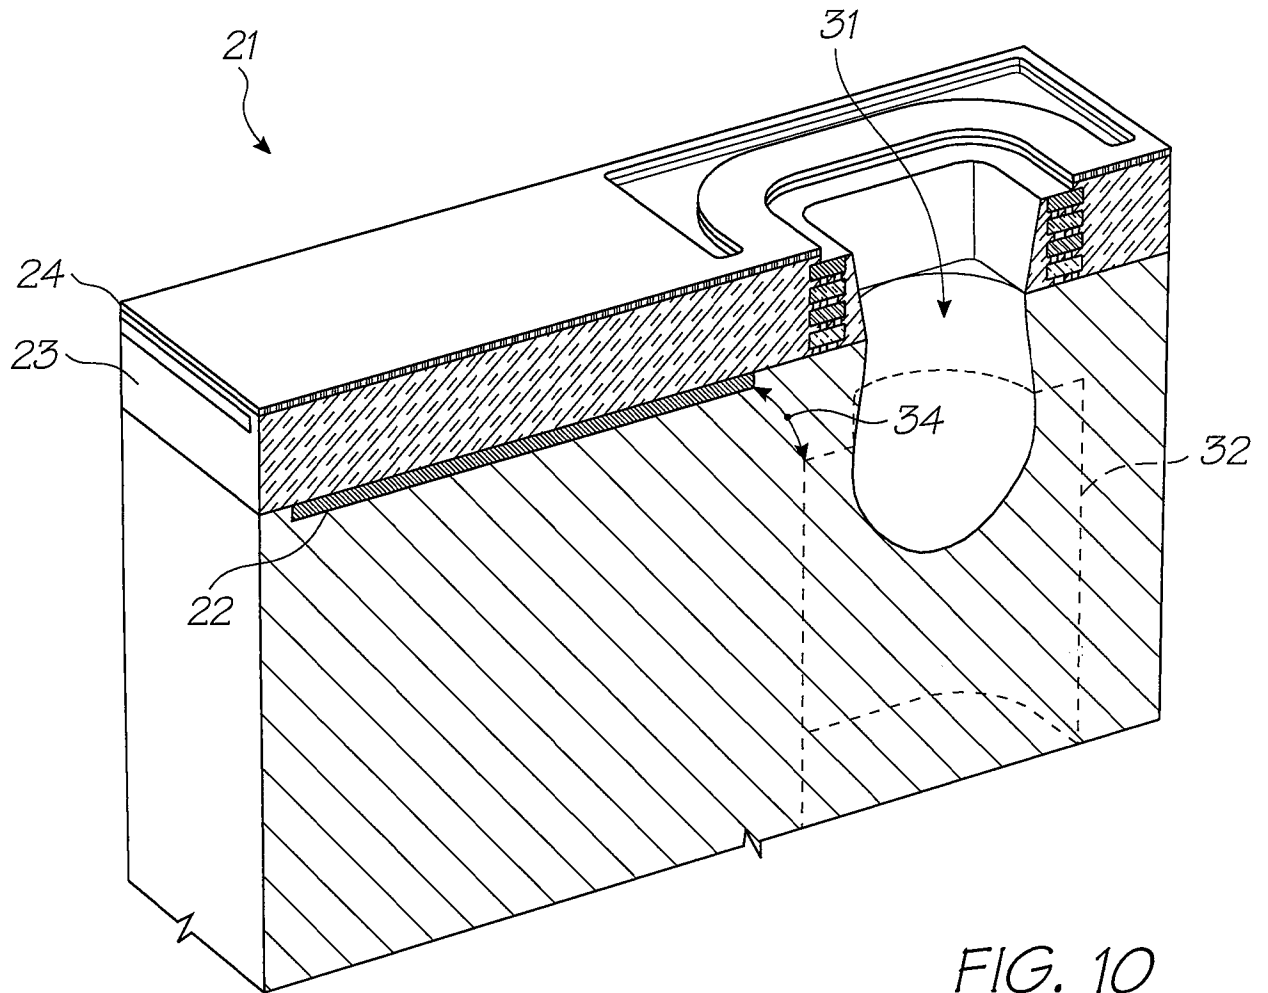


FIG. 10

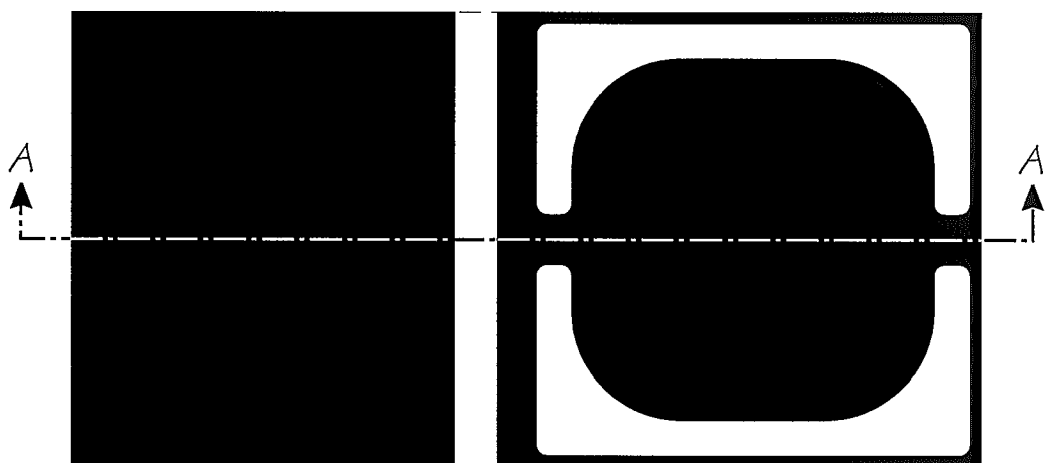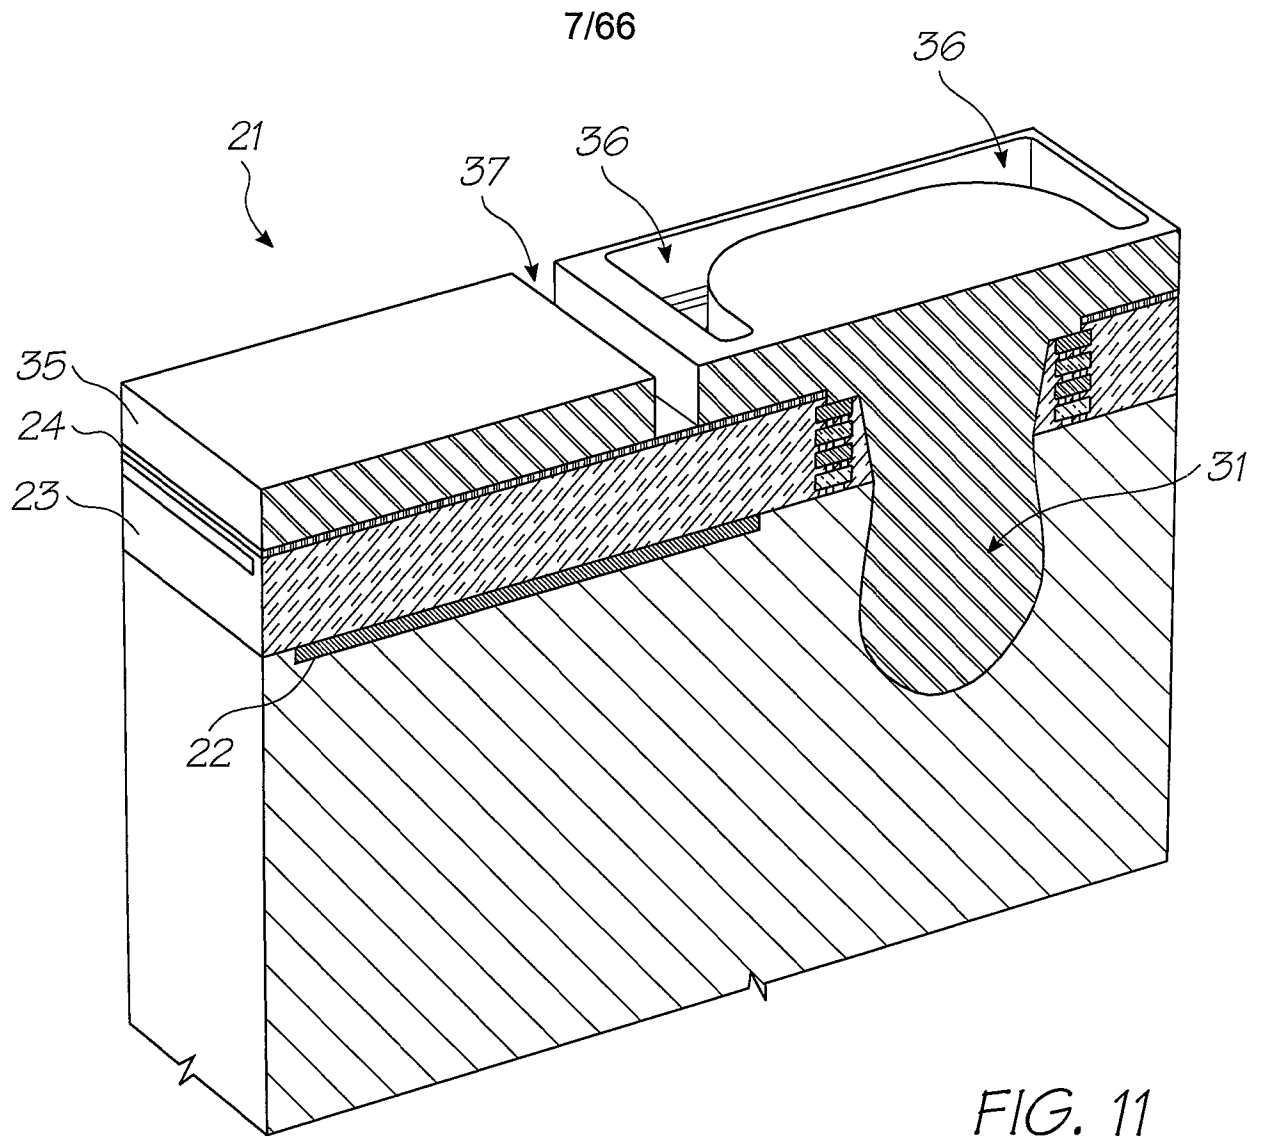

8/66

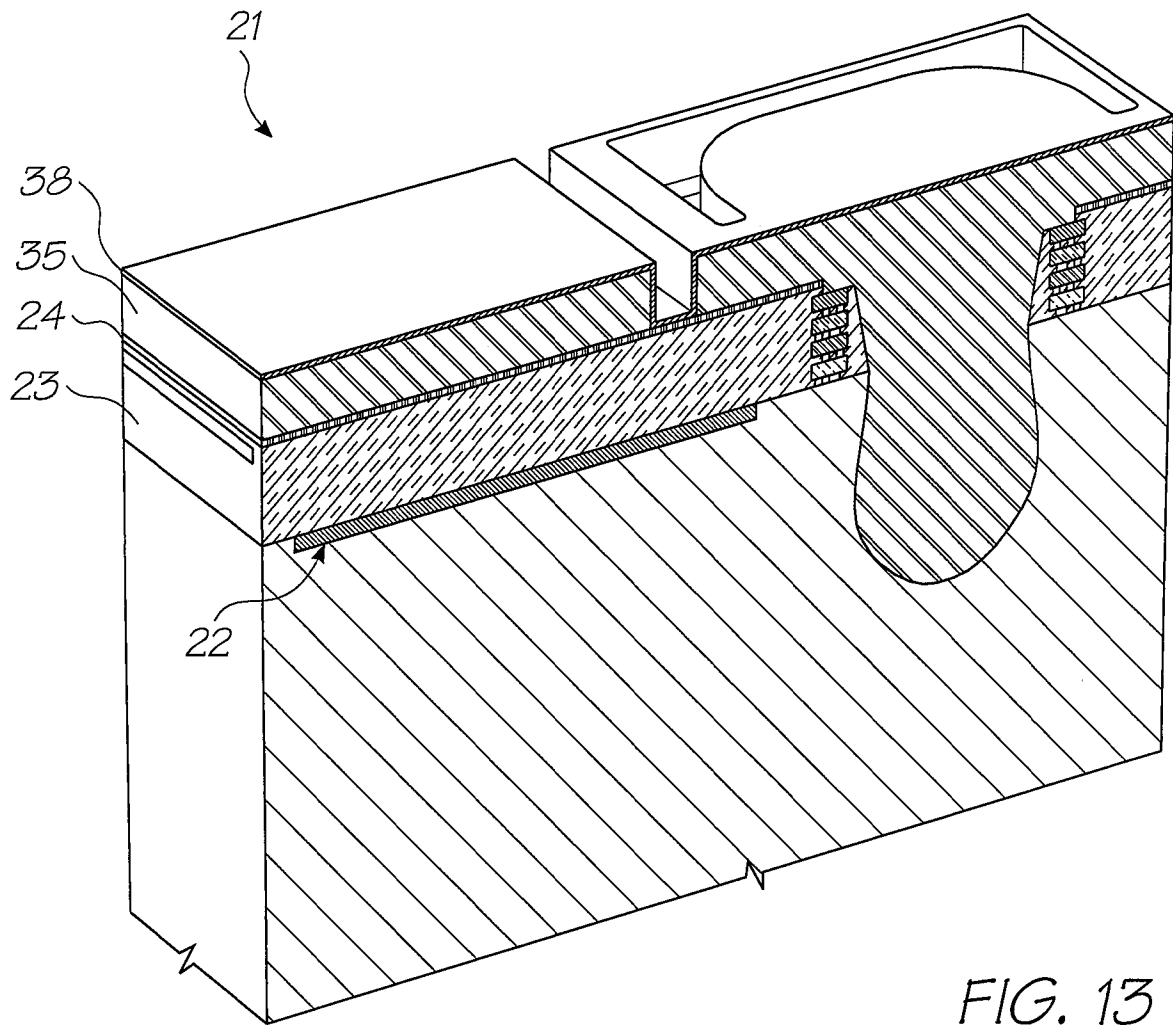


FIG. 13

9/66

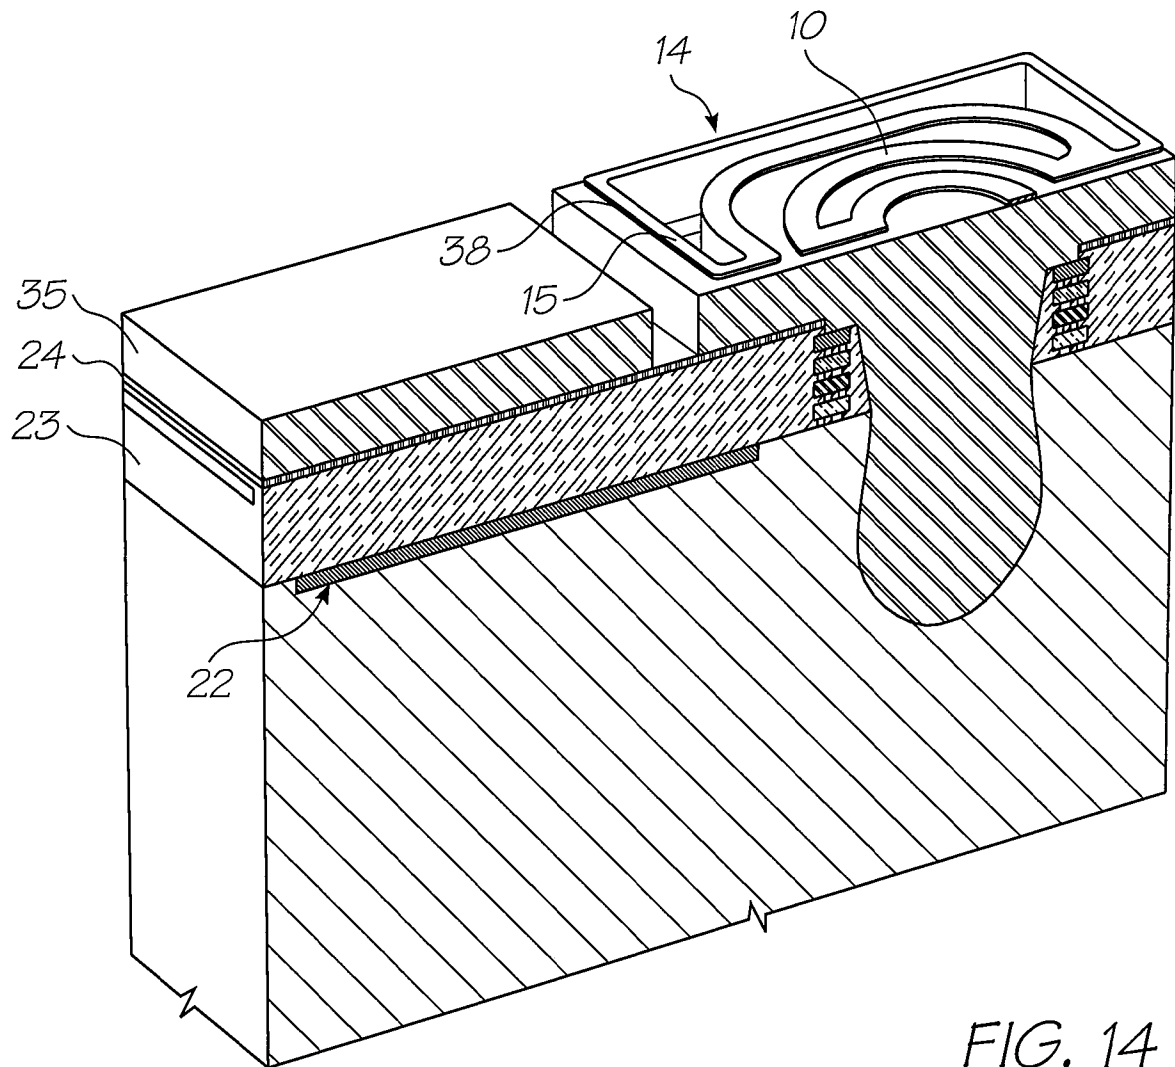


FIG. 14

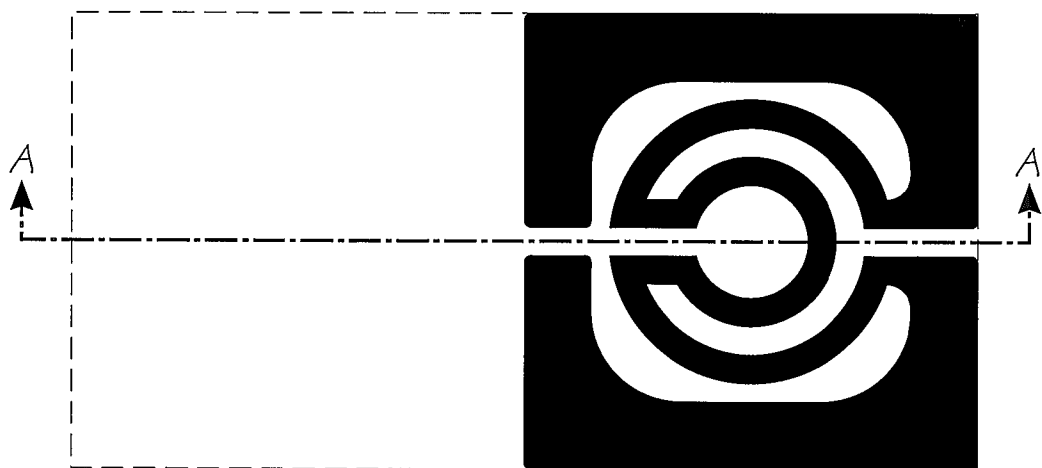


FIG. 15

10/66

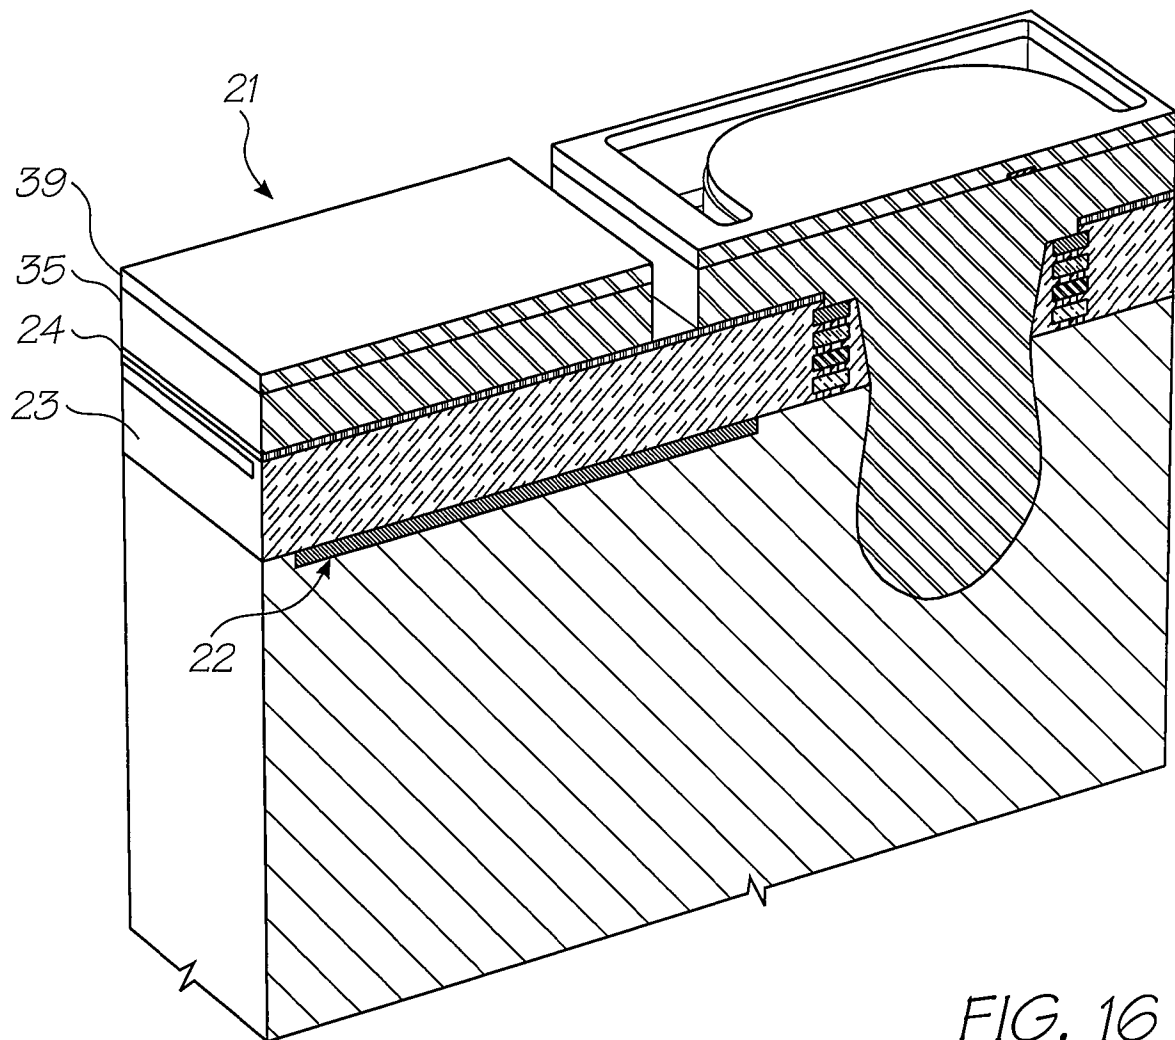


FIG. 16

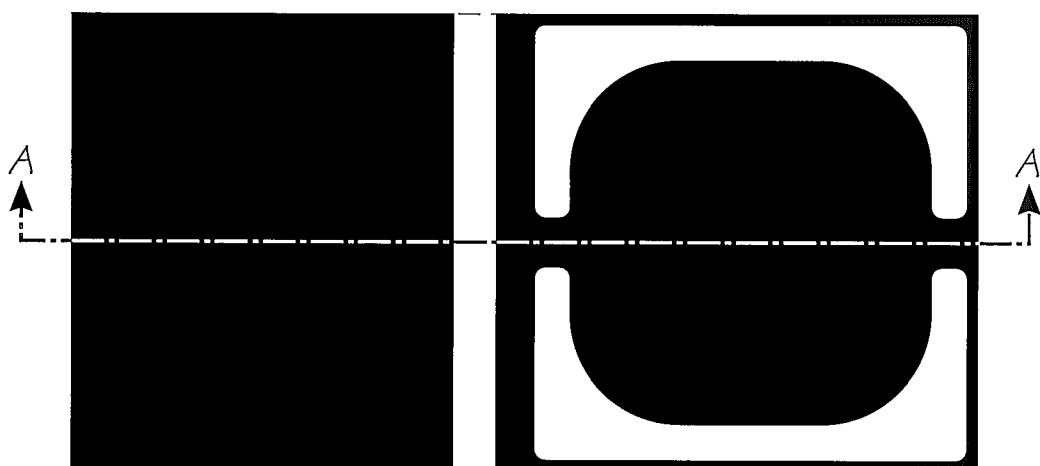


FIG. 17

11/66

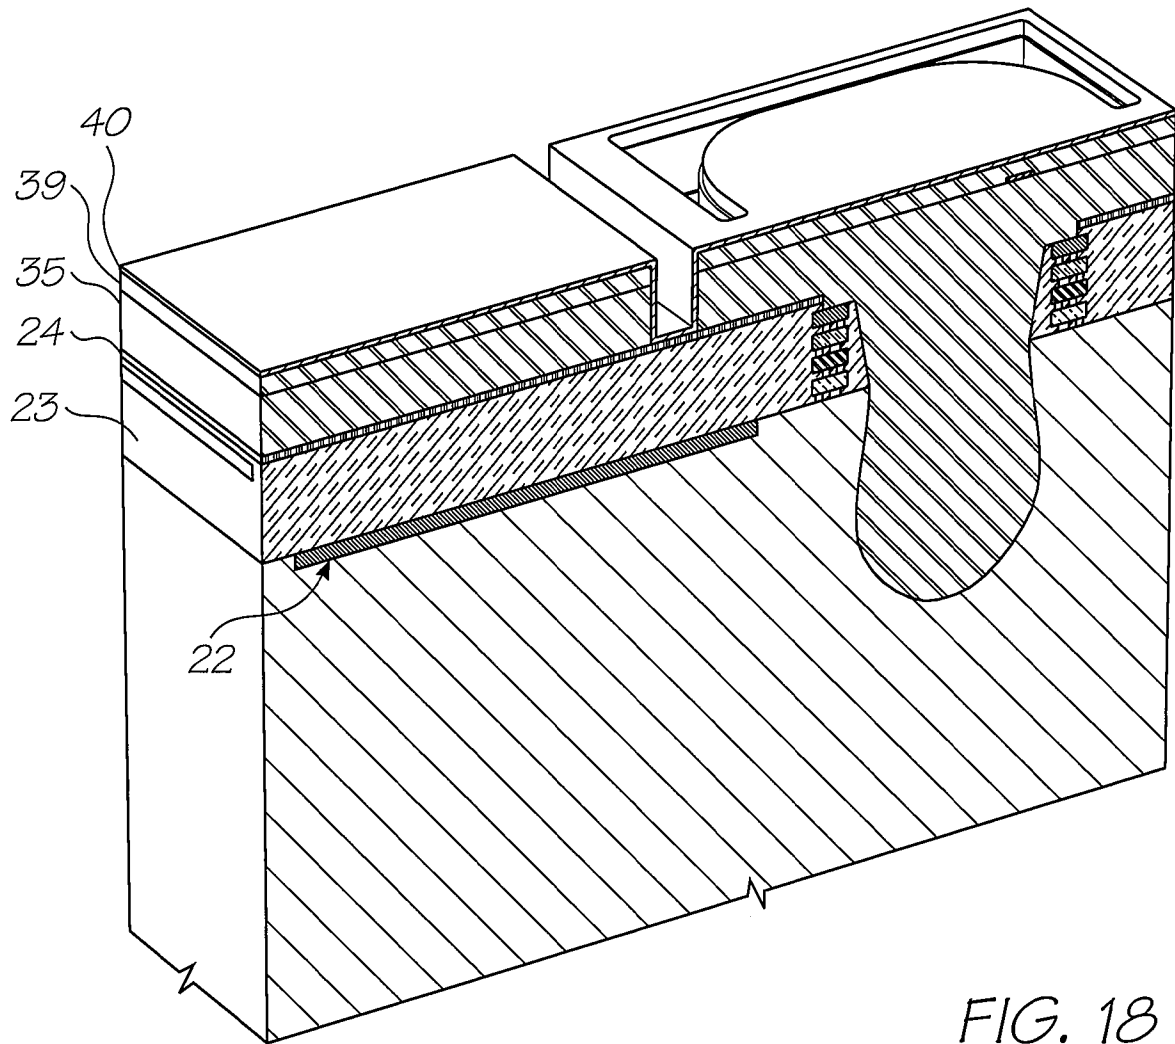


FIG. 18

12/66

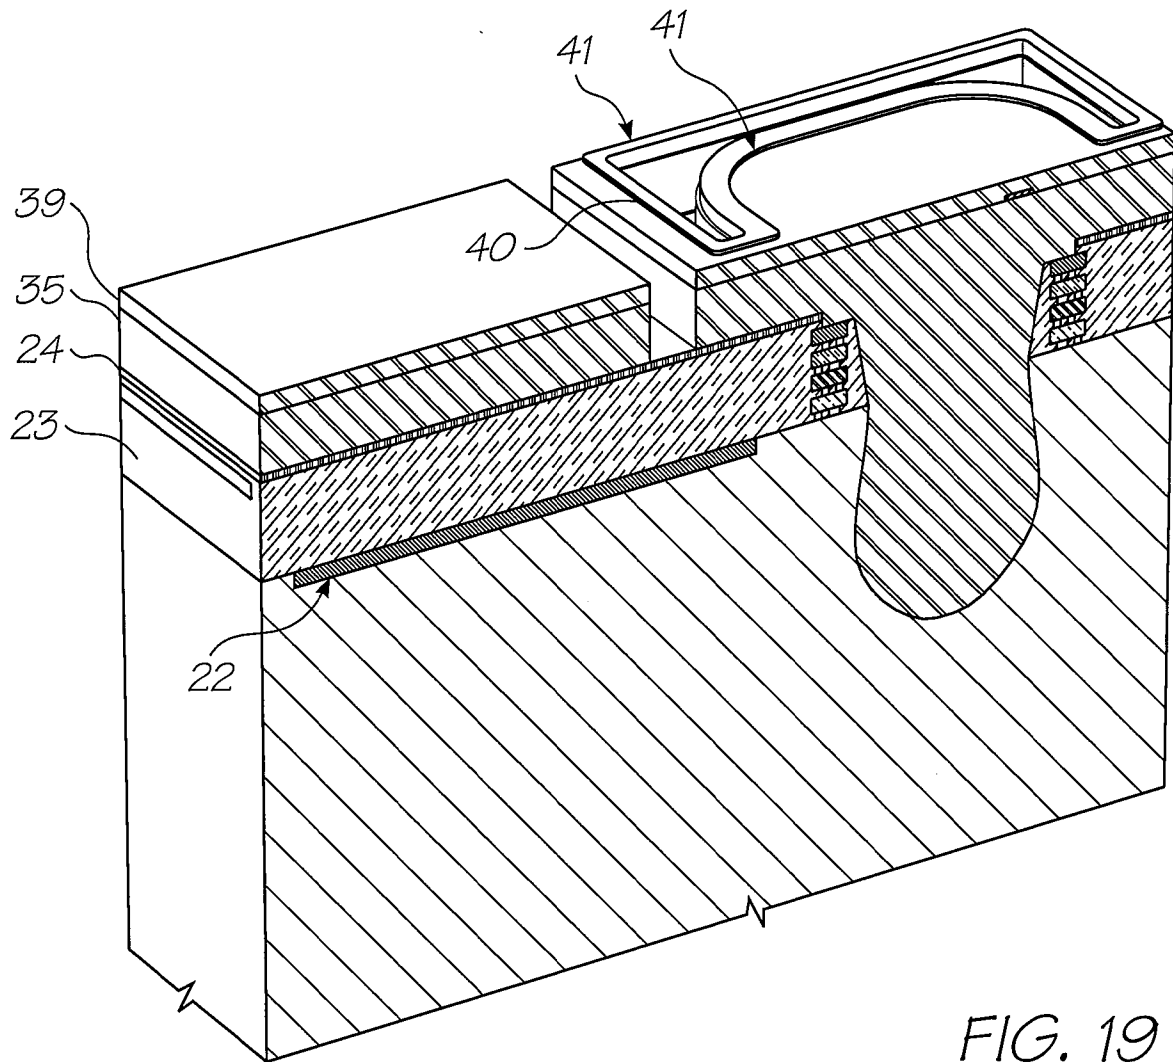


FIG. 19

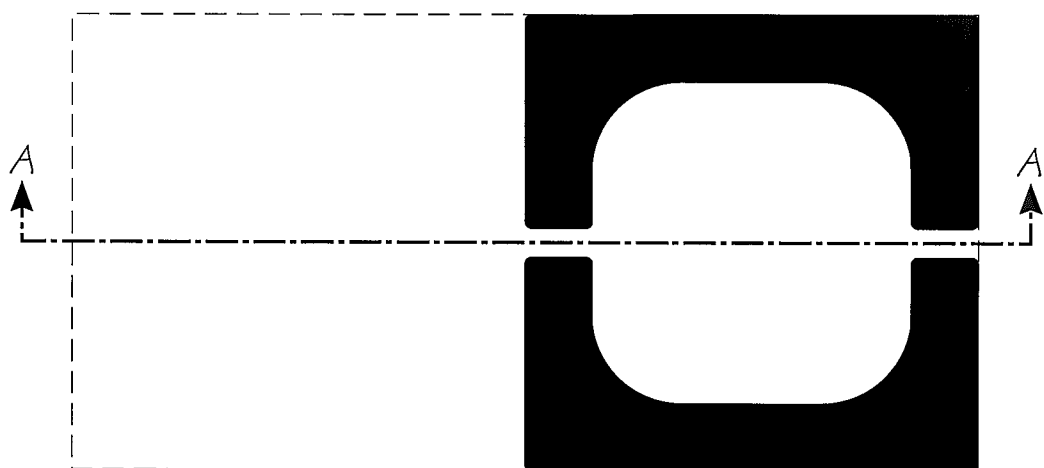


FIG. 20

13/66

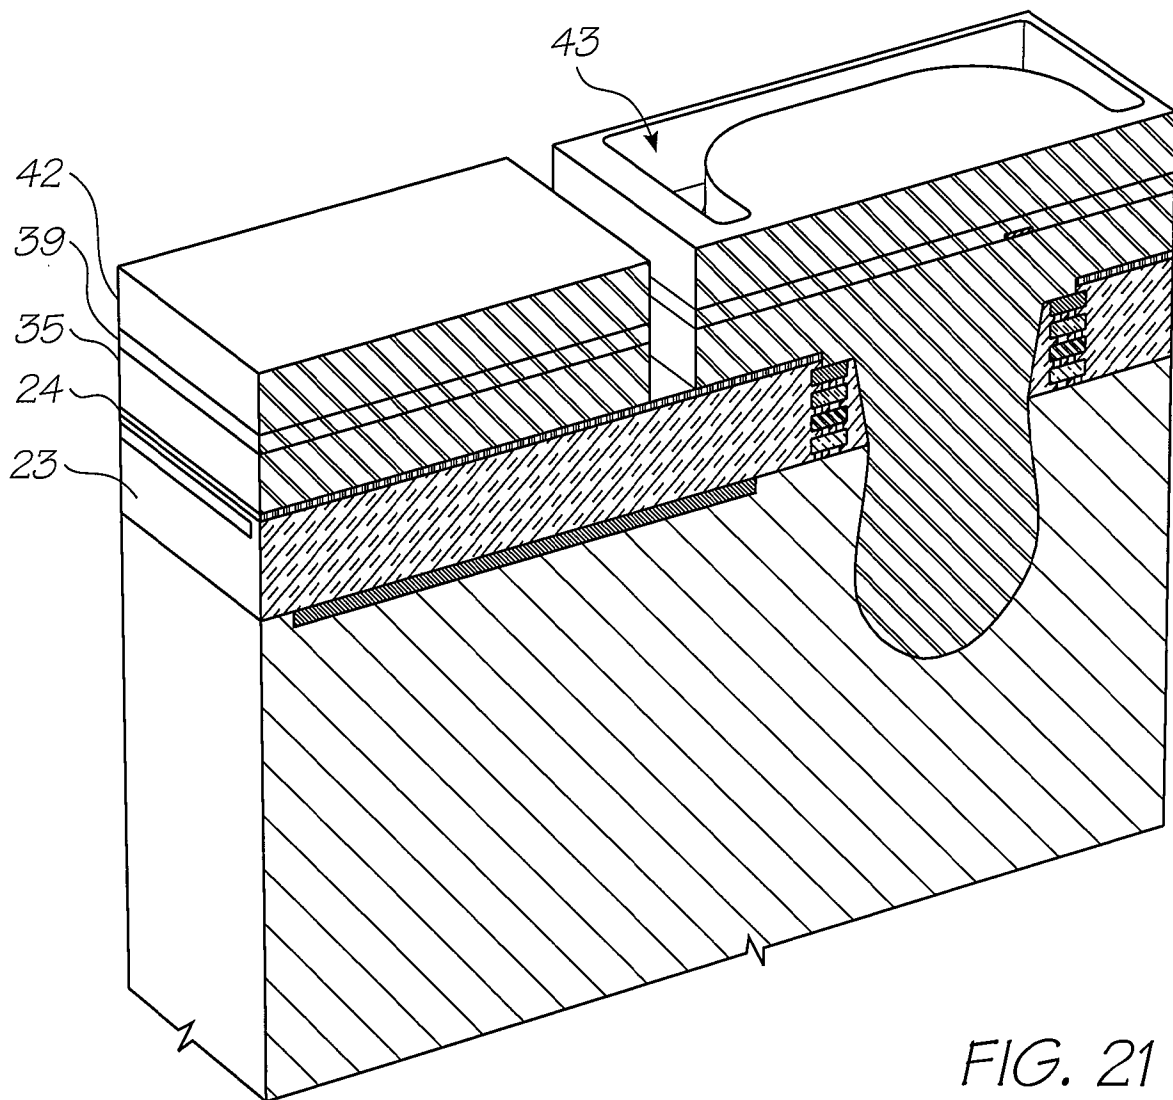


FIG. 21

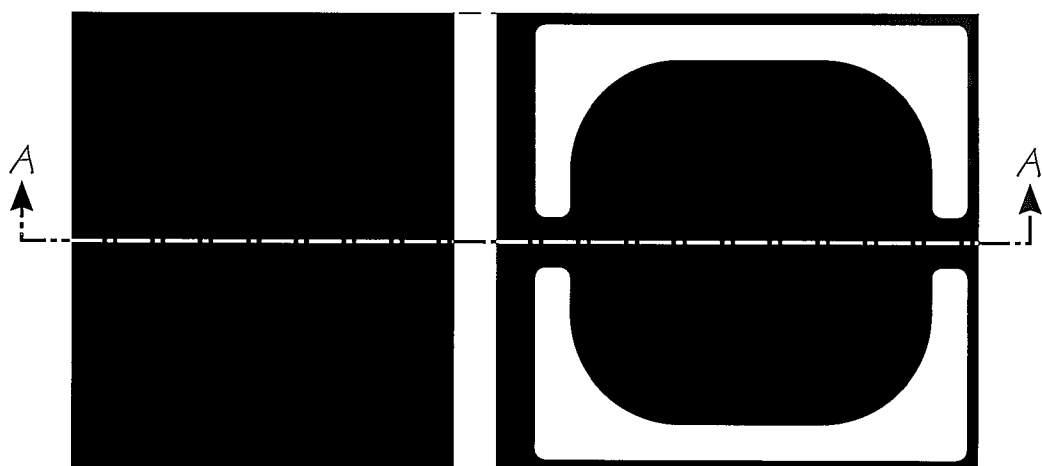


FIG. 22

14/66

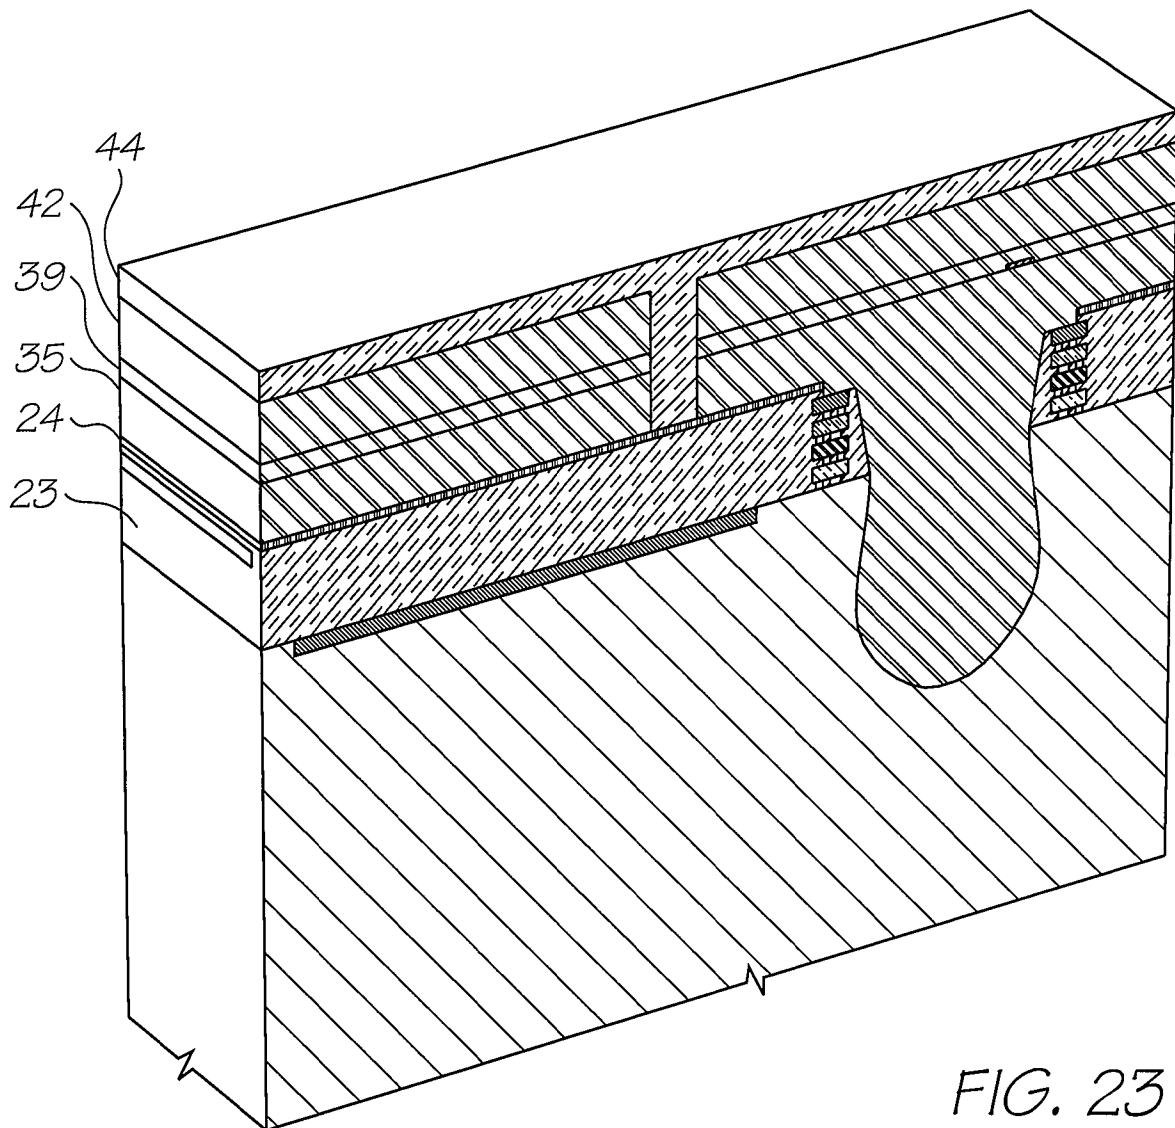


FIG. 23

15/66

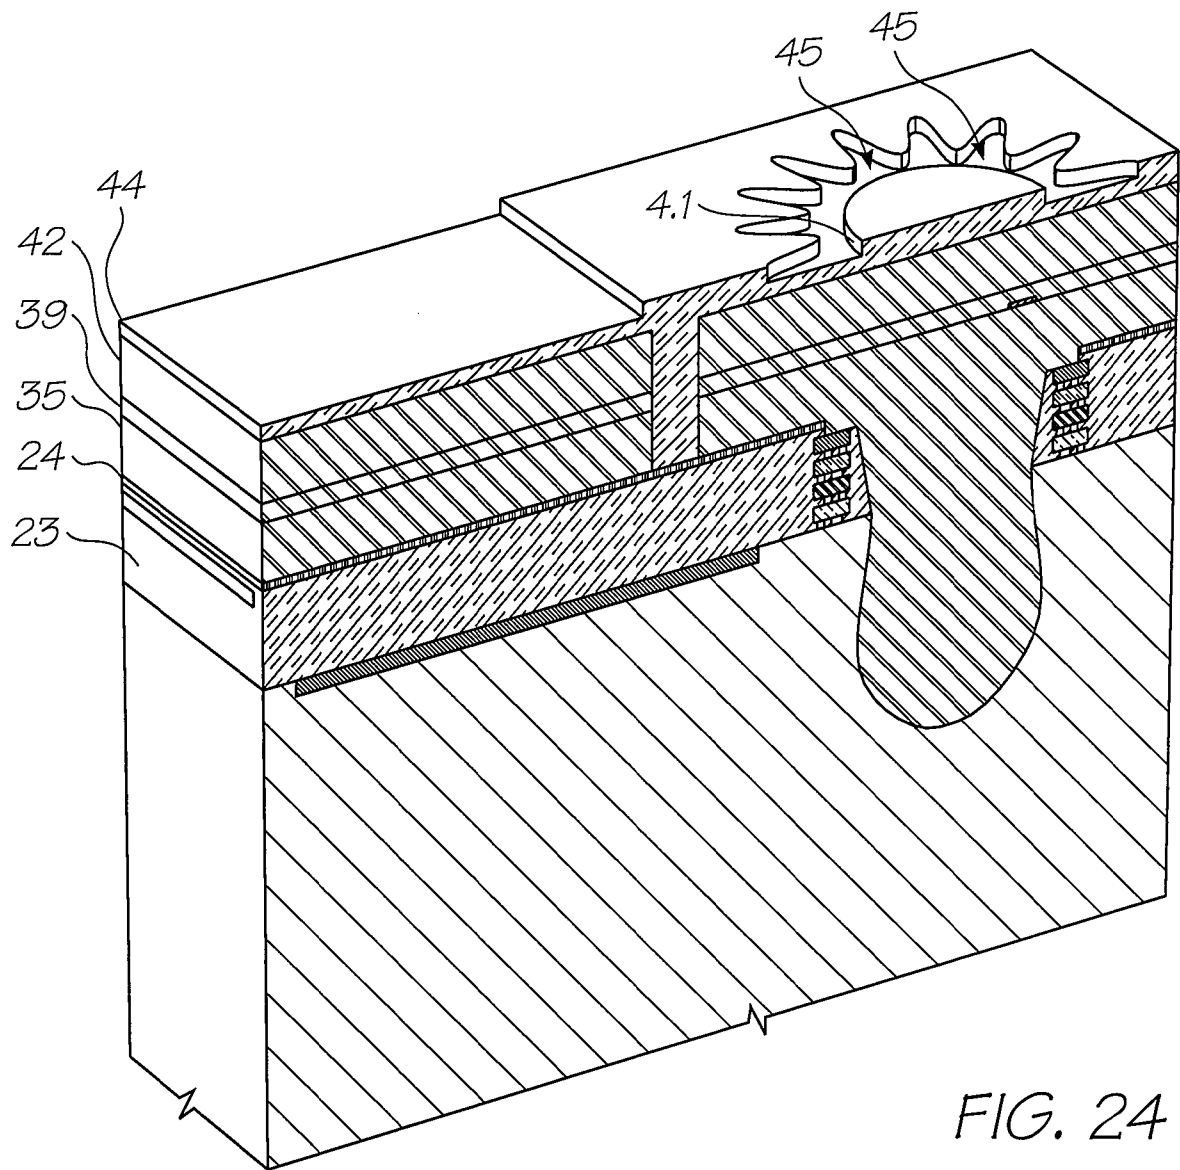


FIG. 24

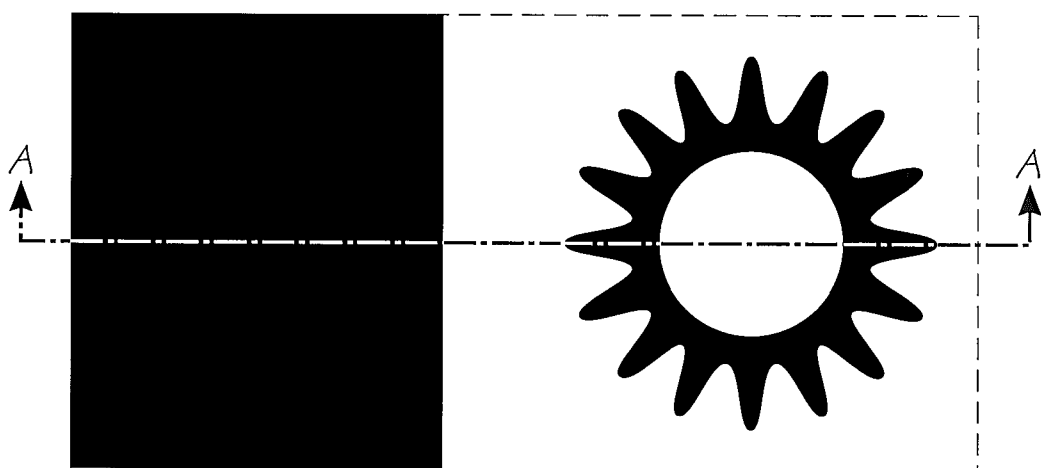


FIG. 25

16/66

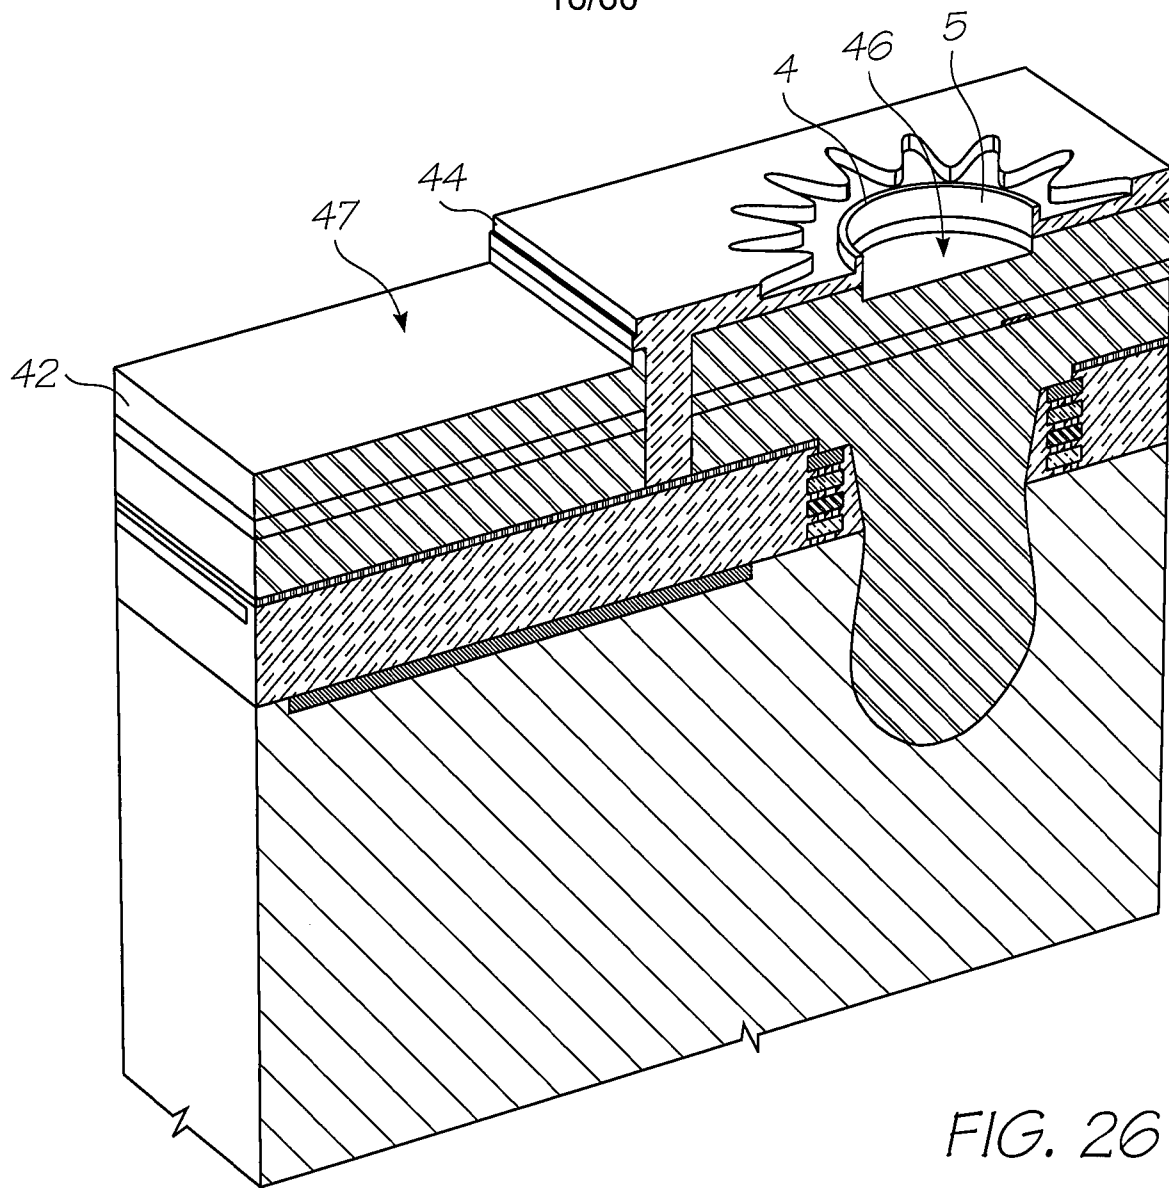


FIG. 26





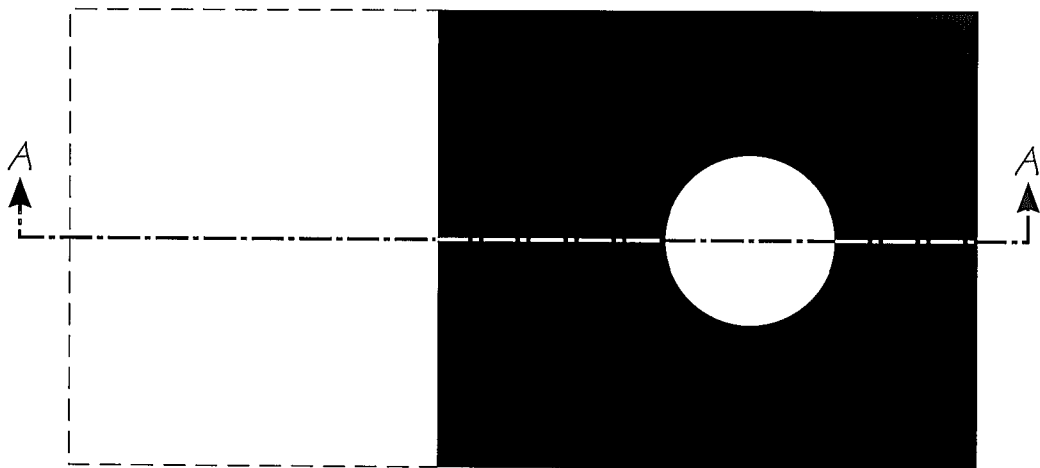


FIG. 27

17/66

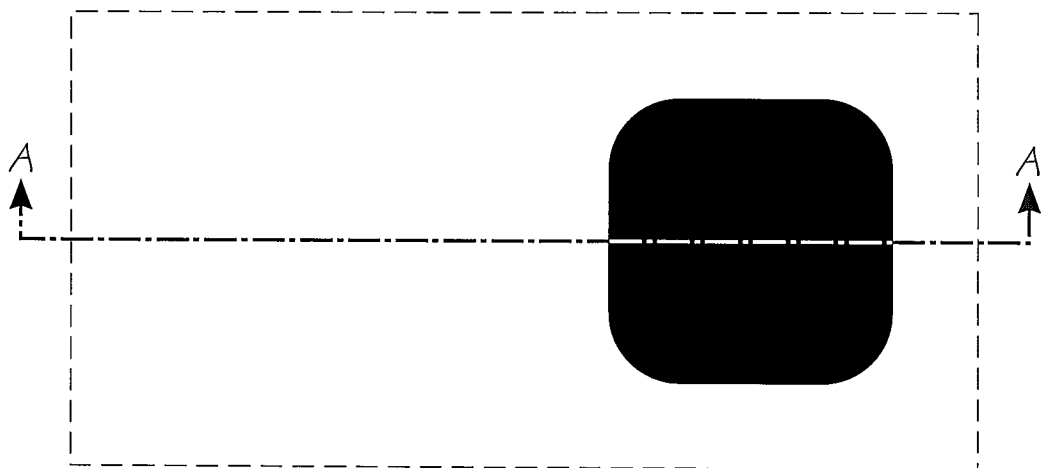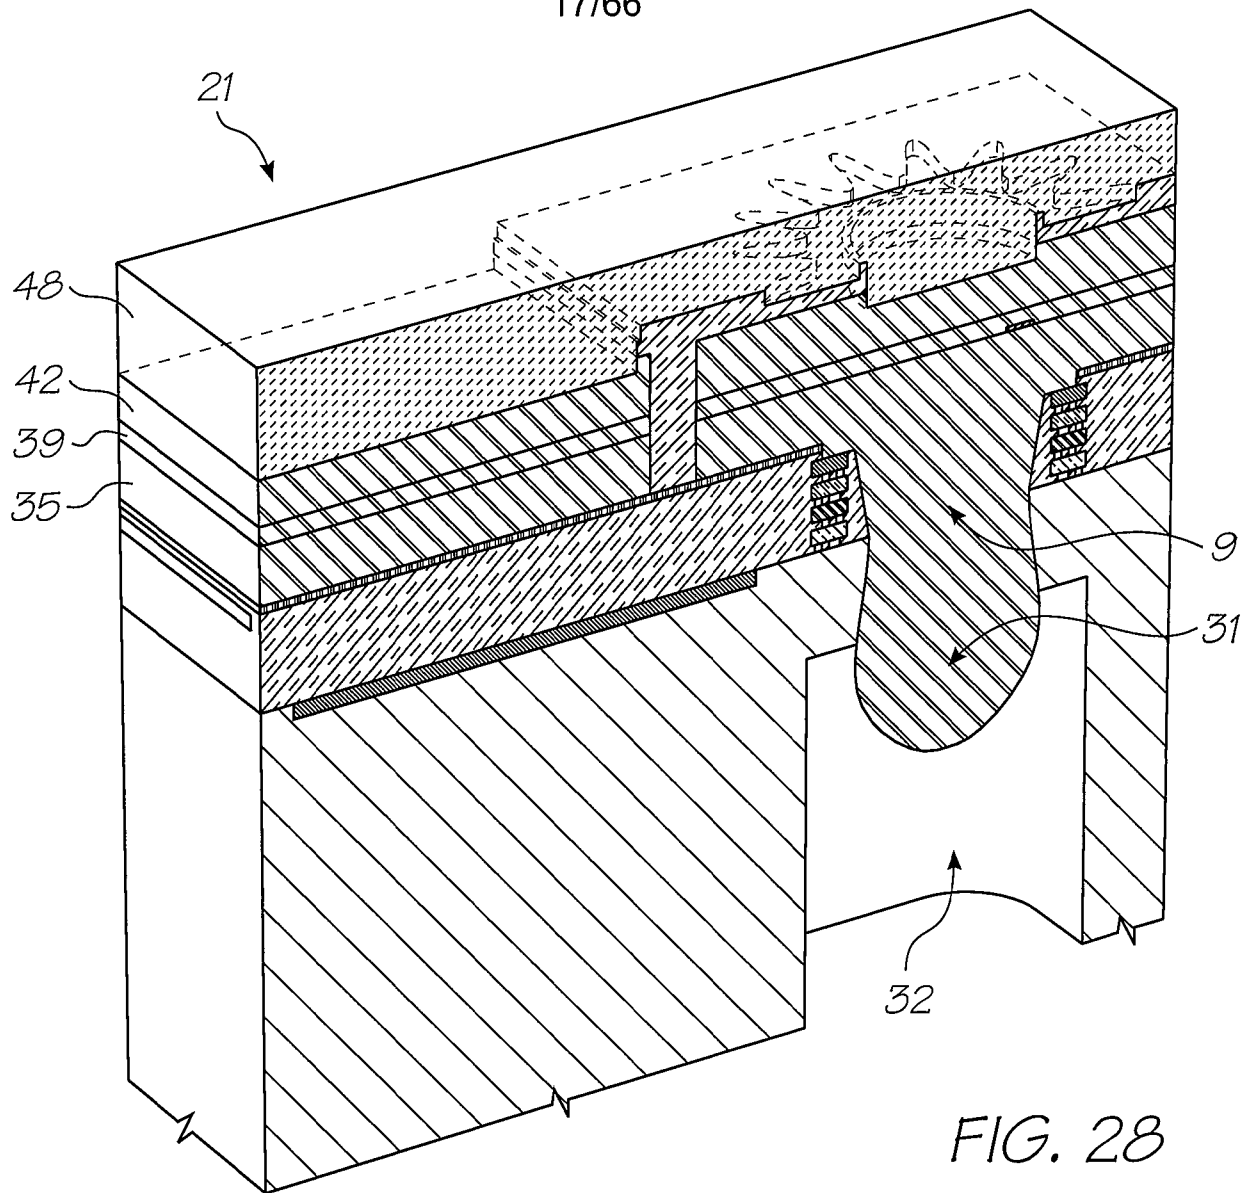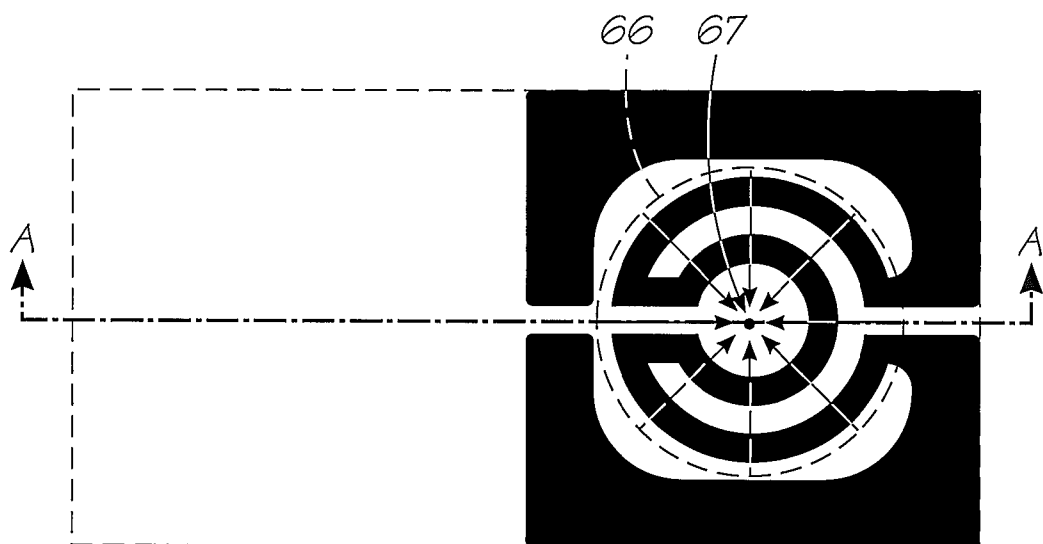

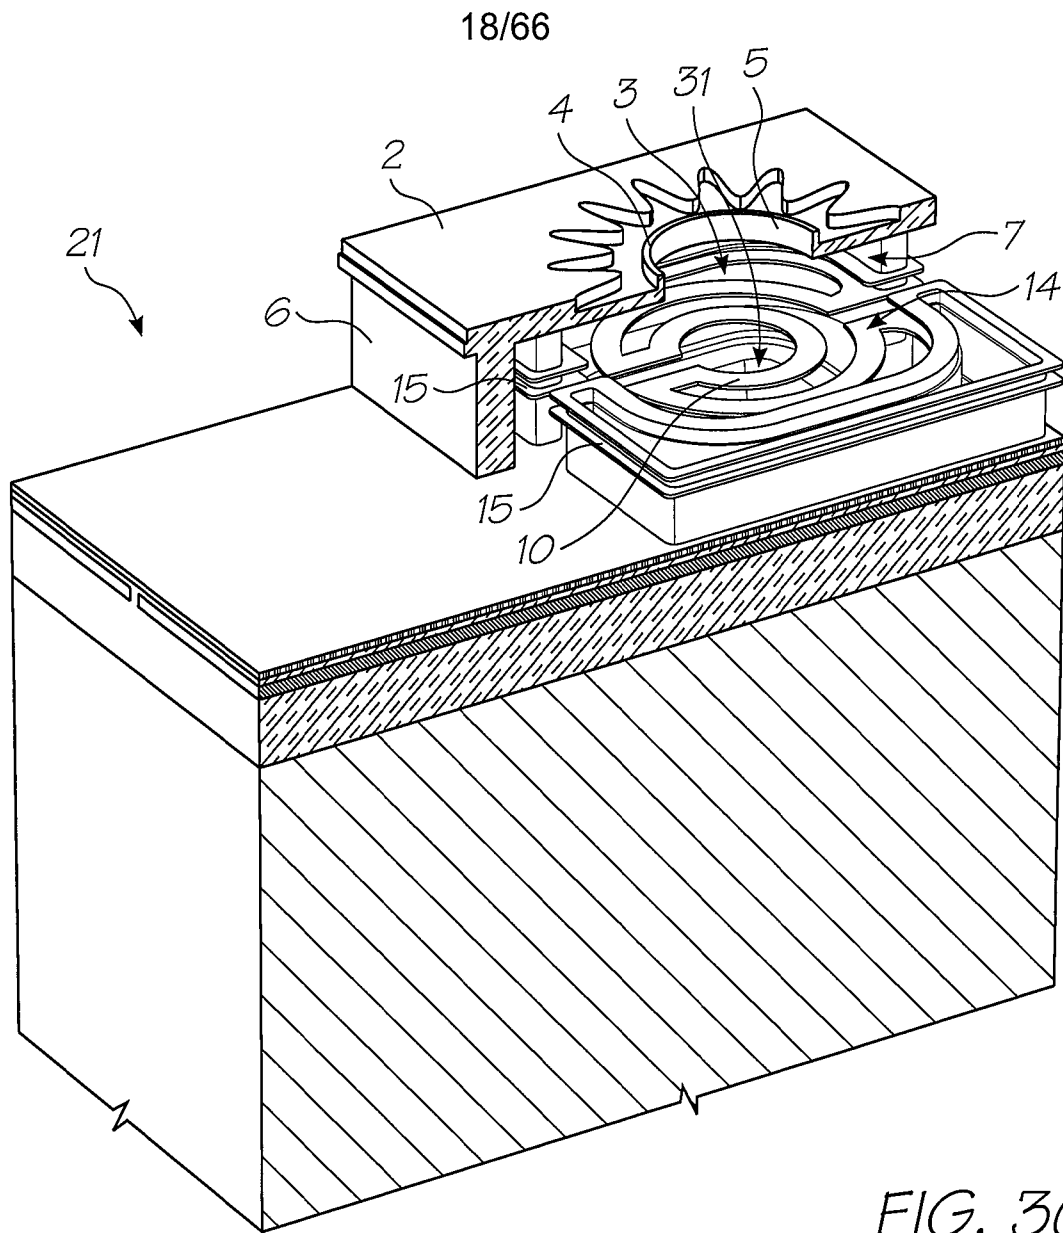

19/66

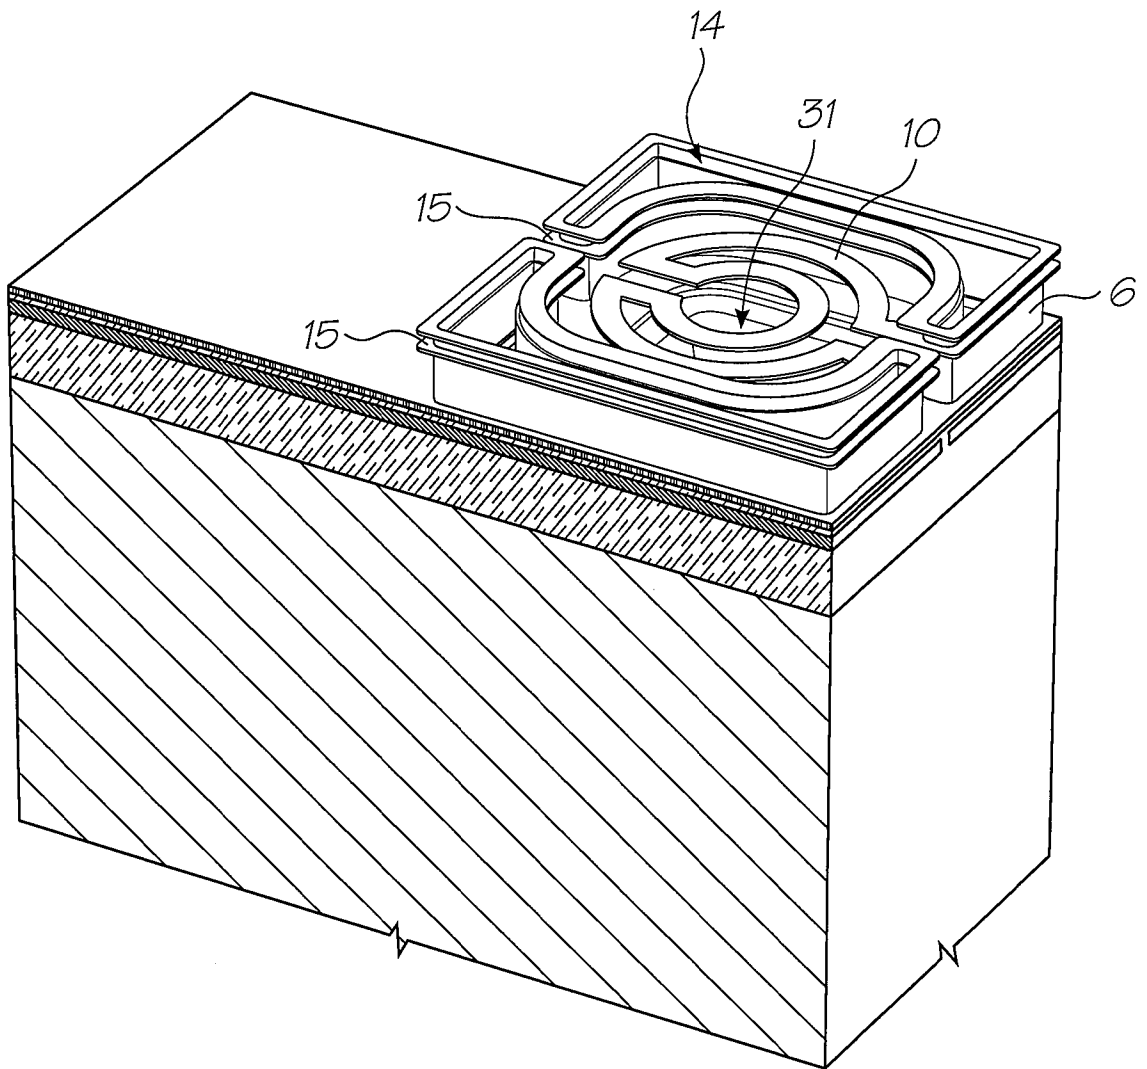


FIG. 32

20/66

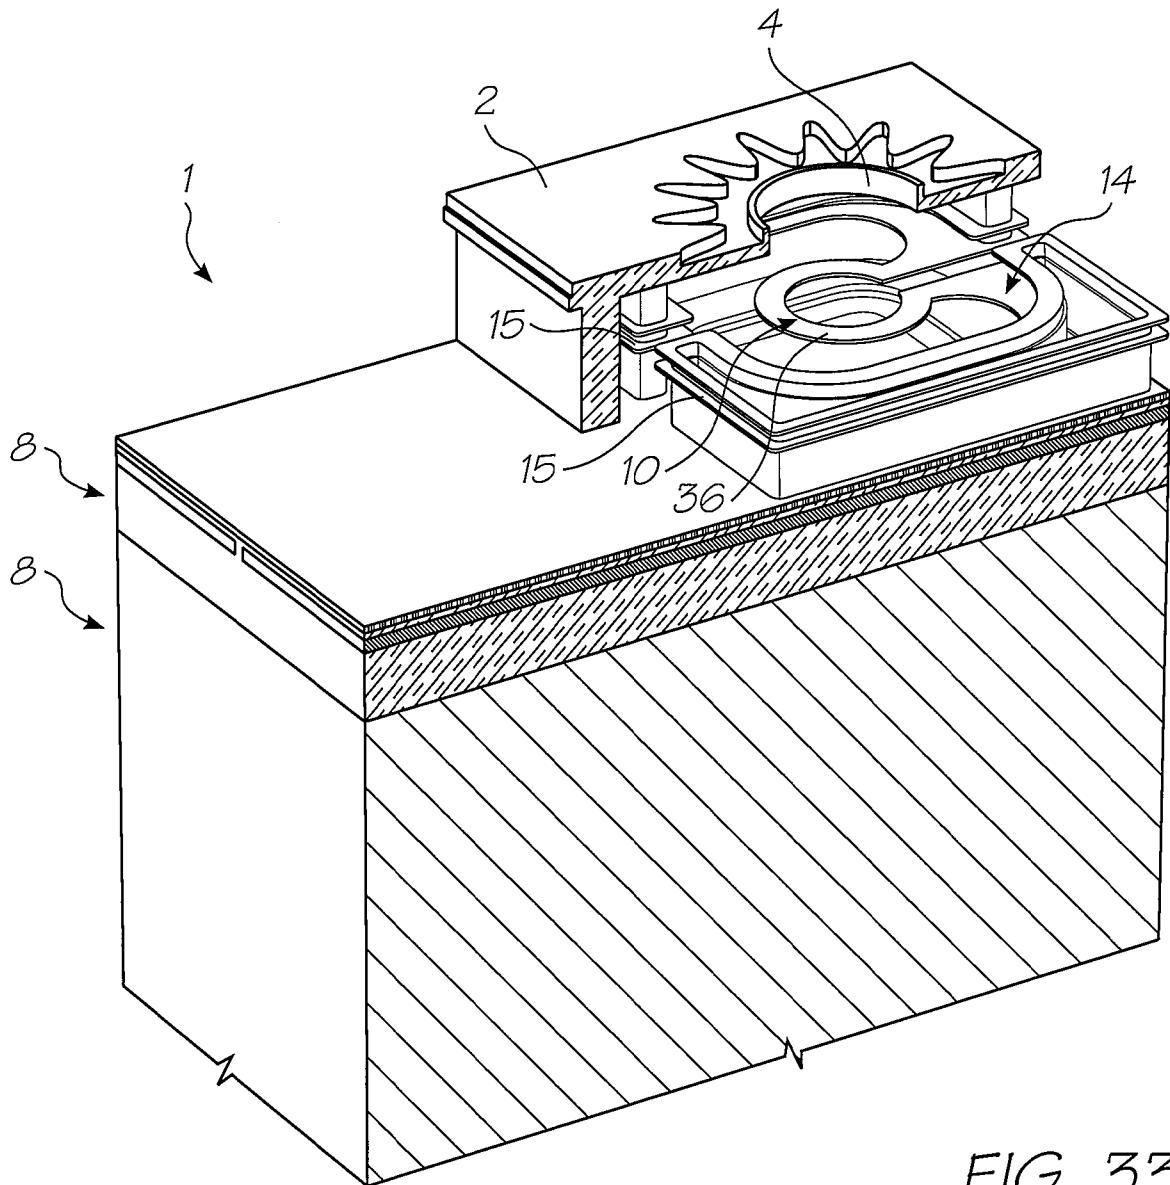


FIG. 33

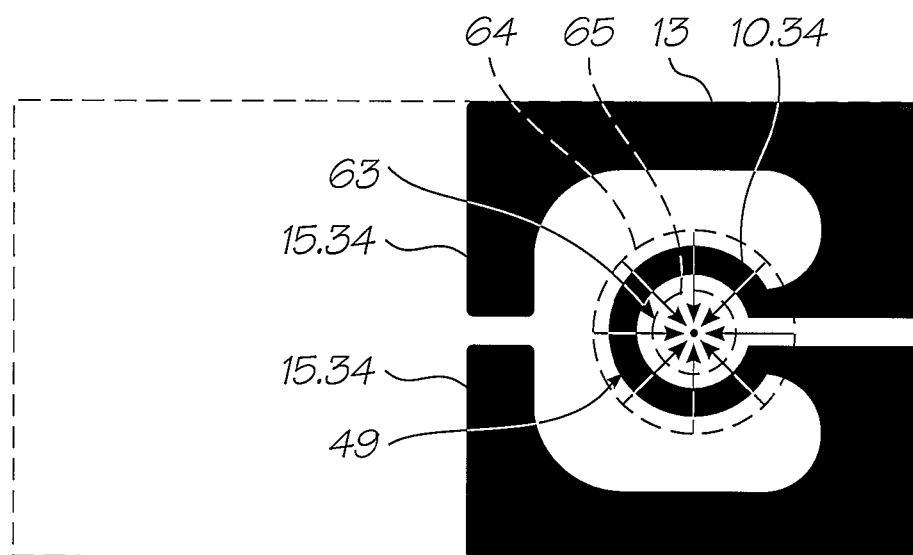


FIG. 34

21/66

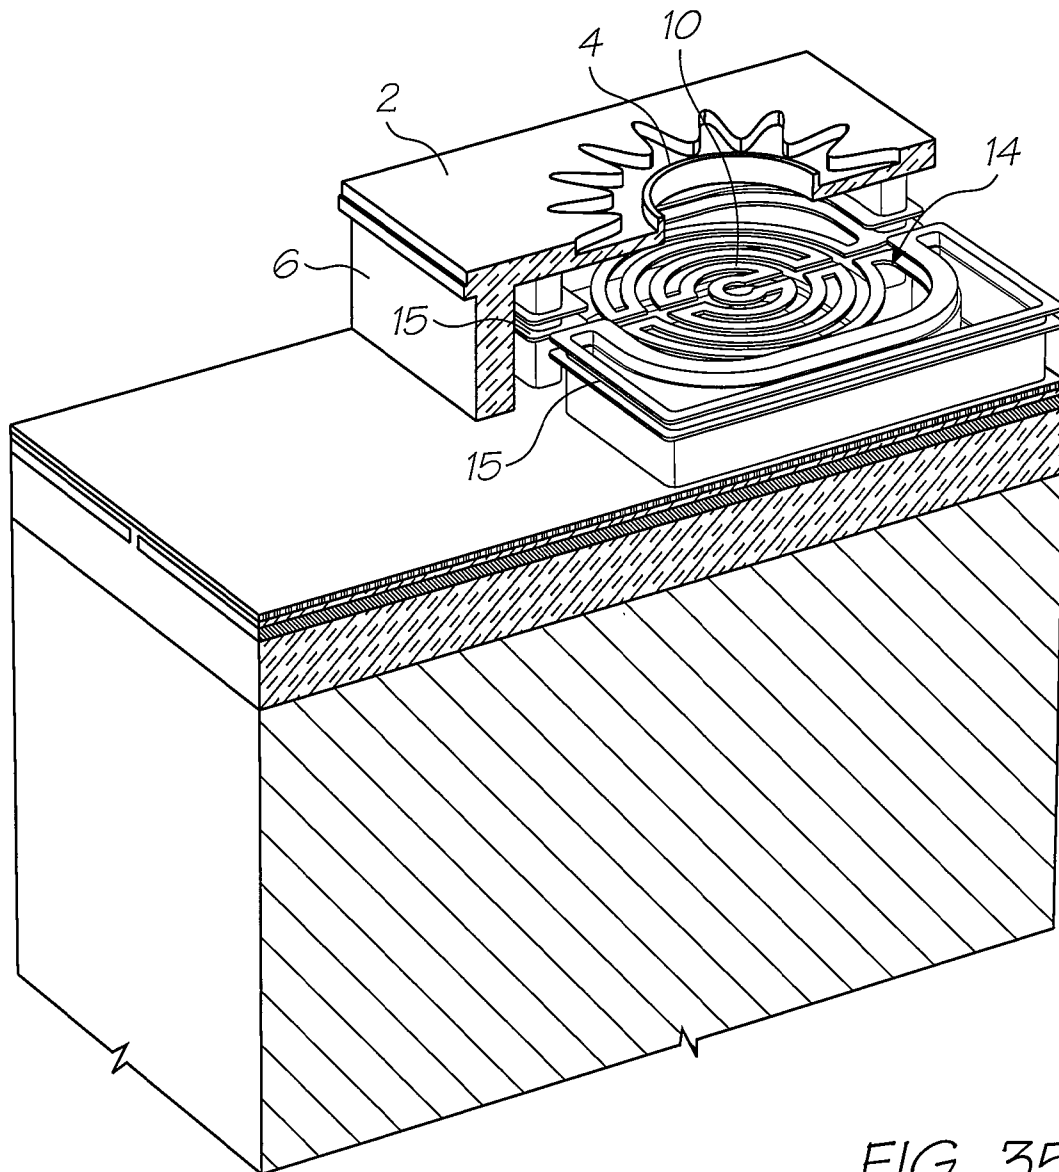


FIG. 35

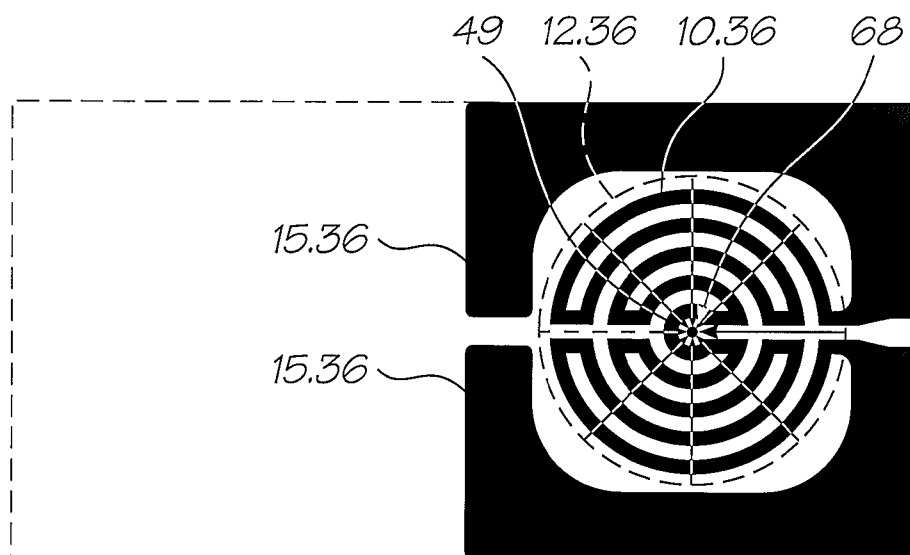


FIG. 36

22/66



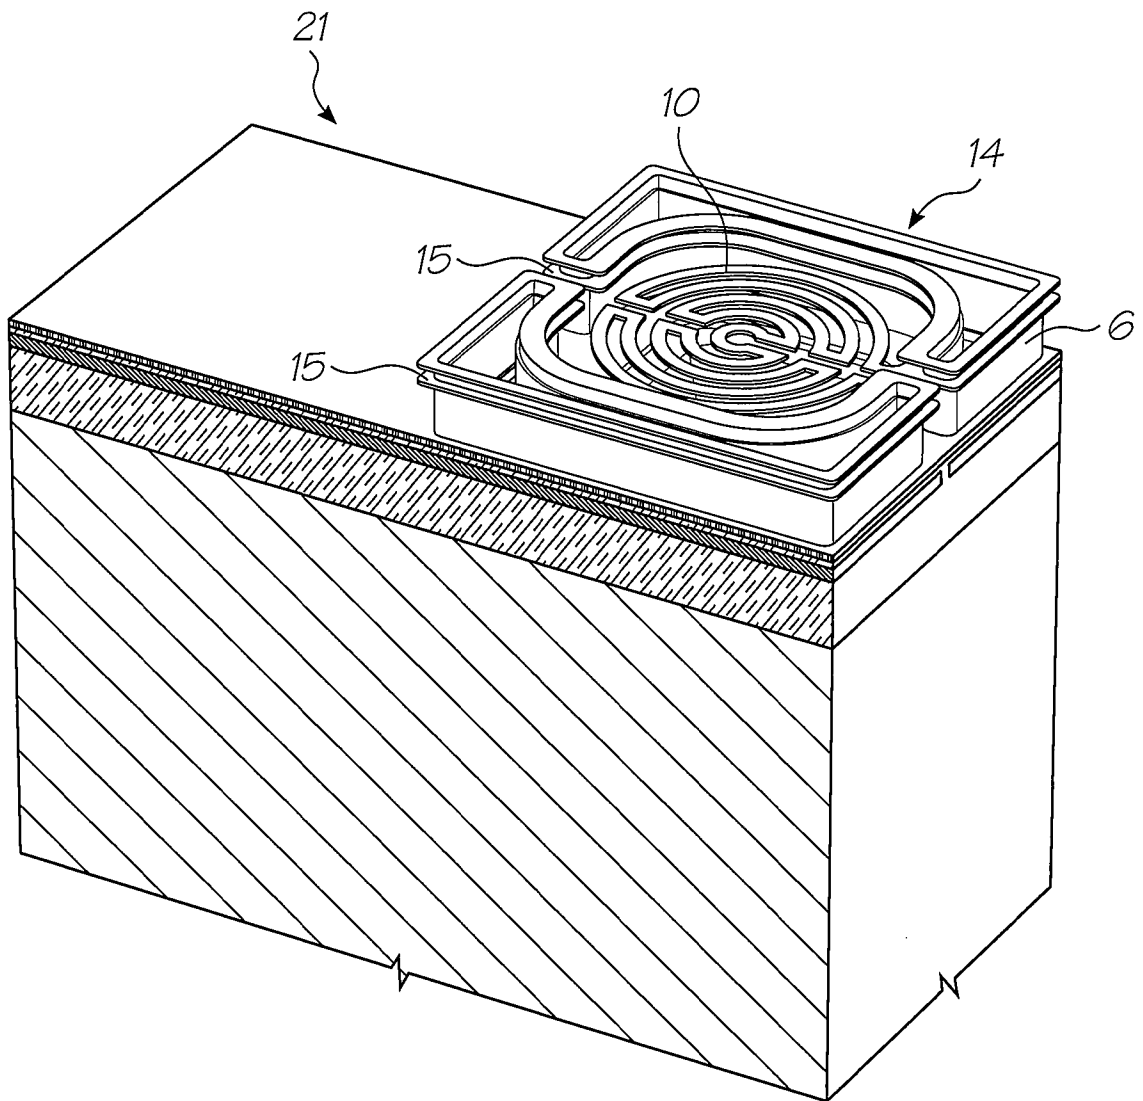


FIG. 37

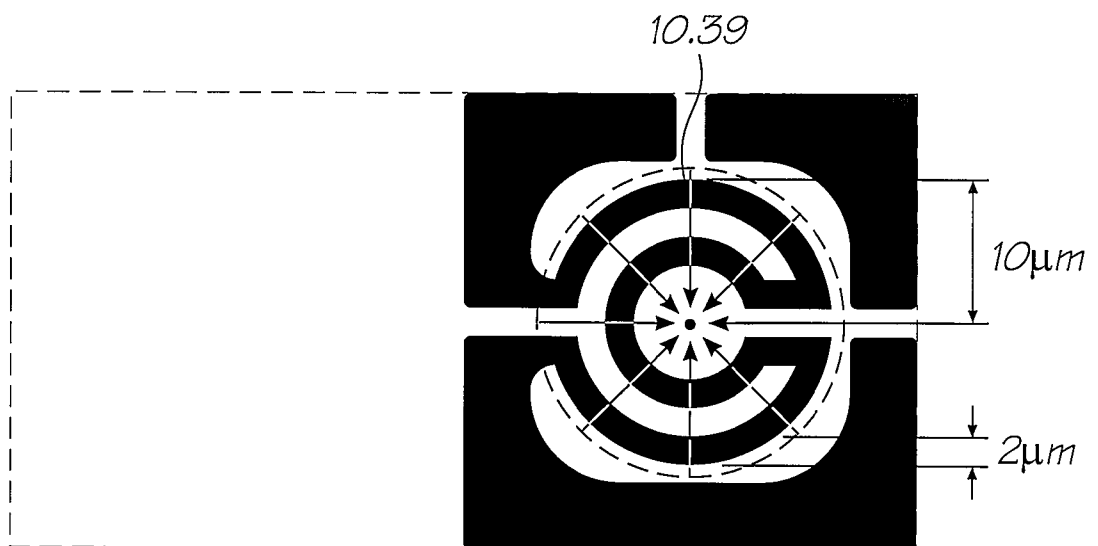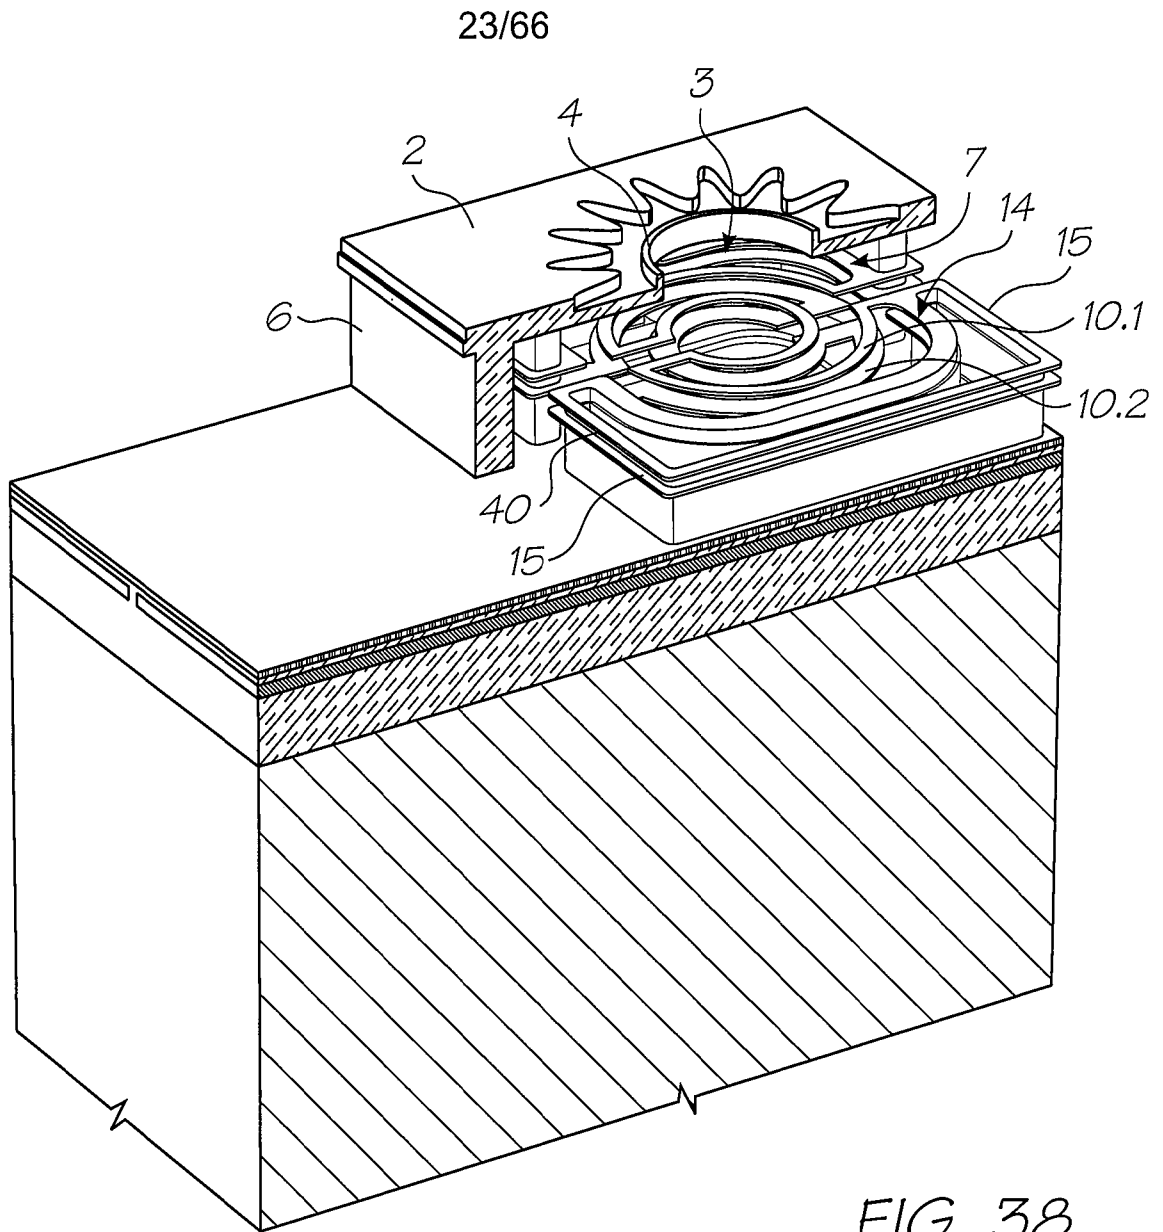

24/66

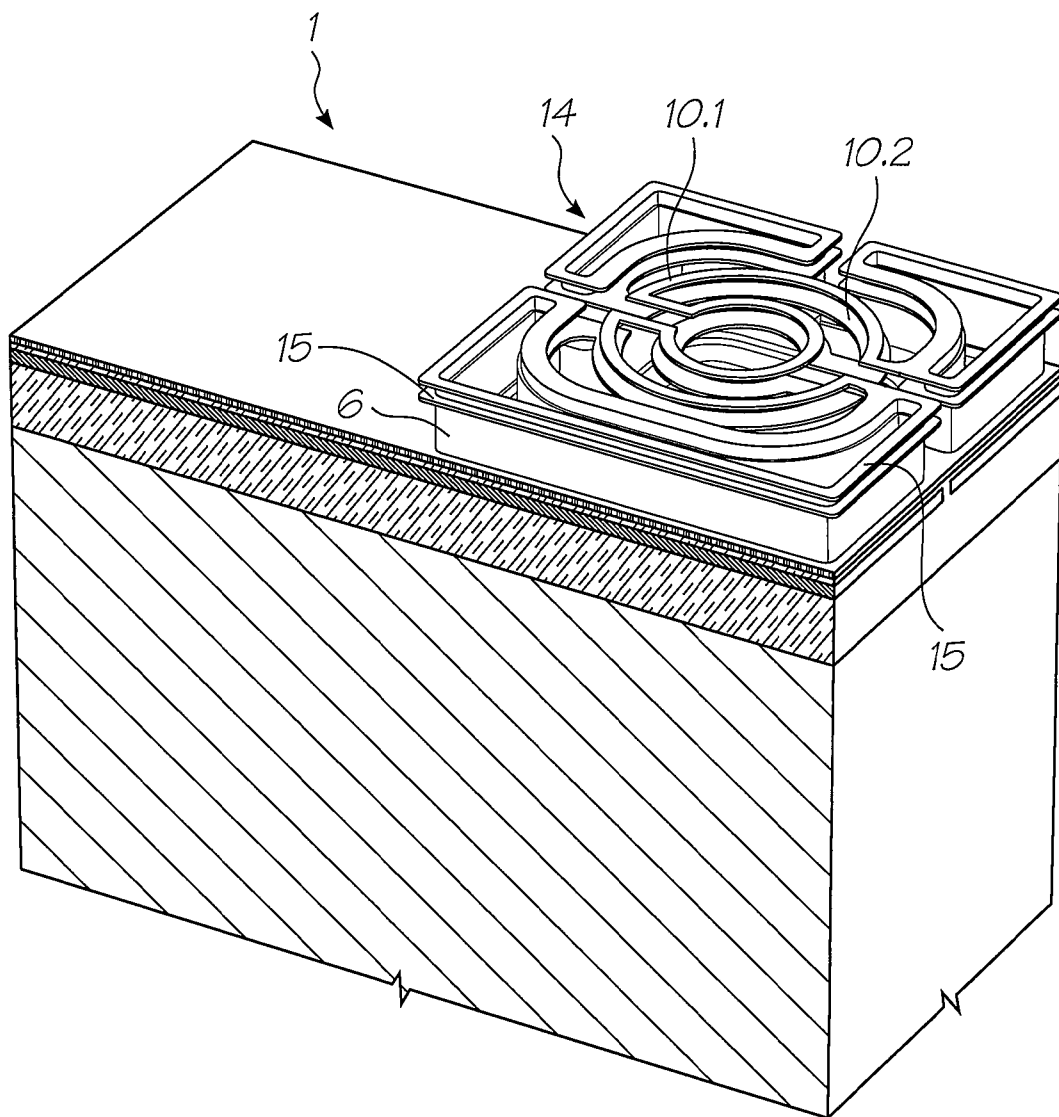


FIG. 40

25/66

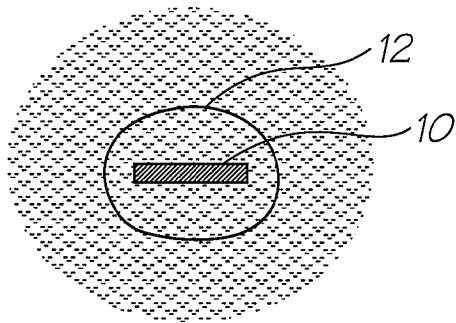


FIG. 41

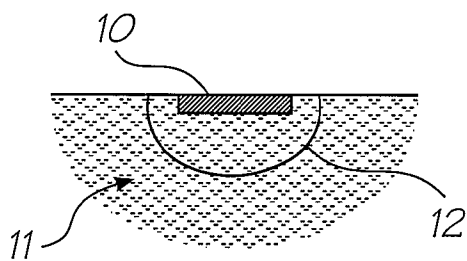


FIG. 42

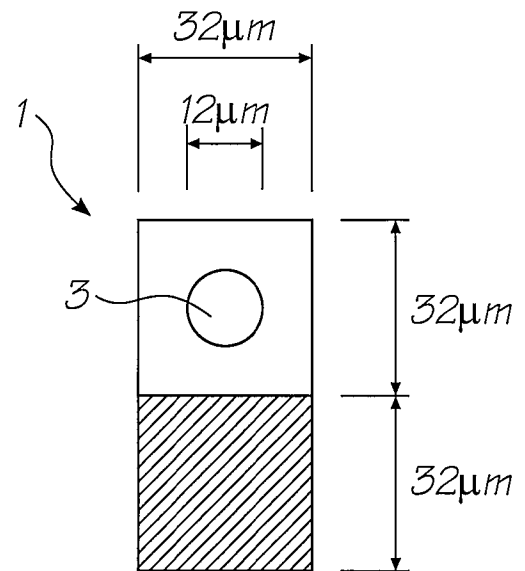


FIG. 43

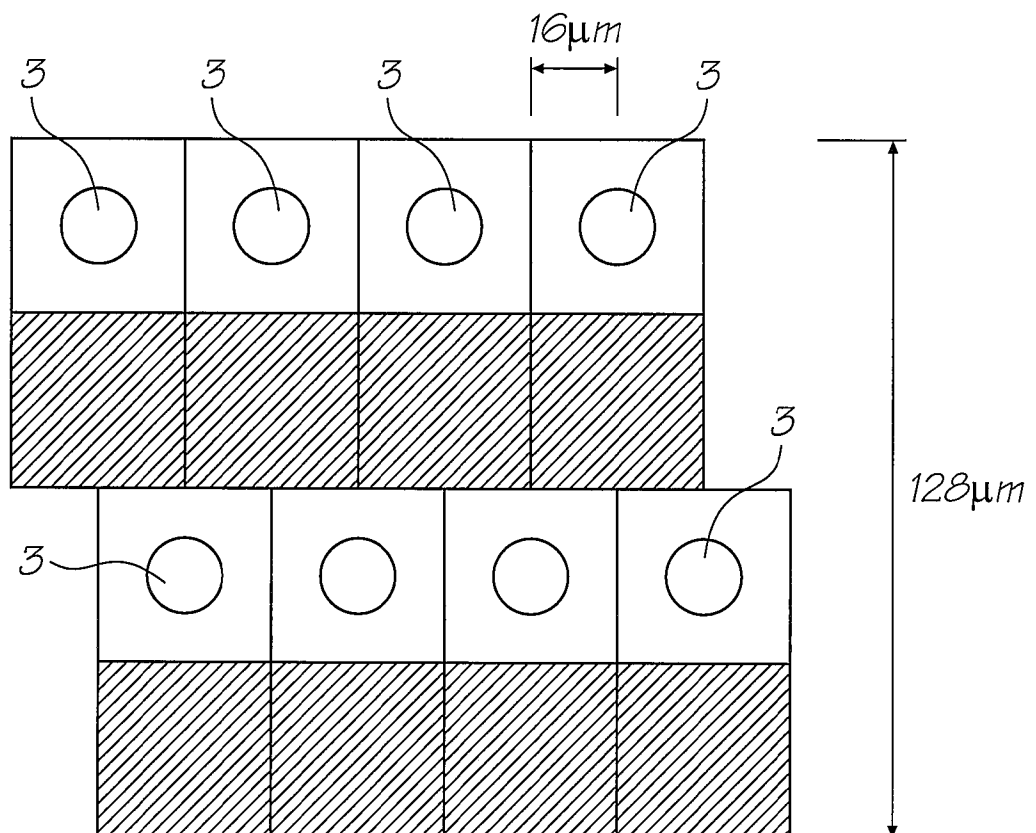


FIG. 44

26/66

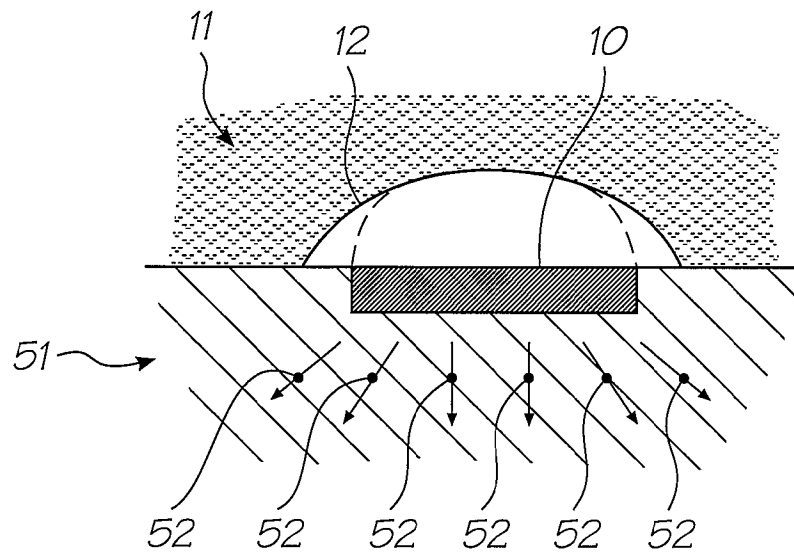


FIG. 45

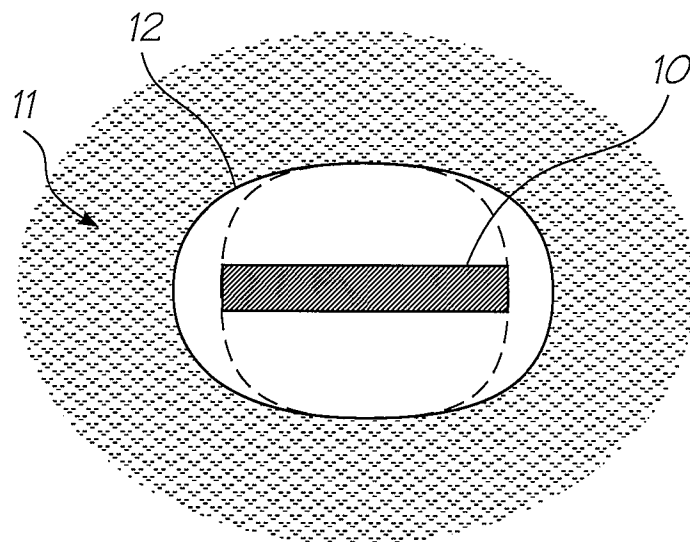


FIG. 46

27/66

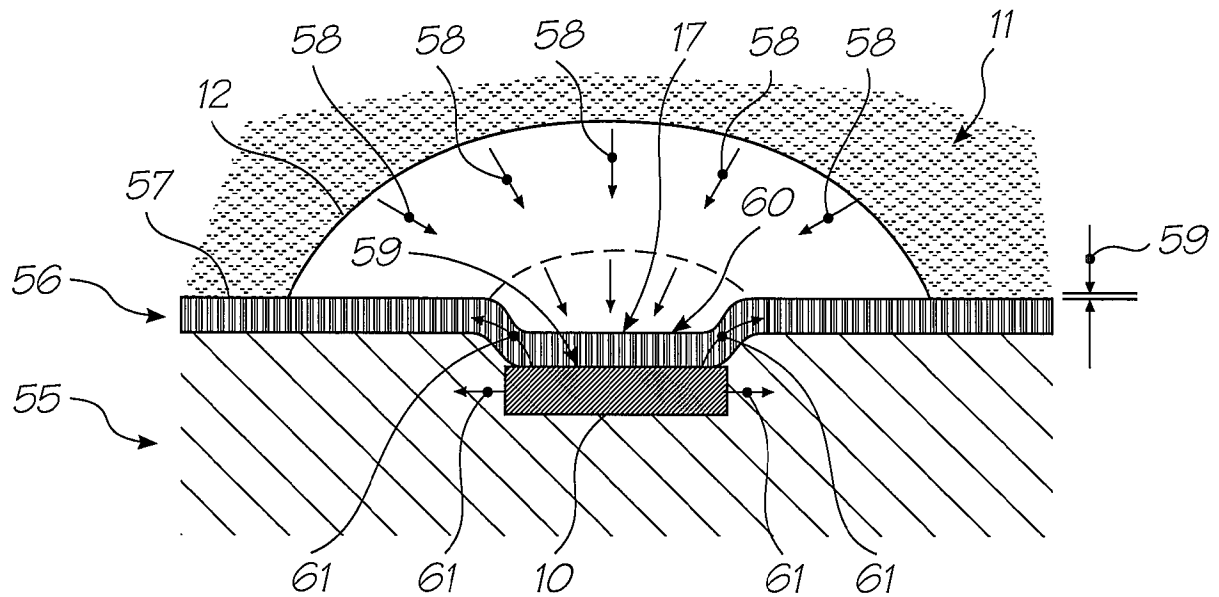


FIG. 47
(PRIOR ART)

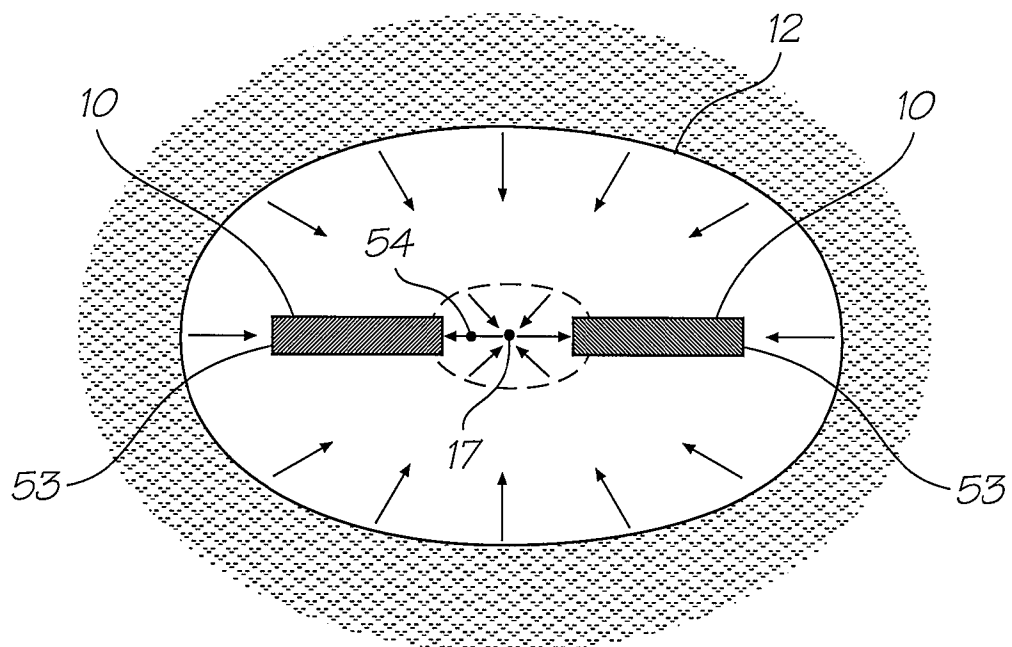


FIG. 48

28/66

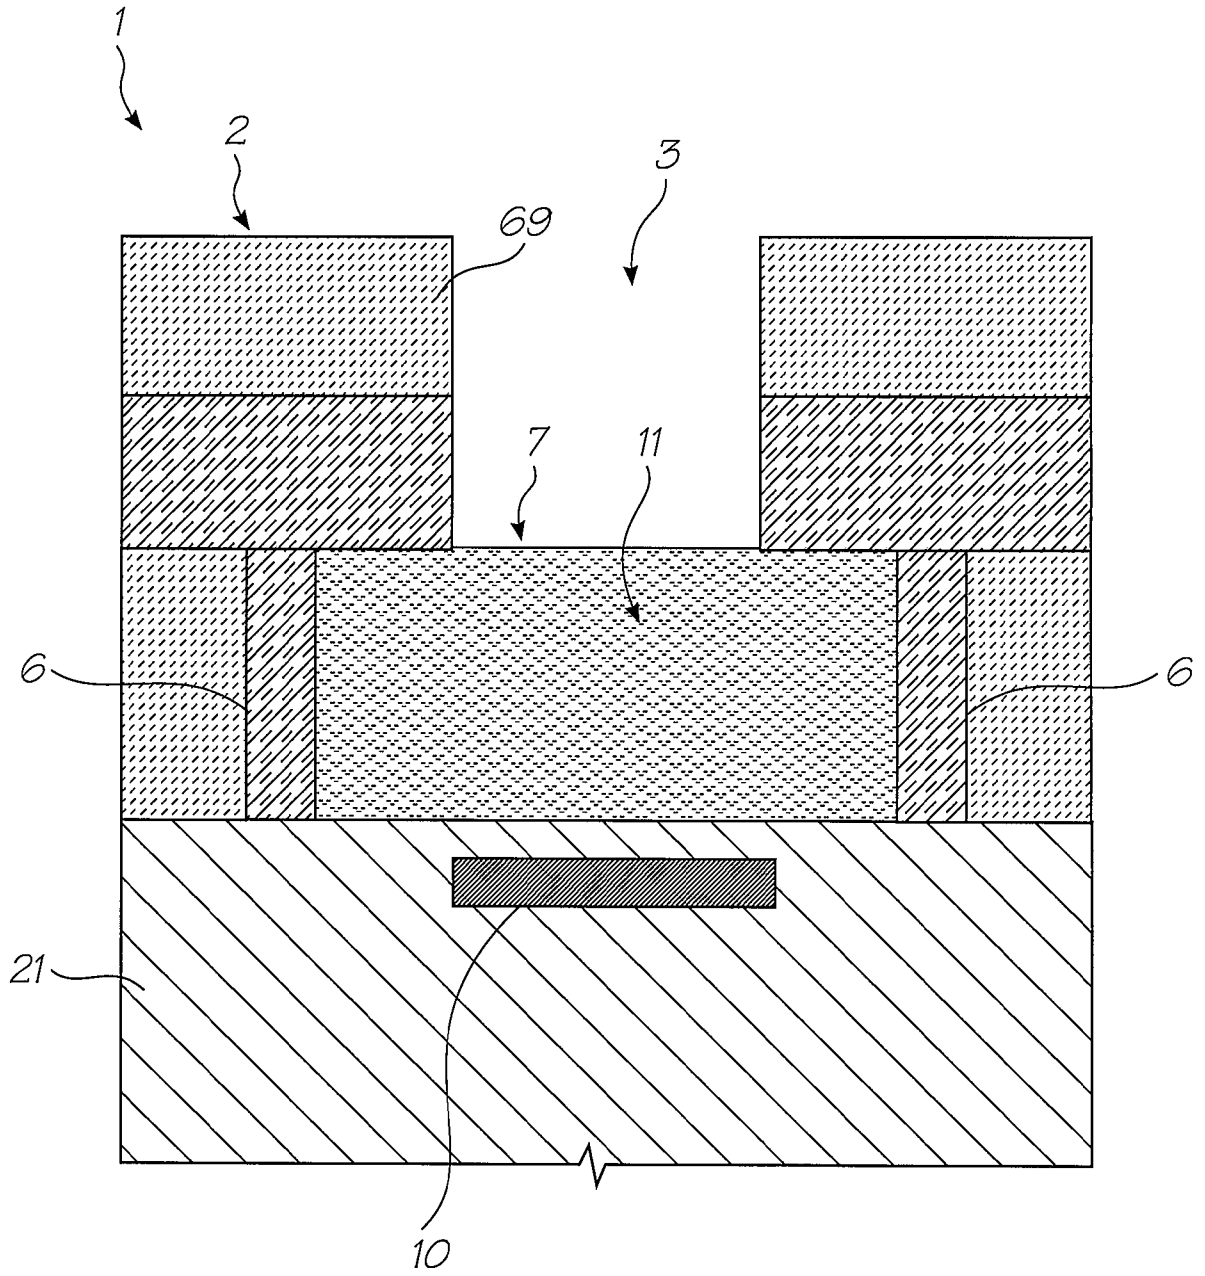


FIG. 49

29/66

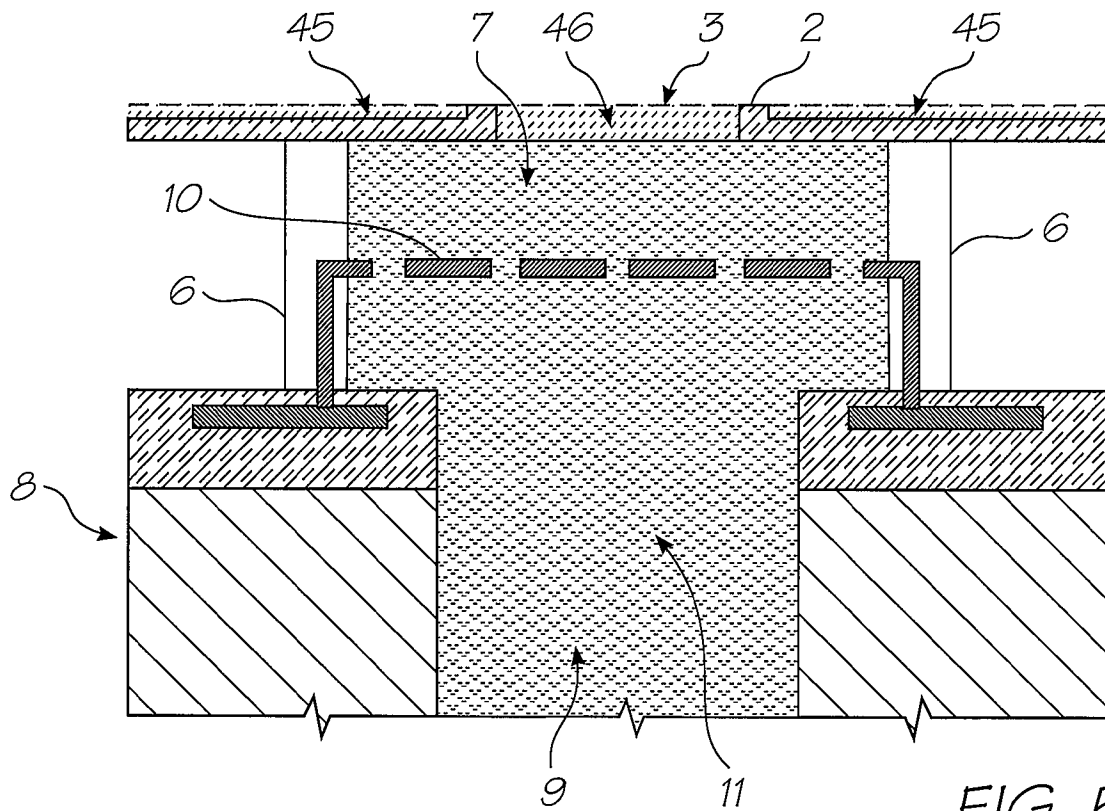


FIG. 50

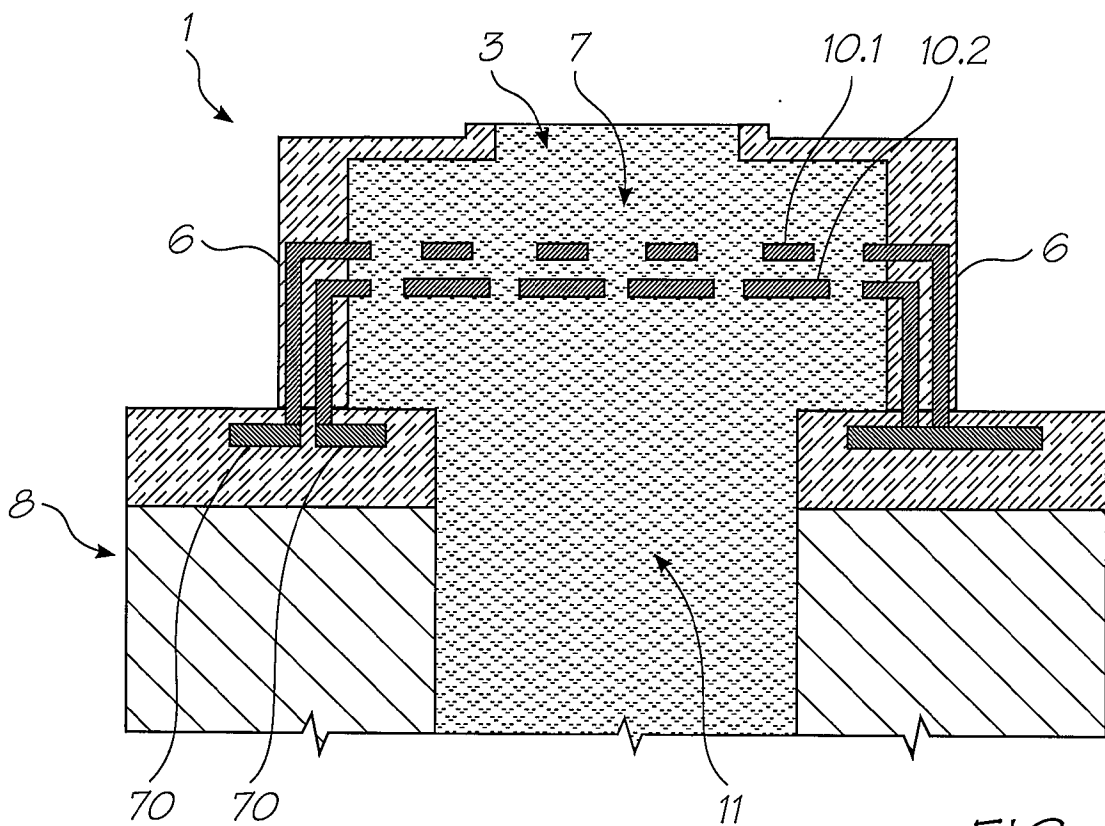


FIG. 51

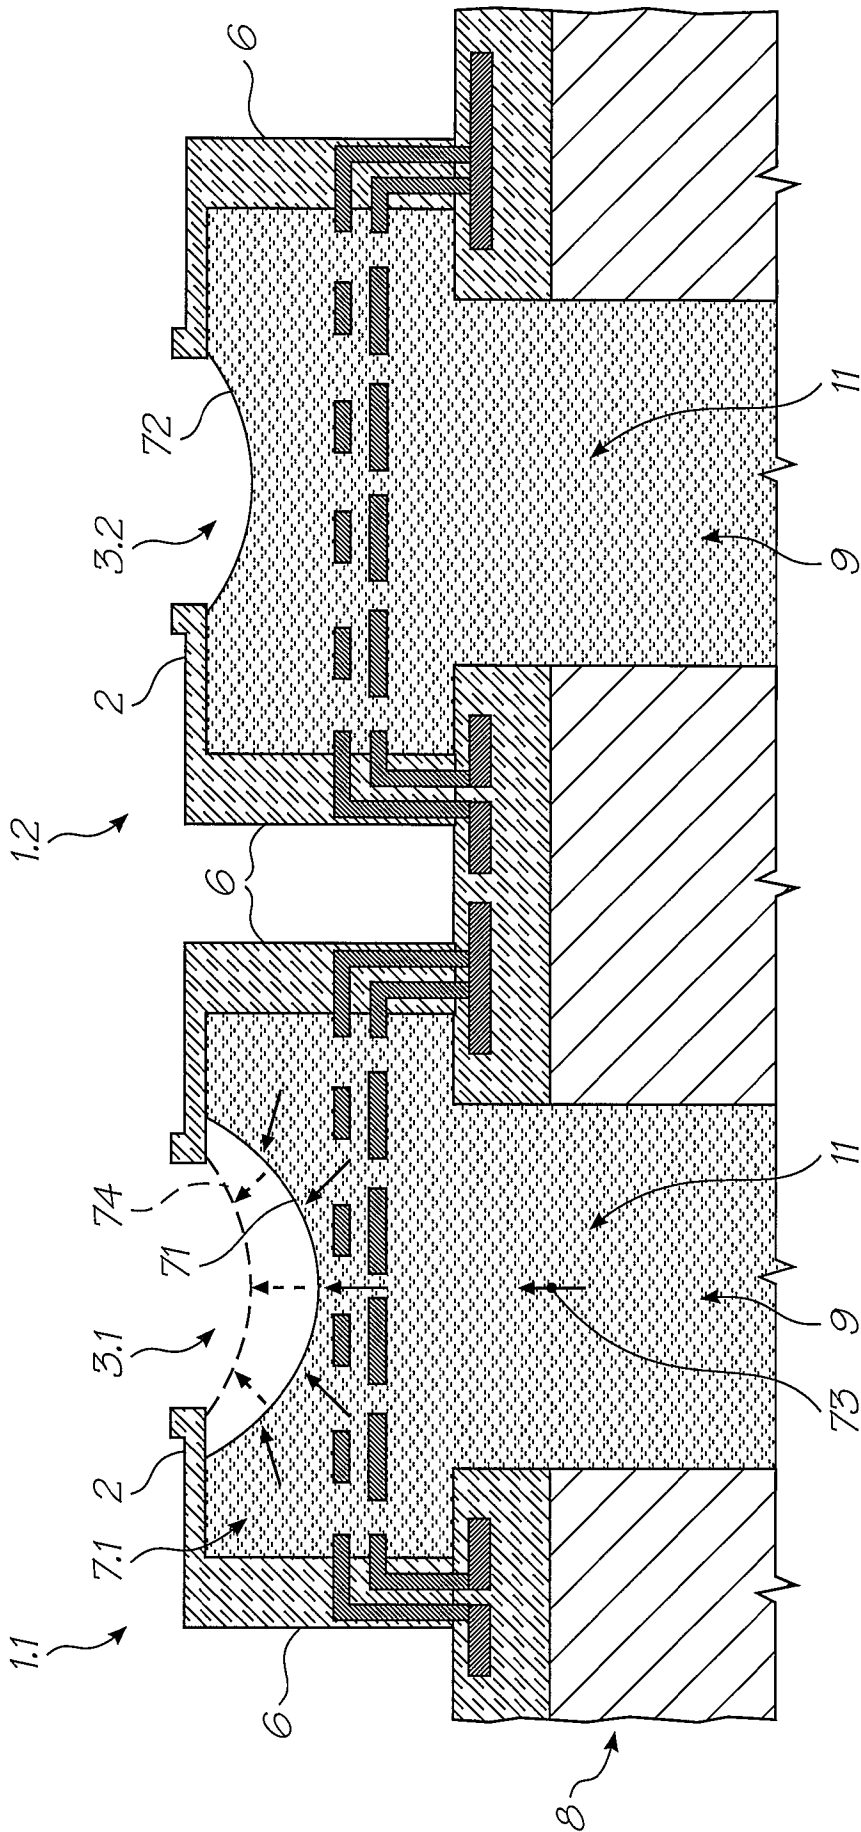


FIG. 53

31/66

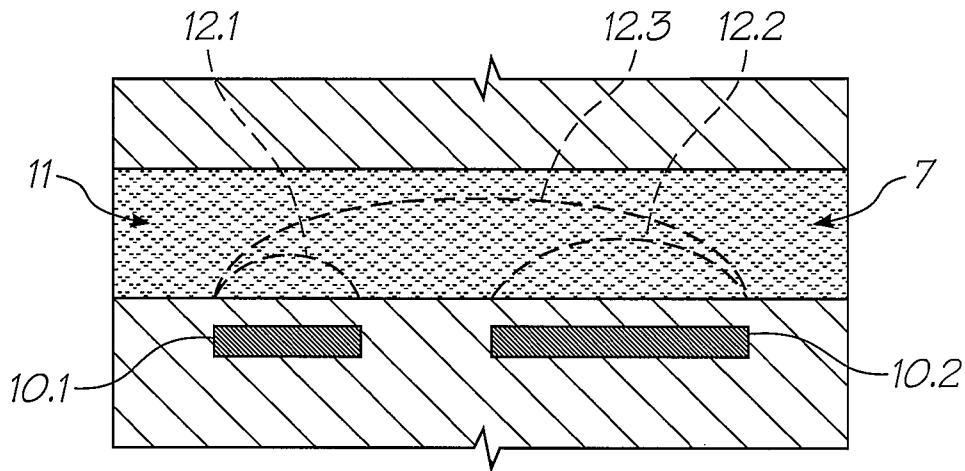


FIG. 52
(PRIOR ART)

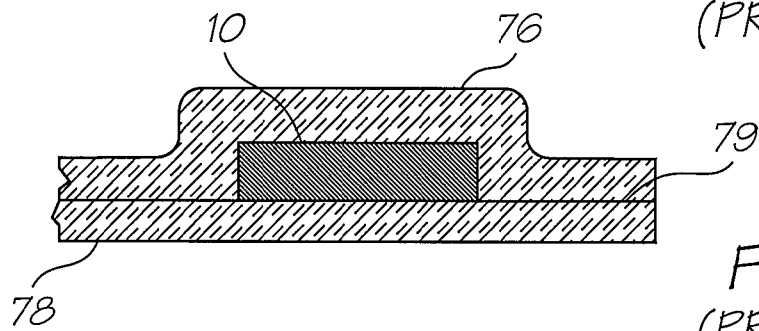


FIG. 54
(PRIOR ART)

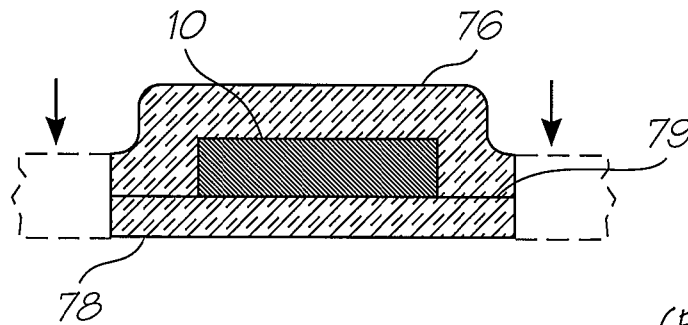


FIG. 55
(PRIOR ART)

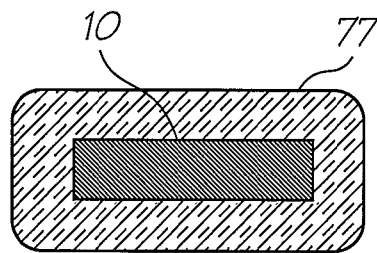


FIG. 56

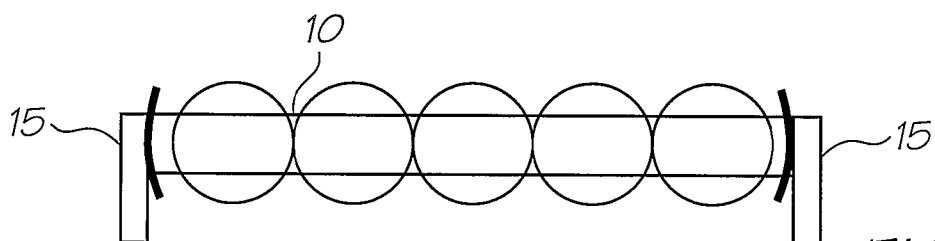


FIG. 57

32/66

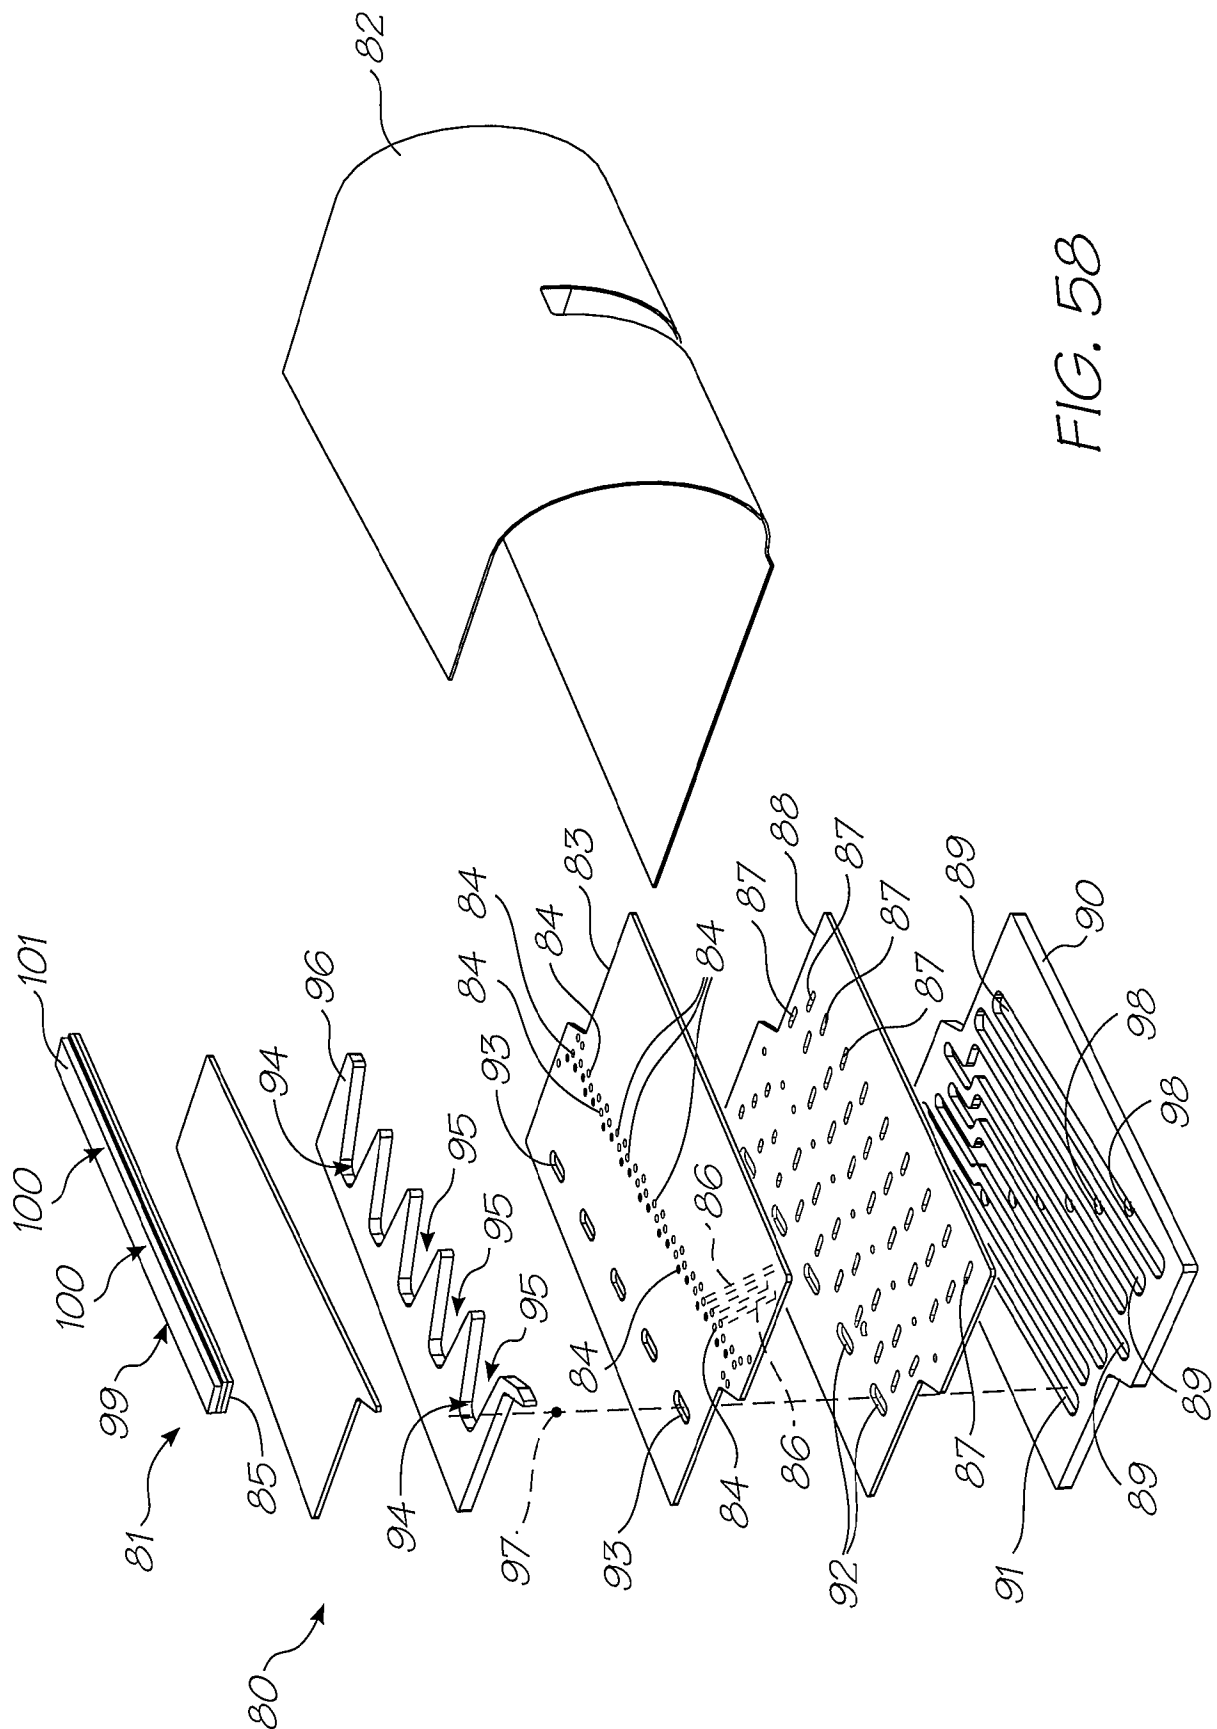


FIG. 58

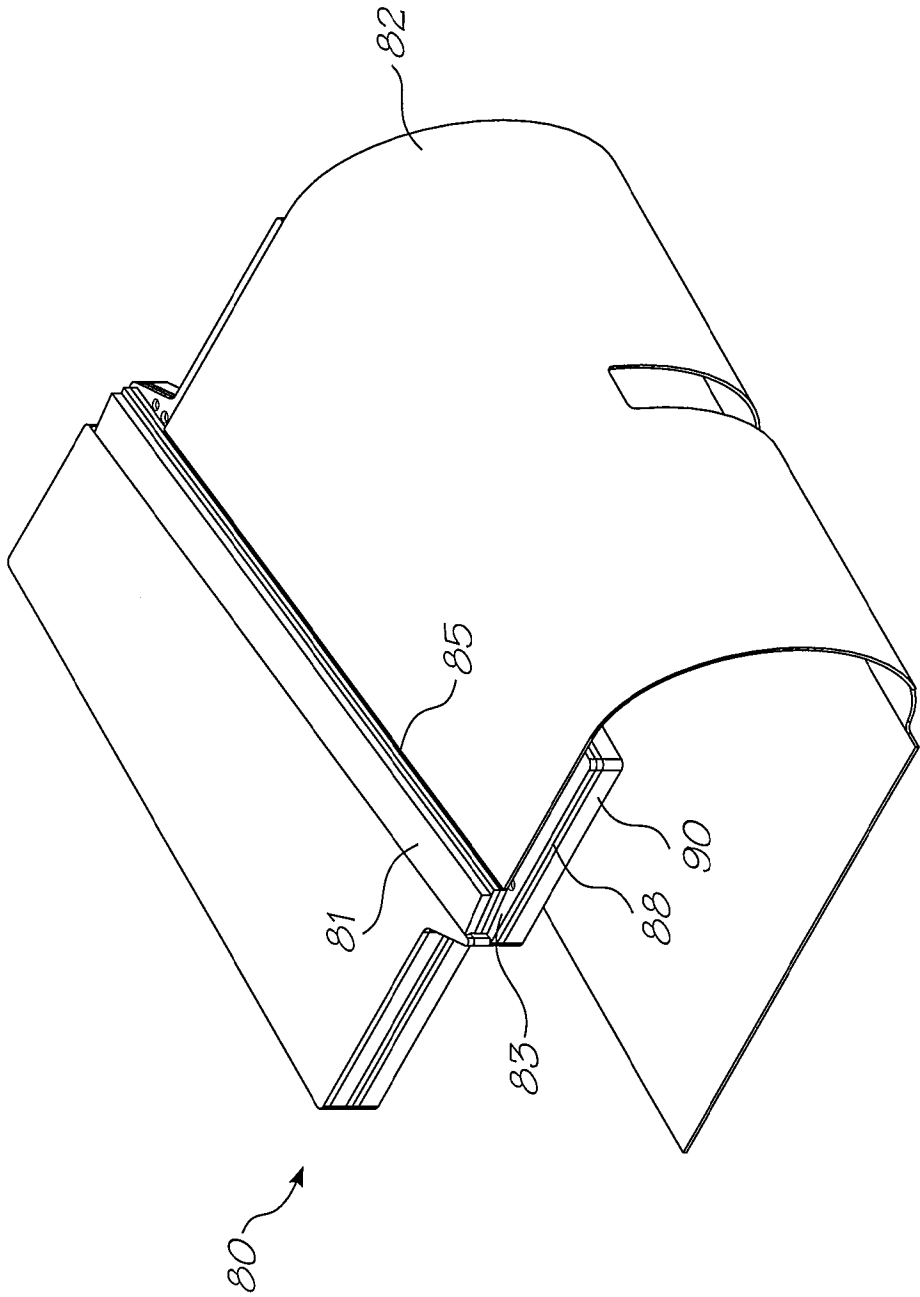
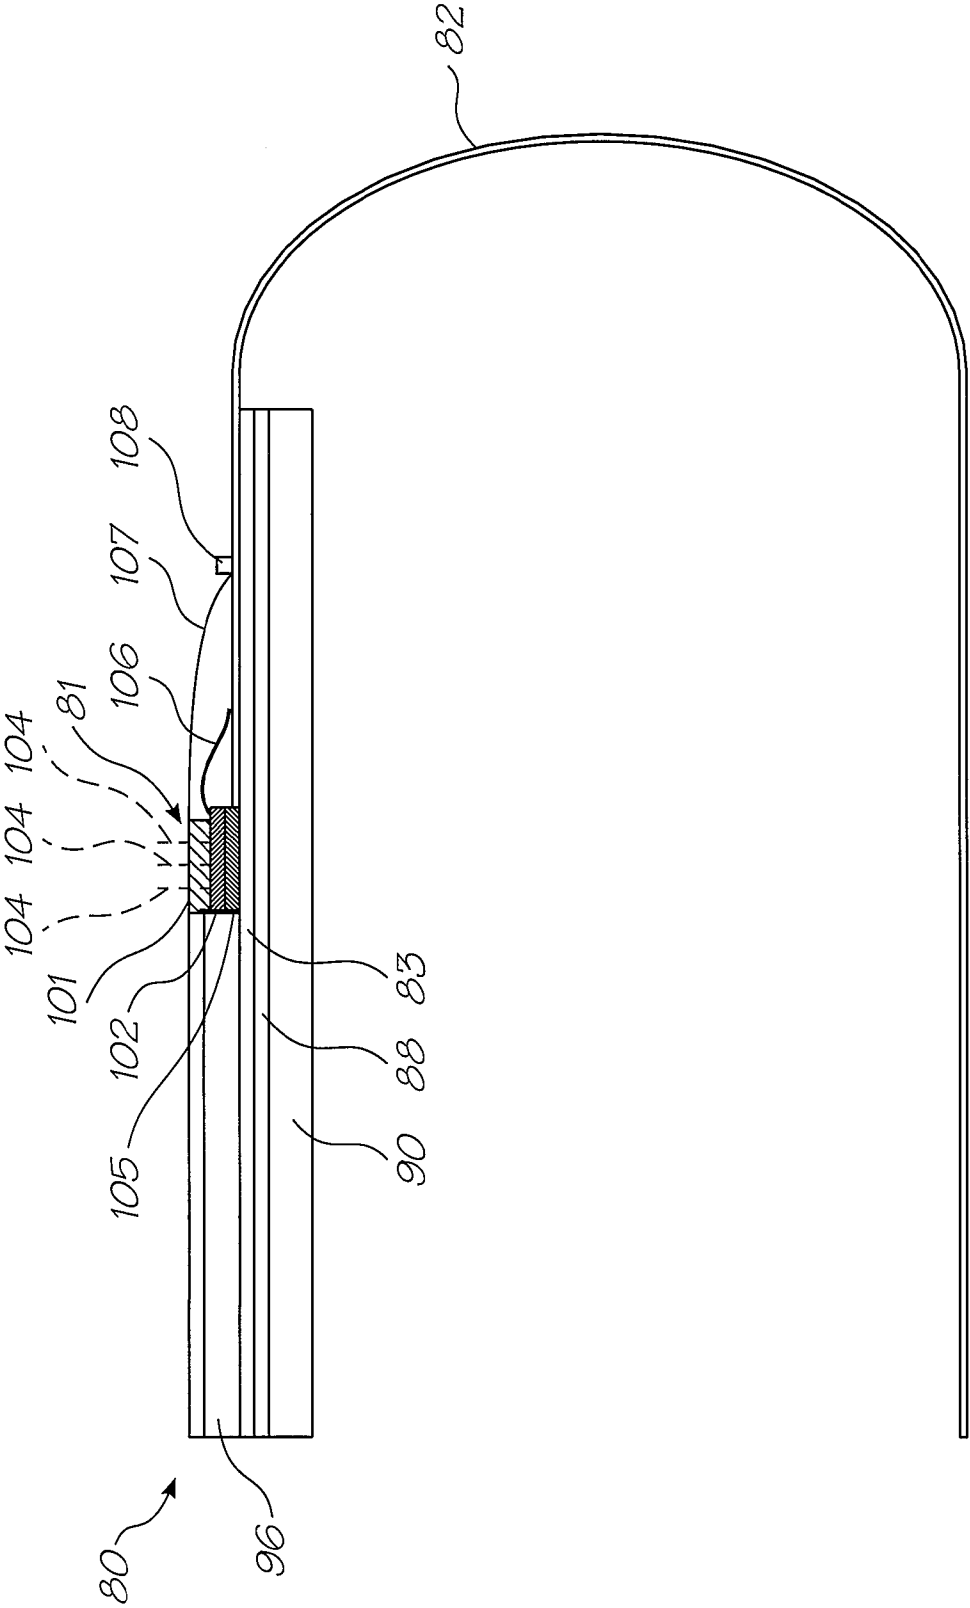


FIG. 59



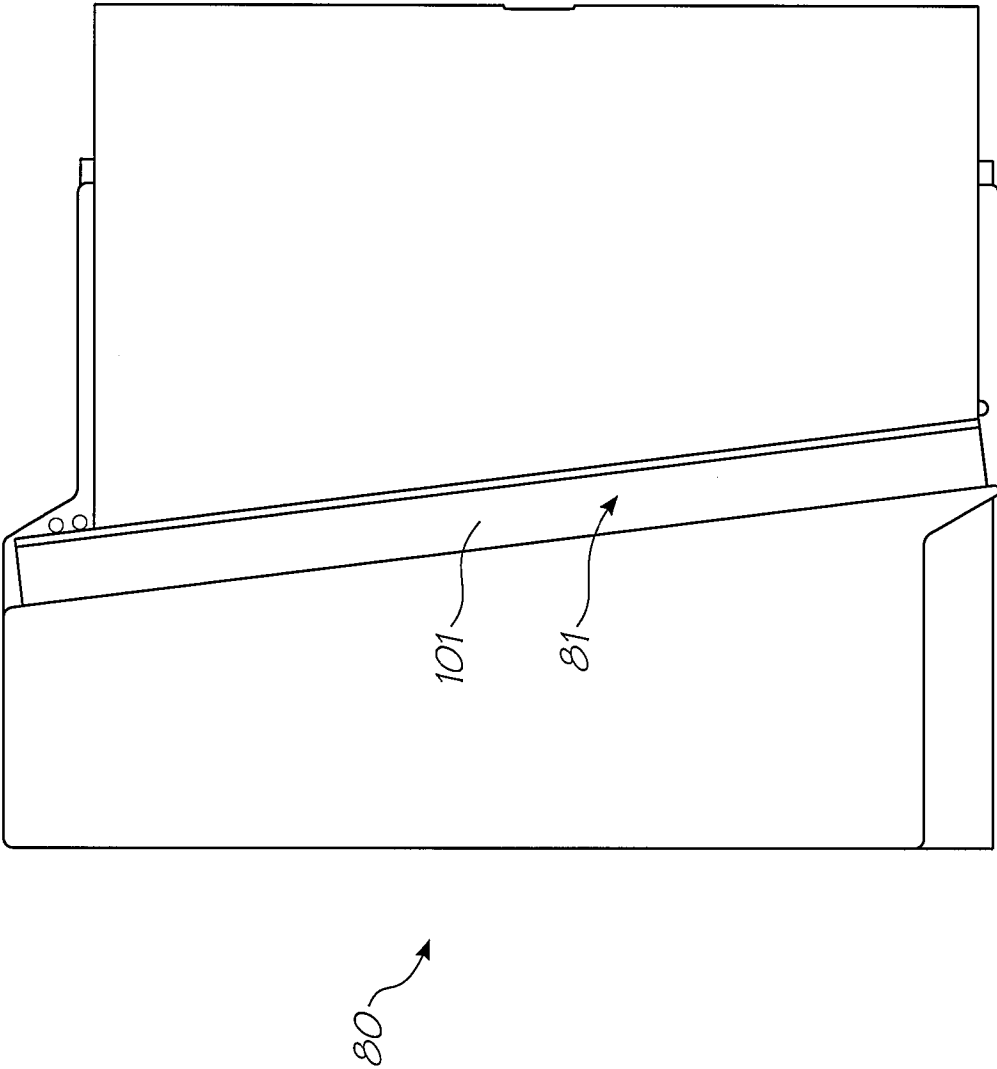


FIG. 61

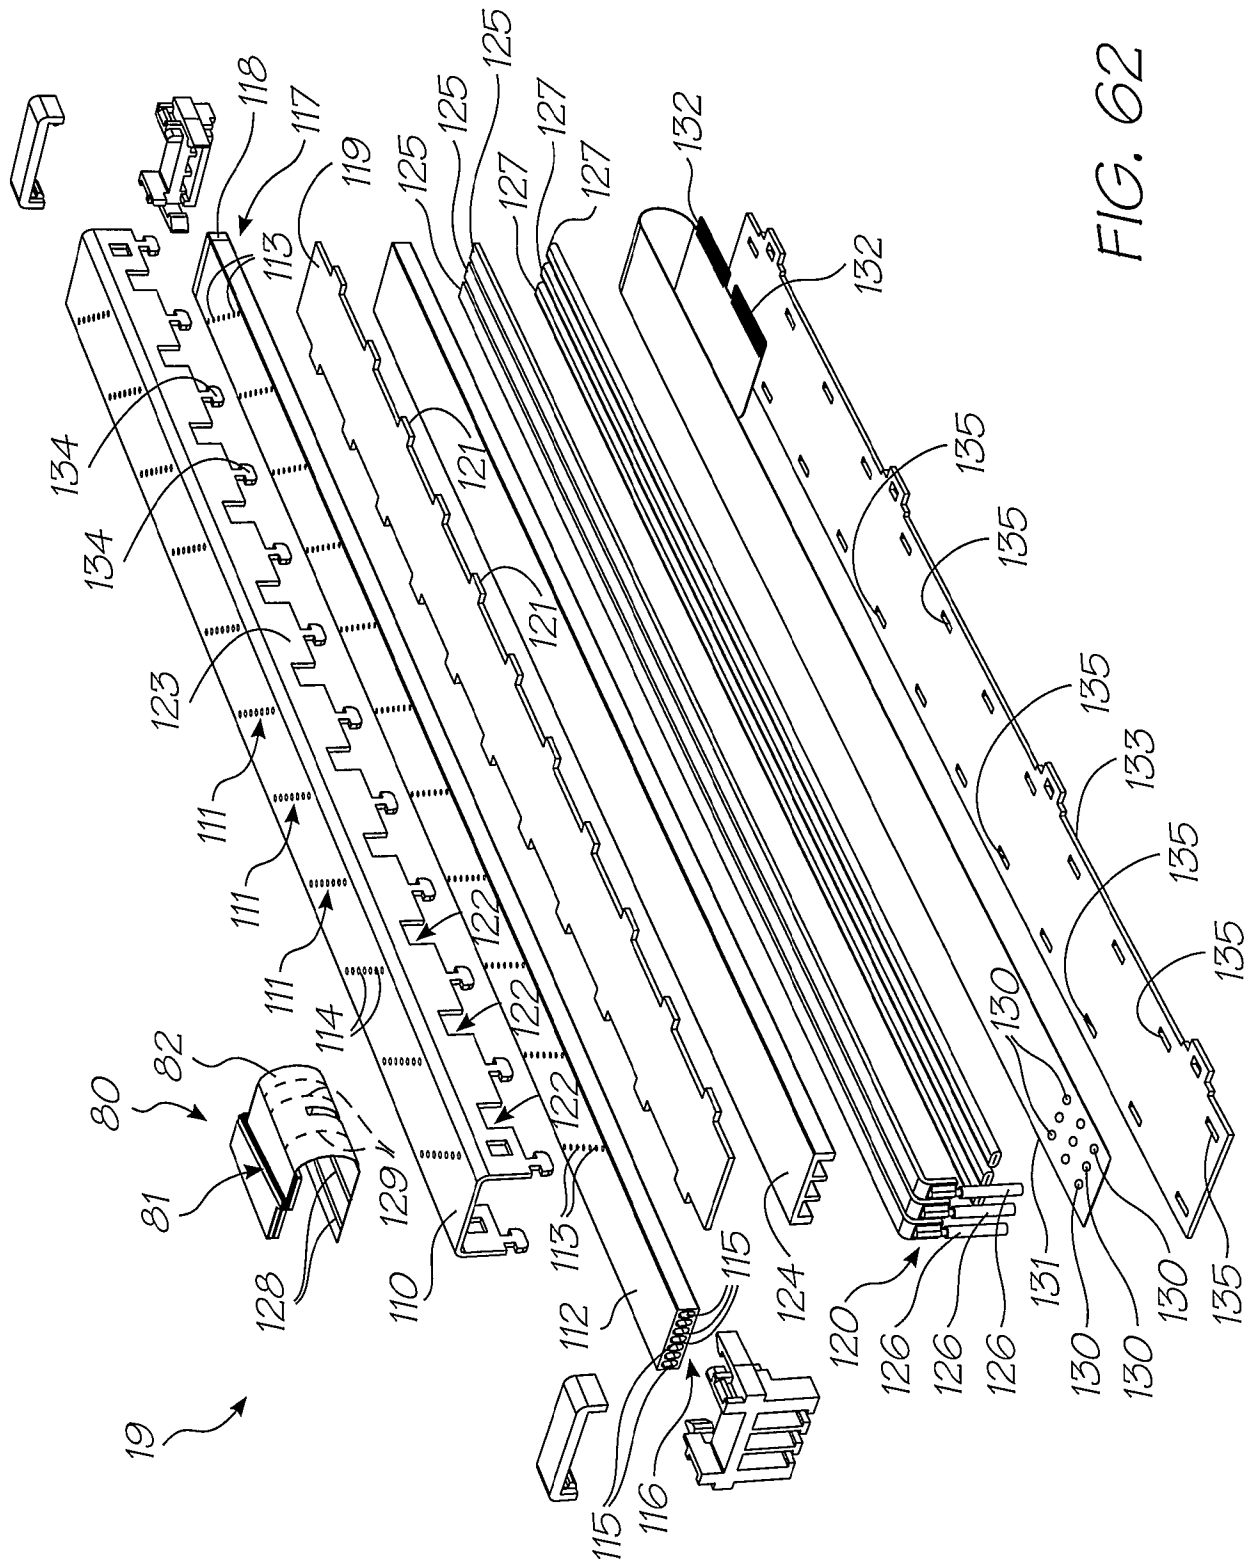


FIG. 62

37/66

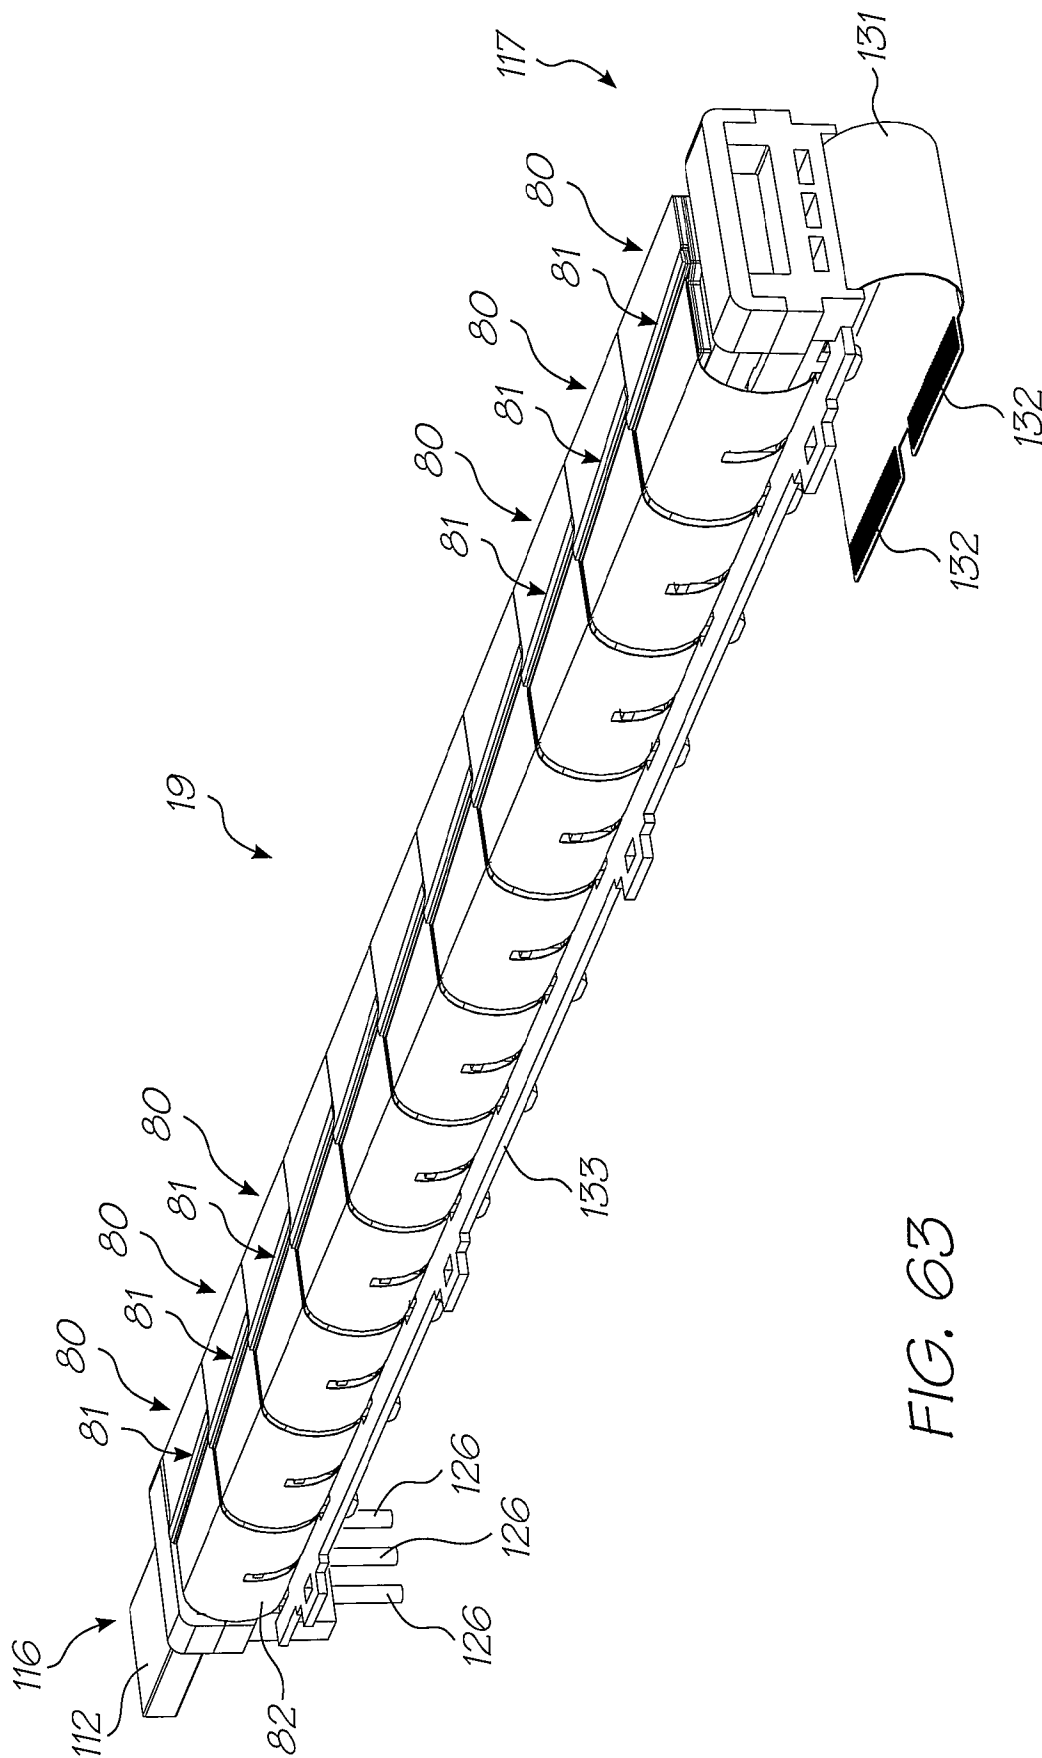


FIG. 63

38/66

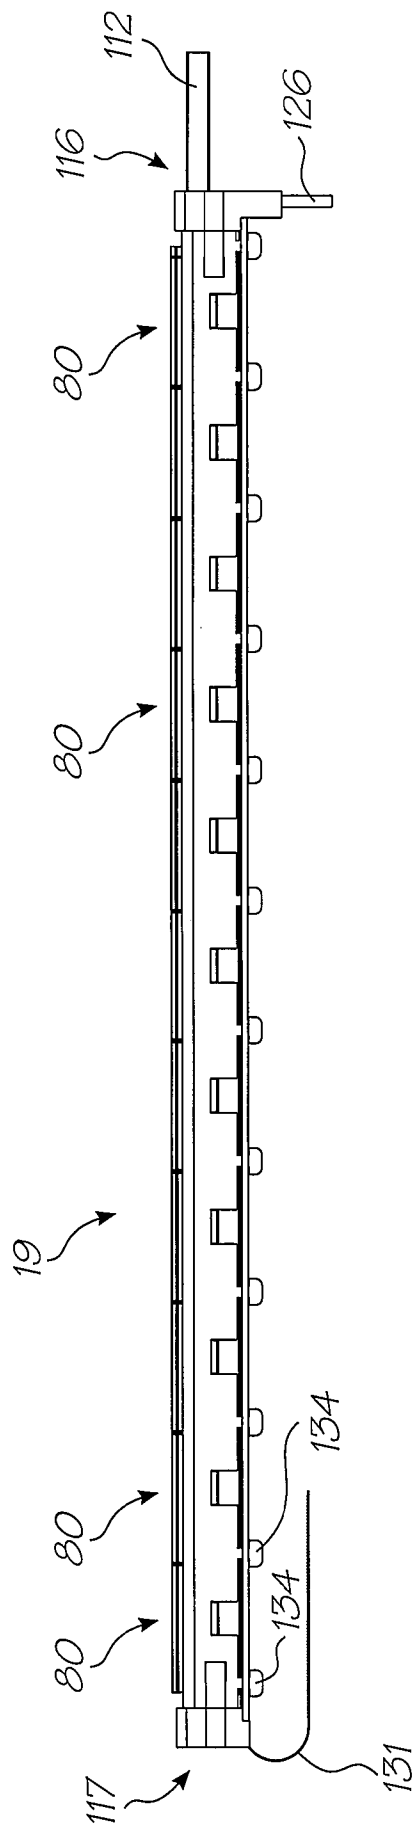


FIG. 64



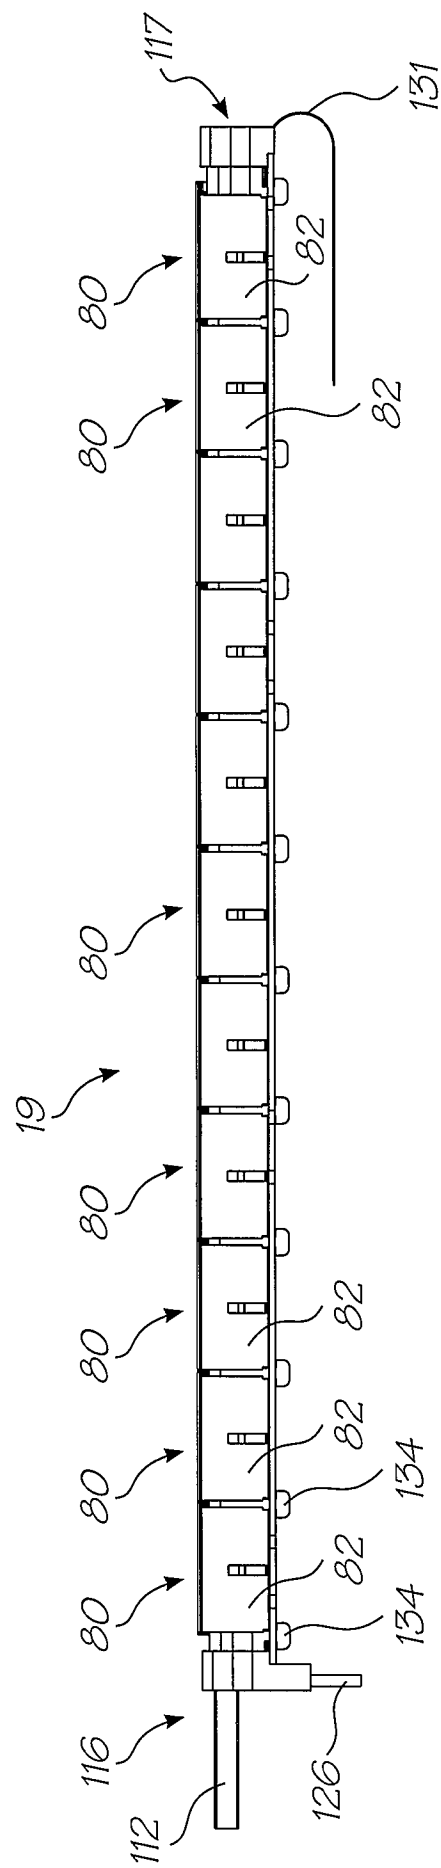


FIG. 65

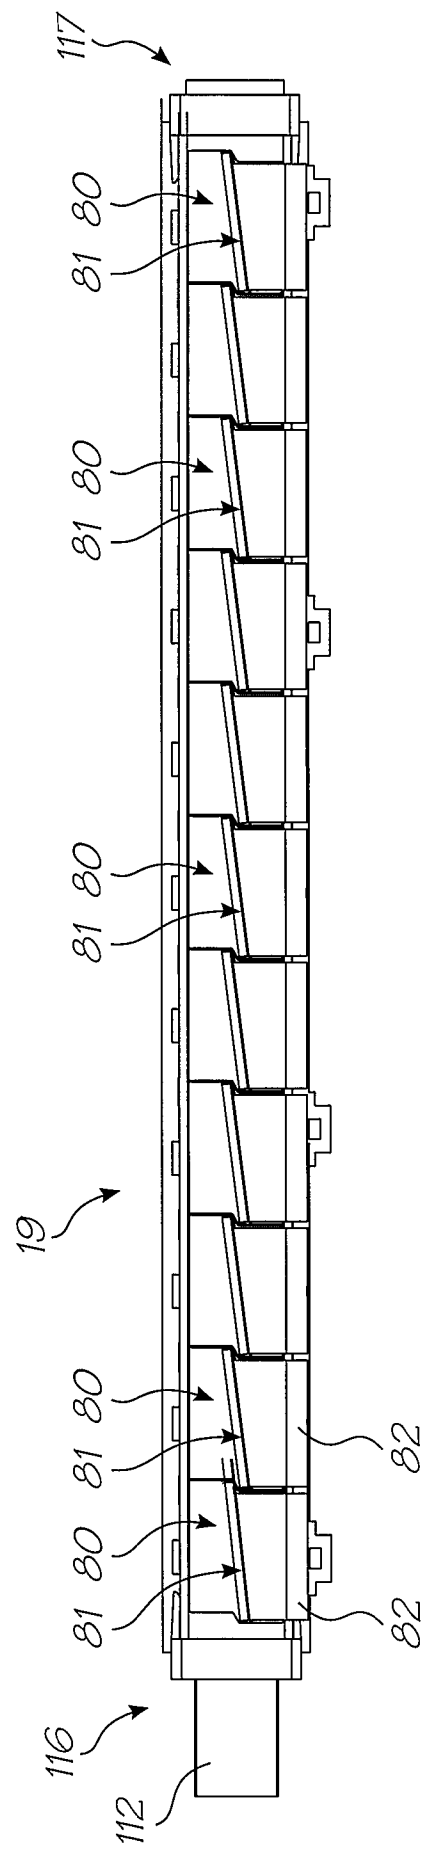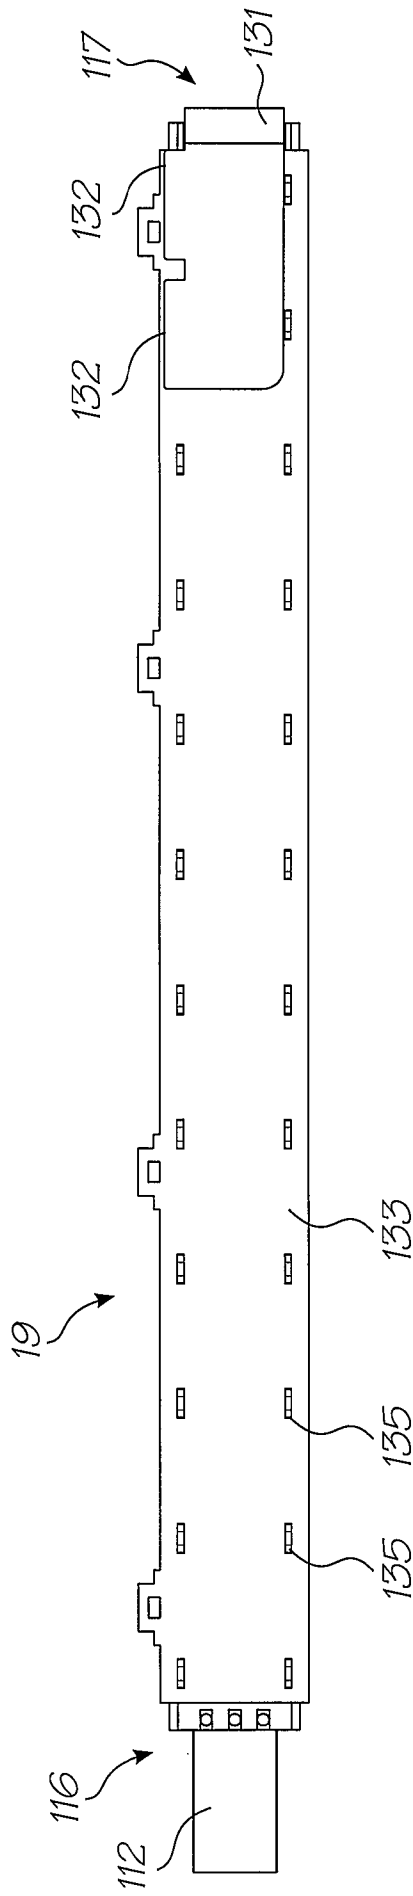

40/66

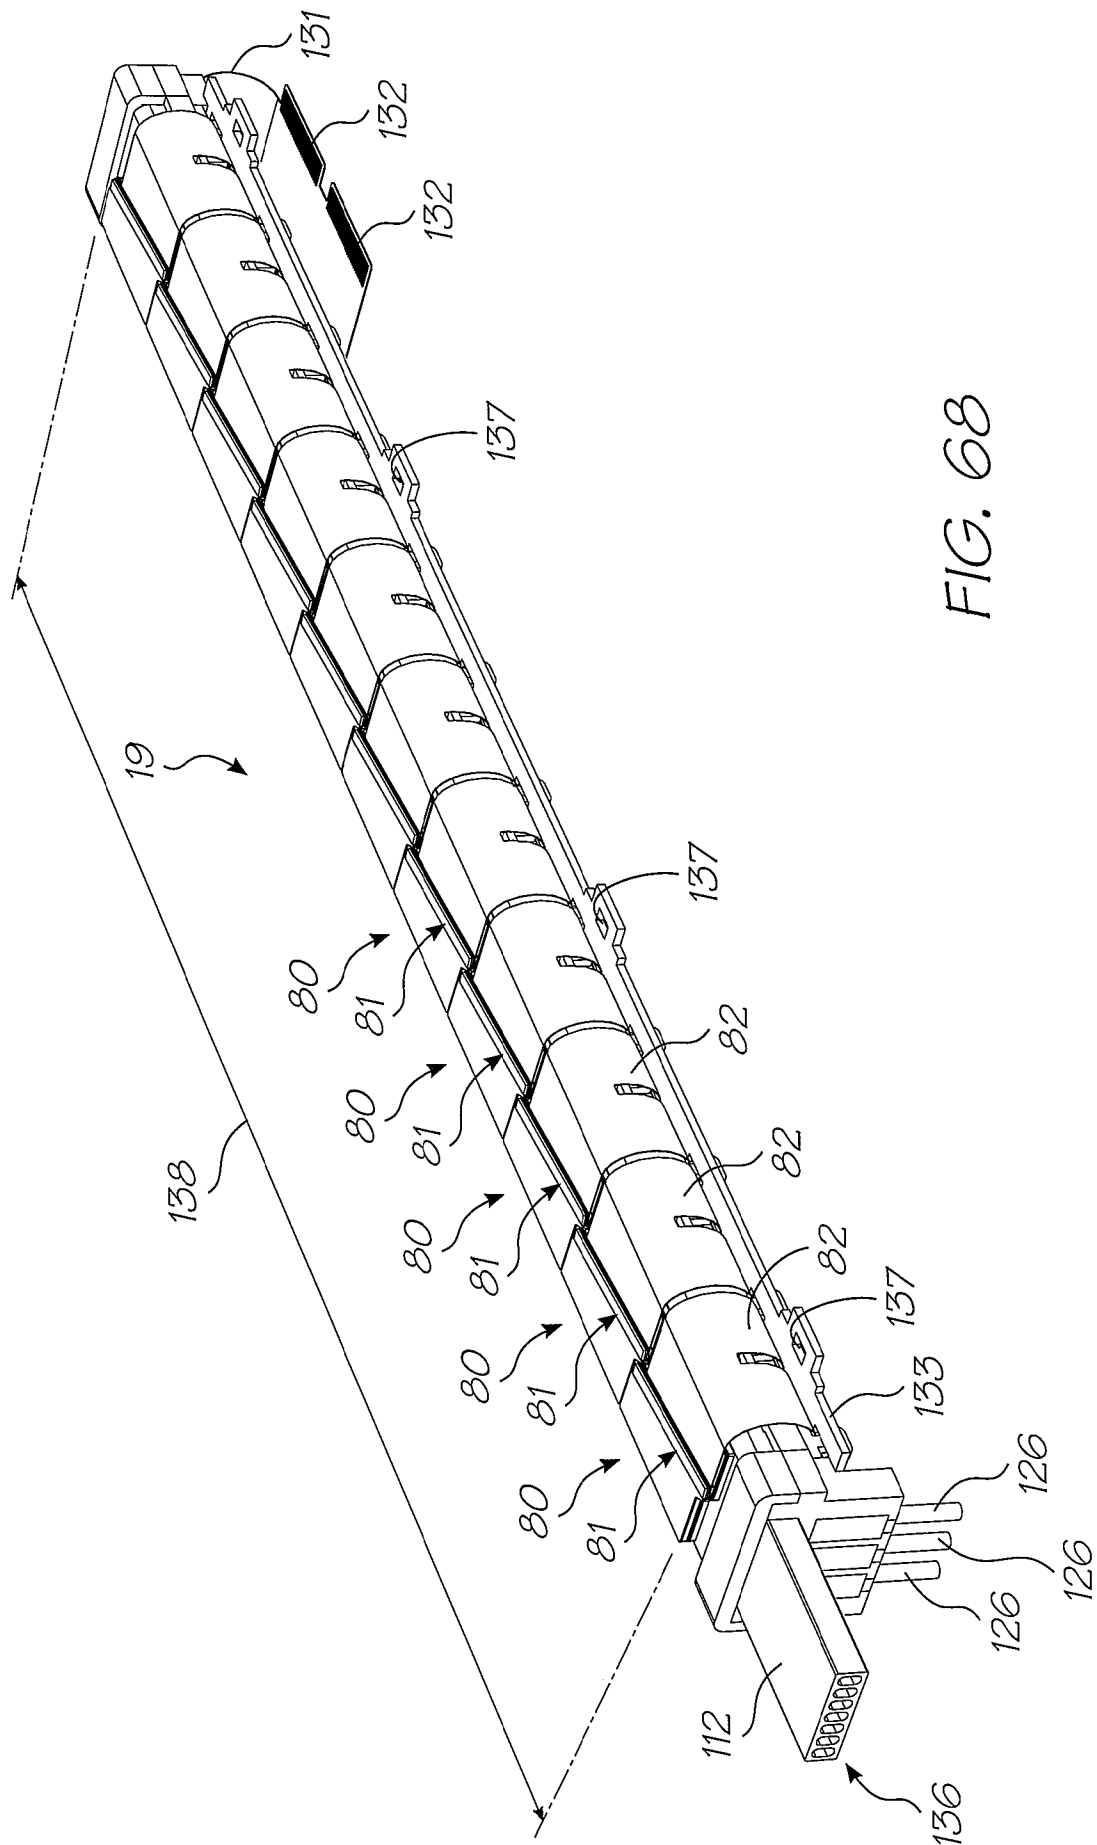


FIG. 68

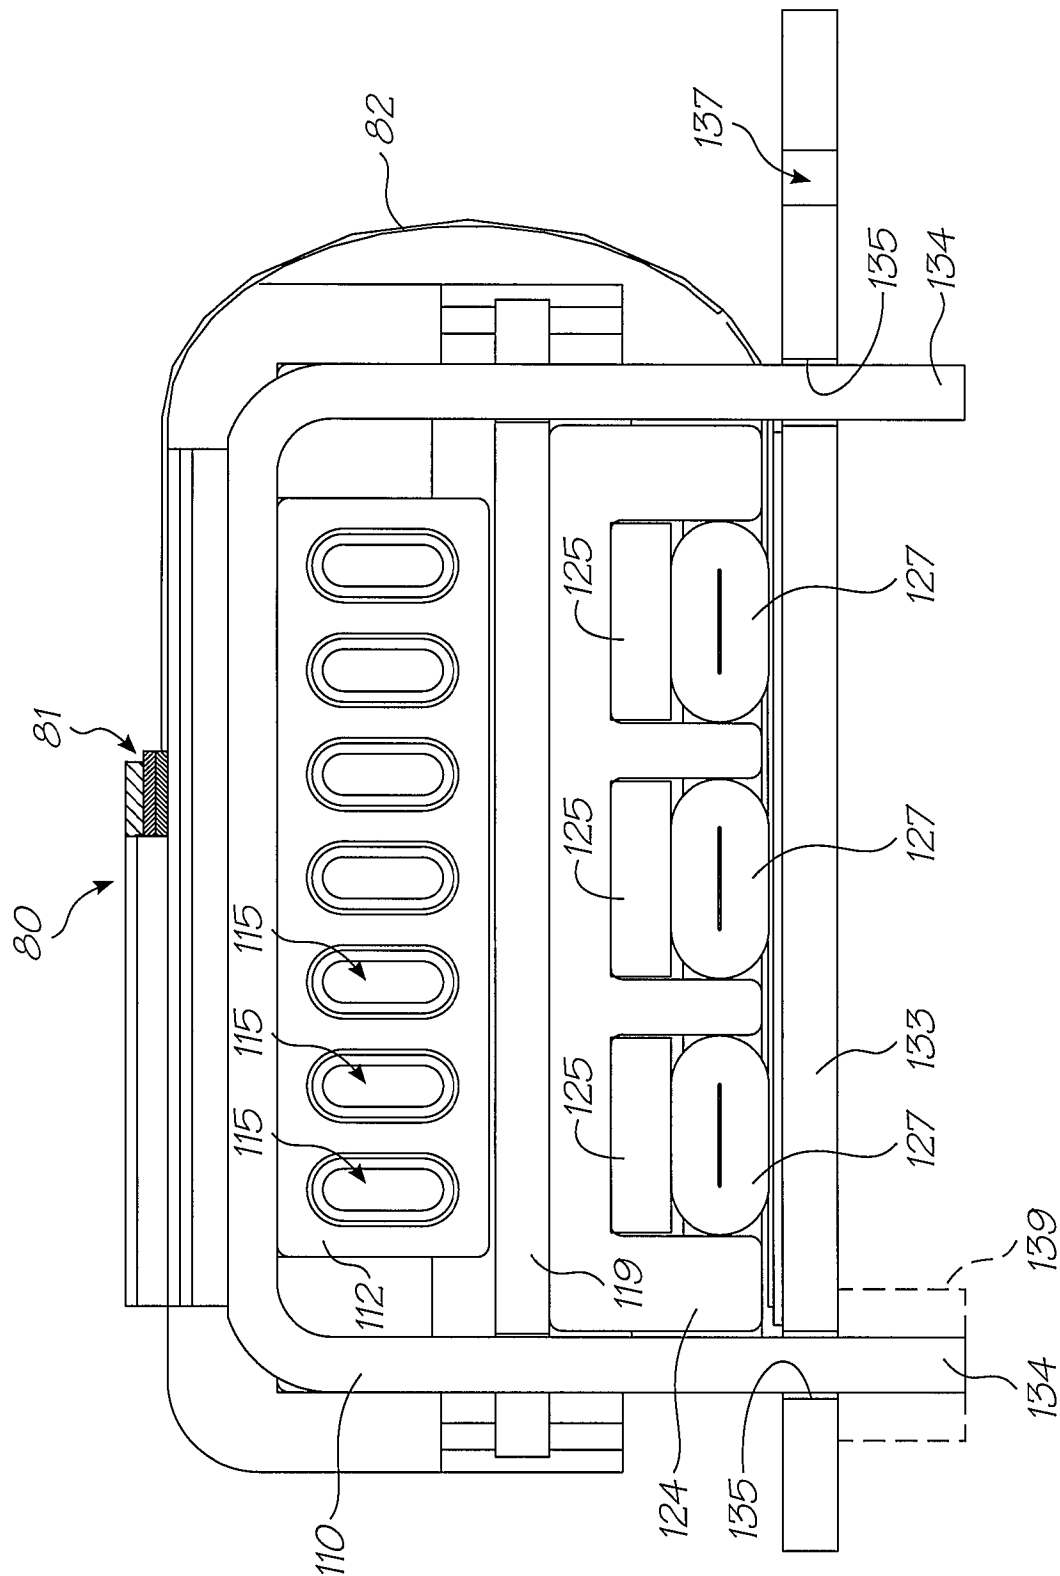


FIG. 69

42/66

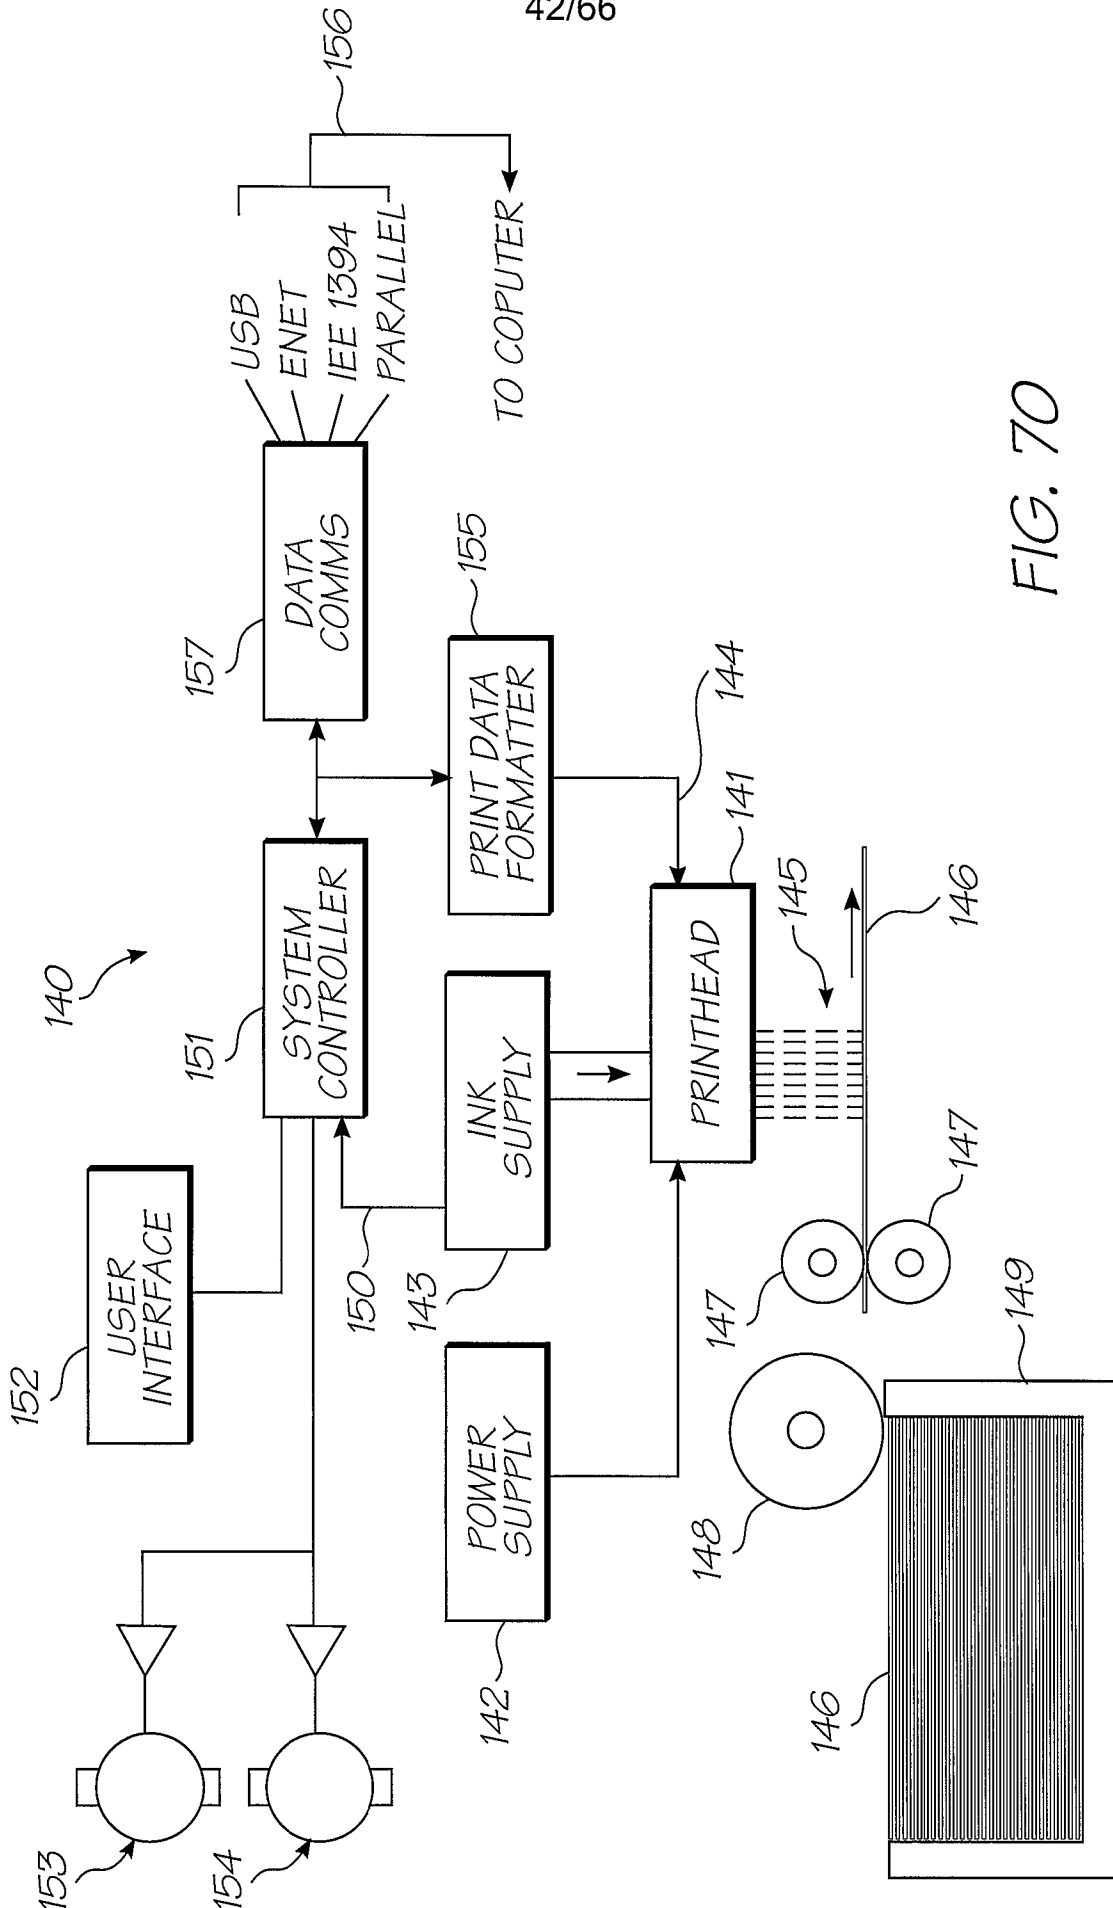
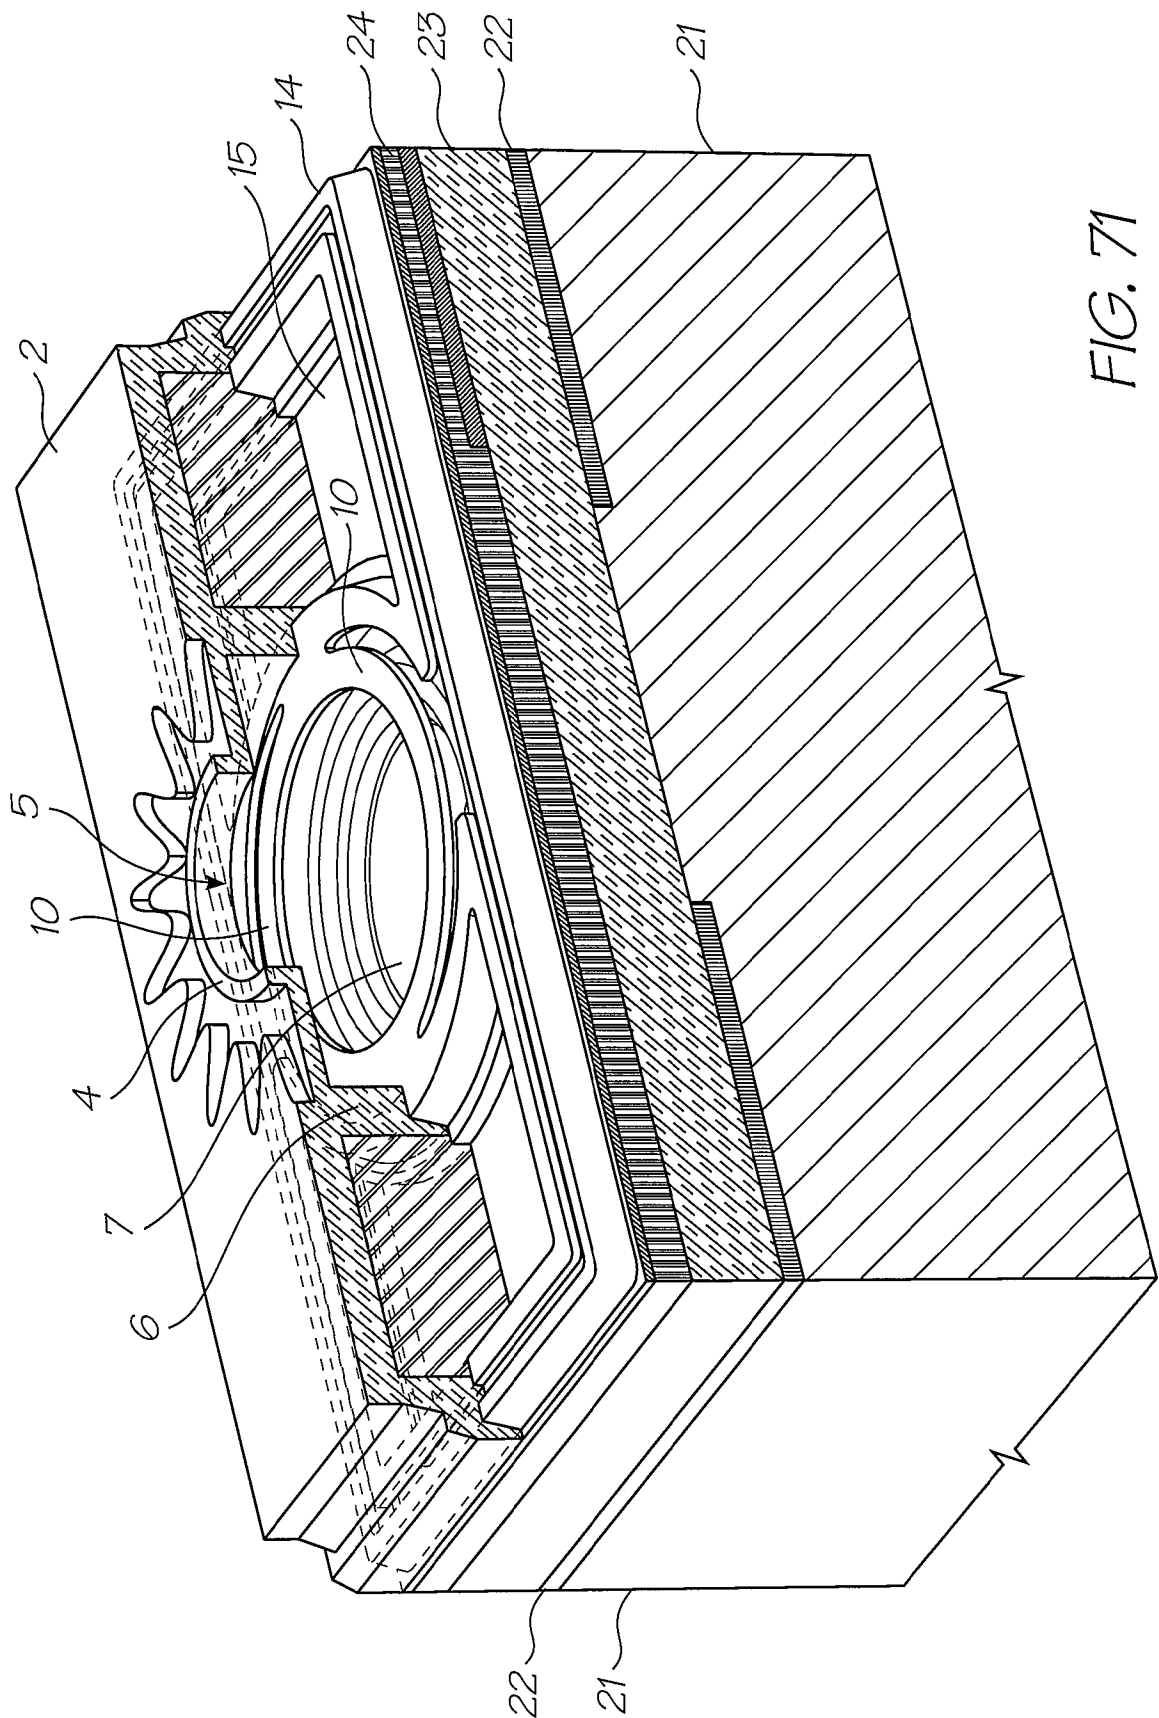


FIG. 70



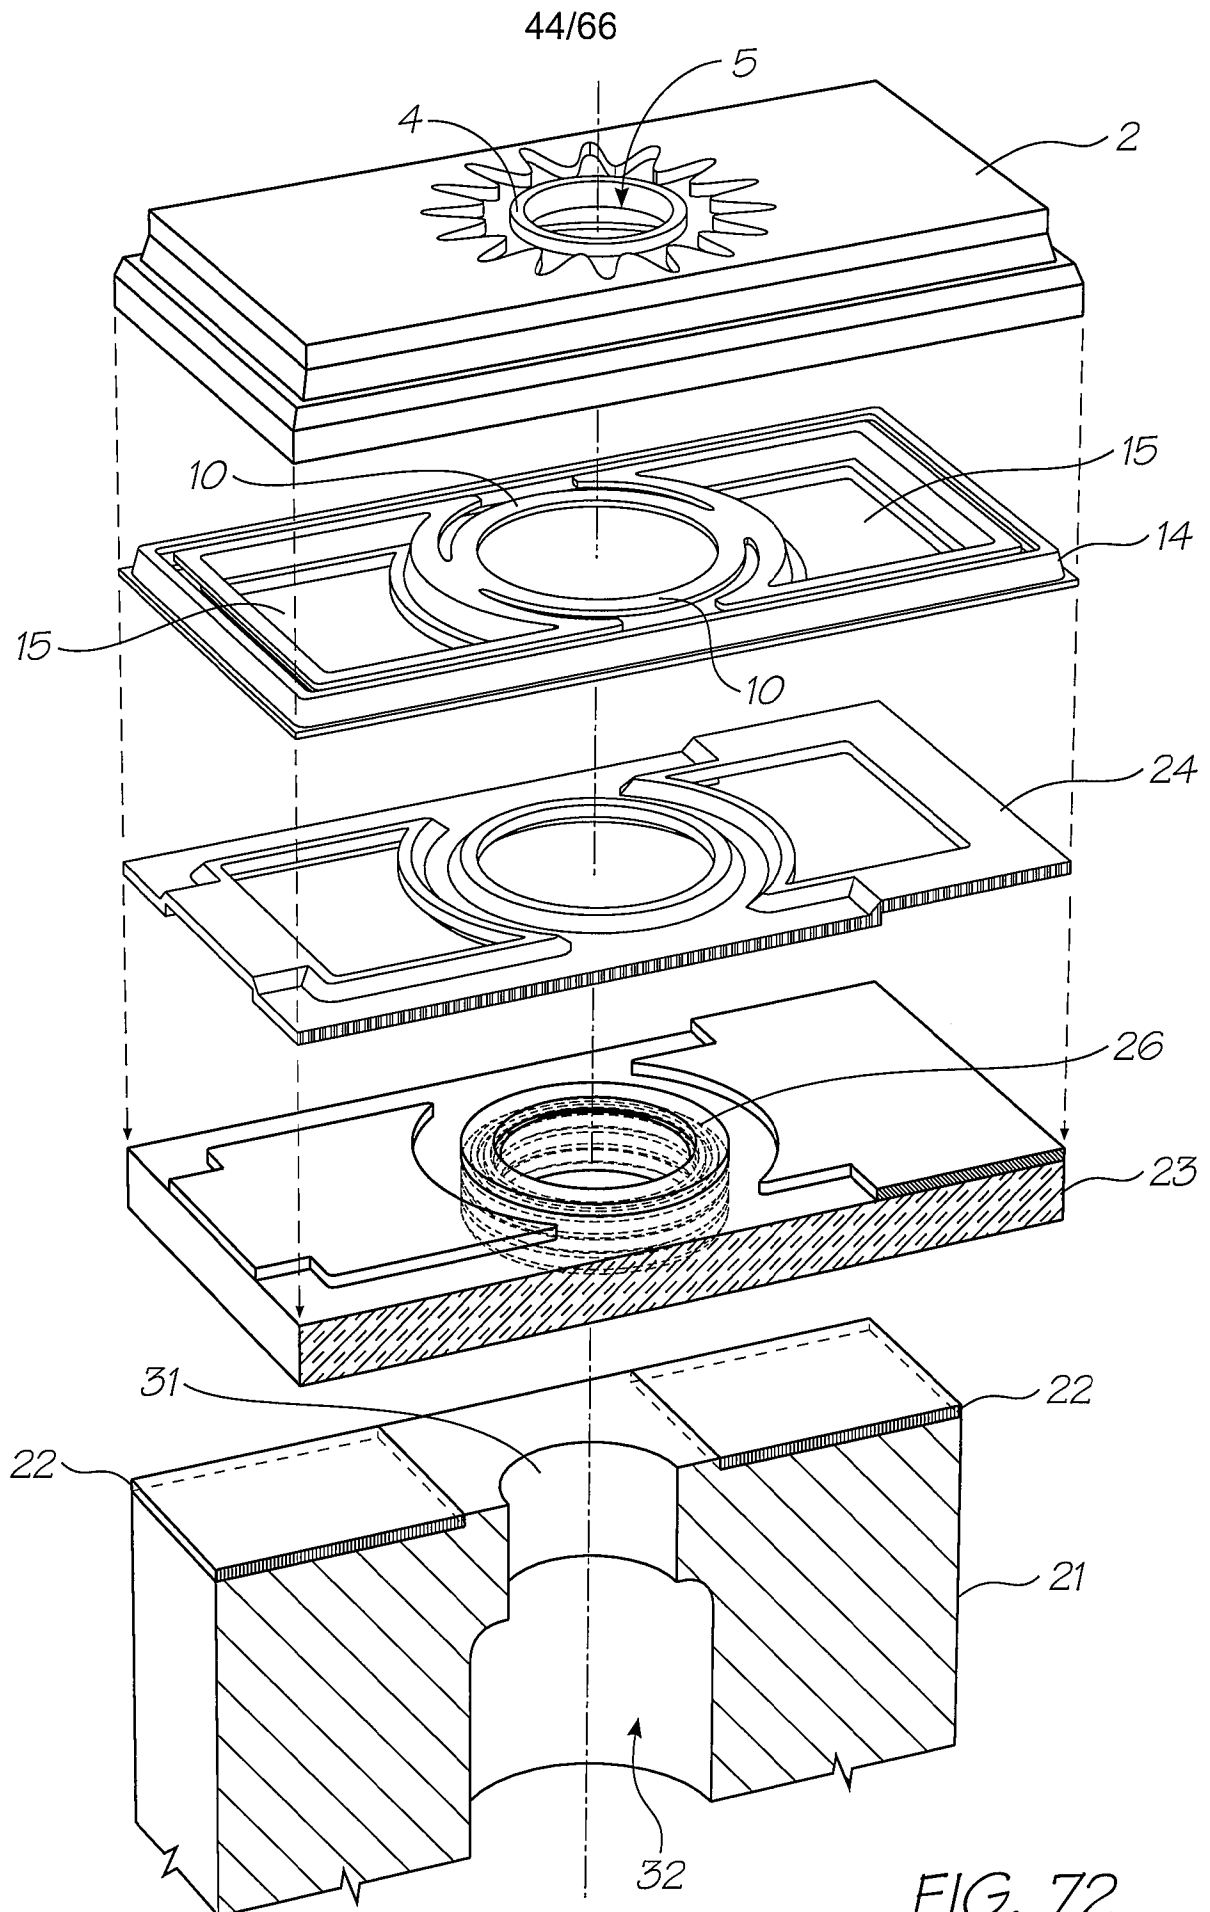


FIG. 72

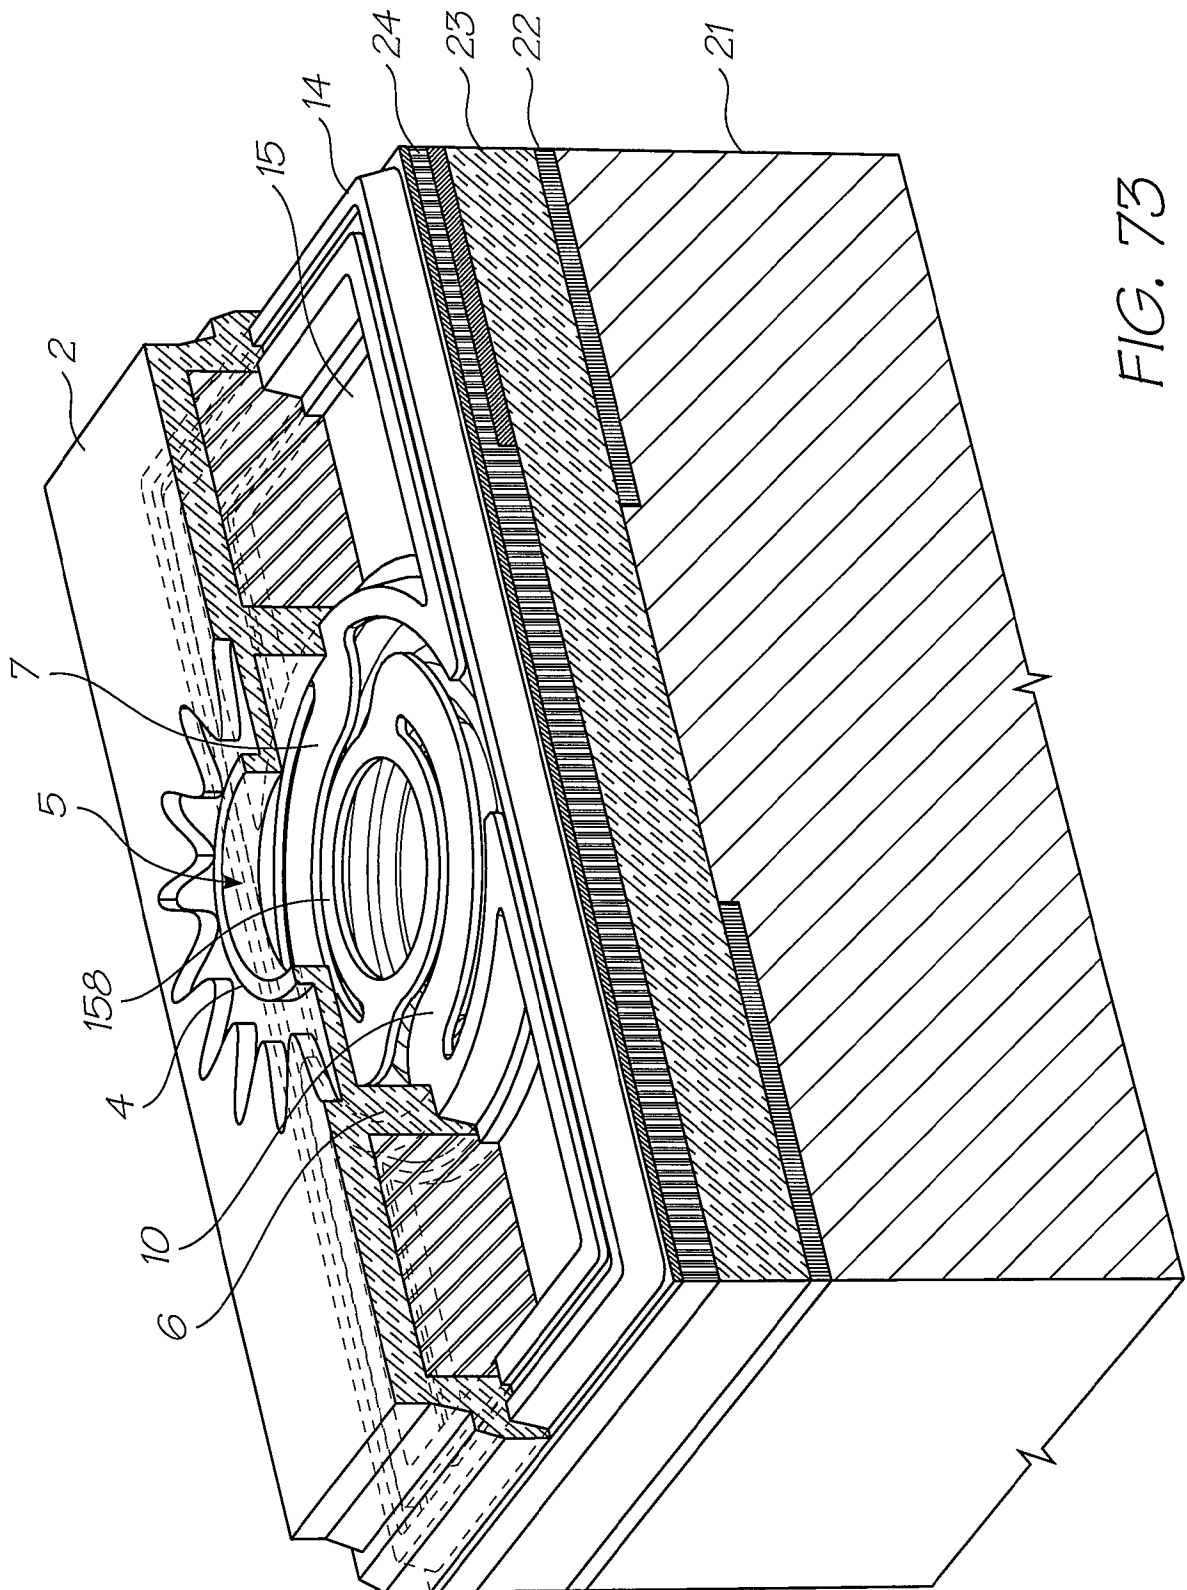


FIG. 73

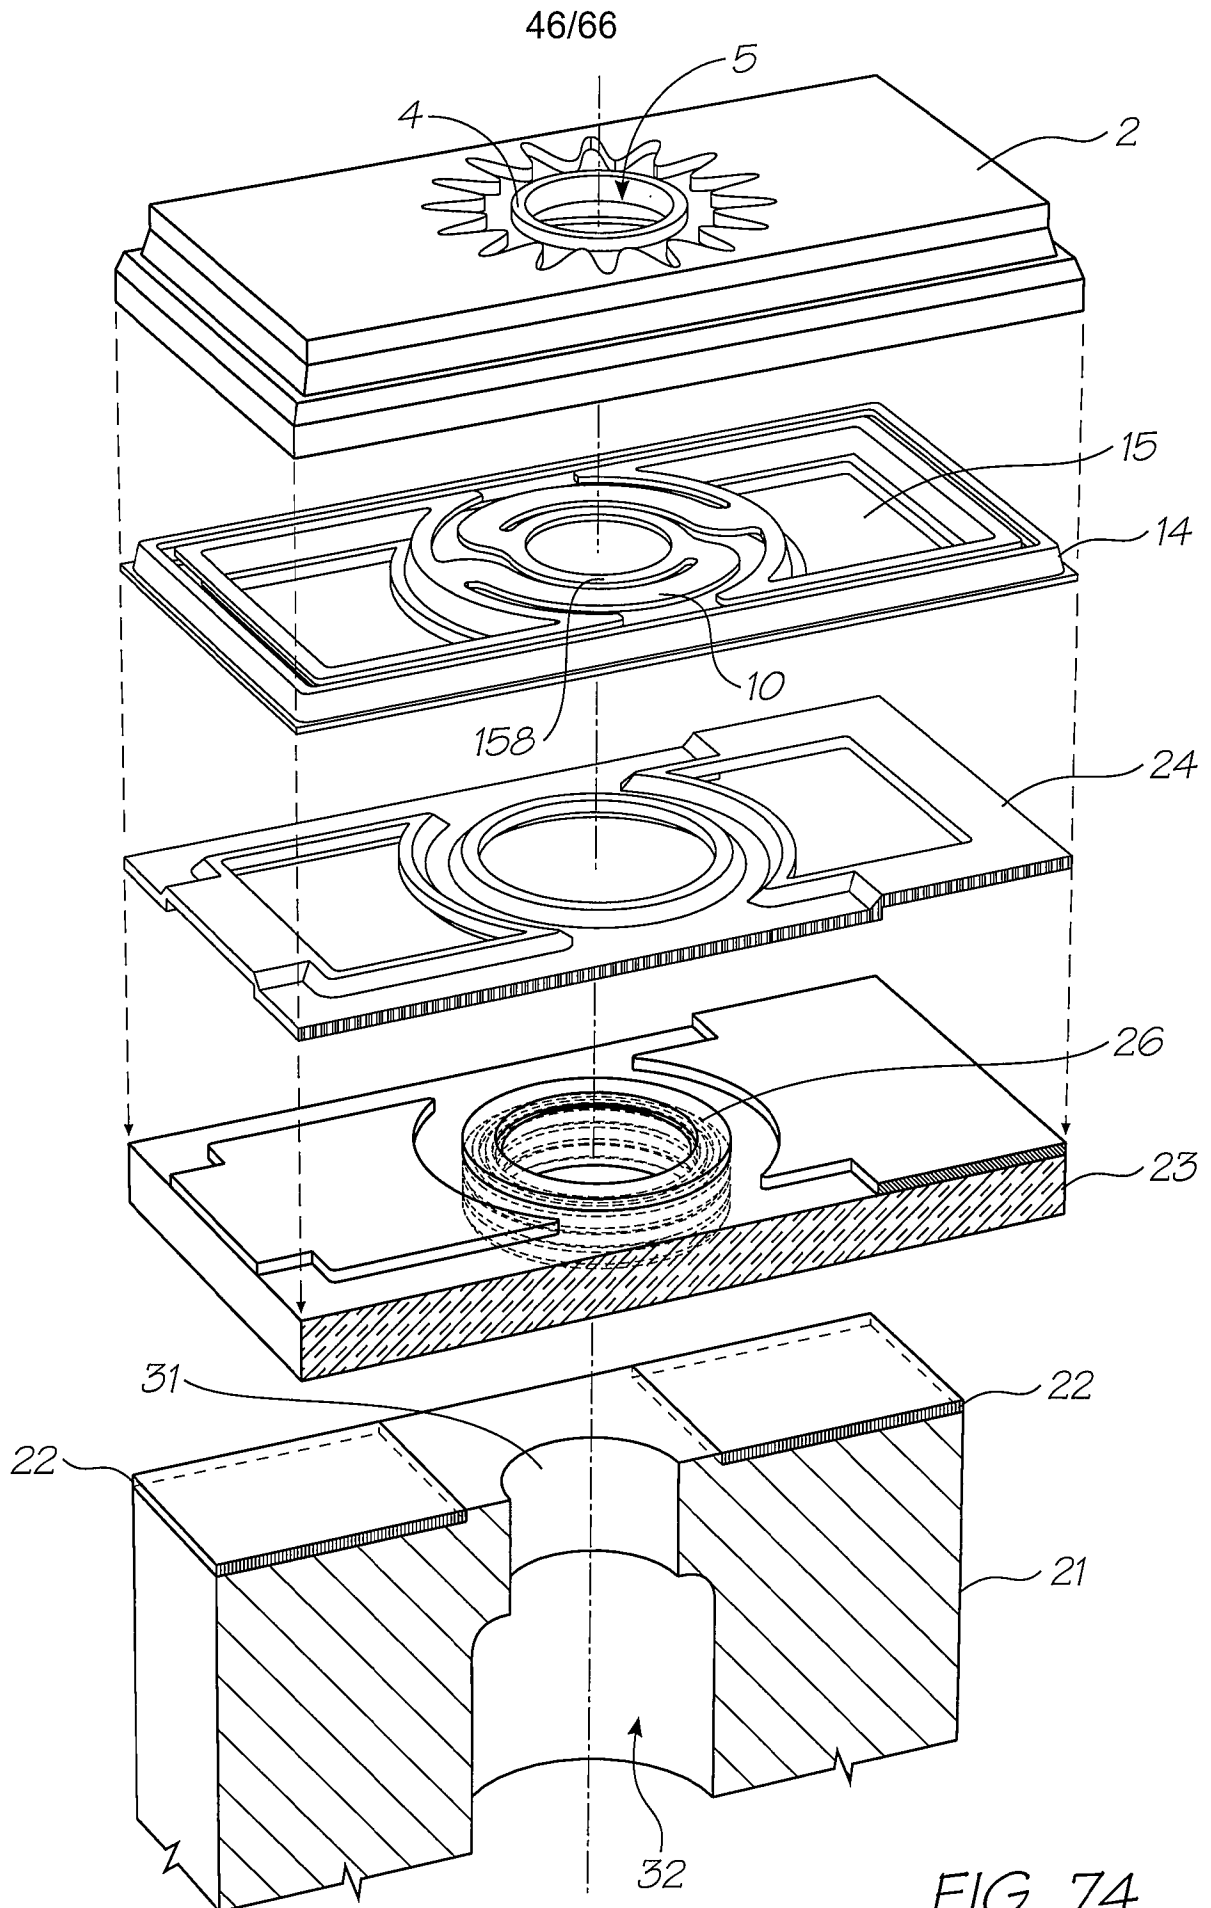


FIG. 74

47/66

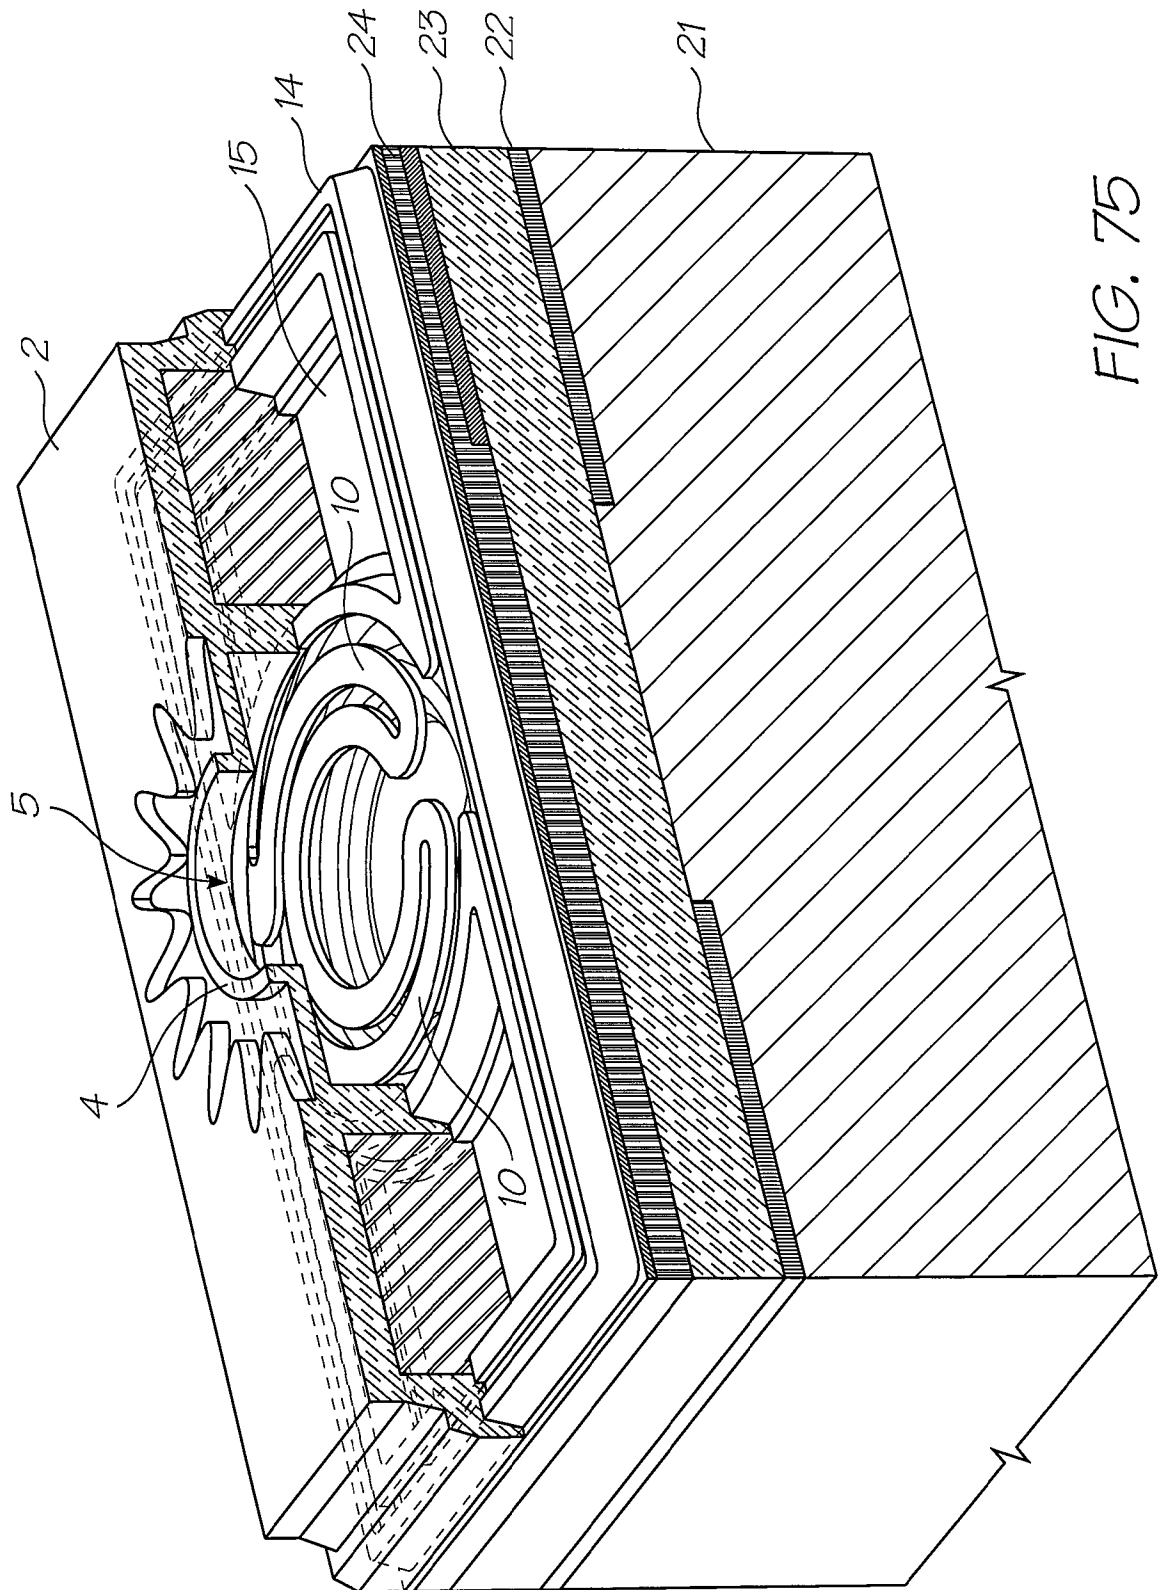


FIG. 75

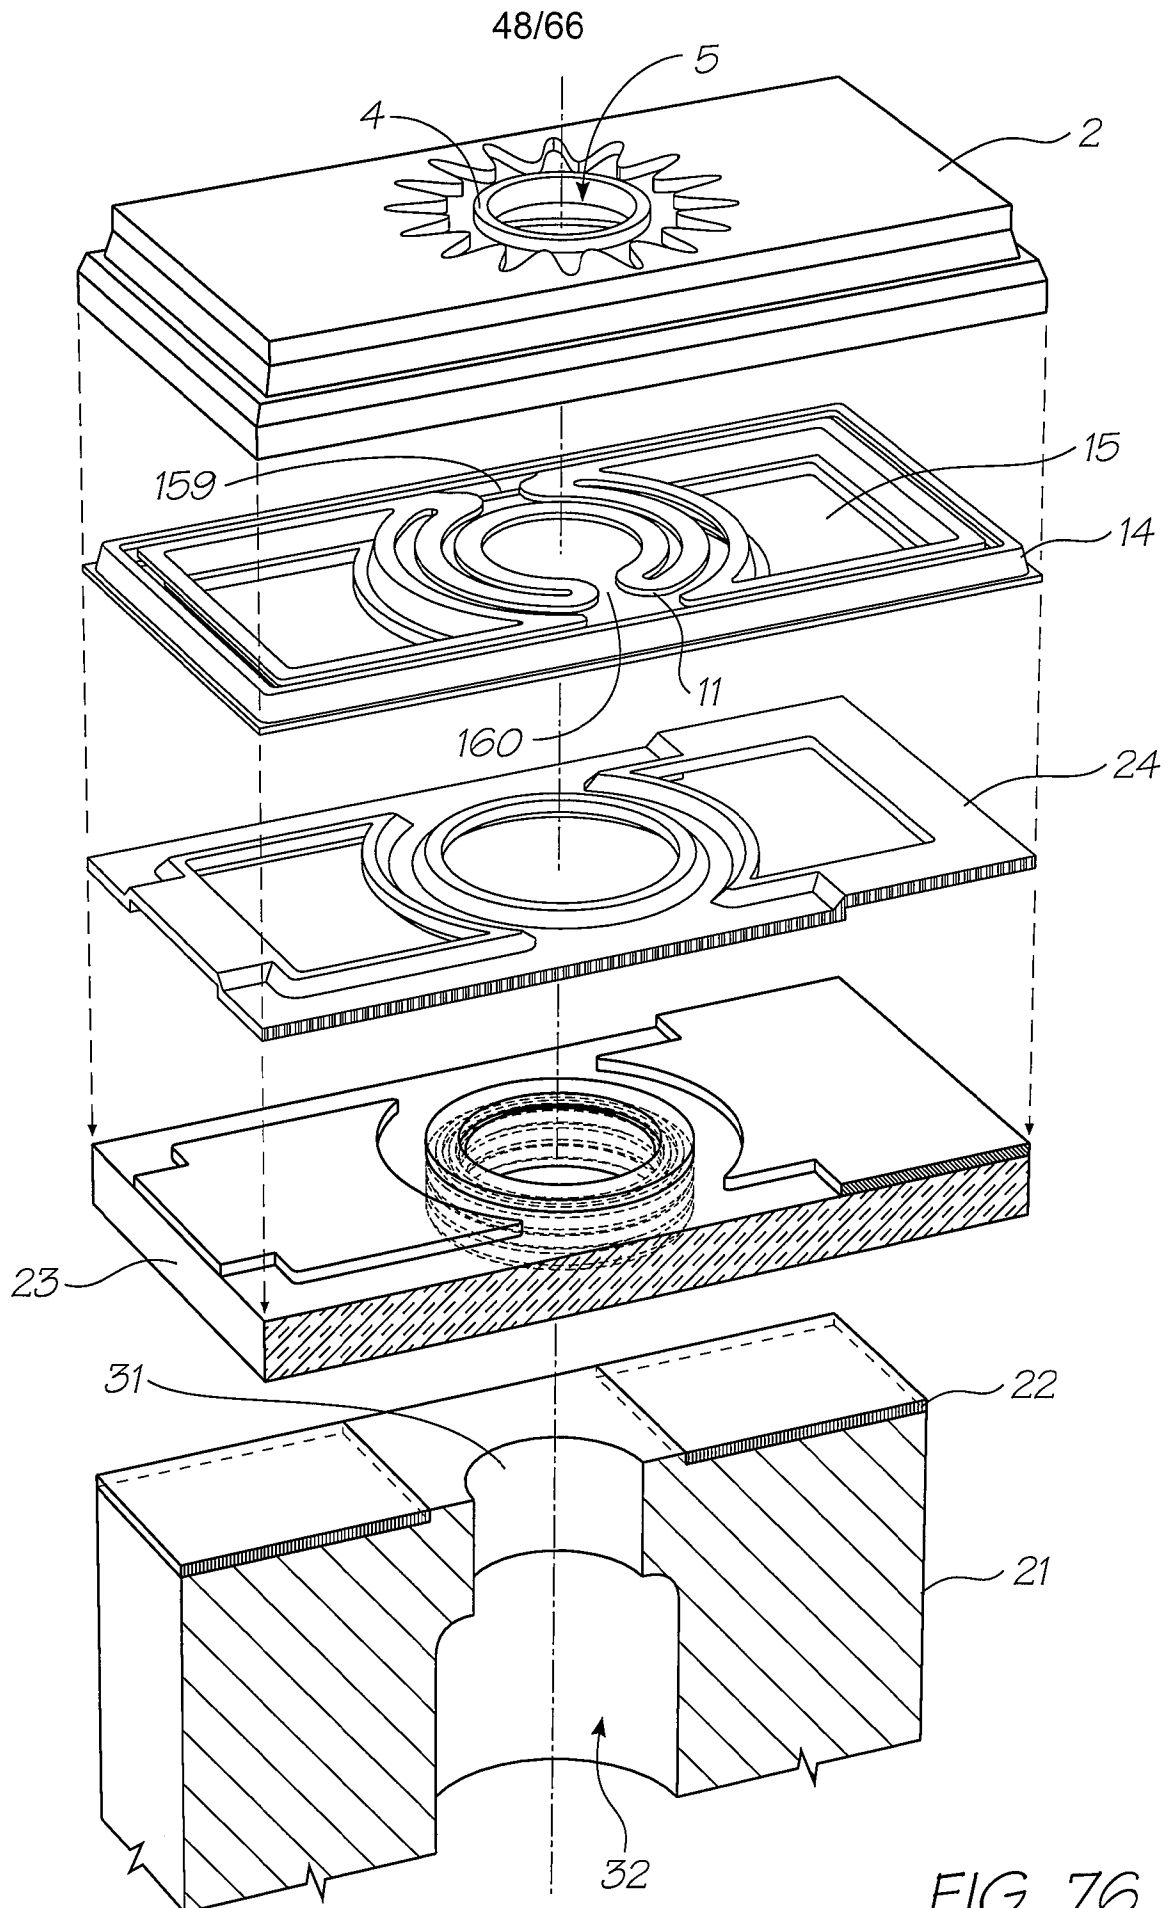


FIG. 76

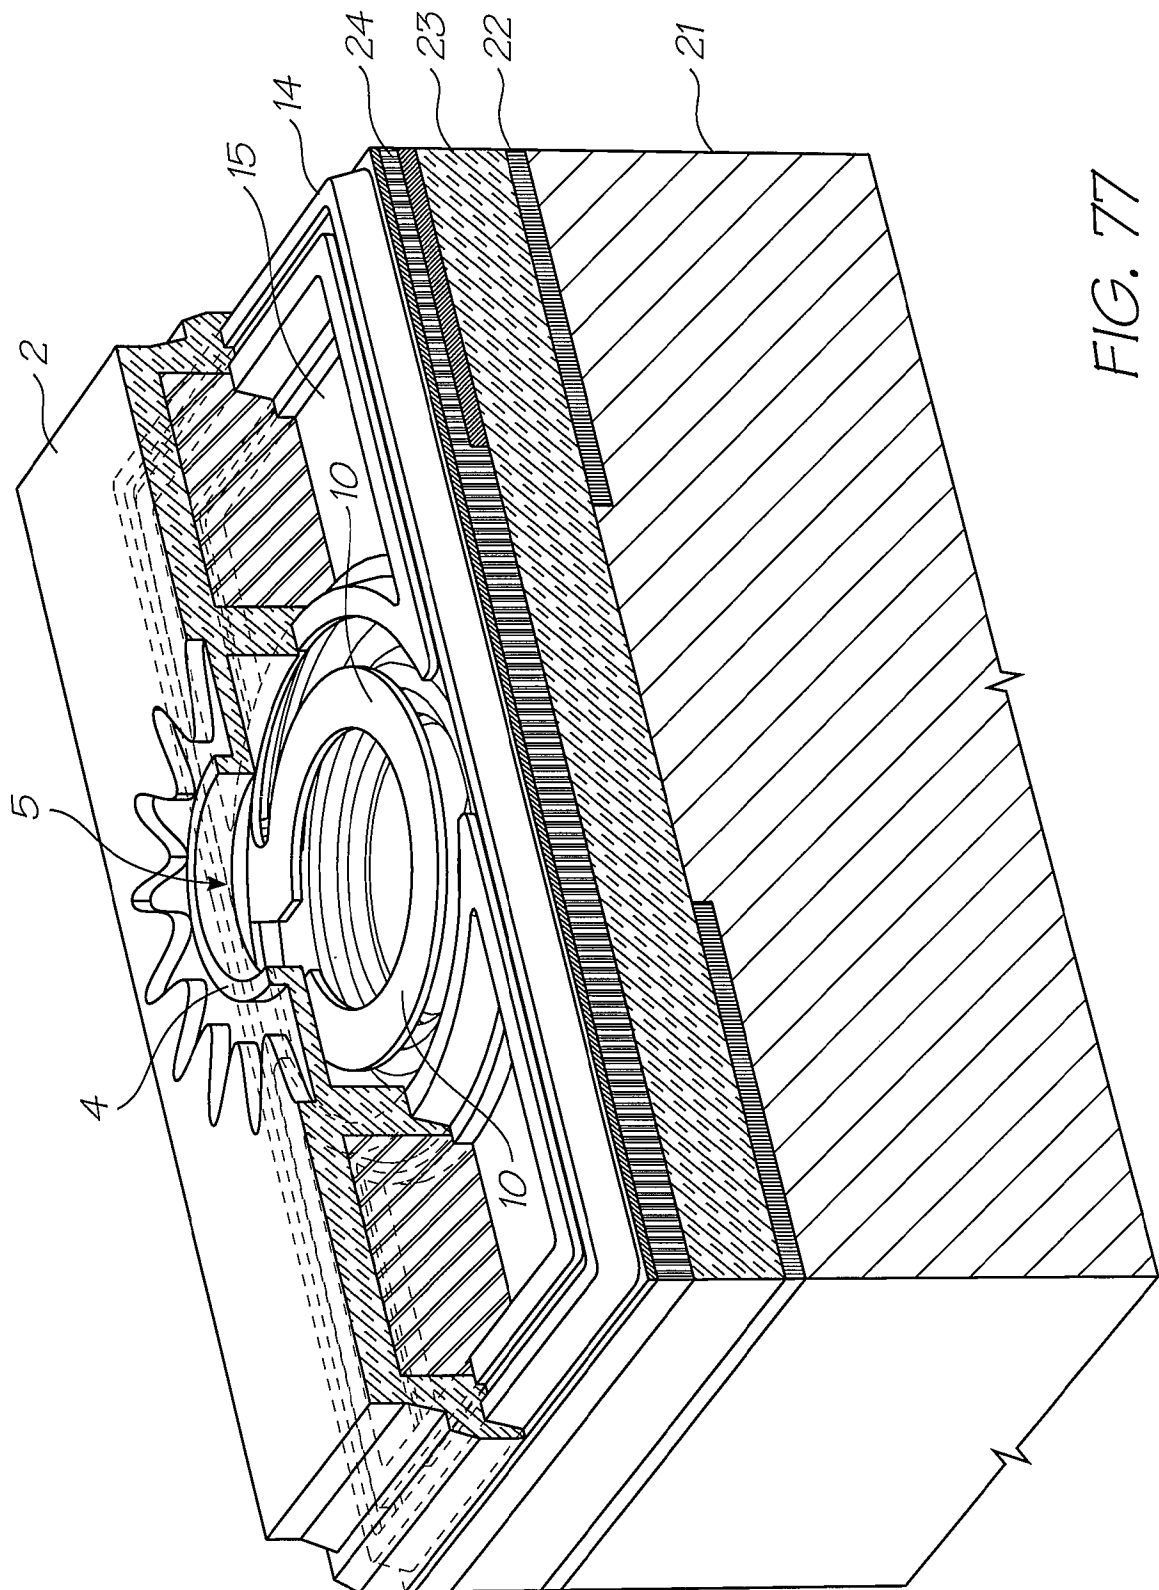


FIG. 77

50/66

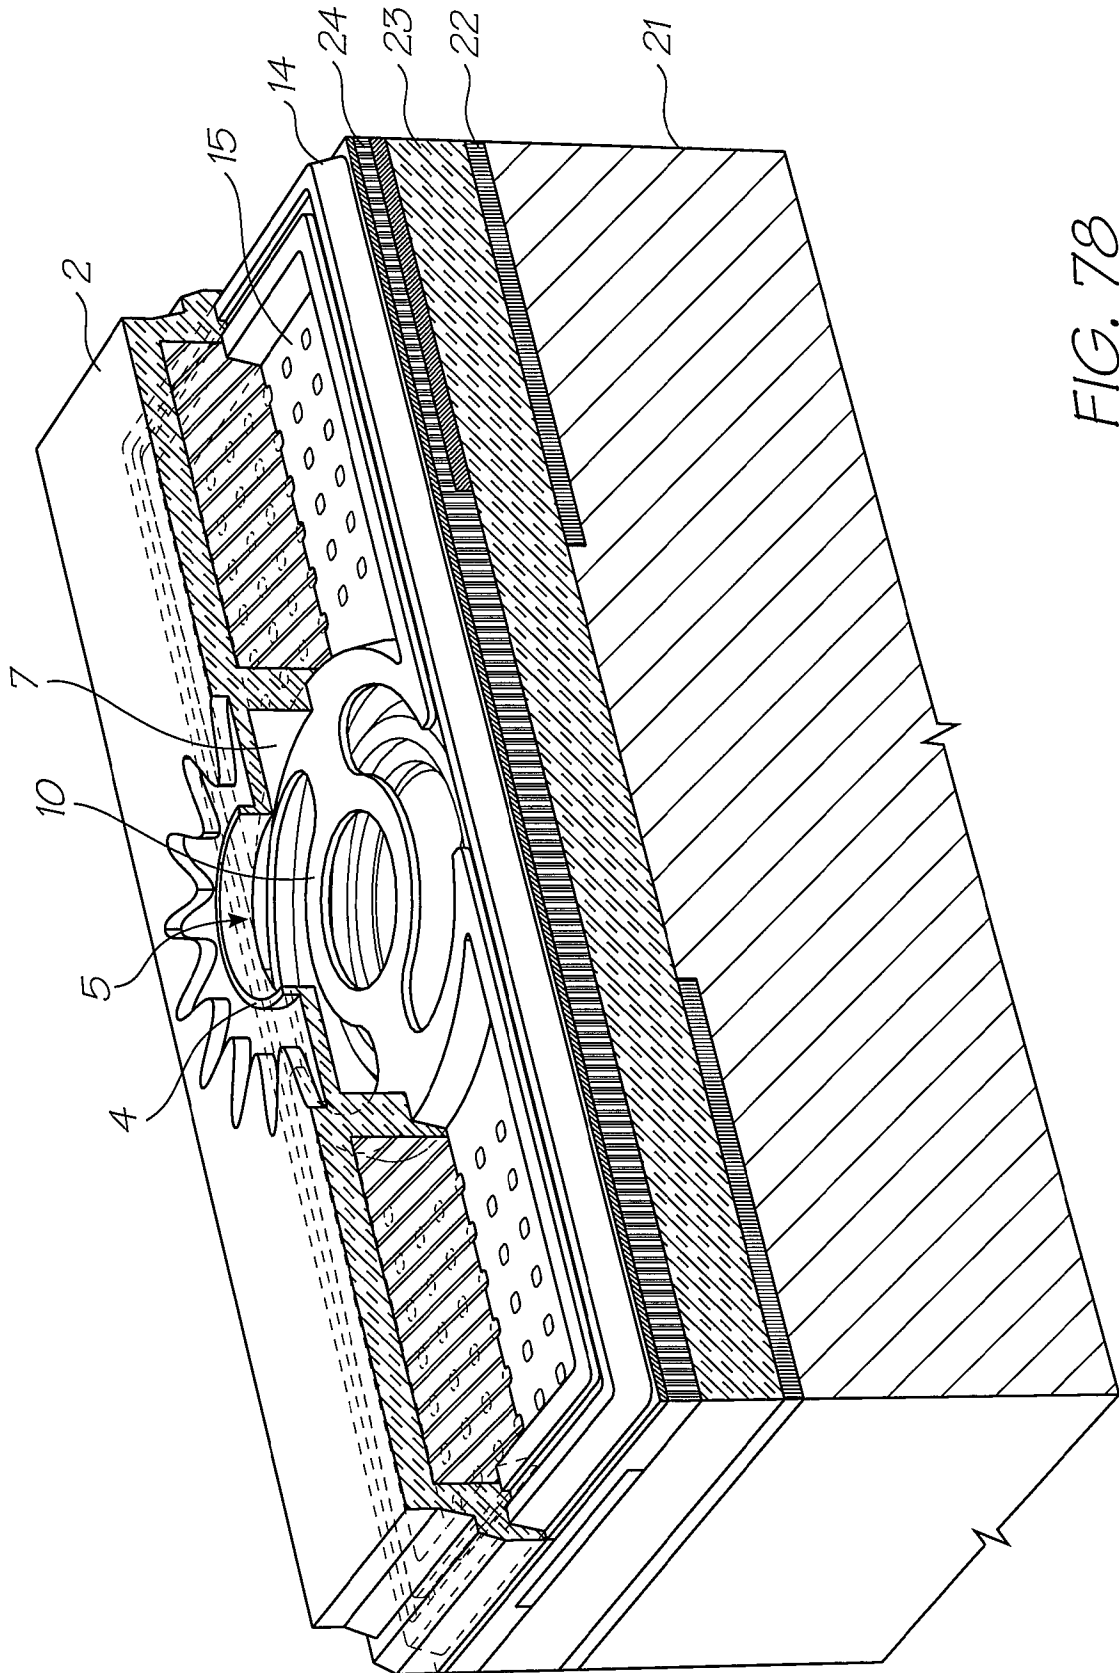


FIG. 78

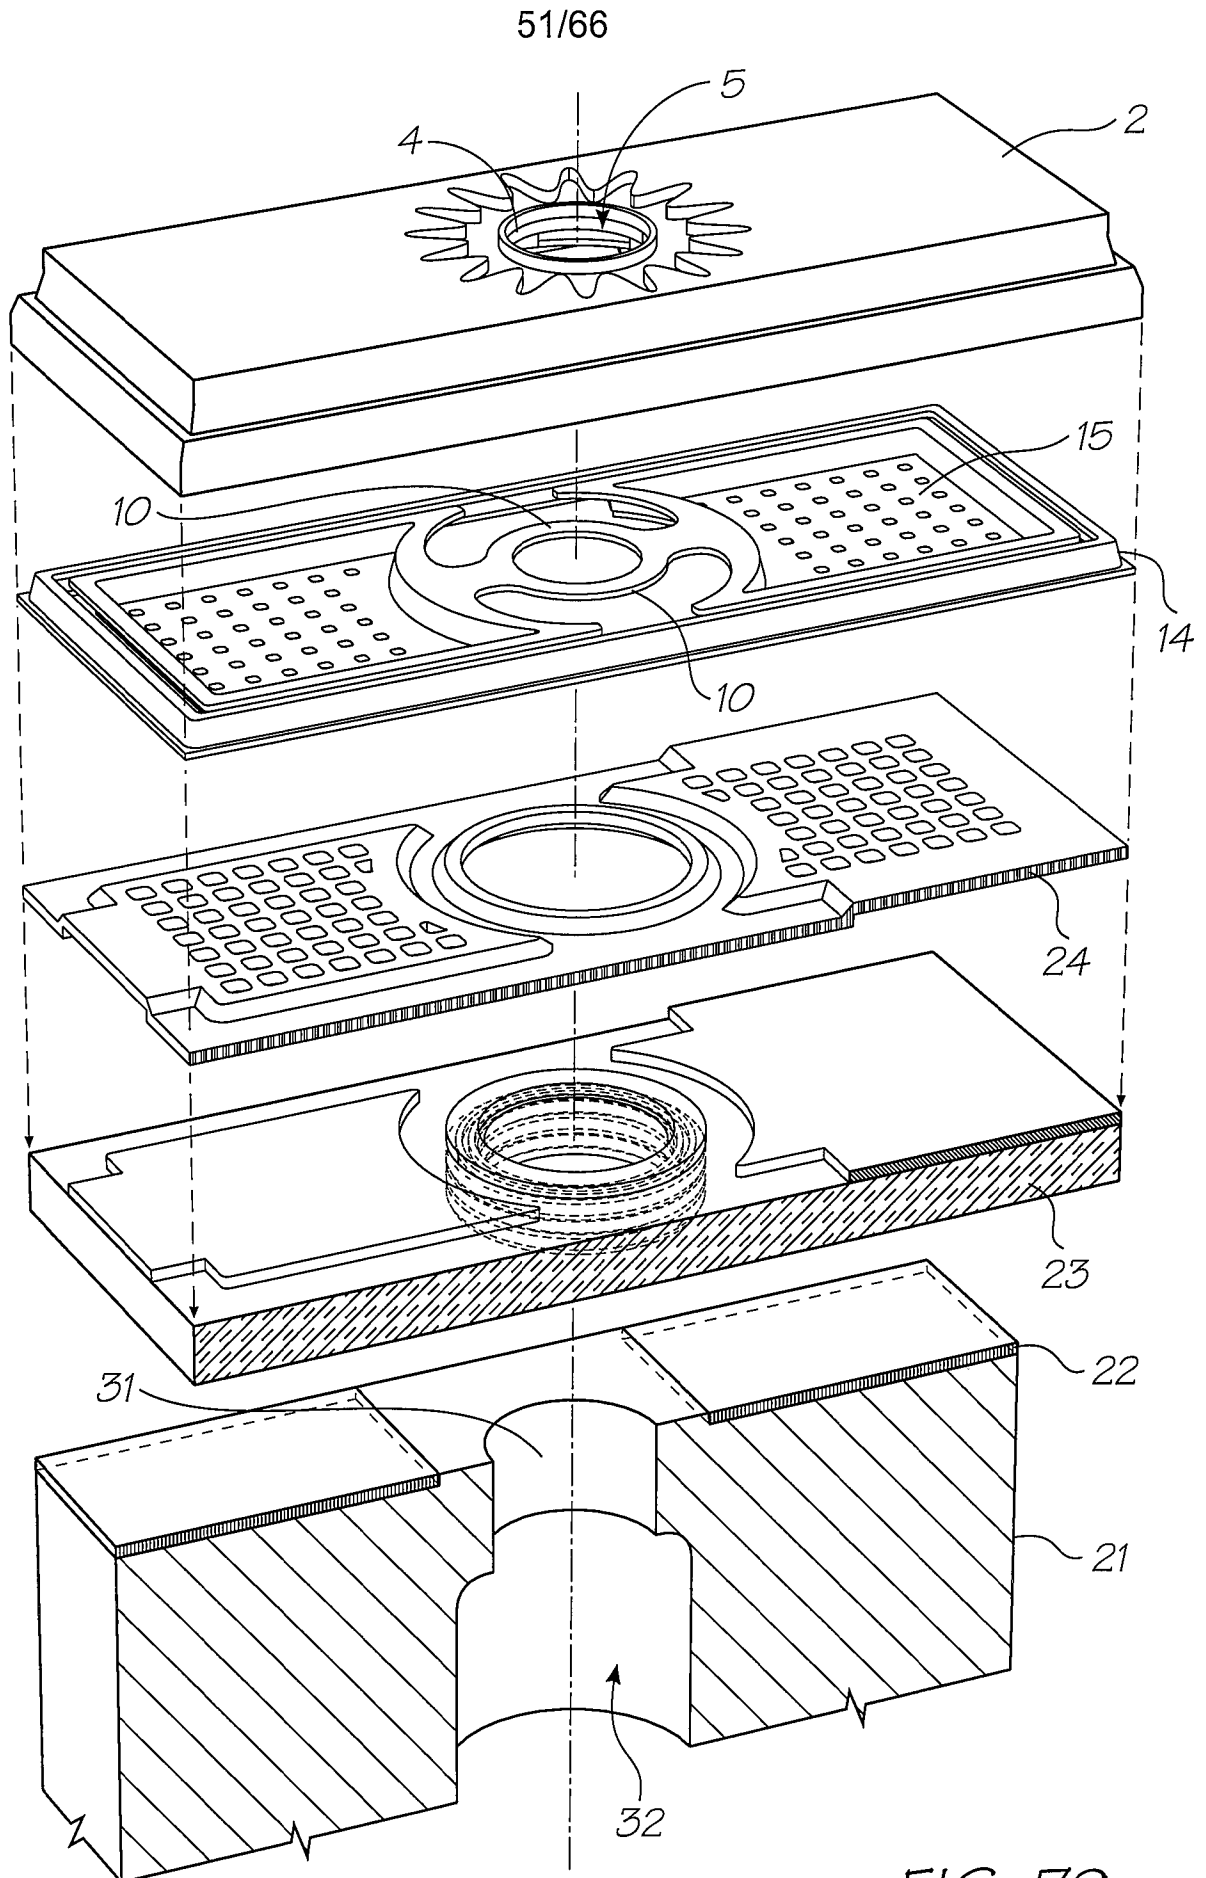


FIG. 79

52/66

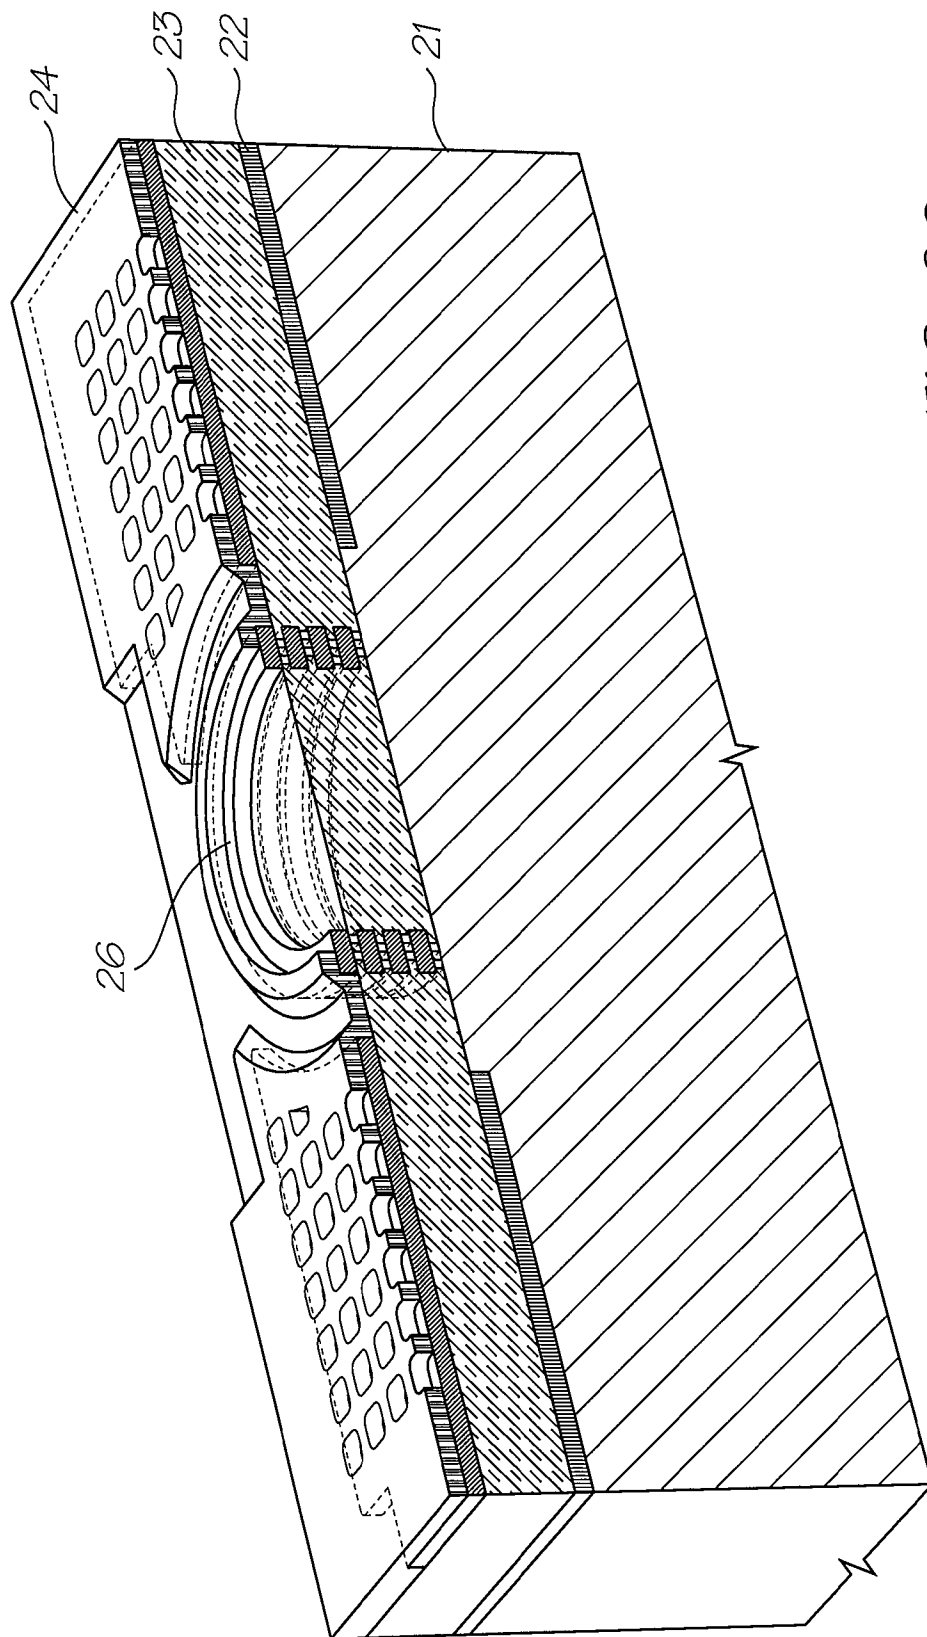


FIG. 80

53/66

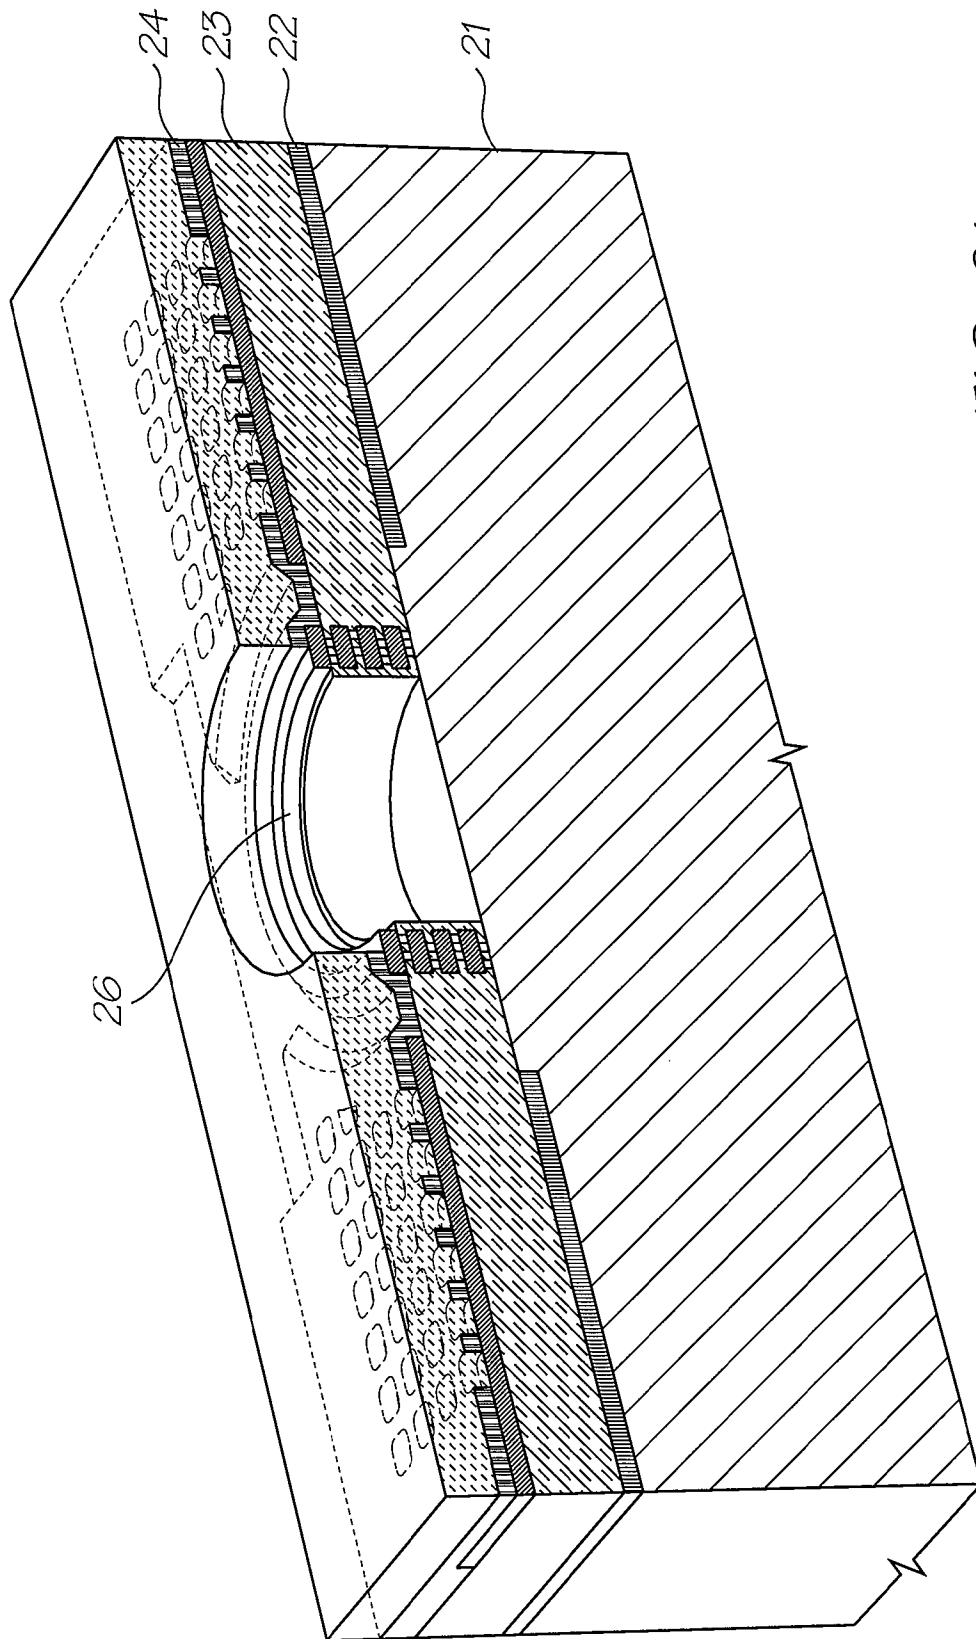


FIG. 81

54/66

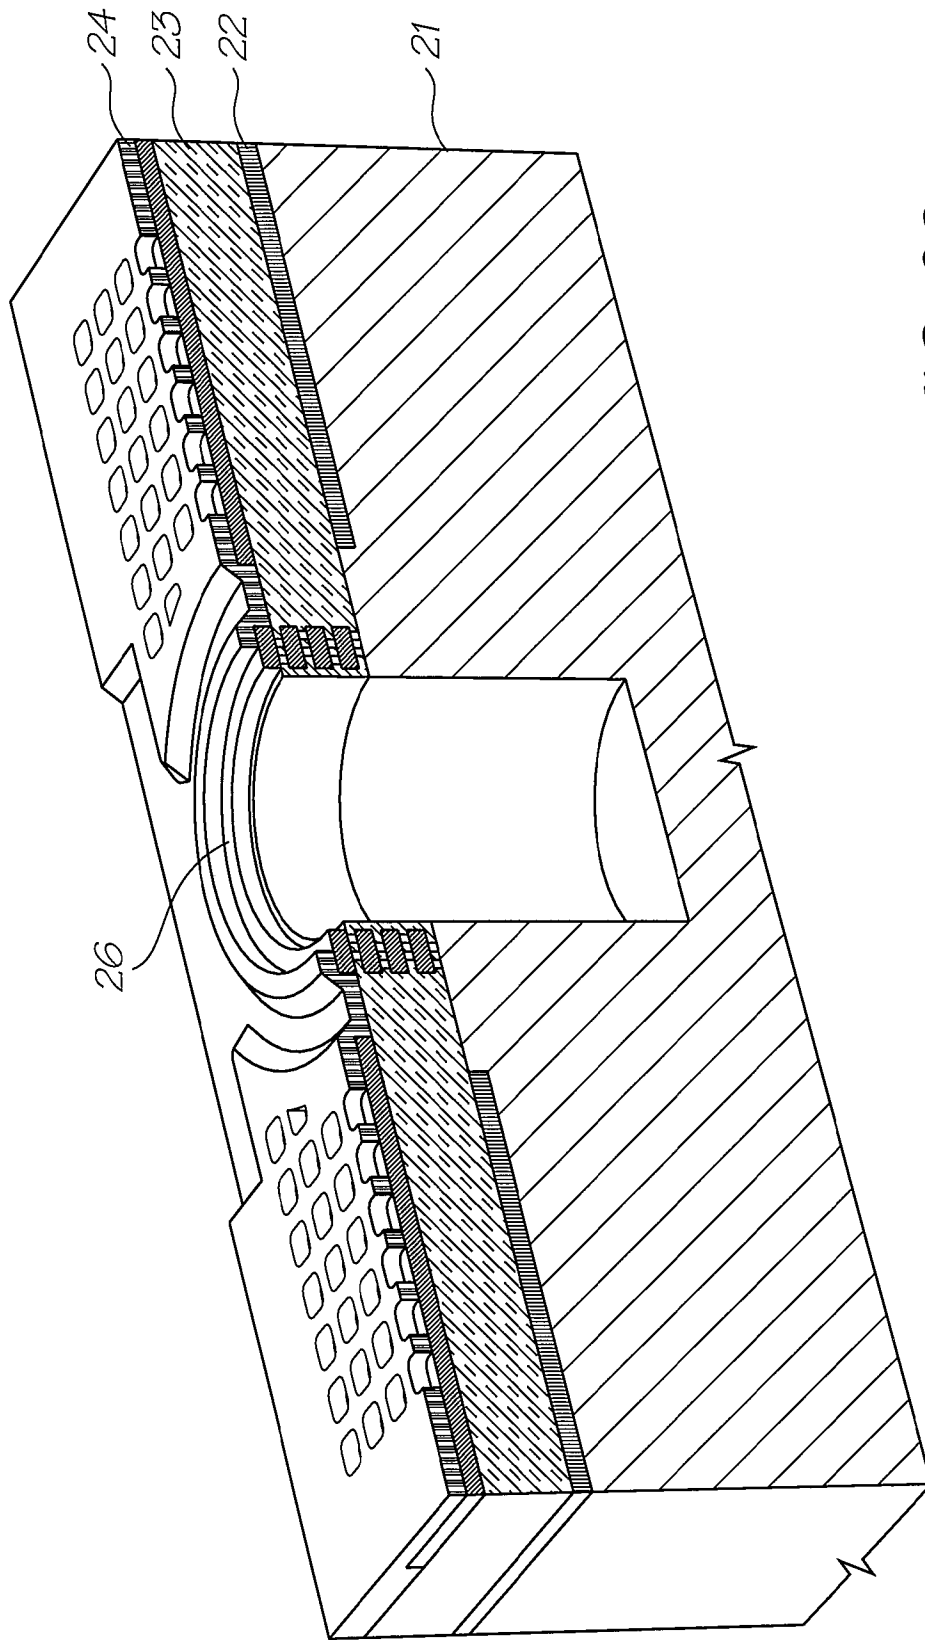


FIG. 82

55/66

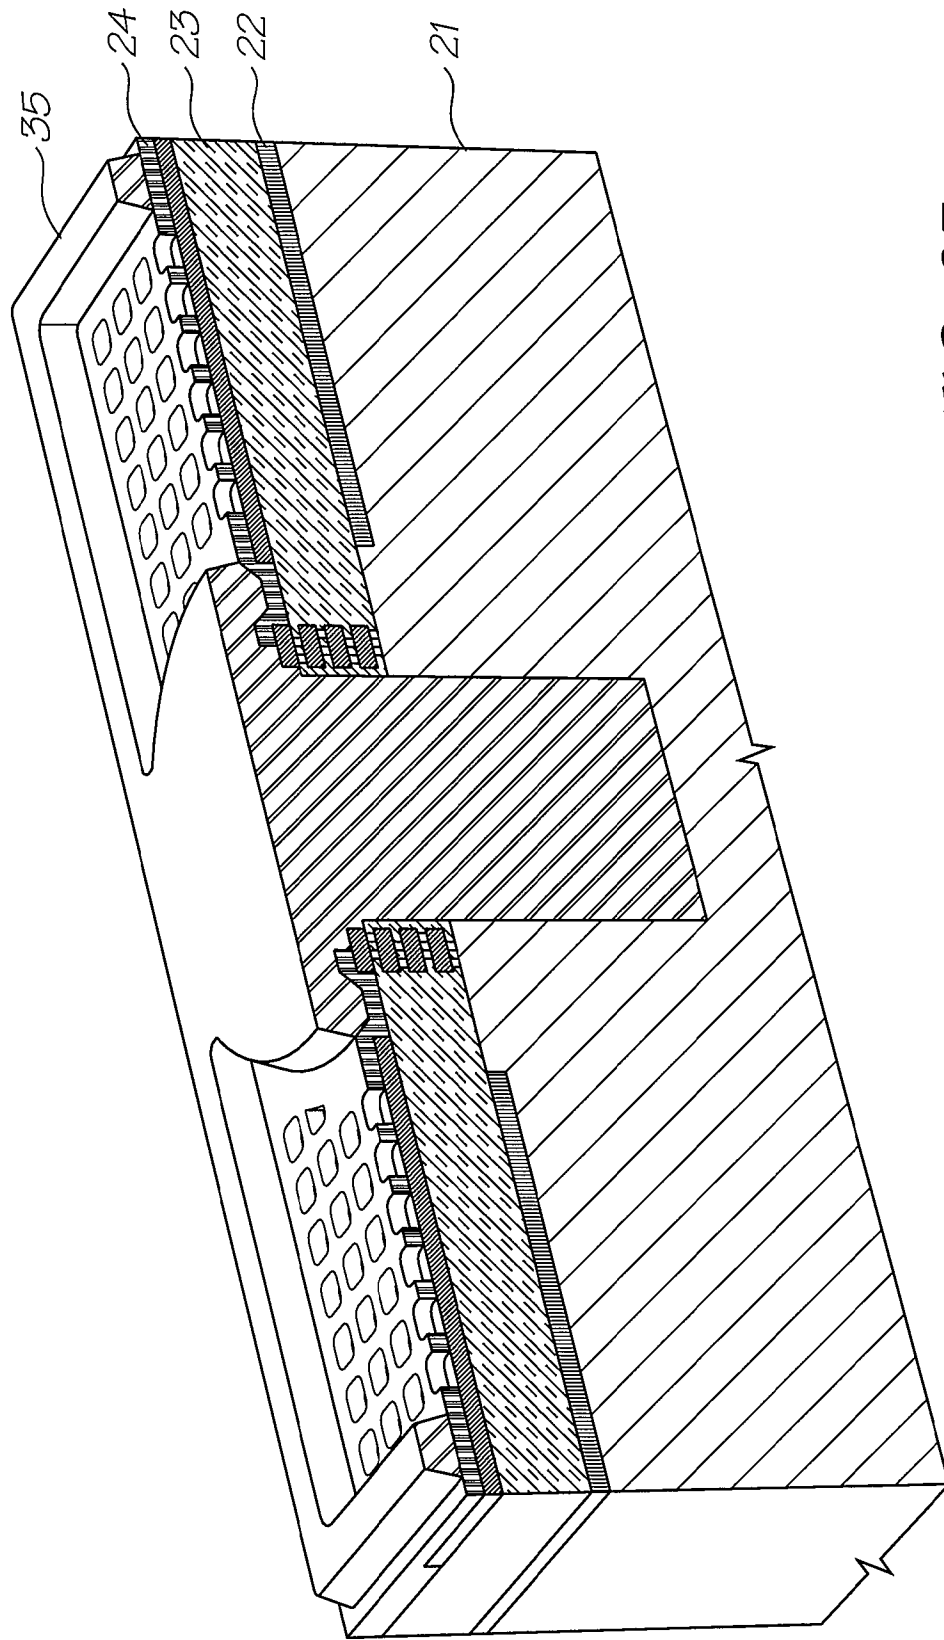


FIG. 83

56/66

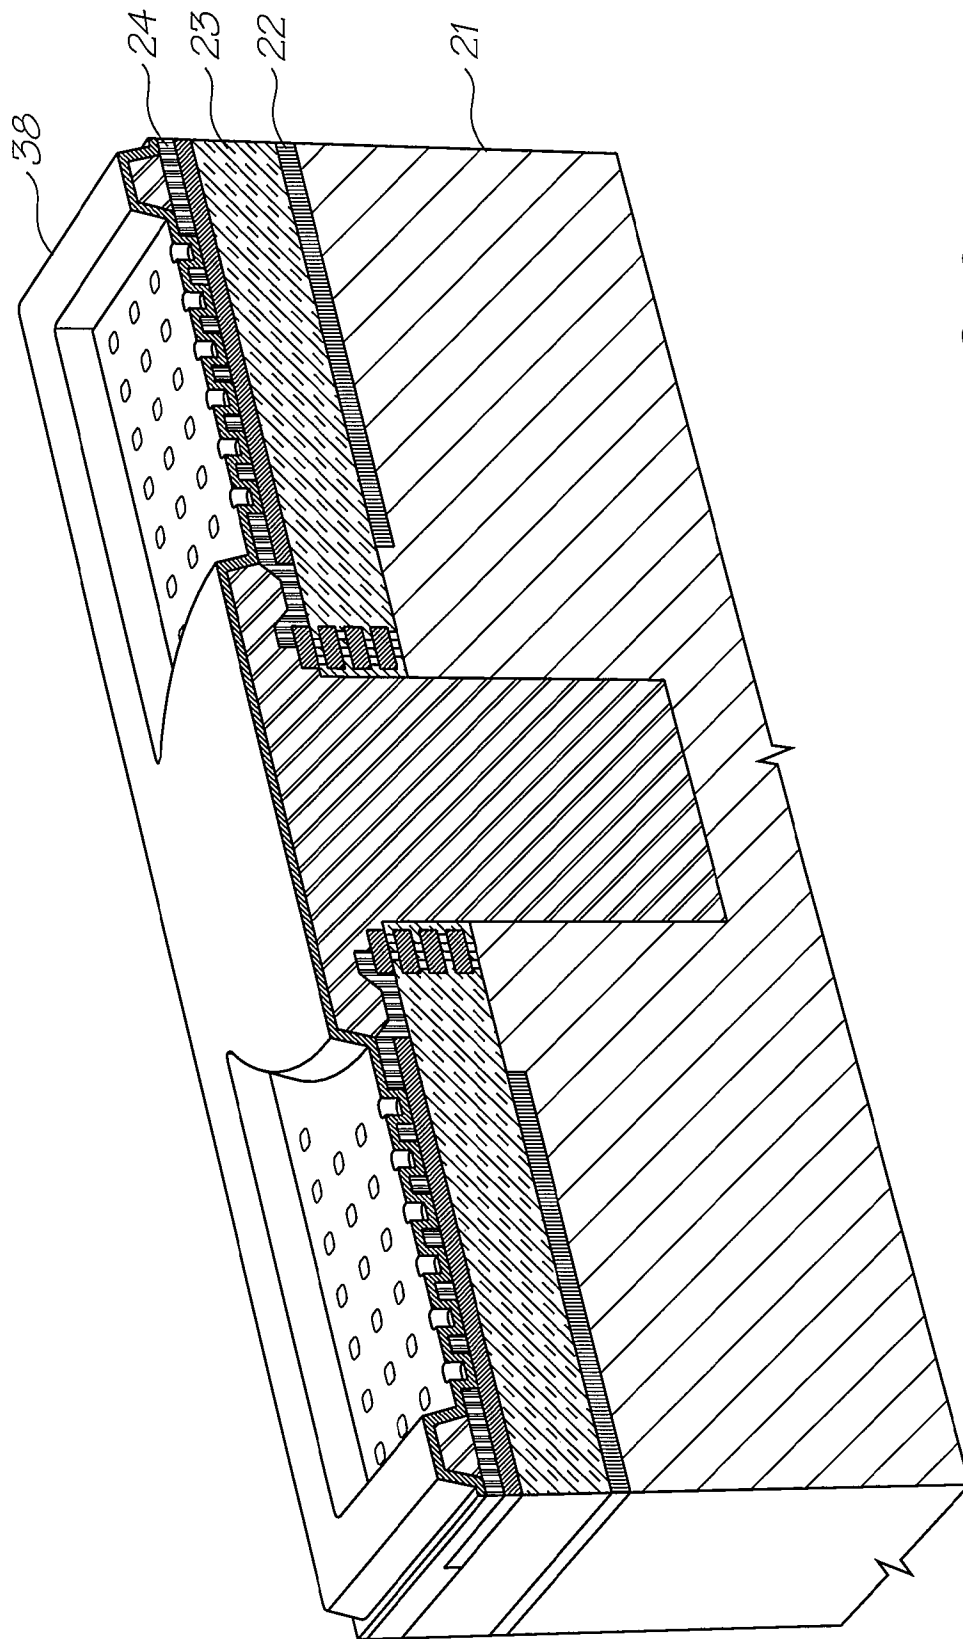


FIG. 84

57/66

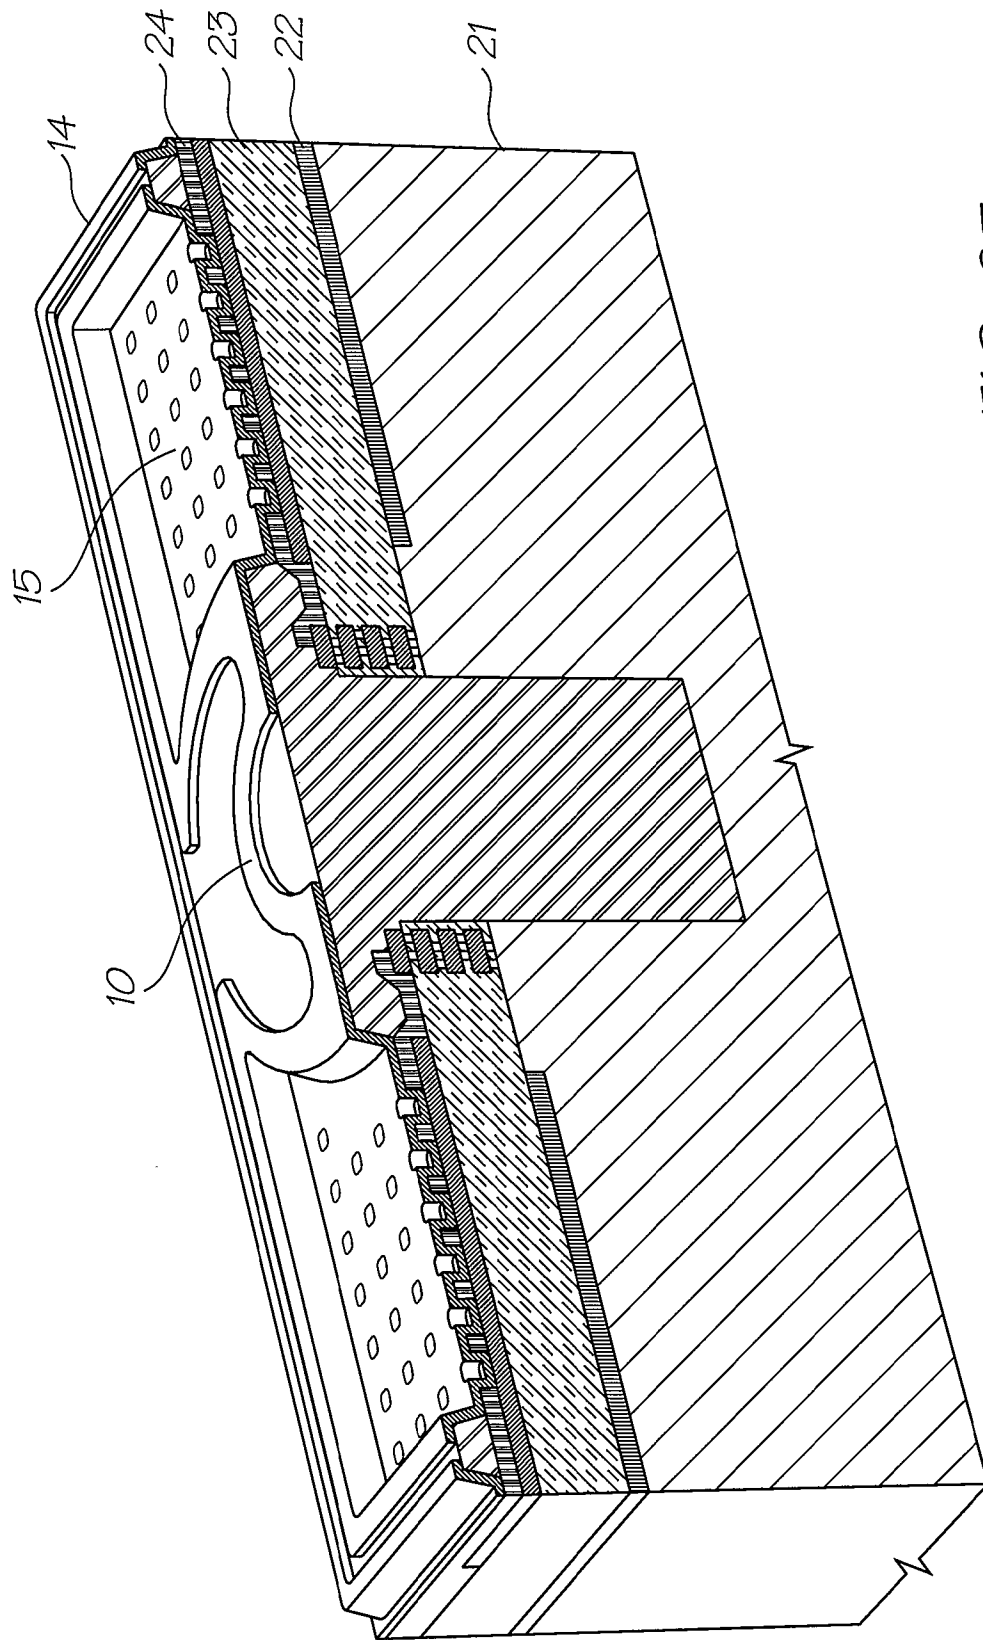


FIG. 85

58/66

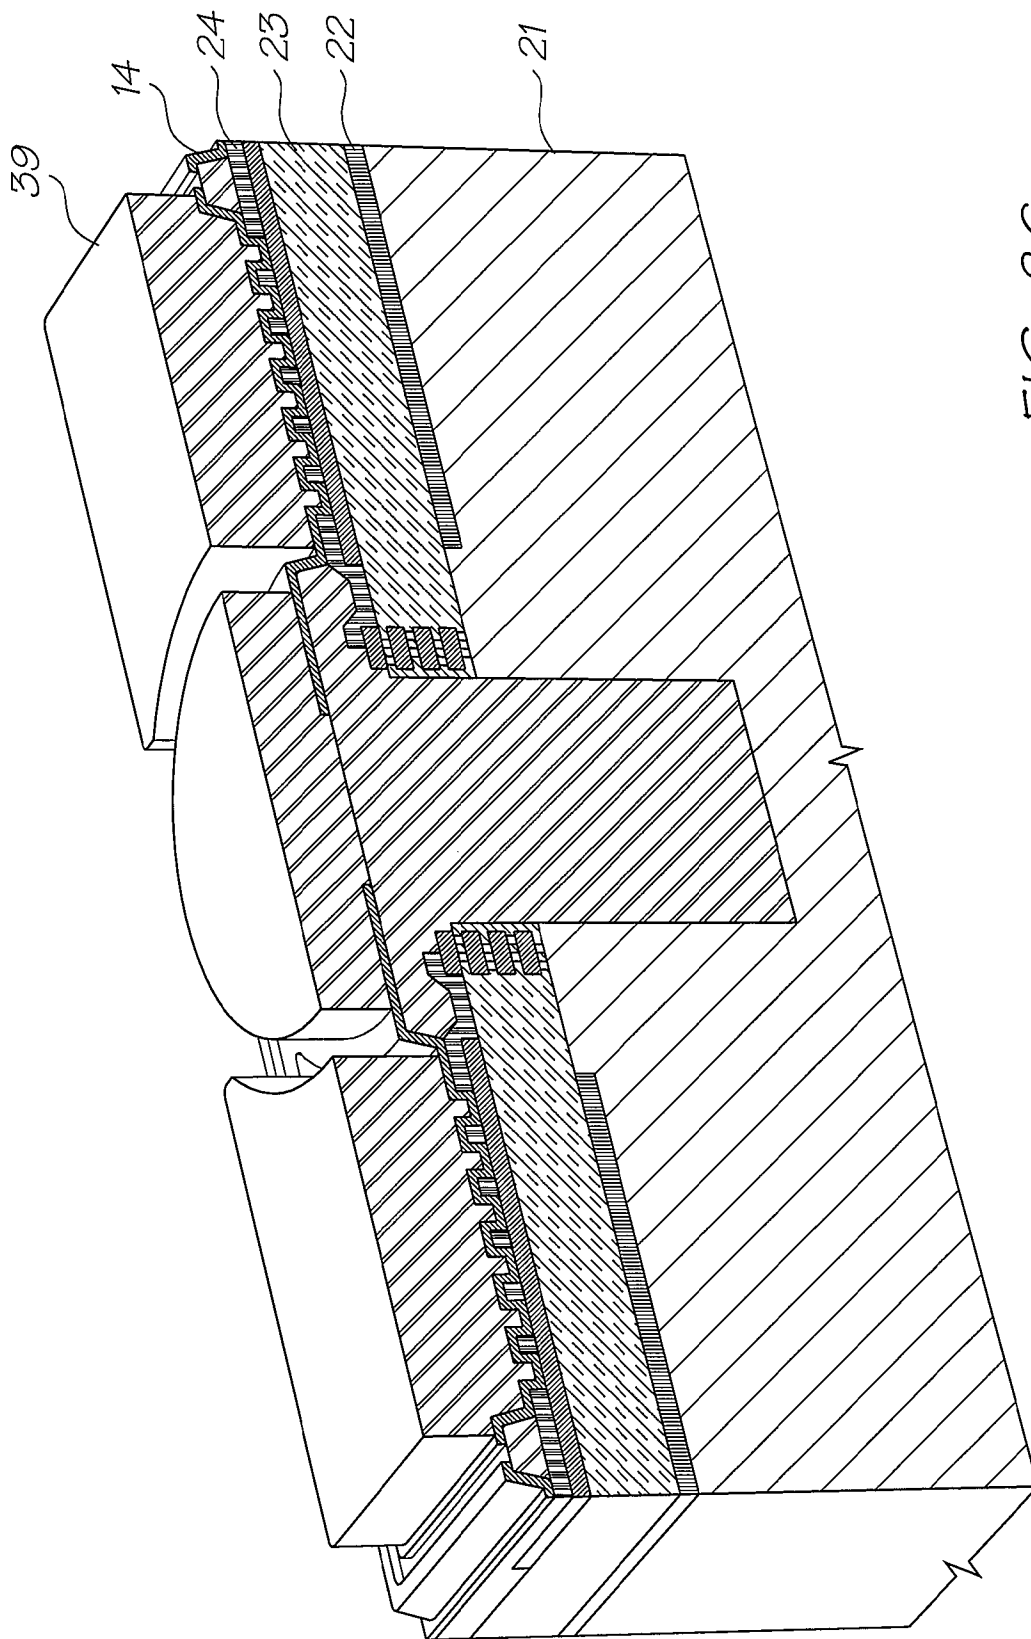


FIG. 86

59/66

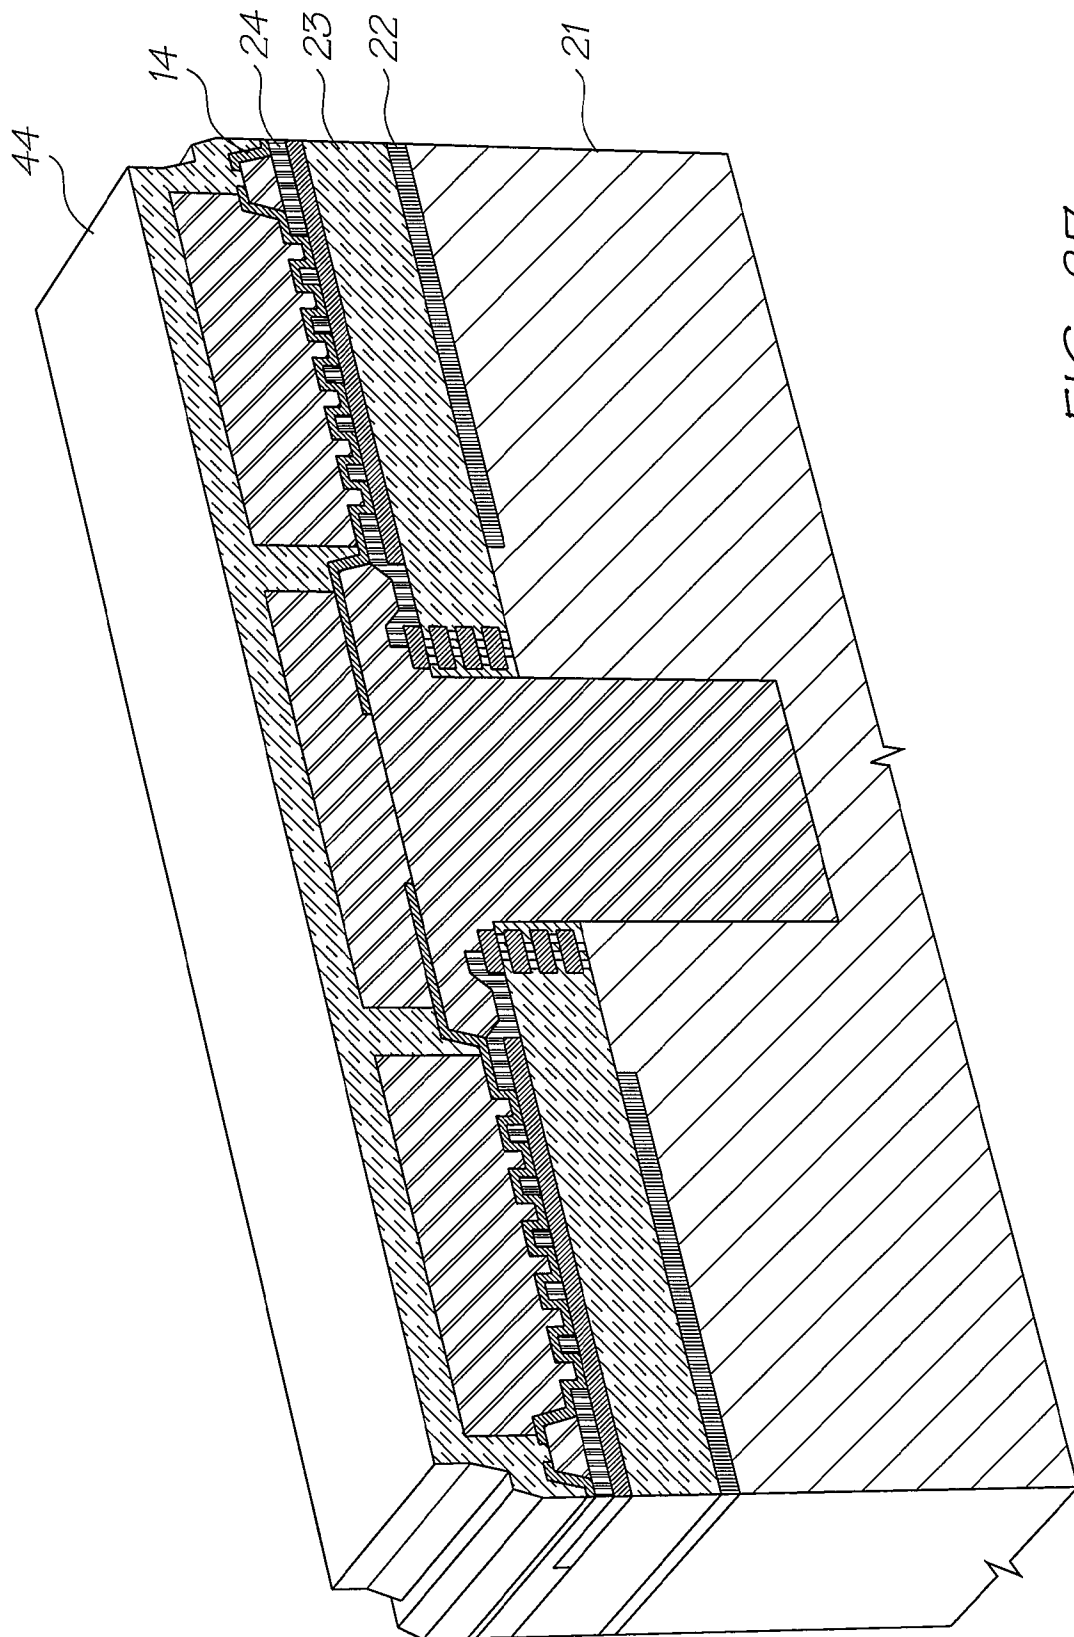


FIG. 87

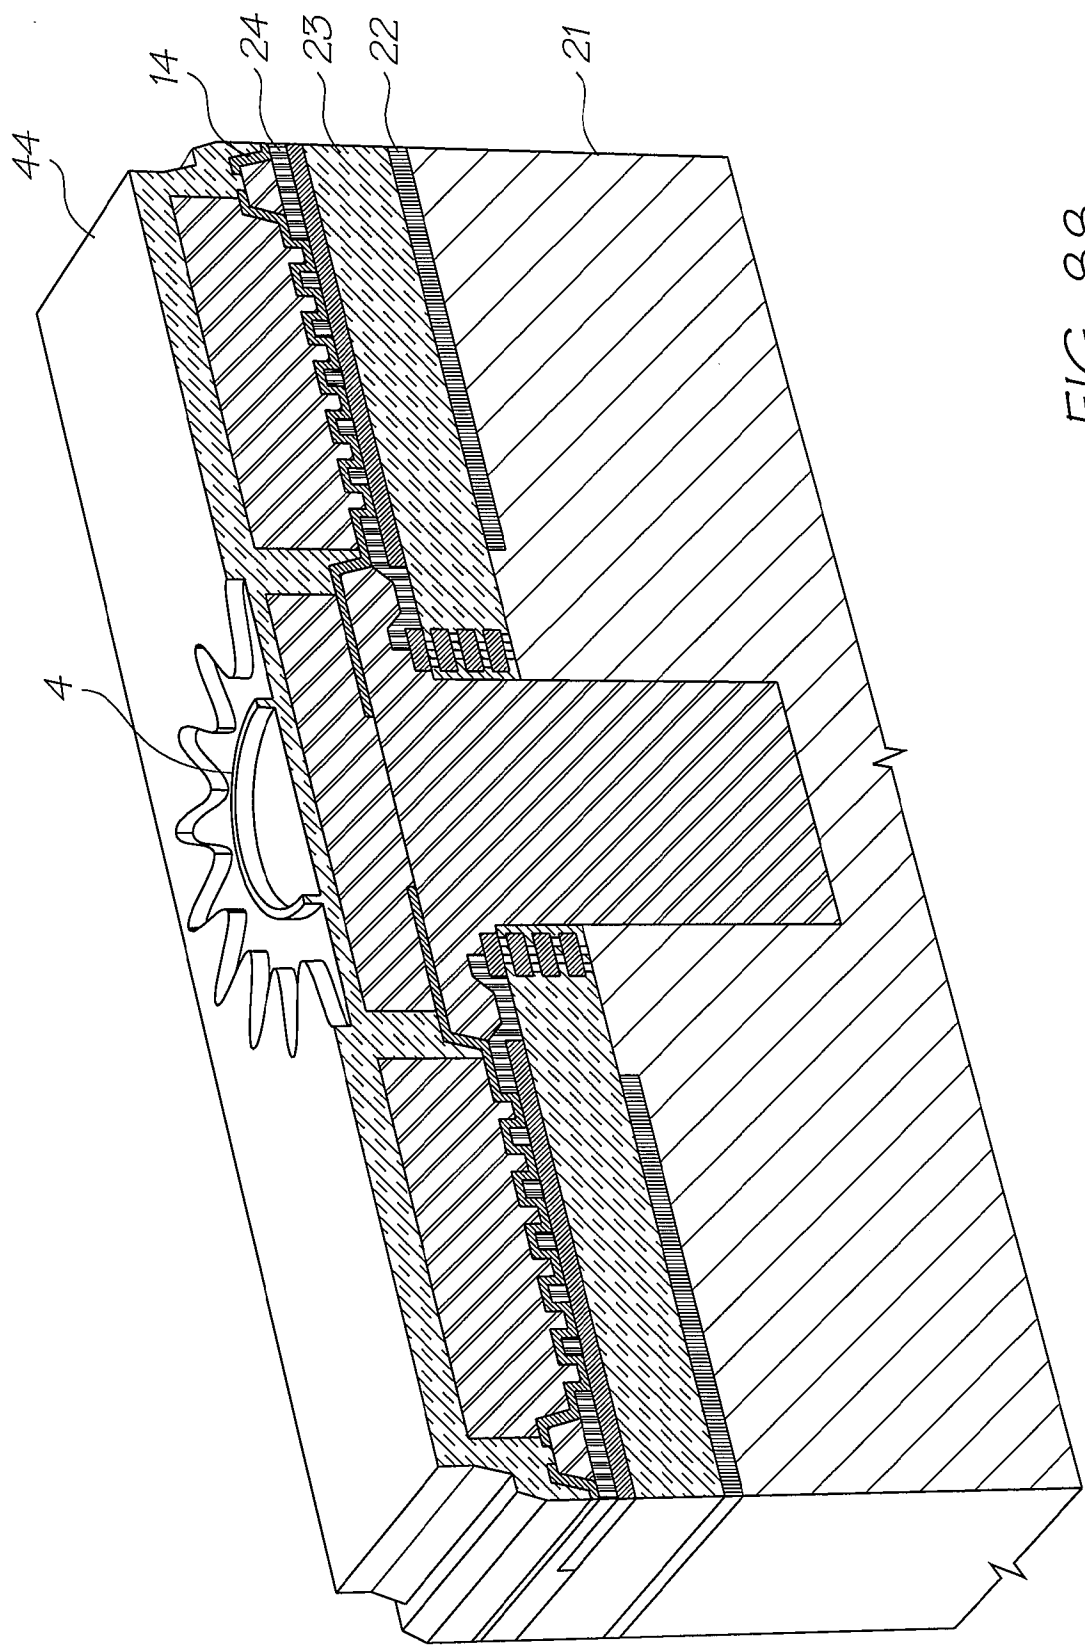


FIG. 88

61/66

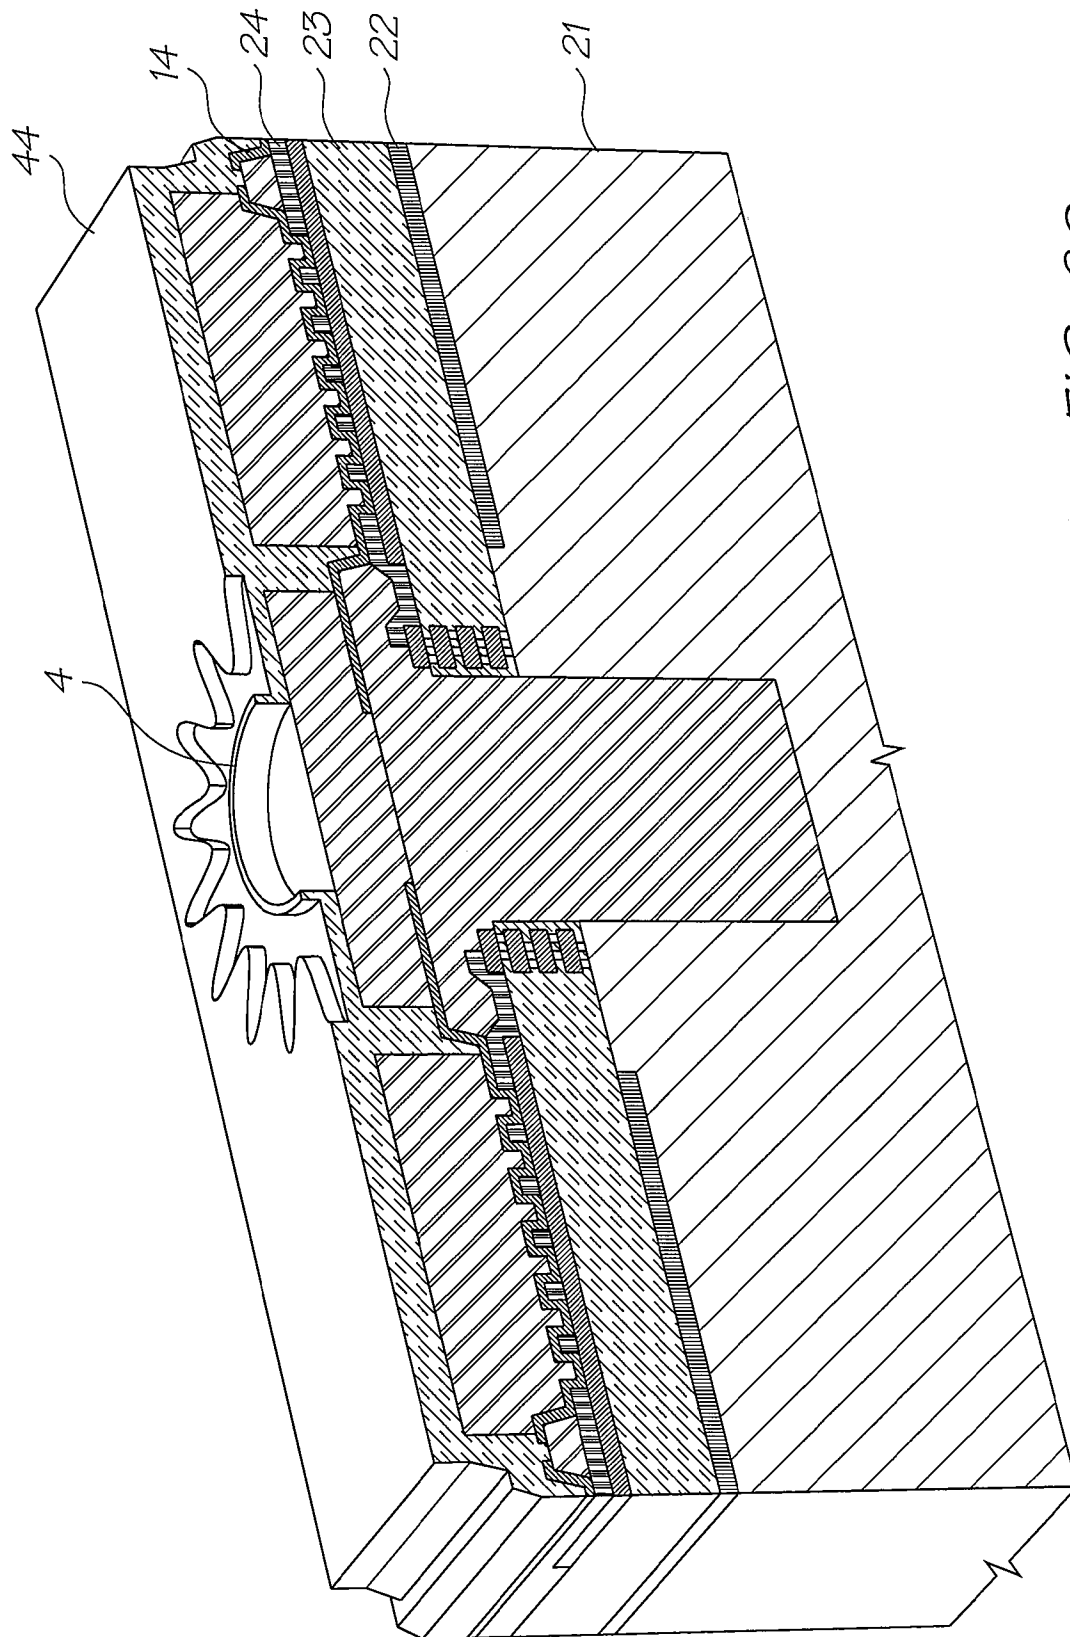


FIG. 89

62/66

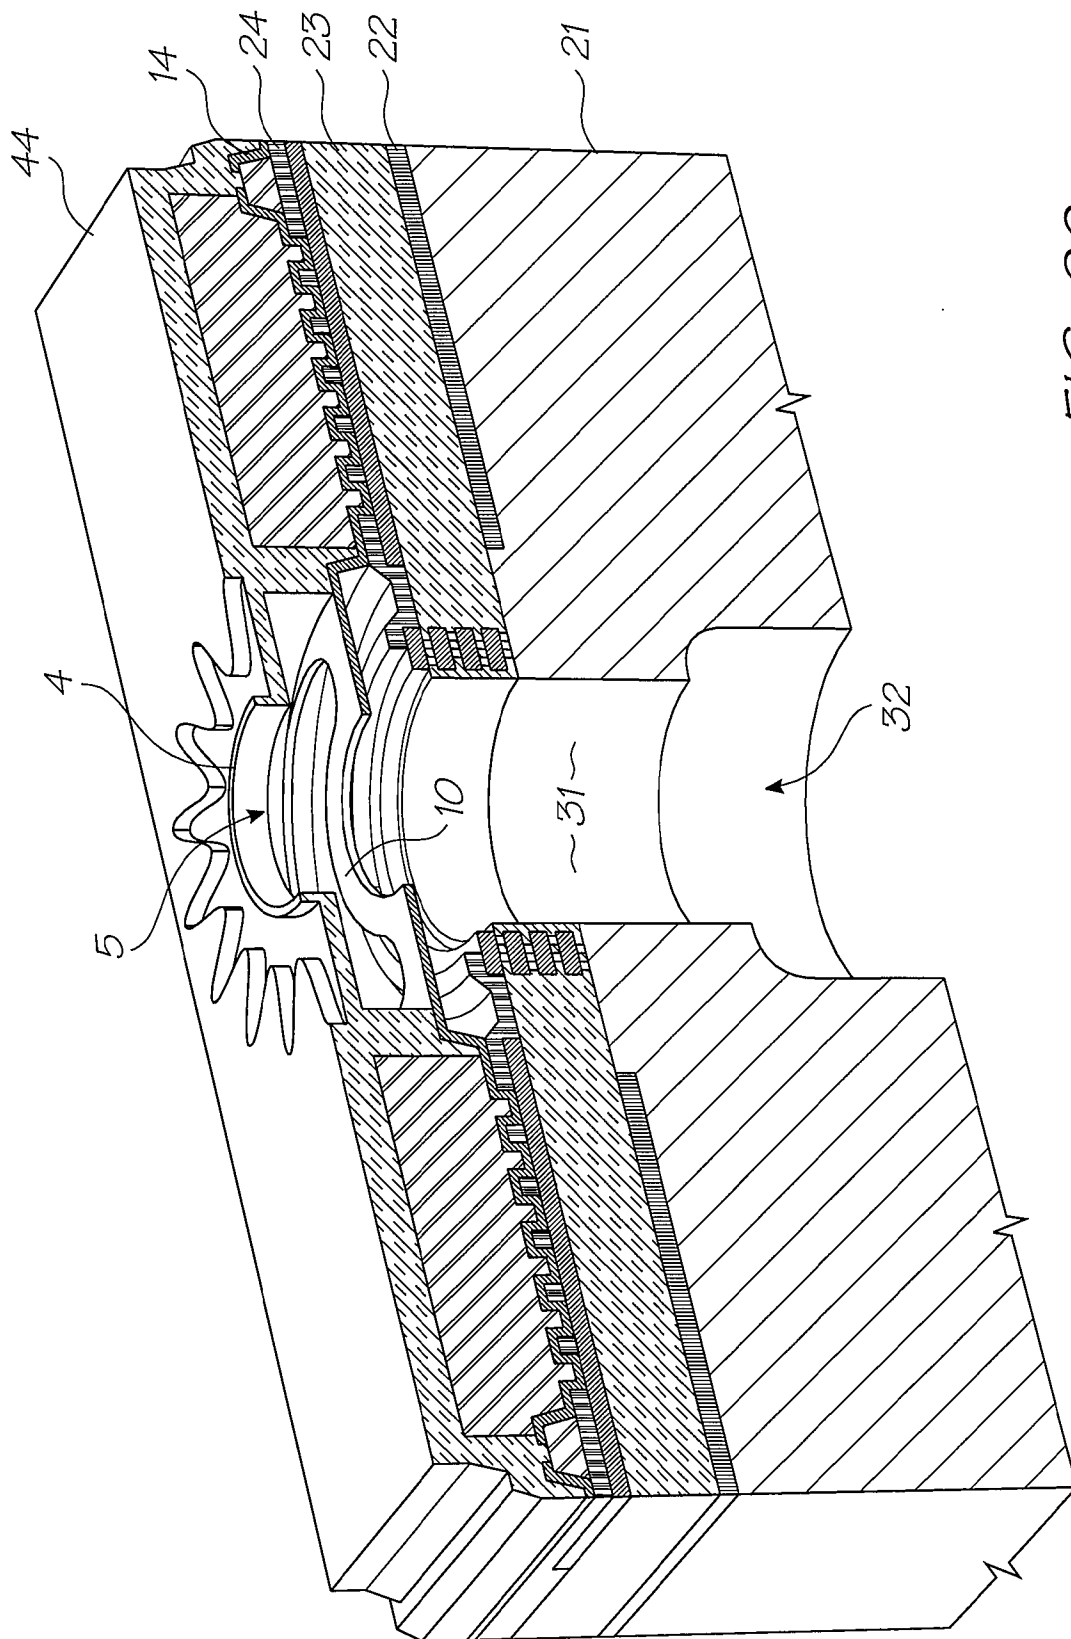


FIG. 90

63/66

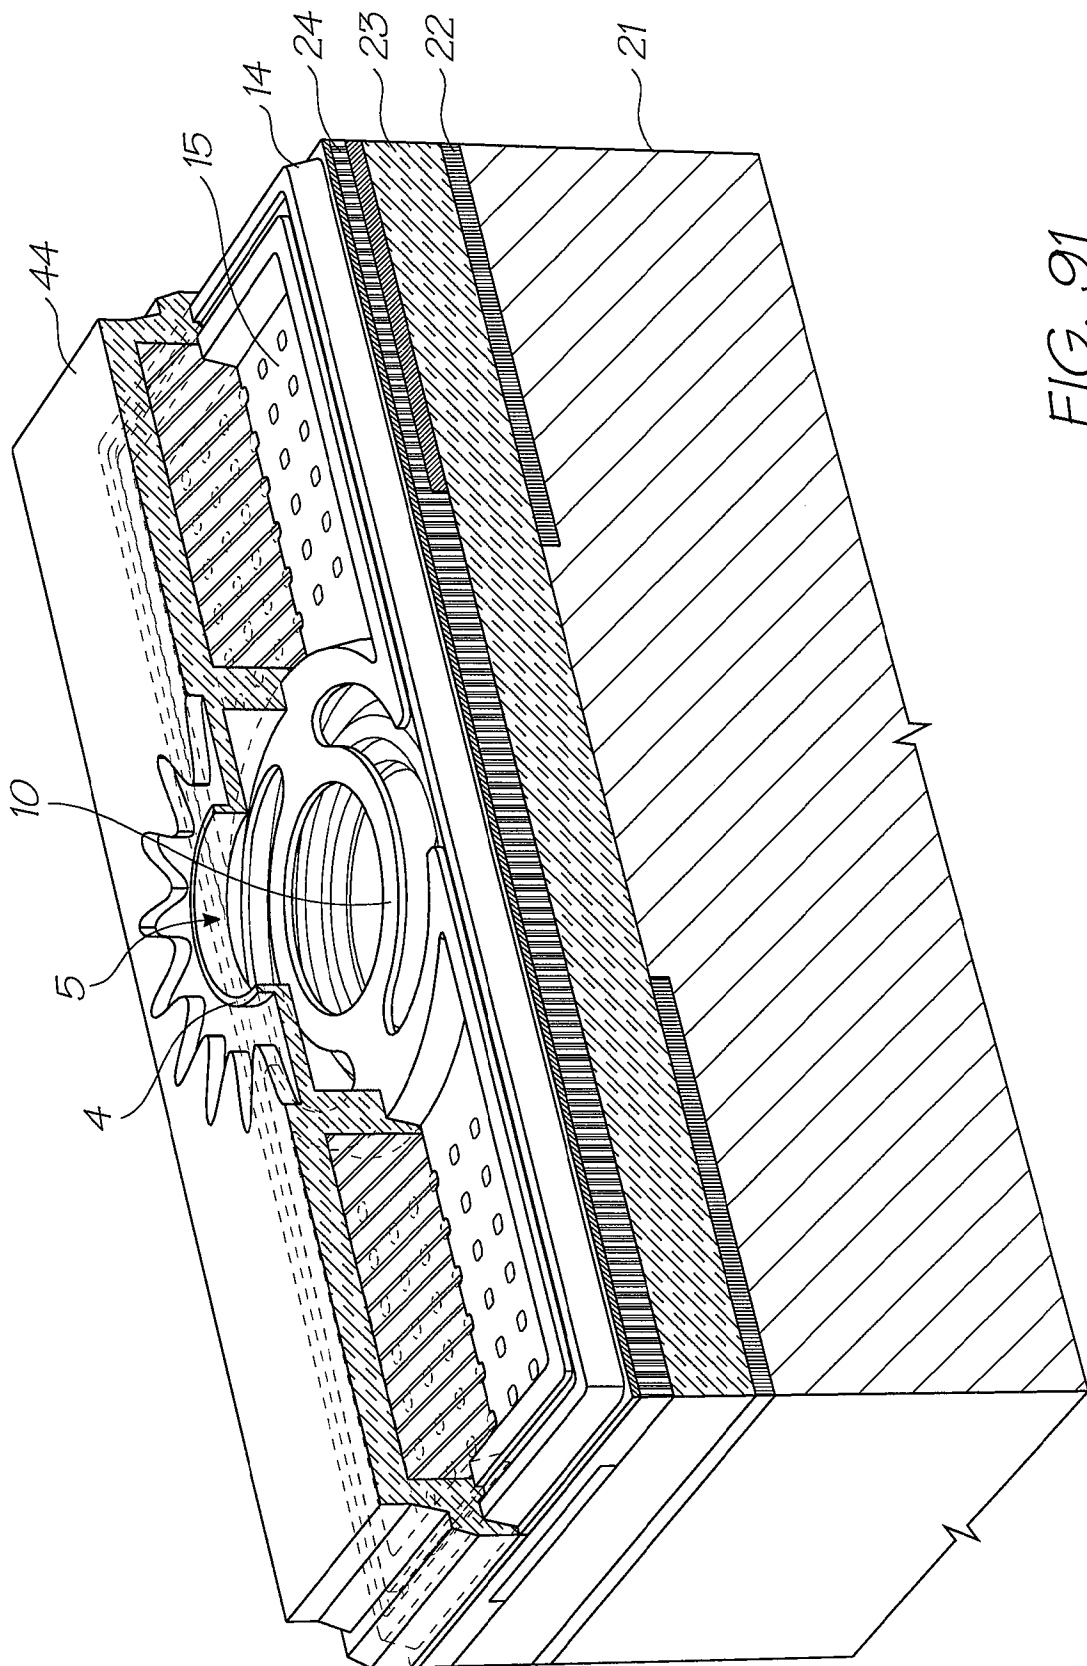


FIG. 91

64/66

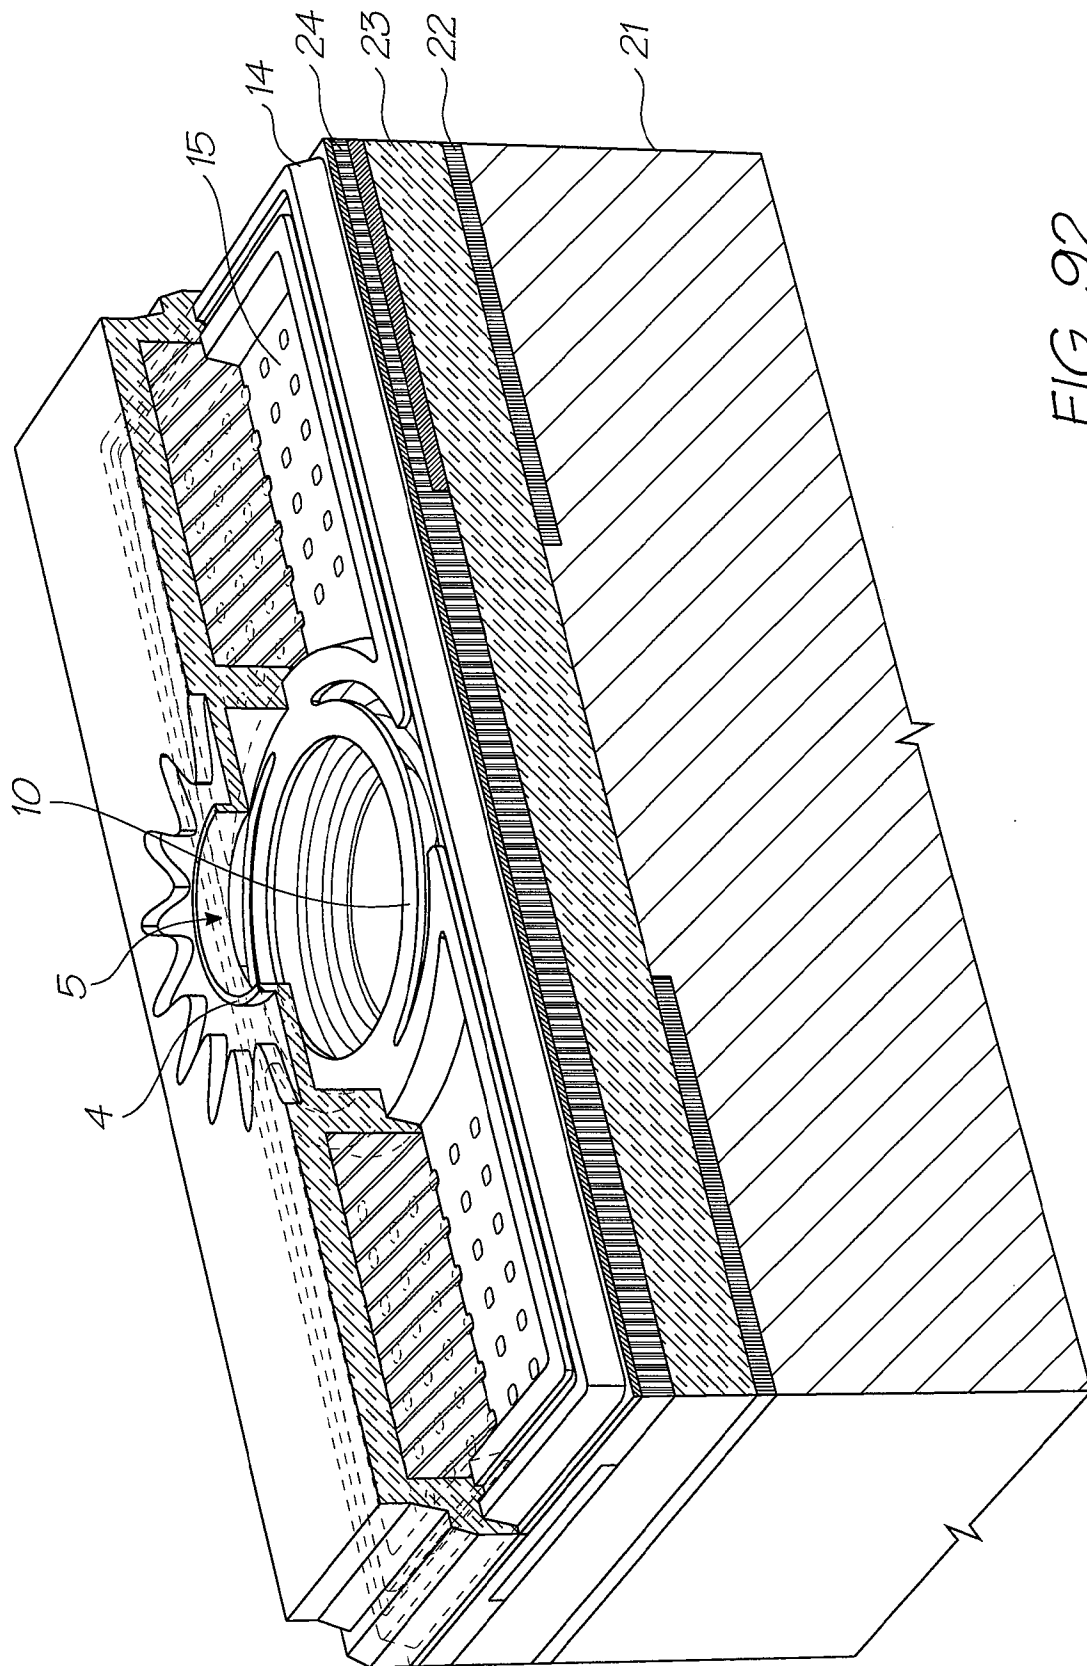


FIG. 92

65/66


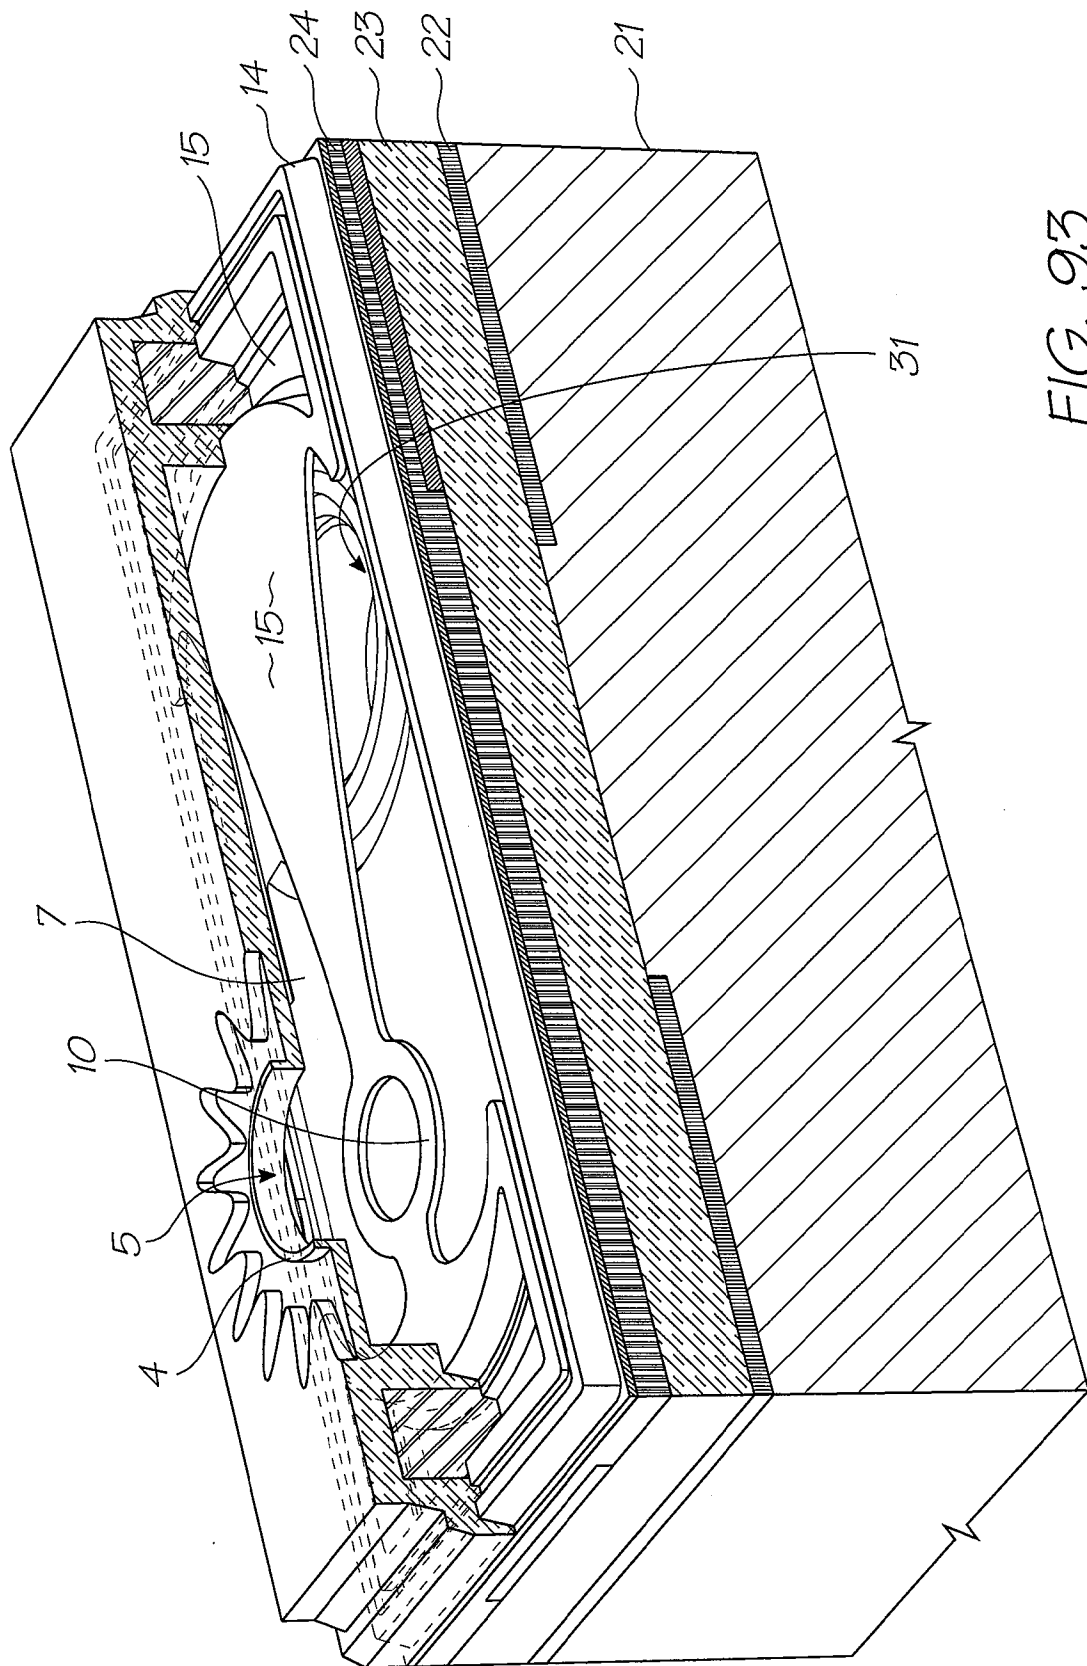


FIG. 93

66/66

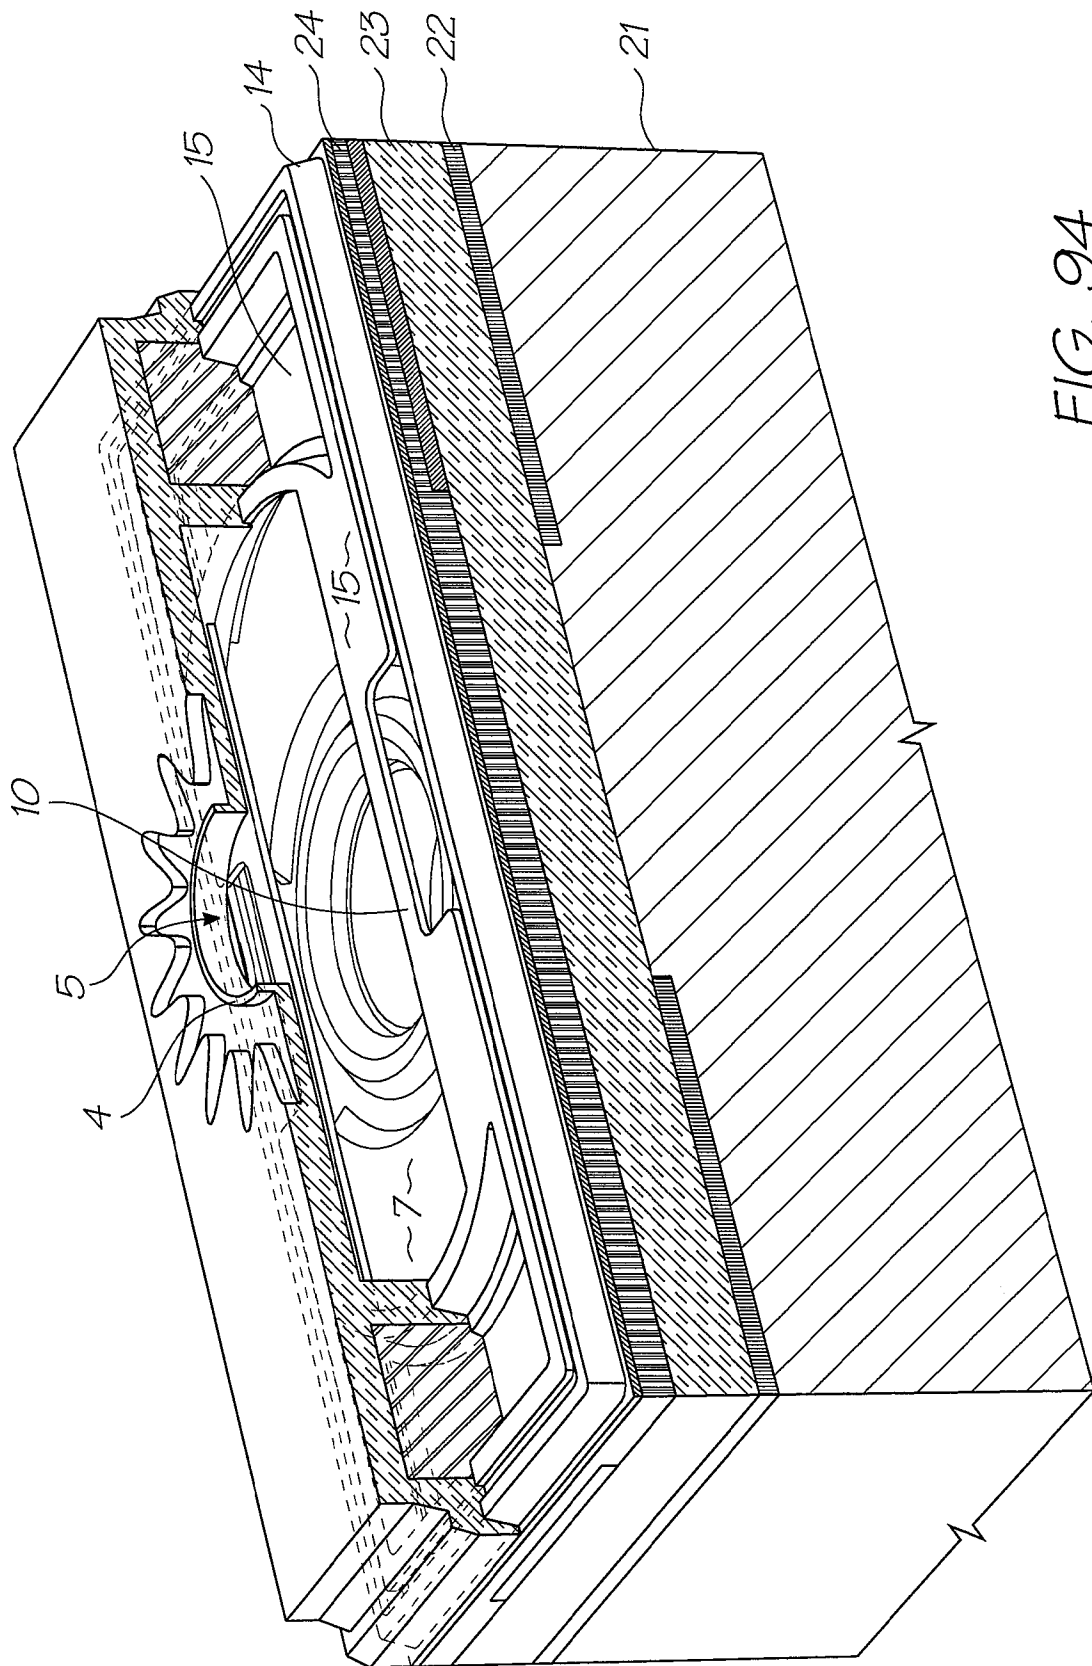

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2008/000515

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl.

B41J 2/05 (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
DWPI - IPC B41J2/05 & keywords (pulse, voltage, duration and similar terms); Patent Lens & keywords (bubblejet, pulse, microsecond, nozzle, heater, boiling, vapor, bubble and similar terms)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 2005/0280671 A1 (SILVERBROOK et al) 22 December 2005 See whole document, particularly claims and paragraphs 0070, 0317	1-12,17-20 13-16
X	EP 1078757 B1 (CANON KK) 2 August 2006 See paragraph 0016, table 3	1,2,5
Y	US 6755509 B2 (SILVERBROOK et al) 29 June 2004 See claims 10-12	13-16

☒ Further documents are listed in the continuation of Box C

☒ See patent family annex

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
13 June 2008

Date of mailing of the international search report **26 JUN 2008**

Name and mailing address of the ISA/AU
AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaustralia.gov.au
Facsimile No. +61 2 6283 7999

Authorized officer
STEPHEN CLARK
AUSTRALIAN PATENT OFFICE
(ISO 9001 Quality Certified Service)
Telephone No : (02) 6283 2781

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2008/000515

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 7128400 B1 (SILVERBROOK et al) 31 October 2006 See claims	13-16
A	US 5734398 A (MITANI) 31 March 1998 See col 3 lines 30-48, col 4 lines 38-54, col 8 lines 30-46 Either of citations 3 or 4 may be combined with citation 1 to disclose the features of claims 13-16	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU2008/000515

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member					
US	2005280671	AU	2003275797	CA	2506725	CN	1713994
		EP	1567349	KR	2005008393	US	6736489
		US	6974209	US	7306326	US	7328978
		US	2004100525	US	2004212662	US	2006125883
		US	2008055367	US	2008100673	WO	2004048106
EP	1078757	JP	2001130005	US	6443561		
US	6755509	AU	2003275792	CA	2506701	CN	1713993
		EP	1565318	KR	2005008668	US	6830318
		US	6991322	US	7018021	US	7108355
		US	7108356	US	7111926	US	7118197
		US	7118198	US	7118201	US	7118202
		US	7128400	US	7128402	US	7134743
		US	7134744	US	7134745	US	7147308
		US	7168790	US	7172270	US	7175261
		US	7182439	US	7195342	US	7210768
		US	7229155	US	7229156	US	7246885
		US	7246886	US	7258427	US	7278716
		US	7278717	US	7284839	US	7293858
		US	7334876	US	2004100523	US	2004100531
		US	2004100532	US	2004100533	US	2004113985
		US	2004113987	US	2004113988	US	2004119786
		US	2004155929	US	2004155932	US	2004155933
		US	2004155934	US	2004155935	US	2004155936
		US	2004155937	US	2004155938	US	2004155939
		US	2004155940	US	2004155941	US	2004160487
		US	2004160488	US	2004160489	US	2004160490
		US	2004160491	US	2004160492	US	2004160493
		US	2004183863	US	2004183864	US	2005099464
		US	2005179741	US	2005264616	US	2006077234
		US	2006092232	US	2006092233	US	2006109318
		US	2006268069	US	2006268070	US	2006274122
		US	2006274126	US	2006279610	US	2006279611

INTERNATIONAL SEARCH REPORT

International application No.

Information on patent family members

PCT/AU2008/000515

US	2007008383	US	2007013740	US	2007013747
US	2007019037	US	2007052760	US	2007064058
US	2007103513	US	2007109358	US	2007109359
US	2007115330	US	2007200901	US	2007211116
US	2007216733	US	2007222823	US	2007242104
US	2007268339	US	2007273729	US	2007285468
US	2007296761	US	2008030549	US	2008043064
US	2008111857	WO	2004048102		
US	5734398	JP	7304174		
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.					
END OF ANNEX					