

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 May 2009 (07.05.2009)

PCT

(10) International Publication Number
WO 2009/058513 A1

(51) International Patent Classification:
C09J 133/14 (2006.01) *C08L 33/14* (2006.01)
C08F 220/34 (2006.01)

(74) Agents: **KOKKO, Kent S.**, et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(21) International Application Number:
PCT/US2008/078740

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 3 October 2008 (03.10.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/983,735 30 October 2007 (30.10.2007) US

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **DETERMAN, Michael D.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **EVERAERTS, Albert I.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **MOORE, Cheryl L. S.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **OLSON, David B.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report*



WO 2009/058513 A1

(54) Title: HIGH REFRACTIVE INDEX ADHESIVES

(57) Abstract: The present invention provides pressure-sensitive adhesives having a refractive index of at least 1.50. The pressure-sensitive adhesives comprise at least one monomer containing a substituted or an unsubstituted carbazole group.

HIGH REFRACTIVE INDEX ADHESIVES

Field of Invention

This invention relates to pressure-sensitive and heat-activated adhesives. More particularly, this invention relates to adhesives having a high refractive index.

Background of the Invention

Pressure-sensitive adhesives ("PSAs") are defined herein as adhesives which exhibit permanent tack at room temperature. This property allows pressure-sensitive adhesives to adhere tenaciously upon application with only light finger pressure. PSAs have a balance of properties: adhesion, cohesion, stretchiness, and elasticity. Adhesion refers both to immediate adhesion to a surface and to the bond strength which develops upon application of pressure (often measured as "peel strength"). Cohesion refers to the "shear strength" or resistance of the applied PSA to failure when subjected to shearing forces. Stretchiness refers to the ability to elongate under low stresses. Elasticity refers to a property wherein the material exhibits a retractive force when stretched and retracts when the force is released.

Heat-activated adhesives ("HAs") are defined herein as adhesives that are non-tacky at room temperature but become temporarily tacky and are capable of bonding to a substrate at elevated temperatures. At or above this activation temperature, they have the same characteristics as PSAs, i.e. adhesion, cohesion, stretchiness, and elasticity. These adhesives usually have a T_g or melting point (T_m) above room temperature. When the temperature is elevated above the T_g or T_m , the storage modulus usually decreases and the adhesive become tacky.

Pressure-sensitive and heat-activated adhesives have many diverse applications including applications in optical products. For certain optical applications, it is useful to match the refractive index (RI) of the adhesive to that of the substrate to which it is applied. This matching of refractive index enhances the optical properties of the construction by reducing glare and reflectance. Glare is defined herein as the average reflectance over a range of 450 - 650 nanometers and reflectance is defined herein as the process where a fraction of the radiant flux incident on a surface is returned into the same hemisphere whose base is the surface and which contains the incident radiation (see

Handbook of Optics, 2nd ed., McGraw-Hill, Inc., 1995). Often, the substrate is a polymeric material having refractive indexes in the range of 1.48 to 1.65, for example, polymethyl(meth)acrylate (PMMA) has a RI of 1.489; polycarbonate has a RI of 1.585; and polyethylene terephthalate (PET) has a RI of 1.64.

5

Summary of the Invention

Typical PSAs and heat-activated adhesives have refractive indices of about 1.47 or less. If these PSAs are used in optical applications, glare and reflectance may occur. Therefore, the need exists for such adhesives which have high refractive indexes.

10

The present invention provides adhesives which have a refractive index of at least 1.50. These pressure-sensitive and heat-activated adhesives are particularly suitable for optical applications where the substrate, or adherend, similarly has a high refractive index. The pressure-sensitive adhesives of the present invention advantageously allow for the matching of refractive index which reduces glare and reflectance.

15

In many embodiments, the invention further provides adhesives that are optically clear; having an optical transmission value of at least 85%, preferably at least 90%. The term "optical transmission value" means the percentage of light that is not either reflected back toward the source or absorbed by the film as a percentage of the total incident light at a wavelength of 550 nm (light emitted/light source x 100). The adhesives further have less than 2% haze, preferably less than 1%.

20

The adhesives of the present invention comprise at least one monomer containing a carbazole group. One aspect of the present invention is a pressure-sensitive adhesive comprising the interpolymerized reaction product of: (a) at least one monomer selected from the group consisting of a (meth)acrylic acid ester monomer; and (b) at least one monomer containing a carbazole group. As used herein the term "(meth)acrylic" or "(meth)acrylate" is inclusive of both acrylic and methacrylic (or acrylate and methacrylate).

25

Another aspect of the present invention is a pressure-sensitive adhesive comprising the interpolymerized reaction product of: (a) at least one (meth)acrylic acid ester monomer, (b) at least one monomer containing a substituted or an unsubstituted carbazole group; and (c) at least one containing an acid functional monomer.

30

Yet, another aspect of the present invention is a pressure-sensitive adhesive comprising the interpolymerized reaction product of: (a) at least one (meth)acrylic acid ester monomer, (b) at least one monomer containing a substituted or an unsubstituted carbazole group; and (c) optionally at least one acid functional monomer; and (d) at least one non-acid containing polar monomer copolymerizable with the monomer(s) of components (a), (b), and (c).

The pressure-sensitive adhesives of the present invention may optionally comprise other monomers, crosslinkers, and other additives.

Another embodiment of the present invention is a substrate coated with the pressure-sensitive adhesives of the present invention.

Detailed Description

The present invention relates to adhesives having a refractive index of at least 1.50. Preferably, the adhesives have a refractive index of at least 1.54.

The pressure-sensitive adhesives of the present invention have a high refractive index and yet have a good balance of the four properties relevant for pressure-sensitive adhesives: adhesion, cohesion, stretchiness, and elasticity. The adhesives meet the Dahlquist criteria (described in Handbook of Pressure Sensitive Adhesive Technology, D. Satas, 2nd ed., page 172 (1989)) at use temperatures. This criterion defines a good pressure sensitive adhesive as one having a 1 second creep compliance of greater than 1×10^{-6} cm²/dyne. Alternatively, since modulus is, to a first approximation, the inverse of compliance, pressure sensitive adhesives may be defined as adhesives having a shear modulus of less than 1×10^6 dynes/cm².

Refractive index is defined herein as the absolute refractive index of a material (e.g., a monomer or the polymerized product thereof) which is understood to be the ratio of the speed of electromagnetic radiation in free space to the speed of the radiation in that material, with the radiation being of sodium yellow light at a wavelength of about 583.9 nanometers (nm). The refractive index can be measured using known methods and is generally measured using an Abbe Refractometer.

The pressure-sensitive adhesives of the present invention are (meth)acrylate adhesives comprising at least one carbazole monomer. The pressure-sensitive adhesives may comprise at least one (meth)acrylic acid ester of a non-tertiary alcohol, at least and

one or more acid-functional monomers and optionally one or more non-acid functional polar monomers. The pressure-sensitive adhesives of the present invention optionally comprise other monomers which may be added to improve the physical properties of the adhesives, such as crosslinkers, and other additives such as tackifiers or plasticizers.


5 The (meth)acrylic monomers useful in the pressure-sensitive adhesive of the present invention are typically present at ranges from about 5 to about 95 parts by weight, preferably 10 to 90 parts by weight, relative to 100 parts by weight total monomer. Useful acrylic monomers include at least one monomer selected from the group consisting of a
10 monomeric acrylic or methacrylic acid ester of a non-tertiary alkyl alcohol, the alkyl group of which comprises from about 1 to about 12 carbon atoms, preferably from about 4 to about 8 carbon atoms, and mixtures thereof.

 Suitable (meth)acrylic ester monomers include, but are not limited to, those selected from the group consisting of the esters of acrylic acid or methacrylic acid with non-tertiary alkyl alcohols such as 1-butanol, 1-pentanol, 2-pentanol, 3-pentanol, 2-
15 methyl-1-butanol, 1-methyl-1-butanol, 1-methyl-1-pentanol, 2-methyl-1-pentanol, 3-methyl-1-pentanol, 2-ethyl-1-butanol, 2-ethyl-1-hexanol, 3,5,5-trimethyl-1-hexanol, 3-heptanol, 2-octanol, 1-decanol, 1-dodecanol, and the like, and mixtures thereof. Such monomeric acrylic or methacrylic esters are known in the art and are commercially available.

20 Preferably the acrylate monomers are selected to impart a low glass transition temperature (T_g) to the resultant adhesive. This monomer will typically have a T_g less than 0°C . and more preferably less than -20°C , measured as a function of the homopolymer. Reference may be made to Handbook of Pressure Sensitive Adhesive Technology, D. Satas, 2nd ed., page 399 (1989).

25 The carbazole monomers are high refractive index acrylic monomers, preferably all of which have homopolymer glass transition temperatures at or below 70°C . These carbazole monomers, when polymerized alone or in the presence of other acrylic monomers, result in PSAs having RIs higher than are otherwise available. By adjusting the ratio of monomers, it is possible to make PSAs having RIs of at least 1.50. Typically, the
30 adhesive comprises 95 to about 5 parts by weight, preferably 90 to 10 parts by weight, of the carbazole monomers relative to 100 parts by weight total monomer.

The aromatic monomers of the present invention are represented by the following general of the formula:

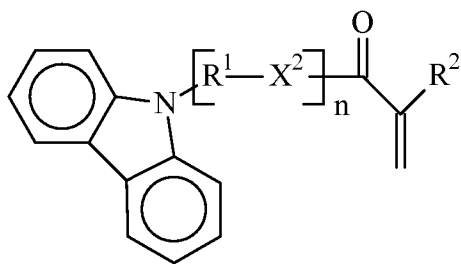

I

wherein


- 5 X^2 is $-O-$, $-S-$, or $-NR^3-$, wherein R^3 is H or C_1-C_4 alkyl, preferably X^2 is $-O-$;
 R^1 is an alkylene of 1 to 8 carbons, optionally containing one or more ether oxygen atoms and one or more pendent hydroxy groups;
 n is 1 to 3; and
 R^2 is either H or CH_3 .

- 10 In certain preferred embodiments, R^1 is an alkylene of 1 to 8 carbons; i.e. $-C_aH_{2a}-$, where a is 1 to 8. In other embodiments R^1 may contain one or more catenary ether oxygen atoms; e.g. $-C_bH_{2b}-O-C_cH_{2c}-$, where b and c are at least 1 and $b+c$ is 2 to 8. In another embodiment R^1 may contain an pendent hydroxy group; e.g. $-C_bH_{2b}-CH(OH)-C_cH_{2c}-$, where b and c are at least 1 and $b+c$ is 2 to 8. If desired, the carbazole group may
 15 be brominated to increase the refractive index of the resulting adhesive. However such bromine substitution may also increase the T_g of the adhesive.

- Compounds of Formula I, where R^1 is 6 to 8 are believed to be novel. It has further been found that these compounds have significantly lower T_g 's than homologues where $R^1 \leq 4$, yet retain the high refractive indices, and are therefore useful as high refractive index
 20 PSAs. Optionally the homo- and copolymers may be blended with plasticizers and tackifiers as desired.

- According to Donatas Satas, Handbook of Pressure Sensitive Adhesives, 1st Edition, Von Nostrand Rheinhold, NY, 1982: "the glass transition temperature is neither an accurate measurement of polymer stiffness at room temperature, nor is it an accurate
 25 measure of pressure sensitive properties. It is an easy and convenient method to predict the suitability of a polymer for pressure-sensitive adhesive application and to predict the effect of a comonomer on the copolymer properties."

The carbazole-containing monomers of Formula I, where $n=0$, may be prepared by simple condensation of a (meth)acryloyl compound (such as an ester or acid halide) with a carbazole compound. The compounds of Formula I, where $n = 1-3$ may be prepared by a two step synthesis where a carbazole compound having a nucleophilic $-XH$ group is first
 5 alkylated with a compound of the formula $Z^1-R^1-X^2H$, where Z^1 is a leaving group such as a halide, followed by condensation with a (meth)acryloyl compound as follows:

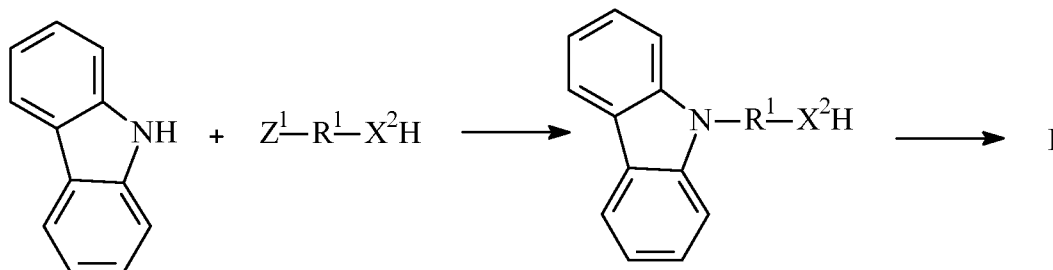

Other methods of preparing the carbazole monomers of Formula I will be apparent to one skilled in the art. For Example, the monomers of Formula I, where $n=2$ may be
 10 prepared by reaction of a carbazole compound with ethylene carbonate, followed by condensation with a (meth)acryloyl compound.

The adhesive copolymer may further comprise an acid functional monomer, where the acid functional group may be an acid *per se*, such as a carboxylic acid, or a salt thereof such as an alkali metal carboxylate. Useful acid functional monomers include, but are not
 15 limited to, those selected from ethylenically unsaturated carboxylic acids, ethylenically unsaturated sulfonic acids, ethylenically unsaturated phosphonic acids, and mixtures thereof. Examples of such compounds include those selected from acrylic acid, methacrylic acid, itaconic acid, fumaric acid, crotonic acid, citraconic acid, maleic acid, oleic acid, β -carboxyethyl acrylate, 2-sulfoethyl methacrylate, styrene sulfonic acid, 2-
 20 acrylamido-2-methylpropanesulfonic acid, vinylphosphonic acid, and mixtures thereof.

Due to their availability, acid functional monomers of the present invention are generally selected from ethylenically unsaturated carboxylic acids, i.e. (meth)acrylic acids. When even stronger acids are desired, acidic monomers include the ethylenically
 25 unsaturated sulfonic acids and ethylenically unsaturated phosphonic acids. The acid functional monomer, when present, is generally used in amounts of 1 to 15 parts by weight, preferably 1 to 10 parts by weight, based on 100 parts by weight total monomer. In

some embodiments, such as in electronic application, acid functional monomers are not present, as they deleteriously affect the performance of such devices.

The adhesive copolymer may further comprise other polar monomer exclusive of the acid functional monomers to increase the cohesive strength of the pressure-sensitive adhesive. Useful polar monomers include, but are not limited to, acrylamides, N-alkyl (meth)acrylamides, N,N-dialkyl substituted (meth)acrylamides, N-vinyl lactams, and N,N-dialkylaminoalkyl (meth)acrylates, hydroxyalkyl(meth)acrylates, and mixtures thereof. Illustrative examples include, but are not limited to, those selected from the group consisting of N,N-dimethyl (meth)acrylamide, N,N-diethyl (meth)acrylamide, N,N-dimethylaminoethyl (meth)acrylate, N,N-dimethylaminopropyl (meth)acrylate, N,N-dimethylaminopropyl (meth)acrylate, 2-hydroxyethyl acrylate, and the like, and mixtures thereof.

Preferred non-acid polar monomers include acrylamide, methacrylamide, acrylonitrile, methacrylonitrile, and mixtures thereof. Generally, non-acid polar monomers are typically present at ranges from about 0 to about 12 parts by weight, preferably from about 2 to about 8 parts by weight, based on 100 parts by weight total monomer.


Other vinyl monomers may be added to improve performance, reduce cost, etc. in quantities which do not render the pressure-sensitive adhesive non-tacky. When used, vinyl monomers useful in the adhesive copolymer include vinyl esters (e.g., vinyl acetate and vinyl propionate), styrene, substituted styrene (e.g., α -methyl styrene), and mixtures thereof. Such vinyl monomers are generally used at 0 to 5 parts by weight, preferably 1 to 5 parts by weight, based on 100 parts by weight total monomer.

The copolymerizable mixture of monomers may further comprise chain transfer agents to control the molecular weight of the resultant copolymer. Examples of useful chain transfer agents include but are not limited to those selected from the group consisting of alcohols, mercaptans, and mixtures thereof. A preferred chain transfer agent is isooctylthioglycolate. The mixture may further comprise up to about 0.5 parts by weight of a chain transfer agent, typically about 0.01 to about 0.5 parts by weight, if used, preferably about 0.05 parts by weight to about 0.2 parts by weight, based upon 100 parts by weight of the total monomer mixture.

In order to increase cohesive strength of the poly(meth)acrylate pressure sensitive adhesives, a crosslinking agent may be incorporated into the adhesive composition. Two

main types of chemical crosslinking agents are exemplary. The first crosslinking additive is a thermal crosslinking agent such as multifunctional aziridine, isocyanate, oxazole and epoxy compounds. One example of aziridine crosslinker is 1,1'-(1,3-phenylene dicarbonyl)-bis-(2-methylaziridine) (CAS No. 7652-64-4). Other bisamide crosslinking agents are described in U.S. 6,893,718 (Melancon et al.). Common polyfunctional isocyanate crosslinkers are trimethylolpropane toluene diisocyanate, toluene diisocyanate, and others known in the art. Such chemical crosslinkers can be added into solvent-based PSAs after polymerization and activated by heat during oven drying of the coated adhesive.

10 Bisamide crosslinking agents may be of the formula

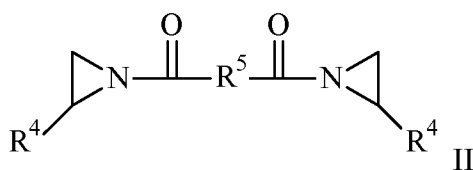

where,


each R⁴ is independently selected from the group consisting of H and C_nH_{2n+1}, where n is an integer ranging from 1 to 5,

15 R⁵ is a divalent radical selected from the group consisting of phenyl, substituted phenyl, triazine, and -C_nH_{2m}-, where m is an integer ranging from 1 to 10, and combinations thereof

Multifunctional oxazoline crosslinking agents useful in this invention are those that contain two or more groups per molecule selected from the group consisting of 2-oxazolines, 2 oxazines and combinations thereof. Preferred 1,3-oxazyl heterocyclic compounds are 1,3-oxazolines, and a particularly preferred 1,3-oxazoline is 2-phenyl-2-oxazoline. Bisoxazolines are typically derived from polycarboxylic acids and such polycarboxylic acids include, but are not limited to aromatic acids; for example, isophthalic acid, terephthalic acid, 5-t-butylisophthalic acid, trimesic acid, 1,2,4,5-benzenetetracarboxylic acid and 2,6-naphthalene dicarboxylic acid. The preferred polycarboxylic acids include isophthalic acid, terephthalic acid and trimesic acid.

Polyfunctional 1,3-oxazyl heterocyclic compounds useful in this invention can be conveniently prepared by the reaction of the corresponding esters of a polycarboxylic acids and alkanolamines. Nonlimiting examples of poly(1,3-oxazyl heterocyclic)

compounds including bisoxazolines are those having a nucleus represented by the following Formula III:

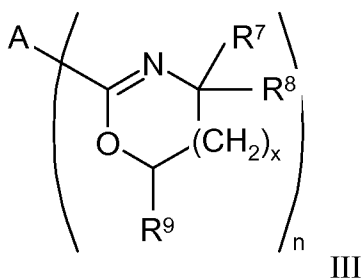

wherein A is selected from the group consisting of a cyclic or acyclic aliphatic or substituted cyclic or acyclic aliphatic moiety having from 1 to 20 carbon atoms or an aromatic (aryl) mono- or multinuclear or aliphatic substituted aryl residue having from 6 to 20 carbon atoms and a polymeric or oligomeric residue comprising from about 2 to 200,000 repeating units;

R⁷ independently represents H, CH₃, CH₂CH₃, or C₆H₅;

R⁸ and R⁹ independently represent H or CH₃, preferably R⁷ and R⁹ are not both CH₃;

x represents an integer of 0 or 1;

n is an integer of 2 or more, preferably 2 or 3.

Useful multifunctional oxazoline crosslinking agents include but is not limited to 4,4'-5,5'-tetrahydro-2,2'-bisoxazole, (that is, 2,2'-bis(2-oxazoline)); 2,2'-(alkanedyl)bis[4,5-dihydrooxazole], for example, 2,2'-(1,4-butanediyl)bis[4,5-dihydrooxazole] and 2,2'-(1,2-ethanediyl)bis[4,5-dihydrooxazole]; 2,2'-(arylene)bis[4,5-dihydrooxazole], e.g., 2,2'-(1,4-phenylene)bis[4,5-dihydrooxazole]; 2,2'-(1,5-naphthalenylyl)bis[4,5dihydrooxazole] and 2,2'-(1,8-anthracenylyl)bis[4,5-dihydrooxazole]; sulfonyl, oxy, thio or alkylene bis 2-(arylene)[4,5-dihydrooxazole], for example, sulfonyl bis 2-(1,4-phenylene)bis[4,5-dihydrooxazole], oxybis 2-(1,4-phenylene)bis[4,5-dihydrooxazole], thiobis 2-(1,4-phenylene)bis[4,5-dihydrooxazole] and methylene bis 2-(1,4-phenylene)bis[4,5-dihydrooxazole]; 2,2',2''-(arylene tris [4,5-dihydrooxazole], e.g., 2,2',2''-(1,3,5-phenylene tris [4,5-dihydrooxazole]; 2,2',2'',2'''-(arylene tetra[4,5-dihydrooxazole], for example, 2,2',2'',2'''-(1,2,4,5-phenylene tetra[4,5-dihydrooxazole] and oligomeric and polymeric materials having terminal oxazoline groups.

Typically, such crosslinkers are used in amounts of about 0.05 to 1.0 pph crosslinker per 100 pph (on solids) of adhesive copolymer.

In another embodiment, chemical crosslinkers which rely upon free radicals to carry out the crosslinking reaction may be employed. Reagents such as, for example, peroxides serve as a source of free radicals. When heated sufficiently, these precursors will generate free radicals by hydrogen abstraction, which bring about a crosslinking
5 reaction of the polymer. A common free radical generating reagent is benzoyl peroxide. Free radical generators are required only in small quantities, but generally require higher temperatures to complete a crosslinking reaction than those required for the bisamide reagent.

The second type of chemical crosslinker is a photosensitive crosslinker which is
10 activated by high intensity ultraviolet (UV) light. Two common photosensitive crosslinkers used for acrylic PSAs are benzophenone and copolymerizable aromatic ketone monomers as described in U.S. Patent No. 4,737,559. Another photocrosslinker, which can be post-added to the solution polymer and activated by UV light is a triazine, for example, 2,4-bis(trichloromethyl)-6-(4-methoxy-phenyl)-s-triazine. These crosslinkers
15 are activated by UV light generated from artificial sources such as medium pressure mercury lamps or a UV blacklight.

Polyethylenically unsaturated compounds, such as multifunctional acrylates are useful as crosslinking agent in bulk or emulsion polymerization processes. Examples of polyethylenically unsaturated compounds include, but are not limited to, polyacrylic-
20 functional monomers such as ethylene glycol diacrylate, propylene glycol dimethacrylate, bisphenol-A di(meth)acrylate, trimethylolpropane triacrylate, 1,6-hexanedioldiacrylate, pentaerythritol di-, tri-, and tetraacrylate, and 1,12-dodecanedioldiacrylate; olefinic-acrylic-functional monomers such as allyl methacrylate, 2-allyloxycarbonylamidoethyl methacrylate, and 2-allylaminoethyl (meth)acrylate; allyl 2-acrylamido-2,2-
25 dimethylacetate; divinylbenzene; vinyloxy group-substituted functional monomers such as 2-(ethenyloxy)ethyl (meth)acrylate, 3-(ethynyloxy)-1-propene, 4-(ethynyloxy)-1-butene, and 4-(ethenyloxy)butyl-2-acrylamido-2,2-dimethylacetate, and the like.

The polyethylenically unsaturated crosslinker is typically present from 0.05 to about 1 part by weight, preferably 0.1 to 0.5 parts by weight, based on 100 parts by weight
30 adhesive copolymer solids.

Crosslinking may also be achieved using high energy electromagnetic radiation such as gamma or e-beam radiation. In this case, no additional crosslinker may be required.

5 Following copolymerization, other additives may be blended with the resultant acrylate or methacrylate copolymer. For example, compatible tackifiers and/or plasticizers may be added to aid in optimizing the ultimate tack and peel properties of the PSA. The use of such tackifiers is common in the art, as is described in the *Handbook of Pressure-Sensitive Adhesive Technology*, edited by Donatas Satas (1982).

10 Examples of useful tackifiers include, but are not limited to, rosin, rosin derivatives, polyterpene resins, coumarone-indene resins, and the like. Plasticizers which may be added to the adhesive of the invention may be selected from a wide variety of commercially available materials.

15 Representative plasticizers include polyoxyethylene aryl ether, dialkyl adipate, 2-ethylhexyl diphenyl phosphate, t-butylphenyl diphenyl phosphate, di-(2-ethylhexyl) adipate, toluenesulfonamide, dipropylene glycol dibenzoate, polyethylene glycol dibenzoate, polyoxypropylene aryl ether, dibutoxyethoxyethyl formal, and dibutoxyethoxyethyl adipate. When used, tackifiers are preferably added in an amount not to exceed about 50 parts by weight per 100 parts by weight copolymer, and plasticizer may be added in an amount up to about 50 parts by weight per 100 parts by weight
20 copolymer.

Preferably any added tackifier and/or plasticizer has a refractive index of at least 1.50, so that incorporation does not reduce the refractive index of the pressure-sensitive adhesive. Reference may be made to Handbook of Plasticizers, George Wypych, Editor, ChemTec Publishing, Toronto-Scarborough, Ontario, Canada, ISBN 1-895198-29-1, and to
25 Wypych, Anna, Plasticizers Database (2nd Electronic Edition). ChemTec Publishing. Online version available at:
<http://www.knovel.com/knovel2/Toc.jsp?BookID=976&VerticalID=0>.

Useful high refractive index plasticizers include aromatic phosphate esters, phtalates, benzoic ethers, aromatic sulfonamide, and some rosins. The phosphate esters
30 and phtalates are preferred. Exemplary plasticizer include diethylene glycol dibenzoate (1.5424 n_{25/D}), 4-(tert-butyl)phenyl diphenyl phosphate (1.555 n_{25/D}), trimethylphenyl phosphate (1.5545 n_{25/D}), triphenyl phosphate (1.5575 n_{25/D}), phenylmethyl benzoate

(1.56 n₂₅/D), diethylene glycol dibenzoate (1.5424 n₂₅/D), butyl benzyl phthalate (1.537 n₂₅/D), methyl ester of rosin (1.531 n₂₀/D), alkyl benzyl phthalate (1.526 n₂₅/D), butyl(phenylsulfonyl)amine (1.525 n₂₀/D), benzyl phthalate (1.518 n₂₅/D), trimethyl trimellitate (1.523 (n₂₀/D), and 2-ethylhexyl diphenyl phosphate (1.51 (n₂₀/D).

5 Further, for optical applications, tackifiers, plastizicers and other additives should have low color; i.e. a Gardner value of <3, preferably < 1. Further, plasticizers should be selected to be compatible, i.e. miscible, with the polymer matrix and the polymerization medium.

10 Other additives can be added in order to enhance the performance of the adhesive compositions. For example, leveling agents, ultraviolet light absorbers, hindered amine light stabilizers (HALS), oxygen inhibitors, wetting agents, rheology modifiers, defoamers, biocides, dyes, pigments and the like, can be included herein. All of these additives and the use thereof are well known in the art. It is understood that any of these compounds can be used so long as they do not deleteriously affect the adhesive and optical
15 properties.

Also useful as additives to the present compositions are UV absorbers and hindered amine light stabilizers. UV absorbers and hindered amine light stabilizers act to diminish the harmful effects of UV radiation on the final cured product and thereby enhance the weatherability, or resistance to cracking, yellowing and delamination of the
20 coating. A preferred hindered amine light stabilizer is bis(1,2,2,6,6-pentamethyl-4-piperidiny) [3,5-bis(1,1-dimethylethyl-4-hydroxyphenyl)methyl]butylpropanedioate, available as Tinuvin™144, from CIBA-GEIGY Corporation, Hawthorne, NY.

The following UV absorbers and combinations thereof in concentrations of less than 5 parts by weight based on the total monomer composition, may produce desirable
25 results: bis(1,2,2,6,6-pentamethyl-4-piperidiny)(3,5-bis(1,1-dimethylethyl 1-4-hydroxyphenyl)methyl) butylpropanedioate, 2-ethylhexyl-2-cyano-3,3'-diphenylacrylate, 2-hydroxyl-4-n-octoxybenzophenone, 2-(2'-hydroxy-5'-methylphenyl)benzotriazole, poly(oxy-1,2-ethanediyl), alpha-(3-(3-(2H-benzotriazol-2-yl)-5-(1,1-dimethylethyl)-4-hydroxylphenyl) -1-oxopropyl)-omega-hydroxy, and Uvinul.RTM. D-50 and MS-40, sold
30 by BASF Wyandotte Inc., Parsippany, NJ. Concentrations of UV absorbers, however, in the range of 1 to 5 percent based on the total weight of the composition are preferred.

The adhesive copolymers herein may be prepared by any conventional free radical polymerization method, including solution, radiation, bulk, dispersion, emulsion, and suspension processes. For optical applications, solution, UV and bulk processes are preferred. Other processes may introduce birefringence or foreign materials that may affect optic properties.

The adhesive copolymers may be prepared via suspension polymerizations as disclosed in U.S. Pat. Nos. 3,691,140 (Silver); 4,166,152 (Baker et al.); 4,636,432 (Shibano et al); 4,656,218 (Kinoshita); and 5,045,569 (Delgado). Preferably, the (meth)acrylate copolymer is prepared by an emulsion polymerization process in the presence of a free-radical initiator.

Water-soluble and oil-soluble initiators useful in preparing the (meth)acrylate adhesive copolymers used in the present invention are initiators that, on exposure to heat, generate free-radicals which initiate (co)polymerization of the monomer mixture. Water-soluble initiators are preferred for preparing the (meth)acrylate polymers by emulsion polymerization. Suitable water-soluble initiators include but are not limited to those selected from the group consisting of potassium persulfate, ammonium persulfate, sodium persulfate, and mixtures thereof; oxidation-reduction initiators such as the reaction product of the above-mentioned persulfates and reducing agents such as those selected from the group consisting of sodium metabisulfite and sodium bisulfite; and 4,4'-azobis(4-cyanopentanoic acid) and its soluble salts (e.g., sodium, potassium). The preferred water-soluble initiator is potassium persulfate. Suitable oil-soluble initiators include but are not limited to those selected from the group consisting of azo compounds such as VAZO 64 (2,2'-azobis(isobutyronitrile)) and VAZO 52 (2,2'-azobis(2,4-dimethylpentanenitrile)), both available from E.I. du Pont de Nemours Co., peroxides such as benzoyl peroxide and lauroyl peroxide, and mixtures thereof. The preferred oil-soluble thermal initiator is (2,2'-azobis(isobutyronitrile)). When used, initiators may comprise from about 0.05 to about 1 part by weight, preferably about 0.1 to about 0.5 part by weight based on 100 parts by weight of monomer components in the pressure-sensitive adhesive.

Polymerization via emulsion techniques may require the presence of an emulsifier (which may also be called an emulsifying agent or a surfactant). Useful emulsifiers for the present invention include those selected from the group consisting of anionic surfactants, cationic surfactants, nonionic surfactants, and mixtures thereof.

Preferably, the emulsion polymerization is carried out in the presence of anionic surfactant(s). A useful range of surfactant concentration is from about 0.5 to about 8 weight percent, preferably from about 1 to about 5 weight percent, based on the total weight of all monomers of the emulsion pressure-sensitive adhesive.

5 Alternatively, the copolymers can be polymerized by techniques including, but not limited to, the conventional techniques of solvent polymerization, dispersion polymerization, and solventless bulk polymerization. The monomer mixture may comprise a polymerization initiator, especially a thermal initiator or a photoinitiator of a type and in an amount effective to polymerize the comonomers, as previously described.

10 A typical solution polymerization method is carried out by adding the monomers, a suitable solvent, and an optional chain transfer agent to a reaction vessel, adding a free radical initiator, purging with nitrogen, and maintaining the reaction vessel at an elevated temperature, typically in the range of about 40 to 100°C until the reaction is completed, typically in about 1 to 20 hours, depending upon the batch size and temperature. Examples
15 of the solvent are methanol, tetrahydrofuran, ethanol, isopropanol, acetone, methyl ethyl ketone, methyl acetate, ethyl acetate, toluene, xylene, and an ethylene glycol alkyl ether. Those solvents can be used alone or as mixtures thereof.

In a typical photopolymerization method, a monomer mixture may be irradiated with ultraviolet (UV) rays in the presence of a photopolymerization initiator (i.e.,
20 photoinitiators). Preferred photoinitiators are those available under the trade designations IRGACURE and DAROCUR from Ciba Speciality Chemical Corp., Tarrytown, NY and include 1-hydroxy cyclohexyl phenyl ketone (IRGACURE 184), 2,2-dimethoxy-1,2-diphenylethan-1-one (IRGACURE 651), bis(2,4,6-trimethylbenzoyl)phenylphosphineoxide (IRGACURE 819), 1-[4-(2-
25 hydroxyethoxy)phenyl]-2-hydroxy-2-methyl-1-propane-1-one (IRGACURE 2959), 2-benzyl-2-dimethylamino-1-(4-morpholinophenyl)butanone (IRGACURE 369), 2-methyl-1-[4-(methylthio)phenyl]-2-morpholinopropan-1-one (IRGACURE 907), and 2-hydroxy-2-methyl-1-phenyl propan-1-one (DAROCUR 1173). Particularly preferred photoinitiators are IRGACURE 819, 651, 184 and 2959.

30 Solventless polymerization methods, such as the continuous free radical polymerization method described in U.S. Pat. Nos. 4,619,979 and 4,843,134(Kotnour et al.); the essentially adiabatic polymerization methods using a batch reactor described in

U.S. Pat. No. 5,637,646 (Ellis); and, the methods described for polymerizing packaged pre-adhesive compositions described in U.S. Pat. No. 5,804,610 (Hamer et al.) may also be utilized to prepare the polymers.

5 The adhesives of the present invention may be coated upon a variety of flexible and inflexible backing materials using conventional coating techniques to produce adhesive-coated materials. Flexible substrates are defined herein as any material which is conventionally utilized as a tape backing or may be of any other flexible material. Examples include, but are not limited to plastic films such as polypropylene, polyethylene, polyvinyl chloride, polyester (polyethylene terephthalate), polycarbonate, 10 polymethyl(meth)acrylate (PMMA), cellulose acetate, cellulose triacetate, and ethyl cellulose. Examples of inflexible substrates include, but are not limited to, metal, metallized polymeric film, indium tin oxide coated glass and polyester, PMMA plate, polycarbonate plate, glass, or ceramic sheet material. The adhesive-coated sheet materials may take the form of any article conventionally known to be utilized with adhesive 15 compositions such as labels, tapes, signs, covers, marking indices, display components, touch panels, and the like.

The above-described compositions are coated on a substrate using conventional coating techniques modified as appropriate to the particular substrate. For example, these compositions can be applied to a variety of solid substrates by methods such as roller 20 coating, flow coating, dip coating, spin coating, spray coating knife coating, and die coating. These various methods of coating allow the compositions to be placed on the substrate at variable thicknesses thus allowing a wider range of use of the compositions. Coating thicknesses may vary, but coating thicknesses of 2-500 microns (dry thickness), preferably about 25 to 250 microns, are contemplated.

25 The adhesive emulsions (containing the adhesive copolymer and water) may be of any desirable concentration for subsequent coating, but is typically between 30 to 70 wt.% water, and more typically between 50 and 65 wt.% water. The desired concentration may be achieved by further dilution of the emulsion, or by partial drying.

Examples

The present invention will be further described with reference to the following non-limiting examples and test methods. All parts, percentages, and ratios are by weight unless otherwise specified.

5

Polymerization Methods

The pressure-sensitive adhesives can be prepared by conventional free-radical polymerization and suitable living radical polymerizations methods. Suitable methods of polymerization include solution polymerization, suspension polymerization, emulsion polymerization, and bulk polymerization. The following components were used:

10

Table I: Components

Abbreviation	Name	Available from
AA	acrylic acid	BASF Corporation, Parsippany, NJ
BA	n-butyl acrylate	BASF Corporation, Parsippany, NJ
CEA	acrylic acid 2-carbazol-9-yl-ethyl ester	Sigma-Aldrich, Milwaukee, WI
CHA	acrylic acid 6-carbazol-9-yl-hexyl ester	Preparative example 1
bisAmide crosslinker	1,1'-(1,3-phenylene dicarbonyl)-bis-(2-methylaziridine)	Yingkou Tanyun Fine Chemical Industry Co. Ltd, China
VAZO™ 67	2,2'-azobis(2-methylbutanenitrile)	E.I. Du Pont De Nemours and Co., Wilmington DE

Emulsion polymerization: General procedure

All components may be added to a 500 ml beaker and mixed until the aqueous and organic phases were homogeneous in the amounts shown in Table III. The mixture may then be homogenized in a Waring Blender for 2 minutes to prepare emulsions for polymerization. The emulsions may be placed in glass bottles and deoxygenated by

15

purging with nitrogen. The bottles may be sealed and placed in a rotating water bath at to effect essentially complete polymerization. After polymerization, the latexes may be filtered through cheese cloth to remove coagulum before coating and evaluation. The polymer latexes may be coated onto a 37 micrometer (1.5 mil) polyester film to provide a
5 dry coating thickness of about 25 micrometers (~1 mil). The coated films may be equilibrated and thereafter tested under conditions of about 23°C and 50% relative humidity as described by the adhesion test methods. Equilibrated films may be utilized to measure refractive index.

10 Bulk Polymerization: General procedure

The monomer components, in the amounts shown in Table IV, may be mixed in 250 ml glass bottles to which was added IRGACURE 651 (0.2% of total monomer weight). The contents of the bottles may be thoroughly mixed and deoxygenated by purging with nitrogen. Using a knife coater, the mixtures may be coated to a thickness of
15 about 50-80 micrometers (~2-3 mils) between a primed 38 micrometer (1.5 mil) polyester film and a release liner. The resulting coatings may be polymerized using ultraviolet radiation under a fluorescent black light (about 680 millijoules/cm²) and thereafter tested under conditions of about 23°C and 50% relative humidity as described by the adhesion test methods. Equilibrated films may be utilized to measure refractive index as noted
20 above

Test Methods

The test methods used to evaluate the PSA coated flexible sheet materials of the examples are industry standard tests. The standard tests are described in various
25 publications of the American Society for Testing and Materials (ASTM), Philadelphia, PA, and the Pressure Sensitive Tape Council (PSTC).

Peel Adhesion (ASTM D3330-78 PSTC-1 (11/75))

Peel adhesion is the force required to remove a coated flexible sheet material from
30 a test panel measured at a specific angle and rate of removal. In the examples, this force is expressed in Newtons per 100 mm (N/100 mm) width of coated sheet. The procedure followed is:

1. A 12.7 mm width of the coated sheet is applied to the horizontal surface of a clean glass test plate with at least 12.7 lineal cm in firm contact. A 2 kg hard rubber roller is used to apply the strip.

2. The free end of the coated strip is doubled back nearly touching itself so the angle of removal will be 180°. The free end is attached to the adhesion tester scale.

3. The glass test plate is clamped in the jaws of a tensile testing machine which is capable of moving the plate away from the scale at a constant rate of 0.3 meters per minute.

4. The scale reading in Newtons is recorded as the tape is peeled from the glass surface. The data is reported as the average of the range of numbers observed during the test.

Measurement of Refractive Index

The refractive indices of the adhesives were measured using an Abbe Refractometer, Made by Erma Inc., of Tokyo, Japan and distributed by Fisher Scientific.

Measurement of Glass Transition (T_g)

The T_g of the heat activated adhesives was measured using a Differential Scanning Calorimetry (DSC) Q200 instrument, made by TA Instruments, New Castle, DE, USA.

Measurement of haze

Haze and Transmission of the adhesive films may be measured with a BYK Gardner Spectrophotometer according to ASTM D1003 and reported as the A2* value, which represents the haze under the light of a tungsten filament lamp (operated at a correlated temperature of about 2854K).

Preparative Example 1

Synthesis of 6-carbazol-9-yl-hexan-1-ol:

To a 500 ml three-neck round bottom flask was added 25 g. carbazole, 218 g. dimethyl formamide, 45.5 g. potassium carbonate and 43 g. 6-chloro-1-hexanol. The reaction mixture was heated at 150°C for 6 hours, and cooled to room temperature. 500 g. ethyl acetate was added, washed with 250g water, then 250 g water with 50 g concentrated

HCl, then 250 g. saturated brine. The solvent was removed on a rotary evaporator to yield 58 g of a brown semi-solid. The crude product was purified using a silica gel flash chromatography column with dichloromethane as the elutant. The concentrated product fractions yielded 33.3 g. of a white solid product; ~90% pure by gas chromatography.

5

Synthesis of acrylic acid 6-carbazol-9-yl-hexyl ester):

To a 500 ml three-neck round bottom flask was added 33 g. of 6-carbazol-9-yl-hexan-1-ol, 170 g. toluene, 2.2 g. PTSA, 10.7 g. acrylic acid and 0.07 g. hydroquinone monomethyl ether (MEHQ). The mixture was heated to reflux and the water was removed
10 by azeotropic distillation using a Dean-Stark trap. After five hours of reflux, 1 gram additional acrylic acid was added and the mixture heated for one additional hour. The reaction mixture was cooled to room temperature, washed with 100 g 5% HCl in water, then 100 g. 10% sodium carbonate in water, then 100 g. of saturated brine. The solvent was removed on a rotary evaporator.

15

The crude product was purified using a silica gel flash chromatography column with chloroform as the elutant. The concentrated product fractions yielded 24 grams of a clear liquid product with a purity of >99% by gas chromatography. The correct monomer molecular weight was confirmed by GC/MS. The refractive index of the monomer is 1.5905 and the homopolymer T_g was 45°C.

20

Preparative Example 2.

Synthesis of 8-carbazol-9-yl-octan-1-ol:

To a 250 ml round bottom flask was added 10 g carbazole, 90 g. dimethyl formamide, 18.2 g potassium carbonate and 20.6 g. 8-chlorooctanol. The reaction mixture
25 was heated to 150°C for six hours, followed by cooling to room temperature. 200 g. ethyl acetate was added and the reaction mixture was washed with 200 g water, 200 g water with 10 g conc. HCl, then three times with 150 g of saturated brine solution. The solvent was removed under reduced pressure to yield ~30 g. of yellow oil, which was purified by column chromatography to give 18 g. of 8-carbazol-9-yl-octan-1-ol.

30

Synthesis of acrylic acid 8-carbazol-9-yl-octyl ester:

To a 250 ml round bottom flask is added 17.5 g. of the above product, 80 g. toluene, 5.1 g. acrylic acid, 0.04 g. MEHQ, and 1.0 g. *para*-toluene sulfonic acid (PTSA).

The mixture was heated to reflux and the water was removed by azeotropic distillation using a Dean stark trap. After six hours, the reaction to room temperature, and wash as usual. Strip the solvent to give ~17 grams of yellow oil. Purify using column chromatography to obtain 7 g. of acrylic acid 8-carbazol-9-yl-octyl ester monomer that is
5 >96% pure by GC. The refractive index of the monomer is 1.5830 and the homopolymer T_g was 23°C.

Solution Polymerization: General procedure

All components were weighed into a glass bottle having a 120 gram capacity in the
10 amounts shown in Table I. The contents of the bottles were deoxygenated by purging with nitrogen at a flow rate of 1 liter per minute for 5 minutes. The bottles were sealed and placed in a rotating water bath at 60°C for 24 hours to effect essentially complete polymerization. An adhesive film was prepared by further adding 0.10 parts by solids of bisamide as a crosslinking agent to the polymer solution. The polymer solutions were
15 coated onto a 37 micrometer (1.5 mil) polyester film to provide a dry coating thickness of 25 micrometers (~1 mil). After heat drying in a 70°C oven for 10 minutes, the coated film was equilibrated and thereafter tested under conditions of about 23°C and 50% relative humidity as described by the adhesion test methods. Equilibrated films were utilized to measure refractive index.

20

Table 1: Solution polymerization

Example	Example formula	BA	AA	CEA	Solvent (g)	VAZO™ 67 (g)	RI	Adhesion, (N/dm)
3	BA/AA/CEA 88/2/10	7.92	0.18	0.9	Acetone	22.5	1.485	30.8
4	BA/AA/CEA 78/2/20	7.02	0.18	1.8	Acetone	22.5	1.503	65.6
Example ID	Example formula	BA	AA	CHA	Solvent (g)	VAZO™ 67 (g)	RI	Adhesion, (N/dm)
5	BA/AA/CHA 58/2/40	3.48	0.12	2.4	Ethyl Acetate	9	1.5236	93.9
6	BA/AA/CHA 38/2/60	2.3	0.12	3.6	Ethyl Acetate	9	1.5555	60.0
7	BA/AA/CHA 18/2/80	1.08	0.12	4.8	Ethyl Acetate	9	1.5911	0.3

What is claimed is:


1. An adhesive comprising a copolymer of a) monomer units having pendent carbazole groups and b) alkyl (meth)acrylate monomer units.

5

2. The adhesive of claim 1, wherein said copolymer further comprises c) acid functional monomer units.

3. The adhesive of claim 1, wherein the polymerized monomer units having pendent carbazole groups is of the formula:

10

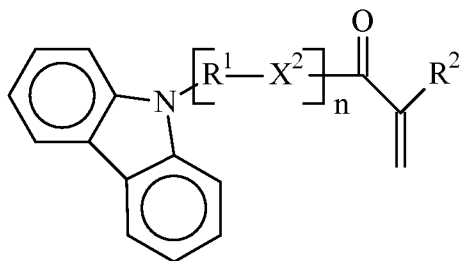

wherein

X^1 and X^2 are each independently $-O-$, $-S-$, or $-NR^3-$, where R^3 is H or C_1-C_4 alkyl;

R^1 is an alkylene of 1 to 8 carbons optionally containing one or more catenary

15 ether oxygen atoms or pendent hydroxy groups;

n is 1 to 3; and

R^2 is either H or CH_3 .

4. The adhesive of claim 1, comprising carbazole monomer units in an amount of at 5 to 95 parts by weight, per 100 parts of total monomer.

20

5. The adhesive according to claim 3, wherein X^2 is oxygen.

6. The adhesive according to claim 3, wherein R^1 is an alkylene of 6 to 8 carbons.

25

7. The adhesive according to claim 3, wherein n is 1.

8. The adhesive according to claim 1, wherein the refractive index is at least 1.50.

5 9. The adhesive according to claim 1, wherein said alkyl (meth)acrylate monomer are selected from (meth)acrylic acid ester of a non-tertiary alkyl alcohol of about 1 to about 12 carbons.

10 10. The adhesive according to claim 9, wherein the alcohol is selected from the group consisting of 1-butanol, 1-pentanol, 2-pentanol, 3-pentanol, 2-methyl-1-butanol, 1-methyl-1-butanol, 1-methyl-1-pentanol, 2-methyl-1-pentanol, 3-methyl-1-pentanol, 2-ethyl-1-butanol, 2-ethyl-1-hexanol, 3,5,5-trimethyl-1-hexanol, 3-heptanol, 2-octanol, 1-decanol, 1-dodecanol, and mixtures thereof.

15 11. The adhesive according to claim 1, further comprising at least one non acid containing polar monomer copolymerizable with the aromatic monomer(s).

20 12. The adhesive according to claim 11, wherein the polar monomer(s) are selected from the group consisting of, acrylamides, N,N-dialkyl substituted acrylamides, N-vinyl lactams, and N,N-dialkylaminoalkyl (meth)acrylates, ethylenically unsaturated nitriles, hydroxyalkyl (meth)acrylates and mixtures thereof.


25 13. The adhesive according to claim 11, wherein the polar monomer(s) are selected from the group consisting of, acrylamide, methacrylamide, acrylonitrile, methacrylonitrile, and mixtures thereof.

14. The adhesive according to claim 2 wherein said acid functional monomer is selected from ethylenically unsaturated carboxylic acids, ethylenically unsaturated sulfonic acids, and ethylenically unsaturated phosphoric acids.

30 15. The adhesive according to claim 2 wherein said ethylenically unsaturated carboxylic acids are selected from acrylic acid, methacrylic acid, and itaconic acid.

16. The adhesive according to claim 1, further comprising a crosslinker.
17. The adhesive according to claim 1, further comprising a plasticizer.
- 5 18. The adhesive of claim 17, wherein said plasticizer has a refractive index of at least 1.5.
19. The adhesive of claim 1 comprising a copolymer having
- 10 a) 5 to 95 parts by weight of said monomer units having pendent carbazole groups;
- b) 95 to 55 parts by weight of said alkyl (meth)acrylate monomer units;
- c) 0 to 15 parts by weight of acid functional monomer units;
- d) 0 to 15 parts by weight of polar monomers; and
- 15 e) 0 to 5 parts by weight of other monomers,
- wherein the sum of the monomers is 100 parts by weight; and optionally a plasticizer.
20. The adhesive of claim 19 comprising a copolymer having
- 20 a) 10 to 90 parts by weight of monomer units having pendent carbazole groups;
- b) 90 to 10 parts by weight of alkyl (meth)acrylate monomer units;
- c) 1 to 15 parts by weight of acid functional monomer units;
- d) 0 to 15 parts by weight of polar monomers; and
- 25 e) 0 to 5 parts by weight of other monomers,
- wherein the sum of the monomers is 100 parts by weight; and optionally a plasticizer.
21. The adhesive of claim 1, wherein the adhesive is a heat-activated adhesive.
- 30 22. The adhesive of claim 1 having an optical transmission value of at least 85%.

23. A compound of the formula:

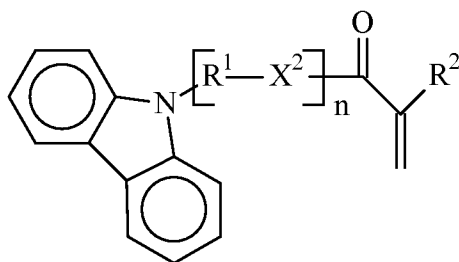

wherein

5

X^2 is $-O-$, $-S-$, or $-NR^3-$, where R^3 is H or C_1-C_4 alkyl;

R^1 is an alkylene of 6 to 8 carbons optionally containing one or more catenary ether oxygen atoms or pendent hydroxy groups;

n is 1; and

R^2 is either H or CH_3 .

10

24. An adhesive comprising a homo- or copolymer of the compound of claim

23.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/078740

A. CLASSIFICATION OF SUBJECT MATTER
INV. C09J133/14 C08F220/34 C08L33/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C09J C08F C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 959 775 A (ROHM & HAAS) 3 June 1964 (1964-06-03) page 3, line 6; examples 1-7 page 6, lines 33-40 page 2, lines 14-33 page 5, lines 13-15	1, 2, 4, 9-16, 19-21
X	----- DATABASE WPI Week 199207 Thomson Scientific, London, GB; AN 1992-053960 XP002512696 -& JP 04 001207 A (CANON KK) 6 January 1992 (1992-01-06) abstract ----- -/--	1

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

30 January 2009

Date of mailing of the international search report

06/02/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Dalet, Pierre

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2008/078740

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 116 911 A (LEYRER REINHOLD J [DE] ET AL) 26 May 1992 (1992-05-26) abstract column 5, lines 1-20 -----	23
X	US 5 100 971 A (LEYRER REINHOLD J [DE] ET AL) 31 March 1992 (1992-03-31) column 5 the whole document -----	23
X	US 5 198 514 A (LE BARNY PIERRE [US] ET AL) 30 March 1993 (1993-03-30) claim 1 the whole document -----	23
X	US 2003/162921 A1 (YASUDA HAJIME [JP] ET AL) 28 August 2003 (2003-08-28) claim 1 the whole document -----	23
X	BRAR A S ET AL: "Analytical evaluation of stereoregularity in poly(2-N-carbazolyethyl methacrylate) by two-dimensional NMR spectroscopy" REACTIVE & FUNCTIONAL POLYMERS, ELSEVIER SCIENCE PUBLISHERS BV, NL, vol. 66, no. 5, 1 May 2006 (2006-05-01), pages 537-550, XP025164811 ISSN: 1381-5148 [retrieved on 2006-05-01] the whole document -----	23
X	KATAYAMA H ET AL: "Triplet excimer formation in Langmuir-Blodgett polymer films of poly[2-(9-carbazoly)ethyl methacrylate-co-isobutyl methacrylate]" THIN SOLID FILMS, ELSEVIER-SEQUOIA S.A. LAUSANNE, CH, vol. 224, no. 2, 15 March 1993 (1993-03-15), pages 253-256, XP024574619 ISSN: 0040-6090 [retrieved on 1993-03-15] the whole document -----	23

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2008/078740

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
GB 959775	A	03-06-1964	NONE	
JP 4001207	A	06-01-1992	NONE	
US 5116911	A	26-05-1992	DE 3906245 A1 EP 0385377 A1 JP 2248408 A	06-09-1990 05-09-1990 04-10-1990
US 5100971	A	31-03-1992	DE 3906246 A1 EP 0386571 A2 JP 2265904 A	06-09-1990 12-09-1990 30-10-1990
US 5198514	A	30-03-1993	EP 0469941 A1 FR 2665452 A1	05-02-1992 07-02-1992
US 2003162921	A1	28-08-2003	NONE	