

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2004220102 B2**

(54) Title
Diluents for forming clear, wettable silicone hydrogel articles

(51) International Patent Classification(s)
C08L 83/06 (2006.01) **G02C 7/04** (2006.01)
G02B 1/04 (2006.01) **C08K 5/05** (2006.01)

(21) Application No: **2004220102** (22) Date of Filing: **2004.03.05**

(87) WIPO No: **WO04/081105**

(30) Priority Data

(31) Number	(32) Date	(33) Country
60/452,898	2003.03.07	US

(43) Publication Date: **2004.09.23**

(44) Accepted Journal Date: **2008.12.11**

(71) Applicant(s)
J & J Vision Care, Inc

(72) Inventor(s)
Petisce, James R.;McCabe, Kevin P.;Vanderlaan, Doug;Rathore, Osman;Azaam, Alli

(74) Agent / Attorney
Callinans, 1193 Toorak Road, Camberwell, VIC, 3124

(56) Related Art
US 6367929

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number
WO 2004/081105 A3

- (51) International Patent Classification⁷: **C08L 83/06**,
G02C 7/04
- (21) International Application Number:
PCT/US2004/007130
- (22) International Filing Date: 5 March 2004 (05.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/452,898 7 March 2003 (07.03.2003) US
- (71) Applicant (for all designated States except US): **J & J VISION CARE, INC.** [US/US]; c/o Johnson & Johnson, P.O. Box 1222, New Brunswick, NJ 08903 (US).
- (72) Inventors: **VANDERLAAN, Doug**; 1453 N. Market Street, Jacksonville, FL 32206 (US). **PETISCE, James, R.**; 3789 Torrey View Court, San Diego, CA 02130 (US). **AZAAM, Ali**; 7816 Southside Boulevard #221, Jacksonville, FL 32256 (US). **MCCABE, Kevin, P.**; 1053 Waterfall Drive, Jacksonville, FL 32225 (US). **RATHORE, Osman**; 7990 Baymeadows Rd. E, Unit 1804, Jacksonville, FL 32256 (US).
- (74) Agent: **FEEHERRY, Maryellen**; Reed Smith LLP, 1650 Market Street, Philadelphia, PA 19103 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SI, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- (88) Date of publication of the international search report:
29 December 2004
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DILUENTS FOR FORMING CLEAR, WETTABLE SILICONE HYDROGEL ARTICLES

(57) Abstract: The present invention is a composition, which may be used to form a clear article, such as a contact lens, comprising a silicone containing component, a hydrophilic component, a high molecular weight hydrophilic polymer and a diluent having an alpha value of between about 0.05 to about 1 and a Hansen solubility parameter of less than about 10.



WO 2004/081105 A3

2004220102 24 Nov 2008

- 1 -

DILUENTS FOR FORMING CLEAR, WETTABLE SILICONE HYDROGEL ARTICLES

Field of the Invention

5 The present invention relates to compatible compositions for forming molded articles and particularly medical devices such as contact lenses. More particularly, the present invention relates to a novel class of diluents, which allows the formation of compatible solutions comprising hydrophilic component(s), silicone containing component(s) and internal wetting agent(s).

10 Background of the Invention

Silicone hydrogels have been prepared by polymerizing mixtures containing at least one silicone-containing monomer and at least one hydrophilic monomer. Either the silicone-containing monomer or the hydrophilic monomer may function as a crosslinking agent or a separate crosslinking agent may be employed. Various
15 alcohols, including n- hexanol, ethanol, and n-nonanol have been used as diluents to compatibilize the silicone monomers and the hydrophilic monomers. However, the articles made from these components and diluents either did not form clear articles or were not sufficiently wettable to be used without a coating.

Primary and secondary alcohols having more than four carbon atoms have
20 also been disclosed to be useful as diluents for silicone containing hydrogels. However, many of these diluents do not form clear, wettable articles when internal wetting agents are included in the reaction mixture. While these diluents are useful, many require an additional compatibilizing component to produce clear, wettable molded articles.

25 It would be advantageous to provide silicone hydrogels which are polymerized in an economic and efficient way.

Summary of the Invention

The present invention relates to compositions comprising at least one silicone containing component, at least one hydrophilic component, a high molecular
30 weight hydrophilic polymer and at least one diluent having an alpha value of between about 0.05

24/11/08, ck15218nov24speci,1

and about 1 and a Hansen solubility parameter, δ_p of less than about 10, wherein said composition forms a clear solution at a selected reaction temperature.

The present invention further relates to a composition comprising at least one silicone containing component, at least one hydroxyl containing component, an high molecular weight hydrophilic polymer and a diluent having an alpha value of between about 0.05 and about 1 and a Hansen solubility parameter, δ_p of less than about 10, optionally, a silicone containing compatibilizing component in an amount insufficient to compatibilize the blend in the absence of said diluent, wherein said composition forms a clear solution at a selected reaction temperature.

The present invention further relates to a composition comprising at least one silicone containing component, at least one hydrophilic component, a high molecular weight hydrophilic polymer and a diluent which is capable at about ambient temperature and at a concentration of 2 gm, of forming a compatible mixture comprising about 1.6 gm of said hydrophilic component, about 0.3 gm of said high molecular weight hydrophilic polymer at least about 1 gm silicone containing monomer.

Still further the present invention relates to methods for manufacturing devices, specifically ophthalmic devices and more specifically contact lenses and the articles so made.

Description of the Figures

Figure 1 is a graph depicting the Hansen solubility parameter, δ_p v. the alpha value for various diluents.

Description of the Invention

The present invention relates to compositions comprising at least one hydrophilic component, at least one silicone component, at least one high molecular weight hydrophilic polymer and at least one diluent, which is capable of compatibilizing the components without a compatibilizing agent.

As used herein, a "biomedical device" is any article that is designed to be used while either in or on mammalian tissues or fluid, and preferably in or on human tissue or fluids. Examples of these devices include but are not limited to catheters, implants, stents, and ophthalmic devices such as intraocular lenses and contact lenses. The

preferred biomedical devices are ophthalmic devices, particularly contact lenses, most particularly contact lenses made from silicone hydrogels.

As used herein, the terms "lens" and "ophthalmic device" refer to devices that reside in or on the eye. These devices can provide optical correction, wound care, drug
5 delivery, diagnostic functionality, cosmetic enhancement or effect or a combination of these properties. The term lens includes but is not limited to soft contact lenses, hard contact lenses, intraocular lenses, overlay lenses, ocular inserts, and optical inserts.

As used herein, the phrase "without a surface treatment" means that the exterior surfaces of the devices of the present invention are not separately treated to improve the
10 wettability of the device. Treatments which may be foregone because of the present invention include, plasma treatments, grafting, coating and the like. However, coatings which provide properties other than improved wettability, such as, but not limited to antimicrobial coatings and the application of color or other cosmetic enhancement may be applied to devices of the present invention.

As used herein the term "silicone containing compatibilizing component" means
15 reaction components which contain at least one silicone and at least one hydroxyl group. Such components have been disclosed in US. Serial Nos. 10/236,538 and 10/236,762

Suitable diluents include those, which possess both a hydrophilic and a hydrophobic nature. It has been found that the hydrophilic nature may be characterized
20 by hydrogen donating ability, using Kamlet alpha values. The hydrophobic nature of the diluent may be characterized by the Hansen solubility parameter δ_p . Suitable diluents for the present invention are good hydrogen bond donors and polar. As used herein a "good" hydrogen bond donor, will donate hydrogen at least as readily as 3-methyl-3-pentanol. For certain diluents it is possible to measure the hydrogen bond donating ability by
25 measuring the Kamlet alpha value (or as used herein "alpha value"). Suitable alpha values include those between about 0.05 and about 1 and preferably between about 0.1 and about 0.9.

The diluents useful in the present invention should also be relatively non-polar. The selected diluent should have a polarity sufficiently low to solubilize the non-polar
30 components in the reactive mixture at reaction conditions. One way to characterize the polarity of the diluents of the present invention is via the Hansen solubility parameter, δ_p . In certain embodiments the δ_p is less than about 10, and preferably less than about 6.

It will be appreciated that the properties of the selected hydrophilic and hydrophobic components may effect the properties of the diluents which will provide the desired compatibilization. For example, if the reaction mixture contains only moderately polar components, diluents having moderate δ_p may be used. If however, the reaction mixture contains strongly polar components, the diluent may need to have a high δ_p .

Specific diluents which may be used include 1-ethoxy-2-propanol, diisopropylaminoethanol, isopropanol, 3,7-dimethyl-3-octanol, 1-decanol, 1-dodecanol, 1-octanol, 1-pentanol, 2-pentanol, 1-hexanol, 2-hexanol, 2-octanol, 3-methyl-3-pentanol, *tert*-amyl alcohol, *tert*-butanol, 2-butanol, 1-butanol, 2-methyl-2-pentanol, 2-propanol, 1-propanol, ethanol, 2-ethyl-1-butanol, SIGMA acetate, 1-*tert*-butoxy-2-propanol, 3,3-dimethyl-2-butanol, *tert*-butoxyethanol, 2-octyl-1-dodecanol, decanoic acid, octanoic acid, dodecanoic acid, 2-(diisopropylamino)ethanol mixtures thereof and the like.

Classes of suitable diluents include alcohols having 2 to 20 carbons, amides having 10 to 20 carbon atoms derived from primary amines and carboxylic acids having 8 to 20 carbon atoms. In some embodiments primary and tertiary alcohols are preferred. Preferred classes include alcohols having 5 to 20 carbons and carboxylic acids having 10 to 20 carbon atoms.

Preferred diluents include 3,7-dimethyl-3-octanol, 1-dodecanol, 1-decanol, 1-octanol, 1-pentanol, 1-hexanol, 2-hexanol, 2-octanol, 3-methyl-3-pentanol, 2-pentanol, *t*-amyl alcohol, *tert*-butanol, 2-butanol, 1-butanol, 2-methyl-2-pentanol, 2-ethyl-1-butanol, ethanol, 3,3-dimethyl-2-butanol, 2-octyl-1-dodecanol, decanoic acid, octanoic acid, dodecanoic acid, mixtures thereof and the like.

More preferred diluents include 3,7-dimethyl-3-octanol, 1-dodecanol, 1-decanol, 1-octanol, 1-pentanol, 1-hexanol, 2-hexanol, 2-octanol, 1-dodecanol, 3-methyl-3-pentanol, 1-pentanol, 2-pentanol, *t*-amyl alcohol, *tert*-butanol, 2-butanol, 1-butanol, 2-methyl-2-pentanol, 2-ethyl-1-butanol, 3,3-dimethyl-2-butanol, 2-octyl-1-dodecanol, mixtures thereof and the like.

Mixtures of diluents may be used. In some embodiments it may be advantageous to use diluents with different properties. Moreover, it should be appreciated that when mixtures are used, the mixtures may include a diluent with properties within those specified herein and diluent(s) which do not possess the defined properties, or may

contain diluents which each contain only one of the specified properties, so long as the alpha value and the δp of the diluent mixture is within the values specified herein.

The diluents may be used in amounts up to about 50% by weight of the total of all components in the reactive mixture. More preferably the diluent is used in amounts less
5 than about 45% and more preferably in amounts between about 15 and about 40% by weight of the total of all components in the reactive mixture.

The one or more silicone-containing components and one or more hydrophilic components used to make the polymer of this invention can be any of the known components used in the prior art to make silicone hydrogels. These terms silicone-
10 containing component and hydrophilic component are not mutually exclusive, in that, the silicone-containing component can be somewhat hydrophilic and the hydrophilic component can comprise some silicone, because the silicone-containing component can have hydrophilic groups and the hydrophilic components can have silicone groups.

Further, silicone-containing component(s) and hydrophilic component(s) can be
15 reacted prior to polymerization to form a prepolymer which is later polymerized in the presence of the diluent to form the polymer of this invention. When prepolymers or macromers are used, it is preferred to polymerize at least one silicone-containing monomer and at least one hydrophilic monomer in the presence of the diluent, wherein the silicone-containing monomers and the hydrophilic monomers differ. The term
20 "monomer" used herein refers to low molecular weight compounds (i.e. typically having number average molecular weights less than 700) that can be polymerized. Thus, it is understood that the terms "silicone-containing monomers" and "hydrophilic monomers" include monomers, macromonomers and prepolymers.

A silicone-containing component is one that contains at least one $[-Si-O-Si-]$
25 group, in a monomer, macromer or prepolymer. Preferably, the Si and attached O are present in the silicone-containing component in an amount greater than 20 weight percent, and more preferably greater than 30 weight percent of the total molecular weight of the silicone-containing component. Useful silicone-containing components preferably comprise polymerizable functional groups such as acrylate, methacrylate, acrylamide,
30 methacrylamide, N-vinyl lactam, N-vinylamide, and styryl functional groups. Examples of silicone-containing components which are useful in this invention may be found in U.S. Pat. Nos. 3,808,178; 4,120,570; 4,136,250; 4,153,641; 4,740,533; 5,034,461 and

5,070,215, and EP080539. All of the patents cited herein are hereby incorporated in their entireties by reference. These references disclose many examples of olefinic silicone-containing components.

Calculations

5 The following describes a calculation which may be useful in determining whether silicone hydrogel contact lenses with PVP will be hazy.

 The moles of a component are calculated, as is known by one of ordinary skill in the art. Then the weight of silicon in a component is calculated by multiplying the grams of a component present in the composition by the weight fraction of the molecular weight that is comprised of silicon. For example, the molecular weight of SiMAA is 422.8g.
10 Since SiMAA contains three Si atoms, the weight fraction of Si is $3 \times 28.09 / 422.8 = 0.199$, where 28.09g is the molecular weight of silicon. Therefore, the grams of silicon in X grams of SiMAA are $0.199 \times X$. Then, the moles of silicon are calculated.

 The grams of hydrogen bond donor groups ("HBD") in a component are
15 calculated by multiplying the grams of a component in the formulation by the weight fraction HBD groups. For example, the molecular weight of HEMA is 130.14g. Since HEMA contains one hydroxyl group, the weight fraction of HBD groups is $17 / 130.14 = 0.131$. (Using 17g for hydroxyl) Therefore, the grams of HBD groups in X grams of HEMA are $0.131 \times X$.

20 The moles of HBD groups ('moles HBD') are calculated by dividing the grams of HBD groups present in a component by the molecular weight of the HBD group (17g for hydroxyl (-OH), 15g for amide (-NH)).

 The grams of HBA (hydrogen bond acceptor) groups in a component ('grams HBA') are calculated by multiplying the grams of a component in the formulation by the
25 weight fraction HBA groups. For example, the molecular weight of DMA is 99.13g. Since DMA contains one HBA (amide carbonyl) group, the weight fraction of HBA groups is $28 / 99.13 = 0.282$, where 28g is the molecular weight of the amide carbonyl. The grams of HBA groups in X grams of DMA are $0.282 \times X$. For PVP, the moles of HBA groups are calculated based on the molecular weight of the monomer repeating unit
30 (111.14g).

HTS ratio (HTS refers to hydrogen bond donor to silicon) is calculated by taking the sum of moles of HBD groups and dividing by the sum of the moles of silicon in the formulation, excluding diluent.

The moles HBD preferred are calculated by adding twice the number of moles of PVP present (including diluent) to the number of moles of HBA (hydrogen bond acceptor) groups from other sources. For the purposes of this specification, HBA groups are defined as carbonyls that are part of amide, carbamate, lactam, or urea functional groups.

The 'moles HBD to moles HBA (HMWHP) ratio' is calculated by dividing the number of moles of HBD groups present in the formulation (excluding diluent) by the number of moles of HBA groups present in the high molecular weight hydrophilic polymer (referred to as "HMWHP") (e.g. PVP).


The 'Ratio of moles HBD present to moles HBD preferred' is calculated by dividing the total number of moles of HBD groups in the formulation (including diluent) by the calculated number of moles of HBD groups needed.

In lenses formed from compositions containing PVP, the following are the preferred ratios. The preferred range of 'moles HBD to moles HBA (HMWHP) ratio' is \geq about 0.8, more preferred is \geq about 0.8 to \leq about 5, more preferred is \geq about 1.3 to \leq about 5, and most preferred is \geq about 1.7 to \leq about 5. The preferred range for 'Ratio of moles HBD present to moles HBD preferred' is \geq about 0.6, more preferred is \geq about 0.6 to $<$ about 4.5, more preferred is \geq about 0.8 to $<$ about 4.5, and most preferred is \geq about 1.0 to \leq about 3.0. The preferred range for 'HTS ratio' is $>$ about 0.14, more preferred is $>$ about 0.17 to \leq about 0.35, and most preferred is $>$ about 0.18 to \leq about 0.35. One of ordinary skill in the art would understand that these calculations are useful for other contact lenses of the present invention but may have different preferred ranges depending on the HMWHP used.

Examples

Further examples of suitable silicone-containing monomers are polysiloxanylalkyl(meth)acrylic monomers represented by the following formula:

Formula I

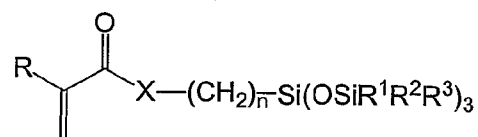

wherein: R denotes H or lower alkyl; X denotes O or NR⁴; each R⁴ independently denotes hydrogen or methyl,


- 5 each R¹-R³ independently denotes a lower alkyl radical or a phenyl radical, and n is 1 or 3 to 10.

Examples of these polysiloxanylalkyl (meth)acrylic monomers include methacryloxypropyl tris(trimethylsiloxy) silane, pentamethyldisiloxanyl methylmethacrylate, and methyldi(trimethylsiloxy)methacryloxymethyl silane.

- 10 Methacryloxypropyl tris(trimethylsiloxy)silane is the most preferred.

One preferred class of silicone-containing components is a poly(organosiloxane) prepolymer represented by formula II:

Formula II

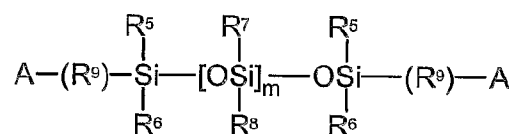

- 15 wherein each A independently denotes an activated unsaturated group, such as an ester or amide of an acrylic or a methacrylic acid or an alkyl or aryl group (providing that at least one A comprises an activated unsaturated group capable of undergoing radical polymerization); each of R⁵, R⁶, R⁷ and R⁸ are independently selected from the group consisting of a monovalent hydrocarbon radical or a halogen substituted monovalent hydrocarbon radical having 1 to 18 carbon atoms which may have ether linkages between
20 carbon atoms;


R⁹ denotes a divalent hydrocarbon radical having from 1 to 22 carbon atoms, and

m is 0 or an integer greater than or equal to 1, and preferable 5 to 400, and more preferably 10 to 300. One specific example is α , ω -bismethacryloxypropyl poly-

- 25 dimethylsiloxane. Another preferred example is mPDMS (monomethacryloxypropyl terminated mono-n-butyl terminated polydimethylsiloxane).





Another useful class of silicone containing components includes silicone-containing vinyl carbonate or vinyl carbamate monomers of the following formula:

Formula III

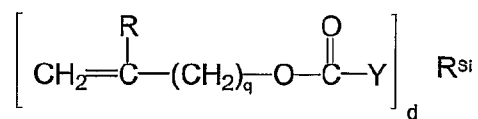


- 5 wherein: Y denotes O, S, or NH; R^{Si} denotes a silicone-containing organic radical; R denotes hydrogen or methyl; d is 1, 2, 3 or 4; and q is 0 or 1. Suitable silicone-containing organic radicals R^{Si} include the following:

10

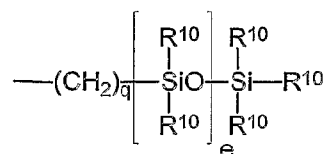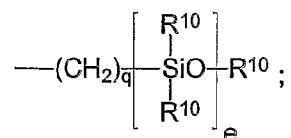

wherein:


R^{10} denotes



- 15 Wherein p is 1 to 6; R^{10} denotes an alkyl radical or a fluoroalkyl radical having 1 to 6 carbon atoms; e is 1 to 200; q is 1, 2, 3 or 4; and s is 0, 1, 2, 3, 4 or 5.


The silicone-containing vinyl carbonate or vinyl carbamate monomers specifically include: 1,3-bis[4-(vinylloxycarbonyloxy)but-1-yl]tetramethyl-isiloxane 3-(vinylloxycarbonylthio) propyl-[tris (trimethylsiloxysilane); 3-[tris(trimethylsiloxy)silyl]

propyl allyl carbamate; 3-[tris(trimethylsiloxy)wilyl] propyl vinyl carbamate;
trimethylsilylethyl vinyl carbonate; trimethylsilylmethyl vinyl carbonate, and

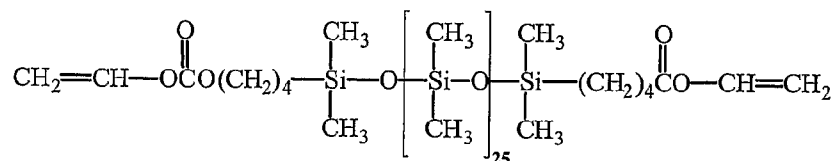

Another class of silicone-containing components includes compounds of the
5 following formulae:

Formulae IV-VI

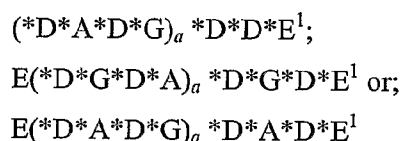

10 wherein:

D denotes an alkyl diradical, an alkyl cycloalkyl diradical, a cycloalkyl diradical,
an aryl diradical or an alkylaryl diradical having 6 to 30 carbon atoms,

G denotes an alkyl diradical, a cycloalkyl diradical, an alkyl cycloalkyl diradical,
an aryl diradical or an alkylaryl diradical having 1 to 40 carbon atoms and which may


15 contain ether, thio or amine linkages in the main chain;

* denotes a urethane or ureido linkage;

a is at least 1;

A denotes a divalent polymeric radical of formula:


Formula VII

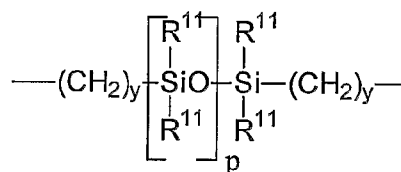

20

R^{11} independently denotes an alkyl or fluoro-substituted alkyl group having 1 to 10
carbon atoms which may contain ether linkages between carbon atoms; y is at least 1;
and p provides a moiety weight of 400 to 10,000; each of E and E^1 independently denotes
a polymerizable unsaturated organic radical represented by formula:


Formula VIII



- wherein: R^{12} is hydrogen or methyl; R^{13} is hydrogen, an alkyl radical having 1 to 6 carbon atoms, or a $-\text{CO}-\text{Y}-\text{R}^{15}$ radical wherein Y is $-\text{O}-$, $\text{Y}-\text{S}-$ or $-\text{NH}-$; R^{14} is a divalent radical having 1 to 12 carbon atoms; X denotes $-\text{CO}-$ or $-\text{OCO}-$; Z denotes $-\text{O}-$ or $-\text{NH}-$; Ar denotes an aromatic radical having 6 to 30 carbon atoms; w is 0 to 6; x is 0 or 1; y is 0 or 1; and z is 0 or 1.


- A preferred silicone-containing component is represented by the following formula:

Formula IX



- wherein R^{16} is a diradical of a diisocyanate after removal of the isocyanate group, such as the diradical of isophorone diisocyanate. Another preferred silicone containing macromer is compound of formula X (in which $x + y$ is a number in the range of 10 to 30) formed by the reaction of fluoroether, hydroxy-terminated polydimethylsiloxane, isophorone diisocyanate and isocyanatoethylmethacrylate.

Formula X

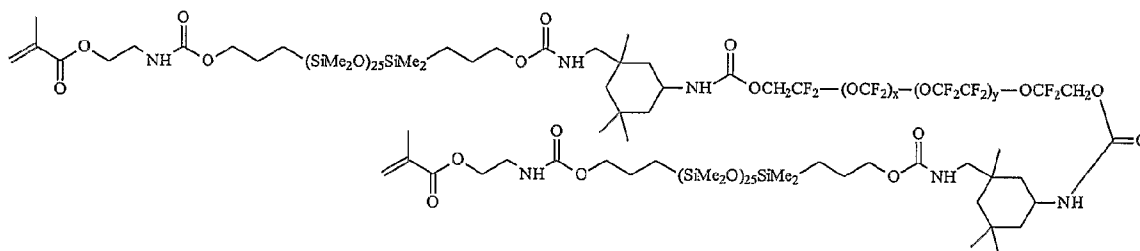

- Other silicone-containing components suitable for use in this invention include those described in WO 96/31792 such as macromers containing polysiloxane, polyalkylene ether, diisocyanate, polyfluorinated hydrocarbon, polyfluorinated ether and

polysaccharide groups. U.S. Pat. Nos. 5,321,108; 5,387,662 and 5,539,016 describe polysiloxanes with a polar fluorinated graft or side group having a hydrogen atom attached to a terminal difluoro-substituted carbon atom. Such polysiloxanes can also be used as the silicone monomer in this invention.

5 Hydrophilic components include those which are capable of providing at least about 20% and preferably at least about 25% water content to the resulting lens when combined with the remaining reactive components. Suitable hydrophilic components may be present in amounts between about 10 to about 60 weight% based upon the weight of all reactive components. About 15 to about 50 weight % and more preferably between
10 about 20 to about 40 weight %. The hydrophilic monomers that may be used to make the polymers of this invention have at least one polymerizable double bond and at least one hydrophilic functional group. Examples of polymerizable double bonds include acrylic, methacrylic, acrylamido, methacrylamido, fumaric, maleic, styryl, isopropenylphenyl, O-vinylcarbonate, O-vinylcarbamate, allylic, O-vinylacetyl and N-vinyl lactam and N-
15 vinylamido double bonds. Such hydrophilic monomers may themselves be used as crosslinking agents. "Acrylic-type" or "acrylic-containing" monomers are those monomers containing the acrylic group $(CR'H=CRCOX)$ wherein R is H or CH_3 , R' is H, alkyl or carbonyl, and X is O or N, which are also known to polymerize readily, such as N,N-dimethylacrylamide (DMA), 2-hydroxyethyl acrylate
20 , glycerol methacrylate, 2-hydroxyethyl methacrylamide, polyethyleneglycol monomethacrylate, methacrylic acid, acrylic acid and mixtures thereof.

Hydrophilic vinyl-containing monomers which may be incorporated into the hydrogels of the present invention include monomers such as N-vinyl lactams (e.g. N-vinyl pyrrolidone (NVP)), N-vinyl-N-methyl acetamide, N-vinyl-N-ethyl acetamide, N-
25 vinyl-N-ethyl formamide, N-vinyl formamide, N-2-hydroxyethyl vinyl carbamate, N-carboxy- β -alanine N-vinyl ester, with NVP being preferred.

Other hydrophilic monomers that can be employed in the invention include polyoxyethylene polyols having one or more of the terminal hydroxyl groups replaced with a functional group containing a polymerizable double bond. Examples include
30 polyethylene glycol with one or more of the terminal hydroxyl groups replaced with a functional group containing a polymerizable double bond. Examples include polyethylene glycol reacted with one or more molar equivalents of an end-capping group

such as isocyanatoethyl methacrylate ("IEM"), methacrylic anhydride, methacryloyl chloride, vinylbenzoyl chloride, or the like, to produce a polyethylene polyol having one or more terminal polymerizable olefinic groups bonded to the polyethylene polyol through linking moieties such as carbamate or ester groups.

5 Still further examples are the hydrophilic vinyl carbonate or vinyl carbamate monomers disclosed in U.S. Pat. No. 5,070,215, and the hydrophilic oxazolone monomers disclosed in U.S. Pat. No. 4,190,277. Other suitable hydrophilic monomers will be apparent to one skilled in the art.

More preferred hydrophilic monomers which may be incorporated into the
10 polymer of the present invention include hydrophilic monomers such as N,N-dimethyl acrylamide (DMA), 2-hydroxyethyl acrylate, glycerol methacrylate, 2-hydroxyethyl methacrylamide, N-vinylpyrrolidone (NVP), and polyethyleneglycol monomethacrylate.

Most preferred hydrophilic monomers include DMA, NVP and mixtures thereof.

As used herein, "high molecular weight hydrophilic polymer" refers to substances
15 having a weight average molecular weight of no less than about 100,000 Daltons, wherein said substances upon incorporation to silicone hydrogel formulations, increase the wettability of the cured silicone hydrogels. The preferred weight average molecular weight of these high molecular weight hydrophilic polymers is greater than about 150,000; more preferably between about 150,000 to about 2,000,000 Daltons, more
20 preferably still between about 300,000 to about 1,800,000 Daltons, most preferably about 500,000 to about 1,500,000 Daltons.

Alternatively, the molecular weight of hydrophilic polymers of the invention can be also expressed by the K-value, based on kinematic viscosity measurements, as described in Encyclopedia of Polymer Science and Engineering, N-Vinyl Amide
25 Polymers, Second edition, Vol 17, pgs. 198-257, John Wiley & Sons Inc. When expressed in this manner, hydrophilic monomers having K-values of greater than about 46 and preferably between about 46 and about 150. The high molecular weight hydrophilic polymers are present in the formulations of these devices in an amount sufficient to provide contact lenses, which without surface modification provide at least a
30 10% improvement in wettability and preferably provide wettable lenses. For a contact lens "wettable" is a lens which displays an advancing dynamic contact angle of less than about 80°, preferably less than 70° and more preferably less than about 60°

Suitable amounts of high molecular weight hydrophilic polymer include from about 1 to about 15 weight percent, more preferably about 3 to about 15 percent, most preferably about 3 to about 12 percent, all based upon the total of all reactive components.

5 Examples of high molecular weight hydrophilic polymers include but are not limited to polyamides, polylactones, polyimides, polylactams and functionalized polyamides, polylactones, polyimides, polylactams, such as DMA functionalized by copolymerizing DMA with a lesser molar amount of a hydroxyl-functional monomer such as HEMA, and then reacting the hydroxyl groups of the resulting copolymer with
10 materials containing radical polymerizable groups, such as isocyanatoethylmethacrylate or methacryloyl chloride. Hydrophilic prepolymers made from DMA or n-vinyl pyrrolidone with glycidyl methacrylate may also be used. The glycidyl methacrylate ring can be opened to give a diol which may be used in conjunction with other hydrophilic prepolymer in a mixed system to increase the compatibility of the high molecular weight
15 hydrophilic polymer, hydroxyl-functionalized silicone containing monomer and any other groups which impart compatibility. The preferred high molecular weight hydrophilic polymers are those that contain a cyclic moiety in their backbone, more preferably, a cyclic amide or cyclic imide. High molecular weight hydrophilic polymers include but are not limited to poly-N-vinyl pyrrolidone, poly-N-vinyl-2- piperidone,
20 poly-N-vinyl-2-caprolactam, poly-N-vinyl-3-methyl-2- caprolactam, poly-N-vinyl-3-methyl-2-piperidone, poly-N-vinyl-4-methyl-2- piperidone, poly-N-vinyl-4-methyl-2-caprolactam, poly-N-vinyl-3-ethyl-2- pyrrolidone, and poly-N-vinyl-4,5-dimethyl-2-pyrrolidone, polyvinylimidazole, poly-N-N-dimethylacrylamide, polyvinyl alcohol, polyacrylic acid, polyethylene oxide, poly 2 ethyl oxazoline, heparin polysaccharides,
25 polysaccharides, mixtures and copolymers (including block or random, branched, multichain, comb-shaped or star shaped) thereof where poly-N-vinylpyrrolidone (PVP) is particularly preferred. Copolymers might also be used such as graft copolymers of PVP.

 The high molecular weight hydrophilic polymers provide improved wettability, and particularly improved in vivo wettability to the medical devices of the present
30 invention. Without being bound by any theory, it is believed that the high molecular weight hydrophilic polymers are hydrogen bond receivers which in aqueous environments, hydrogen bond to water, thus becoming effectively more hydrophilic. The

absence of water facilitates the incorporation of the hydrophilic polymer in the reaction mixture. Aside from the specifically named high molecular weight hydrophilic polymers, it is expected that any high molecular weight polymer will be useful in this invention provided that when said polymer is added to a silicone hydrogel formulation, the hydrophilic polymer (a) does not substantially phase separate from the reaction mixture and (b) imparts wettability to the resulting cured polymer. In some embodiments it is preferred that the high molecular weight hydrophilic polymer be soluble in the diluent at processing temperatures. Manufacturing processes which use water or water soluble diluents may be preferred due to their simplicity and reduced cost. In these 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895 900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985 990 995 1000 1005 1010 1015 1020 1025 1030 1035 1040 1045 1050 1055 1060 1065 1070 1075 1080 1085 1090 1095 1100 1105 1110 1115 1120 1125 1130 1135 1140 1145 1150 1155 1160 1165 1170 1175 1180 1185 1190 1195 1200 1205 1210 1215 1220 1225 1230 1235 1240 1245 1250 1255 1260 1265 1270 1275 1280 1285 1290 1295 1300 1305 1310 1315 1320 1325 1330 1335 1340 1345 1350 1355 1360 1365 1370 1375 1380 1385 1390 1395 1400 1405 1410 1415 1420 1425 1430 1435 1440 1445 1450 1455 1460 1465 1470 1475 1480 1485 1490 1495 1500 1505 1510 1515 1520 1525 1530 1535 1540 1545 1550 1555 1560 1565 1570 1575 1580 1585 1590 1595 1600 1605 1610 1615 1620 1625 1630 1635 1640 1645 1650 1655 1660 1665 1670 1675 1680 1685 1690 1695 1700 1705 1710 1715 1720 1725 1730 1735 1740 1745 1750 1755 1760 1765 1770 1775 1780 1785 1790 1795 1800 1805 1810 1815 1820 1825 1830 1835 1840 1845 1850 1855 1860 1865 1870 1875 1880 1885 1890 1895 1900 1905 1910 1915 1920 1925 1930 1935 1940 1945 1950 1955 1960 1965 1970 1975 1980 1985 1990 1995 2000 2005 2010 2015 2020 2025 2030 2035 2040 2045 2050 2055 2060 2065 2070 2075 2080 2085 2090 2095 2100 2105 2110 2115 2120 2125 2130 2135 2140 2145 2150 2155 2160 2165 2170 2175 2180 2185 2190 2195 2200 2205 2210 2215 2220 2225 2230 2235 2240 2245 2250 2255 2260 2265 2270 2275 2280 2285 2290 2295 2300 2305 2310 2315 2320 2325 2330 2335 2340 2345 2350 2355 2360 2365 2370 2375 2380 2385 2390 2395 2400 2405 2410 2415 2420 2425 2430 2435 2440 2445 2450 2455 2460 2465 2470 2475 2480 2485 2490 2495 2500 2505 2510 2515 2520 2525 2530 2535 2540 2545 2550 2555 2560 2565 2570 2575 2580 2585 2590 2595 2600 2605 2610 2615 2620 2625 2630 2635 2640 2645 2650 2655 2660 2665 2670 2675 2680 2685 2690 2695 2700 2705 2710 2715 2720 2725 2730 2735 2740 2745 2750 2755 2760 2765 2770 2775 2780 2785 2790 2795 2800 2805 2810 2815 2820 2825 2830 2835 2840 2845 2850 2855 2860 2865 2870 2875 2880 2885 2890 2895 2900 2905 2910 2915 2920 2925 2930 2935 2940 2945 2950 2955 2960 2965 2970 2975 2980 2985 2990 2995 3000 3005 3010 3015 3020 3025 3030 3035 3040 3045 3050 3055 3060 3065 3070 3075 3080 3085 3090 3095 3100 3105 3110 3115 3120 3125 3130 3135 3140 3145 3150 3155 3160 3165 3170 3175 3180 3185 3190 3195 3200 3205 3210 3215 3220 3225 3230 3235 3240 3245 3250 3255 3260 3265 3270 3275 3280 3285 3290 3295 3300 3305 3310 3315 3320 3325 3330 3335 3340 3345 3350 3355 3360 3365 3370 3375 3380 3385 3390 3395 3400 3405 3410 3415 3420 3425 3430 3435 3440 3445 3450 3455 3460 3465 3470 3475 3480 3485 3490 3495 3500 3505 3510 3515 3520 3525 3530 3535 3540 3545 3550 3555 3560 3565 3570 3575 3580 3585 3590 3595 3600 3605 3610 3615 3620 3625 3630 3635 3640 3645 3650 3655 3660 3665 3670 3675 3680 3685 3690 3695 3700 3705 3710 3715 3720 3725 3730 3735 3740 3745 3750 3755 3760 3765 3770 3775 3780 3785 3790 3795 3800 3805 3810 3815 3820 3825 3830 3835 3840 3845 3850 3855 3860 3865 3870 3875 3880 3885 3890 3895 3900 3905 3910 3915 3920 3925 3930 3935 3940 3945 3950 3955 3960 3965 3970 3975 3980 3985 3990 3995 4000 4005 4010 4015 4020 4025 4030 4035 4040 4045 4050 4055 4060 4065 4070 4075 4080 4085 4090 4095 4100 4105 4110 4115 4120 4125 4130 4135 4140 4145 4150 4155 4160 4165 4170 4175 4180 4185 4190 4195 4200 4205 4210 4215 4220 4225 4230 4235 4240 4245 4250 4255 4260 4265 4270 4275 4280 4285 4290 4295 4300 4305 4310 4315 4320 4325 4330 4335 4340 4345 4350 4355 4360 4365 4370 4375 4380 4385 4390 4395 4400 4405 4410 4415 4420 4425 4430 4435 4440 4445 4450 4455 4460 4465 4470 4475 4480 4485 4490 4495 4500 4505 4510 4515 4520 4525 4530 4535 4540 4545 4550 4555 4560 4565 4570 4575 4580 4585 4590 4595 4600 4605 4610 4615 4620 4625 4630 4635 4640 4645 4650 4655 4660 4665 4670 4675 4680 4685 4690 4695 4700 4705 4710 4715 4720 4725 4730 4735 4740 4745 4750 4755 4760 4765 4770 4775 4780 4785 4790 4795 4800 4805 4810 4815 4820 4825 4830 4835 4840 4845 4850 4855 4860 4865 4870 4875 4880 4885 4890 4895 4900 4905 4910 4915 4920 4925 4930 4935 4940 4945 4950 4955 4960 4965 4970 4975 4980 4985 4990 4995 5000 5005 5010 5015 5020 5025 5030 5035 5040 5045 5050 5055 5060 5065 5070 5075 5080 5085 5090 5095 5100 5105 5110 5115 5120 5125 5130 5135 5140 5145 5150 5155 5160 5165 5170 5175 5180 5185 5190 5195 5200 5205 5210 5215 5220 5225 5230 5235 5240 5245 5250 5255 5260 5265 5270 5275 5280 5285 5290 5295 5300 5305 5310 5315 5320 5325 5330 5335 5340 5345 5350 5355 5360 5365 5370 5375 5380 5385 5390 5395 5400 5405 5410 5415 5420 5425 5430 5435 5440 5445 5450 5455 5460 5465 5470 5475 5480 5485 5490 5495 5500 5505 5510 5515 5520 5525 5530 5535 5540 5545 5550 5555 5560 5565 5570 5575 5580 5585 5590 5595 5600 5605 5610 5615 5620 5625 5630 5635 5640 5645 5650 5655 5660 5665 5670 5675 5680 5685 5690 5695 5700 5705 5710 5715 5720 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850 5855 5860 5865 5870 5875 5880 5885 5890 5895 5900 5905 5910 5915 5920 5925 5930 5935 5940 5945 5950 5955 5960 5965 5970 5975 5980 5985 5990 5995 6000 6005 6010 6015 6020 6025 6030 6035 6040 6045 6050 6055 6060 6065 6070 6075 6080 6085 6090 6095 6100 6105 6110 6115 6120 6125 6130 6135 6140 6145 6150 6155 6160 6165 6170 6175 6180 6185 6190 6195 6200 6205 6210 6215 6220 6225 6230 6235 6240 6245 6250 6255 6260 6265 6270 6275 6280 6285 6290 6295 6300 6305 6310 6315 6320 6325 6330 6335 6340 6345 6350 6355 6360 6365 6370 6375 6380 6385 6390 6395 6400 6405 6410 6415 6420 6425 6430 6435 6440 6445 6450 6455 6460 6465 6470 6475 6480 6485 6490 6495 6500 6505 6510 6515 6520 6525 6530 6535 6540 6545 6550 6555 6560 6565 6570 6575 6580 6585 6590 6595 6600 6605 6610 6615 6620 6625 6630 6635 6640 6645 6650 6655 6660 6665 6670 6675 6680 6685 6690 6695 6700 6705 6710 6715 6720 6725 6730 6735 6740 6745 6750 6755 6760 6765 6770 6775 6780 6785 6790 6795 6800 6805 6810 6815 6820 6825 6830 6835 6840 6845 6850 6855 6860 6865 6870 6875 6880 6885 6890 6895 6900 6905 6910 6915 6920 6925 6930 6935 6940 6945 6950 6955 6960 6965 6970 6975 6980 6985 6990 6995 7000 7005 7010 7015 7020 7025 7030 7035 7040 7045 7050 7055 7060 7065 7070 7075 7080 7085 7090 7095 7100 7105 7110 7115 7120 7125 7130 7135 7140 7145 7150 7155 7160 7165 7170 7175 7180 7185 7190 7195 7200 7205 7210 7215 7220 7225 7230 7235 7240 7245 7250 7255 7260 7265 7270 7275 7280 7285 7290 7295 7300 7305 7310 7315 7320 7325 7330 7335 7340 7345 7350 7355 7360 7365 7370 7375 7380 7385 7390 7395 7400 7405 7410 7415 7420 7425 7430 7435 7440 7445 7450 7455 7460 7465 7470 7475 7480 7485 7490 7495 7500 7505 7510 7515 7520 7525 7530 7535 7540 7545 7550 7555 7560 7565 7570 7575 7580 7585 7590 7595 7600 7605 7610 7615 7620 7625 7630 7635 7640 7645 7650 7655 7660 7665 7670 7675 7680 7685 7690 7695 7700 7705 7710 7715 7720 7725 7730 7735 7740 7745 7750 7755 7760 7765 7770 7775 7780 7785 7790 7795 7800 7805 7810 7815 7820 7825 7830 7835 7840 7845 7850 7855 7860 7865 7870 7875 7880 7885 7890 7895 7900 7905 7910 7915 7920 7925 7930 7935 7940 7945 7950 7955 7960 7965 7970 7975 7980 7985 7990 7995 8000 8005 8010 8015 8020 8025 8030 8035 8040 8045 8050 8055 8060 8065 8070 8075 8080 8085 8090 8095 8100 8105 8110 8115 8120 8125 8130 8135 8140 8145 8150 8155 8160 8165 8170 8175 8180 8185 8190 8195 8200 8205 8210 8215 8220 8225 8230 8235 8240 8245 8250 8255 8260 8265 8270 8275 8280 8285 8290 8295 8300 8305 8310 8315 8320 8325 8330 8335 8340 8345 8350 8355 8360 8365 8370 8375 8380 8385 8390 8395 8400 8405 8410 8415 8420 8425 8430 8435 8440 8445 8450 8455 8460 8465 8470 8475 8480 8485 8490 8495 8500 8505 8510 8515 8520 8525 8530 8535 8540 8545 8550 8555 8560 8565 8570 8575 8580 8585 8590 8595 8600 8605 8610 8615 8620 8625 8630 8635 8640 8645 8650 8655 8660 8665 8670 8675 8680 8685 8690 8695 8700 8705 8710 8715 8720 8725 8730 8735 8740 8745 8750 8755 8760 8765 8770 8775 8780 8785 8790 8795 8800 8805 8810 8815 8820 8825 8830 8835 8840 8845 8850 8855 8860 8865 8870 8875 8880 8885 8890 8895 8900 8905 8910 8915 8920 8925 8930 8935 8940 8945 8950 8955 8960 8965 8970 8975 8980 8985 8990 8995 9000 9005 9010 9015 9020 9025 9030 9035 9040 9045 9050 9055 9060 9065 9070 9075 9080 9085 9090 9095 9100 9105 9110 9115 9120 9125 9130 9135 9140 9145 9150 9155 9160 9165 9170 9175 9180 9185 9190 9195 9200 9205 9210 9215 9220 9225 9230 9235 9240 9245 9250 9255 9260 9265 9270 9275 9280 9285 9290 9295 9300 9305 9310 9315 9320 9325 9330 9335 9340 9345 9350 9355 9360 9365 9370 9375 9380 9385 9390 9395 9400 9405 9410 9415 9420 9425 9430 9435 9440 9445 9450 9455 9460 9465 9470 9475 9480 9485 9490 9495 9500 9505 9510 9515 9520 9525 9530 9535 9540 9545 9550 9555 9560 9565 9570 9575 9580 9585 9590 9595 9600 9605 9610 9615 9620 9625 9630 9635 9640 9645 9650 9655 9660 9665 9670 9675 9680 9685 9690 9695 9700 9705 9710 9715 9720 9725 9730 9735 9740 9745 9750 9755 9760 9765 9770 9775 9780 9785 9790 9795 9800 9805 9810 9815 9820 9825 9830 9835 9840 9845 9850 9855 9860 9865 9870 9875 9880 9885 9890 9895 9900 9905 9910 9915 9920 9925 9930 9935 9940 9945 9950 9955 9960 9965 9970 9975 9980 9985 9990 9995 10000 10005 10010 10015 10020 10025 10030 10035 10040 10045 10050 10055 10060 10065 10070 10075 10080 10085 10090 10095 10100 10105 10110 10115 10120 10125 10130 10135 10140 10145 10150 10155 10160 10165 10170 10175 10180 10185 10190 10195 10200 10205 10210 10215 10220 10225 10230 10235 10240 10245 10250 10255 10260 10265 10270 10275 10280 10285 10290 10295 10300 10305 10310 10315 10320 10325 10330 10335 10340 10345 10350 10355 10360 10365 10370 10375 10380 10385 10390 10395 10400 10405 10410 10415 10420 10425 10430 10435 10440 10445 10450 10455 10460 10465 10470 10475 10480 10485 10490 10495 10500 10505 10510 10515 10520 10525 10530 10535 10540 10545 10550 10555 10560 10565 10570 10575 10580 10585 10590 10595 10600 10605 10610 10615 10620 10625 10630 10635 10640 10645 10650 10655 10660 10665 10670 10675 10680 10685 10690 10695 10700 10705 10710 10715 10720 10725 10730 10735 10740 10745 10750 10755 10760 10765 10770 10775 10780 10785 10790 10795 10800 10805 10810 10815 10820 10825 10830 10835 10840 10845 10850 10855 10860 10865 10870 10875 10880 10885 10890 10895 10900 10905 10910 10915 10920 10925 10930 10935 10940 10945 10950 10955 10960 10965 10970 10975 10980 10985 10990 10995 11000 11005 11010 11015 11020 11025 11030 11035 11040 11045 11050 11055 11060 11065 11070 11075 11080 11085 11090 11095 11100 11105 11110 11115 11120 11125 11130 11135 11140 11145 11150 11155 11160 11165 11170 11175 11180 11185 11190 11195 11200 11205 11210 11215 11220 11225 11230 11235 11240 11245 11250 11255 11260 11265 11270 11275 11280 11285 11290 11295 11300 11305 11310 11315 11320 11325 11330 11335 11340 11345 11350 11355 11360 11365 11370 11375 11380 11385 11390 11395 11400 11405 11410 11415 11420 11425 11430 11435 11440 11445 11450 11455 11460 11465 11470 11475 11480 11485 11490 11495 11500 11505 11510 11515 11520 11525 11530 11535 11540 11545 11550 11555 11560 11565 11570 11575 11580 11585 11590 11595 11600 11605 11610 11615 11620 11625 11630 11635 11640 11645 11650 11655 11660 11665 11670 11675 11680 11685 11690 11695 11700 11705 11710 11715 11720 11725 11730 11735 11740 11745 11750 11755 11760 11765 11770 11775 11780 11785 11790 11795 11800 11805 11810 11815 11820 11825 11830 11835 11840 11845 11850 11855 11860 11865 11870 11875 11880 11885 11890 11895 11900 11905 11910 11915 11920 11925 11930 11935 11940 11945 11950 11955

polymethacrylate esters, such as the end-capped polyoxyethylene polyols described above containing two or more terminal methacrylate moieties. The cross-linking agents are used in the usual amounts, e.g., from about 0.000415 to about 0.0156 mole per 100 grams of reactive components in the reaction mixture. (The reactive components are
5 everything in the reaction mixture except the diluent and any additional processing aids which do not become part of the structure of the polymer.) Alternatively, if the hydrophilic monomers and/or the silicone-containing monomers act as the cross-linking agent, the addition of a crosslinking agent to the reaction mixture is optional. Examples of hydrophilic monomers which can act as the crosslinking agent and when present do
10 not require the addition of an additional crosslinking agent to the reaction mixture include polyoxyethylene polyols described above containing two or more terminal methacrylate moieties.

An example of a silicone-containing monomer which can act as a crosslinking agent and, when present, does not require the addition of a crosslinking monomer to the
15 reaction mixture includes α , ω -bismethacryloylpropyl polydimethylsiloxane.

The reactive mixture may contain additional components such as, but not limited to, UV absorbers, medicinal agents, antimicrobial compounds, reactive tints, pigments, copolymerizable and nonpolymerizable dyes, release agents and combinations thereof.

A polymerization catalyst is preferably included in the reaction mixture. The
20 polymerization initiators includes compounds such as lauryl peroxide, benzoyl peroxide, isopropyl percarbonate, azobisisobutyronitrile, and the like, that generate free radicals at moderately elevated temperatures, and photoinitiator systems such as aromatic α -hydroxy ketones, alkoxyoxybenzoin, acetophenones, acylphosphine oxides, bisacylphosphine oxides, and a tertiary amine plus a diketone, mixtures thereof and the
25 like. Illustrative examples of photoinitiators are 1-hydroxycyclohexyl phenyl ketone, 2-hydroxy-2-methyl-1-phenyl-propan-1-one, bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentyl phosphine oxide (DMBAPO), bis(2,4,6-trimethylbenzoyl)-phenyl phosphineoxide (Irgacure 819), 2,4,6-trimethylbenzoyldiphenyl phosphine oxide and 2,4,6-trimethylbenzoyl diphenylphosphine oxide, benzoin methyl ester and a
30 combination of camphorquinone and ethyl 4-(N,N-dimethylamino)benzoate. Commercially available visible light initiator systems include Irgacure 819, Irgacure 1700, Irgacure 1800, Irgacure 819, Irgacure 1850 (all from Ciba Specialty Chemicals)

and Lucirin TPO initiator (available from BASF). Commercially available UV photoinitiators include Darocur 1173 and Darocur 2959 (Ciba Specialty Chemicals). These and other photoinitiators which may be used are disclosed in Volume III, Photoinitiators for Free Radical Cationic & Anionic Photopolymerization, 2nd Edition by J.V. Crivello & K. Dietliker; edited by G. Bradley; John Wiley and Sons; New York; 1998, which is incorporated hereinto for reference. The initiator is used in the reaction mixture in effective amounts to initiate photopolymerization of the reaction mixture, e.g., from about 0.1 to about 2 parts by weight per 100 parts of reactive monomer. Polymerization of the reaction mixture can be initiated using the appropriate choice of heat or visible or ultraviolet light or other means depending on the polymerization initiator used. Alternatively, initiation can be conducted without a photoinitiator using, for example, e-beam. However, when a photoinitiator is used, the preferred initiators are bisacylphosphine oxides, such as bis(2,4,6-trimethylbenzoyl)-phenyl phosphine oxide (Irgacure 819®) or a combination of 1-hydroxycyclohexyl phenyl ketone and bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentyl phosphine oxide (DMBAPO), and the preferred method of polymerization initiation is visible light. The most preferred is bis(2,4,6-trimethylbenzoyl)-phenyl phosphine oxide (Irgacure 819®).

The preferred range of silicone-containing monomer present in the reaction mixture is from about 5 to 95 weight percent, more preferably about 30 to 85 weight percent, and most preferably about 45 to 75 weight percent of the reactive components in the reaction mixture. The preferred range of hydrophilic monomer present in the above invention is from about 5 to 80 weight percent, more preferably about 10 to 60 weight percent, and most preferably about 20 to 50 weight percent of the reactive components in the reaction mixture. The preferred range of diluent present in the above invention is from about 2 to 70 weight percent, more preferably about 5 to 50 weight percent, and most preferably about 15 to 40 weight percent of the total reaction mixture (including reactive and nonreactive components). It has been surprisingly found that when the diluents of the present invention are used wettable biomedical devices, and particularly wettable ophthalmic devices may be made without incorporating significant quantities of a silicone containing compatibilizing component.

Preferred combinations of reactive components and diluents are those having from about 25 to about 55 weight% silicone-containing monomer, about 20 to about 40

weight % hydrophilic monomer, from about 5 to about 20 weight % of an hydroxyl containing component, from about 0.2 to about 3 weight % of a crosslinking monomer, from about 0 to about 3 weight% of a UV absorbing monomer, from about 2 to about 10 weight % of an high molecular weight hydrophilic polymer (all based upon the weight %
5 of all reactive components) and about 20 to about 50 weight % (weight % of all components, both reactive and non-reactive) of one or more of the claimed diluents.

The reaction mixtures of the present invention can be formed by any of the methods know to those skilled in the art, such as shaking or stirring, and used to form polymeric articles or devices by known methods.

10 For example, the biomedical devices of the invention may be prepared by mixing reactive components and the diluent(s) with a polymerization initiator and curing by appropriate conditions to form a product that can be subsequently formed into the appropriate shape by lathing, cutting and the like. Alternatively, the reaction mixture may be placed in a mold and subsequently cured into the appropriate article.

15 Various processes are known for processing the reaction mixture in the production of contact lenses, including spincasting and static casting. Spincasting methods are disclosed in U.S. Pat. Nos. 3,408,429 and 3,660,545, and static casting methods are disclosed in U.S. Pat. Nos. 4,113,224 and 4,197,266. The preferred method for producing contact lenses comprising the polymer of this invention is by the molding
20 of the silicone hydrogels, which is economical, and enables precise control over the final shape of the hydrated lens. For this method, the reaction mixture is placed in a mold having the shape of the final desired silicone hydrogel, i.e., water-swollen polymer, and the reaction mixture is subjected to conditions whereby the monomers polymerize, to thereby produce a polymer/diluent mixture in the shape of the final desired product.
25 Then, this polymer/diluent mixture is treated with a solvent to remove the diluent and ultimately replace it with water, producing a silicone hydrogel having a final size and shape which are quite similar to the size and shape of the original molded polymer/diluent article. This method can be used to form contact lenses and is further described in U.S. Pat. Nos. 4,495,313; 4,680,336; 4,889,664; and 5,039,459, incorporated
30 herein by reference.

The biomedical devices, and particularly ophthalmic lenses of the present invention have a balance of properties which makes them particularly useful. Such

properties include clarity, water content, oxygen permeability and contact angle. Thus, in one embodiment, the biomedical devices are contact lenses having a water content of greater than about 17%, preferably greater than about 20% and more preferably greater than about 25%.

5 As used herein clarity means substantially free from visible haze. Preferably clear lenses have a haze value of less than about 150%, more preferably less than about 100%.

 Suitable oxygen permeabilities are preferably greater than about 40 barrer and more preferably greater than about 60 barrer.

10 Also, the biomedical devices, and particularly ophthalmic devices and contact lenses have contact angles (advancing) which are less than about 80°, preferably less than about 70° and more preferably less than about 65°. In some preferred embodiments the articles of the present invention have combinations of the above described oxygen permeability, water content and contact angle. All combinations of the above ranges are
15 deemed to be within the present invention.

 Alpha values were measured using the following procedure. A 0.05 wt % solution of 4-nitroanisole (Aldrich, CAS# 100-17-4) stock solution in HPLC grade methylene chloride was prepared. A 0.1 wt % solution of Dimroth's betaine (Aldrich, CAS # 10081-39-7) in HPLC grade methylene chloride was prepared. The stock solution
20 was stored in the dark until used.

 To 5 ml of test diluent were added 100 microliters of the above 4-nitroanisole solution to make the 4-nitroanisole test sample solution. The test diluent was placed in the reference beam of the UV-VIS dual beam spectrometer (a Unicam Model UV 300 UV-VIS dual beam spectrometer was used in this procedure). An absorption scan was
25 run from 250 to 350 nm. If maximum absorption was greater than 2 absorbance units, the 4-nitroanisole test sample solution was diluted with test diluent and the absorption scan measurement was repeated. The peak wavelength of the maximum absorption was recorded.

 To 5 ml of test diluent were added 500 microliters of the above Dimroth's betaine
30 solution. The test diluent was placed in the reference beam of the UV-VIS dual beam spectrometer. An absorption scan was run from 550 to 800 nm. If maximum absorption was greater than 2 absorbance units, the Dimroth's betaine test sample solution was

diluted with test diluent and the absorption scan measurement was repeated. The peak wavelength of the maximum absorption was recorded.

The alpha value was calculated as follows:

1. Convert the λ_{\max} recorded for the 4-nitroanisole test sample solution in nm to cm^{-1} by inverting and multiplying by 10^7 .
2. Convert the λ_{\max} recorded for the 4-nitroanisole test sample solution in cm^{-1} to kilokaysers (kK) by dividing by 1000. Designate the result as ν_1 .
3. Repeat steps 1 and 2 for the λ_{\max} recorded for the Dimroth dye test sample solution. Designate the result as ν_{obsd} .
4. Calculate $\nu_{\text{calc}} = (-\nu_1 \times 1.873) + 74.58$.
5. Calculate $\alpha = (\nu_{\text{obsd}} - \nu_{\text{calc}})/6.24$.

The alpha values are shown in Table 1, below.

Table 1

Diluent	P (Mpa ^{1/2})	H (Mpa ^{1/2})	alpha
1-decanol, >99%	2.6	10.0	0.593
1-dodecanol, >98%	2.3*	9.3*	0.575
1-octanol, >99%	3.3	11.9	0.629
1-hexanol, >98%	4.1*	12.5*	0.647
1-pentanol, >99%	4.5	13.9	0.685
2-pentanol	6.4	13.3	
2-hexanol, >99%	4.0*	12.4*	0.507
2-octanol	4.9	11.0	0.474
2-decanol	3.9	10.0	
1-butanol, >99.8%	5.7	15.8	0.704
t-amyl alcohol	4.7*	13.3*	0.278
isopropanol, >99.5%	6.1	16.4	0.643
3M3P	4.1*	12.5*	0.211
D3O, >97%	2.7*	10.1*	0.267
ethanol, anhydrous	8.8	19.4	0.992
1-ethoxy-2-propanol, 90-95%	8.2	13.1	0.464
1-t-butoxy-2-propanol	6.1*	12.7*	
2-(diisopropylamino)ethanol, >99%	7.4*	10.5*	0.378
2-butanol, >99.5%	5.7	14.5	0.540

1-propanol, >99.5%	6.8	17.4	0.743
2-methyl-2-pentanol, >99%	4.1*	12.5*	0.290
t-butanol, >99%	5.1	14.7	0.395
SiGMA acetate	4.6*	8.4*	
N-ethylacetamide, >99%	10.7*	8.2*	
N-tert-butylformamide, >98%	9*	7.6*	
N-methylpropionamide, >98%	10.7*	8.3*	
N,N-dimethylpropionamide	14.6*	5.5*	
N-octylacetamide	5.6*	6*	
octanoic acid	3.3	8.2	
decanoic acid	2.3*	7.7*	
lauric (dodecanoic) acid	2*	7.1*	
valeric acid	4.1*	10.3*	
Dimethylsulfoxide	16.4	10.2	0.0*
acetonitrile, >99%	18.0	6.1	0.0*
N-methylpyrrolidone	12.3	7.2	0.0*
Acetone	10.4	7.0	0.08*
THF, >99%	5.7	8.0	0.0*
EtOAc	5.3	7.2	0.0*
toluene, >99.8%	1.4	2.0	0.0*
Triethylamine	0.4	1.0	0.0*
Dodecane	0.0	0.0	0.0*
methanol, >99.9%	12.3	22.3	0.949
acetic acid, glacial	8.0	13.5	1.120
CHCl ₃ , >99.5%	3.1	5.7	-0.028

*Indicated alpha values are from Kamlet, M. J., Abboud, J. M., Abraham, M. H. and Taft, R. W.; J. Org. Chem., 1983, 48, 2877.

- 5 The Hansen solubility parameter, δ_p may be calculated by using the group contribution method described in Barton, CRC Handbook of Solubility Par., 1st. Ed. 1983, page 85 – 87 and using Tables 13, 14.

- 10 Haze is measured by placing a hydrated test lens in borate buffered saline in a clear 20 x 40 x 10 mm glass cell at ambient temperature above a flat black background, illuminating from below with a fiber optic lamp (Titan Tool Supply Co. fiber optic light with 0.5" diameter light guide set at a power setting of 4-5.4) at an angle 66° normal to the lens cell, and capturing an image of the lens from above, normal to the lens cell with

a video camera (DVC 1300C:19130 RGB camera with Navitar TV Zoom 7000 zoom lens) placed 14 mm above the lens platform. The background scatter is subtracted from the scatter of the lens by subtracting an image of a blank cell using EPIX XCAP V 1.0 software. The subtracted scattered light image is quantitatively analyzed, by integrating
5 over the central 10 mm of the lens, and then comparing to a -1.00 diopter CSI Thin Lens®, which is arbitrarily set at a haze value of 100, with no lens set as a haze value of 0. Five lenses are analyzed and the results are averaged to generate a haze value as a percentage of the standard CSI lens.

The water content of contact lenses was measured as follows: Three sets of three
10 lenses are allowed to sit in packing solution for 24 hours. Each lens is blotted with damp wipes and weighed. The lenses are dried at 60°C for four hours at a pressure of 0.4 inches Hg or less. The dried lenses are weighed. The water content is calculated as follows:

15
$$\% \text{ water content} = \frac{(\text{wet weight} - \text{dry weight})}{\text{wet weight}} \times 100$$

The average and standard deviation of the water content are calculated for the samples are reported.

20 Modulus is measured by using the crosshead of a constant rate of movement type tensile testing machine equipped with a load cell that is lowered to the initial gauge height. A suitable testing machine includes an Instron model 1122. A dog-bone shaped sample having a 0.522 inch length, 0.276 inch “ear” width and 0.213 inch “neck” width is loaded into the grips and elongated at a constant rate of strain of 2 in/min. until it
25 breaks. The initial gauge length of the sample (Lo) and sample length at break (Lf) are measured. Twelve specimens of each composition are measured and the average is reported. Percent elongation is $[(Lf - Lo)/Lo] \times 100$. Tensile modulus is measured at the initial linear portion of the stress/strain curve.

The advancing contact angle was measured as follows. Four samples from each
30 set were prepared by cutting out a center strip from the lens approximately 5 mm in width and equilibrated in packing solution. The wetting force between the lens surface and borate buffered saline is measured at 23°C using a Wilhelmy microbalance while the sample is being immersed into or pulled out of the saline. The following equation is used

$$F = 2\gamma p \cos\theta \quad \text{or} \quad \theta = \cos^{-1}(F/2\gamma p)$$

where F is the wetting force, γ is the surface tension of the probe liquid, p is the perimeter of the sample at the meniscus and θ is the contact angle. The advancing contact angle is obtained from the portion of the wetting experiment where the sample is being immersed
 5 into the packing solution. Each sample was cycled four times and the results were averaged to obtain the advancing contact angles for the lens.

The Dk is measured as follows. Lenses are positioned on a polarographic oxygen sensor consisting of a 4 mm diameter gold cathode and a silver ring anode then covered on the upper side with a mesh support. The lens is exposed to an atmosphere of
 10 humidified 2.1% O₂. The oxygen that diffuses through the lens is measured by the sensor. Lenses are either stacked on top of each other to increase the thickness or a thicker lens is used. The L/Dk of 4 samples with significantly different thickness values are measured and plotted against the thickness. The inverse of the regressed slope is the Dk of the sample. The reference values are those measured on commercially available
 15 contact lenses using this method. Balafilcon A lenses available from Bausch & Lomb give a measurement of approx. 79 barrer. Etafilcon lenses give a measurement of 20 to 25 barrer. (1 barrer = 10⁻¹⁰ (cm³ of gas x cm²)/(cm³ of polymer x sec x cm Hg)).

The Examples below further describe this invention, but do not limit the invention. They are meant only to suggest a method of practicing the invention. Those
 20 knowledgeable in the field of contact lenses as well as other specialties may find other methods of practicing the invention. However, those methods are deemed to be within the scope of this invention.

Some of the materials that are employed in the Examples are identified as follows:

DMA	N,N-dimethylacrylamide
25 HEMA	2-hydroxyethyl methacrylate
mPDMS	800-1000 MW (M _n) monomethacryloxypropyl terminated mono-n-butyl terminated polydimethylsiloxane
Norbloc	2-(2'-hydroxy-5-methacryloxyethylphenyl)-2H-benzotriazole
PVP	poly(N-vinyl pyrrolidone) (K value 90)
30 SiGMA acetate	acetic acid, 2-hydroxy-3-[3-[1,3,3,3-tetramethyl-1- [(trimethylsilyl)oxy]disiloxanyl]propoxy]propyl ester
SiGMA diol	2,3-dihydroxypropyloxypropyl-bis(trimethylsiloxy)-methylsilane

	IPA	isopropyl alcohol
	D3O	3,7-dimethyl-3-octanol
	3M3P	3-methyl-3-pentanol
	2M2P	2-methyl-2-pentanol
5	TEGDMA	tetraethyleneglycol dimethacrylate
	TRIS	3-methacryloxypropyltris(trimethylsiloxy)silane
	CGI 819	bis(2,4,6-trimethylbenzoyl)-phenyl phosphine oxide
	CGI 1850	1:1 (wgt) blend of 1-hydroxycyclohexyl phenyl ketone and bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentyl phosphine oxide

10

Example 1

The compounds listed in Table 1, below were screened for compatibility with mPDMS, DMA and PVP (K90) using the following procedure: mPDMS was added dropwise to a pre-weighed vial of a rapidly stirring solution of 1.67 g DMA, 0.33 g PVP and 2.0 g of the test diluent at room temperature until the resulting mix becomes hazy and does not become clear after stirring for several minutes. The mass of added mPDMS is determined and reported in Table 2.

The diluents were purchased from sources as follows:

Aldrich Chemicals: 1-decanol, 1-dodecanol, 1-octanol, 1-pentanol, 1-hexanol, decanoic acid, 2-hexanol, 2-octanol, 2-pentanol, 1-butanol, t-amyl alcohol, isopropanol, 2-(diisopropylamino)ethanol, tetrahydrofuran, acetone, diethylcarbonate, ethyl acetate, valeric acid, dipropyleneglycol methyl ether acetate, N,N-dimethylpropionamide, acetonitrile, 2-methyl-2,4-pentanediol, N-t-butylformamide, ethyl (S) lactate, N-ethylacetamide, solketal, N-methylpropionamide, dimethylsulfoxide, dodecane, isopropyl acetate, N-ethyl-2-methylamine, and triethylamine.

Fluka: 3-methyl-3-pentanol, ethanol, chloroform and toluene.

Millennium Chemicals: D3O.

Fisher Scientific: methanol and acetic acid.

Acros: 1-ethoxy-2-propanol.

Gelest: 3-aminopropyltris(trimethylsiloxy) silane, tetraethoxysilane, mPDMS 1000, octamethylcyclotetrasiloxane and DMS-C15.

Jarchem: DMA. PVP K90 was purchased from ISP.

N-octylacetamide was prepared by reacting acetic anhydride with 1-octylamine in methanol at room temperature in the presence of Na_2CO_3 and was characterized by FTIR.

SiGMA acetate was prepared by reacting (3-glycidoxypentyl)bis(trimethylsiloxy)methylsilane with acetic acid, catalyzed by lithium acetate and was characterized by GC/MS. SiGMA diol was prepared by platinum catalyzed hydrosilylation of 2,3-dihydroxypropyl allyl ether with 1,1,1,3,5,5,5-hexamethyltrisiloxane and was characterized by GC/MS, FTIR and NMR. The minimum purities of test diluents, where known, are shown in Table 1.

10

Table 2

Diluent	g mPDMS*	functional group
1-decanol, 99%	2.95	alcohol (1)
1-dodecanol, 98%	2.86	alcohol (1)
1-octanol, 99%	2.83	alcohol (1)
1-hexanol, 98%	2.57	alcohol (1)
1-pentanol, >99%	2.30	alcohol (1)
decanoic acid, >99%	2.28	carboxylic acid
2-octanol, 97%	2.23	alcohol (2)
2-pentanol, 98%	2.14	alcohol (2)
1-butanol, 99.8%	2.17	alcohol (1)
t-amyl alcohol, 99%	2.02	alcohol (3)
isopropanol, 99.5%	1.85	alcohol (2)
3-methyl-3-pentanol, >98%	1.80	alcohol (3)
D3O, >97%	1.72	alcohol (3)
ethanol, anhydrous	1.22	alcohol (1)
SiGMA diol	1.14	alcohol (1 & 2)
1-tert-butoxy-2-propanol, >98%	1.04	alcohol (2) & ether
2-(diisopropylamino)ethanol, 99%	1.02	alcohol (1) & amine
SiGMA acetate	1.00	alcohol (2) and ester
1-ethoxy-2-propanol, 90-95%	0.67	alcohol (2) & ether
chloroform, >99.5%	0.57	alkyl halide
Tetrahydrofuran, 99.9%	0.33	Ether
N-octylacetamide	0.33	Amide
toluene, 99%	0.33	Aromatic
acetone, 99.5%	0.27	Ketone
diethylcarbonate, 99%	0.19	Carbonate
ethyl acetate, 99.5%	0.19	Ester
Valeric acid, 99%	0.18	carboxylic acid
methanol, >99.9%	0.17	alcohol (1)
dipropyleneglycol methyl ether acetate, >99%	0.15	ether, ester
N,N-dimethylpropionamide	0.15	Amide

acetonitrile, >99%	0.14	Nitrile
2-methyl-2,4-pentanediol	0.12	alcohol (2 & 3)
N-t-butylformamide, 98%	0.12	Amide
Acetic acid, glacial	0.08	Acid
ethyl (S) lactate, 98%	0.06	alcohol (2) & ester
N-ethylacetamide, 99%	0.06	Amide
2-(methoxyethoxy)ethanol	0.05	alcohol (1) & ether
N-methylpyrrolidone	0.05	Amide
Solketal	0.05	alcohol (1) and ether
N-methylpropionamide, 98%	0.05	Amide
Water	0.03	
dimethylsulfoxide, 99.9%	0.01	Sulfoxide
3-aminopropyltris-(trimethylsiloxy) silane	0.00	amine & siloxane
Octamethylcyclotetrasiloxane	0.00	Siloxane
Dodecane	0.00	Alkane
DMS-C15 PDMS-PEG carbinol (Gelest)	0.00	alcohol, PEG, siloxane
isopropyl acetate, 99%	0.00	Ester
N-ethyl-2-methylallylamine, 98%	0.00	amine, olefin
Tetraethoxysilane	0.00	Alkoxysilane
Triethylamine	0.00	Amine

*0.00 g indicates that the blend was inhomogenous before addition of any mPDMA.

Diluents which are capable of forming a clear blend with about 0.6 or more grams of mPDMS in the above mixtures display desirable preliminary compatibility with the
5 test components.

Examples 2-23

Some of the diluents from Example 1 were used to make contact lenses from the
10 monomer mix shown in Table 3.

Table 3

Component	level (wt)
DMA	31%
PVP (K90)	6%
mPDMS 1000	45%
HEMA	14.75%
CGI-819	0.25%
TEGDMA	1.5%
Norbloc	1.5%
monomer/diluent ratio	60/40

HEMA was purchased from Rohm. CGI-819 and CGI 1850 were purchased from CIBA Specialty Chemicals. TEGDMA was purchased from Esstech and Norbloc was
5 purchased from Janssen.

The components were combined and mixed overnight at room temperature.

The monomer mix (75 microliter per cavity) was dispensed in a nitrogen glove box, into front curves made from Topas® copolymers of ethylene and norbornene obtained from Ticona Polymers. Polypropylene back curves were mated to the front
10 curves, closing the mold. Lenses were cured by irradiating with Philips TL 20W/03T fluorescent bulbs at 45°C for about 30 minutes in N₂. The molds were opened and lenses were extracted into 70/30 (vol/vol) IPA/H₂O, washed with two fresh exchanges of this solution, and then placed into deionized water and observed for clarity. The results are shown in Table 4.

Table 4

Ex#	Diluent	Blend clarity	Lens haze (%)
2	D3O	Clear	18
3	1-decanol	Clear	26
4	1-octanol	Clear	29
5	1-pentanol	Clear	33
6	1-hexanol	Clear	31
7	2-hexanol	Clear	50
8	2-octanol	Clear	46
9	1-dodecanol	Clear	32
10	3-methyl-3-pentanol	Clear	16
11	t-amyl alcohol	Clear	13
12	t-butanol	Clear	13
13	2-butanol	Clear	58
14	1-butanol	Clear	31
15	2-methyl-2-pentanol	Clear	13
16	2-propanol	Clear	29*
17	1-propanol	Clear	49
18	Ethanol	Clear	64*
19	2-ethyl-1-butanol	Clear	22
20	SiGMA acetate	Clear	Opaque
21	Decanoic acid	Clear	Opaque
22	1-t-butoxy-2-propanol	Opaque	-
23	1-ethoxy-2-propanol	Opaque	-

*Lenses were misshapen

The mechanical properties of lenses from examples 5, 6 and 14 were measured and are reported in Table 5. The results show that, in three isomeric hexanols, the modulus of the lenses made with a secondary alcohol is reduced as compared to those made with primary or tertiary alcohols. While not wishing to be bound by theory, it is believed that hydrogen atom abstraction from secondary alcohol diluents may effect cure in a manner that may reduce the modulus as well as the clarity (see Table 4) of the resulting lenses.

Table 5

Ex#	Alcohol type	Diluent	Modulus (psi)	Elongation (%)
6	Primary	1-hexanol	75 ± 7	251 ± 72
7	Secondary	2-hexanol	64 ± 4	200 ± 71
15	Tertiary	2-methyl-2-pentanol	77 ± 8	209 ± 104

Examples 24

Lenses were made from the components shown in Table 6, below. The components were mixed overnight at room temperature to give a clear blend. The reactive mixture was charged in a nitrogen box, into lens molds comprising front curves made from Topas® copolymers of ethylene and norbornene obtained from Ticona Polymers and polypropylene back curves. Lenses were cured with 1.3 mW/cm^2 from Philips TL 20W/03T fluorescent bulbs at 60°C for about 30 minutes in N_2 . The molds were opened and lenses were extracted into IPA, and soaked in IPA at ambient temperature for about one hour to remove residual diluent and monomers, stepped down into an approximately 50:50 solution of IPA and water, and then placed into deionized water and observed for clarity. The lenses were optically clear, soft and wettable. Lens properties are shown in Table 8, below.

Table 6

MPDMS	46
DMA	35
HEMA	9.5
TEGDMA	1.5
PVP K90	7
CGI 1850	1
Diluent	D3O
Diluent %	36.0

Example 25

Lenses were made from the components shown in Table 7, below. The components were mixed overnight at room temperature to give a clear blend.

Table 7

MPDMS	45.0
DMA	31.0
HEMA	15.25
EGDMA	1.0
Norbloc	1.5
PVP K90	6.0
CGI 819	0.25
Diluent	t-amyl alcohol
Diluent %	40.0
Cure Temp.	60-65°C

The reactive mixture was charged to a lens mold comprising front curves made from Topas® copolymers of ethylene and norbornene obtained from Ticona Polymers in a nitrogen box, and with polypropylene back curves. Lenses were cured irradiating with 1.3 mW/cm² from Philips TL 20W/03T fluorescent bulbs at the temperature indicated for about 15 minutes in N₂. The molds were opened and lenses were extracted into a 70/30 blend (v/v) of IPA/water, changing this mixture twice with fresh 70/30 IPA/water, and then placed into deionized water. The results are shown in Table 8.

Table 8

Property	Ex. 24	Ex. 25
% EWC	56.2 ± 0.2	43.7 ± 0.3
Dk (barrers)	71	63
Modulus (psi)	60 ± 5.9	118.4 ± 7.3
Elongation (%)	144 ± 42	155 ± 47
DCA	63 ± 7	46 ± 14
Clarity	Clear	8 ± 1

Examples 26-27

Fluoroether-siloxane-methacrylate macromer was prepared following the procedure of Example B-5 in U.S. Patent 5,760,100. The blend shown in Table 9 was prepared by combining the listed components and mixing overnight at room temperature. Lenses were made by filling TOPAS mold front curves in a nitrogen atmosphere with 75

2004220102 24 Nov 2008

- 31 -

microliters of the monomer mix, closing the molds with a polypropylene beek curve and irradiating for 30 minutes with Philips TL 20W/09N fluorescent bulbs at room temperature. The molds were separated and the lenses were released into a solution of 70/30 (v/v) IPA and water. The lenses were leached in this solution with two
 5 exchanges for fresh solution, leaching at least 30 minutes per cycle, then placed into borate-buffered saline solution. The advancing DCA (dynamic contact angle) of the lenses was determined and the results are shown in Table 9, below.

Example 26 was repeated except that PVP and HEMA were added, and the amount of the TRIS and DMA decreased to allow for the additional components. The
 10 amounts of the components are shown in Table 9, below. Lenses were made according to Example 26, the advancing DCA was determined and the results are shown in Table 9, below.

Table 9

	Example 27	Example 26
Macromer	50 parts (wgt)	50 parts
TRIS	25 parts	20 parts
DMA	17 parts	30 parts
PVP (K 90)	3 parts	0 parts
HEMA	5 parts	0 parts
Darocur 1173	0.58 parts	0.58 parts
Diluent	67 parts (D3O)	22 parts (ethanol)
Blend	Clear	Clear
Lens	clear and flexible	clear and flexible
Advancing DCA	57 \pm 12°	128 \pm 10°

Thus, by proper diluent selection, hydrogels comprising silicone containing
 15 monomers may be formed into wettable, ophthalmic devices, without any surface treatment process.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or
 20 group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

2004220102 24 Nov 2008

- 32 -

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form or suggestion that the prior art forms part of the common general knowledge in Australia.

24/11/08,ck15218nov24speci,32

2004220102 24 Nov 2008

- 33 -

The claims defining the invention are as follows:

1. A composition comprising at least one silicone containing component, at least one hydrophilic component, a high molecular weight hydrophilic polymer and a diluent having an alpha value of between 0.05 and 1 and a Hansen solubility parameter, δ_p of less than 10, wherein said composition forms a clear blend at a selected reaction temperature wherein the reaction temperature is up to 75°C.
2. The composition of claim 1 wherein said reaction temperature is 40°C.
3. The composition of claims 1 or 2, wherein said alpha value is between 0.1 and 0.9.
4. The composition of any one of claims 1 to 3 wherein said hydrophilic component and said silicone containing component are polymerizable and said composition forms a clear article when polymerized at said reaction temperature.
5. The composition of any one of claims 1 to 4 wherein said diluent is selected from the group consisting of alcohols having at least three carbon atoms.
6. The composition of any one of claims 1 to 5 wherein said diluent is selected from the group consisting of alcohols having at least four carbon atoms.
7. The composition of any one of claims 1 to 6 wherein said diluent is selected from the group consisting of alcohols having at least six carbon atoms.
8. The composition of any one of claims 1 to 7 wherein said δ_p of less than 6.
9. The composition of any one of claims 1 to 8 wherein said silicone containing compatibilizing component is present in an amount between 0 and 5 weight%.
10. The composition of claim 1 wherein said diluent is selected from the group consisting of 3, 7-dimethyl-3-octanol, 1-dodecanol, 1-decanol, 1-octanol, 1-pentanol, 1-hexanol, 2-hexanol, 2-octanol, 3-methyl-3-pentanol, 2-pentanol, t-amyl alcohol, tert-butanol, 2-butanol, 1-butanol, 2-methyl-2-pentanol, 2-ethyl-1-butanol, ethanol,

24/11/08,ck15218nov24speci,33

2004220102 24 Nov 2008

- 34 -

3,3-dimethyl- 2-butanol, 2-octyl-1-dodecanol, decanoic acid, octanoic acid, dodecanoic acid and mixtures thereof.

11. The composition of any one of claims 1 to 10 wherein said high molecular weight hydrophilic polymer has a molecular weight greater than 150,000 Daltons.
- 5 12. The composition of any one of claims 1 to 11 wherein said high molecular weight hydrophilic polymer has a molecular weight between 500,000 to 1,500, 000 Daltons.
13. The composition of any one of claims 1 to 12 wherein said composition comprises 1 to 15 weight percent high molecular weight hydrophilic polymer.
- 10 14. The composition of any one of claims 1 to 13 wherein said high molecular weight hydrophilic polymer's backbone is selected from the group consisting of a cyclic amide and a cyclic imide.
- 15 15. The composition of any one of claims 1 to 14 wherein said high molecular weight hydrophilic polymers is selected from the group consisting of poly-N-vinyl pyrrolidone, poly-N- vinyl-2-piperidone, poly-N-vinyl-2-caprolactam, poly-N-vinyl-3-methyl-2- caprolactam, poly-N-vinyl-3-methyl-2-piperidone, poly-N-vinyl-4-methyl-2- piperidone, poly-N-vinyl-4-methyl-2-caprolactam, poly-N-vinyl-3-ethyl-2-pyrrolidone, and poly-N-vinyl-4,5-dimethyl-2-pyrrolidone, polyvinylimidazole, poly- N-N-dimethylacrylamide, polyvinyl alcohol, polyacrylic acid, polyethylene
- 20 oxide, poly 2 ethyl oxazoline, heparin polysaccharides, polysaccharides, mixtures and copolymers (including block or random, branched, multichain, comb-shaped or star shaped) thereof.
16. The composition of any one of claims 1 to 15 wherein said high molecular weight hydrophilic polymer comprises poly-N-vinylpyrrolidone.
- 25 17. The composition of any one of claims 1 to 16 wherein a ratio of moles HBD: moles HBA (HMWHP) is ≥ 0.8 for the composition.
18. The composition of any one of claims 1 to 17 wherein a ratio of moles HBD present to moles HBD preferred is ≥ 0.6 for the composition.

24/11/08,ck15218nov24speci,34

2004220102 24 Nov 2008

- 35 -

19. The composition of any one of claims 1 to 18 wherein a ratio of HTS is
> 0.14 for the composition.
20. A composition comprising at least one silicone containing component, at least
one hydroxyl containing component, a high molecular weight hydrophilic polymer
5 and a diluent having an alpha value of between 0.05 and 1 and a Hansen solubility
parameter, δ_p of less than 10, wherein said composition forms a clear blend at a
selected reaction temperature, wherein the reaction temperature is up to 75°C.
21. The composition of claims 1 or 20 further comprising a silicone containing
compatibilizing component in an amount insufficient to compatibilize the blend in
10 the absence of said diluent.
22. The composition of claim 21 wherein said diluent is selected from the group
consisting of 1-ethoxy-2-propanol, diisopropylaminoethanol, isopropanol, 3,7-
dimethyl-3-octanol, 1-decanol, 1-dodecanol, 1-octanol, 1-pentanol, 2-pentanol, 1-
hexanol, 2-hexanol, 2-octanol, 3-methyl-3-pentanol, tert-amyl alcohol, tert-butanol,
15 2-butanol, 1-butanol, 2-methyl-2-pentanol, 2-propanol, 1-propanol, ethanol, 2-ethyl-
1-butanol, SiGMA acetate, 1-tert-butoxy-2-propanol, 3,3-dimethyl-2-butanol, tert-
butoxyethanol, 2-octyl-1-dodecanol, decanoic acid, octanoic acid, dodecanoic acid,
2-(diisopropylamino) ethanol and mixtures thereof.
23. The composition of claim 20 wherein said hydroxyl containing component
20 that comprises at least one polymerizable double bond and at least one hydrophilic
functional group.
24. The composition of claim 23 wherein said polymerizable double bond is
selected from the group consisting of acrylic, methacrylic, acrylamido,
methacrylamido, fumaric, maleic, styryl, isopropenylphenyl, O-vinylcarbonate, O-
25 vinylcarbamate, allylic, O-vinylacetyl and N-vinylactam and N-vinylamido double
bonds.
25. The composition of claim 23 wherein said hydroxyl containing monomer is
selected from the group consisting of 2-hydroxyethyl methacrylate, 2-hydroxyethyl
acrylate, 2-hydroxyethyl methacrylamide, 2-hydroxyethyl acrylamide, 2-

24/11/08, ck15218nov24speci, 35

2004220102 24 Nov 2008

- 36 -

hydroxyethyl vinyl carbamate, 2-hydroxyethyl vinyl carbonate, 2-hydroxypropyl methacrylate, hydroxyhexyl methacrylate, hydroxyoctyl methacrylate and mixtures thereof.

26. The composition of claim 23 wherein said hydroxyl containing monomer
5 comprises 2-hydroxyethyl methacrylate.

27. The composition of claim 23 wherein said silicone containing component comprises a fluoroether-siloxane-methacrylate macromer.

28. The composition of claim 23 wherein said silicone containing component comprises monomethacryloxypropyl terminated mono-n-butyl terminated
10 polydimethylsiloxane.

29. The composition of any one of claims 23, 27 or 28 wherein said hydroxyl containing monomer comprises 2-hydroxyethyl methacrylate and said high molecular weight hydrophilic polymer comprises poly-N-vinylpyrrolidone.

30. A composition comprising at least one silicone containing component, at least
15 one hydrophilic component, a high molecular weight hydrophilic polymer and a diluent which is capable of forming a clear blend at about ambient temperature and at a weight ratio of said diluent: said hydrophilic component : said high molecular weight hydrophilic polymer: said silicone containing component of 2: 1.6: 0.3: at least 1.

20 31. The composition of claim 29 wherein said hydrophilic component comprises N, N- dimethylacrylamide, said silicone-containing component comprises monomethacryloxypropyl terminated mono-n-butyl terminated polydimethylsiloxane and said high molecular weight hydrophilic polymer comprises poly-N-vinylpyrrolidone.

25 32. An ophthalmic device comprising a cured compound, wherein the compound in precure form comprises

at least one silicone containing component,

at least one hydrophilic component or hydroxyl containing component,

24/11/08, ck15218nov24speci,36

2004220102 24 Nov 2008

- 37 -

at least one high molecular weight hydrophilic polymer, and

at least one diluent having an alpha value of between 0.05 and 1, and

a Hansen solubility parameter, δ_p , of less than 10.

33. A method of making a clear and wettable ophthalmic device comprising
 5 combining at least one silicone containing component, a component selected from at least one hydroxyl containing component or at least one hydroxyl containing component, at least one high molecular weight hydrophilic polymer, and at least one diluent having an alpha value of between 0.05 and 1 and a Hansen solubility parameter, δ_p , of less than 10;

10 placing the combination in a mold;

curing the combination;

extracting the combination from the mold, and

removing substantially all of the diluent from the combination.

34. A composition comprising monomethacryloxypropyl terminated mono-n-
 15 butyl terminated polydimethylsiloxane; N, N-dimethylacrylamide; 2-hydroxyethyl methacrylate; tetraethyleneglycol dimethacrylate; poly (N-vinyl pyrrolidone) (K value 90); bis (2,4,6-trimethylbenzoyl)-phenyl phosphine oxide; and 3, 7-dimethyl-3-octanol.

35. A composition comprising: monomethacryloxypropyl terminated mono-n-
 20 butyl terminated polydimethylsiloxane; N, N-dimethylacrylamide; 2-hydroxyethyl methacrylate; ethylene glycol dimethacrylate; 2- (2'-hydroxy-5-methacrylyoxyethylphenyl)-2H-benzotriazole; poly (N-vinyl pyrrolidone) (K value 90); bis (2,4,6-trimethylbenzoyl)-phenyl phosphine oxide; and t-amyl alcohol.

25

FIGURE 1
Hansen P vs. alpha values

