



(51) International Patent Classification:

G08G 1/16 (2006.01) G08G 1/017 (2006.01)
G08G 1/0967 (2006.01)

(21) International Application Number:

PCT/US2017/031004

(22) International Filing Date:

04 May 2017 (04.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/159,234 19 May 2016 (19.05.2016) US

(71) Applicant: **DELPHI TECHNOLOGIES, INC.** [US/US];
P.O. Box 5052, M/C: 483-400-402, Troy, MI 48007-5052
(US).

(72) Inventors: **WEI, Junqing**; 8598 Christine Court,
Bridgeville, PA 15017 (US). **BHATIA, Gaurav**; 125 Pen-
rose Drive, Pittsburgh, PA 15208 (US). **XU, Wenda**; 1 Ba-
yard Road - Apt. 22, Pittsburgh, PA 15213 (US).

(74) Agent: **HAZELTON, Lawrence, D.**; Delphi Technolo-
gies, Inc., P.O. Box 5052, M/C: 483-400-402, Troy, MI
48007-5052 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

(54) Title: SAFE-TO-PROCEED SYSTEM FOR AN AUTOMATED VEHICLE

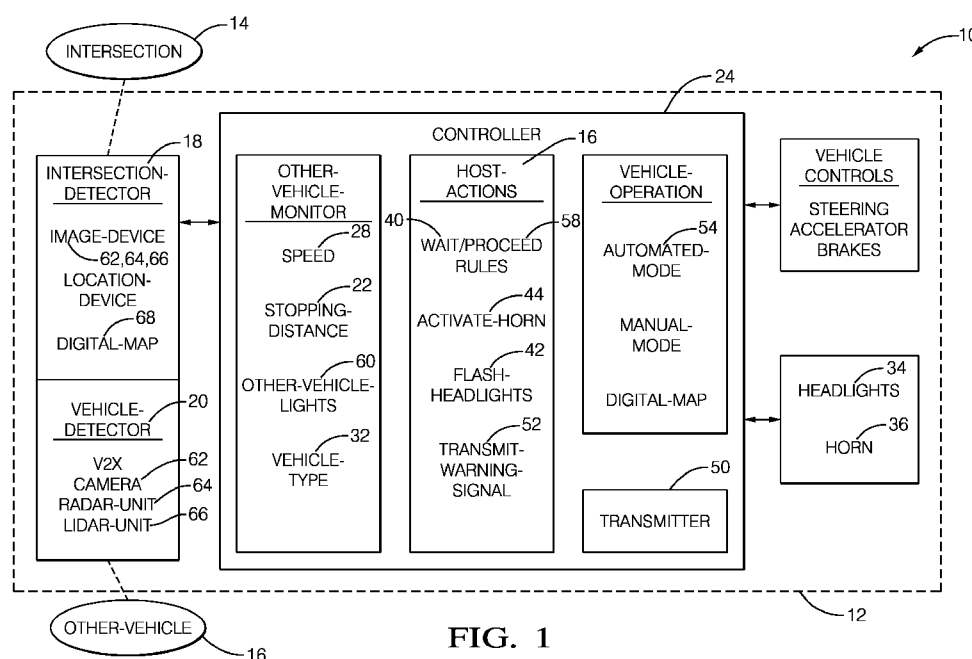


FIG. 1

(57) Abstract: A safe-to-proceed system (10) for operating an automated vehicle proximate to an intersection (14) includes an intersection-detector (18), a vehicle-detector (20), and a controller (24). The intersection-detector (18) is suitable for use on a host-vehicle (12). The intersection-detector (18) is used to determine when a host-vehicle (12) is proximate to an intersection (14). The vehicle-detector (20) is also suitable for use on the host-vehicle (12). The vehicle-detector (20) is used to estimate a stopping-distance (22) of an other-vehicle (16) approaching the intersection (14). The controller (24) is in communication with the intersection-detector (18) and the vehicle-detector (20). The controller (24) is configured to prevent the host-vehicle (12) from entering the intersection (14) when the stopping-distance (22) indicates that the other-vehicle (16) will enter the intersection (14) before stopping.



SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

SAFE-TO-PROCEED SYSTEM FOR AN AUTOMATED VEHICLE

TECHNICAL FIELD OF INVENTION

[0001] This disclosure generally relates to a safe-to-proceed system that operates an automated vehicle, and more particularly relates to a system configured to prevent a host-vehicle from entering an intersection when the stopping-distance of an other-vehicle indicates that the other-vehicle will not stop before entering the intersection.

BACKGROUND OF INVENTION

[0002] It is generally a poor driving safety practice for an operator or controller of a host-vehicle to assume that an other-vehicle is going to safely stop while approaching an intersection that the host-vehicle is about to enter, especially if roadway conditions are such that traction is less than optimal, and/or rainfall or snowfall makes it difficult for the other-vehicle to detect the presence of the intersection or traffic-control signs/signals at the intersection.

SUMMARY OF THE INVENTION

[0003] In accordance with one embodiment, a safe-to-proceed system for operating an automated vehicle proximate to an intersection is provided. The system includes an intersection-detector, a vehicle-detector, and a controller. The intersection-detector is suitable for use on a host-vehicle. The intersection-detector is used to determine when a host-vehicle is proximate to an intersection. The vehicle-detector is also suitable for use on the host-vehicle. The vehicle-detector is used to estimate a stopping-distance of an

other-vehicle approaching the intersection. The controller is in communication with the intersection-detector and the vehicle-detector. The controller is configured to prevent the host-vehicle from entering the intersection when the stopping-distance indicates that the other-vehicle will enter the intersection before stopping.

[0004] Further features and advantages will appear more clearly on a reading of the following detailed description of the preferred embodiment, which is given by way of non-limiting example only and with reference to the accompanying drawings.

BRIEF DESCRIPTION OF DRAWINGS

[0005] The present invention will now be described, by way of example with reference to the accompanying drawings, in which:

[0006] Fig. 1 is a diagram of a safe-to-proceed system in accordance with one embodiment; and

[0007] Fig. 2 is a traffic-scenario encountered by the system of Fig. 1 in accordance with one embodiment.

DETAILED DESCRIPTION

[0008] Fig. 1 illustrates a non-limiting example of a safe-to-proceed system 10, hereafter referred to as the system 10. The system 10 is generally configured for operating an automated vehicle, hereafter referred to as the host-vehicle 12, particularly when the host-vehicle 12 is proximate to a traffic-intersection 14 (Fig. 2), hereafter the intersection 14. As used herein, the word ‘proximate’ is used to indicate that something is close enough to warrant consideration by the system 10 for the purpose of safely

operating the host-vehicle 12. For example, within one-hundred meters (100m) would likely be considered proximate, but further than one-kilometer (1km) would likely not be considered proximate. In general, the system 10 is configured to estimate or determine when an other-vehicle 16 that is approaching the intersection 14 is able to stop, and operate the host-vehicle 12 to wait 40 if the other-vehicle 16 is estimated (i.e. - predicted, forecasted, or determined) to be moving too fast to safely stop before entering the intersection 14. While the non-limiting examples presented herein are generally directed to a fully automated or autonomous vehicle, it is contemplated that the teaching presented herein are also applicable to vehicles that are for the most part manually operated or driven by a human-operator (not shown), and the system 10 only becomes active to assist the human-operator to, for example, avoid a collision with the other-vehicle 16 at the intersection 14.

[0009] The system 10 includes an intersection-detector 18 suitable for use on the host-vehicle 12. By way of example and not limitation, the intersection-detector 18 may include an image-device such as one of, or any combination of, a camera 62, a lidar-unit 66, and a radar-unit 64. The function of the intersection-detector 18 may be provided by a location-device such as a global-positioning-system (GPS) receiver in combination with a digital-map 68. Whatever the configuration, the intersection-detector 18 is used to determine when a host-vehicle 12 is proximate to (i.e. close to or approaching) the intersection 14, and those in the art will recognize how the various devices suggested above can be used to provide this function.

[0010] The system 10 also includes a vehicle-detector 20 suitable for use on the host-vehicle 12 to detect the other-vehicle 16. By way of example and not limitation, the

vehicle-detector 20 may be one of, or any combination of, a camera 62, a lidar-unit 66, and a radar-unit 64. It is contemplated that, for example, both the intersection-detector 18 and the vehicle-detector 20 may make use of images captured by same camera 62 to detect the intersection 14 and the other-vehicle 16, respectively. That is, the camera 62, radar-unit 64, and/or lidar-unit 66 may be shared by the intersection-detector 18 and the vehicle-detector 20. The vehicle-detector 20 is used to estimate a stopping-distance 22 of the other-vehicle 16 approaching the intersection 14, as will be explained in more detail below. The function of the vehicle-detector 20 may also be provided or supplemented by a transceiver (not shown) configured for vehicle-to-infrastructure (V2I) communications, vehicle-to-vehicle (V2V) communications, and/or vehicle-to-pedestrian (V2P) communications, which may be generically labeled as V2X communications, as will be recognized by those in the art.

[0011] The system 10 also includes a controller 24 in communication with the intersection-detector 18 and the vehicle-detector 20. The controller 24 may include a processor (not specifically shown) such as a microprocessor or other control circuitry such as analog and/or digital control circuitry including an application specific integrated circuit (ASIC) for processing data as should be evident to those in the art. The controller 24 may include memory (not specifically shown), including non-volatile memory, such as electrically erasable programmable read-only memory (EEPROM) for storing one or more routines, thresholds, and captured data. The one or more routines may be executed by the processor to perform steps for determining the stopping-distance 22 based on signals received by the controller 24 for controlling the host-vehicle 12 as described herein. In particular, the controller 24 is configured to prevent the host-vehicle 12 from

entering the intersection 14 when the stopping-distance 22 of the other-vehicle 16 indicates that the other-vehicle 16 will enter the intersection 14 without stopping.

[0012] Fig. 2 illustrates a non-limiting example of a traffic-scenario 26 that may be encountered by the host-vehicle 12 where the host-vehicle 12 is stopped at the intersection 14 and the other-vehicle 16 is approaching or moving toward the intersection 14. Based on signals from the vehicle-detector 20 the controller 24 can determine a speed 28 of the other-vehicle 16 and then use a braking-model or algorithm for a typical vehicle to estimate the stopping-distance 22 of the other-vehicle 16 if the other-vehicle 16 were to apply, for example, maximum braking-effort at the instant the speed 28 was determined. In the example shown in Fig. 2, the stopping-distance 22 is such that it is likely that the other-vehicle 16 will not be able to stop before entering the intersection 14, so the controller 24 keeps the host-vehicle 12 at the present position shown so a collision with the other-vehicle 16 is avoided even though the host-vehicle 12 may have the right-of-way.

[0013] The controller 24 may also determine a long-stopping-distance (not shown) based on the other-vehicle 16 applying a typical braking-effort (i.e. less than maximum braking-effort). The long-stopping-distance may be used by the controller 24 to determine a threat-level of the other-vehicle 16. For example, if the long-stopping-distance suggests that the other-vehicle 16 can easily stop before entering the intersection 14, e.g. the other-vehicle 16 is traveling slower and/or is further away from the intersection 14 than as illustrated in Fig. 2, the threat-level may be set at LOW. However, if the other-vehicle 16 continues to travel toward the intersection 14 and no

change in the speed 28 is detected, the threat-level may be increased to, for example, MEDIUM or HIGH.

[0014] The controller 24 may also consider other variables when the estimate of the stopping-distance 22 is determined. For example, V2V communications or the camera 62 may be used to determine a vehicle-type 32, e.g. large-truck vs. small-automobile vs. motorcycle, so that a more accurate estimate of the stopping-distance 22 can be determined. Road conditions may be determined using V2X communications to receive slippery-road or icy-road messages originating from vehicles that previously passed through the intersection 14, or a detected traction-loss by the host-vehicle 12 may suggest that traction-conditions are less than optimum, either of which could be used by the controller 24 to increase the estimate of the stopping-distance 22. The camera 62 or the lidar-unit 66 may be used to determine if the travel-lane 30 of the other-vehicle 16 is flat, or has an uphill or downhill slope which would further influence the stopping-distance 22.

[0015] In addition to operating the host-vehicle 12 to wait 40 to enter the intersection 14 when the stopping-distance 22 of the other-vehicle 16 indicates that the other-vehicle 16 will not stop before entering the intersection 14, the system 10 may be further configured to warn other of potential danger. For example, since it is likely that the host-vehicle 12 is equipped with headlights 34 and a horn 36, the controller 24 may be further configured to flash 42 the headlights 34 and/or activate 44 the horn 36 when the stopping-distance 22 indicates that the other-vehicle 16 will enter the intersection 14 before or without stopping. Such action may be effective to warn a pedestrian 46 who appears to be entering the intersection 14 and may not recognize the danger of the other-

vehicle 16 not stopping because the pedestrian 46 is, for example, texting. The action may also be effective to warn a waiting-vehicle 48 whose view of the other-vehicle 16 may be blocked by the pedestrian 46, for example.

[0016] As another option to warn others of the danger represented by the other-vehicle 16 not stopping, the system 10 may include a transmitter 50 used to transmit a warning-signal 54, and controller 24 may be configured activate the transmitter 50 to transmit 52 the warning-signal 54 when the stopping-distance 22 indicates that the other-vehicle 16 will enter the intersection 14 before stopping. The transmitter 50 may be part of the transceiver for V2X communications discussed above. Alternatively, the transmitter 50 may be a light-source such as an infrared-light-source used to broadcast local messages that can be detected by other properly equipped vehicles and/or a V2I communications device 56 located proximate to the intersection 14.

[0017] In another embodiment, the camera 62 may be used to detect light emitted by lights 60 on the other-vehicle 16. For example, the other-vehicle 16 may an ambulance equipped with emergency-lights that if activated will cause the system 10 to operate the host-vehicle 12 to wait 40 until the other-vehicle 16 has cleared the intersection 14. Furthermore, flashing of headlights by the other-vehicle 16 may be interpreted as an indication that the other-vehicle 16 is unable to stop.

[0018] Accordingly, a safe-to-proceed system (the system 10), a controller 24 for the system 10, and a method of operating the system 10 is provided. While the examples presented herein are specifically directed to the system 10 having the host-vehicle 12 wait 40 when it appears that the other-vehicle 16 is not going to stop before entering the intersection 14, it is also contemplated that system 10 will operate the host-vehicle 12 to

proceed 58 into the intersection 14 when the speed 28 and the distance of the other-vehicle 16 from the intersection 14 indicate that the host-vehicle 12 has time to enter and sufficient proceed through the intersection 14 to avoid a collision or interference with the other-vehicle 16.

[0019] While this invention has been described in terms of the preferred embodiments thereof, it is not intended to be so limited, but rather only to the extent set forth in the claims that follow.

WE CLAIM:

1. A safe-to-proceed system (10) for operating an automated vehicle proximate to an intersection (14), said system (10) comprising:
an intersection-detector (18) suitable for use on a host-vehicle (12), said intersection-detector (18) used to determine when a host-vehicle (12) is proximate to an intersection (14);
a vehicle-detector (20) suitable for use on the host-vehicle (12), said vehicle-detector (20) used to estimate a stopping-distance (22) of an other-vehicle (16) approaching the intersection (14); and
a controller (24) in communication with the intersection-detector (18) and the vehicle-detector (20), said controller (24) configured to prevent the host-vehicle (12) from entering the intersection (14) when the stopping-distance (22) indicates that the other-vehicle (16) will enter the intersection (14) before stopping.
2. The system (10) in accordance with claim 1, wherein the intersection-detector (18) includes one of a digital-map (68), a camera (62), a lidar-unit (66), and a radar-unit (64).
3. The system (10) in accordance with claim 1, wherein the host-vehicle (12) is equipped with headlights (34) and a horn (36), and the controller (24) is configured to flash (42) the headlights (34) and activate (44) the horn (36) when

the stopping-distance (22) indicates that the other-vehicle (16) will enter the intersection (14) before stopping.

4. The system (10) in accordance with claim 1, wherein the system (10) includes a transmitter (50) used to transmit a warning-signal (54), and controller (24) is configured activate (44) the transmitter (50) to transmit the warning-signal (54) when the stopping-distance (22) indicates that the other-vehicle (16) will enter the intersection (14) before stopping.

AMENDED CLAIMS

received by the International Bureau on 7 August 2017 (07.08.2017)

A safe-to-proceed system (10) for operating an automated vehicle proximate to an intersection

(14), said system (10) comprising:

a vehicle-detector (20) suitable for use on the host-vehicle (12), said vehicle-detector (20) used to estimate a stopping-distance (22) of an other-vehicle (16) approaching the intersection (14);

an intersection-detector (18) suitable for use on a host-vehicle (12), said intersection-detector (18) used to determine when a host-vehicle (12) is proximate to an intersection (14), wherein the intersection (14) is configured such that the other-vehicle 16 is required to stop before entering the intersection 14; and

a controller (24) in communication with the intersection-detector (18) and the vehicle-detector (20), said controller (24) configured to prevent the host-vehicle (12) from entering the intersection (14) when the stopping-distance (22) indicates that the other-vehicle (16) will enter the intersection (14) before stopping.

2. The system (10) in accordance with claim 1, wherein the intersection-detector (18) includes one of a digital-map (68), a camera (62), a lidar-unit (66), and a radar-unit (64).
3. The system (10) in accordance with claim 1, wherein the host-vehicle (12) is equipped with headlights (34) and a horn (36), and the controller (24) is configured to flash (42) the headlights (34) and activate (44) the horn (36) when the stopping-distance (22) indicates that the other-vehicle (16) will enter the intersection (14) before stopping.

4. The system (10) in accordance with claim 1, wherein the system (10) includes a transmitter (50) used to transmit a warning-signal (54), and controller (24) is configured activate (44) the transmitter (50) to transmit the warning-signal (54) when the stopping-distance (22) indicates that the other-vehicle (16) will enter the intersection (14) before stopping.

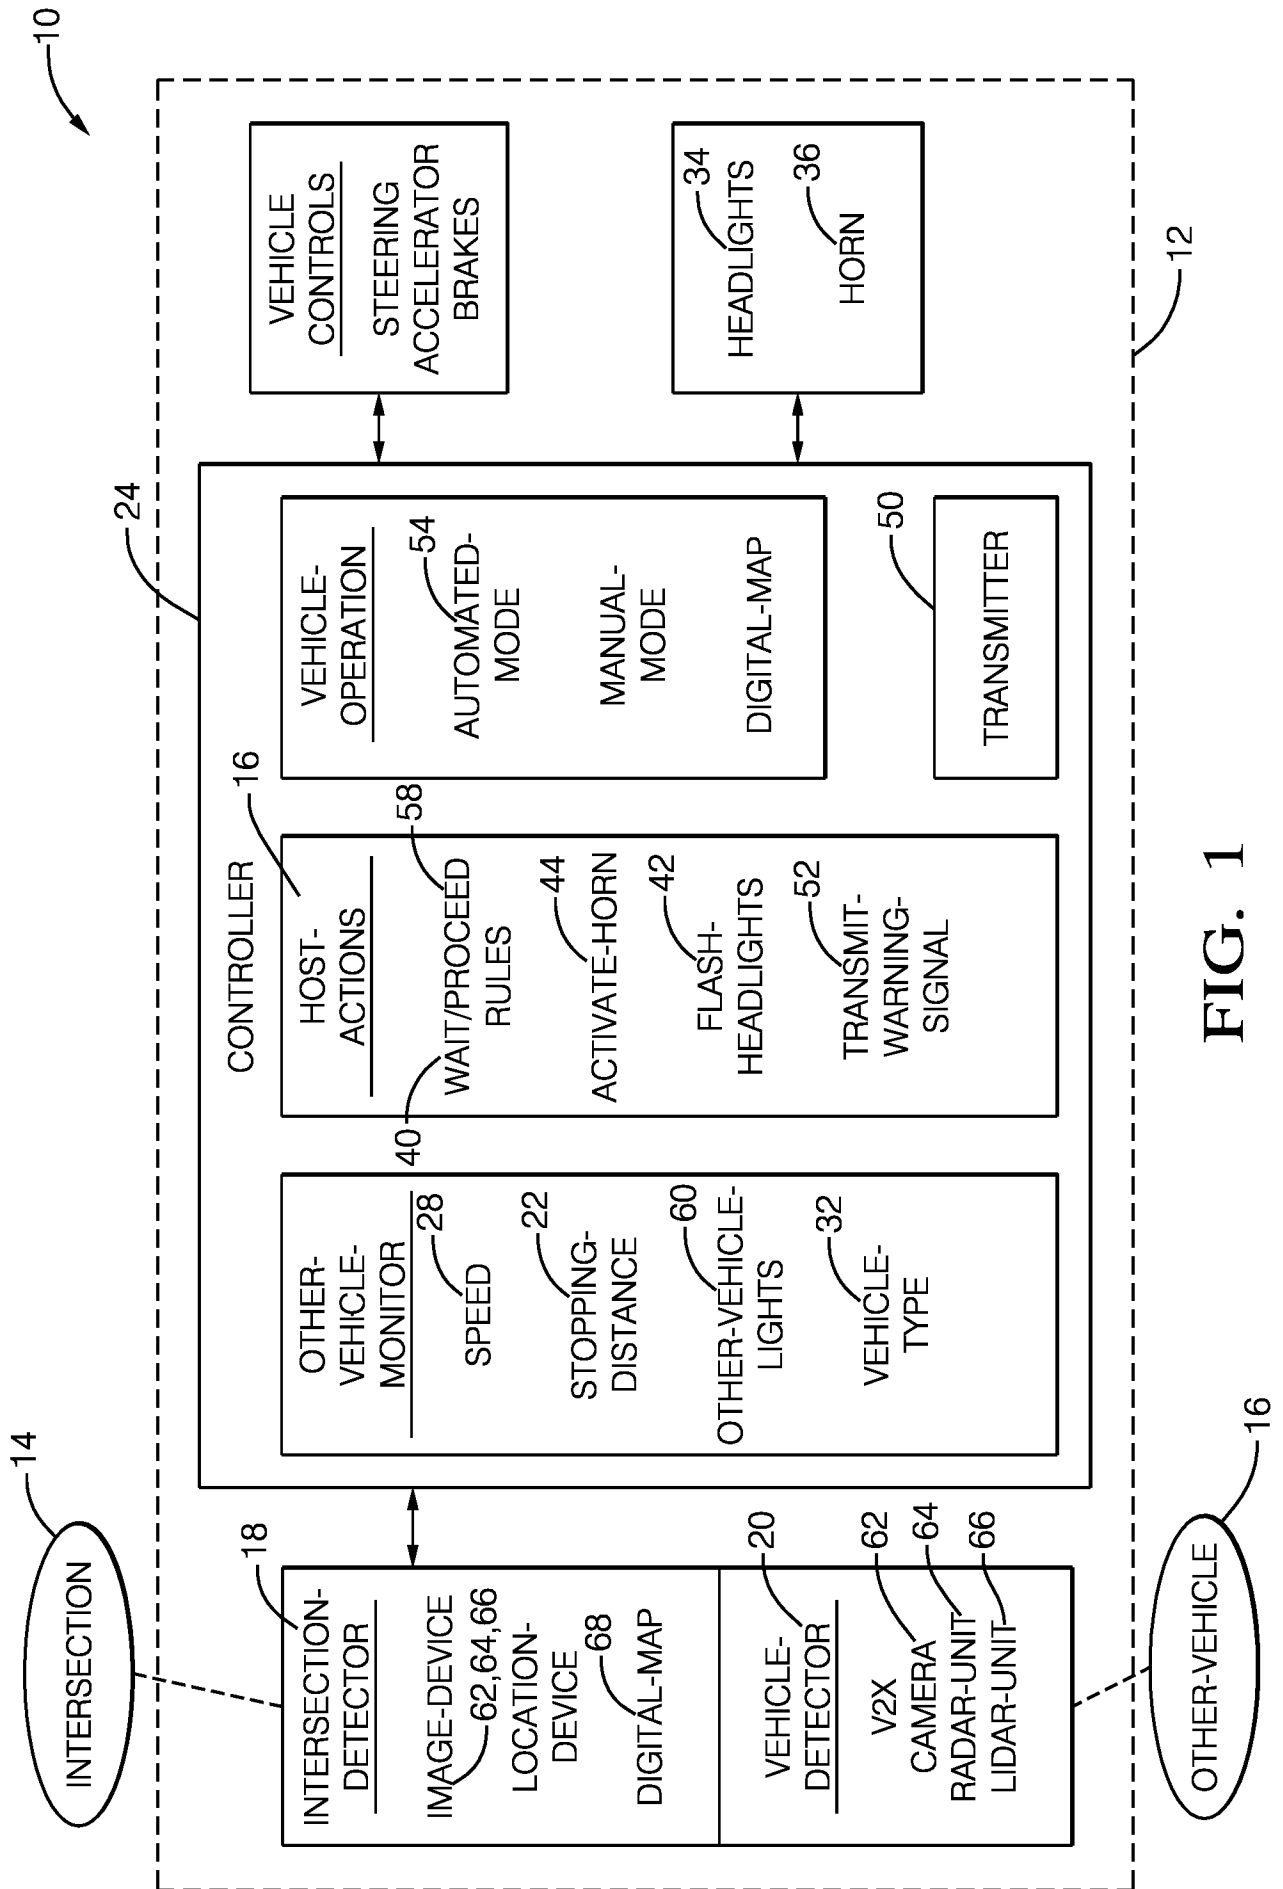


FIG. 1

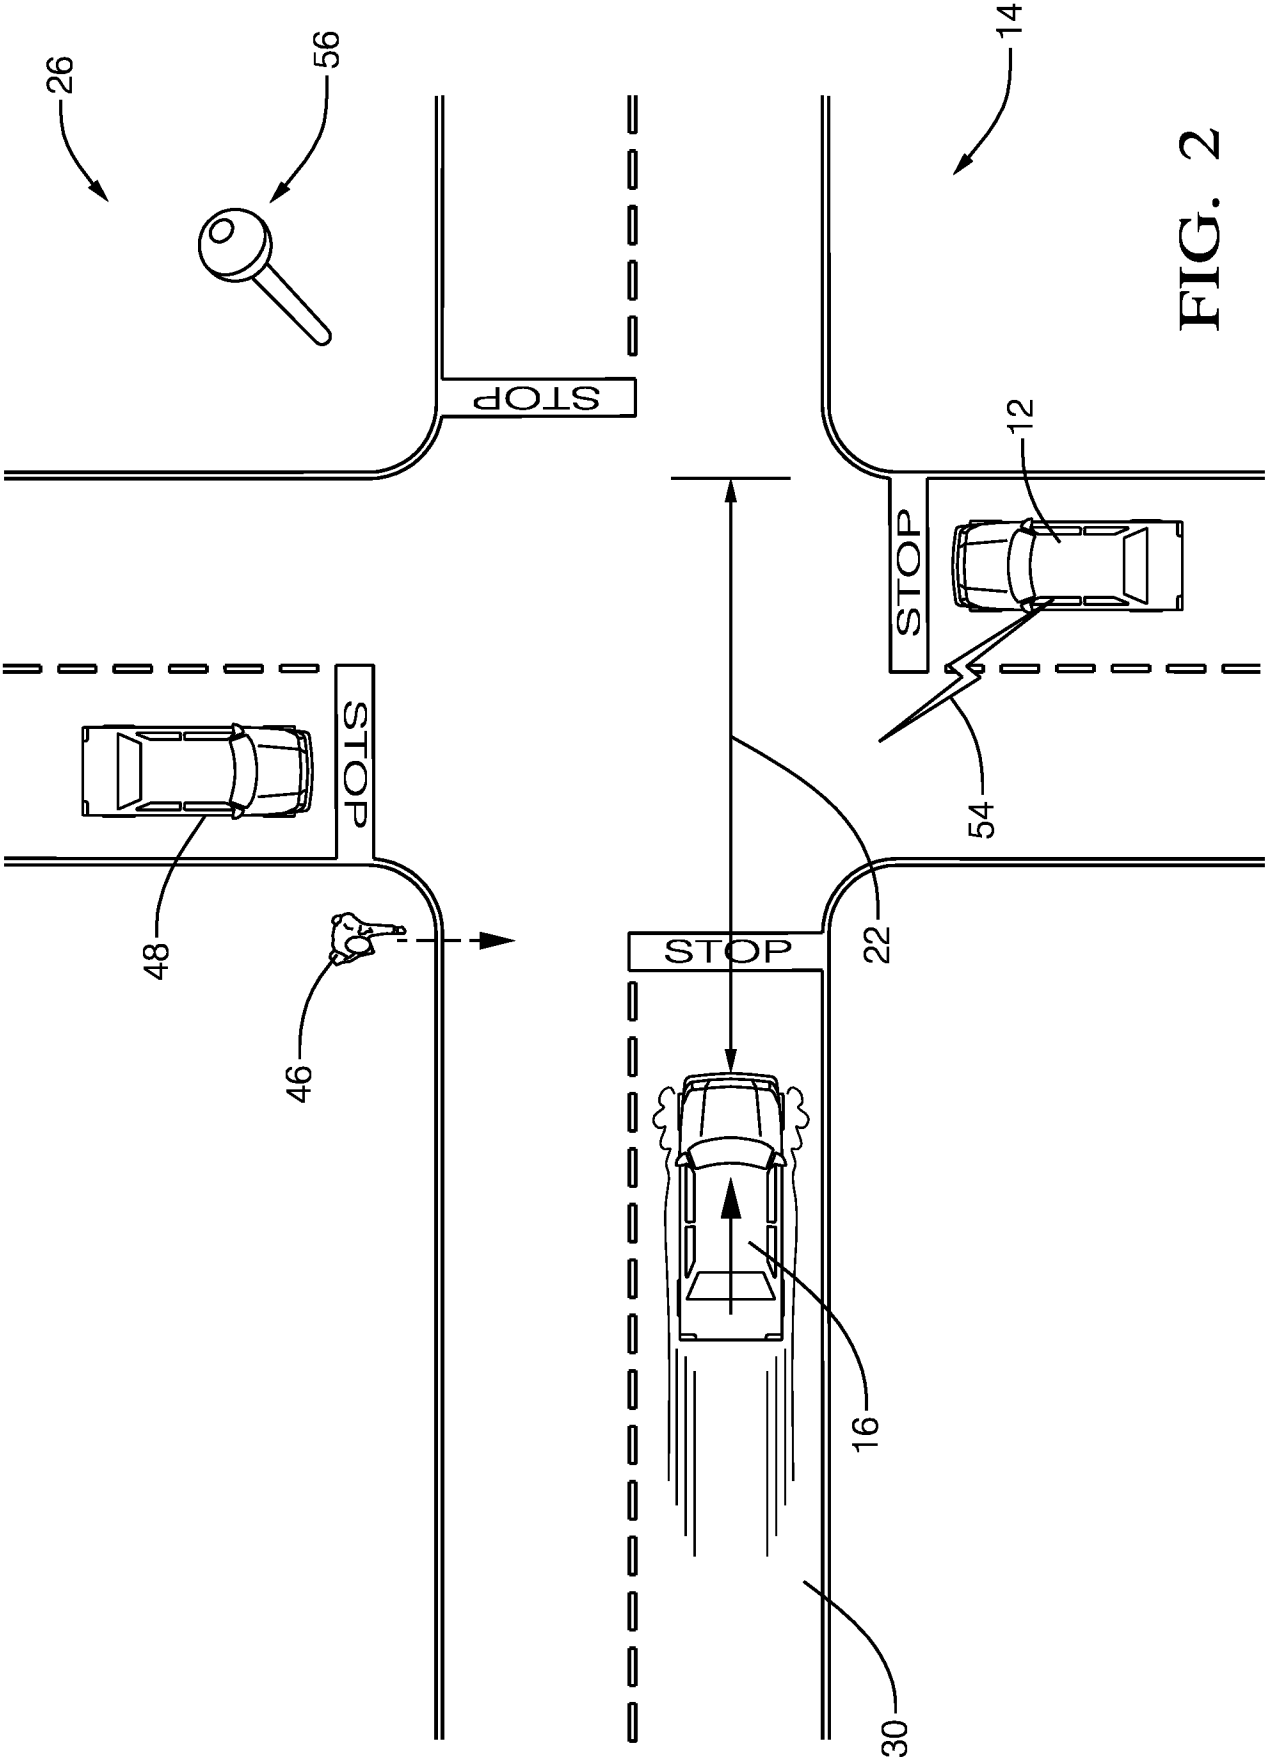


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/031004**A. CLASSIFICATION OF SUBJECT MATTER****G08G 1/16(2006.01)i, G08G 1/0967(2006.01)i, G08G 1/017(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
G08G 1/16; B60Q 5/00; B60R 1/00; G01C 21/26; B60R 21/00; G08G 1/0967; G08G 1/017Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: vehicle-to-vehicle, prevent collision, intersection, speed, distance, time**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014-0327532 A1 (MANDO CORPORATION) 06 November 2014 See paragraphs [0002], [0034]-[0046], claim 1 and figures 1-2.	1
Y		2-4
Y	US 2011-0106442 A1 (UDAY BADULAL DESAI et al.) 05 May 2011 See paragraphs [0021]-[0064], claims 1-3 and figure 6.	2-4
A	US 2011-0153166 A1 (JOHN L. YESTER) 23 June 2011 See paragraphs [0074]-[0093], claims 1-3 and figures 7-9.	1-4
A	US 2012-0016581 A1 (YUTAKA MOCHIZUKI et al.) 19 January 2012 See paragraphs [0031]-[0060], claim 1 and figures 1-3.	1-4
A	JP 2005-189983 A (DENSO CORP.) 14 July 2005 See paragraphs [0031]-[0060], claim 1 and figures 1-3.	1-4



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 July 2017 (20.07.2017)

Date of mailing of the international search report

20 July 2017 (20.07.2017)

Name and mailing address of the ISA/KR


International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

LEE, Myung Jin

Telephone No. +82-42-481-8474



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/031004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014-0327532 A1	06/11/2014	CN 104134370 A DE 102014006486 A1 KR 10-2014-0131226 A	05/11/2014 06/11/2014 12/11/2014
US 2011-0106442 A1	05/05/2011	None	
US 2011-0153166 A1	23/06/2011	EP 2512872 A2 JP 2013-515297 A JP 5548783 B2 US 8818641 B2 WO 2011-075558 A2 WO 2011-075558 A3	24/10/2012 02/05/2013 16/07/2014 26/08/2014 23/06/2011 06/06/2013
US 2012-0016581 A1	19/01/2012	US 9177477 B2	03/11/2015
JP 2005-189983 A	14/07/2005	DE 102004057745 A1 FR 2864675 A1 US 2005-0143889 A1	28/07/2005 01/07/2005 30/06/2005