



(51) International Patent Classification:

B63B 27/04 (2006.01) **B67D 7/00** (2010.01)
B64D 39/06 (2006.01) **B67D 9/00** (2010.01)

(21) International Application Number:

PCT/SE2015/050197

(22) International Filing Date:

20 February 2015 (20.02.2015)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

1450210-8 21 February 2014 (21.02.2014) SE

(71) Applicant: **CELECTIVE SOURCE AB** [SE/SE];
Stamgatan 1, S-125 74 Älvsjö (SE).

(72) Inventor: **SOMMARSTRÖM, Mats**; Stamgatan 1, S-125
74 Älvsjö (SE).

(74) Agent: **NORÉNS PATENTBYRÅ AB**; Box 10198, S-
100 55 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: DEVICE AND METHOD FOR ESTABLISHING A TEMPORARY CONNECTION BETWEEN TWO MOVABLE
OBJECTS

Fig. 1a

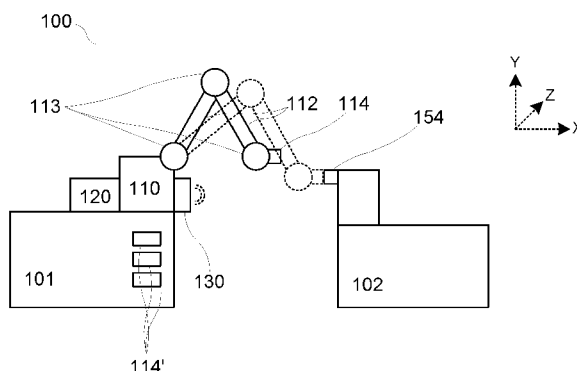

(57) Abstract: Device (100) for achieving a temporary connection between two objects (101,102) which are movable relative to each other, comprising • respective connecting means (114,154), being brought together in order to jointly establish said connection, • a movable robot (110), arranged to continuously displace the first connecting means relative to the first object, • a control means (120), arranged to control the movements of the robot relative to the first object, as well as • a sensor means (130), arranged to continuously read a relative position between the first connecting means and the second connecting means while the said objects move relative to each other. The invention is characterised in that the control means is arranged to, while the objects move relative to each other, continuously control the robot so that the first connecting means is displaced, relative to the first object and up to the second connecting means, and there connects to the second connecting means. The invention also relates to a method.



Device and method for establishing a temporary connection between two movable objects

The present invention relates to a device and a method for establishing a temporary connection between two objects that are movable in relation to each other, particularly where both objects comprise a respective connecting means, and wherein the temporary connection is established by the connecting means being connected to each other.

In many situations, objects that are movable in relation to each other need to be connected, such as various vehicles which are movable relative to each other or a moving vehicle that is movable to an installation on land which is fixed as such. It is also common that there is a need for such temporary connections to be established and maintained for a period of time during which the objects are not only movable, but are actually moving relative to each other.

For example, systems are previously known for automatic mooring of boats at quays, which systems retain the boat in question while a connection for, for example, fresh water supply and electricity, is established and maintained.

US 2010272517 discloses a system of this type, wherein a boat is softly captured by a mooring means of a quay, which is pushed out to the boat's hull and then reduces the speed of the boat towards the quay by pressing against the hull. The mooring means may comprise suction cups.

US 821 526 discloses a similar system, in which a mooring means actively follows the movements of the boat while the boat is being moored.

For land based vehicles, it is known, for example from US2011082612, to detect the position of such a vehicle, to engage with it and to bring it into a position in which an electrical connection can be established between the vehicle and a charging station.

Within the same earlier technical field it is known to use a multi-axis robotic arm to automatically move a connector to a vehicle and there to establish an electrical connection.

5 Within the field of avionics, it is known, for example from US20100282912, to actuate a first movable object, in the form of an aircraft, in relation to a second moving object, in the form of a second aircraft, such that a connection between the objects is established by means of respective connecting means.

10 It would be desirable to provide a flexible and automatic way to make a connection between two objects that are movable in relation to each other, which objects can be allowed to move relative to each other in an at least partially unpredictable manner while a connection is being established and maintained.

15 Furthermore, in many applications for example within the field of public transport, such as electrically driven traffic ferries and coaches, it is desirable to transfer as much electrical energy as possible to a craft during a limited charging time during which the craft exists at a loading station. This is especially a problem because it requires significant investments to provide a charging system that can transmit high power electrical energy.

20

The corresponding problem exists, for example, for boats and ships in sea locks, where there is also limited time for filling and draining of water and the like.

The present invention solves the above described problems.

25

Hence, the invention relates to a device for providing a temporary connection between two objects that are movable in relation to each other, wherein the first of said objects comprises a first connecting means and the second of said objects comprises a second connecting means, whereby said temporary connection is established by the two connecting means being brought together and connected to each other, wherein the device
30 further comprises a movable first robot, arranged to continuously displace the first con-

necting means relative to the first object, and a control means, arranged to control the movements of the first robot and as a result the said displacement of the first connecting means relative to the first object, wherein the device further comprises a sensor arranged to continuously read the relative position between of first object or the first connecting
5 means and the second connecting means while the said objects are moving relative to each other, which device is characterised in that the control means is arranged to, while said first and second objects move relative to each other, continuously control the first robot so that the first connecting means is displaced relative to the first object and up to the second connecting means, and there connects to the second connecting means so
10 that said temporary connection is thus established.

Furthermore, the invention relates to a method for providing a temporary connection between two objects that are movable in relation to each other, wherein the first of said objects comprises a first connecting means and the second of said objects comprises a
15 second connecting means, wherein said temporary connection is established by the two connecting means being brought together and connected to one another, wherein a control means continuously controls the movements of a movable first robot so that the first connecting means is thereby displaced relative to the first object, wherein a sensor means continuously reads a relative position between the first object or the first connect-
20 ing means and the second connecting means while said objects are moving relative to each other, which method is characterised in that, while said first and second objects move relative to each other, the control means continuously controls the first robot so that the first connecting means is displaced relative to the first object and up to the second connecting means, and there connects to the second connecting means so that
25 said temporary connection is thus established.

In the following, the invention will be described in closer detail, partly in connection to the accompanying drawings, in which

Figure 1a illustrates a first embodiment of a device according to the invention, from the
30 side;

Figure 1b illustrates a second embodiment of a device according to the invention, from the side;

Figures 2a and 2b illustrate a third embodiment of a device according to the invention from above and from the side, respectively;

5 Figures 3a-3c illustrate three different successive steps performed using a fourth embodiment of a device according to the invention, from above;

Figures 4a to 4g illustrate various types of connections, from the side;

Figures 5a-5c illustrate three different successive steps using a fifth embodiment of a device according to the invention, from above;

10 Figure 6 illustrates an activating means according to the invention, from the side;

Figure 7 is a flow diagram illustrating a method according to the invention; and

Figure 8 illustrates a sixth embodiment of a device according to the invention, from the side.

15 Figures 1a and 1b show two respective diagrams of respective preferred embodiments of devices according to the present invention. Figures 1a and 1b share reference numbers for corresponding parts.

The device 100 is thus arranged to provide a temporary connection between a first 101
20 and a second 102 object, which are movable relative to each other. The first 110 of said objects comprises a first connecting means 114, and the second 102 of said objects comprises a second connecting means 154. The said temporary connection is established by the two connecting means 114, 154 being brought together and connected to each other.

25

A connection in the sense of the invention does not only, preferably not primarily, preferably not at all, constitute a mooring of or between the objects, but aims at transferring a medium or energy from one object to the other. See below for examples.

30 The device 100 further comprises at least one mobile robot 110, arranged to continuously move the first connecting means 114 relative to the first object 101, and a control means

120, arranged to control the movements of the robot 110 and thus said movements of the first connecting means 114 relative to the first object 101.

5 Additionally, the device 100 comprises a sensor means 130, arranged to continuously read a relative position between the first object 101 or the first connecting means 114 and the second connecting means 154 while the two objects 101, 102 move relative to each other.

According to the invention, the control means 120 is arranged to, while said first and second objects 101, 102 move relative to each other, continuously control the movements
10 of the robot 110 so that the first connecting means 114 is displaced, in relation to the first object 101 and up to the second connecting means 154, and there connects to the second connecting means 154, so that said temporary connection thereby is established. Figures 1a and 1b both illustrate, using broken lines, the situation when the temporary connection has been established.

15 The different elements 110, 120, 130 are in communication with each other.

Thus, the first connecting means 114 is movable relative to the first object 101, via the robot 110. In Figures 1a and 1b, the robot 110 is illustrated with a number of rigid seg-
20 ments 112 that are movable by arranged joints 113, but it will be appreciated that other types of robots can be used, such as traverse or crane robots, see below. Since the sensor means 130 is arranged to read the relative position of the second connecting means 154 relative to the first connecting means 114, or in relation to the first object 101, and as a result, since the robot 110 can give feedback regarding a position of the connecting means
25 114 relative to the object 101, indirectly in relation to the first connecting means 114, the control means 120 can transmit signals to the robot 110 in order to displace the first connecting means 114 in a direction towards and up to the second connecting means 154, to a position in which the said temporary connection can be established.

30 In Figure 1b the likewise preferred alternative is illustrated that also a second robot 150 is used, in combination with a control means 160 and a sensor means 170. The robot 150,

the control means 160, the sensor means 170, the segments 152 and the joints 153 correspond to and have the corresponding function as the robot 110, the control means 120, the sensor means 130, the segments 112 and the joints 113, respectively. The robot 150 is thus arranged to move the connecting means 154 relative to the object 102; the sensor means 170 is arranged to continuously read a relative position between the object 102 or the connecting means 154 and the connecting means 114 while the objects 101, 102 move relative to each other; and the control means 160 is arranged to control the movements of the robot 150 and thus the said displacement of the connecting means 154 relative to the connecting means 114.

Thus, the robots 110, 150 cooperate in this case, in order to together cause the connecting means 114, 154 to approach each other and to assume a position relative to each other in which the connection can be established. The cooperation can be achieved by the control means 120, 160 acting independently of each other, or by the control means 120, 160 communicating with each other, in an as such known manner, such as using wireless Internet, in order to coordinate the displacement operation. What is said in the following regarding a device with a single robot applies mutatis mutandis to a configuration in which two robots work together as is exemplified in figure 1b.

An important aspect of the invention is that the first connecting means 114 is moved up to the second connecting means 154, and there connects to the second connecting means 154, while said first and second objects 101, 102 move relative to each other. In other words, the objects 101, 102 are not only movable relative to each other, they actually move while the connecting means 114, 154 are brought together, and preferably also while the connection is established, either by the object 101, the object 102 or both moving relative to a fixed coordinate system.

Such a device makes it possible for a connection to automatically be established between objects of different types that are movable relative to each other, which in many such cases can lead to significantly improved security and/or comfort for an operator of one 101 and/or the other 102 of said objects.

Furthermore, the use of such a device, by means of the sensor means 130, the control means 120 and the movable robot 110, may result in that a connection can be established even before the objects 101, 102 have reached a stable position relative to each other. As
5 a result, a much more flexible way to establish a temporary connection between the objects 101, 102 is achieved, which flexibility in turn can be used to increase the efficiency of transmitting a medium between the objects 101, 102.

Such efficiency gains and other advantages will be more fully understood by the subsequent part of the description, in which the invention will be made further concrete by
10 means of a number of exemplary embodiments.

As regards the guide means 120, it may be of any suitable type, and preferably comprises a microprocessor, a digital memory, at least one input for measurement data or position
15 data and at least one output for controlling the movements of a robot. A control software is arranged to be executed on the control means hardware and thus to perform the said control as such, based on a number of predefined rules and patterns. The control device is in contact, for digital communication of information, with other parts of the device 100, such as with the sensor means 130 and the robot 110.

20 The sensor means 130, which is arranged to sense the position of the connecting means 154 in relation to the object 101, may likewise be of different types. Preferred sensor means include such sensor means that operate without contacting the connecting means 154, such as optical sensor means, comprising one or more cameras in combination with
25 an image analysis software arranged to identify certain previously known visual markers on the connecting means 154, such as text indicating the identity of a craft, such as the IMO number (International Maritime Organization) of a vessel, or known structures that are located at known positions relative to the connecting means 154; laser based or ultrasonic based detection means, arranged to scan a surface comprising the connecting
30 means and/or to identify a structure of the surface and/or a distance to such a surface; an

infrared camera; or the like. Radar technology, long-range RFID or the like can be used to identify an approaching object, which can thereafter for example be identified visually.

It is preferred that the sensor means operates in two stages, the first stage involving the detection, and preferably also identification, of an approaching vehicle. This may be performed using radar, AIS, long-range RFID or by other means, above. The second step involves visually identifying the location of the vessel, and especially the position of one or more connecting means on the vessel.

Examples of suitable means for such visual identification include an industrial camera, preferably for detecting infrared light alternatively equipped with its own light source such as a laser light source, such as the camera IPR438ESX commercially available from the company Meritilin, Taiwan. Such a camera may for example be used together with a piece of software such as that commercially provided by Tordivel AS, Norway, under the trade name Scorpion Vision.

It is preferred that the objects 101, 102 are movable relative to each other, and also that they move relative to each other during the said movement of the means 114 relative to the means 154, along at least two dimensions of motion, such as across a surface, preferably along at least three dimensions of motion X, Y, Z, such as in a space. As to the control means 120, it is preferably arranged to control the movement by the robot 110 of the means 114 along at least two, preferably three, dimensions of motion X, Y, Z, and most preferably at least along as many dimensions as the number of dimensions along which the objects 101, 102 move relative to each other during said movement. This also applies to the number of operating dimensions along which the robot can displace the connecting means 114.

Figures 2a, from the top, and 2b, from the side, illustrate an exemplary embodiment of the invention in which one 201 of the two objects is fixedly arranged and comprises a robot 210, while the other object 202 is movable relative to the first object. In the present example, one 201 of the objects is permanently installed on a quay 203, and the other

object 202 is permanently installed on a boat 204 or a vessel that floats on a water surface next to the quay. It is preferred that the connection that is established in accordance with the above described is a connection with the purpose of delivering, between the objects 201, 202, electrical energy, fresh or waste water and/or powder, gaseous or liquid supplies such as methane gas, and food. For example, the electrical energy may be supplied to the vessel 204 via an electrical connection and electrical cables; fresh water may be supplied to the boat 204 via a pressurized water supply and water pipes; waste water may be removed from the vessel 204 via a connection which comprises an opening in which a hose is inserted into and sucks the waste water out from the vessel 204; or supplies may be delivered to the boat 204 via a corresponding connection, but wherein the hose which is inserted into the opening is arranged to deliver such supplies into the boat 204.

The first object 201 can also be fixedly mounted on a floating pier, or on a service boat. In these cases, hence, both objects 201, 202 are movable relative to each other and to the fixed coordinate system (X, Y, Z). In all these cases, the connection may be established despite the fact that, and while, the objects 201, 202 move relative to each other, which facilitates efficient delivery of the above types of substances at piers and in harbours.

The connecting means 214 and 254, as well as the control means 220 and the sensor means 230, are similar to the above-described parts 114, 254, 120 and 130, as is the fixed coordinate system (X, Y, Z).

For example, when the device 200 is installed for use at a quay, but also in other embodiments, when the position of the second object can vary over a relatively broad area in relation to the first object at the time of a desired connection between the objects, it is preferred that at least one of the robots is fixedly mounted on a coarse adjustment device, by means of which the robot 210 and/or the first connecting means 214 is displaceable in at least one direction, preferably at least two directions, relative to the first object 201. The controller 220 is then arranged to control the position of the coarse adjustment device relative to the second object 202, and also to control the movements of the robot

210, relative to the coarse adjustment device, to thus fine tune the position of the first connecting means 214 relative to the second connecting means 254.

Such a coarse adjustment device enables the device 200 to be quickly adapted to the
5 general position for the establishment of the connection, and can thereafter establish the connection with high efficiency and accuracy once the coarse adjustment is completed. It is also preferred that the fine tuning with the help of the robot 210 is commenced before the coarse adjustment is completed, so that the fine-tuning can be completed with satisfactory precision only a short time after the coarse adjustment is completed. This is
10 preferably done by the control means 220 using existing information regarding the final position for the coarse adjustment as a basis for an approximate calculation in advance of the movements called upon by the fine-tuning.

The coarse adjustment device preferably comprises a linear path 215a along which a
15 carriage 215b carrying the robot 210 can be brought, by means of electric motors and as controlled by the control means 220, in figures 2a and 2b along the Y direction.

In a particularly preferred embodiment, also illustrated for exemplary purposes in figures 2a and 2b, the first object 201 is fixedly installed adjacent a boat or ship sea-lock, where
20 the water surface level is variable (Z direction). In this case, preferably the fixed system object 201 further comprises a height adjustment means on which the robot 210 is mounted. The height adjustment means comprises preferably a platform 215f, supported by an electrically driven hoist means 215e, which is controlled by the control means 220, and which in turn is supported by a carriage 215b of the said coarse adjustment device.
25 The platform 215f then carries the robot 210, which in turn is used for the fine-tuning.

In the illustrated example, the coarse adjustment device further comprises a carriage 215d, which rests on the carriage 215b and is supported by an electrically driven linear displacement device 215c by which the carriage 215d may be linearly displaced relative to
30 the carriage 215b in the X direction, under control of the control means 220.

In other words, the robot 210 is itself displaceable in three perpendicular, or substantially perpendicular, directions, in the illustrated example the X-, Y- and Z-directions. It is also possible for the paths 215a, 215c and the hoist 215e to follow respective curvilinear paths, depending on the geometric conditions at the quay 203 or the location where the connection is to be established.

It is further preferred, in the said example with a sea-lock, that the control means 220 is arranged to continuously control the position of the robot 210 in the vertical direction (Z-direction), by controlling the said height adjustment means to correspond to the actual level of the water surface. This control is preferably conducted during the above-mentioned coarse adjustment phase.

It is particularly preferred that the control means 220 is arranged to, in a first step, control the height adjustment means to a position vertically corresponding to the current level of the water surface, and in a second step to control the height adjustment means to maintain the controlled height position, irrespective of any ongoing water surface level changes, while the connection is being established and maintained. This may mean for example that a ship arrives at the robot 210, which is then coarsely adjusted to the correct position in the Y direction, to correspond to a current position of the connecting means 254, as well as in the Z-direction, depending on the current water surface level. While the connection is being established, and also thereafter, the water level rises or sinks, as a result of the normal operation of the sea-lock, whereby the Z-position of the robot 210 is continuously coarsely adjusted to substantially correspond to the water surface level in each moment. This means that the connection can be established and maintained regardless of the current operating status of the sea-lock, providing better opportunities for planning and efficiency of maintenance and service of boats and ships passing through and being present at the sea-lock.

In figures 2a and 2b, the local action radius 216a of the robot 210 is illustrated in the current, coarsely aligned, position of the robot 210. Also illustrated is the robot's 210 global action radius 216b, when also taking into account the possibility of coarse adjust-

ment of the robot 210. It is noted that the coarse adjustment device extends the total action radius of the robot 210.

As mentioned, in figures 2a and 2b, the object 202 is fixedly installed on a boat 204, which boat 204 can be seen as a vehicle which is movable on a surface (the water surface). In this case, the surface itself is movable, in that the water level varies as a result of waves, tide, sea-lock activity and so on. The situation is different on land, where the ground forms a solid surface, and wherein the vessel is a land-based vehicle such as a car, a bus, a truck, a train or the like.

When one of the objects is permanently installed on the vehicle, it is preferable that the second object is a permanently installed station for, through the connection that is established between the objects and between the objects, supplying electrical energy, fresh or waste water and/or supplies, or for collecting and removing exhaust gases from an exhaust outlet of the vehicle in question. The latter is for example useful in parking garages, workshops and the like, where a connecting means in the form of an exhaust pipe of an arriving vehicle automatically can be connected by means of a robot, to a corresponding connecting means in the form of a suction muff for extraction of exhaust fumes from the exhaust pipe for disposal. In this case, the robot which controls the position of the suction muff relative to the position of the exhaust pipe can for example be arranged suspended in a coarse adjustment device comprising a linear displacement path which runs along the ceiling along a roadway in the garage or workshop.

As mentioned above, in alternative embodiments, the two objects can both be installed on respective vehicles such as floating bridges, boats or ships, floating on a common water surface. As an alternative to this, one of the objects can be permanently installed on the ground or on a building while the other object is installed on a flying craft, or both objects may be installed on respective flying crafts. When the connection is established in these cases, the said respective flying craft is in a respective flying state, and thus above the ground, and the connection is a connection between the objects to deliver electrical energy, fresh or waste water and/or supplies. In a particularly preferred embodiment, one

of the objects is an electrically powered aerial vehicle, such as a so-called drone, such as an unmanned helicopter, the battery of which is charged by electrical power supplied through the connection from a charging station installed on the ground, on a building or on a flying vessel carrying a charging station. For example, such drones may be used to distribute water for firefighting, or different pesticides agents, fertilizers and so on as used in agriculture.

Figures 3a-3c illustrate a particularly preferred embodiment, in which the objects 301, 302 can assume a parked position (figure 3c) relative to each other, in which the objects are arranged so closely spaced that the robot can maintain the connection, and wherein the objects may also assume a different, separate position (figure 3a), in which the objects are at a distance from one another, preferably at such a distance that it is not possible to establish the connection because the incoming object's connecting means is beyond the reach of the robot connecting means. It is preferred that at least one of the objects in the parked position moves about a respective equilibrium position or a centre of motion relative to the other object, and that such equilibrium positions or centres of motion are fixed relative to each other or to the position of the second object in the parked position. Examples of equilibrium positions or centres of motion include when a vessel, which is moored using mooring lines, moves within its limited room for manoeuvre next to the immobile quay; when a helicopter hovers above a charging station arranged on solid ground; and when two boats are moored one to the other and move within the limited relative room for manoeuvre allowed by the mooring.

In a first example of such a configuration, a service boat with a connection robot according to the invention, approaches and moors to a vessel comprising a fixedly mounted connecting means for supplying fresh water. In this case, the parked position is constituted by the boat being stably moored at the ship, but where both the service boat and the ship moves around a respective centre of motion, which centres of motion are immobile in relation to each other. The separated state is constituted by the service boat not yet having reached the ship, but is located at a distance therefrom.

In a second such example, a car arrives at a repair shop, and is connected to an exhaust fume collecting connecting means mounted on a robot according to the above, whereby the car, after the entrance into the workshop, is stationarily parked above a working pit. The parked position is thereby reached when the car reaches an immobile position above
5 said working pit, whereby both objects therefore are immobile relative to each other, and the separated position is constituted by that the car not yet having come to a standstill above the working pit, but is arranged at a distance therefrom.

The third example is when a boat or a ship arrives at a quay at which it is to be moored or
10 lie quietly otherwise, and where a connection is established between the boat or ship and a permanently installed device on the quay. In such case, the parked position is constituted by the boat or ship lying still beside the quay, whereby the boat or ship, therefore, revolves around a centre of motion which is immobile relative to the fixedly installed robot on the quay. The separated state, finally, is constituted by the boat or ship being at
15 a distance from this parked position.

Figures 3a-3c illustrate a device 300 according to the said third example, wherein an object 302 according to the invention is fixedly mounted on an electrically propelled vehicle ferry 304. The object comprises a connecting means 354 arranged to supply
20 electrical current through the connecting means 354 to a battery arranged to provide the propulsion means of the ferry with energy for forward operation. The object further comprises a wireless communication means 371 for wireless communication with a corresponding wireless communication means 321 disposed by the quay 303 and as part of the second object 301. The communication means 371, 321 are conventional as such,
25 and may for example be a Bluetooth connection; means in themselves not primarily intended for mutual communication but rather for identification, such as an RFID connection or the like; an acoustic connection or a wireless internet connection. 380 indicates a wireless network or a wireless communication link through which communication can take place, such as the Internet.

The object 301 further comprises a permanently installed robot 310, a sensing means 330 and a control means 320; and the quay 303 comprises a resilient shock absorber 305 or the like, against which the ferry is pressed in order to lie still in the parked position. The directions X and Y are the same as in the other figures.

5

The objects 301, 302 are thus arranged to be brought from said separated position to said parked position. The control means 320 is further arranged to control the robot 310 so that the connection is established while the objects 301, 302 move from the separated position towards the parked position, and before they reach the parked position.

10

Figure 3a illustrates such a separated position, in which the ferry 304, which for example is heading towards the quay 305 to drop off and take up new vehicles for transport across a watercourse, is located so that the connecting means 354 is out of the robot's 310 reach 316a for contact with the connecting means 314. Figure 3b illustrates the situation at the time of establishment of the connection. The ferry 304, and thus the object 302, has not yet arrived at its parked position adjacent the quay 303, where vehicles can be dropped off and taken up, but is in such a position that the connecting means 314 just reaches the connecting means 354 so that connection is possible when the robot 310 is displaced to an extreme position.

20

By thus utilizing the robot's 310 freedom of movement in combination with the sensing of the sensor means 330 and the logic of the control means 320, an electric connection can be accomplished earlier than had been possible with prior art technology. This difference is in many cases essential. When it comes to an electric vehicle ferry, for example, the last metres of travel before the ferry arrives at the quay may take tens of seconds, while the total charging time ashore may involve less than 10 minutes. The additional charging time achieved by the invention thus represents a significant share of the total charge time.

25

Correspondingly, it is further preferred that the control means 320 is arranged to control the robot 310 so that the connection is broken during the movement of the objects 301, 302 from the parked position and, after the objects 301, 302 have left the parked position,

30

to a second separated position, said second separated position being similar to that described above and wherein the objects 301, 302 again are located at a distance from each other.

5 This can be done in several different ways, as illustrated in figures 4a-4d, all of which, with common reference numerals, illustrate an arm or a segment 412 of a robot 410 of an object 401, which robot 410 controls the position of a connecting means 414 arranged to, together with a connecting means 454 arranged on another object 402 which is movable relative to the first object 401 even after the connection has been established, establish
10 the temporary connection. The connector 414 is supported by a supporting part 416 of the robot 410, and the connecting means 454 is supported by a supporting part 456 of the object 450.

Figure 4a illustrates the case that, after the connection is established, the connecting
15 means 414 is maintained at the connecting means 454 by means of a locally arranged fastening means 454a, which for instance, depending on the connection type, can be constituted by cooperating snap-lock means or magnetic means on the respective objects 414, 454. In this position, the control means (not shown) will not actively control the movements of the robot 410, instead the movements R2 of the connecting means 414 will
20 passively follow the movements R1 of the connecting means 454. Once the connection is to be broken, the object 401 and/or the object 402 causes the engagement of the attachment means 454a to be released, whereby the connecting means 414 may be brought out from the connection and away from the connecting means 454. For many types of connections, this is a simple and therefore preferred way.

25

In an alternative embodiment, the control means is instead arranged to actively and continuously control the movements of the robot 410 so that the part 416 of the robot 410 which is arranged to manoeuvre or maintain the connecting means 414 is stationary relative to the connecting means 454.

30

A first example of this is illustrated in Figure 4b, in which the control means is arranged to actively and continuously control the robot 410 so that the connecting means 414 is stationary, while the connection is maintained relative to the connecting means 454. In other words, the movements R2 of the object 414 will actively follow the movements R1 of the object 454. When the connection is to be broken, the control means may cause the part 416 to simply bring the connecting means 414 away from the connecting means 454. In this case, no fastening means is required, although it is possible to combine the embodiment of figure 4a with that of figure 4b. It is preferable that the robot maintains a certain pressure between the connecting means 414, 454.

A second example of this is illustrated in figure 4c, wherein the part 416 is arranged to release the connecting means 414 after the connection has been established, and wherein the control means then actively and continuously controls the movements of the robot 410 so that the movements R2 of the part 416 follow the movements R1 of the connecting means 454 relatively closely, such as at most 0.2 meters away. The actual connection is secured with a cable 414a or the like, which runs from the connecting means 414 and to the object 401, and through which electricity, fresh water or the like can be supplied. Once the connection is to be broken, the control means may control the position of the part 416 relative to the means 454 so that the part 416 can be re-engaged with the means 414 and then bring the latter out from the connection and away from the means 454. It will then be possible to break the connection at short notice and in a controlled manner, since the part 416 can always be kept closely to, and synchronized with respect to speed with, the means 414.

Thus, the robot 410 is in this case arranged to, after the connection has been established, free itself from the connecting means 414 so that the connecting means 414 is then freely movable, not counting said active control, within at least a limited area or volume relative to the robot 410.

Another embodiment that also involves such freedom of movement is illustrated in figure 4d, wherein the control means is not actively controlling the position of the part 416 or

means 414, but the movements R1 of the body 454 are allowed to be independent, or at least independent within a limited volume, by the movements of the robot 410. Instead, the part 416 has released the means 414, in a manner corresponding to that described above in connection to figure 4c, and a flexible fastening means 414b, preferably comprised in the robot 410, connects the robot 410 to the connecting means 414. The connection is secured, as is the case in figure 4c, by means of a cable 414a or the like. When the connection is to be broken, this is then done by way of the fastening means 414b being arranged to, using a pulling force, break the connection when the connected objects 401, 402 move from each other, by being arranged to be stretched and then pulling the means 414, 454 apart. It is preferred that a collecting means, for example comprising a reel 414c, is arranged to capture the means 414 and to return it into appropriate engagement with the part 416 in order to establish a subsequent connection. As illustrated in figure 4e, it is also preferred that the control means is arranged to, before the breaking of the connection, control the robot 410 to manoeuvre the connecting means 414 into a position in which the angle A between the stretched fastening means 414b and a pulling apart direction of the connecting means 414 out of engagement with the connecting means 454 at the time of the said break falls within a predetermined range within which damages are not risked for any of the connecting means 414, 454 as a result of said applied pulling force and said pulling apart.

Figures 4g and 4f show, in sequence, another preferred option, wherein the control means first (figure 4f) is arranged to bring the means 416 into a position in the vicinity of the object 450, and within reach of a capturing or receiving means 457 of the object 450, which means 457 is arranged to engage with the connecting means 414 and to bring this up to and into engagement with the connecting means 454. Hereby, the means 414 is first loosened from the means 416, by the means 416 or the means 457. Thereafter, the control means preferably actively controls the movements R2 of the means 414 so that the means 414 is held stationary relative to the means 457. Alternatively, a control means of the object 450 controls a gripping means 457a of the means 457 so that it is advanced to and is brought into engagement with the means 414, which thus results in a controlled movement of the gripping means 457a relative to the object 450.

Then (figure 4g), the means 457 brings the first connecting means 414 up to and into engagement with the second connecting means 454, so that the connection is thus established. Once the connection is to be broken, this can occur in any of the ways described above.

Thus, in this embodiment it is the first robot 110 that controls and/or hands over the connecting means 114 to the second robot 150, see figure 1b. The second robot 150 then connects the connecting means 114, 154. Thus, for example, a custom robot installed on a vehicle can by itself handle complicated connection procedures comprising doors or the like. Moreover, the overall working range across which the connection may be maintained is extended, and the first robot 110 may assist in handling the wiring/tubing when the distance between the robots 110, 150 becomes large.

Figures 1a-1b and 3a-3c illustrate a respective robot 110, 310 fixedly mounted on a support, which robot comprises at least two, preferably at least three parts, the relative angles of which can be controlled. An example of a type of robot that is useful for this and other types of applications of the present invention is the one sold by ABB under the trade name IRB 2600.

Figures 2a-2b illustrate, on the other hand, a robot 210 which includes at least two, preferably at least three parts, which are displaceable relative to each other. Such a robot preferably also includes, in addition to the displaceable sections, at least one, preferably at least two, preferably at least three, parts, the relative angles of which can be controlled. Examples of suitable robots with movable parts include the one sold under the trade name IRB 6620LX.

In general, it is preferred that the robots described herein have several axes and are servo controlled, and are preferably also of standard type.

These exemplifying robots can also advantageously be used in modified form, such as an IRB 2600 mounted on a pair of traverse cranes and a hoist, as illustrated in figures 2a-2b, or an IRB 6620LX with extended arm beams and supplemented with several gripping means and tools for different types of connecting means.

5

In general, it is preferable to use linear traverses similar to the device 215e when larger vessels moor at the quay with the long side towards the quay, while robots mounted permanently on the quay can advantageously be used when smaller boats moor with the bow or stern to the quay.

10

Figures 5a-c illustrate, for exemplifying purposes, a further preferred embodiment, in which an electrically propelled bus 504, on which an object 502 of the type described above is permanently installed, travelling along a bus route passes another object of the type described above in the form of a bus stop 501 equipped with a charging station for a battery arranged in the bus 504. The bus stop 501 is further equipped with two cooperating robots 510 and 510', which themselves, and also their position along with respective rails 515a, 515b, are controlled by a control means (not shown) similar to the above described control means. The robots 510, 510' are provided with respective parts 516, 516' for engaging with and supporting a connecting means 514 intended to connect an electric cable 514d to a connecting means 554 on the bus for the transfer of electrical energy to the bus 504 battery while the bus 504 is present at or near the stop 501. The cable 514d is held taut by a per se conventional stretching means 514e.

15

20

A device 500 such as the one illustrated in figures 5a-5b comprises at least two movable robots 510, 511', both of which in a preferred embodiment are arranged to cooperate with each other, so that one of them is arranged to establish said connection and then to free itself from the connecting means 514, while another one is arranged to subsequently break the connection, preferably by again grabbing hold of the connecting means 514 and bringing it away from the means 554.

25

30

When the connecting means 554 of the object thus comes within reach of the robot 510 (figure 5a), the robot 510 brings the connecting means 514 forward, in a manner corresponding to that described above, up to the connecting means 554, and there establishes the connection, whereby the charging commences. The connection is preferably established, as above, before the bus 504, and thus the object 502, finally have arrived at a parked position adjacent the stop 501, for instance when the bus is about to swing in towards the bus stop but is within reach of the robot 510.

Thereafter, the robot 510 releases the engagement with the connecting means 514, which is thereafter supported by the engagement with the connecting means 554 while the bus is moving forward towards a parked position (figure 5b) adjacent to the bus stop 501. Meanwhile, the battery of the bus 504 is charged via the cable 514d.

When the bus 504 is again about to leave the bus stop 501 (figure 5c), the robot 510' brings the part 516' forward to the connecting means 514 and engages with the same, breaks the engagement between the means 514 and means 554 and removes the means 514 from the means 554. This preferably occurs after the bus 504, and thus the object 502, has left its parked position at the bus stop 501 and is on its way out from the bus stop 501, but while the connecting means 554 is still within reach of the robot 510'.

The robot 510' can then, for example, switch places with the robot 510, by the robots 510, 510' sliding along the rails 515a, 515b, after which the robot 510' is prepared to establish a connection with a next bus whose batteries must be recharged.

It is understood that a similar system 500 also can be installed, for example, at a red light in a traffic intersection, so that electric vehicles can be connected and charged during the time they arrive, wait for a green light, and re-start driving. By means of the invention, vehicles in this type of situation are as a result provided with maximum charging time even during short stoppages.

One of the robots 510, 510' may also, as an alternative, establish the connection in a first position along the rails 515a, 515b, then follow the connecting means 554, again along the rails 515a, 515b, when the bus 504 moves forward along the bus stop 501, and then break the connection at a different position along the rails 515a, 515b. This also means that the connection can be maintained during a maximally prolonged time.

Instead of rails 515a, 515b, for example a traverse crane or a cable transport system can be used.

Another embodiment in which a wheeled vessel, which is movable on the ground, is to be connected to an object that is likewise located on the ground, is that the first object is a so called terminal tractor or other towing vehicle, and the second object is a trailer or the like. Terminal tractors are used to quickly and efficiently move trailers in harbours, terminals, transshipment terminals and so on. In this case, a robot is permanently mounted on such a terminal tractor, and arranged, in a manner similar to that described above, to connect and possibly also release the terminal tractor to and from a trailer to be moved. This therefore includes managing connecting means and tubing for a pneumatic brake system, as well as the connecting means and cabling for electrical systems such as braking systems, brake lights, tail lights, turn signals, etc. Using such a system, the connection of the terminal tractor to trailers can be made quickly and with good safety. In connection to the connection itself, such a system may also be arranged to, via said connection, automatically verify the equipment, such as the condition of the brake system.

When the driver thus drives/backs the terminal tractor to the trailer in question, the said robot is arranged to automatically locate connecting means on the trailer, and then to automatically connect hoses, cables and so on to such connecting means even before the tractor and trailer have been connected via the so-called "fifth wheel", that is the coupling or coupling disc used to connect the towing vehicle to trailer.

According to a preferred embodiment, the above described sensor means comprises a camera, which in collaboration with image processing software is arranged to be able to

recognize which type the connecting means, that the connecting means of the robot is to connect to, belongs to, which type is identified from a number of possible ones for which identifying information is stored, for example, in a database of the sensor means. Identification of the said type takes place by identification of visual characteristics such as the shape of the connecting means in question or predetermined visual markers such as two-dimensional patterns, alphanumeric characters, and so on.

In this case, it is preferred that the device includes a selecting means arranged to, based on the identified connection type of the connecting means in question, choose one of several possible connecting means and use this as the connecting means which is advanced by the robot to the identified connecting means in order to there establish the said connection.

In this case, therefore, the object to which the robot is to connect comprises a set of at least two different connecting means, preferably of standard type, and the robot comprises one or more gripping means arranged to locate and engage with a selectable one of said plurality of connecting means.

This is illustrated schematically in figure 1a, wherein three different alternative types of connecting means 114', apart from the connecting means 114, are arranged within reach of the robot 110 so that the robot 110 may pick up a connecting means 114, 114' which is of a type corresponding to the connecting means 154, depending on the type of the latter, as detected by the sensor means 130. It is preferred that the robot also comprises a visual sensor means near the connecting means 114, which follows the movements of the connecting means 114 and thus can be brought into a position near the connecting means 154 to facilitate the identification of the type of the said connecting means 154.

Figure 6 illustrates a further preferred embodiment, wherein a robot 610 comprises a segment 612, a connecting means holding part 616 and a connecting means 614, while an approaching object 602 comprises a connecting means holding part 656 and a connecting means 654. Apart from the connecting means 614, the robot 610 in this case comprises an

activating means 617, arranged to activate the connecting means 654, for example by using a suction cup 617a to open a door 657 which covers the connecting means 654. The control means is arranged to control the robot 610 to, in a first step, using the activating means 617, activate the connecting means 654, and, in a second step, to establish the connection between the means 614, 654. When the connection is subsequently broken, it is preferable that the activating means 617 again deactivates the connecting means 657, for instance by the activating means 617 holding the door 657 open while the connection is maintained, and thereafter closes the door 657 or allows it to be closed.

Such activating means 617 can be designed in many different ways, depending on the type or types of connecting means 654 to be handled by the system according to the invention. For example, a lid may be screwed off, unlocked, or opened, or made available in other ways, such as using a push button or using digitally transmitted instructions given over a communication link, such as the link 380.

In a particularly preferred embodiment, the device of the invention is arranged to establish the above-described connection only in case that the amplitude and/or frequency of the relative movements of the objects in relation to each other during a certain period of time fall within an acceptable, predefined respective range. In other words, the control means 120 is arranged to control the robot 110 so that it establishes the connection not before the objects 101, 102 are sufficiently stationary in relation to each other for a sufficiently long contiguous period of time.

At the same time, the controller 120 is also arranged to, even before this condition is met, actively and continuously control the movements of the robot 110 so that the connecting means 114 is stationary or substantially stationary relative to the connecting means 154. This leads to that an effective balance can be achieved between the desire for long total connection time and, on the other hand, the requirement for safety for connections that are to be established, for example in severe weather at sea, so that a minimum level of safety can be guaranteed. It is furthermore preferred that the control means 120 is arranged to break the connection prematurely in case the amplitude and/or frequency of

the relative movement of the objects 101, 102 exceed predetermined respective values while the connection is maintained, or if the objects 101, 102 for some reason move apart further than a predetermined distance, or if the connecting means 154 is displaced outside of a predetermined safety zone around the object 101, or following specific instructions manually given to the device 100 by operating personnel.

It is also preferred that the information regarding the approaching object 102, such as total weight, current course, acceleration and the like are made available to the control means 120, for example via a communication link such as link 380, and that the control means uses such data to calculate, in advance, an appropriate timing for establishing the connection while maintaining safety.

In this case, the system takes into account the movements of the object as measured by the sensor means 130, and for example the calculated inertia, and the precision and flexibility of the robot, across different parts of its working range, as known ahead of time. Such estimates may for example be constituted by the connection not being established when the approaching object 102 is moving too quickly when the robot is operating in a mode in which the sensitivity to shocks is greater than a certain threshold, which in turn depends on the said speed.

The parameters that can be considered when possible connection timings are pondered will typically vary depending on several factors. For example, relatively larger safety marginals, in terms of speed or position uncertainty, may be required for connection in case multiple operations are to be performed simultaneously or in sequence, such as opening a door and then connecting the connecting means. Additionally, information regarding the current weather, such as waves, wind, ocean currents, snow, ice or icing may be fed to the control means, and then be used to temporarily increase the required safety margins in order to allow a connection to be established at risky weather conditions.

Furthermore, it is preferred that the device 100 comprises a database comprising data regarding various types of movable objects 102 to be handled, and that the sensor means 130 comprises an identification means, which in turn is arranged to automatically identify movable objects 102 of the types for which identifying information is present in the database and that are approaching the object 101. Examples include the optical reading of a number plate on a vehicle, an identified QR code on a ferry or a public transport vehicle, or non-optical remote reading of identifying information such as IMO number, via AIS, RFID or other suitable technique, as described above. The sensor means 130 is in this case arranged to determine the general position of such type-identified objects 102 after the said type identification has been performed. Then, the sensor means 130 is arranged to, by means of said data from the database, determine the position of the connecting means 154 relative to the general position of the object 102. This way, several predetermined types of objects 102 can be accepted by the device 100, something that for example may be useful for different types of boats and ships in locks and quays; for the charging of various types of electrically powered on-road vehicles; and for managing multiple types of connections on the same or different objects 102.

Advantageously, the database can also comprise specific data on the vessel to be connected, such as safety prescriptions and -zones, filling/emptying capabilities, and so on, applying to the ship in question, and that affect how, if, when and in what order different connections are to be established by the device 100.

In a further preferred embodiment, as illustrated in figure 3a, the device 300 further comprises a data communication link 380 between the objects 301, 302, as well as an identification means comprised in the sensor means 130, which is arranged to automatically identify and determine the position of movable objects 102 of the type covered by the database and that are approaching the object 101, which means is similar to the above-described identification means. In this example, however, the sensor means 130 is arranged to receive data regarding the position of the connecting means 354, and preferably also information regarding the type of connecting means 354, via the data communication link 380. Then, the sensor means is arranged to first detect the general position of

the object 102, as described above, and then the position of the connecting means 354 relative to the general position of the object 302, based on the data received via the data communication link 380, from the object 302 to the object 301. Alternatively, this data is received from a central server.

5

Figure 7 illustrates a method according to the invention for providing a temporary connection between two objects that are movable relative to each other, such as those described above. The method uses a system 100 of the type described above. Both objects comprise a respective connecting means, and the temporary connection is established in and by the
10 respective connectors of the objects being brought together and connected to each other. As described above, a control means continuously controls the movements of a mobile robot, such that a first of the connecting means thereby is displaced relative to the corresponding object, and a sensor means continuously detects a relative position between said object or said connecting means and the other connecting means, while the objects
15 move relative to each other.

In a first step, the device is activated, which means that the sensor device is set into a position in which an approaching object is to be identified. The activation may for example be initiated by the existence of the approaching object as identified by radar technology;
20 by visual identification; via radio link, such as via AIS (Automatic Identification System); through so-called Long Range RFID, laser or ultrasound; by the crew of the approaching object via a communication link; at a specified time; or otherwise.

In a second step, the approaching object is identified, which may comprise identification
25 of the type, number and relative position of the connecting means; possibly required activating means; and requested services for which connections are to be established.

In a third step, the robot is prepared. This may comprise type selection of one or more connecting means; one or more cabling- and/or hose systems for connection; one or more
30 activating means to be used; and planning of and possibly also performing coarse adjustment of the position of the robot.

In a fourth step, the connecting means of the approaching object is or are identified, using local sensing such as through visual identification. This location then progresses continuously at least until the connection is established, and the sensed position is used in the subsequent control.

In a fifth step, the control means thereafter continuously controls the position of the connecting means of the robot, while the objects are moving relative to each other, so that it is displaced relative to the object on which the robot is installed and up to the connecting means of the approaching object.

In a sixth step, the temporary connection is established by the connecting means being connected to each other.

In a seventh step, which preferably begins substantially immediately after the sixth step, and preferably before the objects have reached the above described parked position, a medium, such as fresh water, electricity or the like, is transferred between the objects. It is preferred that the sensor means visually checks for malfunction during the transfer, such as for leaks, and stops the transfer in case such malfunctions are detected. It is preferable that the transfer is always terminated before the connection is broken. When electricity is transmitted, the transmission can be terminated at a late stage, such as maximally 0.1 seconds, preferably maximally 0.01 seconds, before the disengagement begins. When liquids, powdery substances or gases are transferred, there is a pressure in the hoses and inertia in the transferred medium, and in the device itself (such as in pumps), so that the transfer needs to be stopped at least 1 second, more preferably at least about 5 seconds, but preferably not more than 10 seconds, before the connection is broken.

In an eighth step, once the transfer is complete, the connection is broken. It is preferable that the object on which the robot is installed determines when the transfer is to be completed, for security reasons.

In a ninth step, the robot is then reset for a subsequent connection to another or again the same object.

- 5 It will be appreciated that all that has been described above regarding a device according to the invention is also applicable to a method according to the invention, and vice versa.

Figure 8 illustrates a preferred system 800 for use when achieving a connection between an object 801 permanently installed on the ground 803, comprising a robot 810, and one
10 object 802 installed on a flying vessel 804. The robot 810 includes a connecting means 814, and the object 802 comprises a corresponding connecting means 854, which operate in a manner that corresponds to the one described above for other embodiments.

According to this embodiment, the flying vessel 804, which is preferably unmanned,
15 further preferably comprises a lifting means 859, such as a rotor, for exerting a lifting force on the vessel 804, which thus can hover over the ground 803 and the object 801. Furthermore, the connection is a connection for loading or unloading of matter, such as liquid, powder or granular material, to or from the vessel 804. In such loading or unloading, the weight of the vessel 804 is affected, why its control device (not shown) for height
20 control must compensate for such a change if the vessel 804 is to maintain its hovering position while the connection is maintained. This in turn means that the control device must be relatively advanced in order to avoid the fluctuations that otherwise easily occur at such weight changes.

25 According to this embodiment, in the object 801 there is comprised a counter force device 818, connected to and controlled by the control means of the object 801. A connecting means 818a of the counter force device 818 is arranged to be connected to a corresponding connecting means 858 of the vessel 804. The connecting means 858 may take the form of a loop or a hook, and the connecting means 818a can be connected by means of the
30 robot 810 in a manner similar to the connection of the means 814. A wire 818b extends

between the means 818a and a tensioning device 818c, which is arranged to keep the line taut 818b at a certain tension.

According to a preferred embodiment, first the means 814 is connected, then the means
5 818a is connected, although it is possible to proceed in the opposite order. When the means 818a is connected to the means 858, so that the tensioning device 818c, which is firmly anchored to the ground 803, maintains a tension between the vessel 804 and the ground 803, the lifting means 859 can lift the vessel 804 against an anvil in the form of said tensioning force.

10 For loading and/or unloading of material, the object 801 is then arranged to, through control of the tensioning device 818c by the control means of the object 801, to compensate via weight changes of the vessel 804 imparted via the loading/unloading, with the corresponding changes in the said tensioning force, so that the force that the lifting means
15 859 must impart to the vessel 804 in order to maintain a specific hovering height of the vessel 804 is maintained substantially constant, even when the weight of the vessel 804 changes due to said loading/unloading. In a preferred embodiment, the control means of the object 801 detects a weight added to or removed from the vessel 804. In another preferred embodiment, the counter force device 818 comprises a tensioning force sensor,
20 arranged to sense said tension force in the wire 818b, which force sensor is connected to and arranged to feed back to the tensioning device 818c, which in turn is arranged to hold the sensed tensioning force constant along the line 818b.

This entails that the control function of the vessel 804 can be made much simpler without
25 the risk of said undesirable fluctuations to occur, which is particularly preferred for unmanned vehicles such as electrically powered drones.

It is preferred that the counter force device 818 for reasons of security comprises a torque lock, so that its engagement with the vessel 804 is broken if the tensioning force along the
30 line 818b exceeds a predetermined limit value. The torque lock is preferably arranged in the connecting means 818a, so that the engagement with the connecting means 858

releases at such high tensioning forces. It is noted that such counter force device 818 does not cause the object 801 to be primarily intended for mooring of the vessel 804, but it is primarily intended to load/unload said matter while the vessel 804 is provided a resistance against which it can lift.

5

Above, a number of embodiments have been described. However, it is apparent to the person skilled in the art that many modifications may be made to these embodiments without departing from the basic idea of the invention.

10

Thus, the principles described in relation to certain embodiments can be applied in the context of many other embodiments, for instance that the communication-based identification according to figure 3a can be used in combination with a charging station for electric vehicles as shown in figures 5a-5c; or that the various options for maintaining a connection described in connection to figures 4a-4e can be freely combined with various
15 embodiments disclosed herein, as applicable. In general, where applicable, all the embodiments described herein can be freely combined.

20

The hoist device 215e may also be used to adjust the height of the robot 210 in relation not only to water surface but also to the various heights of boats or ships which are to be connected.

25

Moreover, the robots described herein may also, apart from several individualized connecting means 114, 114', have several different activating means 617 which are individually adapted for activating different types of connecting means 654, the types of which are
25 automatically detected by use of the above-described sensor means. Such activating means 617 may also comprise multiple cooperating gripping means, etc., in order to perform parallel or sequential activation measures, depending on the type of the connecting means.

30

The communication link 380 may also be used for carrying out the ordering of the various services for the automatic delivery by the object 301, as the replenishment of fresh water

or the provision of shore power, as the craft 302 wishes, before the approach of the object in question. This is useful for example in ports and sea-locks.

5 In addition to vessels floating on water and rolling on the ground, the principles of the invention can also be applied to objects that travel below water, such as underwater vessels, and in space, such as space shuttles and satellites.

Thus, the invention is not limited to the embodiments described herein, but can be varied across the scope of the enclosed claims.

C L A I M S

1. Device (100;200;300;500;800) for providing a temporary connection between two objects (101,102;201,202;301,302;401,402;501,502; 601,602;801,802) that are movable in relation to each other, wherein the first of said objects comprises a first connecting means (114;214;314;414;514;614;814) and the second of said objects comprises a second connecting means (154;254;354;454;554;654;854), whereby said temporary connection is established by the two connecting means being brought together and connected to each other, wherein the device further comprises a movable first robot (110;210;310;410;510;610;810), arranged to continuously displace the first connecting means relative to the first object, as well as a sensor means (130;230;330) arranged to continuously measure a relative position between the first object or the first connecting means and the second connecting means while the said objects move relative to each other, wherein the device further comprises a control means (120;220;320), arranged to control the movements of the first robot and as a result the said displacement of the first connecting means relative to the first object, based on a signal from the sensor means, and wherein the control means is arranged to, while said first and second objects move relative to each other, continuously control the first robot so that the first connecting means is displaced relative to the first object and up to the second connecting means, and there connects to the second connecting means so that said temporary connection is thus established, **c h a r a c t e r i s e d i n** that the control means is arranged to control the first robot so that the connection is maintained while the objects move from a first separated position, in which the objects are located at a distance from each other, towards a parked position, in which the objects are arranged so close to each other that the first robot can reach to achieve said connection and in which respective equilibrium positions or centres of motion about which the objects possibly move are immobile in relation to each other, so that the connection is established before the objects have time to reach the parked position.

2. Device (100;200;300;400;500;600;800) according to claim 1, **c h a r a c t e r - i s e d i n** that both objects (101,102;201,202;301,302;401,402;501,502;601,602;

801,802) move relative to each other across at least two, preferably three, dimensions of motion, and in that the control means (120;220;320) is arranged to control the first robot (110;210;310;410;510;610;810) in at least two, preferably three, dimensions of motion.

5 3. Device (100;200;300;400;500;600;800) according to claim 1 or 2, **c h a r a c - t e r i s e d i n** that one (101;201;301;401;501;601;801) of the two objects is fixedly arranged while the other object (102;202;302;402;502;602;802) is movable relative to the first object.

10 4. Device (200;300) according to claim 3, **c h a r a c t e r i s e d i n** that one (201;301) of the objects is fixedly installed at a quay (203;303) and another (202;302) of the objects is fixedly installed on a boat or a ship (204;304) floating on a water surface by the quay, and in that the connection is a connection for delivering electrical power, fresh- or sewage water, and/or foodstuffs between the objects.

15 5. Device (200;300) according to claim 4, **c h a r a c t e r i s e d i n** that the fixedly installed object (201;301) is fixedly installed by a boat- or ship sea-lock in which the water surface is movable in the height direction, in that the fixedly installed object comprises a height adjustment means on which the first robot (210;310) is mounted, and in
20 that the control means (220;320) is arranged to continuously control the height position of the first robot, by controlling the height adjustment means, to correspond to the current water surface level.

25 6. Device (100;200;300;400;500;600;800) according to claim 3, **c h a r a c t e r - i s e d i n** that one (102;202;302;402;502;602;802) of the objects is installed on a vessel (204;304;504;804) which is movable on a support, in that another one (101;201;301;401;501;601;801) of the objects is a permanently installed station for, using said connection, deliver electrical power, fresh- or sewage water and/or supplies between the objects, alternatively to collect and remove exhaust fumes from an exhaust system of
30 the vessel.

7. Device (100) according to claim 1 or 2, **c h a r a c t e r i s e d i n** that both objects (101,102) are movably arranged relative to a fixed coordinate system (X,Y,Z) as well as to each other.

5 8. Device (100;200;300;400;500;600;800) according to any one of the preceding claims, **c h a r a c t e r i s e d i n** that the control means (120;220;320) is arranged to control the first robot (110;210;310;410;510;610;810) so that the connection is broken while the objects (101,102;201,202;301,302;401,402;501,502;601,602;801,802) move from the parked position to a second, separated, position, in which the objects again are
10 arranged at a distance from each other, and after the objects have left the parked position.

9. Device (400) according to any one of the preceding claims, **c h a r a c t e r - i s e d i n** that both of the two objects (401,402) are movable relative to each other
15 even after the connection has been established, and in that the control means is arranged to actively and continuously control the first robot (410) so that a part of the first robot which is arranged to manoeuvre or maintain the first connecting means (414) is immobile relative to the second connecting means (454).

20 10. Device (400) according to claim 9, **c h a r a c t e r i s e d i n** that the control means is arranged to actively and continuously control the first robot (410) so that the first connecting means (414) is immobile relative to the second connecting means (454).

25 11. Device (400) according to any one of the preceding claims, **c h a r a c t e r - i s e d i n** that the first robot (410) is arranged to, after the connection has been established, release itself from the first connecting means (414) so that the first connecting means thereafter is freely movable within at least a limited surface or volume relative to the first robot.

30 12. Device (400) according to claim 11, **c h a r a c t e r i s e d i n** that the device comprises at least one additional movable robot (450), where the first robot (410) and the additional robot are arranged to cooperate, so that one of them is arranged to

maintain the connection and to thereafter release itself from the first connecting means (414), while another one of them is arranged to break the connection.

13. Device (400) according to claim 11, **c h a r a c t e r i s e d i n** that a flexible fastening means (414b) is arranged to connect the first robot (410) to the first connecting means (414), in that the fastening means by a pulling force is arranged to break the connection when the connected objects move apart, as well as in that the control means is arranged to, before the said breaking of the connection, control the first robot to manoeuvre the first connecting means to a position in which the angle (A) between the fastening means and the second connecting means (454) at the time for the said breaking falls within a predetermined interval within which damages are not risked for any of the connecting means as a result of the said pulling force.

14. Device (100) according to any one of the preceding claims, **c h a r a c t e r - i s e d i n** that the first object (101) comprises a set of at least two different connecting means (114') of standard type, in that the first robot (110) comprises gripping means arranged to localize and engage with a selectable one of the said connecting means, and in that the device comprises a selection means arranged to, based upon a connection type of the second connecting means (154), select one of said connecting means and to use this as the first connecting means.

15. Device (100) according to any one of the preceding claims, **c h a r a c t e r - i s e d i n** that the device further comprises a second movable robot (150), arranged to displace the second connecting means (154) relative to the second object (102), a second sensor means (170) arranged to continuously measure a relative position between the second object or the second connecting means and the first connecting means (114) while the objects (101,102) move relative to each other, as well as a second control means (160), arranged to control the movements of the second robot and thereby the said displacement of the second connecting means relative to the first connecting means.

16. Device (200;300; 500) according to any one of the preceding claims, **c h a r a c - t e r i s e d i n** that the first robot (210;310;510) is permanently mounted on a

coarse adjustment device using which the first connecting means (214;314;514) is displaceable along at least one direction relative to the first object (201;301;501), in that the control means (220;320) is arranged to control the position of the coarse adjustment means relative to the second object (202;302;502), and in that the control means is also
5 arranged to control the movements of the first robot in order to fine-tune the position of the first connecting means relative to the second connecting means (254;354;454).

17. Device (600) according to any one of the preceding claims, **c h a r a c t e r - i s e d i n** that the first robot (610) comprises, apart from the first connecting means
10 (614), an activating means (617) arranged to activate the second connecting means (654), such as opening a door (657) covering the second connecting means, and in that the control means is arranged to control the first robot to, in a first step and using the activating means, activating the second connecting means, and, in a second step, establish the connection.

18. Device (100;200;300;400;500;600;800) according to any one of the preceding claims, **c h a r a c t e r i s e d i n** that the device is arranged to establish the connection only in case an amplitude and/or frequency of the relative movements of the objects
20 (101,102;201,202;301,302;401,402;501,502;601,602;801,802) relative to each other during a certain time period fall within an acceptable respective interval, and in that the control means (120;220;320) is arranged to, even before this condition is met, actively and continuously control the first robot (110;210;310;410;510;610;810) so that the first connecting means (114;214;314;414;514;614;814) is immobile relative to the second connecting means (154;254;354;454;554;654;854).

19. Device (800) according to any one of the preceding claims, **c h a r a c t e r - i s e d i n** that the first object (801) is permanently mounted on the ground (803), in that the second object (802) is mounted on a flying vessel (804), in that a counter force device (818) is arranged to be fastened to the vessel and to apply a tension force between
30 the vessel and the ground, counteracting a lifting force of the vessel while the connection is maintained.

20. Method for providing a temporary connection between two objects (101,102;201,202;301,302;401,402;501,502;601,602;801,802) that are movable in relation to each other, wherein the first of said objects comprises a first connecting means (114;214;314;414;514;614;814) and the second of said objects comprises a second connecting means (154;254;354;454;554;654;854), whereby said temporary connection is established by the two connecting means being brought together and connected to each other, whereby a control means (120;220;320) continuously controls the movements of a movable first robot (110;210;310;410;510;610;810) so that the first connecting means thereby is displaced relative to the first object, whereby a sensor means (130;230;330) continuously measures a relative position between the first object or the first connecting means and the second connecting means while the said objects move relative to each other, and whereby, while the said first and second objects move relative to each other, the control means, based on a signal from the sensor means, continuously controls the first robot so that the first connecting means is displaced relative to the first object and up to the second connecting means, and there connects to the second connecting means so that said temporary connection thus is established, **c h a r a c t e r i s e d i n** that the two objects are brought together from a first separated position, in which the objects are located at a distance from each other, towards a parked position, in which the objects are arranged so close to each other that the first robot can reach to achieve said connection and in which respective equilibrium positions or centres of motion about which the objects possibly move are immobile in relation to each other, and in that the control means is caused to control the first robot so that the connection is established while the objects move from the first separated position towards the parked position and before the objects have time to reach the parked position.

Fig. 1a

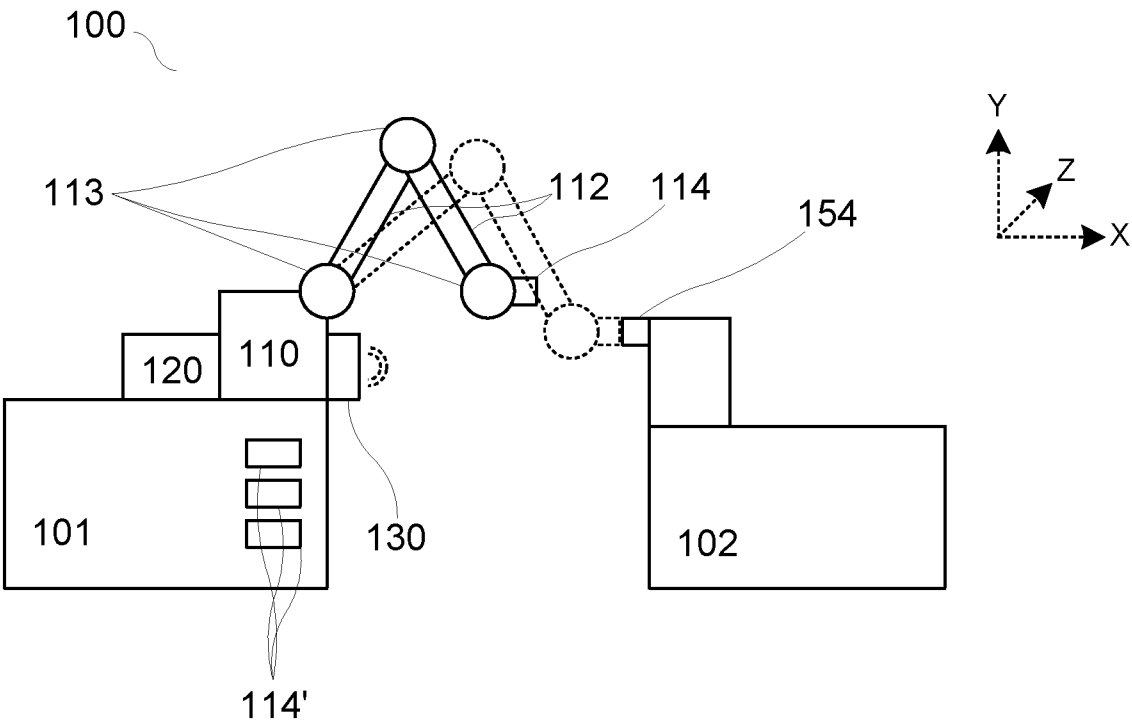


Fig. 1b

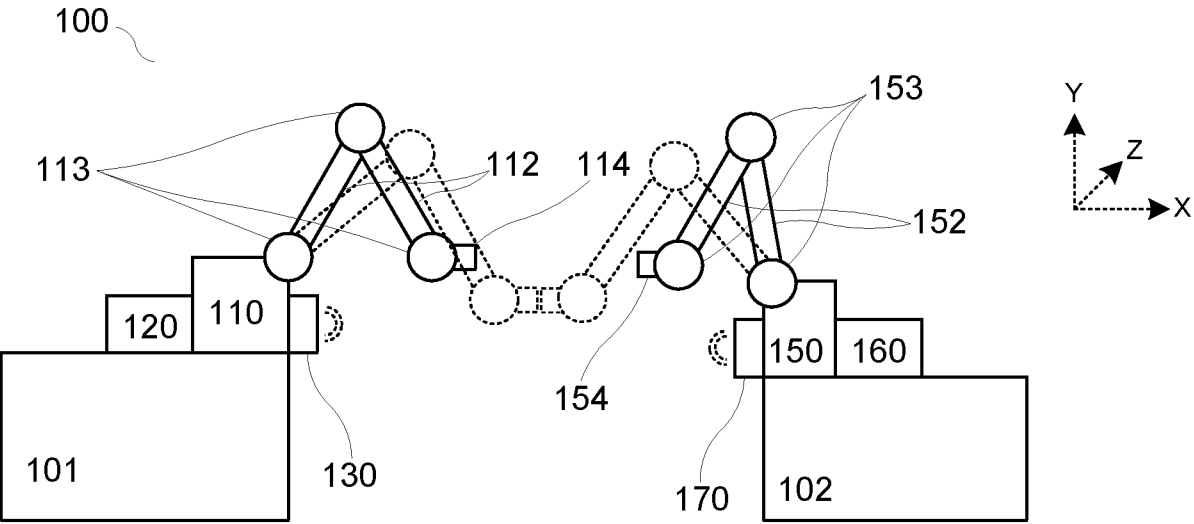


Fig. 2a

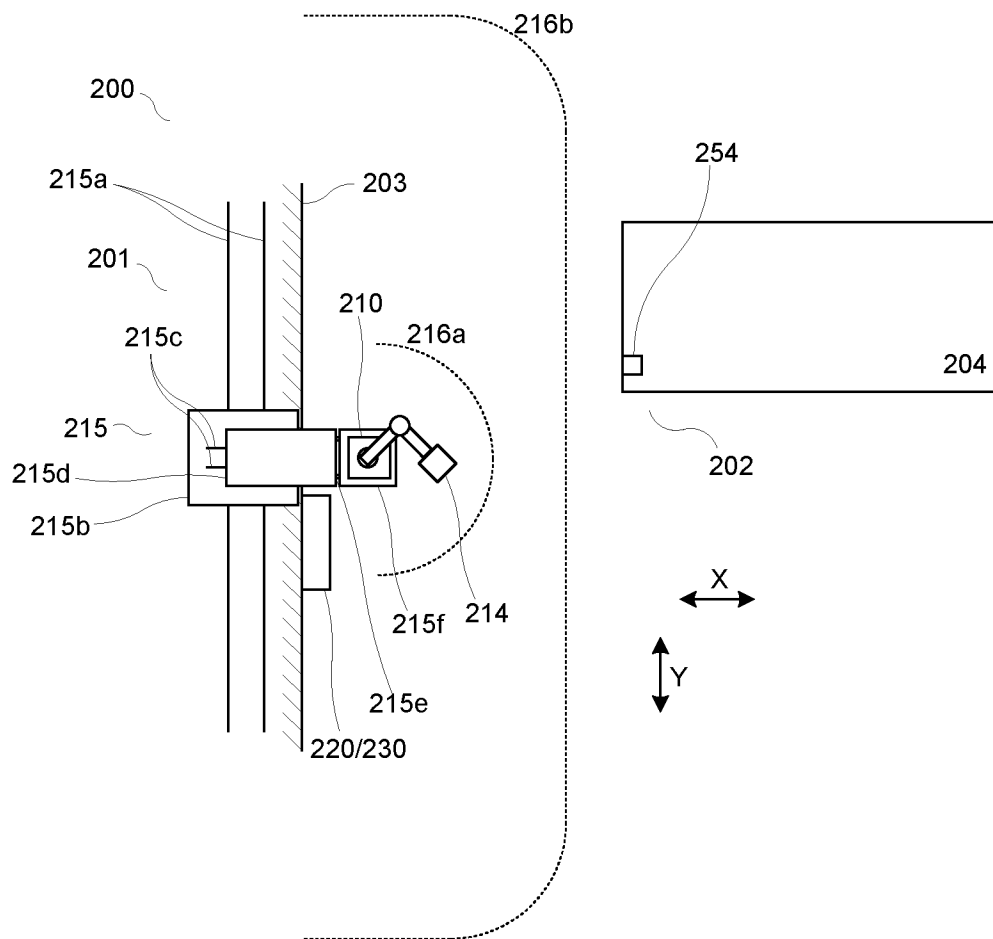


Fig. 2b

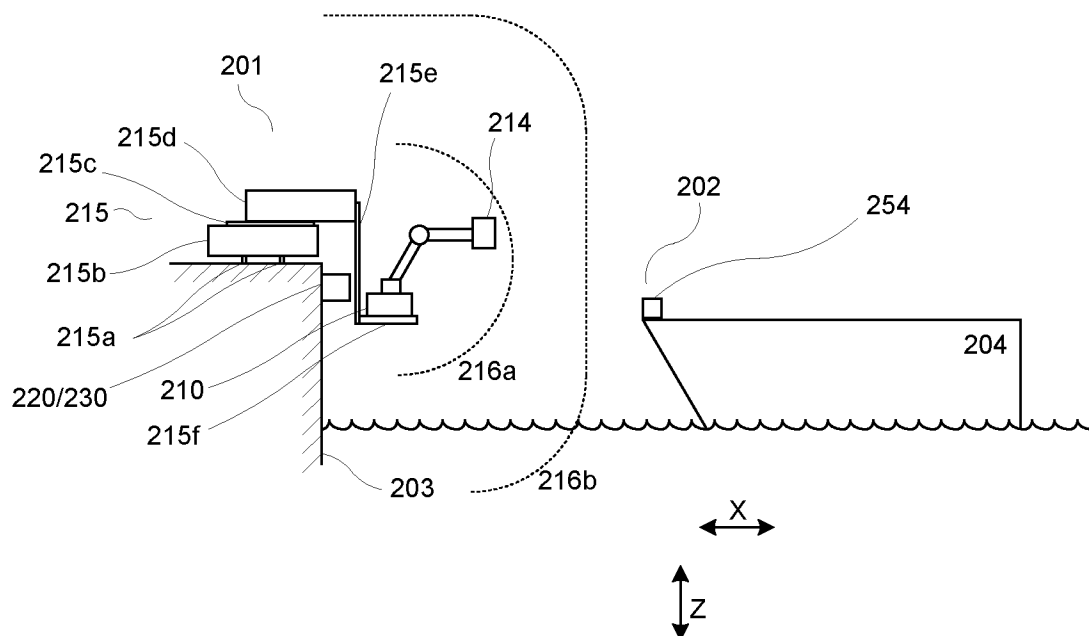


Fig. 3a

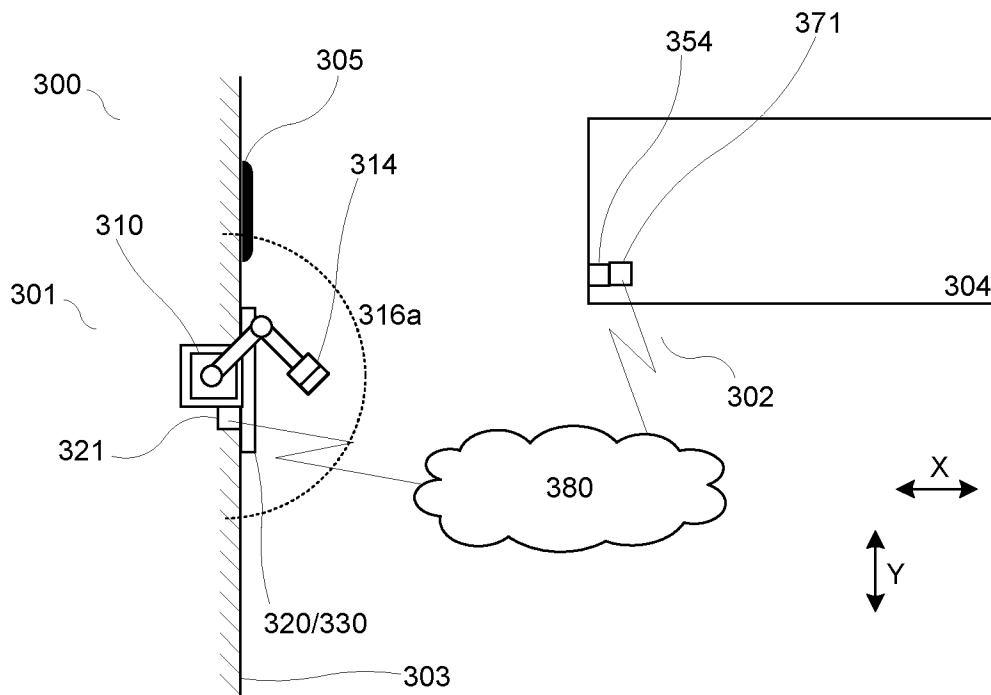


Fig. 3b

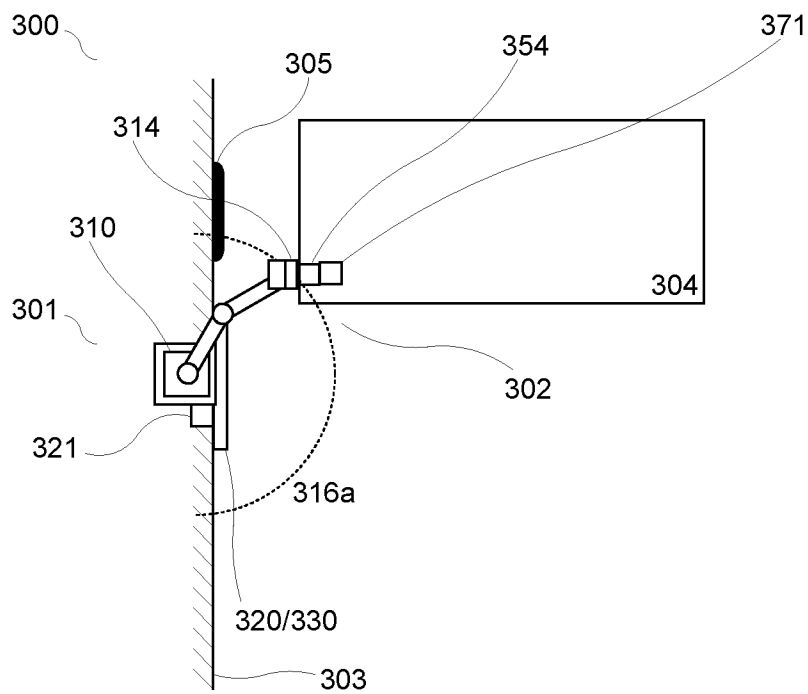


Fig. 3c

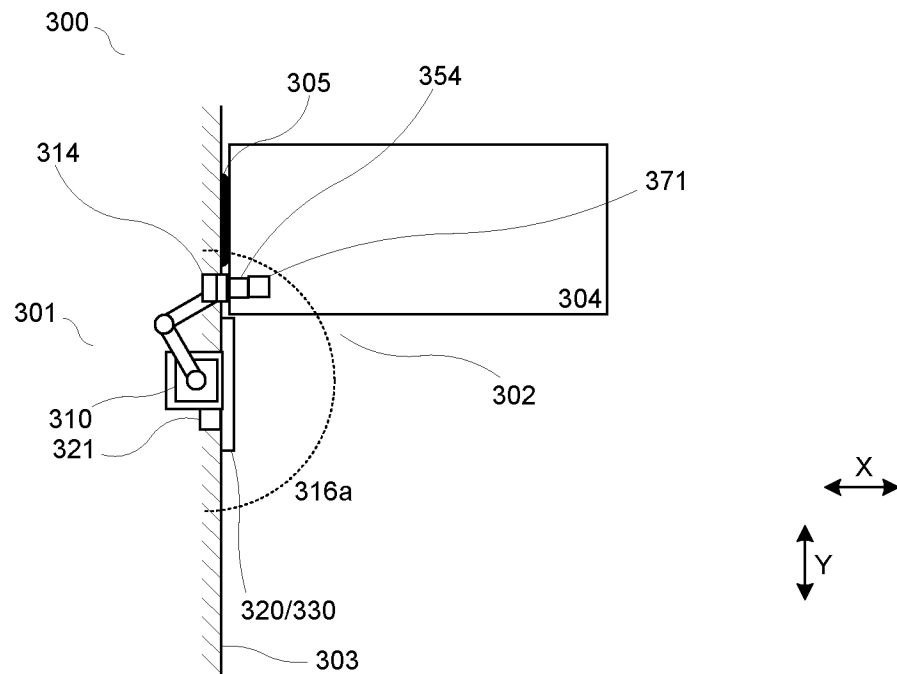


Fig. 4a

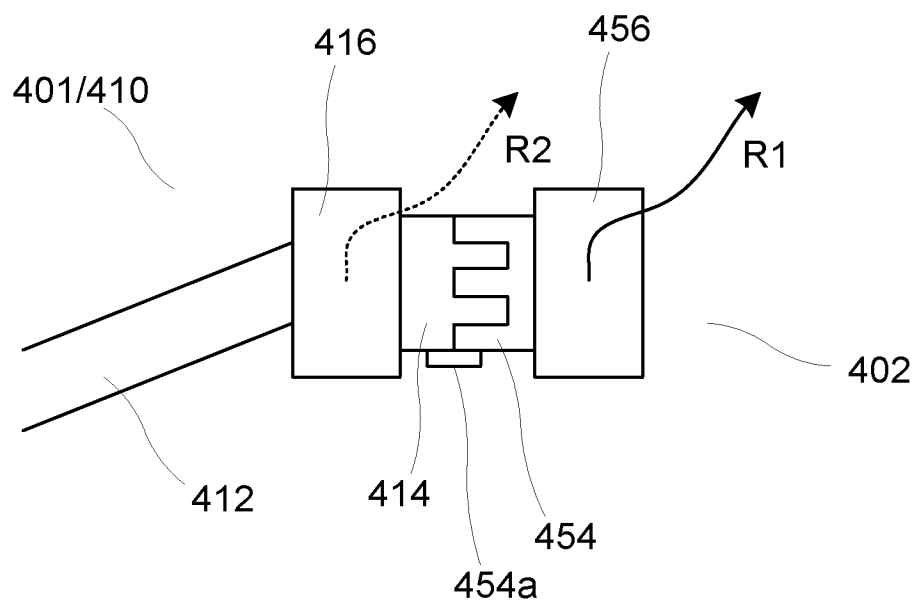


Fig. 4b

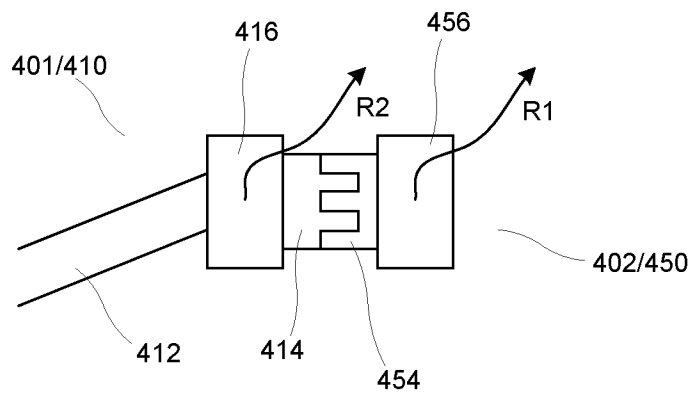


Fig. 4c

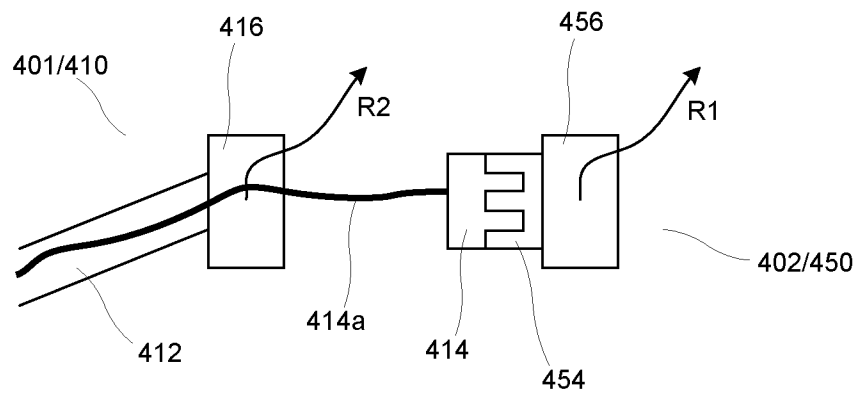


Fig. 4d

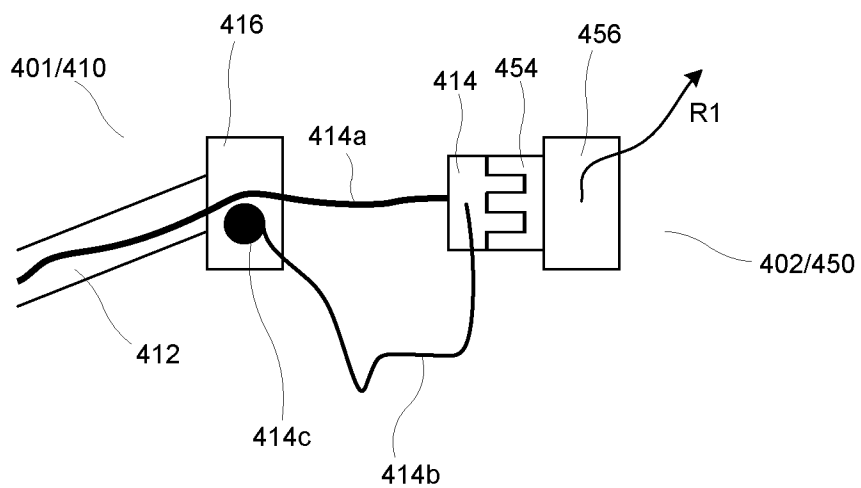


Fig. 4e

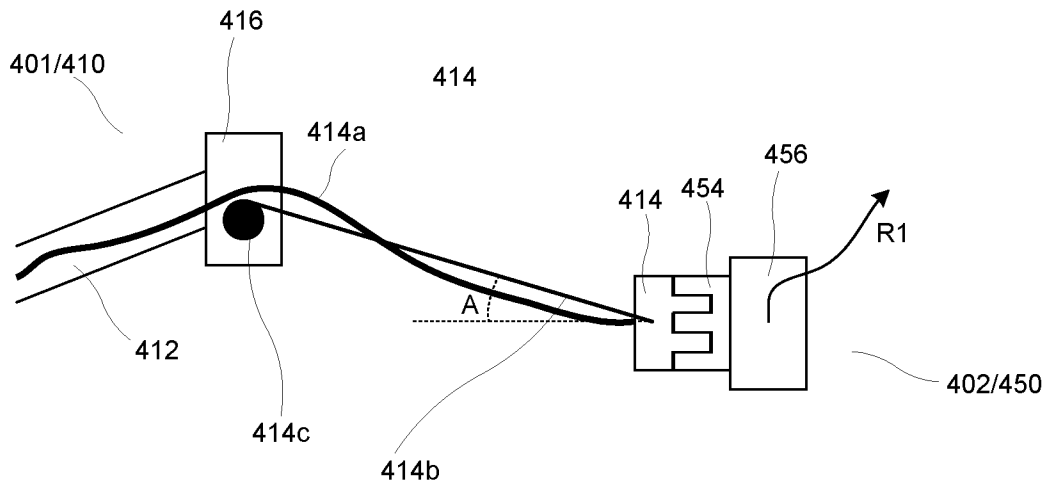


Fig. 4f

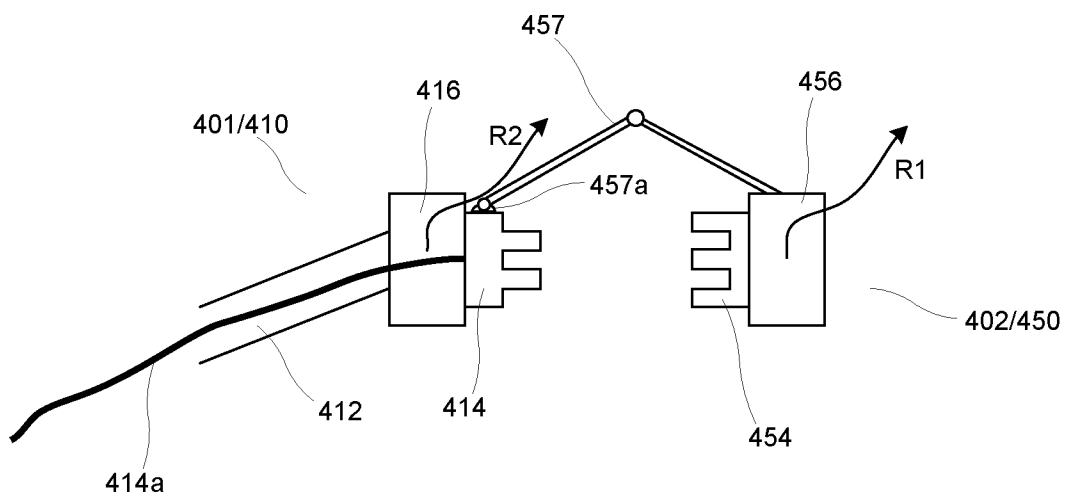


Fig. 4g

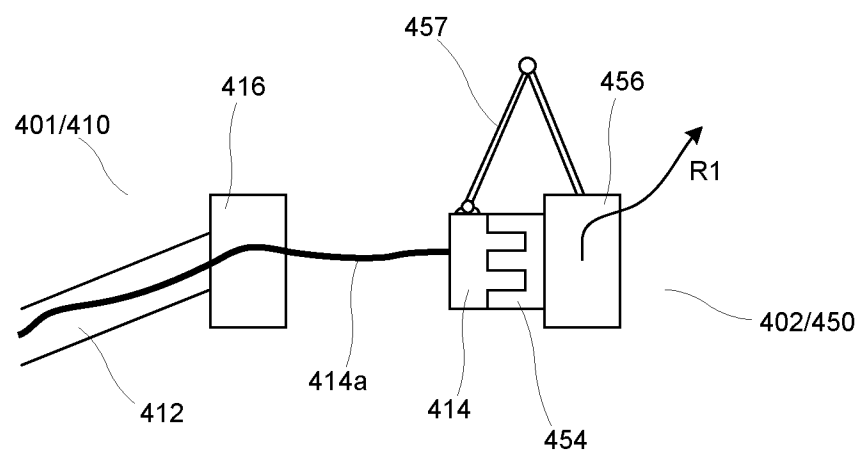


Fig. 5a

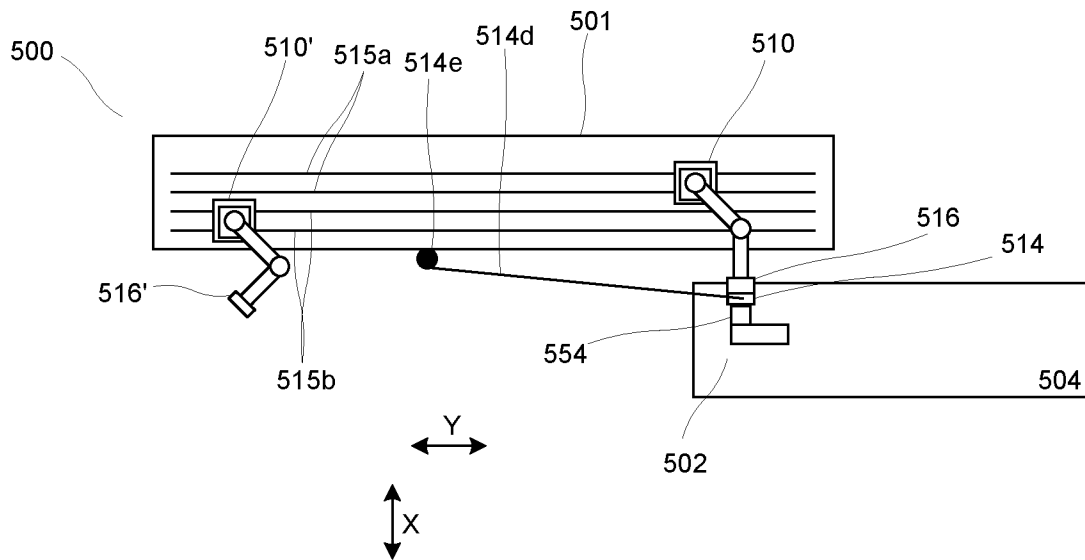


Fig. 5b

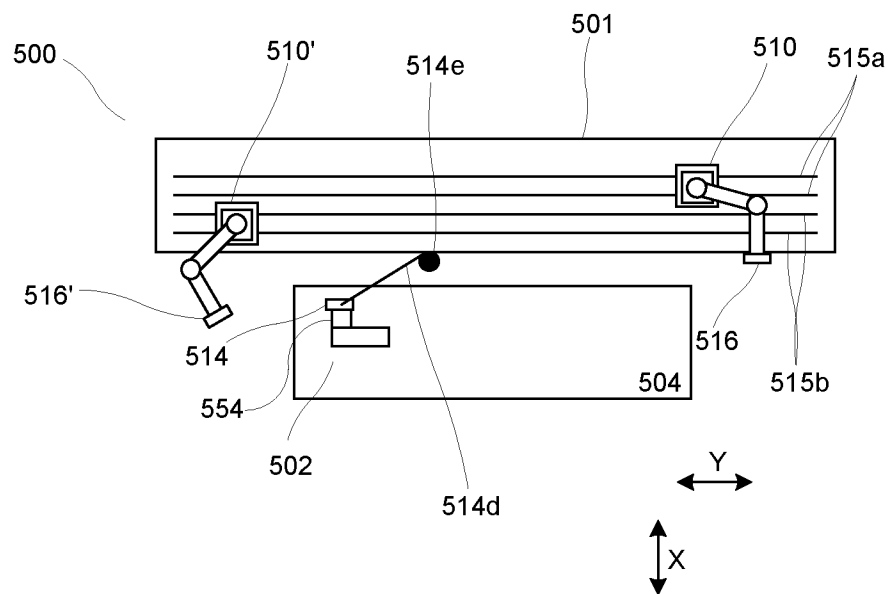


Fig. 5c

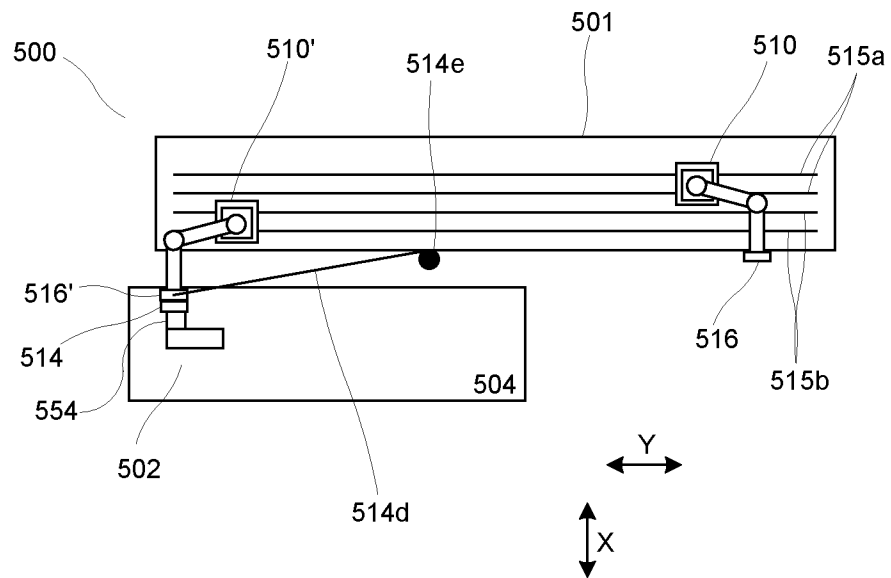


Fig. 6

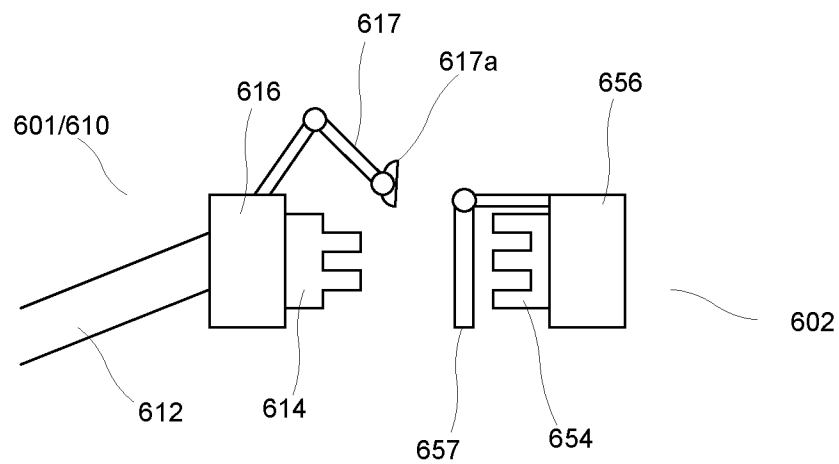
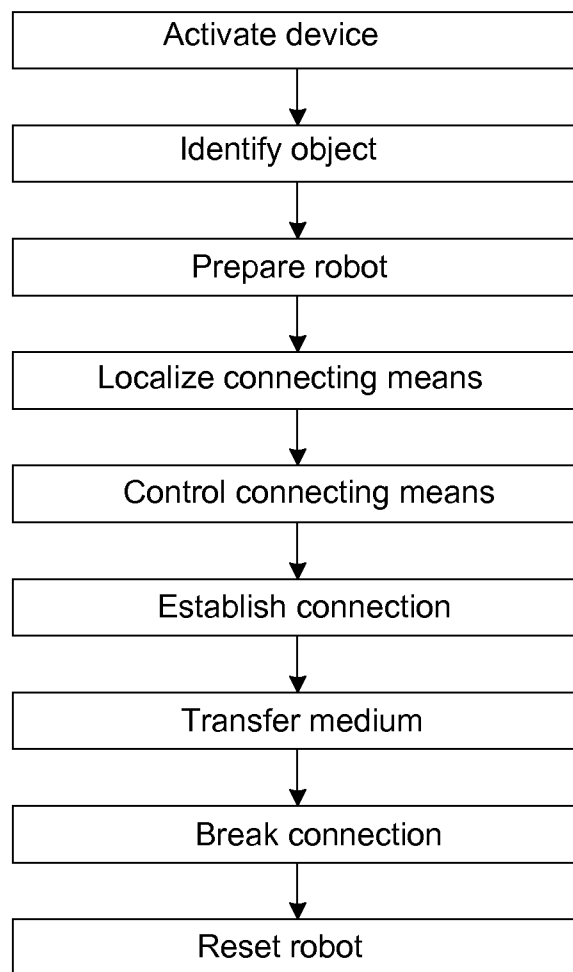
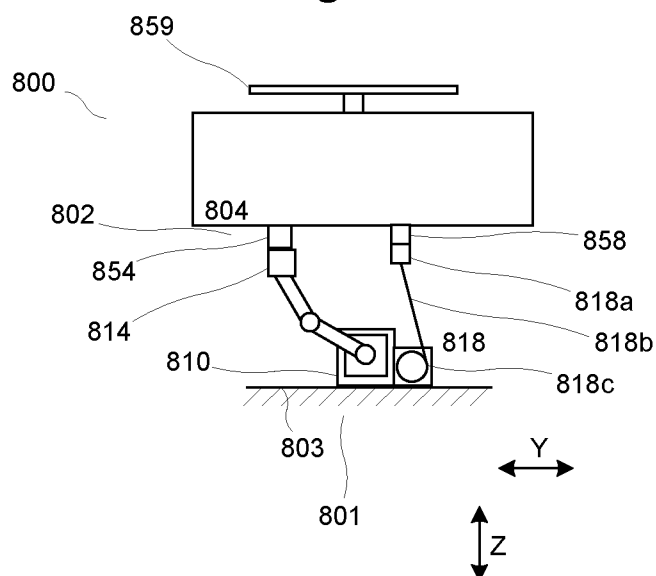


Fig. 7**Fig. 8**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2015/050197

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B25J, B63B, B64D, B67D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2009141675 A1 (FMC TECHNOLOGIES SA ET AL), 26 November 2009 (2009-11-26); abstract; figures 1,2,4 --	1-2, 20
X	DE 202011051271 U1 (EMCO WHEATON), 7 November 2012 (2012-11-07); abstract; paragraph [0030] --	1-2, 20
X	US 4408943 A1 (MCTAMANEY LOUIS S ET AL), 11 October 1983 (1983-10-11); abstract; column 3, line 36 - column 5, line 2; column 9, line 60 - column 10, line 5; figures 1-4 --	1-2, 20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

17-07-2015

Date of mailing of the international search report

21-07-2015

Name and mailing address of the ISA/SE

Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer

Ann Börjeson

Telephone No. + 46 8 782 28 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2015/050197

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3917196 A1 (POND C RAY ET AL), 4 November 1975 (1975-11-04); abstract; column 14, line 57 - column 15, line 11; figures 1,6,7,9 -- -----	1-2, 20

Continuation of: second sheet**International Patent Classification (IPC)*****B63B 27/24*** (2006.01)***B64D 39/06*** (2006.01)***B67D 7/00*** (2010.01)***B67D 9/00*** (2010.01)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2015/050197

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

The following separate inventions were identified:

- 1: Claims 1-2 and 20 directed to a device wherein the control means is arranged to control the first robot in at least two, preferably three, dimensions of motion.
- 2: Claims 3-7 and 19 directed to the two objects, their design, their purpose, their positions, and how they are moving.

.../...

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: 1, 2, 11-13 and 20

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

Continuation of: Box No. III

3: Claims 8 directed to the breaking of the connection.

4: Claims 9-10 directed to a way of maintaining the connection, wherein the control means controls the robot so that the connecting means remains connected to each other.

5: Claim 11-13 directed to a way of maintaining the connection, wherein the robot is released from the first connecting means so that the first connecting means thereafter is freely movable within at least a limited surface or volume relative to the first robot.

6: Claim 14 directed to localizing and selecting one of several connecting means.

7: Claim 15 directed to a device further comprising a second movable robot, arranged to displace the second connecting means relative to the second object, a second sensor means arranged to continuously measure a relative position between the second object or the second connecting means and the first connecting means while the objects move relative to each other, as well as a second control means, arranged to control the movements of the second robot and thereby said displacement of the second connecting means relative to the first connecting means.

8: Claim 16 directed to the robot and its position.

9: Claim 17 directed to the establishment of the connection by means of an activating means arranged to activate the second connecting means, such as opening a door covering the second connecting means.

10: Claim 18 directed to conditions for establishing the connection.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE2015/050197

WO	2009141675 A1	26/11/2009	AU	2008356828 A1	26/11/2009
			CA	2722181 A1	26/11/2009
			CN	103950517 A	30/07/2014
			CN	102036905 A	27/04/2011
			EP	2282967 B1	02/10/2013
			EP	2671839 A1	11/12/2013
			ES	2441273 T3	03/02/2014
			FR	2931451 A1	27/11/2009
			JP	2011520718 A	21/07/2011
			JP	2014111477 A	19/06/2014
			JP	5453398 B2	26/03/2014
			KR	20140023423 A	26/02/2014
			KR	20110014601 A	11/02/2011
			MX	2010012771 A	21/01/2011
			RU	2010152335 A	27/06/2012
			RU	2472696 C2	20/01/2013
			US	20110066290 A1	17/03/2011
DE	202011051271 U1	07/11/2012	AU	2012289162 A1	20/02/2014
			US	20140166156 A1	19/06/2014
			WO	2013013911 A1	31/01/2013
US	4408943 A1	11/10/1983	NONE		
US	3917196 A1	04/11/1975	NONE		