




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01J 61/10		A1	(11) International Publication Number: WO 99/59189
			(43) International Publication Date: 18 November 1999 (18.11.99)
(21) International Application Number: PCT/IB99/00774			(81) Designated States: CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 29 April 1999 (29.04.99)			
(30) Priority Data: 98201548.9 8 May 1998 (08.05.98) EP			Published <i>With international search report.</i>
(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).			
(71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).			
(72) Inventors: DENISSEN, Cornelis, J., M.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). RONDA, Cornelis, R.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). VAN KEMENADE, Wilhelmus, M., P.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). GUBBELS, Henricus, P., M.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			
(74) Agent: ROLFES, Johannes, G., A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			

(54) Title: LOW-PRESSURE MERCURY-VAPOR DISCHARGE LAMP

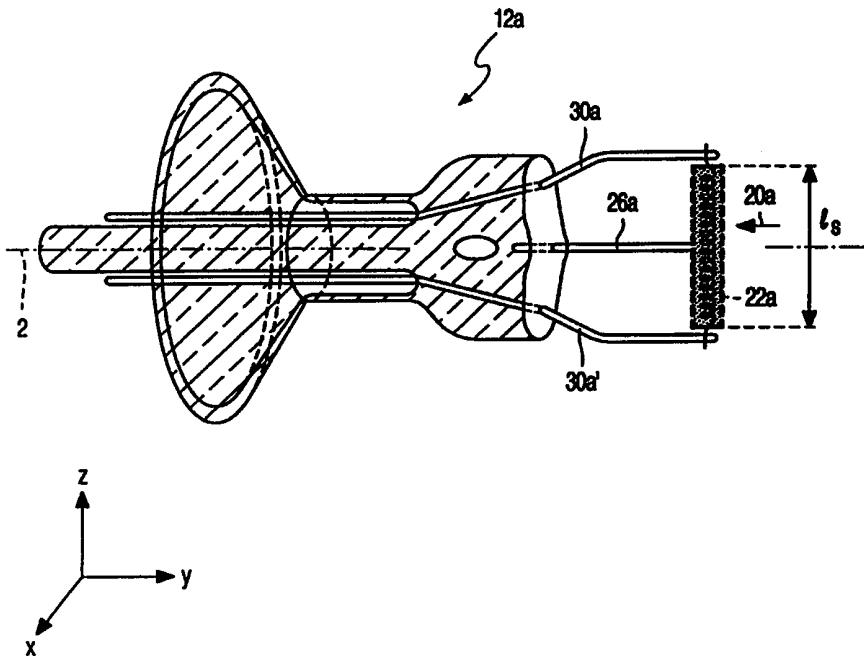

(57) Abstract

A low-pressure mercury-vapor discharge lamp is provided with a discharge vessel and a first and a second end portion (12a). The discharge vessel encloses a discharge space provided with a filling of mercury and an inert gas in a gastight manner. Each end portion (12a) supports an electrode (20a) arranged in the discharge space. An electrode shield (22a) encompasses at least one of the electrodes (20a) and is made from a ceramic material. Preferably, the electrode shield (22a) is tubular in shape with a lateral slit directed towards the discharge space. The lamp according to the invention has a comparatively low mercury consumption.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Low-pressure mercury-vapor discharge lamp.

The invention relates to a low-pressure mercury-vapor discharge lamp comprising a discharge vessel,

which discharge vessel encloses a discharge space containing a filling of mercury and an inert gas in a gastight manner,

5 electrodes being arranged in the discharge space for generating and maintaining a discharge in said discharge space,

and an electrode shield at least substantially surrounding at least one of the electrodes.

In mercury-vapor discharge lamps, mercury is the primary component for 10 (efficiently) generating ultraviolet (UV) light. An inner surface of the discharge vessel may be provided with a luminescent layer containing a luminescent material (for example a fluorescent powder) for converting UV to other wavelengths, for example to UV-B and UV-A for tanning purposes (sunbed lamps) or to visible radiation. Such discharge lamps are therefore also referred to as fluorescent lamps.

15 A low-pressure mercury-vapor discharge lamp of the type mentioned in the opening paragraph is known from DE-A 1 060 991. In said known lamp, the electrode shield surrounding the electrode is made from thin sheet titanium. By using an electrode shield, which is also referred to as anode shield or cathode shield, blackening at an inner surface of the discharge vessel is counteracted. In this respect, titanium serves as the getter for 20 chemically binding oxygen, nitrogen and/or carbon.

A drawback of the use of a metal or metal alloy is that it may cause a short-circuit of the electrode wires. In addition, the metals in the electrode shield may amalgamate with the mercury present in the lamp and, thus, absorb mercury. As a result, the known lamp requires a relatively high dose of mercury to obtain a sufficiently long service life. Injudicious 25 processing of the known lamp after its service life has ended adversely affects the environment.

It is an object of the invention to provide a low-pressure mercury-vapor discharge lamp of the type mentioned in the opening paragraph, which has a relatively low mercury consumption.

5 To achieve this, the low-pressure mercury-vapor discharge lamp in accordance with the invention is characterized in that the electrode shield is made from a ceramic material.

For the proper operation of low-pressure mercury-vapor discharge lamps, the electrodes of such discharge lamps include an (emitter) material having a low so-called work function (reduction of the work function voltage) for supplying electrons to the discharge (cathode function) and receiving electrons from the discharge (anode function). Known materials having a low work function are, for example, barium (Ba), strontium (Sr) and calcium (Ca). It has been observed that, during operation of low-pressure mercury-vapor discharge lamps, material (barium and strontium) of the electrode(s) is subject to volatilization. It has been found that, in general, the emitter material is deposited on the inner surface of the discharge vessel. It has further been found that the above-mentioned Ba (and Sr), which is deposited elsewhere in the discharge vessel, no longer participates in the light-generating process. The deposited (emitter) material further forms mercury-containing amalgams on the inner surface, as a result of which the quantity of mercury available for the discharge operation decreases (gradually), which may adversely affect the service life of the lamp. In order to compensate for such a loss of mercury during the service life of the lamp, a relatively high dose of mercury is necessary, which is undesirable from the point of view of environmental protection. The inventors have recognized that the provision of an electrode shield, which surrounds the electrode(s) and is made from a ceramic material, reduces the reactivity of materials in the electrode shield relative to the mercury present in the discharge vessel, leading to the formation of amalgams (Hg-Ba, Hg-Sr). In addition, the use of an electrically insulating material precludes the development of short circuits in the electrode wires and/or in a number of windings of the electrode(s). The known lamp has an electrode shield of an electroconductive material, which, in addition, relatively readily forms an amalgam with mercury. The mercury consumption of the discharge lamp is limited by substantially reducing the degree to which the material of the shield surrounding the electrode(s) reacts with mercury.

The electrode shield itself should not appreciably absorb mercury. To achieve this, the material of the electrode shield includes at least an oxide of at least one element of the series formed by magnesium, aluminium, titanium, zirconium, yttrium and the rare earths. Preferably, the electrode shield is made from a ceramic material which comprises aluminium

oxide. Particularly suitable electrode shields are manufactured from so-called densely sintered Al_2O_3 , also referred to as DGA. An additional advantage of the use of aluminium oxide is that an electrode shield made of such a material is resistant to relatively high temperatures ($> 250^\circ\text{C}$). At such relatively high temperatures, there is an increased risk that the (mechanical) strength of the electrode shield decreases, thus adversely affecting the shape of the electrode shield. If a metal or metal alloy is used as the electrode shield, as is the case in the known discharge lamp, the temperature of the electrode shield must not be too high to prevent that the metal or one of the metals of the metal alloy begins to deform or evaporate, thereby giving rise to undesirable blackening of the inner surface of the discharge vessel. (Emitter) material originating from the electrode(s) and deposited on an electrode shield of aluminium oxide which is at a much higher temperature, cannot or hardly react with the mercury present in the discharge, as result of said high temperature, so that the formation of mercury-containing amalgams is at least substantially precluded. In this manner, the use of an electrode shield in accordance with the invention serves a dual purpose. On the one hand, it is effectively precluded that the material originating from the electrode(s) is deposited on the inner surface of the discharge lamp, and, on the other hand, it is precluded that (emitter) material deposited on the electrode shield forms amalgams with the mercury present in the discharge lamp. Preferably, in operation, the temperature of the electrode shield exceeds 250°C . An advantage of such a relatively high temperature is that, in particular, in the initial stage, the electrode shield becomes hotter than in the known lamp, as a result of which any mercury bound to the electrode shield is released more rapidly and more readily.

An additional advantage of the use of a ceramic electrode shield of aluminium oxide, which surrounds the electrode, is achieved in lamps which are operated on a ballast which can be dimmed, for example a so-called high-frequency regulating (HFR) dimming ballast, in which, particularly at dimmed light intensities, excessive evaporation of electrode-emitter material may occur, said electrode generally being additionally heated under said conditions while using a so-called "bias current". The electrode shield captures this material and effectively precludes the formation of amalgams. As a result, the mercury consumption of the low-pressure mercury-vapor discharge lamp is limited.

The shape of the electrode shield and its position relative to the electrode influence the temperature of the electrode shield. A further embodiment of the low-pressure mercury-vapor discharge lamp in accordance with the invention is characterized in that the electrode shield is tubular in shape. Electrodes in low-pressure mercury-vapor discharge lamp are generally elongated and cylindrically symmetric, for example a coil with windings about a

longitudinal axis. A tubularly shaped electrode shield harmonizes very well with such a shape of the electrode. Preferably, an axis of symmetry of the electrode shield extends substantially parallel to, or substantially coincides with, the longitudinal axis of the electrode. In the latter case, the average distance from an inside of the electrode shield to an external dimension of 5 the electrode is at least substantially constant.

A particularly preferred embodiment of the low-pressure mercury-vapor discharge lamp is characterized in accordance with the invention in that an inner circumference d_s of the electrode shield meets the relation:

$$1.25 \times d_e \leq d_s \leq 2.5 \times d_e,$$

10 where d_e is an outer circumference of the electrode. In said area, the temperature of the electrode shield during operation of the low-pressure mercury-vapor discharge lamp is so high that it is at least substantially precluded that (emitter) material deposited on the electrode shield by evaporation or so-called sputtering from the electrode(s), reacts with the mercury present in the discharge, so as to form amalgams. The lower limit, $1.25 \times d_e$, of the inner 15 circumference d_s of the electrode shield ensures that (mechanized) mounting of the electrode shield does not lead to too small an interspace between the electrode shield and the electrode. An inner circumference d_s of the electrode shield below $2.5 \times d_e$ ensures that, in operation, the temperature of the (emitter) material deposited on the electrode shield is in the desired temperature range to effectively counteract the formation of amalgams.

20 Preferably, the electrode shield is provided with a slit on a side facing the discharge space. A slit in the electrode shield in the direction of the discharge causes a relatively short discharge path between the electrodes of the low-pressure mercury-vapor discharge lamp. This is favorable for a high efficiency of the lamp. The slit preferably extends parallel to the axis of symmetry of the electrode shield (so-called lateral slit in the electrode 25 shield). In the known lamp, the aperture or slit in the electrode shield faces away from the discharge space. In an alternative embodiment, the electrode shield is tubular in shape and not provided with a slit.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

30

In the drawings:

Fig. 1 is a cross-sectional view of an embodiment of the low-pressure mercury-vapor discharge lamp in accordance with the invention in longitudinal section;

Fig. 2 shows a detail of Fig. 1, which is partly drawn in perspective;

Fig. 3A shows an embodiment of the electrode shield about the electrode as shown in Fig. 2;

5 Fig. 3B shows an alternative embodiment of the electrode shield about the electrode as shown in Fig. 3A;

Fig. 4 shows the mercury consumption of a low-pressure mercury-vapor discharge lamp with an electrode shield in accordance with the invention, operated on a cold-start ballast with a short cycle, in comparison with the mercury consumption of a known discharge lamp, and

10 Fig. 5 shows the mercury consumption of a low-pressure mercury-vapor discharge lamp with an electrode shield in accordance with the invention, operated on a dimmed ballast with a long cycle, in comparison with the mercury consumption of a known discharge lamp.

15 The Figures are purely schematic and not drawn to scale. Particularly for clarity, some dimensions are exaggerated strongly. In the Figures, like reference numerals refer to like parts whenever possible.

Fig. 1 shows a low-pressure mercury-vapor discharge lamp comprising a glass discharge vessel 10 having a tubular portion 11 about a longitudinal axis 2, which discharge vessel transmits radiation generated in the discharge vessel 10 and is provided with a first and a second end portion 12a; 12b, respectively. In this example, the tubular part 11 has a length of 120 cm and an inside diameter of 24 mm. The discharge vessel 10 encloses, in a gastight manner, a discharge space 13 containing a filling of 1 mg mercury and an inert gas, for example argon. The wall of the tubular part is generally coated with a luminescent layer (not shown in Fig. 1) which includes a luminescent material (for example a fluorescent powder) which converts the ultraviolet (UV) light generated by fallback of the excited mercury into (generally) visible light. The end portions 12a; 12b each support an electrode 20a; 20b arranged in the discharge space 13. The electrode 20a; 20b is a winding of tungsten covered with an electron-emitting substance, in this case a mixture of barium oxide, calcium oxide and strontium oxide. The current-supply conductors 30a, 30a'; 30b, 30b' of the electrodes 20a; 20b, respectively, pass through the end portions 12a; 12b and extend beyond the discharge vessel 10. The current-supply conductors 30a, 30a'; 30b, 30b' are connected to contact pins 31a, 31a'; 31b, 31b' which are secured to a lamp cap 32a, 32b. In general, around each electrode 20a; 20b

an electrode ring is arranged (not shown in Fig. 1) on which a glass capsule for proportioning mercury is clamped. In an alternative embodiment, an amalgam comprising mercury and an alloy of PbBiSn is provided in an exhaust tube which is in communication with the discharge vessel 10.

5 In the example shown in Fig. 1, the electrode 20a; 20b is surrounded by an electrode shield 22a; 22b having a length l_s , which electrode shield is manufactured, in accordance with the invention, from a ceramic material. Fig. 2 is a partly perspective view of a detail shown in Fig. 1, the end portion 12a supporting the electrode 20a via the current supply conductors 30a, 30a'. The electrode 20a is surrounded by a tubular electrode shield 22a, which 10 is supported by a supporting wire 26a, which is provided in the end portion 12a. Figs. 3A and 3B are cross-sectional views of two embodiments of the tubular electrode shield 22a. The cross-sectional views shown in Figs. 3A and 3B are rotated through 90° relative to the longitudinal axis 2 in Fig. 2. The electrode 20a is very schematically shown as a part of a winding, said electrode having an outer circumference which is referenced d_e . The 15 cylindrically symmetrical electrode shield 20a has an inner circumference referenced d_s . In an alternative embodiment, the electrode shield may also be of (regular) polygonal shape, for example an at least substantially cubical or hexagonal electrode shield. On the side of the discharge lamp facing the discharge, the electrode shield 22a is provided with a lateral slit 25a; 25a' with an aperture which is referenced d_{sl} . In a particularly preferred embodiment, the 20 electrode 20a has an outside diameter $d_e = 2$ mm, the electrode shield has a length $l_s = 8$ mm and an outside diameter $d_s = 3$ mm. A suitable outside diameter of the electrode shield is 4 mm. Given the diameter of the electrode, it applies that $d_s = 1.5 \times d_e$, and the electrode shield meets the relation:

$$1.25 \times d_e \leq d_s \leq 2.5 \times d_e.$$

25 The electrode shield precludes that (emitter) material originating from the electrode is deposited on the inner wall of the discharge vessel, thereby preventing undesirable blackening. By virtue of the electrode shield in accordance with the invention, the temperature of (emitter) material deposited on the ceramic electrode shield is so high during operation of the low-pressure mercury-vapor discharge lamp that the material cannot form mercury-containing amalgams, so that a considerable reduction in mercury consumption of the lamp is 30 achieved.

Experiments have shown that a low-pressure mercury-vapor discharge lamp provided with a tubular electrode shield made of DGA and provided around the electrode exhibits a mercury consumption in the area of the electrode of less than 2 µg after 100 burning

hours on a so-called high-frequency regulating (HFR) dimming ballast, whereas a reference lamp provided with the known electrode shield exhibits a mercury consumption in the area of the electrode of more than 20 μg . After 10,000 burning hours, the reference lamps operated on such a ballast can no longer be started for lack of mercury. Such a service life is substantially 5 shorter than the customary service life of these discharge lamps, which amounts to approximately 17,000 hours. Low-pressure mercury-vapor discharge lamps comprising a ceramic electrode shield surrounding the electrodes meet the prescribed service life specification.

In further experiments, low-pressure mercury-vapor discharge lamps 10 manufactured in accordance with the invention were compared to known discharge lamps. In Fig. 4 the mercury consumption of a low-pressure mercury-vapor discharge lamp comprising an electrode shield in accordance with the invention is compared with the mercury consumption of a known discharge lamp, the discharge lamps being operated on a so-called cold-starting ballast with a short switching cycle in which the lamp, alternately, burns for 15 minutes and is switched off for 5 minutes. After 1000 burning hours, the electrode provided 15 with a tubular DGA electrode shield exhibited a mercury consumption in the area of the electrode of 25 μg (curve a), whereas the known lamp exhibited a mercury consumption in the area of the electrode of 148 μg (curve b). The use of the DGA tube in accordance with the invention causes the mercury consumption in the area of the electrode to be reduced by 20 approximately 70%. In Fig. 5, the mercury consumption of a low-pressure mercury-vapor discharge lamp comprising an electrode shield in accordance with the invention is compared with the mercury consumption of a known discharge lamp, the discharge lamps being operated on a dimmed ballast for 1250 hours with a long switching cycle in which the lamps alternately burn for 165 minutes and are switched off for 15 minutes. After 1000 burning hours, the 25 electrode comprising a tubular DGA electrode shield exhibited a mercury consumption in the area of the electrode of 25 μg (curve a'), whereas the known lamp exhibited a mercury consumption in the area of the electrode of 225 μg (curve b'). This comparison shows that the known discharge lamp has a much higher mercury consumption during its service life than the discharge lamp provided with an electrode shield in accordance with the invention.

30 It will be obvious that within the scope of the invention many variations are possible to those skilled in the art. The discharge vessel does not necessarily have to be elongated and tubular; it may alternatively take different shapes. In particular, the discharge vessel may have a curved shape (for example meander-shaped).

The invention is embodied in each novel characterizing part and each combination of characterizing parts.

CLAIMS:

1. A low-pressure mercury-vapor discharge lamp comprising a discharge vessel (10);

which discharge vessel (10) encloses a discharge space (13) containing a filling of mercury and an inert gas in a gastight manner,

5 electrodes (20a; 20b) being arranged in the discharge space (13) for generating and maintaining a discharge in said discharge space (13),

and an electrode shield (22a) at least substantially surrounding at least one of the electrodes (20a; 20b),

characterized in that,

10 the electrode shield (22a) is made from a ceramic material.

2. A low-pressure mercury-vapor discharge lamp as claimed in claim 1,

characterized in that the ceramic material comprises aluminium oxide.

15 3. A low-pressure mercury-vapor discharge lamp as claimed in claim 1 or 2, characterized in that the electrode shield (22a) is tubular in shape.

4. A low-pressure mercury-vapor discharge lamp as claimed in claim 3, characterized in that an inner circumference d_s of the electrode shield (22a) meets the relation:

20 $1.25 \times d_e \leq d_s \leq 2.5 \times d_e$,

wherein d_e represents an outer circumference of the electrode (20a; 20b).

25 5. A low-pressure mercury-vapor discharge lamp as claimed in claim 3, characterized in that the electrode shield (22a) is provided with a slit (25a; 25a') on a side facing the discharge space (13),

6. A low-pressure mercury-vapor discharge lamp as claimed in claim 5, characterized in that the slit (25a) extends in the lateral direction and has a width of at least substantially 1 mm.

7. A low-pressure mercury-vapor discharge lamp as claimed in claim 1 or 2, characterized in that, in operation, the temperature of the electrode shield (22a) is higher than 250°C.

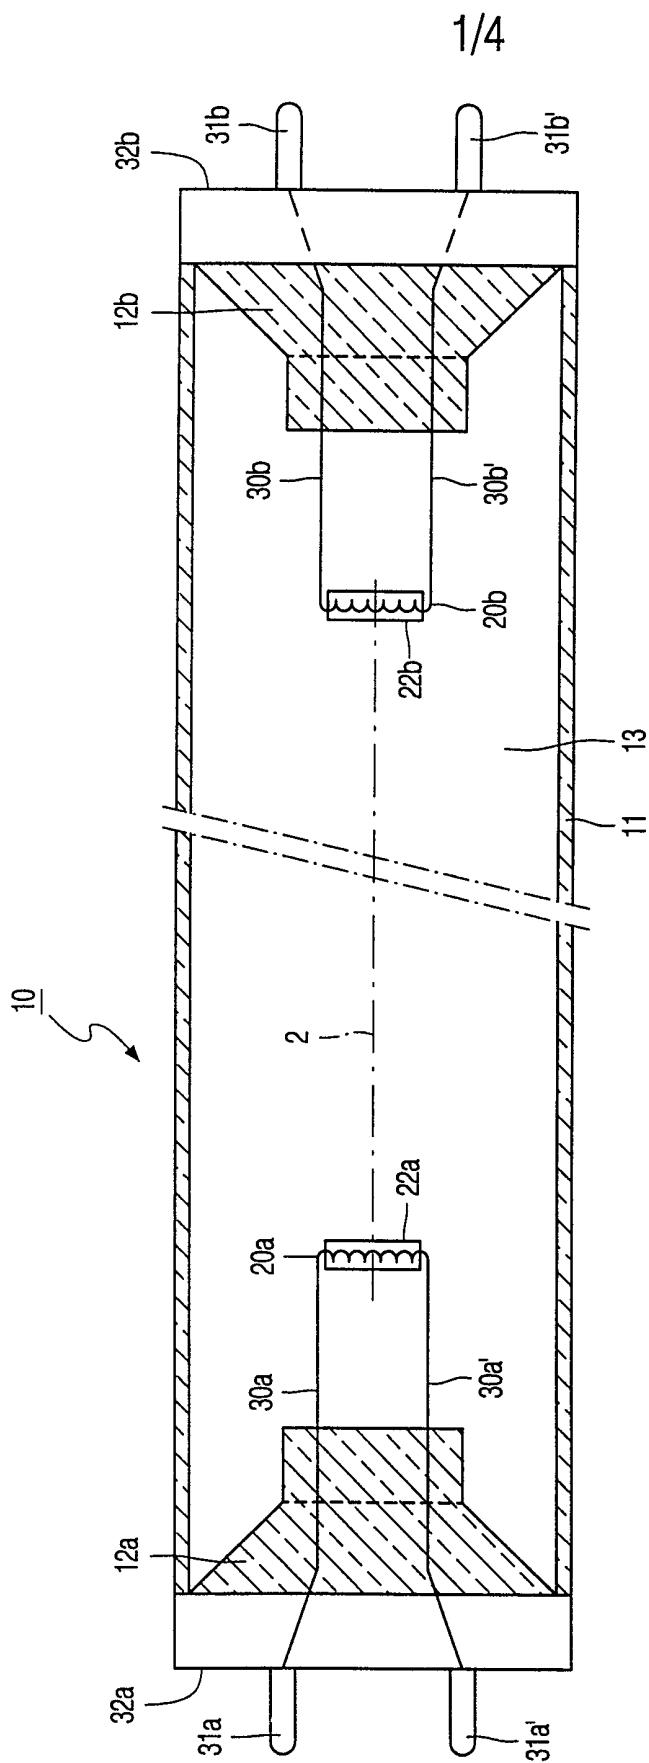


FIG. 1

2/4

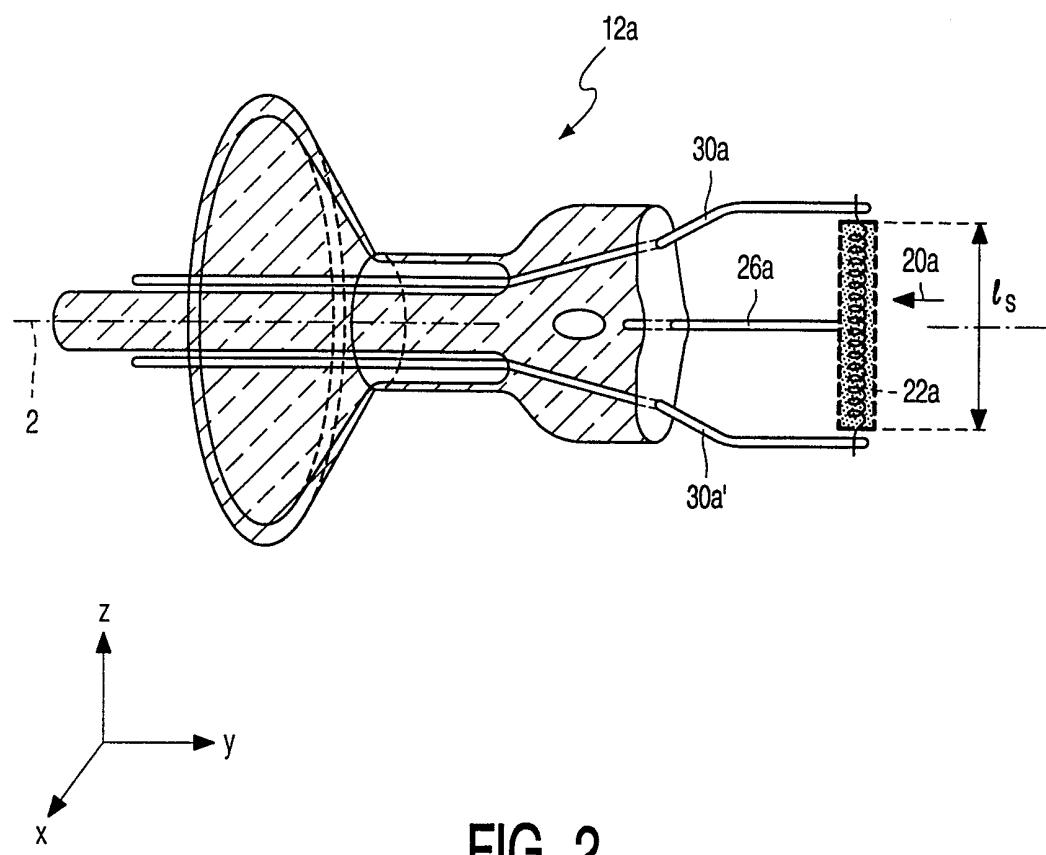


FIG. 2

3/4

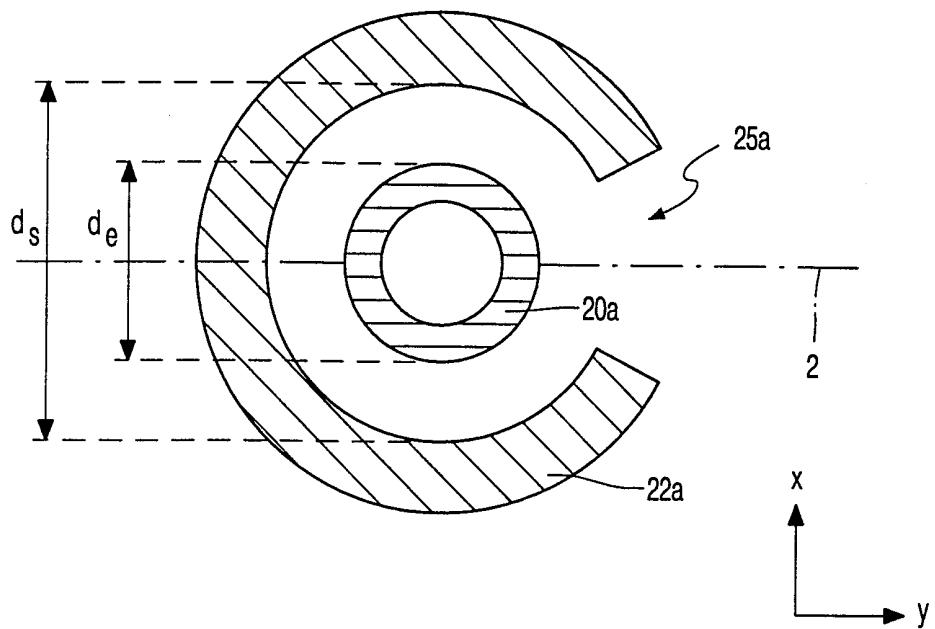


FIG. 3A

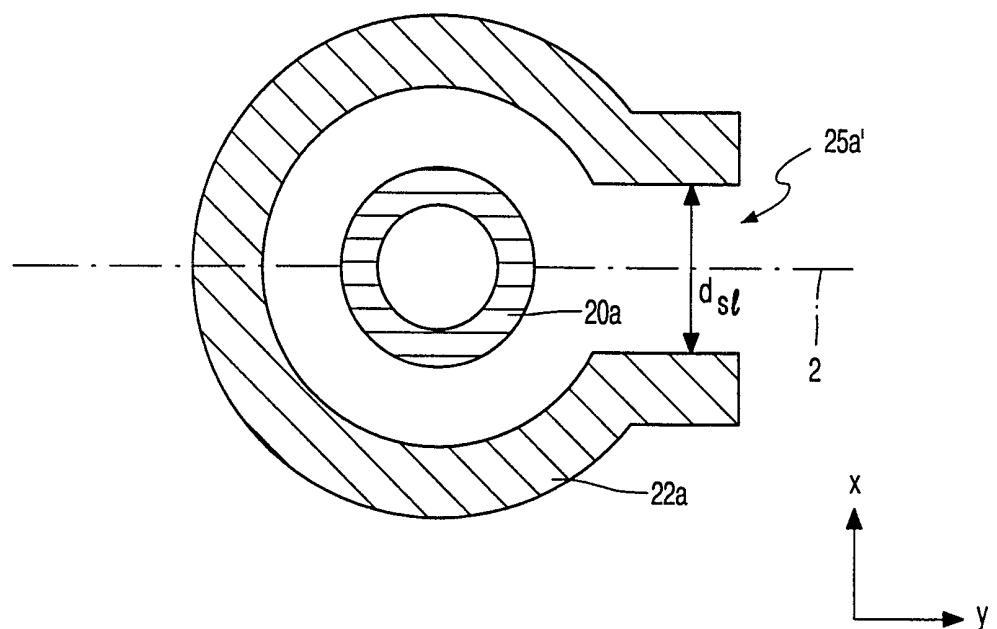


FIG. 3B

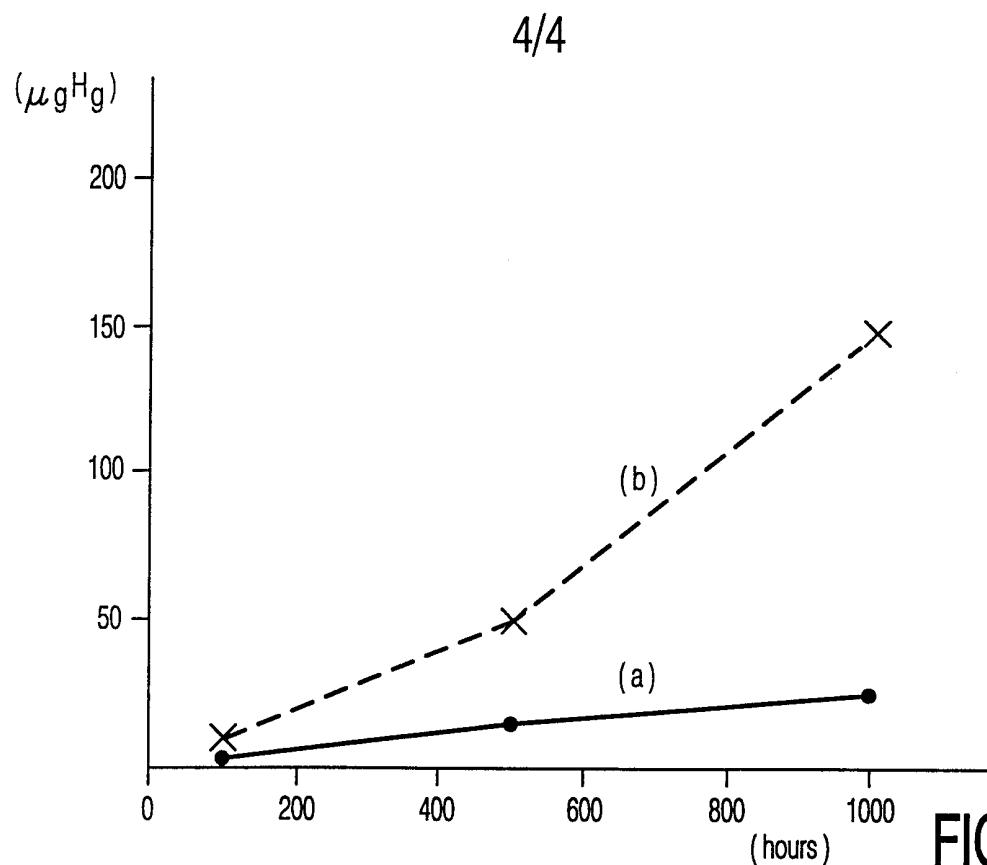


FIG. 4

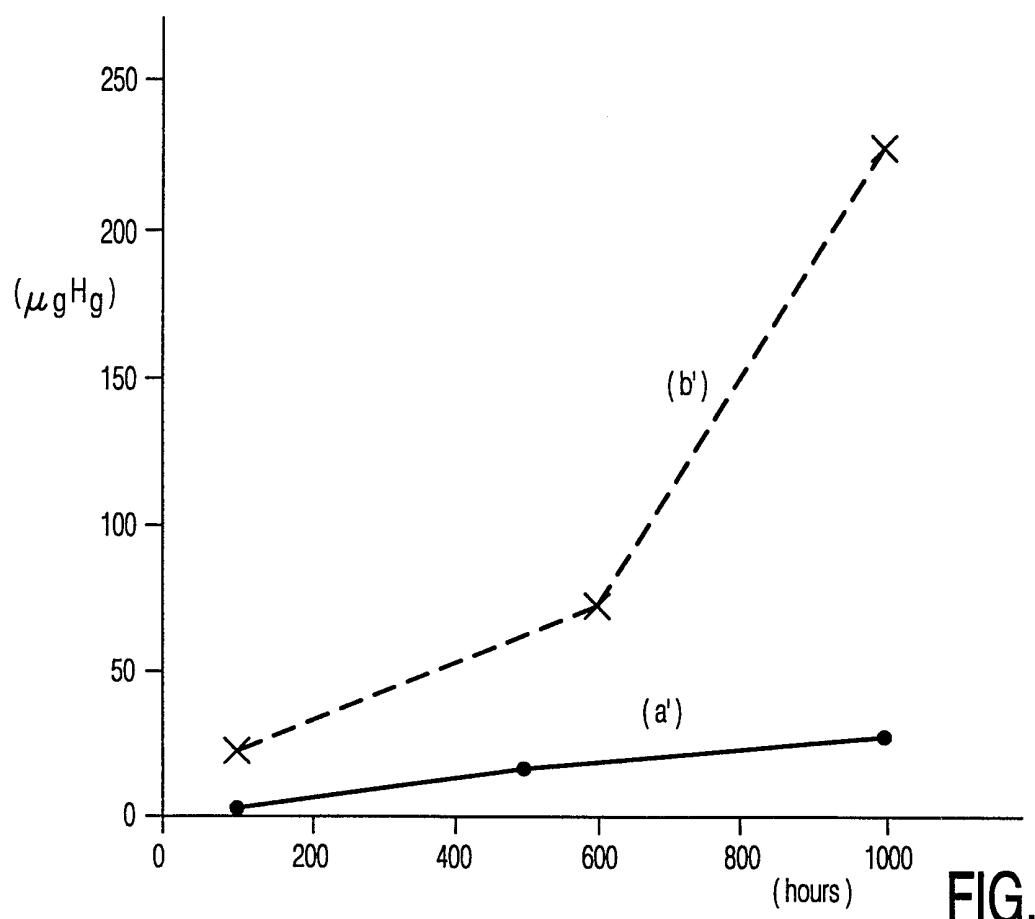


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 99/00774

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H01J 61/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 1060991 B (PATENT-TREUHAND-GESELLSCHAFT FÜR ELEKTRISCHE GLÜHLAMPEN M.B.H.), 9 July 1959 (09.07.59), figures 2-6 --	1,3
A	Derwent's abstract, No 83-763663/37, week 8337, ABSTRACT OF SU, 972613 (SIMAKIN A G), 7 November 1982 (07.11.82) -- -----	1,3

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier document but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

16 June 1999

11-07-1999

Name and mailing address of the ISA/
 Swedish Patent Office
 Box 5055, S-102 42 STOCKHOLM
 Facsimile No. +46 8 666 02 86

Authorized officer
 Herman Phalén / MR
 Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/06/99

International application No.

PCT/IB 99/00774

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1060991 B	09/07/59	NONE	