

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
WO 2004/028987 A1

(51) International Patent Classification<sup>7</sup>: C03B 18/20 (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/US2003/030576

(22) International Filing Date: 26 September 2003 (26.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/414,516 27 September 2002 (27.09.2002) US  
10/672,026 26 September 2003 (26.09.2003) US

(71) Applicant: PPG INDUSTRIES OHIO, INC. [US/US];  
3800 West 143rd Street, Cleveland, OH 44111 (US).

(72) Inventors: SMITH, Charlene, S.; 27 Royal Oak Drive,  
Lower Burrell, PA 15068 (US). PECORARO, George, A.;  
439 Dakota Drive, Lower Burrell, PA 15068 (US).

(74) Agents: MILES, Jacques, B. et al.; PPG Industries, INC.,  
Intellectual Property Dept., One PPG Place, Pittsburgh, PA  
15272 (US).

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 2004/028987 A1

(54) Title: APPARATUS AND METHOD FOR PRODUCING FLOAT GLASS HAVING REDUCED DEFECT DENSITY

(57) Abstract: A float glass chamber and related methods comprising a hot section having an atmosphere in at least the lower plenum comprising less than 3 percent hydrogen base on volume and a cold section, wherein the boundary line between the hot section and the cold section is where the temperature of the glass falls below a threshold temperature. The low hydrogen content in the hot section helps in reducing the number of open bottom bubbles, especially when the glass is melted in an oxy-fuel furnace.

## Apparatus and Method for Producing Float Glass Having Reduced Defect Density

### Related Application

This application claims the benefits of United States Provisional Application 5 Serial No. 60/414,516 filed September 27, 2002, which application is herein incorporated by reference in its entirety.

### Field of the Invention

10 The present invention relates to a float glass chamber used to produce flat glass by the float glass process, and more specifically float glass chambers that can be used to yield glass having reduced defect density.

### Background

15 The float glass process is well known for making sheets of glass. In a typical float glass process, batch materials are heated to form molten glass. The molten glass is then poured onto a bath of molten tin. The molten glass is drawn along the bath of molten tin and simultaneously cooled and attenuated to form a dimensionally stable continuous sheet of glass, typically referred to as a glass ribbon. The sheet is then removed from the bath for further processing.

20 Two types of furnaces are used in the float glass process- an air-fuel furnace and an oxy-fuel furnace. In an air-fuel furnace, fuel is mixed with warm air and combusted to provide heat to melt the glass batch materials.

25 In an oxy-fuel furnace, oxygen, not air, supports combustion. As a result, an oxy-fuel furnace provides a much more efficient melt than an air-fuel furnace because energy is no longer being wasted heated up nitrogen in the air and oxy-fuel flames have a higher flame temperature which radiates more efficiently. The increased melting efficiency allows more tonnage to be processed through an oxy-fuel furnace than through a similarly sized, air-fuel furnace.

30 Both air-fuel and oxy-fuel furnaces have water in their atmospheres. The head space (the area of the furnace above the molten glass) in an oxy-fuel furnace has a higher concentration of water than in an air-fuel furnace because the oxy-fuel atmosphere lacks the nitrogen provided in an air-fired furnace that dilutes the total water formed by combustion. Stoichiometrically, the water typically constitutes about 66% by volume of the head space in an oxy-fuel furnace versus 18% in an air-fired 35 furnace. Since the amount of water in the glass melt is proportional to the square

- 2 -

root of the concentration of water in the head space, glass melted in an oxy-fuel furnace has a 1.7 to 2 times higher water concentration than glass melted in a conventional air-fuel furnace. Typically, glass melted in an oxy-fuel furnace contains more than 0.045 weight percent water based on the total weight of the composition.

5 At the stage of the float glass process where molten glass is poured onto molten tin, the molten tin temperature in the float bath ranges from 1800°F to 1900°F (981°C to 1037°C). At 1800°F, at the glass-tin interface, water that diffuses out of the molten glass dissociates into hydrogen and oxygen. Because hydrogen isn't very soluble in tin at 1800°F, much of the hydrogen does not dissolve in the tin but 10 remains in the atmosphere of the bath. Some of the hydrogen from the disassociation of water gets trapped at the interface between the molten glass and tin and ultimately impinges on the bottom surface of the glass ribbon and form defects along the ribbon surface typically referred to as open bottom bubbles. The open-bottom bubbles can be described as voids in glass that generally have an inverted-U 15 shape cross-section. The presence of open bottom bubbles increases the overall defect density of the glass.

Customers set requirements for the defect density of glass for certain applications. The standards are very difficult to meet with conventional float glass processes due to the presence of open bottom bubbles.

20 The present invention provides a novel apparatus and method that yields float glass having a lower total defect density as a result of reduced open bottom bubble defects.

#### Summary of the Invention

25 In one embodiment, the present invention is float glass chamber comprising: a hot section having an atmosphere in at least the lower plenum comprises less than 3 percent hydrogen based on volume; and

a cold section, wherein the boundary line between the hot section and the cold section is where the temperature of the glass falls below a threshold

30 temperature.

In another embodiment, the present invention is method for making float glass with reduced defect density comprising:

- a. melting a glass composition to form a glass melt; and
- b. pouring the glass melt in a float chamber having a hot section and a cold

- 3 -

section, the boundary line between the hot section and the cold section is where the temperature of the glass falls below a threshold temperature,

wherein the hot section has an atmosphere in at least the lower plenum comprises less than 3 percent hydrogen based on volume

5

#### Drawings

FIG. 1. is a sectional view of a float chamber according to the present invention, with portions removed for clarity.

#### 10 Description of the Invention

As used herein, spatial or directional terms, such as "left", "right", "inner", "outer", "above", "below", "top", "bottom", and the like, relate to the invention as it is shown in the drawing figures. However, it is to be understood that the invention may assume various alternative orientations and, accordingly, such terms are not to be 15 considered as limiting.

Unless otherwise indicated, all numbers expressing dimensions, physical characteristics, quantities of ingredients, reaction conditions and so forth, used in the specification and claims are to be understood as being modified in all instances by the term "about". Accordingly, unless indicated to the contrary, the numerical values 20 set forth in the following specification and claims can vary depending upon the desired properties sought to be obtained by the present invention. At the very least, and not as an attempt to limit the application of the doctrine of equivalents to the scope of the claims, each numerical parameter should at least be construed in light of the number of reported significant digits and by applying ordinary rounding 25 techniques. Moreover, all ranges disclosed herein are to be understood to encompass any and all subranges subsumed therein. For example, a stated range of "1 to 10" should be considered to include any and all subranges between (and inclusive of) the minimum value of 1 and the maximum value of 10; that is, all subranges beginning with a minimum value of 1 or more and ending with a maximum 30 value of 10 or less, e.g., 5.5 to 10 or 3.2 to 7.8.

Conventional float glass processes are typically carried out using a float chamber as shown in FIG. 1. Non-limiting examples of float glass processes are disclosed in US Patent No. 3,083,551, US Patent No. 3,961,930, and US Patent No. 4,091,156, which are all hereby incorporated by reference.

- 4 -

In a conventional float glass process, a glass batch composition is heated to a molten state and poured into the float chamber. Typically, the float chamber has a refractory roof 3 that divides the chamber into an upper plenum 1 and a lower plenum 2. The lower plenum contains the glass 4 and the tin 5. The upper plenum contains 5 all of the overhead electrical heating elements to provide controlled heating of the liquid metal float bath and the formed glass ribbon. A controlled atmosphere is maintained in the chamber via gas inlets 6 and gas outlet(s) 7.

The novel float glass chamber of the present invention comprises at least two sections- a hot section and a cold section. The boundary line between the hot 10 section and the cold section is where the temperature of the glass falls below a predetermined temperature, hereinafter referred to as the "threshold temperature," required for glass in the hot section. In a non-limiting embodiment of the present invention, there is no physical barrier between the hot section and the cold section.

In one non-limiting embodiment of the invention, the threshold temperature is 15 2100°F. In another non-limiting embodiment of the invention, the threshold temperature is 1800°F. In another non-limiting embodiment of the invention, the threshold temperature is 1600°F. The lower the threshold temperature for the hot section, the larger the hot section and the smaller the cold section and visa versa.

In a non-limiting embodiment of the present invention, the hot section of the 20 chamber is approximately 90 to 100 feet from the point where the molten glass is poured onto the tin. The cold section of the chamber is the next approximately 70 to 140 feet of chamber behind the hot section, depending on the size of the bath.

In a non-limiting embodiment of the present invention, numerous gas inlets and outlets are present in the upper plenum and lower plenum of the float chamber. 25 Various gaseous mixtures can be pumped into the chamber through the gas inlets or out of the chamber through the gas outlets to control the atmosphere within the chamber.

In a non-limiting embodiment of the invention, the gas inlets to at least the lower 30 plenum over the hot section of the chamber deliver in a gas comprising less than 1 weight percent hydrogen based on volume. The remainder of the gas can be an inert gas, such as but not limited to nitrogen. Under normal operating conditions, in one non-limiting embodiment of the present invention, the atmosphere of the lower plenum over the hot section of the chamber can comprise 3 percent hydrogen based 35 on volume. In another non-limiting embodiment of the present invention, the

- 5 -

atmosphere of the lower plenum over the hot section of the chamber can comprise 1 percent hydrogen based on volume.

Various mixtures of hydrogen and nitrogen or argon or ammonia in placed of mixed gases can be pumped into the atmosphere of at least the lower plenum over 5 the cold section of the chamber. In a non-limiting embodiment of the invention, the gaseous mixture can comprise up to 10 percent of the hydrogen based on volume. The rest of the gas can be nitrogen.

The gas outlets in the float chamber can be used to remove gas from the chamber. In one non-limiting embodiment of the invention, up to 40 volume percent 10 based on volume of the total flow of the gas pumped into the chamber as discussed above can be removed from the hot section. In this embodiment, it may be necessary to adjust the level of nitrogen in the atmosphere to prevent hydrogen from flowing upstream into the hot section of the chamber.

By reducing the hydrogen in the hot section of the float chamber, the present 15 invention reduces the level of saturation of molten tin, specifically with respect to hydrogen, at the hot section of the float chamber. The molten tin is able to dissolve more hydrogen from the disassociation of water so open-bottom bubble defects in the glass are reduced.

The present invention also encompasses a method for producing glass. 20 According to the present invention, glass can be produced via the following steps: adding glass batch materials to a furnace; melting the batch materials; pouring molten glass from the furnace into the float chamber; and removing the float glass from the float chamber.

The first step of the present invention comprises adding glass batch materials 25 to a furnace. The furnace can be an air-fuel furnace or an oxy-fuel furnace. The glass batch materials can be of any conventional type including, but not limited to, conventional soda-lime-silica glass batch materials. A conventional glass composition can be characterized as follows:

30 from 65 to 75 weight percent  $\text{SiO}_2$ ;  
from 10 to 20 weight percent  $\text{Na}_2\text{O}$ ;  
from 5 to 15 weight percent  $\text{CaO}$ ;  
from 0 to 5 weight percent  $\text{MgO}$ ;  
from 0 to 5 weight percent  $\text{Al}_2\text{O}_3$  ;  
from 0 to 5 weight percent  $\text{K}_2\text{O}$ ; and  
35 from 0 to 2 weight percent  $\text{Fe}_2\text{O}_3$ .

- 6 -

All values are in weight percent based on the total weight of the glass composition.

The second step of the present invention comprises melting the batch materials in the furnace. The melting processes can be accomplished using 5 techniques that are well known in the art. For example, in an oxy-fuel furnace, the batch materials can be melted by supplying oxygen and fuel to melt the batch materials.

The third step of the present invention involves pouring molten glass from the furnace into the float chamber. As is well known in the art, the molten glass flows 10 onto the top of the molten tin and moves along the top of the tin from the hot section of the chamber to the cold section of the chamber. The temperature of the glass in the hot section and the cold section of the chamber are as discussed above. Also, the environments above the glass in the hot section and the cold section of the chamber are as discussed above.

15 The glass melt coming into the tin bath can contain water. The glass melt can have a water content equal to or greater than 0.045 weight percent based on the total weight percent of the composition.

The next step of the invention involves removing the float glass from the bath as is well known in the art.

20 After the float glass is removed from the float chamber, the glass is controllably cooled and cut into glass sheets. The sheet can be further processed, e.g. cut to shape and heat processed, to form a desired glass article.

The glass can also be coated. In a non-limiting embodiment of the invention, the glass is coated. The coating can include one or more coating layers and/or 25 coating films. The coating can be of any desired type. For example, but not to be considered as limiting, the coating can be an electroconductive coating, a heatable coating, an antenna coating, or a solar control coating, such as a low emissivity coating. Non-limiting examples of solar control and antenna coatings are disclosed in U.S. Patent Nos. 4,898,789; 5,821,001; 4,716,086; 4,610,771; 4,902,580; 30 4,716,086; 4,806,220; 4,898,790; 4,834,857; 4,948,677; 5,059,295; and 5,028,579, which patents are herein incorporated by reference. Non-limiting examples of electroconductive coatings are disclosed in U.S. Patent Nos. 5,653,903 and 5,028,759, which are herein incorporated by reference.

Glass made by a float process typically ranges from a sheet thickness of 2 35 millimeter to 20 millimeters. Glass having the aforementioned thickness can be

- 7 -

prepared on a conventional float line having a line speed ranging from 100 to 800 inches per minute. The required thickness of the glass is determined by the end use of the glass.

The present invention provides glass having reduced defect density;

5 specifically open-bottom bubbles. Such defects in glass can be measured using on-line and off-line methods. An Automatic Inspection System manufactured by Inspection Technologies Inc. can be used to measure defects on-line. Defects can be measured off-line by visual inspection. The defect density of glass is measured as number of defects per 100 square feet. The standards for measuring defects in

10 glass are well known in the art. For example, defects can be measured in categories from <0.06" to > 0.25".

Glass produced according to the present invention can meet the various commercial standards for defect density. For example, car manufacturers set standards for defect density for automotive windshields. One automobile

15 manufacturer requires-automotive windshield glass production to have less than 1 total defect per 100 square feet.

The glass produced according to the present invention can be used as automotive transparencies, in colored glasses, laminated products, etc. as is well known in the art. A laminated product can comprise at least one piece of glass

20 produced according to the present invention. Such a laminated product can be a windshield.

### Examples

The invention is illustrated by the following non-limiting examples. The following is an example of a control run where hydrogen was in the lower plenum of

25 the hot end and a run according to the present invention.

	Control	Example of the Invention
H <sub>2</sub> in total chamber	1900 scfh	600 scfh
H <sub>2</sub> in at least lower plenum of hot end	1300 scfh	0 scfh
Open Bottom Bubble defects	1.36 per 100 sq. ft.	0.07 per 100 sq. ft.
Thickness of glass	3 mm	3 mm
Tonnage	599 Tons per day	604 TPD
Threshold Temperature	1769°F	1761°F
H <sub>2</sub> O in glass	0.049%	0.049%

- 8 -

### **Conclusion**

The apparatus and method of the present invention allows float glass to be produced which has substantially reduced open-bottom bubble defects as compared to conventional float glass.

The above examples are offered only to illustrate the present invention. The scope of the present invention is defined by the following claims.

What is claimed is:

1. A float glass chamber comprising:  
a hot section having an atmosphere in at least the lower plenum comprises  
5 less than 3 percent hydrogen based on volume; and  
a cold section, wherein the boundary line between the hot section and the  
cold section is where the temperature of the glass falls below a threshold  
temperature.
- 10 2. A float chamber according to claim 1 wherein the threshold temperature of the  
chamber is 1600°F.
- 15 3. A float chamber according to claim 1 wherein the threshold temperature of the  
float chamber is 1800°F.
- 20 4. A float chamber according to claim 1 wherein the threshold temperature of the  
float chamber is 2100°F.
- 25 5. A float chamber according to claim 1 wherein the atmosphere in at least the  
lower plenum of the cold section comprises up to 10 percent of hydrogen based on  
volume.
- 30 6. A float chamber comprising:  
a hot section having an atmosphere in at least the lower plenum comprises  
less than 3 percent hydrogen based on volume; and  
a cold section, wherein the boundary line between the hot section and the  
cold section is where the temperature of the glass falls below a threshold  
temperature of greater than 1600°F.
- 35 7. A float chamber according to claim 6 wherein the atmosphere in at least the  
lower plenum of the cold section comprises up to 10 percent of hydrogen based on  
volume.
8. A method for making float glass with reduced defect density comprising:  
35 a. melting a glass composition to form a glass melt; and

- 10 -

b. pouring the glass melt in a float chamber having a hot section and an cold section, the boundary line between the hot section and the cold section is where the temperature of the glass falls below a threshold temperature, wherein the hot section has an atmosphere in at least the lower plenum comprises

5 less than 3 percent hydrogen based on volume

9. A method according to claim 8 wherein the threshold temperature of the float chamber is 1600°F.

10 10. A method according to claim 8 wherein the threshold temperature of the float chamber is 1800°F.

11. A method according to claim 8 wherein the threshold temperature of the float chamber is 2100°F.

15

12. A method according to claim 8 wherein the atmosphere in at least the lower plenum of the cold section comprises up to 10 percent of hydrogen based on volume

13. A method according to claim 8 wherein the glass melt has a water content

20 equal to or greater than 0.035 weight percent based on the total weight percent of the composition.

14. A method according to claim 8 wherein the float glass produced comprises at least one piece of glass in a laminated product.

25

15. A method according to claim 14 wherein the laminated product is a windshield.

16. A method for making float glass with reduced defect density comprising:

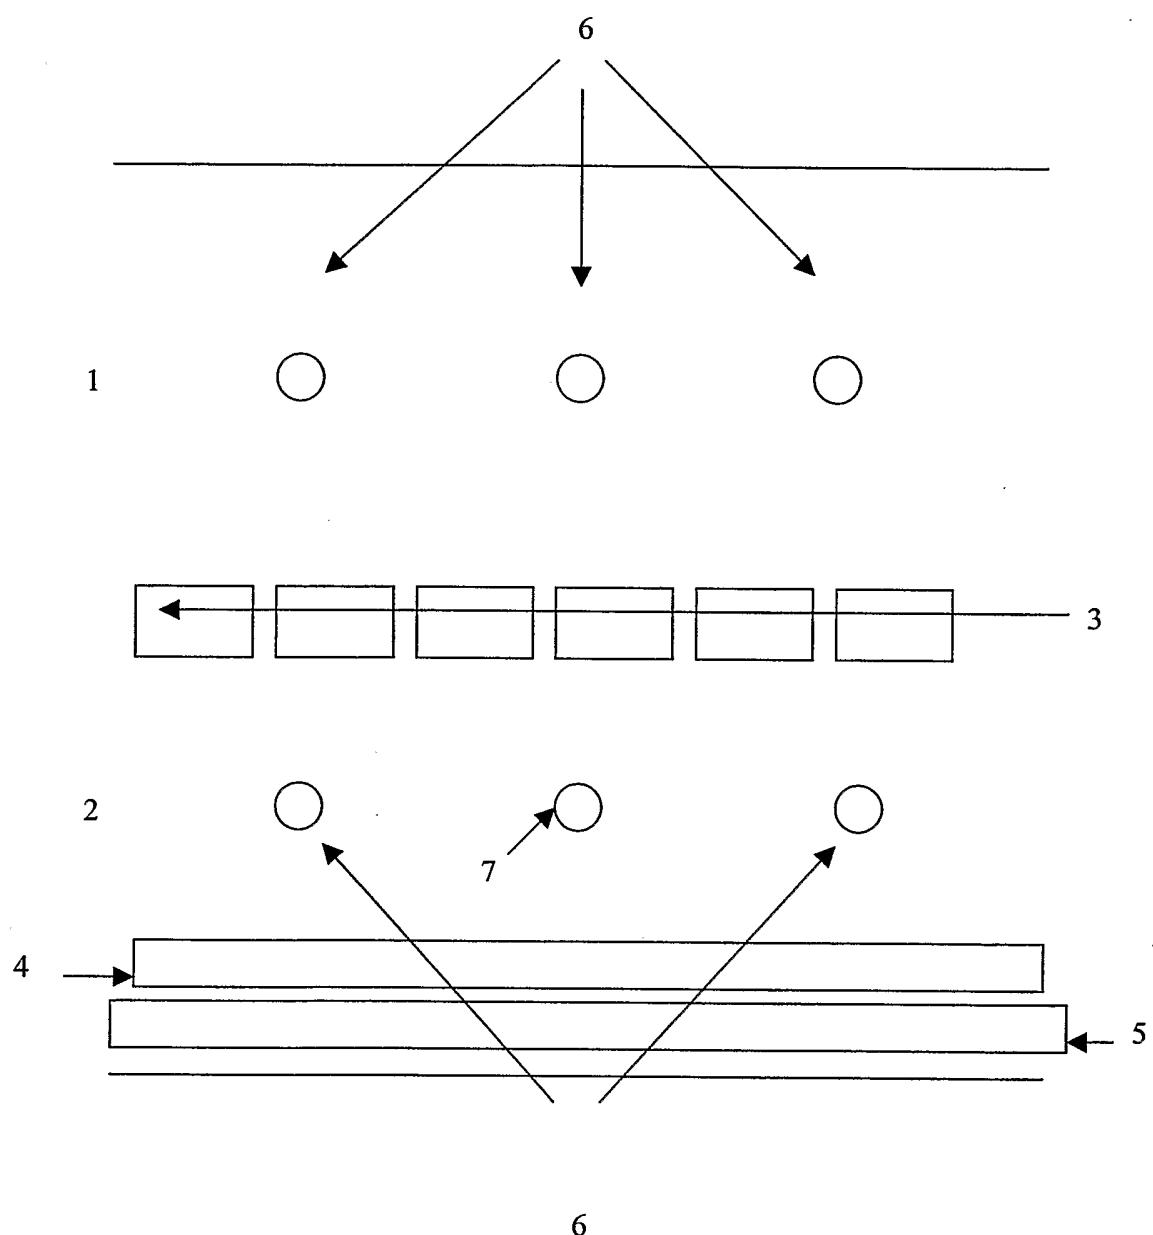
30 a. melting a glass composition to form a glass melt; and

b. pouring the glass melt into a float chamber having a hot section and an cold

section, the boundary line between the hot section and the cold section is where the temperature of the glass falls below a threshold temperature;

- 11 -

- c. pumping a gas mixture comprising less than 3% hydrogen based on volume into at least the lower plenum of the hot section.
- 17. A method according to claim 16 wherein the pumping comprises pumping a gas mixture comprising less than 1% hydrogen based on volume into at least the lower plenum of the hot section.
- 18. A method according to claim 16 wherein the glass composition comprises:
  - from 65 to 75 weight percent  $\text{SiO}_2$ ;
  - 10 from 10 to 20 weight percent  $\text{Na}_2\text{O}$ ;
  - from 5 to 15 weight percent  $\text{CaO}$ ;
  - from 0 to 5 weight percent  $\text{MgO}$ ;
  - from 0 to 5 weight percent  $\text{Al}_2\text{O}_3$ ;
  - 15 from 0 to 5 weight percent  $\text{K}_2\text{O}$ ; and
  - from 0 to 2 weight percent  $\text{Fe}_2\text{O}_3$ ,with weight percents being based on the total weight of the glass composition.
- 19. A method according to claim 16 wherein the melting occurs in an oxy-fuel furnace.

**FIG. 1.**

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/30576

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 C03B18/20

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 C03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>PATENT ABSTRACTS OF JAPAN vol. 2000, no. 02, 29 February 2000 (2000-02-29) &amp; JP 11 310421 A (ASAHI GLASS CO LTD), 9 November 1999 (1999-11-09) abstract -&amp; DATABASE WPI Derwent Publications Ltd., London, GB; AN 2000-129074 XP002267909 &amp; JP 11 310421 A (ASAHI GLASS CO LTD) abstract</p> <p>---</p> <p>US 3 594 143 A (MOHYUDDIN IFTIKHAR) 20 July 1971 (1971-07-20) claim 1</p> <p>---</p> <p>---</p>	1-19
X		1-19

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
26 January 2004	06/02/2004
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer  Creux, S

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 03/30576

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 356 476 A (GULOTTA JOSEPH A) 5 December 1967 (1967-12-05) column 4, line 7-10 column 4, line 36-39 ----	1-19
X	FR 1 573 975 A (ERSTE DEUTSCHE FLOATGLASS GMBH & CO OHG) 11 July 1969 (1969-07-11) page 1, right column, line 3 from bottom - page 2, left column, line 5 ----	1-19
X	GB 1 034 332 A (CHARLES RONALD TAYLOR; PILKINGTON BROTHERS LTD; ALAN EDWARDS) 29 June 1966 (1966-06-29) claims 11,12; figure 1 ----	1-19
A	US 3 615 316 A (KITA HIDEO) 26 October 1971 (1971-10-26) column 1, line 10-30 ----	1-18
A	US 3 333 936 A (WARREN RICHARD E) 1 August 1967 (1967-08-01) column 3, line 61 -column 4, line 2; figure 1 ----	1-18
A	EP 0 812 809 A (PRAXAIR TECHNOLOGY INC) 17 December 1997 (1997-12-17) claims 7,9 ----	13,19

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

 International application No  
 PCT/US 03/30576

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
JP 11310421	A	09-11-1999	NONE		
US 3594143	A	20-07-1971	BE	717337 A	30-12-1968
			CS	166684 B2	29-03-1976
			DE	1771683 A1	10-02-1972
			ES	355538 A1	01-03-1970
			FR	1571185 A	13-06-1969
			GB	1228157 A	15-04-1971
			LU	56369 A1	04-10-1968
			NL	6809235 A	31-12-1968
US 3356476	A	05-12-1967	BE	676141 A	08-08-1966
			DE	1596586 A1	18-03-1971
			FR	1457900 A	20-01-1967
			GB	1065749 A	19-04-1967
			NL	129976 C	
			NL	6600182 A	09-08-1966
FR 1573975	A	11-07-1969	DE	1596419 B1	15-10-1970
GB 1034332	A	29-06-1966	GB	1034333 A	29-06-1966
			AT	254421 B	26-05-1967
			AT	250601 B	25-11-1966
			BE	638796 A	
			BE	638797 A	
			DE	1471945 A1	20-02-1969
			DE	1471946 A1	08-05-1969
			FR	1376823 A	31-10-1964
			FR	1394017 A	02-04-1965
			JP	48033012 B	11-10-1973
			JP	49001284 B	12-01-1974
			NL	134932 C	
			NL	299371 A	
			NL	299373 A	
			SE	302831 B	05-08-1968
			US	3337322 A	22-08-1967
			US	3337319 A	22-08-1967
US 3615316	A	26-10-1971	BE	716694 A	02-12-1968
			DE	1771596 A1	05-01-1972
			ES	355047 A1	01-06-1970
			FR	1580547 A	05-09-1969
			GB	1191026 A	06-05-1970
US 3333936	A	01-08-1967	BE	688051 A	10-04-1967
			DE	1596501 A1	18-03-1971
			FR	1496498 A	29-09-1967
EP 0812809	A	17-12-1997	BR	9703522 A	25-05-1999
			CA	2207509 A1	11-12-1997
			CN	1169965 A	14-01-1998
			EP	0812809 A2	17-12-1997
			JP	10114529 A	06-05-1998
			US	5922097 A	13-07-1999