

(19) DANMARK

(10) DK/EP 2234451 T3



(12)

Oversættelse af
europæisk patent

Patent- og
Varemærkestyrelsen

(51) Int.Cl.: **H 04 W 52/02 (2009.01)** *H 04 W 72/12 (2009.01)* *H 04 W 76/04 (2009.01)*

(45) Oversættelsen bekendtgjort den: **2015-04-27**

(80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2015-01-14**

(86) Europæisk ansøgning nr.: **10163332.9**

(86) Europæisk indleveringsdag: **2006-08-25**

(87) Den europæiske ansøgnings publiceringsdag: **2010-09-29**

(30) Prioritet: **2005-08-26 US 711534 P** *2006-04-21 US 793973 P*
2006-08-04 US 499458

(62) Stamansøgningsnr: **06802333.2**

(84) Designerede stater: **AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR**

(73) Patenthaver: **Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714, USA**

(72) Opfinder: **Montoja, Juan, 5775 Morehouse Drive, San Diego, CA 92121-1714, USA**
MALLADI, Durga Prasad, 5775 Morehouse Drive, San Diego, CA 92121-1714, USA
Tenny, Nathan Edward, 5775 Morehouse Drive, San Diego, CA 92121-1714, USA
Grilli, Francesco, 5775 Morehouse Drive, San Diego, CA 92121-1714, USA
Gholmieh, Aziz, 5775 Morehouse Drive, San Diego, CA 92121-1714, USA

(74) Fuldmægtig i Danmark: **Chas. Hude A/S, H.C. Andersens Boulevard 33, 1780 København V, Danmark**

(54) Benævnelse: **Fremgangsmåde og apparat til pakkekommunikationer i trådløse systemer**

(56) Fremdragne publikationer:
WO-A1-01/52566
US-A- 5 239 557
US-A1- 2003 086 379
US-A1- 2004 229 605
ELY J J ET AL: "Electromagnetic interference assessment of CDMA and GSM wireless phones to aircraft navigation radios" 21TH. DASC. THE 21TH. DIGITAL AVIONICS SYSTEMS CONFERENCE PROCEEDINGS. IRVINE, CA, OCT. 27 - 31, 2002; [DIGITAL AVIONICS SYSTEMS CONFERENCE], NEW YORK, NY : IEEE, US, vol. 2, 27 October 2002 (2002-10-27), pages 1055-1067, XP010616283 ISBN: 978-0-7803-7367-9

DK/EP 2234451 T3

DESCRIPTION

BACKGROUND

I. Field

[0001] The present disclosure relates generally to communication, and more specifically to techniques for transmitting and receiving data in a wireless communication network.

II. Background

[0002] A wireless device (e.g., a cellular phone) in a wireless communication network may operate in one of several operating modes, such as active and idle, at any given moment. In the active mode, the wireless device may be allocated radio resources by the network and may actively exchange data with the network, e.g., for a voice or data call. In the idle mode, the wireless device may not be allocated radio resources and may be monitoring overhead channels transmitted by the network. The wireless device may transition between the active and idle modes, as necessary, based on data requirements of the wireless device. For example, the wireless device may transition to the active mode whenever there is data to send or receive and may transition to the idle mode after completing the data exchange with the network.

[0003] The wireless device may exchange signaling with the network to transition between operating modes. The signaling consumes network resources and delays data transmission until radio resources are allocated to the wireless device. To avoid the signaling and delay, the wireless device may remain in the active mode for an extended period of time. However, extended stay in the active mode may result in a waste of the allocated radio resources when there is no data to exchange. Furthermore, operation in the active mode may consume more battery power, which may shorten standby time between battery recharges and talk time when there is data to exchange.

[0004] There is therefore a need in the art for techniques to transmit and receive data in an efficient manner.

[0005] WO 01/52566 describes discontinuous transmission modes on a dedicated traffic channel.

[0006] US 2003/0086379 describes achieving power savings by turning off all or some of the baseband processing for codes and timeslots that have not been transmitted due to full or partial DTX.

SUMMARY

[0007] The object of the present invention can be achieved by providing user equipment and a corresponding method as well as an apparatus and method according respectively to claims 1, 2, 15 and 16.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 shows a diagram of a 3GPP network.

[0009] FIG. 2 shows a state diagram of Radio Resource Control (RRC) states for a User Equipment (UE).

[0010] FIG. 3 shows an embodiment of the CPC mode.

[0011] FIG. 4 shows enabled subframes for the CPC mode.

[0012] FIGS. 5A, 5B and 5C show operation in DTX T1, DTXT2 and DRX modes, respectively.

[0013] FIGS. 6A and 6B show exemplary uplink transmissions in the CPC mode.

[0014] FIG. 7 shows exemplary downlink and uplink transmissions in the CPC mode.

[0015] FIG. 8 shows an event flow for transitioning from DRX mode to NO DRX mode.

[0016] FIG. 9 shows a process performed by the UE in the CPC mode.

[0017] FIG. 10 shows a process performed by the network for the CPC mode.

[0018] FIG. 11 shows a block diagram of the UE, a Node B, and an RNC.

DETAILED DESCRIPTION

[0019] The word "exemplary" is used herein to mean "serving as an example, instance, or illustration." Any embodiment described herein as "exemplary" is not necessarily to be construed as preferred or advantageous over other embodiments.

[0020] The techniques described herein may be used for various wireless communication networks such as Code Division Multiple Access (CDMA) networks, Time Division Multiple Access (TDMA) networks, Frequency Division Multiple Access (FDMA) networks, and Orthogonal FDMA (OFDMA) networks. The terms "network" and "system" are often used interchangeably. A CDMA network may implement a radio technology such as W-CDMA, cdma2000, and so on. cdma2000 covers IS-2000, IS-856 and IS-95 standards. A TDMA network may implement a radio technology such as Global System for Mobile Communications (GSM). These various radio technologies and standards are known in the art. W-CDMA and GSM are described in documents from an organization named "3rd Generation Partnership Project" (3GPP). cdma2000 is described in documents from an organization named "3rd Generation Partnership Project 2" (3GPP2). For clarity, the techniques are described below for Universal Mobile Telecommunication System (UMTS), which utilizes W-CDMA. UMTS terminology is used in much of the description below.

[0021] FIG. 1 shows a diagram of a 3GPP/UMTS network 100 that includes a Universal Terrestrial Radio Access Network (UTRAN) 120 and a core network 150. A UE 110 communicates with a Node B 130 in UTRAN 120. UE 110 may be stationary or mobile and may also be referred to as a wireless device, a mobile station, a user terminal, a subscriber unit, a station, or some other terminology. UE 110 may be a cellular phone, a personal digital assistant (PDA), a handheld device, a wireless modem, and so on. The terms "UE", "wireless device", and "user" are used interchangeably herein. Node B 130 is generally a fixed station that communicates with the UEs and may also be referred to as a base station, an access point, or some other terminology. Node B 130 provides communication coverage for a particular geographic area and supports communication for UEs located within the coverage area. A Radio Network Controller (RNC) 140 couples to Node B 110 and provides coordination and control for the Node B. Core network 150 may include various network entities that support various functions such as packet routing, user registration, mobility management, etc.

[0022] UE 110 may communicate with Node B 130 on the downlink and/or uplink at any given moment. The downlink (or forward link) refers to the communication link from the Node B to the UE, and the uplink (or reverse link) refers to the communication link from the UE to the Node B.

[0023] In UMTS, data is processed as one or more transport channels at a higher layer. The transport channels may carry data for one or more services, e.g., voice, video, packet data, and so on. The transport channels are mapped to physical channels at a physical layer or Layer 1 (L1). The physical channels are channelized with different channelization codes and are orthogonal to one another in code domain.

[0024] 3GPP Release 5 and later supports High-Speed Downlink Packet Access (HSDPA). 3GPP Release 6 and later supports High-Speed Uplink Packet Access (HSUPA). HSDPA and HSUPA are sets of channels and procedures that enable high-speed packet data transmission on the downlink and uplink, respectively. Tables 1 and 2 list some downlink and uplink physical channels, respectively, in UMTS. The HS-SCCH, HS-PDSCH, and HS-DPCCH are used for HSDPA. The E-DPCCH, E-DPDCH, and E-HICH are used for HSUPA.

Table 1 - Downlink Channels

Channel	Channel Name	Description
P-CCPCH	Primary Common Control Physical Channel	Carry pilot and system frame number (SFN).

Channel	Channel Name	Description
Downlink DPCCH	Dedicated Physical Control Channel	Carry pilot, transport format combination indicator (TFCI) for downlink DPDCH, and transmit power control (TPC) for uplink.
Downlink DPDCH	Dedicated Physical Data Channel	Carry packets for the UE.
HS-SCCH	Shared Control Channel for HS-DSCH	Carry format information for packets sent on associated HS-PDSCH.
HS-PDSCH	High Speed Physical Downlink Shared Channel	Carry packets for different UEs.
E-HICH	E-DCH Hybrid ARQ Indicator Channel	Carry acknowledgement (ACK) and negative acknowledgement (NAK) for packets sent on E-DPDCH.

Table 2 - Uplink Channels

Channel	Channel Name	Description
Uplink DPCCH	Dedicated Physical Control Channel	Carry pilot, TFCI for uplink DPDCH, TPC for downlink, and feedback information (FBI).
Uplink DPDCH	Dedicated Physical Data Channel	Carry packets from the UE.
HS-DPCCH	Dedicated Physical Control Channel for HS-DSCH	Carry ACK/NAK for packets received on HS-PDSCH and channel quality indicator (CQI).
E-DPCCH	E-DCH Dedicated Physical Control Channel	Carry format information, retransmission sequence number, and happy bit for E-DPDCH.
E-DPDCH	E-DCH Dedicated Physical Data Channel	Carry packets from the UE.

[0025] FIG. 2 shows a state diagram 200 of the Radio Resource Control (RRC) states for the UE. Upon being powered on, the UE performs cell selection to find a suitable cell from which the UE can receive service. Thereafter, the UE may transition to an idle mode 210 or a connected mode 220 depending on whether there is any activity for the UE. In the idle mode, the UE has registered with the UTRAN, is listening for paging messages, and updates its location with the UTRAN when necessary. In the connected mode, the UE can receive and/or transmit data, depending on its RRC state and configuration. The connected mode may also be referred to as a connected state, an active mode, an active state, a traffic state, a traffic channel state, and so on.

[0026] In the connected mode, the UE may be in one of four possible RRC states - a CELL_DCH state 230, a CELL_FACH state 232, a CELL_PCH state 234, or a URA_PCH state 236. The CELL_DCH state is characterized by (1) dedicated physical channels allocated to the UE for the downlink and uplink and (2) a combination of dedicated and shared transport channels being available to the UE. The CELL_FACH state is characterized by (1) no dedicated physical channels allocated to the UE, (2) a default common or shared transport channel assigned to the UE for use to access the UTRAN, and (3) the UE continually monitoring a Forward Access Channel (FACH) for signaling such as Reconfiguration messages. The CELL_PCH and URA_PCH states are characterized by (1) no dedicated physical channels allocated to the UE, (2) the UE periodically monitoring a Paging Channel (PCH) for paging messages, and (3) the UE not being permitted to transmit on the uplink. The modes and states for the UE are described in 3GPP TS 25.331.

[0027] While in the connected mode, the UTRAN can command the UE to be in one of the four possible states based on activity of the UE. The UE may transition (1) from the CELL_DCH or CELL_FACH state in the connected mode to the idle mode by performing a Release RRC Connection procedure, (2) from the idle mode to the CELL_DCH or CELL_FACH state by performing an Establish RRC Connection procedure, (3) between the CELL_DCH and CELL_FACH states by performing a reconfiguration procedure, and (4) between different configurations in the CELL_DCH state by also performing a reconfiguration procedure. These procedures are described in 3GPP TS 25.331.

[0028] In an embodiment, the CELL_DCH state comprises a Continuous Packet Connectivity (CPC) mode 240 and an Active mode 250. The Active mode may correspond to operation of the HSDPA and HSUPA channels as described in 3GPP Release 6. In the Active mode, data may be sent in any subframe on the downlink and uplink. A subframe is a time interval in which a transmission may be sent on a link. A subframe may have different durations in different networks and/or for different configurations of a given network. The CPC mode may be used to achieve efficient data transmission and reception for the UE. The CPC mode may provide power savings for the UE and/or capacity improvement for the UTRAN.

[0029] In an embodiment, while in the CPC mode, radio resources (e.g., physical channels) are allocated and states for higher layers (e.g., Layers 2 and 3) are maintained, but only a subset of the subframes available on the downlink and uplink are enabled. The UE may send signaling and/or data on the enabled uplink subframes and may receive signaling and/or data on the enabled downlink subframes. The UE may power down certain circuit blocks and subsystems, e.g., its transmitter and/or receiver, during the non-enabled subframes to conserve battery power.

[0030] In general, the CPC mode may include any number of DTX modes, any number of DRX modes, and/or other modes. Each DTX mode may be associated with different enabled uplink subframes and/or different actions to be performed by the UE. Each DRX mode may be associated with different enabled downlink subframes and/or different actions to be performed by the UE.

[0031] FIG. 3 shows an embodiment of the CPC mode. In this embodiment, the CPC mode includes DTX modes 310 and 312, a DRX mode 314, and a NO DRX mode 316. DTX mode 310 is also referred to as DTX T1 mode, and DTX mode 312 is also referred to as DTX T2 mode. Table 3 lists the DTX and DRX modes in FIG. 3 and provides a short description for each mode.

Table 3

Mode	Description
DTXT1	UE has one enabled subframe in every T1 subframes on the uplink.
DTX T2	UE has one enabled subframe in every T2 subframes on the uplink.
DRX	UE has one enabled subframe in every R subframes on the downlink.
NO DRX	All subframes on the downlink are enabled.

[0032] In general, any values may be selected for T1, T2 and R. In an embodiment, T1, T2 and R are defined such that $T1 \leq T2$ and $R \leq T2$. In an embodiment, T1, T2 and R are selected from a set of possible values. For example, T1, T2 and R may each be set equal to 1, 4, 8, or 16 and may be expressed as $T1, T2 \text{ and } R \in \{1, 4, 8, 16\}$. Other sets of possible values may also be used for T1, T2 and R. The possible values may be power of twos and/or other values. $T1=1$ means that all uplink subframes are enabled. Similarly, $R = 1$ means that all downlink subframes are enabled. The NO DRX mode may be considered as the DRX mode with $R = 1$.

[0033] T1-enabled subframes are enabled subframes for the DTX T1 mode and are spaced apart at intervals of T1 subframes. T2-enabled subframes are enabled subframes for the DTX T2 mode and are spaced apart at intervals of T2 subframes. R-enabled subframes are enabled subframes for the DRX mode and are spaced apart at intervals of R subframes. In an embodiment, the T2-enabled subframes are a subset of the T1-enabled subframes. In other embodiments, the T2-enabled subframes may be selected independently of the T1-enabled subframes.

[0034] In an embodiment, the T1-enabled, T2-enabled, and R-enabled subframes for the UE are identified by an Offset from a reference time. This reference time may be a start time in which the CPC mode is effective for the UE and may be given in signaling used to convey CPC parameters. T1, T2 and R define three enabled subframe patterns or sets that start at a subframe where the CPC configuration was effective (the reference time) plus the Offset. In an embodiment, the parameters of the CPC mode comprise T1, T2, R, Offset, and reference time. The CPC mode may also be defined based on other parameters. The UTRAN may select suitable values for T1, T2 and R based on various factors such as data activity, network loading, and so on. The UTRAN may select different Offset values for different UEs to distribute these UEs across the available subframes.

[0035] In general, any values may be selected for T1, T2 and R. Different values may be more suitable for different services and/or different conditions. In an embodiment, the CPC parameters may be set as $R = 4$, $T1 = 4$ and $T2 = 8$ for voice-over-Internet Protocol (VoIP). This configuration achieves appropriately 50% sleeping periods during a voice session. In an embodiment, the CPC parameters may be set as $R = 8$, $T1 = 1$ and $T2 = 16$ for data operation. This configuration achieves a long sleeping period when there is no data to send. The UTRAN may order the UE out of DRX mode whenever there is data to send on the downlink. There is an average of $R / 2$ subframes of delay to start a downlink packet transmission since the UE is receiving every R subframe. In an embodiment, the CPC parameters may be set as $R = 1$, $T1 = 4$ and $T2 = 8$ when downlink delay requirements are stringent or when downlink load is high. Various other values may also be used for the CPC parameters to achieve other characteristics.

[0036] In an embodiment, the UTRAN (e.g., the RNC) configures the CPC parameters for the UE during call setup, e.g., using Layer 3 (L3) signaling and/or some other signaling. Alternatively or additionally, the UTRAN may configure or modify the CPC parameters through a Reconfiguration message during the call. The UTRAN may also configure or modify the CPC parameters in other manners and/or with other types of signaling. For example, the T1, T2 and R values may be sent as part of system

information signaled by the Node B. Different T1, T2 and R values may also be defined for different call types.

[0037] Table 3 lists actions performed by the UE for each DTX and DRX mode, in accordance with an embodiment.

Table 4

Mode	Actions performed by UE
DTX T1	Transmit pilot and signaling in each T1-enabled subframe. May transmit data in any T1-enabled subframe.
DTX T2	Transmit pilot and signaling in each T2-enabled subframe. No transmission of data.
DRX	Receive signaling on the HS-SCCH in each R-enabled subframe. May receive data on the HS-DSCH according to the signaling for scheduling information received in any R-enabled subframe.
NO DRX	Receive signaling on the HS-SCCH in each subframe. May receive data on the HS-DSCH in any subframe.

[0038] FIG. 3 also shows exemplary criteria for transitioning between the DTX and DRX modes. In an embodiment, the UE can autonomously transition between the two DTX modes, e.g., based on data activity at the UE. The UE may transition from the DTX T2 mode to the DTX T1 mode whenever there is data to send on the uplink. The UE may transmit just signaling in each T1-enabled subframe that the UE has no data to send. The UE may transition from the DTX T1 mode to the DTX T2 mode if there is no data to send on the uplink, e.g., if T2 subframes have passed without any uplink data transmission.

[0039] In an embodiment, the UE may revert to full use of all uplink subframes autonomously and instantaneously. The T1-enabled subframes may be sufficient for light and/or expected exchanges of data. The UE may use more uplink subframes whenever the T1-enabled subframes are insufficient for the data load at the UE. The UE may, in essence, transition from the DTX T2 mode to the Active mode for data transmission as needed.

[0040] In an embodiment, the UE transitions between the DRX mode and the NO DRX mode as directed by the UTRAN, e.g., the Node B. Unlike DTX for the uplink, DRX operation is synchronized between the Node B and the UE. The Node B may direct the UE to transition to the DRX mode based on any of the following: (1) downlink traffic load for the UE is light, (2) downlink data rate is below a threshold and may be served at a reduced subframe rate, (3) there is lack of data activity for the UE, (4) a data queue for the UE has been empty for some time or has just been emptied, or (5) some other reason. While in the DRX mode, the UE may ignore downlink subframes that are not R-enabled subframes. The Node B may direct the UE to transition to the NO DRX mode based on any of the following: (1) data for the UE has just arrived, (2) downlink traffic load for the UE is heavy, (3) the data queue for the UE is above a threshold or is growing at a faster rate than the transmission rate to the UE, (4) cell loading is heavy, or (5) some other reason. In the NO DRX mode, the UE receives signaling (e.g., decodes the HS-SCCH) in every subframe and may receive data as indicated by the signaling.

[0041] In an embodiment, to achieve fast transition between the DRX mode and the NO DRX mode, the commands to transition between these modes are sent using fast Layer 1 (L1) and/or Layer 2 (L2) signaling from the Node B to the UE. For example, a single L1/L2 fast signaling bit may be used to enable or disable the DRX mode. The fast L1/L2 signaling provides the Node B with a fast mechanism to revert to full use of all available downlink subframes and may improve synchronization between the Node B and the UE. Sending L1/L2 signaling from the Node B to the UE may incur a delay of approximately 5 to 8 ms whereas sending L3 signaling from the RNC to the UE may incur a delay of 100 ms or more. Nevertheless, the commands to transition between modes may be sent using signaling in any layer and in any manner.

[0042] The command to transition from the NO DRX mode to the DRX mode is referred to as Node B order #1. The command to transition from the DRX mode to the NO DRX mode is referred to as Node B order #2. The UTRAN (e.g., the Node B) may send Node B order #1 whenever the UTRAN wants to ensure that both the UTRAN and the UE operate in the DRX mode. The UTRAN may send Node B order #2 whenever the UTRAN wants to ensure that both the UTRAN and the UE operate in the NO DRX mode.

[0043] HSDPA and HSUPA employ hybrid automatic retransmission (HARQ) to improve reliability of data transmission. HARQ for HSDPA and HARQ for HSUPA operate in similar manner. For HSDPA, HARQ retransmissions may be sent anytime after a minimum delay, e.g., 6 to 8 TTIs. For HSUPA, HARQ retransmissions are sent 8 TTIs later.

[0044] For HSDPA, an HARQ entity at the Node B processes and transmits a packet to the UE. A corresponding HARQ entity at the UE receives and decodes the packet. The UE sends an ACK if the packet is decoded correctly or a NAK if the packet is

decoded in error. The Node B retransmits the packet if a NAK is received and transmits a new packet if an ACK is received. The Node B transmits the packet once and may retransmit the packet any number of times until an ACK is received for the packet or the Node B decides to abandon the transmission of the packet.

[0045] The Node B may transmit packets on up to eight HARQ processes to the UE. The HARQ processes may be viewed as HARQ channels used to send packets. The Node B receives downlink packets to send to the UE and transmits these packets in sequential order to the UE on the available HARQ processes. Each packet is sent on one HARQ process and includes an HARQ process ID (HID) that indicates the HARQ process used for that packet. Each HARQ process carries one packet at a time until the transmission/ retransmission for that packet is completed and may then be used to send another packet.

[0046] If HARQ is used for transmission, then the condition of "no data to send" for the transition from the DTX T1 mode to the DTX T2 mode may correspond to no HARQ process being active. This in turn may be detected by no activity on any of the HARQ processes. When all HARQ processes are acknowledged, the UE may transition to the DTX T2 mode.

[0047] FIG. 4 shows an embodiment of the enabled subframes for HSDPA and HSUPA. In UMTS, the transmission time line is partitioned into frames, with each frame being identified by the SFN. Each frame has a duration of 10 milliseconds (ms) and is partitioned into five subframes 0 through 4. Each subframe has a duration of 2 ms and covers three slots. Each slot has a duration of 0.667 ms and covers 2560 chips at 3.84 Mcps, or $T_{slot} = 2560$ chips.

[0048] On the downlink, the P-CCPCH carries pilot and the SFN. The P-CCPCH is used directly as timing reference for downlink channels and is used indirectly as timing reference for uplink channels. The subframes of the HS-SCCH are time-aligned with the P-CCPCH. The subframes of the HS-PDSCH are delayed by $T_{HS-PDSCH} = 2T_{slot}$ from the subframes of the HS-SCCH. The subframes of the E-HICH are delayed by $T_{E-HICH,n}$ from the subframes of the HS-SCCH, where $T_{E-HICH,n}$ is defined in 3GPP TS 25.211.

[0049] On the uplink, the subframes of the HS-DPCCH are delayed by 7.5 slots from the subframes of the HS-PDSCH at the UE, where T_{PD} in FIG. 4 denotes the propagation delay from the Node B to the UE. The uplink DPCCH, E-DPCCH, and E-DPDCH are time-aligned and their frame timing is $m \times 256$ chips from the frame timing of the HS-DPCCH. The timing of the uplink DPCCH is not directly related to the timing of the HS-DPCCH. The frame timing for the downlink and uplink channels is described in 3GPP TS 25.211.

[0050] FIG. 4 also shows an exemplary CPC configuration with $T_1 = 4$, $T_2 = 8$, $R = 4$, and $Offset = 1$. In this example, the T_1 -enabled subframes on the uplink DPCCH, E-DPCCH, E-DPDCH, and E-HICH are spaced apart by 4 subframes. The T_2 -enabled subframes on the uplink DPCCH are spaced apart by 8 subframes. The R -enabled subframes on the HS-SCCH, HS-DPDCH and HS-DPCCH are spaced apart by 4 subframes. The Offset determines the specific subframes to use for the enabled subframes. The T_1 -enabled, T_2 -enabled, and R -enabled subframes may be aligned in time (e.g., as described in TR25.903, section 4.5.2.1) to reduce rise-over-thermal (ROT) and to extend possible sleep time for the UE between the enabled subframes. For example, transmissions on the uplink (including ACKs for downlink transmissions) may be clubbed or combined together to reduce ROT at the Node B. Transmissions on the downlink (including ACKs for uplink transmissions) may also be clubbed together to reduce wake up time at the wireless device.

[0051] FIG. 5A shows exemplary operation of the UE in the DTX T1 mode for the CPC configuration shown in FIG. 4. The UE transmits pilot and signaling (e.g., TPC) on the uplink DPCCH and signaling (e.g., CQI) on the HS-DPCCH in each T_1 -enabled subframe. If the UE has data to send in a given T_1 -enabled subframe, then the UE transmits signaling on the E-DPCCH, transmits data on the E-DPDCH, and receives ACK/NAK on the E-HICH.

[0052] FIG. 5B shows exemplary operation of the UE in the DTX T2 mode for the CPC configuration shown in FIG. 4. The UE transmits pilot and signaling (e.g., TPC) on the uplink DPCCH and signaling (e.g., CQI) on the HS-DPCCH in each T_2 -enabled subframe. The UE does not transmit signaling on the E-DPCCH, does not transmit data on the E-DPDCH, and does not receive ACK/NAK on the E-HICH.

[0053] FIG. 5C shows exemplary operation of the UE in the DRX mode for the CPC configuration shown in FIG. 4. The UE receives signaling on the HS-SCCH in each R -enabled subframe. The UE may receive data on the HS-DPDCH in any R -enabled subframe and may then send ACK/NAK on the HS-DPCCH.

[0054] In the embodiment shown in FIGS. 5A through 5C, CQI reports are sent in the T_1 -enabled subframes in the DTX T1 mode and in the T_2 -enabled subframes in the DTX T2 mode. In another embodiment, CQI reports are sent in the R -enabled subframes.

The UE may also send additional CQI reports when sending ACKs/NAKs. The additional CQI reports may be used for retransmissions or new transmissions.

[0055] In an embodiment, the two DTX modes and the DRX mode may be defined independently of one another. In another embodiment, the DTX and DRX modes are jointly parameterized, e.g., to time align the T1-enabled subframes with the R-enabled subframes. This embodiment may extend sleep time and enhance battery savings for the UE. In yet another embodiment, the spacing of T1 and R is such that subframes used for retransmissions are automatically enabled subframes.

[0056] In an embodiment, the UTRAN (e.g., the Node B) expects uplink transmission from the UE only in the T1-enabled subframes. In another embodiment, the UTRAN expects uplink transmission from the UE in all subframes and thus always listens for the UE. Since the UE can autonomously transition between the DTX T1 mode and the DTX T2 mode, the UTRAN may not receive uplink transmissions in some T1-enabled subframes. The UTRAN may determine whether the UE transmits the uplink DPCCH in each T1-enabled subframe (e.g., based on the pilot) and may discard the received signaling (e.g., TPC bits for downlink power control) if the pilot is absent or is of insufficient quality.

[0057] In an embodiment, the UE expects downlink transmissions from the UTRAN in the R-enabled subframes while in the DRX mode and in any subframe while in the NO DRX mode. The UE may discard signaling (e.g., TPC bits for uplink power control) that does not correspond to a transmission sent by the UE. The UE starts DRX operation upon receiving Node B order #1 and stops DRX operation upon receiving Node B order #2.

[0058] If there is at least one HARQ process active, then the UE attempts to transmit using the T1-enabled subframes. If the UTRAN expects uplink transmissions from the UE in all subframes, then the UE may use other subframes if the T1-enabled subframes are not sufficient. The UE does not DTX more than (T1 - 1) subframes while there is at least one HARQ process active. If there are no active HARQ processes, then the UE transmits pilot and signaling (e.g., CQI) on the T2-enabled subframes and does not DTX more than (T2 - 1) subframes.

[0059] FIG. 6A shows exemplary uplink transmissions for a CPC configuration with T1 = 4 = 8 ms and T2 = 8 = 16 ms. In this example, the UE may receive vocoder packets from upper layer every 20 ms. Line 1 in FIG. 6A shows vocoder packets received by the UE. Lines 2 through 5 show packet transmissions and retransmissions for different maximum numbers of retransmissions (N). The T1-enabled subframes are represented by circles in lines 2 through 5. The T2-enabled subframes are every other circle in lines 2 through 5 and are indicated by label "T2e" above line 2. The UE transitions to the DTX T1 mode upon receiving the first packet 0 for transmission to the UTRAN.

[0060] For N = 1 retransmission in line 2, packet 0 is received in subframe S₁ and sent in T1-enabled subframes S₁ and S₃, packet 1 is received in subframe S₄ and sent in T1-enabled subframes S₅ and S₇, and so on. Pilot and CQI are sent in T1-enabled subframes, including subframes S₂, S₆, S₉, S₁₃ and S₁₅ without any data transmission. HARQ processes for packets 0, 1, 2 and 3 are completed after subframe S₁₄. The UE transitions to the DTX T2 mode in subframe S₁₆ and sends pilot and CQI in T2-enabled subframes S₁₇ and S₁₉. The UE transitions to the DTX T1 mode upon receiving packet 4 in subframe S₂₁ and sends this packet in T1-enabled subframes S₂₂ and S₂₄.

[0061] For N = 2 retransmissions in line 3, packet 0 is received in subframe S₁ and sent in T1-enabled subframes S₁, S₃ and S₆, packet 1 is received in subframe S₄ and sent in T1-enabled subframes S₅, S₇ and S₉, and so on. Pilot and CQI are sent in T1-enabled subframes, including subframes S₂ and S₁₅ without any data transmission. HARQ processes for packets 0, 1, 2 and 3 are completed after subframe S₁₆. The UE transitions to the DTX T2 mode in subframe S₁₈ and sends pilot and CQI in T2-enabled subframes S₁₉. The UE transitions to the DTX T1 mode upon receiving packet 4 in subframe S₂₁ and sends this packet in T1-enabled subframes S₂₂ and S₂₄.

[0062] The packet transmission and retransmission occur in similar manner for N = 3 retransmissions in line 4 and N = 4 retransmissions in line 5. Multiple packets may be sent in some T1-enabled subframes.

[0063] FIG. 6B shows exemplary uplink transmissions for the CPC configuration with T1 = 4 = 8 ms and T2 = 8 = 16 ms. In this example, the UE receives vocoder packets from upper layer every 20 ms. The UE does not transition to the DTX T2 mode because at least one HARQ process is active during the entire time duration shown in FIG. 6B. More than two packets may be sent in a given T1-enabled subframe for N = 4 retransmissions.

[0064] FIG. 7 shows exemplary downlink and uplink transmissions in the CPC mode. At time L₁, the UE operates in the DRX

mode upon receiving Node B order #1 and also autonomously selects the DTX T2 mode. At time L₂, the UE has data to send, transitions to the DTX T1 mode, and transmits packet A. At time L₃, the UE transitions to the NO DRX mode upon receiving Node B order #2 and thereafter receives packets 0 through 5. At time L₄, the UE transitions to the DTX T2 mode following a period of no activity after sending packet A. At time L₅, the UE has data to send, transitions to the DTX T1 mode, and transmits packets B through F. At time L₆, the UE transitions to the DTX T2 mode following a period of no activity. At time L₇, the UE transitions to the DRX mode upon receiving Node B order #1. At time L₈, the UE has data to send, transitions to the DTX T1 mode, and transmits packets G through I. At time L₉, the UE transitions to the DTX T2 mode following a period of no activity. At time L₁₀, the UE transitions to the NO DRX mode upon receiving Node B order #2 and thereafter receives packets 6 through 8. At time L₁₁, the UE transitions to the DRX mode upon receiving Node B order #1.

[0065] In the embodiment shown in FIG. 3, the UTRAN sends Node B orders to direct the UE to transition between the DRX mode and the NO DRX mode. The Node B orders (e.g., #1 and #2) may be sent in various manners. In general, it is desirable to send the Node B orders using a reliable mechanism since these orders affect network operation and performance. This may be achieved by sending the Node B orders on a control channel with low error probability and/or acknowledgement. In an embodiment, the Node B orders are sent on the HS-SCCH, which is fairly robust and has an ACK mechanism. This improves the reliability of the Node B orders and reduces miscommunication problems due to the UTRAN and the UE being in different modes.

[0066] FIG. 8 shows an embodiment of an event flow 800 for transitioning from the DRX mode to the NO DRX mode based on downlink activity. This embodiment assumes that Node B order #2 is sent on the HS-SCCH. The UTRAN receives downlink packets for the UE. The UTRAN then sends Node B order #2 on the HS-SCCH in the next R-enabled subframe. The average delay in sending Node B order #2 is R / 2 subframes. The UE receives Node B order #2 on the HS-SCCH and replies by sending an ACK on the HS-DPCCH. Upon receiving the ACK, the UTRAN can send packets to the UE in any subframes and is not constrained to the R-enabled subframes. The UTRAN may also send Node B order #1 on the HS-SCCH in similar manner as Node B order #2.

[0067] On the downlink, there is an average delay of R/2 subframes to start a new packet transmission to the UE in the DRX mode. The Node B may order the UE out of the DRX mode, and the subsequent delay may be reduced to as low as zero. Retransmissions may further delay a new packet transmission. In the embodiment described above, on the uplink, the delay is under the control of the UE since the UE may transmit in any subframe. In other embodiments, certain restrictions may be imposed on when the UE can start uplink transmission in order to aid detection at the Node B. For example, the UE may be restricted to start an uplink transmission in a T1-enabled subframe, a T2-enabled subframe, or some other subframe.

[0068] The Node B orders may be sent in various manners. In an embodiment, the UE is assigned a first 16-bit HS-DSCH Radio Network Identifier (H-RNTI) for UE identity (as normally done) and is further assigned a second 16-bit H-RNTI for Node B orders. H-RNTI is described in 3GPP TS 25.212, section 4.6. The second H-RNTI provides space of 21 bits for orders and future extensions. In another embodiment, one 16-bit H-RNTI is reserved for broadcasting orders. An order message may include the UE-specific H-RNTI (16 bits), creating space of 5 bits for orders and future extensions. The Node B orders may also be sent on other control channels and/or in other manners.

[0069] There may be transmission errors and/or detection errors of the Node B orders. The UTRAN and the UE may then operate in different modes. Two different possible error scenarios are described below.

[0070] The UTRAN may operate in the DRX mode, and the UE may operate in the NO DRX mode. This error situation may arise due to (1) the UTRAN sending Node B order #1 and the UE failing to detect the order or (2) the UE erroneously detecting Node B order #2 when none was sent. The Node B would restrict its downlink transmissions to the R-enabled subframes while the UE receives all subframes. The UE consumes extra battery power, but no data is lost.

[0071] The UTRAN may operate in the NO DRX mode, and the UE may operate in the DRX mode. This error situation may arise due to (1) the UE erroneously detecting Node B order #1 when none was sent or (2) the UTRAN sending Node B order #2 and the UE failing to detect the order. The UTRAN may transmit on any subframe while the UE receives only the R-enabled subframes. Data transmitted in subframes other than the R-enabled subframes would be lost. This error situation is detectable. The UTRAN may detect for this type of error and may implement a proper recovery mechanism.

[0072] The CPC mode may provide certain advantages. The DTX T1 mode defines a certain minimum duty cycle T1 that may maximize capacity during data transmission. The UE may synchronize its transmission times with its reception times to extend its sleep cycle. The UTRAN (e.g., Node B) has a pattern of known times where uplink transmissions are required or are more

probable. The DTX T2 mode may facilitate synchronization, simplify detection and search of uplink transmissions, and simplify Node B implementation. The UTRAN has knowledge of the minimum set of enabled subframes, which may reduce impact of searching for the uplink DPCCH from the UE at the Node B. For example, the Node B may not search each subframe if it knows that uplink transmissions are sent in or starting at T2-enabled subframes. The detection at the Node B may also be simplified compared to a system that does not utilize T2-enabled subframes. In such a system, it may be harder for the Node B to detect a signal that is transmitted erratically without a known periodicity, which may help energy accumulation/correlation.

[0073] Referring back to FIG. 2, the UE may transition from the CPC mode to the Active mode based on any of the following: (1) the amount of downlink data to send to the UE (e.g., for a new transport and/or logical channel) suggests use of more downlink subframes, (2) the network is congested and scheduler performance may be improved by allowing the scheduler to freely use all of the downlink subframes, and/or (3) some other reason. The UE may transmit data in any uplink subframe and/or receive data in any downlink subframe in the Active mode. The Active mode may improve performance at the expense of more battery power. The UE may transition from the Active mode to the CPC mode based on any of the following: (1) traffic load for the UE is light, (2) there is lack of user data activity, or (3) some other reason. The UTRAN can ascertain downlink data activity of the UE based on the status of the data queue for the UE and can ascertain uplink data activity of the UE based on reception of status reports of a data buffer maintained by the UE.

[0074] In an embodiment, the UTRAN directs the UE to operate in the Active mode or the CPC mode. The UTRAN may direct the UE to switch mode by sending a mode switch command or some other signaling. The UTRAN may also direct the UE to transition to the CPC mode by sending the parameters for the CPC mode. In another embodiment, the UE may elect to operate in the Active mode or the CPC mode and may send either a request for a mode switch (if the decision is made by the UTRAN) or an indication of a mode switch (if the decision can be made by the UE).

[0075] The UTRAN (e.g., the RNC) may command the UE to transition to the CPC mode (e.g., by sending the CPC parameters or a mode switch) whenever the UTRAN wants to ensure that both the UTRAN and the UE are operating in the CPC mode. The UTRAN may also command the UE to transition to the Active mode whenever the UTRAN wants to ensure that both the UTRAN and the UE are operating in the Active mode.

[0076] In the embodiment shown in FIG. 3, the CPC mode includes two DTX modes, one DRX mode, and a no DRX mode. In general, the CPC mode may include any number of DTX modes, a no DTX mode, any number of DRX modes, a no DRX mode, or any combination thereof. The no DTX mode may be considered as a special case of the DTX T1 mode with $T1 = 1$.

[0077] In another embodiment, the CPC mode includes a Connected Deep mode (or simply, a Deep mode) mode in which the UE has one enabled subframe in every $T3$ subframes on the uplink and one enabled subframe in every $R2$ subframes on the downlink. In general, $T3$ and $R2$ may be defined as $T3 \geq T2$ and $R2 \geq R$. $T3$ and $R2$ may be set to large values, e.g., much larger than $T2$ and R , respectively, or possibly infinity. The Deep mode may be disabled by setting $T3 = T2$ and/or $R2 = R$.

[0078] In the Deep mode, the UE may (a) stop listening or listen very infrequently to the downlink and (b) stop transmitting or transmit very infrequently on the uplink. The UE may measure the CPICH and P-CCPCH and may decode the HS-SCCH of the serving and surrounding Node Bs in the $R2$ -enabled subframes. The UE may update its Active Set of Node Bs, if necessary, based on the measurements. The UE may ignore TPC commands sent by the Node B to adjust the transmit power of the UE. The UE may transition out of the Deep mode based on various triggering events, e.g., if the UE receives data in its buffer or receives a packet on the downlink. If any triggering event occurs, then the UE may transition to (a) the DTX T1 mode, the DTX T2 mode, or the no DTX mode for transmission on the uplink and (b) the DRX mode or the no DRX mode for reception on the downlink. While in the Deep mode, UE synchronization at the Node B is likely lost. A procedure may be used to re-activate the UE from the Deep mode. This re-activation may be accompanied by a sufficiently long DPCCH preamble to allow the closed-loop power control mechanism to bring the transmit power of the UE back to the proper power level.

[0079] For clarity, the techniques have been specifically described for UMTS. The CPC mode may be a mode or a configuration of the CELL_DCH state, as shown in FIG. 2. The CPC mode may also be employed in other manners in UMTS.

[0080] The techniques described herein may also be used for other communication networks, other channel structures, other frame and subframe structures, and/or other transmission schemes. The techniques may be used for HARQ as well as non-HARQ transmissions.

[0081] FIG. 9 shows an embodiment of a process 900 performed by a wireless device for operation in a CPC mode. While in the connected mode, the wireless device operates in one of multiple DTX modes or a no DTX mode for transmission to a wireless network (block 910). The wireless device also operates in one of at least one DRX mode or a no DRX mode for reception from the

wireless network (block 920). Each DTX mode may be associated with different subframes usable for sending signaling and/or data to the wireless network. The no DTX mode may be associated with all subframes being usable for sending signaling and/or data to the wireless network. Each DRX mode may be associated with different subframes usable for receiving signaling and/or data from the wireless network. The no DRX mode may be associated with all subframes being usable for receiving signaling and/or data from the wireless network. The wireless device may operate in any of the following: (1) DTX and DRX, (2) DTX and no DRX, (3) no DTX and DRX, or (4) no DTX and no DRX.

[0082] The multiple DTX modes may comprise first and second DTX modes. In the first DTX mode, the wireless device may transmit signaling in first enabled subframes and may transmit data in the first enabled subframes if there is data to send to the wireless network (block 912). In the second DTX mode, the wireless device may transmit signaling in second enabled subframes (block 914). In an embodiment, the wireless device sends signaling for Layer 1 (e.g., pilot, TPC, CQI, and so on) and may send signaling for higher layers in the first DTX mode, and sends only Layer 1 signaling in the second DTX mode. In general, the wireless device may be allowed to send different types of signaling or may be restricted to send only certain types of signaling in each DTX mode. The signaling sent in the first DTX mode may thus be the same as or different from the signaling sent in the second DTX mode. The at least one DRX mode may comprise a single DRX mode. In the DRX mode, the wireless device may receive signaling in third enabled subframes and may receive data in the third enabled subframes if the signaling indicates data being sent to the wireless device (block 922). The first enabled subframes may be a subset of the subframes available for the uplink and may be spaced apart by T1 subframes. The second enabled subframes may be a subset of the first enabled subframes and may be spaced apart by T2 subframes. The third enabled subframes may be a subset of the subframes available for the downlink and may be spaced apart by R subframes. T1, T2, and/or R may be configurable parameters.

[0083] The wireless device may autonomously transition between the multiple DTX modes and may autonomously transition to a no DTX mode based on data load at the wireless device (block 916). The wireless device may transition between the at least one DRX mode and a no DRX mode based on signaling from the wireless network (block 924). The wireless device may also transition between an active mode and the CPC mode based on signaling from the wireless network. The active mode may correspond to all subframes being usable for transmission and reception.

[0084] FIG. 10 shows an embodiment of a process 1000 performed by a wireless network for the CPC mode. The wireless network receives from a wireless device operating in one of multiple DTX modes or a no DTX mode while in a connected mode (block 1010). The wireless network transmits to the wireless device operating in one of at least one DRX mode or a no DRX mode while in the connected mode (block 1020).

[0085] The multiple DTX modes may comprise first and second DTX modes. When the wireless device operates in the first DTX mode, the wireless network may receive signaling from the wireless device in first enabled subframes and may receive data from the wireless device in the first enabled subframes if the signaling indicates data being sent (block 1012). When the wireless device operates in the second DTX mode, the wireless network may receive signaling from the wireless device in second enabled subframes (block 1014). The wireless network may detect for signaling from the wireless device in all subframes available for the uplink (block 1016). The at least one DRX mode may comprise a single DRX mode. When the wireless device operates in the DRX mode, the wireless network may transmit signaling in third enabled subframes and may transmit data in the third enabled subframes if there is data to send to the wireless device (block 1022). The wireless network may send signaling to direct the wireless device to transition between the DRX mode and a no DRX mode (block 1024). The wireless network may also send signaling to direct the wireless device to transition between the active mode and the CPC mode.

[0086] FIG. 11 shows a block diagram of an embodiment of UE 110, Node B 130, and RNC 140 in FIG. 1. On the uplink, data and signaling to be sent by UE 110 are processed (e.g., formatted, encoded, and interleaved) by an encoder 1122 and further processed (e.g., modulated, channelized, and scrambled) by a modulator (Mod) 1124 to generate output chips. A transmitter (TMTR) 1132 then conditions (e.g., converts to analog, filters, amplifies, and frequency upconverts) the output chips and generates an uplink signal, which is transmitted via an antenna 1134. On the downlink, antenna 1134 receives a downlink signal transmitted by Node B 130. A receiver (RCVR) 1136 conditions (e.g., filters, amplifies, frequency downconverts, and digitizes) the received signal from antenna 1134 and provides samples. A demodulator (Demod) 1126 processes (e.g., descrambles, channelizes, and demodulates) the samples and provides symbol estimates. A decoder 1128 further processes (e.g., deinterleaves and decodes) the symbol estimates and provides decoded data. Encoder 1122, modulator 1124, demodulator 1126, and decoder 1128 may be implemented by a modem processor 1120. These units perform processing in accordance with the radio technology (e.g., W-CDMA or cdma2000) used by the network.

[0087] A controller/processor 1140 directs the operation of various units at UE 110. Controller/processor 1140 may perform process 900 in FIG. 9 and/or other processes for the techniques described herein. A memory 1142 stores program codes and

data for UE 110, e.g., parameters and orders for CPC operation.

[0088] FIG. 11 also shows an embodiment of Node B 130 and RNC 140. Node B 130 includes a controller/processor 1150 that performs various functions for communication with UE 110, a memory 1152 that stores program codes and data for Node B 130, and a transceiver 1154 that supports radio communication with UE 110. Controller/processor 1150 may perform process 1000 in FIG. 10 and/or other processes for the techniques described herein and may also send Node B orders to UE 110 in the CPC mode. RNC 140 includes a controller/processor 1160 that performs various functions to support communication for UE 110 and a memory 1162 that stores program codes and data for RNC 140. Controller/processor 1160 may configure the CPC mode and may direct transition between the Active mode and the CPC mode for UE 110.

[0089] Those of skill in the art would understand that information and signals may be represented using any of a variety of different technologies and techniques. For example, data, instructions, commands, information, signals, bits, symbols, and chips that may be referenced throughout the above description may be represented by voltages, currents, electromagnetic waves, magnetic fields or particles, optical fields or particles, or any combination thereof.

[0090] Those of skill would further appreciate that the various illustrative logical blocks, modules, circuits, and algorithm steps described in connection with the embodiments disclosed herein may be implemented as electronic hardware, computer software, or combinations of both. To clearly illustrate this interchangeability of hardware and software, various illustrative components, blocks, modules, circuits, and steps have been described above generally in terms of their functionality. Whether such functionality is implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system. Skilled artisans may implement the described functionality in varying ways for each particular application, but such implementation decisions should not be interpreted as causing a departure from the scope of the present invention.

[0091] The various illustrative logical blocks, modules, and circuits described in connection with the embodiments disclosed herein may be implemented or performed with a general-purpose processor, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general-purpose processor may be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

[0092] The steps of a method or algorithm described in connection with the embodiments disclosed herein may be embodied directly in hardware, in a software module executed by a processor, or in a combination of the two. A software module may reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. An exemplary storage medium is coupled to the processor such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor. The processor and the storage medium may reside in an ASIC. The ASIC may reside in a user terminal. In the alternative, the processor and the storage medium may reside as discrete components in a user terminal.

[0093] The previous description of the disclosed embodiments is provided to enable any person skilled in the art to make or use the present invention. Various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without departing from the spirit or scope of the invention. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

SPECIFIC EMBODIMENTS

[0094]

1. 1. A wireless device comprising: at least one processor to operate in one of multiple discontinuous transmission (DTX) modes or a no DTX mode, while in a connected mode, for transmission to a wireless network, and to operate in one of at least one discontinuous reception (DRX) mode or a no DRX mode, while in the connected mode, for reception from the wireless network; and a memory coupled to the at least one processor.
2. The wireless device of embodiment 1, wherein each DTX mode is associated with different subframes usable for sending data, or signaling, or both data and signaling to the wireless network.
3. The wireless device of embodiment 1, wherein each DRX mode is associated with different subframes usable for

receiving data, or signaling, or both data and signaling from the wireless network.

4. The wireless device of embodiment 1, wherein the multiple DTX modes comprise a first DTX mode, and wherein in the first DTX mode the at least one processor transmits signaling in first enabled subframes corresponding to a subset of subframes available for uplink, and transmits data in the first enabled subframes if there is data to send to the wireless network.
5. The wireless device of embodiment 4, wherein the multiple DTX modes comprise a second DTX mode, and wherein in the second DTX mode the at least one processor transmits signaling in second enabled subframes corresponding to a subset of the first enabled subframes.
6. The wireless device of embodiment 4, wherein the first enabled subframes are spaced apart at intervals of T1 subframes, where T1 is a configurable parameter.
7. The wireless device of embodiment 5, wherein the second enabled subframes are spaced apart at intervals of T2 subframes, where T2 is a configurable parameter.
8. The wireless device of embodiment 1, wherein the at least one DRX mode comprises a first DRX mode, and wherein in the first DRX mode the at least one processor receives signaling in enabled subframes corresponding to a subset of subframes available for downlink, and receives data in the enabled subframes if the signaling indicates data being sent to the wireless device.
9. The wireless device of embodiment 8, wherein the enabled subframes are spaced apart at intervals of R subframes, where R is a configurable parameter.
10. The wireless device of embodiment 1, wherein the multiple DTX modes comprise a DTX mode in which transmit power of the wireless device is not controlled.
11. The wireless device of embodiment 1, wherein the multiple DTX modes comprise a DTX mode in which the wireless device does not transmit signaling and data on uplink, and wherein the at least one DRX mode comprises a DRX mode in which the wireless device does not receive signaling and data on downlink.
12. The wireless device of embodiment 1, wherein the at least one processor receives a configuration of T1, T2, R and offset from the wireless network, with T1 defining spacing between first enabled subframes for a first DTX mode, T2 defining spacing between second enabled subframes for a second DTX mode, R defining spacing between third enabled subframes for a DRX mode, and the offset identifying the first, second and third enabled subframes.
13. The wireless device of embodiment 1, wherein the at least one processor autonomously transitions between the multiple DTX modes.
14. The wireless device of embodiment 1, wherein the at least one processor autonomously transitions to the no DTX mode based on data load at the wireless device.
15. The wireless device of embodiment 1, wherein the at least one processor transitions between the at least one DRX mode and the no DRX mode based on signaling from the wireless network.
16. The wireless device of embodiment 1, wherein the at least one processor receives the signaling to transition between the at least one DRX mode and the no DRX mode from the wireless network via Layer 1 or Layer 2.
17. The wireless device of embodiment 1, wherein the at least one processor transitions between an active mode and a continuous packet connectivity (CPC) mode based on signaling from the wireless network, wherein the CPC mode comprises the multiple DTX modes and the at least one DRX mode, and wherein the active mode comprises the no DTX mode and the no DRX mode.
18. A wireless device comprising: at least one processor to operate in a connected mode for communication with a wireless network and to operate in one of multiple discontinuous transmission (DTX) modes or a no DTX mode, while in the connected mode, for transmission to a wireless network; and a memory coupled to the at least one processor.
19. A wireless device comprising: at least one processor to operate in a connected mode for communication with a wireless network and to operate in one of at least one discontinuous reception (DRX) mode or a no DRX mode, while in the connected mode, for reception from the wireless network; and a memory coupled to the at least one processor.
20. A method comprising: operating in one of multiple discontinuous transmission (DTX) modes or a no DTX mode, while in a connected mode, for transmission to a wireless network; and operating in one of at least one discontinuous reception (DRX) mode or a no DRX mode, while in the connected mode, for reception from the wireless network.
21. The method of embodiment 20, wherein the multiple DTX modes comprise a first DTX mode, and wherein operating in the first DTX mode comprises transmitting signaling in first enabled subframes corresponding to a subset of subframes available for uplink, and transmitting data in the first enabled subframes if there is data to send to the wireless network.
22. The method of embodiment 21, wherein the multiple DTX modes comprise a second DTX mode, and wherein operating in the second DTX mode comprises transmitting signaling in second enabled subframes corresponding to a subset of the first enabled subframes.
23. The method of embodiment 20, wherein the operating in one of the at least one DRX mode comprises receiving signaling in enabled subframes corresponding to a subset of subframes available for downlink, and receiving data in the enabled subframes if the signaling indicates data being sent to the wireless device.

24. 24. The method of embodiment 20, further comprising: autonomously transitioning between the multiple DTX modes; and autonomously transitioning to the no DTX mode based on data load at the wireless device
25. 25. The method of embodiment 20, further comprising: transitioning between the at least one DRX mode and the no DRX mode based on signaling from the wireless network.
26. 26. An apparatus comprising: means for operating in one of multiple discontinuous transmission (DTX) modes or a no DTX mode, while in a connected mode, for transmission to a wireless network; and means for operating in one of at least one discontinuous reception (DRX) mode or a no DRX mode, while in the connected mode, for reception from the wireless network.
27. 27. The apparatus of embodiment 26, wherein the multiple DTX modes comprise a first DTX mode, and wherein means for operating in the first DTX mode comprises means for transmitting signaling in first enabled subframes corresponding to a subset of subframes available for uplink, and means for transmitting data in the first enabled subframes if there is data to send to the wireless network.
28. 28. The apparatus of embodiment 27, wherein the multiple DTX modes comprise a second DTX mode, and wherein means for operating in the second DTX mode comprises means for transmitting signaling in second enabled subframes corresponding to a subset of the first enabled subframes.
29. 29. The apparatus of embodiment 26, wherein the means for operating in one of the at least one DRX mode comprises means for receiving signaling in enabled subframes corresponding to a subset of subframes available for downlink, and means for receiving data in the enabled subframes if the signaling indicates data being sent to the wireless device.
30. 30. An apparatus comprising: at least one processor to receive from a wireless device operating in one of multiple discontinuous transmission (DTX) modes or a no DTX mode while in a connected mode, and to transmit to the wireless device operating in one of at least one discontinuous reception (DRX) mode or a no DRX mode while in the connected mode; and a memory coupled to the at least one processor.
31. 31. The apparatus of embodiment 30, wherein the multiple DTX modes comprise a first DTX mode, and wherein when the wireless device operates in the first DTX mode the at least one processor receives signaling from the wireless device in first enabled subframes corresponding to a subset of subframes available for uplink, and receives data from the wireless device in the first enabled subframes if the signaling indicates data being sent by the wireless device.
32. 32. The apparatus of embodiment 31, wherein the multiple DTX modes comprise a second DTX mode, and wherein when the wireless device operates in the second DTX mode the at least one processor receives signaling from the wireless device in second enabled subframes corresponding to a subset of the first enabled subframes.
33. 33. The apparatus of embodiment 30, wherein the at least one processor detects for signaling from the wireless device in all subframes available for the uplink.
34. 34. The apparatus of embodiment 30, wherein the at least one DRX mode comprises a first DRX mode, and wherein when the wireless device operates in the first DRX mode the at least one processor transmits signaling to the wireless device in enabled subframes corresponding to a subset of subframes available for downlink, and transmits data to the wireless device in the enabled subframes if there is data to send to the wireless device.
35. 35. The apparatus of embodiment 30, wherein the at least one processor sends a configuration of T1, T2, R and offset to the wireless device with T1 defining spacing between first enabled subframes for a first DTX mode, T2 defining spacing between second enabled subframes for a second DTX mode, R defining spacing between third enabled subframes for a DRX mode, and the offset identifying the first, second and third enabled subframes.
36. 36. The apparatus of embodiment 30, wherein the at least one processor sends signaling to direct the wireless device to transition between the at least one DRX mode and the no DRX mode.
37. 37. The apparatus of embodiment 30, wherein the at least one processor sends signaling to direct the wireless device to transition between an active mode and a continuous packet connectivity (CPC) mode, wherein the CPC mode comprises the multiple DTX modes and the at least one DRX mode, and wherein the active mode comprises the no DTX mode and the no DRX mode.
38. 38. A method comprising: receiving from a wireless device operating in one of multiple discontinuous transmission (DTX) modes or a no DTX mode while in a connected mode; and transmitting to the wireless device operating in one of at least one discontinuous reception (DRX) mode or a no DRX mode while in the connected mode.
39. 39. The method of embodiment 38, wherein the multiple DTX modes comprise a first DTX mode, and wherein receiving from the wireless device operating in the first DTX mode comprises receiving signaling from the wireless device in first enabled subframes corresponding to a subset of subframes available for uplink, and receiving data from the wireless device in the first enabled subframes if the signaling indicates data being sent by the wireless device.
40. 40. The method of embodiment 39, wherein the multiple DTX modes comprise a second DTX mode, and wherein receiving from the wireless device operating in the second DTX mode comprises receiving signaling from the wireless device in second enabled subframes corresponding to a subset of the first enabled subframes.
41. 41. The method of embodiment 38, wherein the transmitting to the wireless device operating in one of the at least one DRX mode comprises transmitting signaling to the wireless device in enabled subframes corresponding to a subset of subframes available for downlink, and transmitting data to the wireless device in the enabled subframes if there is data to send to the

wireless device.

42. 42. An apparatus comprising: means for receiving from a wireless device operating in one of multiple discontinuous transmission (DTX) modes or a no DTX mode while in a connected mode; and means for transmitting to the wireless device operating in one of at least one discontinuous reception (DRX) mode or a no DRX mode while in the connected mode.
43. 43. The apparatus of embodiment 42, wherein the multiple DTX modes comprise a first DTX mode, and wherein means for receiving from the wireless device operating in the first DTX mode comprises means for receiving signaling from the wireless device in first enabled subframes corresponding to a subset of subframes available for uplink, and means for receiving data from the wireless device in the first enabled subframes if the signaling indicates data being sent by the wireless device.
44. 44. The apparatus of embodiment 43, wherein the multiple DTX modes comprise a second DTX mode, and wherein means for receiving from the wireless device operating in the second DTX mode comprises means for receiving signaling from the wireless device in second enabled subframes corresponding to a subset of the first enabled subframes.
45. 45. The apparatus of embodiment 42, wherein the means for transmitting to the wireless device operating in one of the at least one DRX mode comprises means for transmitting signaling to the wireless device in enabled subframes corresponding to a subset of subframes available for downlink, and means for transmitting data to the wireless device in the enabled subframes if there is data to send to the wireless device.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [WO20152566A \[0005\]](#)
- [US20030086379A \[0006\]](#)

Non-patent literature cited in the description

- TR25.903, [\[0050\]](#)

Patentkrav

1. Brugerudstyr (110) til diskontinuerlig sending, omfattende:
 - 5 midler til at overgå imellem flere diskontinuerlige transmissions-, DTX-, modi og imellem en DTX-modus og en ikke-DTX-modus (310, 312), under en forbundet modus, til transmission til et trådløst netværk, hvorved hver DTX-modus er forbundet med et andet sæt af aktiverede uplink-subframes og forskellige aktioner, som skal udøves ved hjælp af brugerudstyret.
 - 10 2. Fremgangsmåde til diskontinuerlig transmittering ved brugerudstyr, omfattende:

overgang imellem flere diskontinuerlige transmissions-, DTX-modi (310, 312) og mellem en DTX-modus og en ikke-DTX-modus, under en forbundet modus, til transmission til et trådløst netværk, hvorved DTX-modus er forbundet med et andet sæt af aktiverede uplink-subframes og forskellige aktioner, som skal udøves ved hjælp af brugerudstyret.
 - 20 3. Fremgangsmåde ifølge krav 2, hvorved hver DTX-modus er forbundet med andre subframes, der er anvendelige til sending af data, eller signalering, eller både data og signalering til det trådløse netværk.
 4. Fremgangsmåde ifølge krav 2, hvorved de flere DTX-modi omfatter en første DTX-modus, og hvorved den første DTX-modus omfatter transmittering af signalering i første aktiverede subframes svarende til et delsæt af subframes, der er tilgængelige for uplink, og transmittering af data i de første aktiverede subframes, hvis der er data, der skal sendes til det trådløse netværk.
 - 25 30 5. Fremgangsmåde ifølge krav 2, hvorved de flere DTX-modi omfatter en DTX-modus, hvori der ikke er nogen signalering og data, der skal transmitteres på en uplink.

6. Fremgangsmåde ifølge krav 2, hvorved det modtages en konfiguration af T1 og T2 fra et trådløst netværk, hvor T1 bestemmer afstanden imellem første aktiverede subframes til en første DTX-modus, T2 definerer afstanden imellem sekundære aktiverede subframes til en sekundær DTX-modus.
5
7. Fremgangsmåde ifølge krav 2, hvorved de flere DTX-modi omfatter en DTX-modus, hvori et trådløst apparats sendekapacitet ikke styres.
8. Fremgangsmåde ifølge krav 2, og som omfatter overgang imellem en aktiv modus og en kontinuerlig pakkeopkoblings-(CPC-)modus baseret på signaling fra det trådløse netværk, hvorved CPC-modussen omfatter de flere DTX-modi, og hvorved den aktive modus omfatter ikke-DTX-modussen.
10
9. Fremgangsmåde ifølge krav 4, og som yderligere omfatter transmittering af en kanalkvalitetsindikator (CQI), som transmitteres på en første dedikeret fysisk styrekanal i de første aktiverede subframes, og transmittering af data på en dedikeret fysisk datakanal i de første aktiverede subframes.
15
10. Fremgangsmåde ifølge krav 4, hvorved de flere DTX-modi omfatter en sekundær DTX-modus, og hvorved i den sekundære DTX-modus signalering transmitteres i sekundære aktiverede subframes, som svarer til et delsæt af de første aktiverede subframes.
20
11. Fremgangsmåde ifølge krav 4, hvorved de første aktiverede subframes er adskilte ved intervaller på T1-subframes, hvor T1 er en konfigurerbar parameter.
25
12. Fremgangsmåde ifølge krav 6, hvorved brugerudstyret er forsynet med en aktiveret subframe i alle R-subframes på et downlink til diskontinuerlig modtagelse, DRX, og hvorved de T1-aktiverede, T2-aktiverede og de R-aktiverede subframes er rettet ind i tid for at reducere rise-over-thermal.
30

13. Fremgangsmåde ifølge krav 6, hvorved brugerudstyret yderligere er forsynet med aktiverede subframes på en downlink til diskontinuerlig modtagelse, DRX, og hvorved de aktiverede downlink-subframes er adskilte ved intervaller på R-subframes, hvor R er en konfigurerbar parameter.

5

14. Fremgangsmåde ifølge krav 10, hvorved de sekundære aktiverede subframes er adskilte ved intervaller på T2 subframes, hvor T2 er en konfigurerbar parameter.

10 15. Apparat omfattende:

midler til modtagelse fra et trådløst apparats brugerudstyr, som opererer i en ud af flere diskontinuerlige transmissions-, DTX-, modi (310, 312), og en ikke-DTX-modus, under en forbundet modus, hvorved hver DTX-modus er forbundet med et andet sæt af aktiverede uplink-subframes, og der skal foretages forskellige aktioner ved hjælp af det trådløse apparat.

16. Fremgangsmåde (1000) omfattende:

20 modtagelse fra et trådløst apparats brugerudstyr, som opererer i en ud af flere diskontinuerlige transmissions-, DTX-, modi (310, 312), og en ikke-DTX-modus, under en forbundet modus, hvorved hver DTX-modus er forbundet med et andet sæt af aktiverede uplink-subframes, og der skal foretages forskellige aktioner ved hjælp af det trådløse apparat.

25

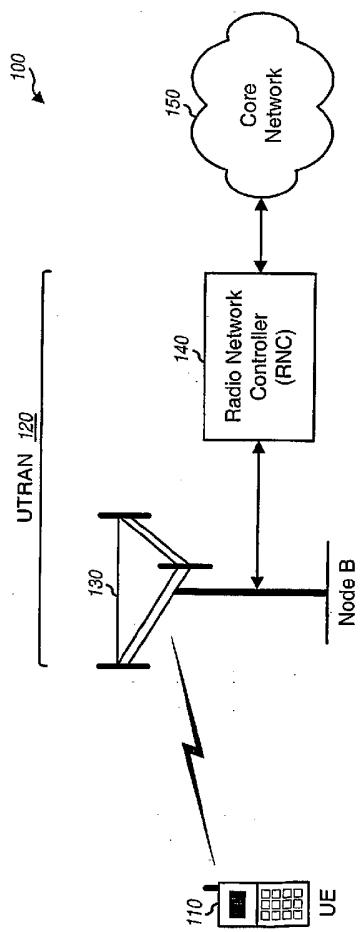
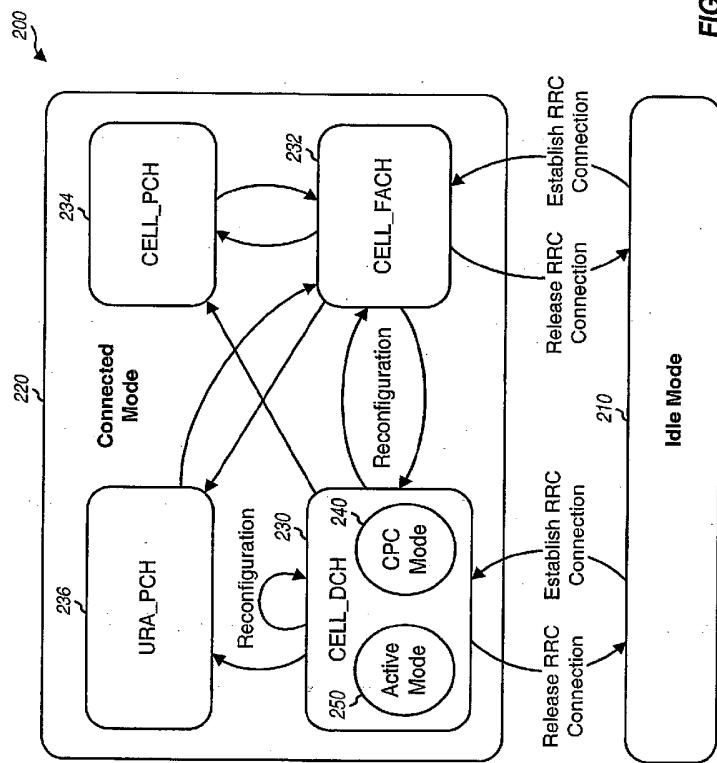
DRAWINGS**FIG. 1**

FIG. 2



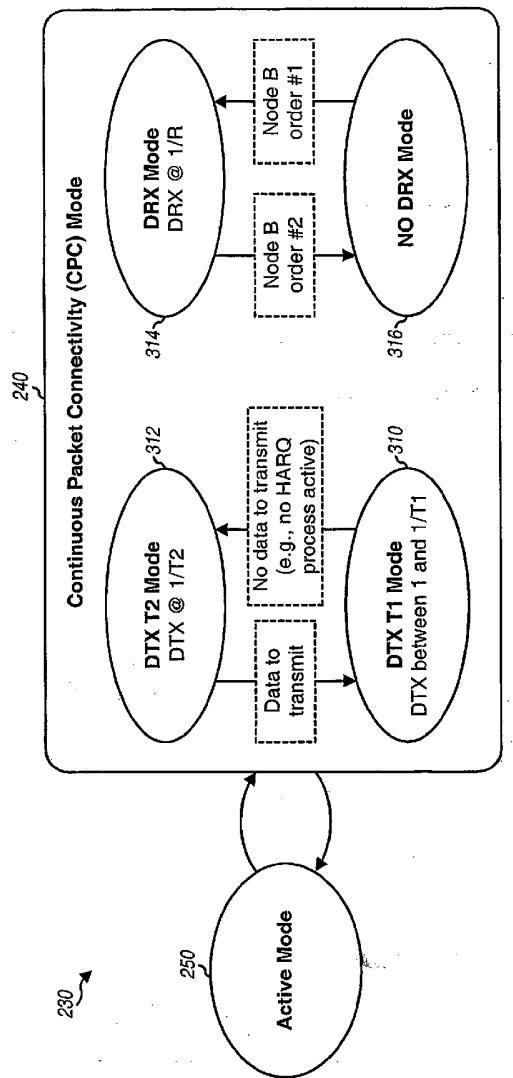


FIG. 3

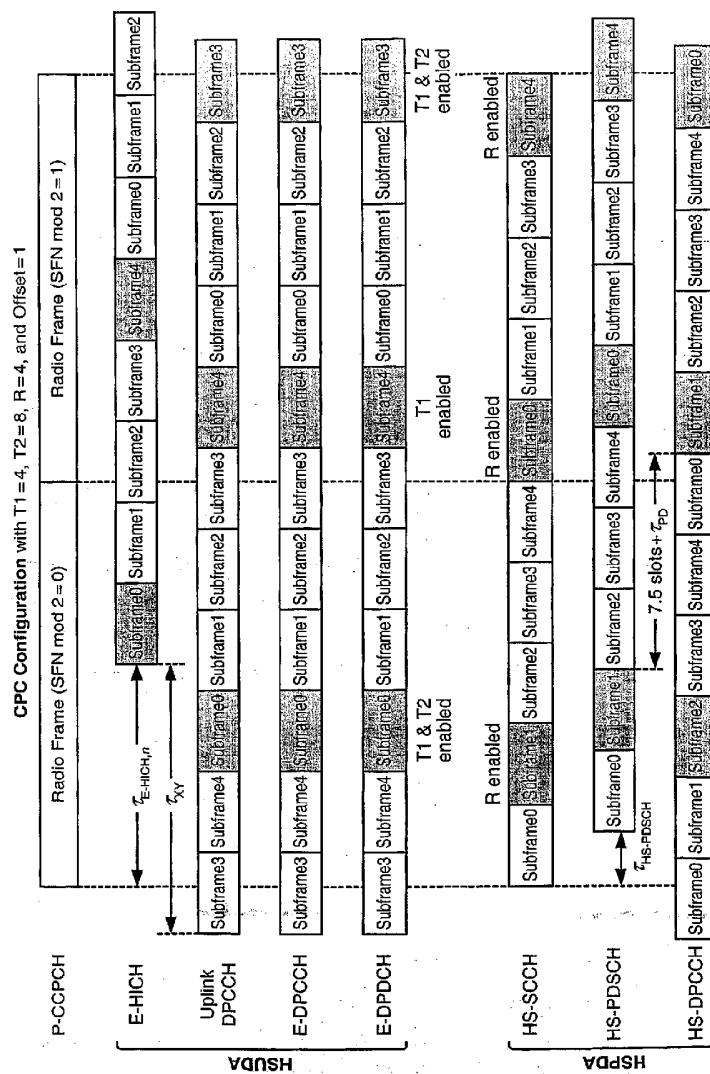


FIG. 4

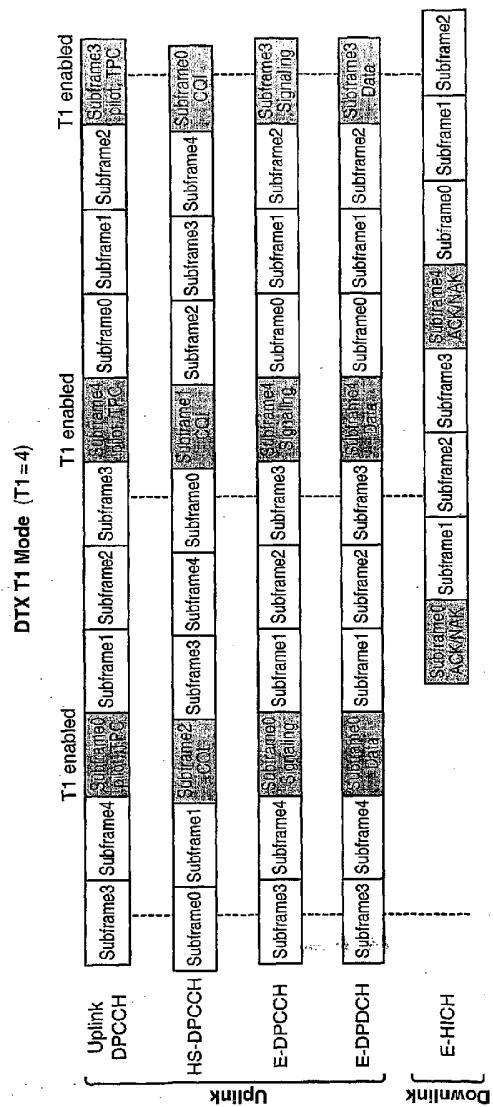


FIG. 54

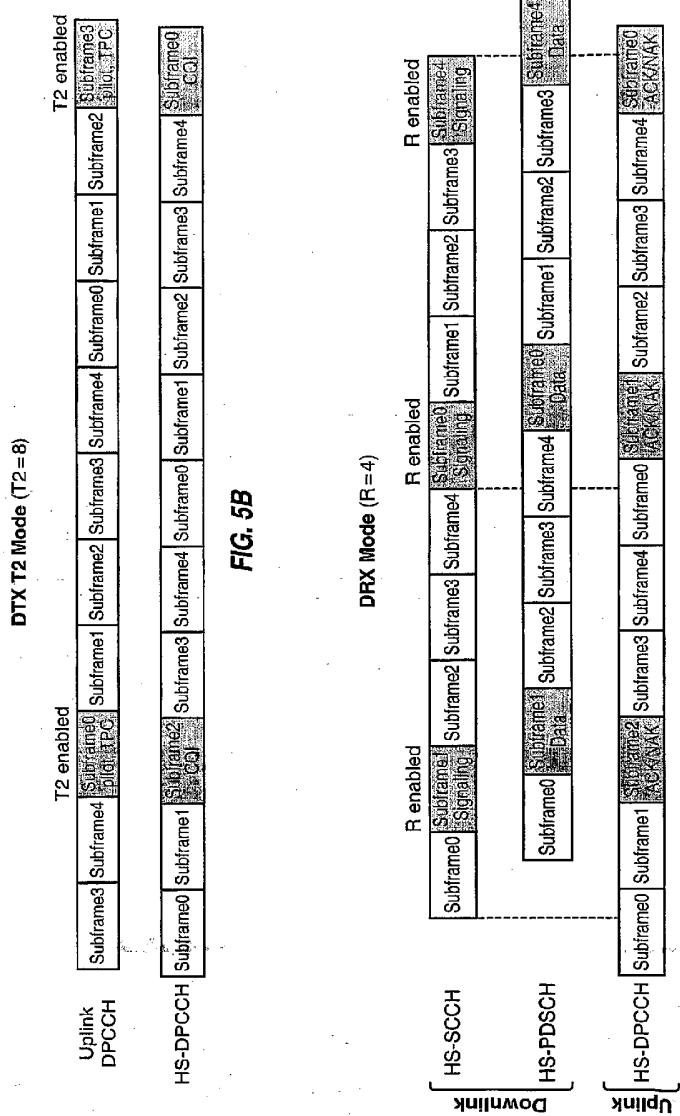


FIG. 5B

FIG. 5C

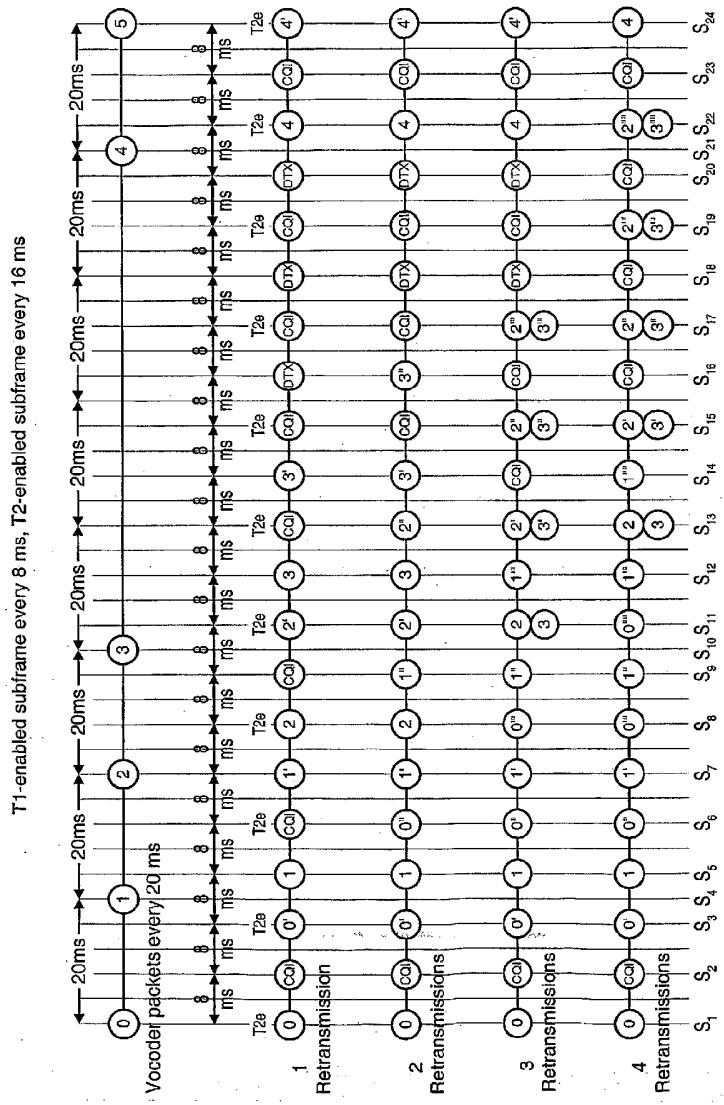


FIG. 6A

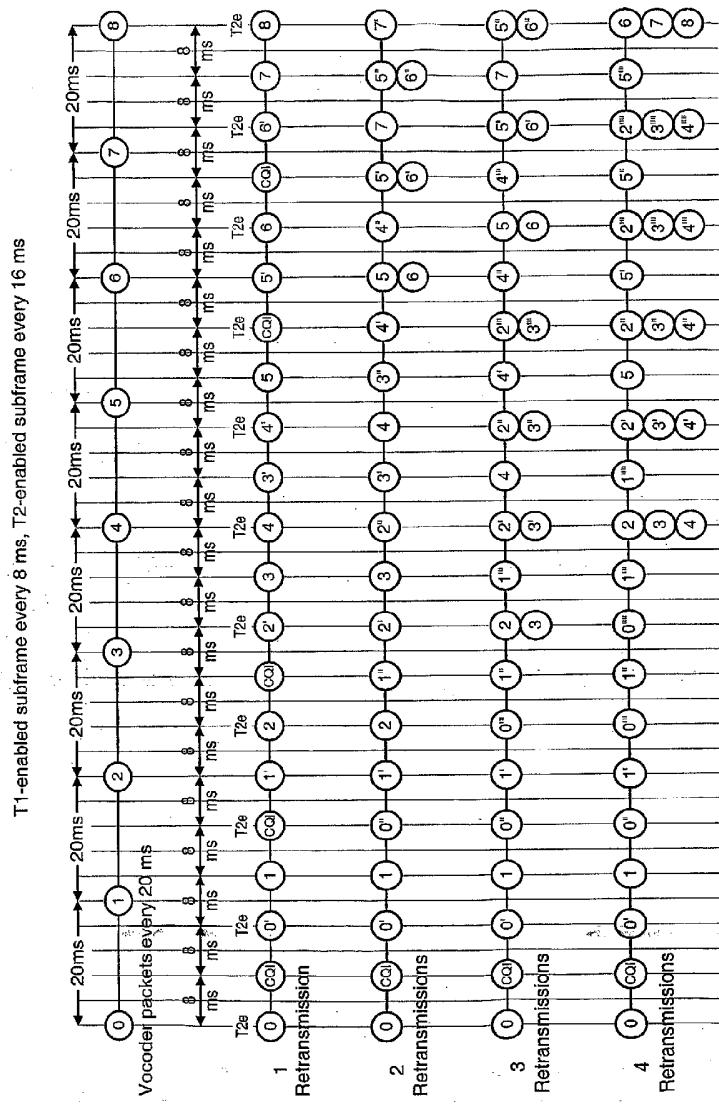


FIG. 6B

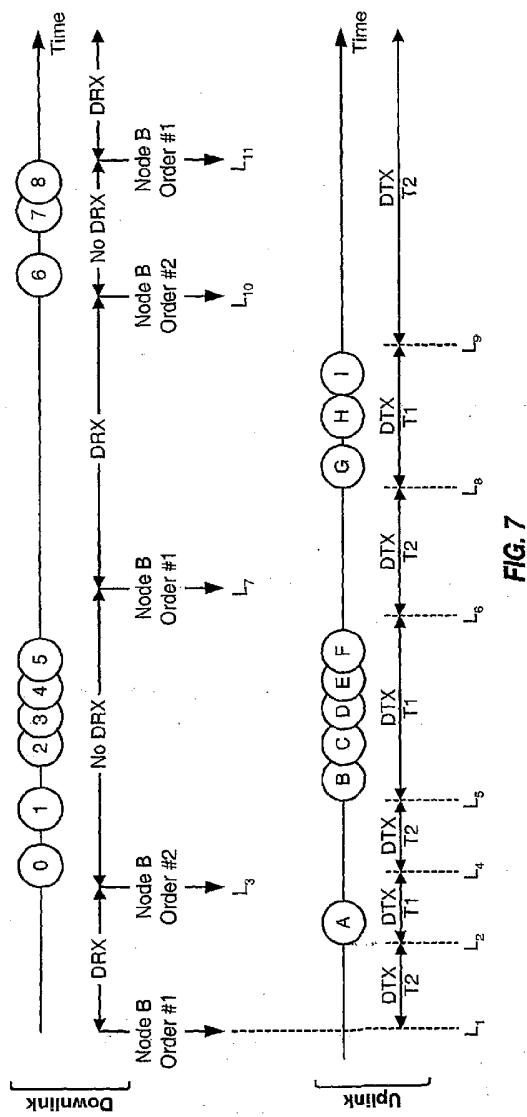


FIG. 7

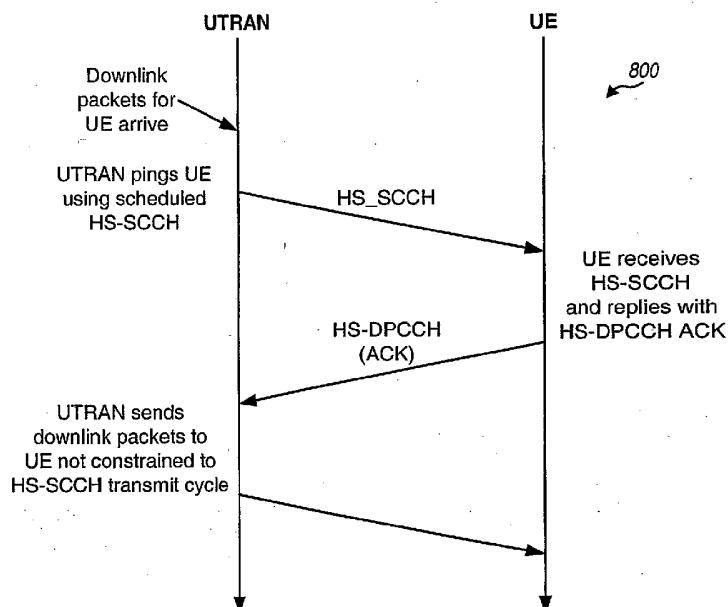


FIG. 8

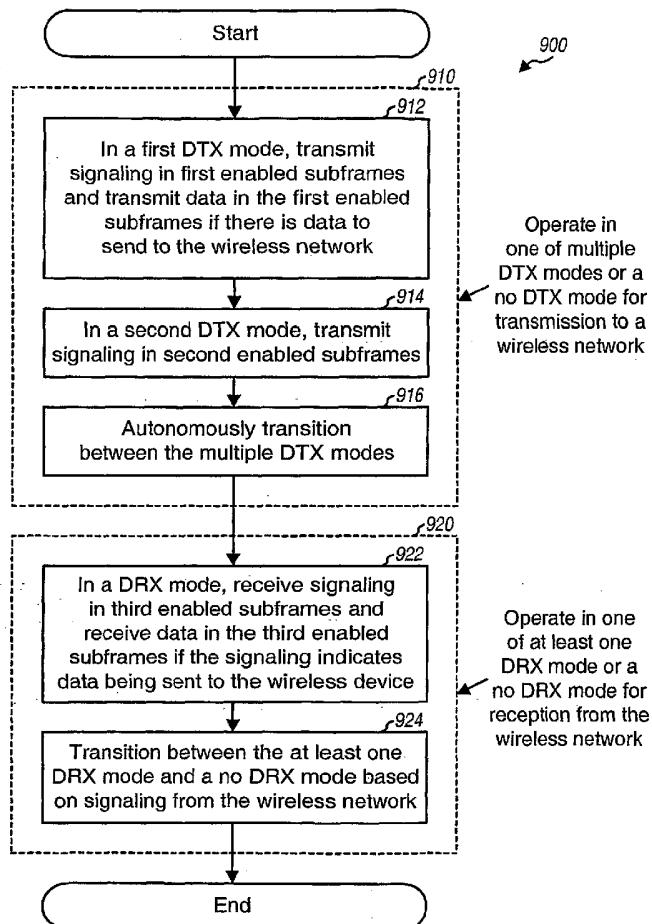


FIG. 9

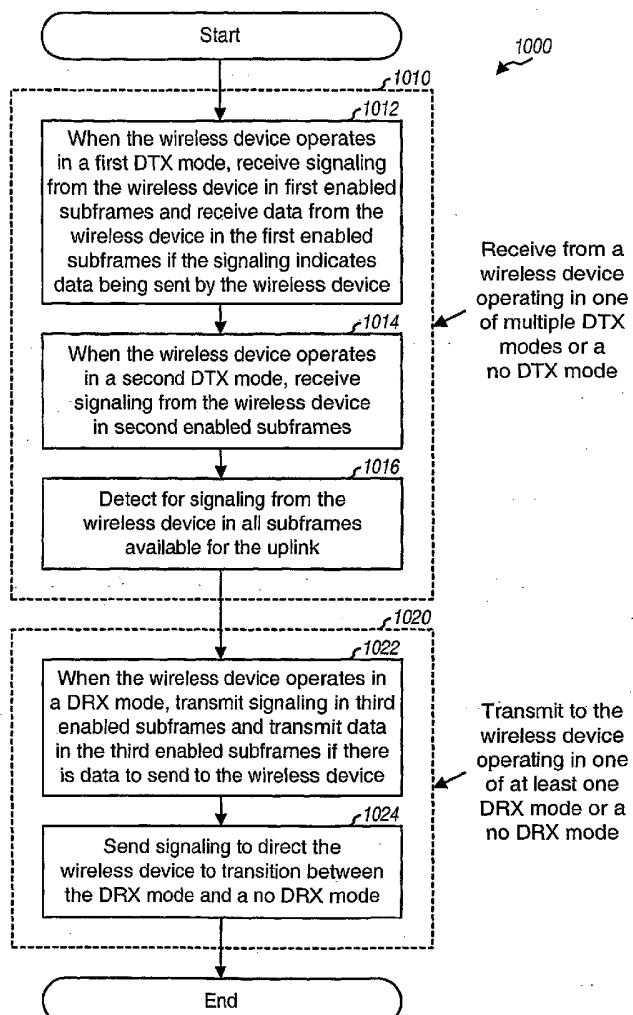


FIG. 10

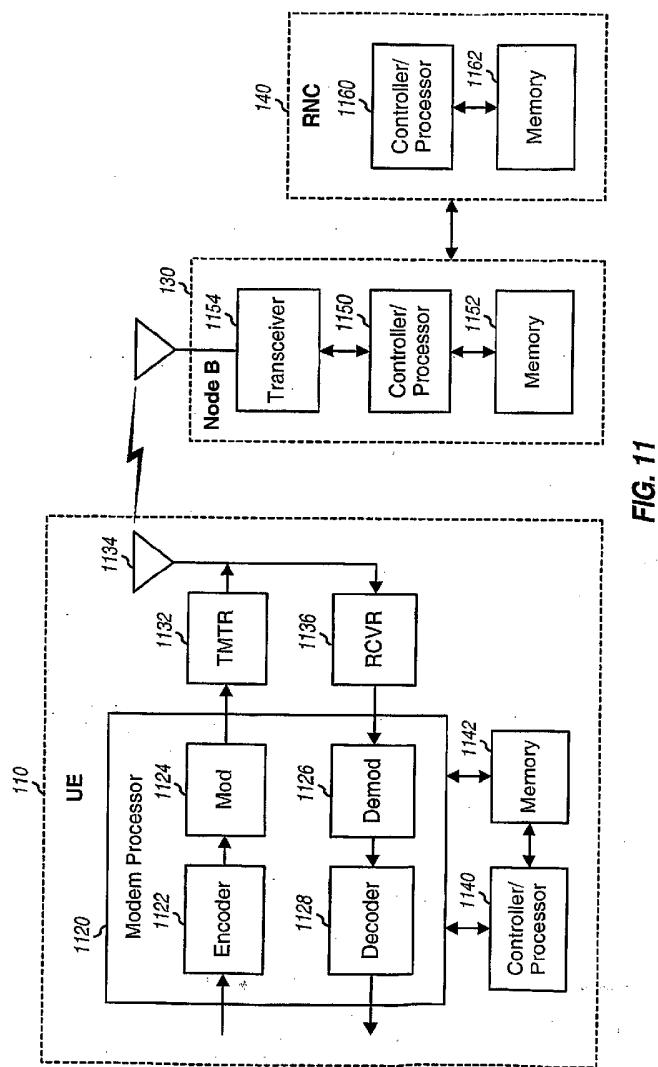


FIG. 11