



(51) International Patent Classification:

C08J 3/00 (2006.01) *C09D 1/00* (2006.01)
C08K 3/00 (2006.01) *B82Y 5/00* (2011.01)

(21) International Application Number:

PCT/SG2012/000372

(22) International Filing Date:

4 October 2012 (04.10.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201107292-3 6 October 2011 (06.10.2011) SG

(71) Applicant: AGENCY FOR SCIENCE, TECHNOLOGY
AND RESEARCH [SG/SG]; 1 Fusionopolis Way, #20-10
Connexis, Singapore 138632 (SG).(72) Inventors: **LI, Xu**; c/o Institute of Materials Research and
Engineering, 3 Research Link, Singapore 117602 (SG).
HE, Chaobin; c/o Institute of Materials Research and En-
gineering, 3 Research Link, Singapore 117602 (SG).
WONG, Siew Yee; c/o Institute of Materials Research and
Engineering, 3 Research Link, Singapore 117602 (SG).(74) Agent: **VIERING, JENTSCHURA & PARTNER LLP**;
P.O. Box 1088, Rochor Post Office, Rochor Road, Singa-
pore 911833 (SG).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A LAYERED SILICATE/POLYMER COMPOSITE AND A METHOD OF FORMING THE SAME

FIG. 1

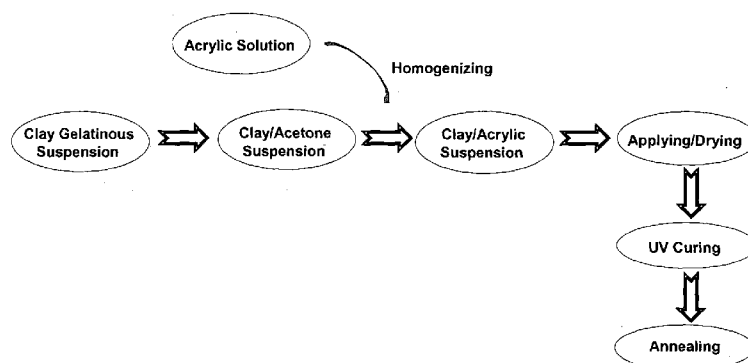

(57) Abstract: The present invention relates to a method for forming a layered silicate/polymer composite, the composite comprising individual exfoliated silicate layers separated in a continuous polymer matrix, wherein the polymer is a hydrophobic polymer, the method comprising: exfoliating sheet silicate in water to form a silicate suspension; replacing the water in the silicate suspension by an organic solvent to form a silicate/organic solvent suspension; contacting the silicate/organic solvent suspension with a solution of a hydrophobic polymer precursor in an organic solvent to form a silicate/polymer precursor suspension; coating the silicate/polymer precursor suspension on a substrate; removing the organic solvents; curing the hydrophobic polymer precursor of the coating of the silicate/polymer precursor; and annealing the cured coating to form the layered silicate/polymer composite on the substrate.

A LAYERED SILICATE/POLYMER COMPOSITE AND A METHOD OF FORMING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of priority of SG application No. 201107292-3 filed October 06, 2011, the contents of it being hereby incorporated by reference in its entirety for all purposes.

TECHNICAL FIELD

[0002] The present invention relates to layered silicates/polymer composites and methods of forming layered silicates/polymer composites.

BACKGROUND

[0003] Presently, the application of plastic films as protective films in electronics is hampered by the softness of the plastic films. Plastic films are easily scratched and may not provide sufficient protection for the electronic device. In addition, existing coatings for plastic films have poor stretching toughness. The poor stretching toughness leads to whitening during forming of coated plastic films. This leads to high wastage during the manufacturing process. Furthermore, hard coatings should ideally only be hardened during the forming process. However, in conventional processes of forming coated plastic films, the coatings typically harden before the forming process. Consequently, the coating may not stick as well to the plastic films.

[0004] Therefore, there is a need to address and improve on at least some of the abovementioned deficiencies of existing coatings for plastic films.

SUMMARY OF THE INVENTION

[0005] In a first aspect, the present invention refers to a method for forming a layered silicate/polymer composite, the composite comprising individual exfoliated silicate layers separated in a continuous polymer matrix, wherein the polymer is a hydrophobic polymer, the method comprising: exfoliating sheet silicate in water to form a silicate suspension; replacing the water in the silicate suspension by an organic solvent to form a silicate/organic solvent suspension; contacting the silicate/organic solvent suspension with a solution of a

hydrophobic polymer precursor in an organic solvent to form a silicate/polymer precursor suspension; coating the silicate/polymer precursor suspension on a substrate; removing the organic solvents; curing the hydrophobic polymer precursor of the coating of the silicate/polymer precursor; and annealing the cured coating to form the layered silicate/polymer composite on the substrate.

[0006] In a second aspect, the present invention relates to a layered silicate/polymer composite comprising individual exfoliated silicate layers separated in a continuous polymer matrix, wherein the silicate content is less than or equal to 10 wt% (based on the total weight of the composite) and the scratch resistance of the composite is at least 1H measured in terms of pencil hardness in a pencil scratch test using a Pencil Hardness Tester.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The invention will be better understood with reference to the detailed description when considered in conjunction with the non-limiting examples and the accompanying drawings, in which:

[0008] **Figure 1** is a schematic diagram depicting the preparation of a hard coating according to one embodiment of the present invention.

[0009] **Figure 2** is a schematic diagram illustrating a method to test the scratching hardness as well as a method stretching toughness of a hard coating layer prepared from applying silicate/acrylate suspension on a plastic substrate according to one embodiment of the present invention.

[0010] **Figure 3** is a graph showing the transmission spectra of (i) a clay/TH88 composite coated PET film and (ii) a pure TH88 coated PET film according to one embodiment of the present invention.

[0011] **Figure 4** are topological optical microscopy images at X 500 showing surface morphology of a clay/TH88 composite layer (clay: 0.4 wt%) without annealing at different elongation according to one embodiment of the present invention.

[0012] **Figure 5** is a topological scanning electron microscopy (SEM) image of a sample having an elongation of 100% according to one embodiment of the present invention.

[0013] **Figure 6** is a topological optical microscopy image at X 500 showing surface morphology of a clay/TH88 composite layer (clay: 0.4 wt%) at 100% elongation (a) without annealing and (b) after annealing at 140-160 °C.

DETAILED DESCRIPTION OF THE INVENTION

[0014] In a first aspect, the present invention refers to a method for forming a layered silicate/polymer composite, whereby the composite comprises individual exfoliated silicate layers separated in a continuous polymer matrix, and the polymer is a hydrophobic polymer. The method comprises exfoliating sheet silicate in water to form a silicate suspension, replacing the water in the silicate suspension by an organic solvent to form a silicate/organic solvent suspension, contacting the silicate/organic solvent suspension with a solution of a hydrophobic polymer precursor in an organic solvent to form a silicate/polymer precursor suspension, coating the silicate/polymer precursor suspension on a substrate, removing the organic solvents, curing the hydrophobic polymer precursor of the coating of the silicate/polymer precursor, and annealing the cured coating to form the layered silicate/polymer composite on the substrate.

[0015] In the present context, “layered silicate/polymer composites” are also known as polymer-layered silicate nanocomposites (PLSNs). They generally refer to (nano) composite hybrids composed of layer silicates or sheet silicates (also called phyllosilicates) dispersed in a polymer matrix in the form of reticular layers of crystals. Such composites are commonly termed as exfoliated composites and are to be distinguished from intercalated composites. In an exfoliated composite, the individual silicate layers are separated in the polymer matrix by average distances that depend on the silicate loading only. Usually, the silicate loading in an exfoliated composite is much lower than that of an intercalated composite. For example, the silicate loading an exfoliated composite may be less than or equal to 20 wt% based on the total weight of the composite, such as 20 wt%, or 18 wt%, or 16 wt%, or 14 wt%, or 12 wt%, or 10 wt%, or 8 wt%, or 6 wt% or less.

[0016] Accordingly, “individual exfoliated silicate layers separated in a continuous polymer matrix” means that the silicate layers may be uniformly dispersed in the continuous polymer matrix and the number of polymer chains in the polymer matrix between the silicate layers is variable between different silicate layers.

[0017] **Figure 1** illustrates the preparation of a hard coating according to one embodiment of the present invention. Sheet silicates or layered silicates (also known as clay) are hydrophilic and may be exfoliated in water to form a silicate suspension, in which the sheet silicates are dispersed in water layer by layer starting with the outermost layer and moving to the innermost layer of the sheet silicate to form a suspension of isolated sheets or small domains consisting of a few sheets. However, sheet silicates cannot be exfoliated in non-polar organic solvent and dispersed into hydrophobic polymer matrix uniformly.

[0018] In one embodiment, the process of exfoliating silicate in water may include dispersing the silicate in water under magnetic stirring, and using high speed homogenization to obtain the gelatinous silicate suspension. To facilitate exfoliation of silicate in water, the water may be acidified. In one embodiment, water can be acidified with acetic acid. Other non-limiting examples of substances that can be used to acidify water include citric acid or glycine acid.

[0019] The silicates used are layered silicates (also called phyllosilicate). The layered silicate or phyllosilicate may be selected from the group consisting of the serpentine group of phyllosilicates, the clay mineral group of phyllosilicates, the mica group of phyllosilicates, the chlorite group of phyllosilicates, and a mixture thereof. The phyllosilicate may be selected from the group consisting of montmorillonite, kaolinite, antigorite, chrysotile, lizardite, halloysite, illite, vermiculite, talc, palygorskite, pyrophyllite, biotite, muscovite, phlogopite, lepidolite, margarite, glauconite, chlorite, and a mixture thereof. In a preferred embodiment, silicates with aspect ratio of 10 and above are used. In one embodiment, montmorillonite is exfoliated in water to form the silicate suspension.

[0020] After exfoliating the sheet silicate in water, the water in the silicate suspension is replaced by an organic solvent to form a silicate / organic solvent suspension through a process such as solvent exchange. The step of replacing water by an organic solvent may be carried out by adding the organic solvent to the silicate suspension in water, filtering the resulting suspension and re-suspending the silicate in the organic solvent. The cycle of adding the organic solvent, filtering and re-suspending may be repeated at least once.

[0021] Solvent exchange may be further repeated for one or more times in order to improve the dispersion of layered silicate in the hydrophobic polymer matrix in subsequent processing steps. For example, the solvent exchange may be repeated once, or twice, or thrice, or more. In one embodiment, solvent exchange is carried out a total of two times. However,

excessive solvent exchange may lead to coagulation of exfoliated silicate sheets and subsequently, poor silicate dispersion in the polymer matrix. It is to be appreciated and understood that the solvent exchange is carried out until a substantial proportion of water, but not entirely, has been replaced by the organic solvent. For example, at least 50% of the water has been replaced by the organic solvent, such as about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95% or more. In a preferred embodiment, about or more than 95% of the water has been replaced by the solvent.

[0022] In various embodiments, the organic solvent used in the solvent exchange for forming a silicate/organic solvent suspension is a ketone. Advantageously, the organic solvent selected for the solvent exchange step may be miscible with a further organic solvent for the hydrophobic polymer or the precursor thereof. In one embodiment, the organic solvent is acetone. In other embodiments, the organic solvent can be other ketones such as 2-Butanone or methyl ethyl ketone, or tetrahydrofuran.

[0023] The silicate / organic solvent suspension may then be concentrated using filtration and/or evaporation. Evaporation may be carried out using rotary evaporation. In various embodiments, the final concentration of silicate in organic solvent may vary from 3 to 10 weight percentage (wt %) change, or from 5 to 8 weight percentage (wt %) change or from 6 to 7 weight percentage (wt %) change. The weight percentage change is calculated by measuring weight change of a part of suspension before and after completed drying.

[0024] The silicate / organic solvent suspension is then contacted with a solution of a hydrophobic polymer precursor in an organic solvent to form a silicate / polymer precursor suspension. Preferably, the organic solvent of the silicate / organic solvent suspension is miscible with the organic solvent of the polymer precursor solution. The polymer precursor may be cross-linkable with silicates. For example, the polymer precursor may contain hydroxyl or carboxylic acid groups for cross-linking with the silicates. Such cross-linking groups may be initiated by UV radiation or heating.

[0025] In various embodiments, the polymer precursor of the polymer precursor solution is selected from a group consisting of acrylates. Examples of acrylates may include methacrylates, ethylacrylates, n-butylacrylates, i-butylacrylates and isopropylacrylates. One exemplary embodiment of a polymer precursor of the polymer precursor solution is acrylate and the organic solvent of the silicate / organic solvent suspension is acetone. Alternatively,

other non-limiting examples of organic solvents include other ketones such as 2-Butanone, methyl ethyl ketone, and tetrahydrofuran.

[0026] The organic solvent for the solvent exchange and the organic solvent for the polymer precursor solution may be the same or different. In a preferred embodiment, the organic solvent is acetone, the polymer precursor in the polymer precursor solution is acrylate, the organic solvent for the polymer precursor is a ketone such as methyl ethyl ketone (MEK) and the silicate / polymer precursor suspension is silicate / acrylate suspension. A reason for choosing acetone is because it is miscible with methyl ethyl ketone which is a common solvent for acrylate and acetone is readily available. One commercially available acrylate in methyl ethyl ketone (MEK) solution is TH88 (a trade-name from INNOX Co, Ltd).

[0027] The silicate / polymer precursor suspension may be obtained from the silicate / organic solvent suspension and the polymer precursor solution by mixing the silicate / organic solvent suspension and the polymer precursor solution, followed by stirring, water-bath sonication and/or high speed homogenization. Other methods of mixing may also be employed such as probe sonication.

[0028] The coating of the silicate / polymer precursor suspension on a substrate may then be performed by suitable coating techniques such as roll coating, bar coating and/or blade coating. Prior to the coating step, the exfoliated silicate sheets are randomly dispersed in the silicate / polymer precursor suspension. The step of coating the silicate / polymer precursor solution on a substrate may comprise applying a force such as a shearing force to the suspension to orient the randomly dispersed silicate sheets along the substrate surface. At the same time, the polymer precursor may be sandwiched between silicate sheets to form a continuous phase. By applying a shear force during the coating step, the randomly dispersed exfoliated silicate sheets are now oriented and aligned along the substrate plane. The aligned orientation of the silicate sheets leads to improved scratching hardness in the perpendicular direction to the substrate plane. The scratching hardness may improve from at least 1H to about 2H and more, as illustrated in the examples below.

[0029] After forming the coating of the silicate / polymer precursor suspension on a substrate, the organic solvents in the suspension are removed, for example, by drying the coating in air. The drying is carried out at temperatures lower than the boiling point of the organic solvents. In various embodiments, the drying may be carried out at room temperature or elevated temperature such as 35 °C, or 40 °C, or 45 °C, or 50 °C.

[0030] After removal of the organic solvents from the silicate / polymer precursor suspension, the polymer precursor of the coating of the silicate / polymer precursor is cured and the cured coating subsequently annealed to obtain a layered silicate / polymer composite formed on the substrate.

[0031] In various embodiments, curing includes, but is not limited to, ultraviolet curing, thermal curing, electron beam curing or combinations thereof. In one embodiment, the polymer precursor of the coating of the silicate / polymer precursor is cured by UV radiation. As mentioned above, the curing serves to initiate the cross-linking process of the polymer precursor to the sheet silicates.

[0032] The substrate may comprise a plastic substrate. The plastic substrate may include substrate made of polyethylene terephthalate (PET) or polycarbonate (PC).

[0033] In various embodiments, annealing includes annealing at a temperature ranging from about 100 to about 200°C, such as about 140 to 160 °C. Annealing helps in the formation of interfacial covalent bonds between the silicate sheets and the polymer matrix and leads to improved stretching toughness of the composite in the horizontal direction of the substrate plane, as described in more detail in the examples below. During the annealing, chemical bonding between the silicate sheet and the polymer matrix is formed through the condensation of cross-linking functional groups such as hydroxyl or carboxylic acid groups from the polymer precursor. The annealing step may in addition to improving the stretching toughness in the horizontal direction, improve the scratching hardness of the resultant composite in the perpendicular direction.

[0034] In a second aspect, the invention relates to a layered silicate/polymer composite comprising individual exfoliated silicate layers separated in a continuous polymer matrix, wherein the silicate content is less than or equal to 10 wt% (based on the total weight of the composite) and the scratch resistance of the composite is at least 1H measured in terms of pencil hardness in a pencil scratch test. The pencil scratch test may be carried out using a commercially available Pencil Hardness Tester.

[0035] In various embodiments, the silicate content may vary from 0.3 to 5 wt%, such as from 0.3 to 3 wt%, such as about 0.4 wt%. Preferably, the scratch resistance is at least 2H.

[0036] In one embodiment, the layered silicate/polymer composite comprises individual exfoliated montmorillonite layers separated in a continuous polyacrylate matrix, wherein the montmorillonite content is 0.4 wt% and the scratch resistance is at least 2H.

[0037] The layered silicate/polymer composite may be used as a coating for an electronic device or a packaging.

[0038] A coated electronic device or packaging may comprise a coating formed from the layered silicate/polymer composite.

[0039] In summary, the formation of interfacial covalent bonds caused by cross-linking the polymer matrix and silicate sheets leads to improved stretching toughness and scratching hardness. The greater the amount of cross-linking between acrylates and silicates, the greater the improvement in scratching hardness and stretching toughness.

[0040] The alignment in orientation of the silicate sheets along the substrate plane also results in improved scratching hardness.

[0041] Furthermore, the composite is hierarchically structured which also contributes to enhancement in both scratching hardness and stretching toughness. In the present context, "hierarchically structured" means that the silicate sheets are stacked together layer by layer and polymer chain are intercalated between two silicate layers.

[0042] In addition, the coating tends to harden only during or after it is applied to the substrate and not before that.

[0043] Other embodiments are within the following claims and non-limiting examples.

EXPERIMENTAL SECTION

[0044] **Preparation of Coating and Application of Coating onto PET film.**

[0045] **Step 1: Preparation of gelatinous exfoliated clay suspension.** 2.0 g pristine clay is suspended in 75 g water (H₂O) under magnetic stirring. After stirring for 3 hours, 0.075 ml acetic acid is added and further stirred overnight. Then, the clay suspension is sonicated in water-bath sonicator for 30 minutes. Finally, the clay suspension is homogenized for 15 minutes at speed rate of 12,000 rpm using Homogenizer T18 to prepare gelatinous exfoliated clay suspension.

[0046] **Step 2: Preparation of clay acetone suspension.** The prepared gelatinous exfoliated clay suspension is added to 600 ml acetone, and is homogenized for 5 minutes at speed rate of 12,000 rpm. The homogenized clay suspension is then filtered using a filter paper. The collected clay paste is further suspended into another 600 ml acetone and homogenized for 5 minutes. After filtration, the clay/acetone suspension is prepared by

suspending the collected clay paste in acetone with the total weight of 50 g. The clay concentration calculated is 0.04 wt%.

[0047] **Step 3: Preparation of clay/acrylate coating suspension.** 1.5 g of the above prepared clay acetone suspension is added into 49.8 g TH88 (acrylate coating solution in methyl ethyl ketone; 30 wt%). After vortex stirring for 5 minutes and followed by sonication for 2 minutes, homogenization is carried out for 2 minutes at speed rate of 12,000 rpm to prepare the clay/acrylate coating suspension. The concentration of clay in the final solid material is calculated as 0.4 wt%.

[0048] **Step 4: Preparation of clay/acrylate hard coating layer onto PET film.** The above prepared clay/acrylate coating suspension is applied onto PET substrate using bar applicator. The coating thickness is of 5 μm after air drying off the solvent at 80 °C. The dried coating is then cured under UV radiation at intensity of 500 mJ/cm^2 . The hard coated PET film is further annealed at 140~160 °C for 5 seconds before forming to avoid whitening.

[0049] **Characterization** UV-visible transmission of the clay/TH88 composite coated PET film or TH88 coated PET film are measured using Shimadzu UV-3101 PC spectrometer at room temperature. SEM image of the surface of clay/TH88 composite layer is obtained using a field emission scanning electron microscope (SEM, JEOL JSM-6700F). The surface morphology of clay/TH88 composite layer is also observed using optical microscopy at magnification of 500 times. The scratch hardness of clay/TH88 composite coated onto PET film is measured using standard pencil. **Figure 2** illustrates a method to test the scratching hardness as well as a method to test the stretching toughness of a hard coating layer prepared from applying silicate/acrylate suspension on a plastic substrate.

[0050] Light transparency is one of the basic requirements in the development of polymer composite coating for display applications. Light transmission of prepared silicate/polymer composite coated plastic films is tested by UV-visible spectroscopy. **Figure 3** shows the transmission spectra of the clay/TH88 composite coated PET film and pure TH88 coated PET film (light transmission in air is taken as a reference as 100%), which demonstrates the prepared composite coated PET film is transparent to visible light. Transparency to visible light is due to the orientation of clay sheets along the PET substrate plane.

[0051] The scratching hardness of clay/TH88 composite coated PET film with various clay contents is measured by using standard pencil as listed in Table 1.

Table 1

Samples	Coating thickness (μm)	Pencil hardness	Elongation	Pencil hardness after annealing
TH88	4~5	H x	>100%	H x
TH88-Clay(4wt%)	4~5	H O 2H Δ	>5% Whitening	H O 2H O
TH88-Clay(2wt%)	4~5	H O 2H x	>15% Whitening	H O 2H O
TH88-Clay(1wt%)	4~5	H O 2H x	>15% Whitening	H O 2H O
TH88-Clay(1wt%)	2~3	H x	>20% Whitening	H O 2H x
TH88-Clay(0.4wt%)	4~5	H x	>50% Whitening	H O 2H O
TH88-Clay(0.4wt%)	2~3	H x	>50% Whitening	H O 2H x

X: Failed; Δ : Almost pass; O: Pass

[0052] In order to study the effect of interfacial bonding between clay sheets and TH88 matrix on hardness improvement, clay/TH88 composite coated PET films are annealed at 150 °C for 10 minutes. The hardness of the annealed coated PET films are measured and listed in Table 1 also. As shown in Table 1, while the hardness of pure TH88 coated PET film is less than 1H, the hardness of clay/TH88 composite coated PET film increases from lower than 1H to 2H with clay content increasing from 0.5 to 4 wt%. Annealing could enhance the hardness further, which is due to the formation of interfacial bonding between clay and TH88. COOH or OH groups from acrylates could react with OH groups in condensation reactions on the surface of clay sheets leading to form covalent bonding. After annealing, the minimal clay content to achieve hardness of 2H is 0.4 wt%. At equal amounts (wt %) of clay, the hardness of clay/TH88 composite coated PET film increases with increasing thickness. As an example, at clay amount of 0.4 wt%, the hardness could be increased from less than 2H at thickness of 2~3 μm to more than 2H at thickness of 4~5 μm .

[0053] Stretching toughness is critical for plastic coating, especially for forming the coated film into various curvatures. A coating layer will crack if its stretching toughness is poor. As shown in **Figure 4**, whitening is observed when the coated film is stretched, which is more serious at higher elongation. As listed in Table 1, elongation at which whitening is observed decreases from 50 to 5% with increasing clay content from 0.5 to 4 wt%.

[0054] Whitening is due to the weak interfacial bonding between clay sheets and polymer matrix which leads to cracks in the stacked clay domain. Such cracks could be observed clearly in the scanning electron microscopy (SEM) image of elongated sample as shown in **Figure 5**. It is expected that increasing interfacial bonding between clay sheet and HT88 could reduce whitening. Therefore, to reduce whitening, the polymer composite coated samples are annealed at 140 to 160 °C for 5 seconds, leading to formation of covalent bonding between clay sheets and acrylate matrix due to condensation reaction between OH groups from clay surface and COOH or OH groups from acrylate.

[0055] **Figure 6** shows the topological optical microscopy image of coated PET film with or without annealing at elongation of 100%. As shown in **Figure 6**, no whitening is observed when the clay/TH88 composite coated film is stretched after annealing. In contrast, whitening is obviously observed when the composite coated PET film is stretched without annealing.

[0056] By "comprising" it is meant including, but not limited to, whatever follows the word "comprising". Thus, use of the term "comprising" indicates that the listed elements are required or mandatory, but that other elements are optional and may or may not be present.

[0057] By "consisting of" is meant including, and limited to, whatever follows the phrase "consisting of". Thus, the phrase "consisting of" indicates that the listed elements are required or mandatory, and that no other elements may be present.

[0058] The inventions illustratively described herein may suitably be practiced in the absence of any element or elements, limitation or limitations, not specifically disclosed herein. Thus, for example, the terms "comprising", "including", "containing", etc. shall be read expansively and without limitation. Additionally, the terms and expressions employed herein have been used as terms of description and not of limitation, and there is no intention in the use of such terms and expressions of excluding any equivalents of the features shown and described or portions thereof, but it is recognized that various modifications are possible within the scope of the invention claimed. Thus, it should be understood that although the present invention has been specifically disclosed by preferred embodiments and optional features, modification and variation of the inventions embodied therein herein disclosed may be resorted to by those skilled in the art, and that such modifications and variations are considered to be within the scope of this invention.

[0059] By "about" in relation to a given numerical value, such as for temperature and period of time, it is meant to include numerical values within 10% of the specified value.

[0060] The invention has been described broadly and generically herein. Each of the narrower species and sub-generic groupings falling within the generic disclosure also form part of the invention. This includes the generic description of the invention with a proviso or negative limitation removing any subject matter from the genus, regardless of whether or not the excised material is specifically recited herein.

[0061] Other embodiments are within the following claims and non-limiting examples. In addition, where features or aspects of the invention are described in terms of Markush groups, those skilled in the art will recognize that the invention is also thereby described in terms of any individual member or subgroup of members of the Markush group.

CLAIMS

1. A method for forming a layered silicate/polymer composite, the composite comprising individual exfoliated silicate layers separated in a continuous polymer matrix, wherein the polymer is a hydrophobic polymer, the method comprising:
 - exfoliating sheet silicate in water to form a silicate suspension;
 - replacing the water in the silicate suspension by an organic solvent to form a silicate/organic solvent suspension;
 - contacting the silicate/organic solvent suspension with a solution of a hydrophobic polymer precursor in an organic solvent to form a silicate/polymer precursor suspension;
 - coating the silicate/polymer precursor suspension on a substrate;
 - removing the organic solvents;
 - curing the hydrophobic polymer precursor of the coating of the silicate/polymer precursor; and
 - annealing the cured coating to form the layered silicate/polymer composite on the substrate.
2. The method of claim 1, wherein coating the silicate/polymer precursor suspension on a substrate comprises roll coating, bar coating, or blade coating.
3. The method of claim 1 or 2, wherein annealing comprises annealing at a temperature of between 100 and 200 °C.
4. The method of any one of claims 1 to 3, wherein the sheet silicate is selected from the group consisting of the serpentine group of phyllosilicates, the clay mineral group of phyllosilicates, the mica group of phyllosilicates, the chlorite group of phyllosilicates, and a mixture thereof.
5. The method of claim 4, wherein the phyllosilicate is selected from the group consisting of montmorillonite, kaolinite, antigorite, chrysotile, lizardite, halloysite, illite,

vermiculite, talc, palygorskite, pyrophyllite, biotite, muscovite, phlogopite, lepidolite, margarite, glauconite, chlorite, and a mixture thereof.

6. The method of any one of claims 1 to 5, wherein the organic solvent of the silicate/organic solvent suspension is miscible with the organic solvent of the polymer precursor solution.
7. The method of any one of claims 1 to 6, wherein the organic solvent of the silicate/organic solvent suspension is acetone, 2-butanone, methyl ethyl ketone, or tetrahydrofuran.
8. The method of claim 6 or 7, wherein the organic solvent of the polymer precursor solution is acetone, 2-butanone, methyl ethyl ketone, or tetrahydrofuran.
9. The method of any one of claims 1 to 8, wherein the hydrophobic polymer precursor of the hydrophobic polymer precursor solution is selected from the group consisting of acrylates.
10. The method of claim 9, wherein the hydrophobic polymer precursor of the hydrophobic polymer precursor solution is n-butylacrylate or i-butylacrylate.
11. The method of claim 9, wherein the hydrophobic polymer precursor of the hydrophobic polymer precursor solution is isopropyl acrylate.
12. The method of any one of claims 1 to 11, wherein the step of replacing the water by an organic solvent is carried out by adding the organic solvent to the silicate suspension in water, filtering the resulting suspension and re-suspending the silicate in organic solvent.
13. The method of claim 12, wherein the cycle of adding the organic solvent, filtering and re-suspending is repeated at least once.

14. The method of any one of claims 1 to 13, wherein the water to exfoliate the silicate is acidified.
15. The method of claim 14, wherein the water is acidified with acetic acid.
16. The method of any one of claims 1 to 15, wherein the step of coating the silicate/polymer precursor suspension on a substrate comprises applying a shearing force to the suspension to orient the dispersed silicate sheets along the substrate surface.
17. The method of any one of claims 1 to 16, wherein curing of the hydrophobic polymer precursor comprises ultraviolet curing or thermal curing.
18. The method of any one of claims 1 to 17, wherein the substrate comprises a plastic substrate.
19. The method of claim 18, wherein the substrate is polyethylene terephthalate or polycarbonate.
20. A layered silicate/polymer composite comprising individual exfoliated silicate layers separated in a continuous polymer matrix, wherein the silicate content is less than or equal to 10 wt% (based on the total weight of the composite) and the scratch resistance of the composite is at least 1H measured in terms of pencil hardness in a pencil scratch test using a Pencil Hardness Tester.
21. The composite of claim 20, wherein the silicate content is between 0.3 and 5 wt%.
22. The composite of claim 20 or 21, wherein the scratch resistance is at least 2H.
23. The composite of any one of claims 20 to 22, comprising individual exfoliated montmorillonite layers separated in a continuous polyacrylate matrix, wherein the montmorillonite content is 0.4 wt% and the scratch resistance is at least 2H.

24. Use of a layered silicate/polymer composite of any one of claims 20 to 23 as a coating for an electronic device or a packaging.
25. A coated electronic device or packaging, comprising a coating formed from a layered silicate/polymer composite of any one of claims 20 to 23.

1/4

FIG. 1



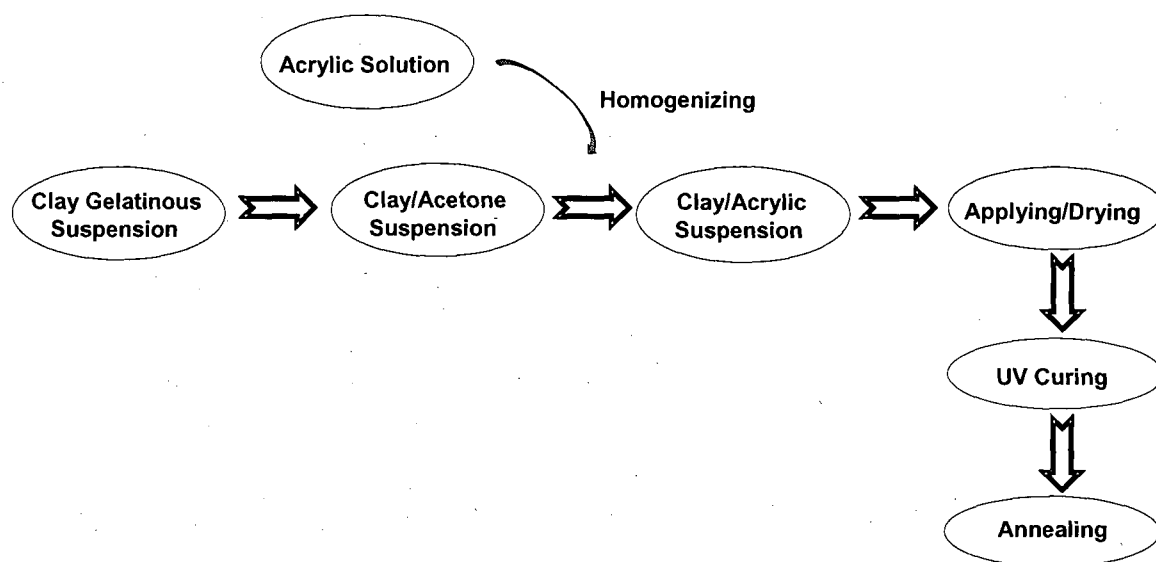


FIG. 2

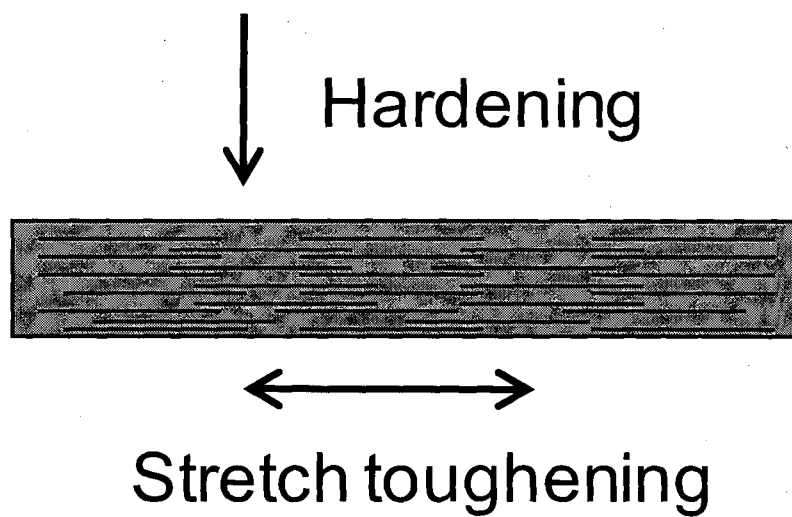


2/4

FIG. 3

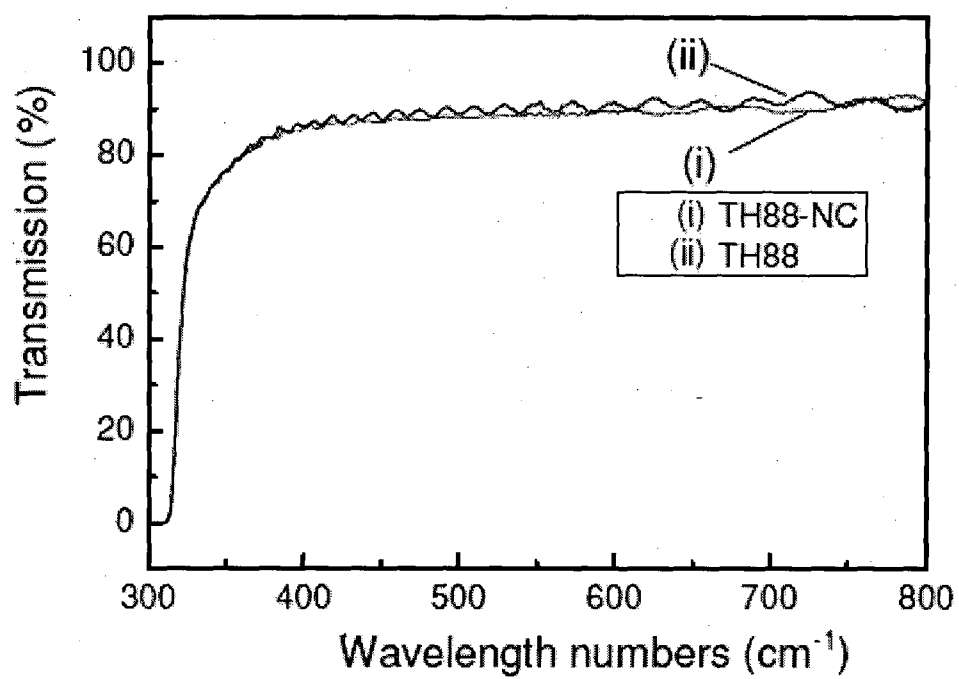

3/4

FIG. 4

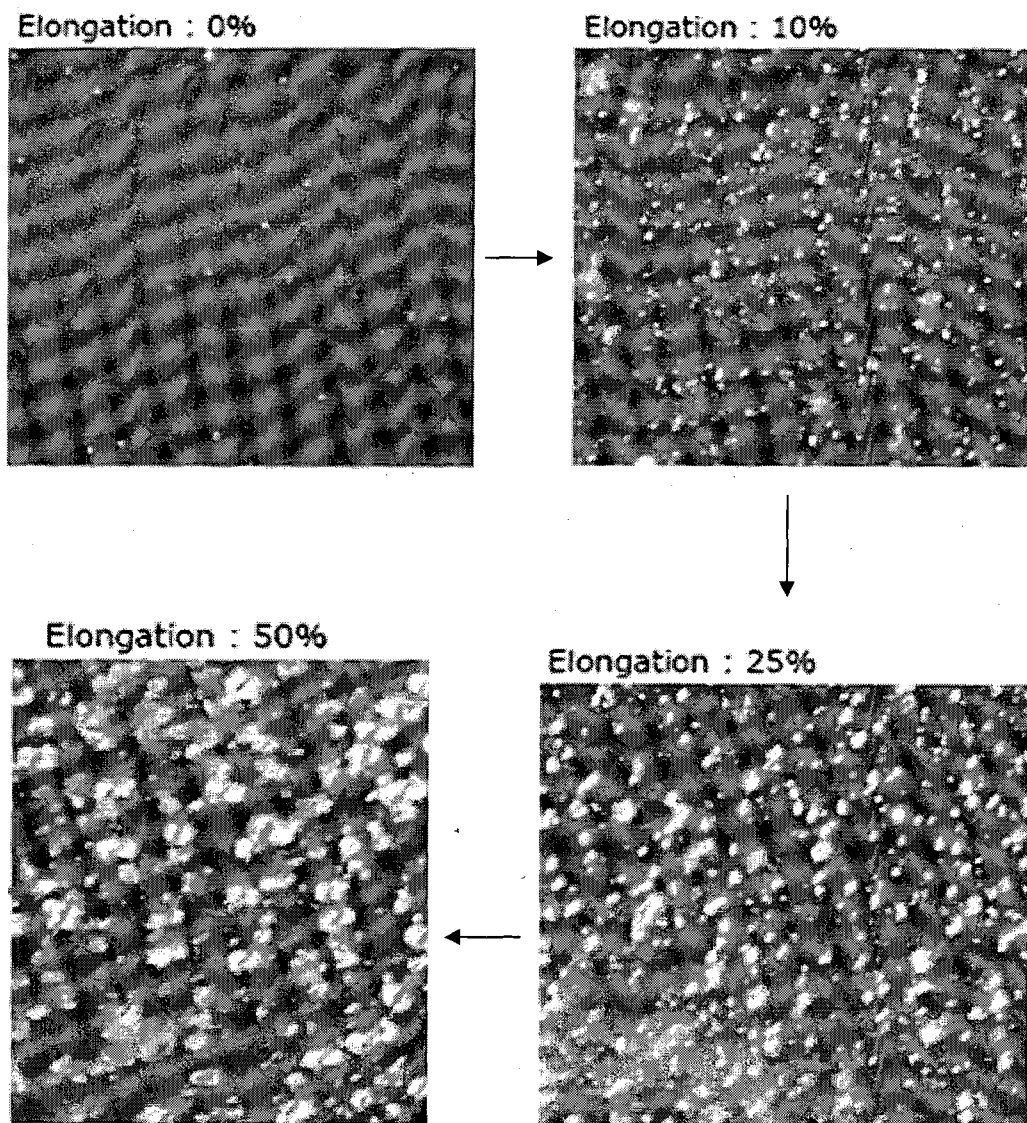

4/4

FIG. 5



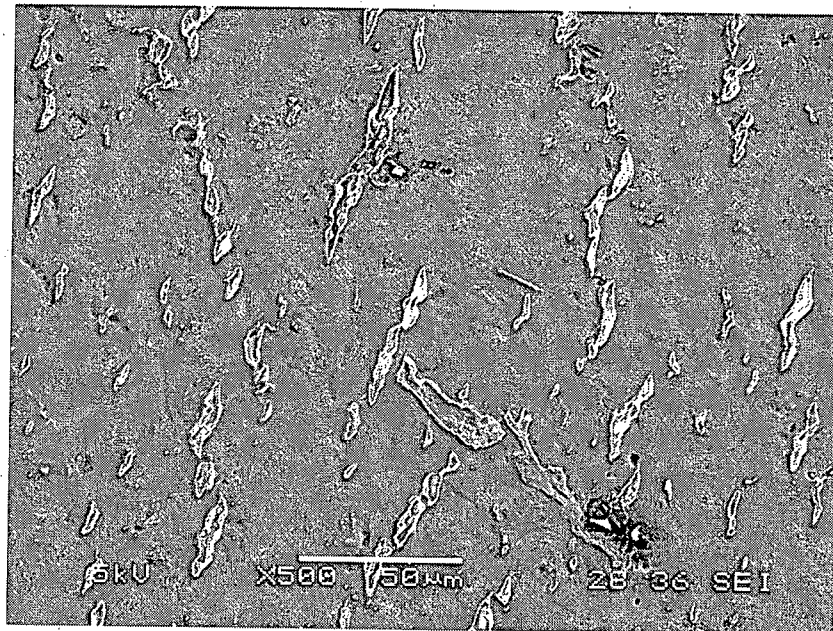


FIG. 6

Elongation without heating

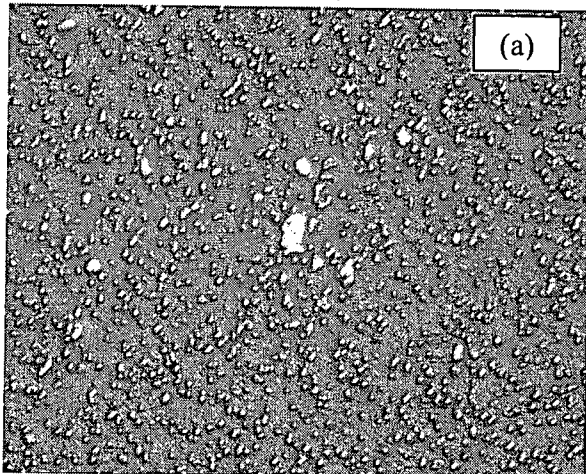

Elongation after heating immediately

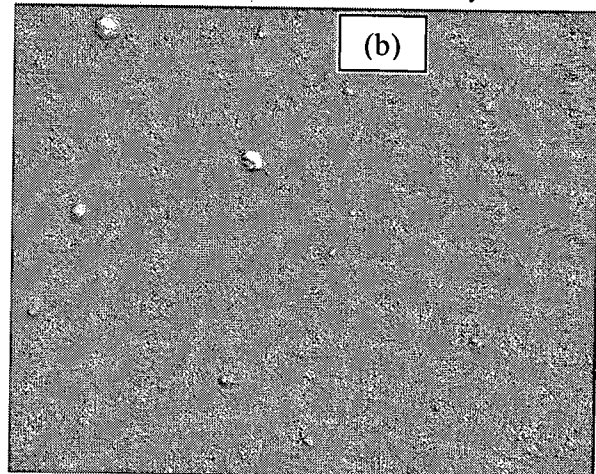

A. CLASSIFICATION OF SUBJECT MATTER

C08J 3/00 (2006.01) C08K 3/00 (2006.01) C09D 1/00 (2006.01) B82Y 5/00 (2011.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI; EPODOC; IPC: IC/EC C08J, C08K, C09D, B82Y; AND KEYWORDS: (silicate, clay, curing, crosslinking, exfoliation, delamination, dispersion, suspension, acrylate, scratch, hardness) and like terms.

Esp@ace and google Scholar were also searched using same keywords and terms as above.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	



Further documents are listed in the continuation of Box C



See patent family annex

* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
Date of the actual completion of the international search 27 November 2012		Date of mailing of the international search report 27 November 2012
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA Email address: pct@ipaustalia.gov.au Facsimile No.: +61 2 6283 7999		Authorised officer Edgar Torres AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No. 0262832503

INTERNATIONAL SEARCH REPORT		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		PCT/SG2012/000372
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 2010/0196611 A1 (PHONTHAMMACHAI et al.) 05 August 2010 abstract; paragraphs 0009-0014, 0039, 0042, 0045-0046, 0050, 0103; examples 2-3, 5-6 paragraph 0046	1-19 23
X Y	CHEN, D., et al., 'Effect of Polymerically-Modified Clay Structure on Morphology and Properties of UV-Cured EA/Clay Nanocomposites' J Appl Polym Sci, 2009, Vol 116, No. 3, pages 1278-1283 abstract; introduction, second paragraph; Table I; page 1281, right column, paragraph 1, page 1281 right column, paragraph 1, Table I	20-22, 24-25 23

Form PCT/ISA/210 (fifth sheet) (July 2009)

INTERNATIONAL SEARCH REPORT Information on patent family members		International application No. PCT/SG2012/000372
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.		
Patent Document/s Cited in Search Report		Patent Family Member/s
Publication Number	Publication Date	Publication Number Publication Date
US 2010/0196611 A1	05 Aug 2010	None
End of Annex		
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001. Form PCT/ISA/210 (Family Annex)(July 2009)		