

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 July 2011 (07.07.2011)

(10) International Publication Number  
**WO 2011/079394 AI**

- (51) **International Patent Classification:**  
H04M 3/42 (2006.01) H04M 1/00 (2006.01)  
H04L 12/66 (2006.01)
- (21) **International Application Number:**  
PCT/CA20 10/002078
- (22) **International Filing Date:**  
31 December 2010 (31.12.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
61/291,833 31 December 2009 (31.12.2009) US
- (71) **Applicant (for all designated States except US): BCE INC.** [CA/CA]; 1, Carrefour Alexander-Graham-Bell, Tour A-7, Verdun, Quebec H3E 3B3 (CA).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only): CLARK, David, William** [CA/CA]; 125 Ladyslipper Way, Carp, Ontario K0A 1L0 (CA). **MURRAY, Sean, MacLean** [CA/CA];


67 Silverlace Private, Ottawa, Ontario KIT 3Z8 (CA). **ARSENAULT, Jonathan, Allan** [CA/CA]; 5894 Pineglade Crescent, Orleans, Ontario K1W 1G3 (CA). **WOLF, Eric, John** [CA/CA]; 165 Arrowwood Dr., Stittsville, Ontario K2S 2G1 (CA). **LIU, Gao, Feng** [CA/CA]; 371 Cresthaven Dr., Ottawa, Ontario K2G 6Z6 (CA).

(74) **Agent: MURRAY, Sean;** Murray IP Consulting Inc., 246 Queen St., Suite 404, Ottawa, Ontario K1P 5E4 (CA).

(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) **Title:** METHOD, CALL PROCESSING SYSTEM, COMMUNICATION DEVICE AND COMPUTER-READABLE MEDIA FOR CONVEYING AN AUDIO ELEMENT TO A SOURCE DEVICE DURING AN OUTGOING CALL

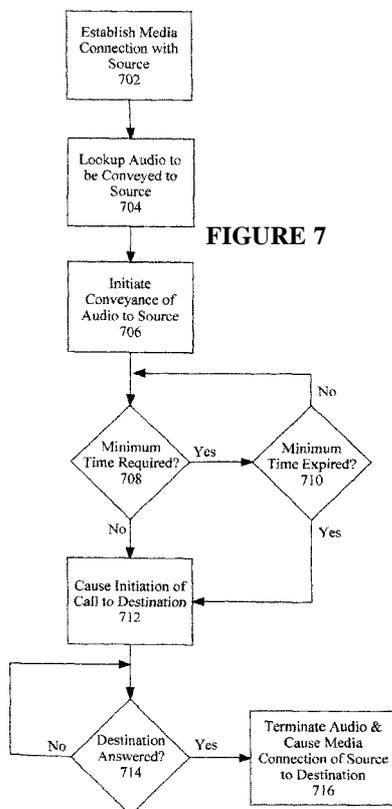

(57) **Abstract:** The present invention discloses numerous implementations for conveying an audio element to a source device initiating an outgoing call while a user of the source device is waiting for a user of a destination device to answer the call. A call processing system receives a call request message from the source device, determines an audio element from a plurality of audio elements to convey to the source device and initiates conveyance of the audio element to the source device in response to receiving the call request message. The system then causes establishment of a media connection between the source and destination devices and terminates conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

WO 2011/079394 A1

**(84) Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(Hi))
- of inventorship (Rule 4.17(iv))

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(H))

**METHOD, CALL PROCESSING SYSTEM, COMMUNICATION DEVICE  
AND COMPUTER-READABLE MEDIA FOR CONVEYING AN AUDIO  
ELEMENT TO A SOURCE DEVICE DURING AN OUTGOING CALL**

5                                   **CROSS-REFERENCE TO RELATED APPLICATION**

The present application claims the benefit under 35 USC 119 of U.S. Provisional Patent Application 61/291.833, filed on December 31, 2009 and hereby incorporated by reference herein.

10                                   **FIELD OF THE INVENTION**

The invention relates generally to telecommunications and, more particularly, to method, call processing system, communication device and computer-readable media for conveying an audio element to a source device during an outgoing call.

15                                   **BACKGROUND**

The Public Switched Telephone Network (PSTN) that has been the backbone of telephony communications for a century is transforming rapidly. Since the 1970s, the PSTN has been controlled through a set of signaling protocols called Signaling System #7 (SS7) developed by the International Standardization Sector (ITU-T) of the  
20 International Telecommunication Union (ITU). SS7 is also known variously as Common Channel Signaling System 7 (CCSS7), C7, Number 7 and CCTS7. The SS7 network manages the setup and teardown of telephone calls being placed from Plain Old Telephone Service (POTS) telephones through telephone exchange switches such as Digital Multiplex System (DMS) switches manufactured by Nortel Networks  
25 Corporation of Brampton, Canada.

In the past two decades, Voice over Internet Protocol (VoIP) technologies have emerged that directly compete with the well established Plain Old Telephone Service (POTS) telephony system. In VoIP networks, telephone terminals are coupled to  
30 Internet Protocol (IP)-based networks, such as the Internet or private IP networks, and telephone calls are managed with the use of call processing servers, often called soft switches. The well-established protocol for use with voice or video calls over IP-based networks is called Session Initiation Protocol (SIP).

VoTP calls controlled by STP and POTS calls controlled by SS7 each currently have advantages and disadvantages. VoTP calls utilize the non-dedicated nature of IP-based networks to transmit voice packets in an efficient manner via a mesh of routers while POTS calls are dedicated connections via digitally switched circuits. This distinction typically provides operational cost advantages to VoIP (and hence lower prices) while also in some circumstances diminishing the quality and security of the VoIP telephone connection as compared to the traditional POTS connection.

If) Another significant distinction between the two telephony technologies is the flexibility that is often built into the soft switches and SIP used to manage the VoIP call as compared to the traditional telephone exchange switches, such as the DMS, and SS7 protocols. While a number of call service features were launched on the DMS (ex. call forward, call waiting etc.), the introduction of VoIP and its flexibility has led to significant developments in call service features. For example, web-based control of call routing which triggers multiple telephone terminals to ring simultaneously or in sequence is common within VoTP environments.

Despite the advantages of VoIP, a large portion of telephone consumers are remaining with POTS telephones. This is due to many factors including call quality, limitations on 911 services within VoIP and unwillingness to switch from the security of having a communication system in their home/office that has proven over time to be highly reliable, even during power outages. One downside to this reliance on POTS technology is that these consumers often cannot be offered new call service features that are available within VoIP systems. Further, in many circumstances, the call processing and management of the call service features within POTS networks may cost the service provider more compared to similar call processing and call feature management within VoIP networks.

One call feature that has been growing in popularity over the past decade is customized ring tones, in which a telephone subscriber can download audio files (ex. jingles, segments of music songs) onto their telephone to use as an incoming call notification. In some cases, the telephone subscriber may have multiple ring tones available and assign particular ring tones to particular potential calling parties. In so

doing, the subscriber can in some circumstances determine who is calling based upon the ring tone. To date, customized ring tones have primarily been focused on subscribers with wireless telephones. They have not been widely adopted within POTS or VoIP phones likely due to many factors including technical limitations on  
5 the physical devices and both technical and policy limitations on the networks involved (ex. PSTN, private corporate IP networks).

Customized ring tones today are focused on incoming call notification. A user that initiates a telephony call on a source device hears a traditional ring tone while a user  
10 that receives the telephony call on a destination device may hear the customized ring tone. While the user that receives the telephony call may gain entertainment and/or information from the ring tone that he/she hears, the user that initiated the telephony call will not receive entertainment or information beyond whether the destination device is "ringing" (when actually it may be playing a customized ring tone) or  
15 whether the destination device is unavailable ("busy signal").

Against this background, there is a need for solutions that will mitigate at least one of the above problems, particularly enabling additional call features for the user that initiates a telephony call.

20

### SUMMARY OF THE INVENTION

According to a first broad aspect, the invention seeks to provide a method implemented by a call processing system for controlling an outgoing call initiated by a source device to a destination device. The method comprises receiving a call  
25 request message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call; determining an audio element from a plurality of audio elements to convey to the source device; initiating conveyance of the audio element to the source device in response to receiving the call request message from the source device; causing establishment of a  
30 media connection between the source and destination devices; and terminating conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

According to a second broad aspect, the invention seeks to provide a call processing system for controlling an outgoing call initiated by a source device to a destination device. The system comprises a processing entity and a network interface. The processing entity is operable to receive a call request message from the source device, 5 the call request message comprising identifiers of the source and destination devices for the outgoing call; to determine an audio element from a plurality of audio elements to convey to the source device; and to initiate conveyance of the audio element to the source device in response to receiving the call request message from the source device. The network interface is operable to cause establishment of a 10 media connection between the source and destination devices. The processing entity is further operable to terminate conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

15 According to a third broad aspect, the invention seeks to provide a computer-readable media containing a program element executable by a call processing system to perform a method for controlling an outgoing call initiated by a source device to a destination device. The computer-readable media comprises first, second, third, fourth and fifth program code. The first program code is for receiving a call request 20 message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call. The second program code is for determining an audio element from a plurality of audio elements to convey to the source device. The third program code is for initiating conveyance of the audio element to the source device in response to receiving the call request message from 25 the source device. The fourth program code is for causing establishment of a media connection between the source and destination devices. The fifth program code is for terminating conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

30

According to a fourth broad aspect, the invention seeks to provide a method implemented by a call processing system for controlling an outgoing call initiated by a source device. The method comprises: receiving a selection of an audio element from a user of the source device; receiving a call request message from the source

device, the call request message comprising identifiers of the source device and a destination device for the outgoing call; initiating conveyance of the audio element to the source device in response to receiving the call request message from the source device; causing establishment of a media connection between the source and destination devices; and terminating conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

According to a fifth broad aspect, the invention seeks to provide a call processing system for controlling an outgoing call initiated by a source device. The system comprises a processing entity and a network interface. The processing entity is operable to receive a selection of an audio element from a user of the source device; to receive a call request message from the source device, the call request message comprising identifiers of the source device and a destination device for the outgoing call; and to initiate conveyance of the audio element to the source device in response to receiving the call request message from the source device. The network interface is operable to cause establishment of a media connection between the source and destination devices. The processing entity is further operable to terminate conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

According to a sixth broad aspect, the invention seeks to provide a method implemented by a call processing system for controlling an outgoing call initiated by a source device to a destination device. The method comprises: receiving a call request message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call; determining a source of an audio stream to convey to the source device; initiating conveyance of the audio stream from the source of the audio stream to the source device in response to receiving the call request message from the source device; causing establishment of a media connection between the source and destination devices; and terminating conveyance of the audio stream to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

According to a seventh broad aspect, the invention seeks to provide a call processing system for controlling an outgoing call initiated by a source device to a destination device. The system comprises a processing entity and a network interface. The processing entity is operable to receive a call request message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call; to determine a source of an audio stream to convey to the source device; and to initiate conveyance of the audio stream from the source of the audio stream to the source device in response to receiving the call request message from the source device. The network interface is operable to cause establishment of a media connection between the source and destination devices. The processing entity is further operable to terminate conveyance of the audio stream to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

According to an eighth broad aspect, the invention seeks to provide a computer-readable media containing a program element executable by a call processing system to perform a method for controlling an outgoing call initiated by a source device to a destination device. The computer-readable media comprises first, second, third, fourth and fifth program codes. The first program code is for receiving a call request message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call. The second program code is for determining a source of an audio stream to convey to the source device. The third program code is for initiating conveyance of the audio stream to the source device in response to receiving the call request message from the source device. The fourth program code is for causing establishment of a media connection between the source and destination devices. The fifth program code is for terminating conveyance of the audio stream to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

According to a ninth broad aspect, the invention seeks to provide a method implemented by a communication device. The method comprises: determining an audio element from a plurality of audio elements to convey to a user of the communication device during establishment of an outgoing call; initiating conveyance of the audio element to the user of the communication device in response to detecting

an initiation of a call to a destination device by the user of the communication device; and terminating conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the destination device.

5

According to a tenth broad aspect, the invention seeks to provide a communication device comprising a network interface operable to be coupled to a network over which the communication device may initiate a call to a destination device; and a processing entity. The processing entity is operable to determine an audio element  
10 from a plurality of audio elements to convey to a user of the communication device during establishment of an outgoing call; to initiate conveyance of the audio element to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the communication device; and to terminate  
15 conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the destination device.

According to an eleventh broad aspect the invention seeks to provide a computer-readable media containing a program element executable by a communication device.  
20 The computer-readable media comprises first, second and third program codes. The first program code is for determining an audio element from a plurality of audio elements to convey to a user of the communication device during establishment of an outgoing call. The second program code is for initiating conveyance of the audio element to the user of the communication device in response to detecting an initiation  
25 of a call to a destination device by the user of the communication device. The third program code is for terminating conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the destination device.

30 According to a twelfth broad aspect, the invention seeks to provide a method implemented by a communication device. The method comprises: receiving a selection of an audio element from a user of the communication device; initiating conveyance of the audio element to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the

communication device; and terminating conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the destination device.

5 According to a thirteenth broad aspect, the invention seeks to provide a communication device comprising a network interface, a user interface and a processing entity. The network interface is operable to be coupled to a network over which the communication device may initiate a call to a destination device. The user interface is operable to receive a selection of an audio element from a user of the communication device. The processing entity is operable to initiate conveyance of the audio element to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the communication device; and to terminate conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the destination device.

10 According to a fourteenth broad aspect, the invention seeks to provide a method implemented by a communication device. The method comprises: determining an audio stream to convey to a user of the communication device during establishment of an outgoing call; initiating conveyance of the audio stream from an audio stream source that broadcasts the audio stream to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the communication device; and terminating conveyance of the audio stream to the user of the communication device prior to or substantially simultaneous with the establishment of the call between the communication device and the destination device.

15 According to a fifteenth broad aspect, the invention seeks to provide a communication device comprising a network interface operable to be coupled to a network over which the communication device may initiate a call to a destination device and the communication device may connect to an audio stream source; and a processing entity. The processing entity is operable to determine an audio stream to convey to a user of the communication device during establishment of an outgoing call; to initiate

conveyance of the audio stream from an audio stream source that broadcasts the audio stream to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the communication device; and to terminate conveyance of the audio stream to the user of the communication device  
 5 prior to or substantially simultaneous with the establishment of the call between the communication device and the destination device.

According to a sixteenth broad aspect, the invention seeks to provide a computer-readable media containing a program element executable by a communication device.  
 10 The computer-readable media comprises first, second and third program codes. The first program code is for determining an audio stream to convey to a user of the communication device during establishment of an outgoing call. The second program code is for initiating conveyance of the audio stream from an audio stream source that broadcasts the audio stream to the user of the communication device in response to  
 15 detecting an initiation of a call to a destination device by the user of the communication device. The third program code is for terminating conveyance of the audio stream to the user of the communication device prior to or substantially simultaneous with the establishment of the call between the communication device and the destination device.

20 These and other aspects of the invention will become apparent to those of ordinary skill in the art upon review of the following description of certain embodiments of the invention in conjunction with the accompanying drawings.

25 **BRIEF DESCRIPTION OF THE DRAWINGS**

A detailed description of embodiments of the invention is provided herein below, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a network architecture block diagram according to an embodiment of the  
 30 present invention;

Figure 2 is a logical block diagram of a call processing system according to an embodiment of the present invention;

Figure 3 is a signaling diagram for an outgoing call according to an embodiment of the present invention;

Figure 4 is a flow chart depicting steps performed by a call processing system according to an embodiment of the present invention during a signaling stage of an outgoing call;

Figures 5A and 5B are network architecture block diagrams illustrating two example signaling and media connections potentially resulting from an embodiment of the present invention;

Figure 6 is a flow chart depicting steps performed by a call processing system during signaling stages of outgoing calls that may require initiation of a call feature according to an example implementation of the present invention;

Figure 7 is a flow chart depicting steps performed by a call processing system after a media connection has been established between a source device of the outgoing call and the call processing system as a result of logic within Figure 6;

Figure 8 is a network architecture block diagram according to an alternative embodiment of the present invention;

Figure 9 is a logical diagram of a sample database for use with a call feature according to embodiments of the present invention;

Figures 10A and 10B are simplified network block diagrams illustrating two example scenarios for conveying an audio element to a source device using the call processing system of Figure 2;

Figure 11 is a logical block diagram of a communication device according to an embodiment of the present invention;

Figure 12 is a flow chart depicting steps performed by the communication device of Figure 11 according to an embodiment of the present invention; and

Figure 13 is a simplified network block diagram illustrating two example scenarios for conveying an audio element to a user using the communication device of Figure 11.

5

It is to be expressly understood that the description and drawings are only for the purpose of illustration of certain embodiments of the invention and are an aid for understanding. They are not intended to be a definition of the limits of the invention.

10

#### DETAILED DESCRIPTION OF EMBODIMENTS

The present invention is directed to method, call processing system, communication device and computer-readable media for conveying an audio element to a source device during an outgoing call. As depicted in detail below, within embodiments of the present invention, telephony calls that are initiated by a source device may be controlled by a call processing system within a packet-switched network, such as an IP network. The call processing system can convey an audio element to the source device prior to establishing the outgoing call with the destination device to replace the traditional ring tone that a user of the source device would normally hear. As described herein in detail, the audio element may be of numerous different forms and the call processing system may convey the audio element to the source device in a variety of manners. Further, as described herein, the source device may be implemented within a network controlled by the SS7 protocol such as the PSTN or a network controlled by another protocol such as SIP. A subscriber associated with the source device may pre-configure the selection of the audio element to be conveyed in replace of the traditional ring tone. A communication device may also implement a method to convey an audio element to a user of the communication device during establishment of an outgoing call.

Figure 1 is a network architecture block diagram according to an embodiment of the present invention. Figure 1 includes a Public Switched Telephone Network (PSTN) 120 which allows users of communication devices, such as a first communication device 100, to effect telephonic communications (ex. receive and originate calls). Various types of communication devices may be used by users to effect telephonic communications over the PSTN 120. For example, in various embodiments, a

communication device used by a user (such as communication device 100) may be a wired Plain Old Telephony System (POTS) phone (including a cordless phone), a wireless phone (ex. a cellular phone or other mobile communication device, including a telephony-enabled Personal Digital Assistant (PDA)) or another communication  
5 device that can either directly or through another network interconnect with the PSTN 120.

As shown, the first communication device 100 is coupled to a Service Switching Point (SSP) 102. The SSP 102 is further coupled to one or more Signal Transfer  
10 Points (STPs), such as STP 104, and the STP 104 is further coupled to one or more Service Control Points (SCPs), such as SCP 105. One skilled in the art would understand the normal operation of the SSP 102, STP 104 and SCP 105 in establishing well-known telephonic communications between the communication device 100 and another communication device within the PSTN or within a VoIP  
15 network. The SSP 102 is a telephone switch equipped with SS7-capable software which terminates signaling links. The SSP 102 would generally originate, terminate or switch telephonic calls for wireline or wireless communication devices. In the case of wireless communication devices, the SSP 102 may comprise a wireless network switch or may comprise a plurality of entities that together allow a wireless  
20 communication device to originate, terminate or switch telephonic calls. The STP 104 is a packet switch of the SS7 network that receives and routes incoming signaling messages towards the proper destination and performs specialized routing functions. The SCP 105 is a database that provides information necessary for advanced call-processing capabilities. In one example, the SSP 102 can be implemented with a  
25 DMS-100 (Digital Multiplex System-100) telephone switch produced by Nortel Networks of Brampton, Canada; the STP 104 can be implemented with a Broadband STP produced by Nortel Networks of Brampton, Canada; and the SCP 105 can be implemented with an ISCP System produced by Telcordia Technologies Inc. of Piscataway, New Jersey.

30

Further shown in Figure I, a signaling converter 106 and a media gateway 110 are each coupled between the PSTN 120 and a data network 130. In this implementation, the data network 130 is based on the IP standard and therefore will be herein referred to as IP network 130, though data networks with alternative routing protocols could

be used. The signaling protocol used within the IP network 130, according to some embodiments of the present invention, is Session initiation Protocol (SIP), a well-known standard for Voice-over-Internet Protocol (VoIP) signaling. Therefore, the signaling converter 106 is an SS7/STP converter in example embodiments described herein, as its primary purpose is to translate between SS7 signaling messages within the PSTN 120 and SIP messages within the IP network 130. One example product that can operate as the signaling converter 106 is an Internetwork Services Signaling Gateway (ISSG) produced by Nortel Networks Inc. of Brampton, Canada. The media gateway 110 is a PSTN/IP gateway in example embodiments described herein, as its primary purpose is to couple media connections (ex. voice circuits) within the PSTN 120 with media connections in the IP network 130. One example product that can operate as the media gateway 110 is a Packet Voice Gateway (PVG) produced by Nortel Networks Inc. of Brampton, Canada.

Also depicted within Figure 1 is a call processing system 108 within the IP network 130 which can communicate with both the signaling converter 106 and the media gateway 110. Further, a second communication device 112 is shown that is coupled to the IP network 130 via a communications network 140. The communication device 112, as described in detail below, can be a destination for an outgoing call initiated by the first communication device 100. In this case, the communication device 112 may be a wired POTS phone (including a cordless phone), a wireless phone (ex. a cellular phone or other mobile communication device, including a telephony-enabled PDA), a VoIP phone, a POTS phone equipped with an analog terminal adaptor (ATA), a softphone (i.e. a computer equipped with telephony software), or a telephony-enabled television unit (ex. a set-top box connected to a television and a remote control). The communications network 140 may comprise a portion of one or more of the PSTN, a wireless network (ex. a cellular network), and a data network (ex. IP network 130).

The call processing system 108, according to some embodiments of the present invention, comprises an IP server that manages SIP message processing and further routes media packets (ex. VoIP packets) over the IP network 130. In some example implementations, the call processing system 108 comprises a soft switch such as a Broadworks Application Server produced by Broadsoft Inc. of Gaithersburg, Maryland.

Figure 2 is a logical block diagram of the call processing system 108 according to an embodiment of the present invention. In this sample implementation, the call processing system 108 comprises a processing entity 202 coupled to a database 204. Further, the processing entity 202 is coupled to a plurality of network interfaces, shown in Figure 2 as network interfaces 206A, 206B, that are each coupled to the IP network 130. The processing entity 202 can receive/transmit SIP messages and media packets from/to various entities within the IP network 130 via the plurality of network interfaces 206A, 206B. The processing entity 202, as will be described herein below in detail for a number of specific implementations, can analyze received SIP messages, conduct look-ups within the database 204 and determine appropriate SIP message responses. Further, the processing entity 202, as will also be described in detail below for a number of specific implementations, can perform numerous media packet processing tasks including but not limited to receiving, analyzing, generating, transmitting and routing media packets. It should be understood that, although depicted as a single element, the processing entity 202 could comprise a plurality of elements that together operate to provide the functionality as described herein below.

The database 204 can store application and customer specific information as will be described herein below. For instance, the database 204 may store call feature related information, customer specific settings for call features, subscription information, customer authentication information, standard call feature message information or other customer or service provider information that may be needed to process SIP messages and/or media packets according to embodiments of the present invention. It should be understood that, although depicted as a single element within the call processing system 108, the database 204 could comprise one or more remote storage elements coupled to the processing entity 202 via one or more of the network interfaces 206A, 206B; a plurality of storage elements within the call processing system 108; or a combination of remote and local storage elements.

30

Figures 3 and 4 will be used as reference for a description of an outgoing call flow according to an embodiment of the present invention that utilizes the network architecture shown in Figure 1. The signaling flow for an outgoing call is initiated upon a user activating the communication device 100 and attempting to make an

outgoing call to a destination party by transmitting a destination identifier associated with the desired destination party to the SSP 102. For instance, in case of the communication device being a POTS telephone, the user can activate the communication device by taking the device "off hook" and can transmit the destination identifier by pressing Dual-Tone Multi-Frequency (DTMF) keys that together comprise a telephone number associated with the destination party on a keypad of the communication device 100. In other embodiments, the user may activate the communication device 100 and transmit the destination identifier in other manners. For instance, in some embodiments, the communication device has an address book from which the user may select a destination identifier based upon destination name or other associated identifier, this destination identifier being transmitted via DTMF tones or other means to the SSP 102. In other embodiments, the communication device 100 may have a "send" or "talk" selection option which when selected triggers the transmission of the destination identifier to the SSP 102, which in some implementations may comprise a wireless network switch, after the destination identifier has been selected by the user. This transmission of the destination identifier after the "send" or "talk" selection option has been made could also be seen as the activation of the communication device 100.

At this stage, the SSP 102 detects the activation of the communication device 100 and receives the destination identifier, thus receiving an outgoing call initiation from the communication device 100. In the case of the communication device 100 being a POTS telephone, the SSP 102 can have an Off Hook Delay (OHD) trigger associated with the communication device 100 which is detected when the communication device 100 goes "off hook" and a valid telephone number is interpreted from the received DTMF tones. Given that the OHD trigger is enabled, the SSP 102 can be assigned to transmit a TCAP message to the STP 104 for delivery to a specific destination such as the call processing system 108 via the signaling converter 106. The TCAP message, according to embodiments of the present invention, comprises the destination identifier (ex. a telephone number associated with the desired destination party) as well as a source identifier associated with the originator of the outgoing call (ex. a telephone number associated with the communication device 100). The communication device 100 that is used to originate the outgoing call can

also be referred to as the source device while a communication device associated with the destination identifier can be referred to as the destination device.

The SSP 102 may have OHD triggers as described assigned to specific subscribers due to call features that the subscriber has enabled. Alternatively, a service provider that manages the SSP 102 may assign the OHD trigger as described to subscribers that it wishes to communicate with. Further, a service provider may assign the OHD trigger as described to all subscribers if specific features or functionality implemented with the call processing system 108 may be necessary for any subscriber. As will be described herein below in detail, the OHD trigger as described is assigned to subscribers that may require call processing from the call processing system 108.

Figure 3 is a signaling diagram for an outgoing call according to an embodiment of the present invention. In this figure, the SSP 102 transmits the TCAP message described above (including the destination and source identifiers) as message 302 to the STP 104. The STP 104 forwards this TCAP message to the signaling converter 106 as message 304 as a result of routing instructions received from the SSP 102. The signaling converter 106 receives the TCAP message and translates it into a STP message that comprises a call request message including the destination and source identifiers. The signaling converter 106 subsequently initiates a SIP communication session 306 with the call processing system 108 and transmits the call request message to the call processing system 108.

Figure 4 is a flow chart depicting steps performed by the call processing system 108, according to an embodiment of the present invention, upon reception of the call request message from the signaling converter 106. As shown, the call processing system 108 receives the call request message at step 402. This call request message may be received at the processing entity 202 via one of the network interfaces 206A, 206B and may be a first message within a SIP session with the signaling converter 106. As described above, the call request message comprises the destination and source information for the initiated outgoing call.

At step 404, the processing entity 202 processes one or both of the source and destination identifiers. A specific example of processing of the source and/or

destination identifiers is described in detail herein with reference to Figure 6. The processing of the source and/or destination identifiers may be performed with information stored within the database 204 or other sources of information external to the call processing system 108. In embodiments of the present invention, specific processing results can occur due to a call feature that a subscriber associated with the source device has subscribed to, call feature settings for specific subscribers and/or the service provider's desire to contact a subscriber.

The processing of the source and/or destination identifiers at step 404 leads to a decision being made by the processing entity 202 at step 406. In particular, the processing entity 202 determines whether to take control of the outgoing call. The processing entity 202 can determine to take control of the outgoing call for many reasons including, but not limited to, enabling a selected audio element to be conveyed to the user of the source device while waiting for the destination device to answer the call and/or other actions as may be desired by the user of the source device or the service provider. Specific examples of decisions for a specific application will be described in more detail herein.

If the processing entity 202 determines to take control of the call at step 406, the processing entity 202, according to embodiments of the present invention, causes the transmission of a call route message at step 408. The call route message can take the form of a number of different STP messages including, but not limited to, a 200 OK STP message or another message that would indicate that the outgoing call should be routed to the call processing system 108. The call route message may indicate trunks that the outgoing call should be routed to in order to enable the outgoing call to be routed via the media gateway 110 to the call processing system 108. The call route message may be sent via one of the network interfaces 206A, 206B to the signaling converter 106 as shown as message 308 in Figure 3. The signaling converter 106 then translates the call route message into a TCAP Call Route message and routes the TCAP Call Route message to the STP 104 as indicated by message 310. The TCAP Call Route message indicates that the outgoing call should be routed to the call processing system 108 via the media gateway 110. The STP 104 routes the TCAP Call Route message to the SSP 102 as shown as message 312. The SSP 102 will subsequently switch the media connection of the outgoing call from the

communication device 100 through trunks within the PSTN 120 to the media gateway 110 as shown by media connection 314. The media gateway 110 then initiates a SIP session with call processing system 108 to establish media connection 316. At this point, there is a media connection between the communication device 100, via the SSP 102 and the media gateway 110, to the call processing system 108.

If the processing entity 202 determines not to take control of the call at step 406, the processing entity 202, according to embodiments of the present invention, causes the transmission of a call rejection message at step 410. The call rejection message can take the form of a number of different SIP messages including, but not limited to, a service unavailable message, an error message, an unauthorized call message, a service not implemented message or another message that would indicate rejection of the outgoing call by the processing entity 202. The call rejection message may be sent via one of the network interfaces 206A, 206B to the signaling converter 106 as shown as message 318 in Figure 3. The signaling converter 106 then translates the call rejection message into a TCAP Continue message and routes the TCAP Continue message to the STP 104 as indicated by message 320. The TCAP Continue message indicates that the outgoing call should be processed as normal by the SSP 102 (i.e. without the use of the call processing system 108). The STP 104 routes the TCAP Continue message to the SSP 102 as shown as message 322. The SSP 102 will subsequently process the outgoing call using the destination identifier as normal using SS7 signaling, potentially requiring a look-up within the SCP 105 or the use of toll switches (not shown) as one skilled in the art would understand.

Figures 5A and 5B are network architecture block diagrams illustrating two example signaling and media connections potentially resulting from an embodiment of the present invention. Figure 5A illustrates a similar network architecture to that described above for Figure 1 and so like components have been identified with the same reference numbers. As shown, a media connection 502 is established between the communication device 100 and the SSP 102. This media connection may be established upon the user of the communication device 100 taking the device off hook and dialing a set of DTMF keys to indicate the desire to initiate an outgoing call to a destination device, in this case communication device 112. As described with reference to Figures 3 and 4, the SSP 102 initiates SS7 signaling 504 via the STP 104

to the signaling converter 106 in response to detecting the OHD trigger. The signaling converter 106 subsequently translates the SS7 signaling to SIP messages and communicates the messages with the call processing system 108 over a SIP session 506. In the example of Figure 5A, the call processing system 108 responds  
5 with a call route message that indicates that it wants to control the outgoing call and for the media connection to be connected to the call processing system 108. This message is communicated back to the SSP 102 via the SIP session 506, the signaling converter 106 and the SS7 signaling 504 (as a TCAP Call Route message). In response, the SSP 102 establishes trunks 508 between itself and the media gateway  
10 110 and the media gateway 110 establishes a media connection 510 with the call processing system 108.

The call processing system 108 at this stage then has a media connection with the communication device 100 and knows the source and destination identifiers for the  
15 outgoing call. The call processing system 108 may conduct numerous different actions at this point, an example of which will be described in detail for a specific application with reference to Figure 7. In general, the call processing system 108 may enable a wide variety of functionality after the media connection to the communication device 100 is established including, but not limited to, conveying an  
20 audio element to the user of the source device while the user awaits the destination device to accept the call, routing the outgoing call using the destination identifier and/or other actions that a service provider may desire to enable. In the example depicted in Figure 5A, the call processing system 108, possibly along with other functions, establishes a media connection 512 to the communications network 140  
25 that controls the communication device 112. The communications network 140 may then establish a media connection 514 with the communication device 112, which together with media connections 502, 508, 510 and 512 can allow for the establishment of a complete media connection between the first communication device 100 (the source device) and the second communication device 112 (the  
30 destination device).

Figure 5B illustrates a similar network architecture to that described for Figure 5A and similar components and signaling are labeled with similar reference numbers. In this example, the call processing system 108 decides not to take control of the

outgoing call and therefore responds with a call reject message that indicates that it does not want to control the outgoing call and for the outgoing call to be routed in a normal SS7 signaling manner. This message is communicated back to the SSP 102 via the SIP session 506, the signaling converter 106 and the SS7 signaling 504 (as a  
5 TCAP Continue message).

In the example of Figure 5B, the communication device 112 is a POTS telephone and the communications network 140 is a portion of the PSTN. As shown, the communication device 112 is coupled to a second SSP 102A and the SSP 102A is  
10 coupled to a second STP 104A. Through PSTN/SS7 trunks, the SSP 102 is coupled to the second SSP 102A and the STP 104 is coupled to the second STP 104A. When the SSP 102 receives the TCAP Continue message, it proceeds to initiate SS7 signaling 516 via the STP 104 and the second STP 104A to the second SSP 102A. The SS7 signaling 516 enables the establishment of a media connection 518 between  
15 the SSP 102 and the second SSP 102A. At this stage, the SSP 102A may enable a media connection 520 between itself and the communication device 112, which together with media connections 502 and 518 can allow for the establishment of a complete media connection between the first communication device 100 (the source device) and the second communication device 112 (the destination device).

20

Control logic implemented within the processing entity 202 of the call processing system 108 for an example implementation of the present invention are described with reference to Figures 6 and 7.

25 Figure 6 is a flow chart depicting steps performed by the processing entity 202 within the call processing system 108 during signaling stages of outgoing calls that may require initiation of a call feature according to an example implementation of the present invention. As shown in Figure 6, the processing entity 202 receives a call request message at step 602 similar to previously described step 402 of Figure 4. The  
30 call request message comprises source and destination identifiers for the outgoing call. At step 604, the processing entity 202 analyzes the source identifier (and possibly also the destination identifier) to determine whether a call feature should be initiated. This determination can be performed in a number of different manners. In one implementation, the processing entity 202 can perform a look-up within the

database 204 or another storage entity external to the call processing system 108 to determine whether the user of the source device is subscribed to a call feature that would require the call processing system 108 to control the outgoing call. In some implementations, the user can set call feature settings with a customer service  
5 representative or through online tools. In other implementations, the service provider could subscribe a customer to a call feature or potentially could enable a call feature for all or a defined set of customers.

In the example of Figure 6, if the processing entity 202 determines that a call feature  
10 that requires the call processing system 108 to take control of the outgoing call does not need to be initiated, the processing entity 202 decides not to take control of the outgoing call and causes the transmission of a call reject message at step 606, similar to the step 410 within Figure 4. In this case, the outgoing call will be established using standard SS7 signaling techniques without control by the call processing system  
15 108.

If the processing entity 202 determines that a call feature that requires the call processing system 108 to take control of the outgoing call does need to be initiated, the processing entity 202 decides to take control of the outgoing call and causes the  
20 transmission of a call route message at step 608, similar to the step 408 within Figure 4. In this case, as is described in detail above, a media connection will be established between the source device and the call processing system 108. This media connection can allow the call processing system 108 to perform a number of call features, such as a call feature to convey an audio element to the source device prior to the  
25 establishment of the outgoing call, which will be described in detail with reference to Figure 7.

Figure 7 is a flow chart depicting steps performed by the processing entity 202 within the call processing system 108 after a media connection has been established between  
30 the source device and the call processing system 108 as a result of the transmission of the call route message at step 608 of Figure 6. Figure 7 is directed to an example implementation of the present invention in which the call feature enables a customized audio element to be conveyed to a user of the source device prior to the establishment of the outgoing call. This customized audio element can be a

replacement for the standard ring tone and can provide information, entertainment and/or other benefits.

5 Within the example implementation of Figure 7, the processing entity 202 first establishes a media connection with the source device at step 702. Next at step 704, the processing entity 202 conducts a look-up to determine an audio element to be conveyed to the source device prior to the establishment of the call. The processing entity 202 can perform the look-up on the database 204 and/or another storage entity external to the call processing system 108. In some embodiments, the source  
10 identifier can be used as a reference to locate the audio element. In other embodiments, the destination identifier can be used or can be used in combination with the source identifier. In yet further embodiments, neither the source identifier nor the destination identifier is used in the look-up, but instead the audio element is selected based on service provider settings, a random algorithm, a predetermined  
15 order, temporal information and/or based upon another selection algorithm.

The audio element can be seen as a replacement for the standard ring tone audio that is heard by the user of the source device while waiting for the destination device to accept the call. The audio element can take many different forms in various  
20 implementations of the present invention. In some example implementations, during a provisioning stage, a subscriber of service on the source device may select an audio element from a set of potential audio elements offered by a service provider. In this case, the call processing system 108 or another entity enabled by the service provider may offer a plurality of potential audio elements to the subscriber and subsequently  
25 receive selection information from the subscriber, the selection information comprising an indication of at least one of the plurality of audio elements. The selection information may comprise an indication of at least one audio file and/or may comprise an indication of at least one audio stream broadcast on the IP network 130. In other embodiments, the subscriber may provide the call processing system 108 or  
30 another entity controlled by the service provider with one or more audio elements that he/she would like to hear while waiting for the destination to accept an outgoing call. The audio element provided by the subscriber may be one or more audio files or a playlist of audio files. For instance, the subscriber may select/provide a particular song (ex "Kashmir" by Led Zeppelin or "Dead Puppies Are So Not Cool" by

Samantha and the Cramps), a jingle (ex. seasonal melodies), elevator music, a motivational statement, a voice memo generated by the subscriber or another audio element as desired by the subscriber. In some implementations, the subscriber may select and/or provide a plurality of audio elements and the processing entity 202 may  
5 select one of these audio elements based on a random algorithm, a predetermined order within a list or another condition such as temporal information (time of day, week, year, etc.). In this case, the call processing system 108 may associate a subset of potential audio elements to the source identifier and may select within the subset of audio elements based on a random algorithm, predetermined order, temporal  
10 information, etc.

In some implementations, the audio element(s) may be stored within the database 204 or another storage entity external to the call processing system 108 and may be referenced using the source identifier. In other implementations, a location identifier  
15 is stored within the database 204 or another storage entity external to the call processing system 108 and may be referenced using the source identifier. The location identifier can be used to extract the audio elements) by the processing entity 202 from network components within the IP network 130. For example, a location identifier could comprise a URL, a lookup reference within an audio element database  
20 or another identifier that allows the processing entity 202 to locate the audio element(s) within or outside of the IP network 130.

In some alternative embodiments, the subscriber may select an audio element that is provided by an audio stream source; either transmitted in real time at the time of the  
25 outgoing call or a static stream transmitted repetitively. For instance, in some implementations, the subscriber may select a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages, a reading of information (ex. news, weather, sport scores, stock quotes, a magazine, a newspaper, a podcast, a social media update  
30 (ex. Facebook, Twitter), etc.) or another audio stream that can be broadcast by an audio stream source and conveyed to a user of the source device at the time of an outgoing call. In some implementations, a location identifier associated with the audio stream source is stored within the database 204 or another storage entity external to the call processing system 108 and may be referenced using the source

identifier. The location identifier can be used by the processing entity 202 to locate and connect to an audio stream from the audio stream source. For example, a location identifier could comprise a URL, a lookup reference within a database for the audio stream source or another identifier that allows the processing entity 202 to locate the  
5 audio stream source within or outside of the IP network 130.

In other alternative embodiments, the processing entity 202 can generate an audio element that is an audio representation of scheduling information associated with the subscriber of the source device after accessing the scheduling information from a  
10 source of scheduling information associated with the subscriber. The source of scheduling information may be an application in which the user has stored scheduling information. The scheduling information could be stored within the database 204 or another storage entity external to the call processing system 108. In some examples, the scheduling information could be stored in a network component (not shown)  
15 within the IP network 130 or another data network coupled to the IP network 130. In this case, the network component may run a scheduling application, such as Outlook™ produced by Microsoft Corporation of Redmond, Washington or Google Calendar produced by Google Tnc. of Mountain View, California. The processing entity 202 may use the source identifier as a reference within a database, such as the  
20 database 204, to access the location and login credential information of the scheduling information. The processing entity 202 may then access the scheduling information from the network component storing the scheduling information through the IP network 130. In another example, the scheduling information could be stored on the source device, for instance, within an application residing on the source device. In  
25 this case, the processing entity 202 may communicate with the application on the source device to access the scheduling information associated with the subscriber. The scheduling information, once accessed, can be used by the processing entity 202 to generate an audio element for the source device. In a particular example, the processing entity 202 could enable a text to voice function in order to create an audio  
30 element that is an audio representation of one or more events within the scheduling information. The processing entity 202 may use the event(s) that will occur next to create the audio element. For example, if the subscriber has a dentist appointment at 10am on December 14<sup>th</sup> and the user of the source device initiates an outgoing call at 9am on December 14<sup>th</sup>, the processing entity 202 may extract scheduling information

related to the dentist appointment from a scheduling program, determine that the dentist appointment is the next event within the scheduling information and generate an audio element such as "Reminder: You have a dentist appointment at 10am today". The processing entity 202 could also determine the relative time until the event and  
5 generate an audio element such as "Reminder: You have a dentist appointment in one hour". In alternative embodiments, a separate processing entity within the IP network 130 could be used to generate the audio element from the scheduling information.

In further alternative embodiments, instead of using the source identifier or along with  
10 using the source identifier, the processing entity 202 can use the destination identifier to determine an audio element to convey to the source device. In some implementations, a particular destination identifier may be associated with a particular audio element. For example, a destination identifier may be linked to a reminder message, such as "David's birthday is on December 28<sup>th</sup>". The processing entity 202  
15 may look-up the audio element in this case by using the destination identifier as a reference within the database 204 or another storage entity external to the call processing system 108. In some implementations, a subscriber may enable customized audio elements for particular destination identifiers. In this case, the processing entity may utilize the source identifier to locate information associated  
20 with the subscriber within the database 204 or another storage entity external to the call processing system 108 and utilize the destination identifier to locate one or more particular audio element(s) to be conveyed to the source device. For example, a subscriber may set-up one or more memo messages related to a particular individual associated with a destination identifier; link a particular destination identifier to  
25 reminder information; link an audio file to a particular destination identifier; or otherwise associate a particular audio element to a destination identifier. In one example, a subscriber may record a voice memo for a particular destination identifier to remind them of fact(s) concerning an individual associated with the destination identifier. In this case, the audio element may comprise "Bill does not like being  
30 called William. His wife's name is Dorothy. His son Luke plays hockey and his daughter Emma competes in diving. Bill normally orders 20 boxes of high gloss paper." As described above, the audio element(s) or location information associated with the audio element(s) may be stored within the database 204 or another storage entity external to the call processing system 108.

7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100

7 In other embodiments, the service provider or another third party may select audio elements that are to be conveyed to the source device. 8 In these cases, audio elements may be linked directly to the source identifier, the destination identifier or a combination of the source and destination identifiers; or may not be linked to either of the source and destination identifiers but rather may be a general audio element. In some examples, the audio elements in this case may comprise general information from the service provider (ex. service interruption information, billing information, marketing information, seasonal greeting information, public service information, etc.) or advertising information from third parties as selected by the service provider or by a third party. The advertisements, in some implementations, may be linked to information known by the service provider concerning the subscriber and/or an entity associated with the destination identifier. As described above, the audio element(s) or location information associated with the audio element(s) may be stored within the database 204 or another storage entity external to the call processing system 108.

As shown in Figure 7, once the processing entity 202 has looked up the audio element to be conveyed to the source device at step 704, the processing entity 202 initiates the conveyance of the audio element to the source device at step 706. The conveyance of the audio element may comprise playing the audio element over the media connection with the source device. In alternative embodiments, the processing entity 202 may alternatively connect an audio stream source to the media connection with the source device. It should be understood that the means for conveyance of the audio element to the source device may be determined at least partially upon the audio element that is to be conveyed. The conveyance of an audio element to a source device for two example scenarios will be described with reference to Figures 10A and 10B.

In some embodiments of the present invention, other media elements could be conveyed to the source device along with or instead of an audio element. For example, if the source device can support a display capable of projecting visual data such as video, images and/or text (ex. multimodal phones, smart phones, computer screen associated with the source device etc.), the processing entity 202 could look-up other media elements such as video, images or text information and transmit these other media elements to the source device. In this case, a user of the source device

may be able to view video, images and/or text information on a display of the source device prior to (and possibly during) the call being established between the source and destination devices. Similar to the various embodiments described, the other media elements could include information selected by a subscriber associated with the source device, information related to an entity associated with the destination identifier (ex. memos related to the entity, images/videos of the entity, etc.), information selected by a service provider or third party (ex. alert, advertisement, account information, etc.) or other data that can be visually displayed on a screen at the source device.

10

In some embodiments of the present invention, the processing entity 202 determines whether the audio element being conveyed has a minimum time that is required at step 708. A minimum time may be required or desired for the conveying of an audio element if particular information is required or desired to be conveyed to the user of the source device prior to the outgoing call being established with the destination device. This may be the case for audio elements such as voice memos, reminders, or other audio elements that convey information. If a minimum time is required at step 708, the processing entity 202 will wait the required minimum time at step 710. The processing entity 202 may be provided with minimum time information along with the audio element or may receive an indication that signifies that the full audio element needs to be played. It should be understood that in some embodiments, no minimum time requirement is needed and steps 708 and 710 are not implemented by the processing entity 202.

25 If the minimum time is not required at step 708 or if the minimum time has expired at step 710, the processing entity 202 causes the initiation of a call to the destination device using the destination identifier at step 712. In some embodiments, the initiation of a call to the destination device occurs only after the minimum time has expired at step 710 though, in other embodiments, no such delay may occur. The initiation of the call can be performed in many manners and will depend upon the network that the destination device is connected and the protocols the network utilizes.

After causing initiation of the call to the destination device at step 712, the processing entity waits for the destination device to answer the call at step 714. During this waiting period, when a traditional "ring tone" audio would normally be provided to the source device, the processing entity 202, according to embodiments of the present invention, continues to convey the audio element(s) to the source device. If the audio element ends during this waiting period, the processing entity 202 may either convey the audio element an additional time, convey another audio element (ex. another song, ring tone) or stop conveying audio to the source device.

Once the destination device answers the call, the processing entity 202, as depicted in step 716, proceeds to terminate the conveying of the audio element and cause a media connection to be established between the source device and the desired destination device. The terminating conveying of the audio element may be prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices. This media connection can be established in a number of manners. In one example, the processing entity 202 causes the establishment of a media connection between the call processing system 108 and the destination device and subsequently bridges it with the already established media connection between the source device and the call processing system 108. Other techniques for the call processing system 108 to connect the source and destination devices should be understood.

Although the description of embodiments above are directed to implementations in which the source device (communication device 100 of Figure 1) is coupled to the SSP 102 and the SSP 102 utilizes SS7 signaling to control outgoing calls from the source device, it should be understood that the call feature described with reference to Figure 7 could be applied to other implementations. For instance, in embodiments of the present invention, the source device may comprise a VoIP enabled device controlled by SIP signaling and outgoing calls from the source device may be controlled by a call processing system similar to the call processing system 108 of Figure 1. An example network architecture according to this embodiment is described with reference to Figure 8.

Figure 8 depicts a network architecture block diagram similar to that depicted in Figure 1 with like components being provided with like reference numerals. Within Figure 8, the communication device 100 has been replaced with a communication device 800 and the PSTN 120 has been replaced with a communication network 820.

5 The communication device 800 comprises any one of a VoIP phone (wireline or wireless), a POTS phone equipped with an analog terminal adaptor (ATA), a softphone (i.e. a computer equipped with telephony software), or a telephony-enabled television unit (ex. a set-top box connected to a television and a remote control). The communications network 820 may comprise a portion of one or more data networks

10 (ex. the Internet, IP network 130, a private IP network) and/or a wireless network (ex. a cellular network). In this architecture, the communication device 800 may initiate outgoing telephony calls via the communication network 820 using a signaling protocol such as STP.

15 In one particular example implementation, the communication device 800 may have its incoming/outgoing calls controlled by call processing system 108. As described, the call processing system 108 may comprise one or more servers that enable soft switch functionality for VoIP calls. In this example, when the communication device 800 initiates an outgoing call, the device 800 may send a call request message in the

20 form of a SIP invite to the call processing system 108 via the network 820 and the network 130. The SIP invite may include a source identifier that identifies the communication device 800 (ex. telephone number, IP address, URL, SIP URT, MAC address etc) and a destination identifier that identifies a desired destination device (ex. potentially communication device 112 within Figure 8). The call processing system

25 108 can then manage the establishment of a media connection between the communication device 800 and its desired destination device. As well, the call processing system 108 can implement call features, including a call feature similar to that described above with reference to Figure 7 for conveying an audio element to the source device prior to establishment of the outgoing call. In particular, upon

30 receiving a SIP invite from the communication device 800, the call processing system 108 can establish a media connection with the communication device 800 similar to that described in step 702 within Figure 7. The remaining steps of the process depicted in Figure 7 can then proceed in a similar manner.

Figure 9 is a logical diagram of a sample database for use with the call feature of Figure 7 according to an example implementation of the present invention. As depicted, the database of Figure 9 is shown as comprising the database 204 of Figure 2. It should be understood that the database of Figure 9 could comprise another storage entity external to the call processing system 108 and may comprise a plurality of entities that together operate as a database.

As shown in Figure 9, the database 204 comprises a plurality of data entries 902<sub>1</sub>, 902<sub>2</sub>, 902<sub>3</sub>, 902<sub>4</sub>...902<sub>N</sub>, in this case, totaling N entries. Each of the data entries 902<sub>1</sub>, 902<sub>2</sub>, 902<sub>3</sub>, 902<sub>4</sub>...902<sub>N</sub> comprises source information 904 that comprises one or more source identifiers that uniquely identify the entry and allows for a look-up by the processing entity 202. The source identifiers 904 may comprise any uniquely addressable identifier including, but not limited to, a telephone number, an IP address, a URL, a SIP URI, MAC address etc. Each entry may be linked to a single subscriber, a plurality of subscribers or a group of subscribers (such as a corporation, family, team etc.) and may comprise one or more source identifiers within the source information 904. A plurality of source identifiers within the source information 904 may be desired in the case that a subscriber has a plurality of telephonic devices, each of which having a coiresponding identifier.

Further depicted in Figure 9, each data entry 902<sub>1</sub>, 902<sub>2</sub>, 902<sub>3</sub>, 902<sub>4</sub>... 902<sub>N</sub> comprises an indication of one or more audio elements 906. As described above, audio elements may comprise a variety of different forms. For instance, in some implementations, the audio element may comprise a particular song, a jingle, elevator music, a motivational statement, a voice memo generated by the subscriber or another audio element as desired by the subscriber. The indication of the audio elements 906 may comprise the actual audio element or a location identifier that identifies a storage location for the audio element, the location identifier in some embodiments comprising a URL, a lookup reference within an audio element database or another identifier that allows the processing entity 202 to locate the audio element(s) within or outside of the TP network 130. Further, the audio element may comprise an audio stream provided by an audio stream source; either provided in an audio stream in real time at the time of the outgoing call or a static repetitive stream. For example, the audio stream may comprise a radio broadcast, an audio portion of a television

broadcast, a playlist of songs, a service announcement broadcast; a set of one or more advertisement messages, a reading of information (ex. news, weather, sport scores, stock quotes, a magazine, a newspaper, a podcast, a social media update (ex. Facebook, Twitter), etc.) or another audio stream that can be broadcast by an audio stream source and conveyed to a user of the source device at the time of an outgoing call.

Yet further, the audio element may comprise scheduling information associated to a user of the source device or related to information that is known concerning a user of the destination device. Even further, the audio element may comprise general information from the service provider (ex. service interruption information, billing information, marketing information, seasonal greeting information, public service information, etc.), advertising information from third parties as selected by the service provider or by a third party, one or more memo messages related to a particular individual linked to a particular destination identifier; reminder information linked to a particular destination identifier; a particular song, jingle, elevator music or motivation message linked to a particular destination identifier; or otherwise a particular audio element linked to a particular destination identifier.

Yet further, the data entries 902<sub>1</sub>, 902<sub>2</sub>, 902<sub>3</sub>, 902<sub>4</sub>...902<sub>N</sub> of Figure 9 may comprise condition information 908, the condition information 908 dictating, in some data entries, conditions that need to apply in order for particular audio elements 906 to be conveyed to a source device. The condition information 908 may comprise a selection algorithm (ex. random, sequential, playlist predetermined order), a temporal condition (ex. time of day, week, year, etc.), a condition related to one or more particular destination identifiers, a condition related to information within a scheduling program or any other conditions as may be set by a subscriber, a service provider or a third party.

In the particular example implementation shown in Figure 9, data entry 902] contains a source identifier 416-888-1234 as source information 904. This source identifier is a telephone number associated to a subscriber to the call feature. The data entry 902] further contains a song "Kashmir" by Led Zeppelin as an indication of an audio element 906. This indication may comprise an actual file with the song (ex. MP3) or

may comprise location information for locating the song within a storage entity. In the case of data entry 902<sub>1</sub>, there are no conditions within the condition information 908 and therefore this song is selected to be played to a source device associated with the particular source identifier for all outgoing calls.

5

As shown, data entry 902<sub>2</sub> contains a source identifier 613-777-4321 as source information 904. This source identifier is a telephone number associated to a subscriber to the call feature. The data entry data entry 902<sub>2</sub> further contains a URL for an MP3 playlist as an indication of an audio element 906. This indication  
10 provides location information for locating an MP3 playlist on the Internet. In the case of data entry 902<sub>2</sub>, there is one condition within the condition information 908, that is that songs within the MP3 playlist be played with a random selection order during outgoing calls.

15 Within Figure 9, data entry 902<sub>3</sub> contains source identifiers 613-777-2222 and 613-333-2222 as source information 904. These source identifiers are telephone numbers associated to a single subscriber to the call feature and so are grouped together in the data entry 902<sub>3</sub>. The data entry 902<sub>3</sub> further contains a link to an Economist magazine blog, a link to a CBC Radio 3 real-time broadcast and a Jazz compilation as  
20 indications of audio elements 906. These indications provide audio elements (possibly for the blog or the Jazz compilation) or location information for locating the audio elements on an audio element storage entity and/or the Internet. In the case of data entry 902<sub>3</sub>, there are conditions within the condition information 908 that apply for each of the indications of audio elements 906. In this case, the Economist  
25 magazine blog is to be conveyed if an outgoing call occurs in the morning, the CBC Radio 3 broadcast is to be conveyed if an outgoing call occurs in the afternoon and the Jazz compilation is to be conveyed if an outgoing call occurs in the evening.

Data entry 902<sub>4</sub> within the database 204 of Figure 9 contains a source identifier  
30 24.114.111 as source information 904. This source identifier is an IP address associated to a subscriber to the call feature. The data entry 902<sub>4</sub> further contains a memo to Fred (an individual associated with a particular destination identifier) and a birthday reminder element as indications of audio elements 906. The memo to Fred audio element may be a prerecorded memo containing information related to an

individual named Fred. The birthday reminder audio element may be an indication to look-up scheduling information and determine if an individual associated with the destination identifier for an outgoing call has a birthday event within a short period of time. In the case of data entry 902<sub>4</sub>, there are conditions within the condition information 908 that apply for each of the indications of audio elements 906. In this case, the memo to Fred is to be conveyed if the outgoing call is directed to a destination identifier associated with an individual named Fred. The birthday reminder element is to be conveyed if it is detected that an individual associated with the destination identifier of the outgoing call has a birthday within 2 days of the outgoing call.

Finally, data entry 902<sub>N</sub> contains a source identifier 6139992345@bell.ca as source information 904. This source identifier is a SIP URN associated to a subscriber to the call feature. The data entry 902<sub>N</sub> further contains a link to a weather network as an indication of an audio element 906. This indication provides weather information which can be converted from text to speech to generate an audio element or may be conveyed to the source device in text form via a display on the source device. In the case of data entry 902<sub>N</sub>, the condition within the condition information 908 for the audio element is to provide weather information related to the destination identifier's location as may be dictated by a telephone area code within the destination identifier of the outgoing call.

Although depicted for particular data entries within the database 204 of Figure 9, it should be understood that the data entries 902<sub>1</sub>, 902<sub>2</sub>, 902<sub>3</sub>, 902<sub>4</sub>...902<sub>N</sub> depicted are only example implementations. Other subscribers may select alternative audio elements and apply a variety of different conditions for conveyance of the audio elements.

In some embodiments of the present invention, as described above, other media elements could be conveyed to the source device along with or instead of an audio element. In these cases, the other media elements may be stored within the data entries 902<sub>1</sub>, 902<sub>2</sub>, 902<sub>3</sub>, 902<sub>4</sub>...902<sub>N</sub> along with or instead of the indications of audio elements 906. In some examples, the other media elements are stored with

conveyance information, the conveyance information indicating an appropriate means for conveying the media element to the user of the source device.

Further, although not depicted in Figure 9, condition information 908 for a particular data entry may comprise a minimum time for the audio element to be conveyed as described in detail above with reference to Figure 7.

Figures 10A and 10B are simplified network block diagrams which illustrate the process of conveying an audio element (step 706 within Figure 7) to a source device for two example scenarios using the call processing system 108. In the scenario of Figure 10A, the audio element is an audio file stored within a content database, the content database being local to the call processing system 108 or alternatively being a network component within the IP network 130 or another data network coupled to the IP network 130. In the scenario of Figure 10B, the audio element is an audio stream transmitted by an audio stream source, which may be controlled by the same or a different entity from the operator of the call processing system 108.

In both scenarios, a source device 1000 is coupled to the IP network 130 that comprises the call processing system 108. In operation, the source device 1000 transmits a call request message 1002 to the call processing system 108. The call request message 1002 may be transmitted to the call processing system 108 similar to previously described with reference to Figure 3 in the case that the source device 1000 is a POTS-enabled device that utilizes SS7 signaling. The call request message 1002 may be transmitted as a SIP invite as described with reference to Figure 8 in the case that the source device 1000 is a VoIP-enabled device that utilizes SIP. Upon reception of the call request message 1002, the call processing system 108 may establish a media connection 1004 with the source device 1000 similar to step 702 of Figure 7 and perform a look-up to determine an audio element to convey to the source device as described for step 704 of Figure 7.

As shown in Figure 10A, a content database 1010 is further coupled to call processing system 108 within the IP network 130, the content database 1010 comprising a plurality of audio files that may include, but are not limited to, songs, jingles, elevator music, motivational statements, marketing messages, advertisements, service

announcements and voice memos. In the example scenario of Figure 10A, the audio element to be conveyed to the source device 1000 is one or more audio file(s) stored within the content database 1010. The audio file(s) may have been selected by or provided by a subscriber associated with the source device 1000 during a prior provisioning stage or may be selected by or provided by another entity such as the service provider that operates the call processing system 108 or a third party entity (ex. advertiser, government, etc.) enabled by the service provider or the subscriber. In the case of the subscriber selecting one or more audio file(s) during a prior provisioning stage, in some implementations, the subscriber may select the audio file(s) via a web-based interface with the call processing system 108 or with the content database 1010 or through another communication interface (ex. web application, telephone, application on a telephone, etc.) with the service provider that operates the call processing system 108 or another entity enabled by the service provider. In this case, the call processing system 108 or another entity enabled by the service provider may offer a plurality of potential audio files to the subscriber and subsequently receive selection information from the subscriber, the selection information comprising an indication of at least one of the plurality of audio files. In an alternative implementation, the service provider that operates the call processing system 108 may determine subscriber selected audio file(s) by accessing web-based and/or device based audio file(s) and/or playlist(s) previously selected by the subscriber for other purposes (ex. playlists within iTunes on a computer/telephone or a web-based music website), presuming that the service provider has been given proper permission to access such information.

In the example scenario of Figure 10A, upon looking up the audio element to be conveyed to the source device, the call processing system 108 transmits an audio file request 1006 to the content database 1010. In some implementations, the content database 1010 is incorporated within the call processing system 108 and therefore the audio file request 1006 would be transmitted between the processing entity 202 of the call processing system 108 and the content database 1010. In other implementations, the content database 1010 is an external component within the IP network 130 or another data network coupled to the IP network 130 and the audio file request 1006 is transmitted via IP packets to the content database 1010. In some cases, the content database 1010 may be incorporated within the database 204, the combined database

being either implemented within the call processing system 108 or external within the IP network 130. Upon receiving the audio file request 1006, the content database 1010 accesses the requested audio file(s), establishes a media connection 1008 with the call processing system 108 and plays the audio file(s) over the media connection

5 1008, the call processing system 108 bridging the media connection 1008 with the media connection 1004 established with the source device 1000 in order to convey the audio file(s) to the source device 1000. In an alternative implementation, the content database 1010 may establish a direct media connection 1012 (shown with a dashed line in Figure 10A) with the source device 1000 if the call processing system 108

10 provides an identifier of the source device 1000 within the audio file request 1006. In this implementation, the content database 1010 can convey the audio file(s) to the source device 1000 via the media connection 1012 without the call processing system 108 bridging the media connections. In this case, the call processing system 108 may send a termination command to the content database 1010 or to the source device

15 1000 to terminate the media connection 1012 on which the audio file(s) are being conveyed during step 716 of the process of Figure 7. In yet another alternative implementation, rather than play the audio file(s), the content database 1010 may transfer the audio file(s) to the call processing system 108 or the source device 1000 and the actual playing of the audio file(s) may be performed by the call processing

20 system 108 or the source device 1000. In these cases, a sufficiently high bandwidth connection is required to transfer the audio file(s) such that the file transfer does not noticeably delay the playing of the audio file(s) to a user of the source device 1000.

Figure 10B depicts a simplified logical network block diagram similar to that shown in Figure 10A and like components have been identified with the same reference

25 numbers. Within Figure 10B, the content database 1010 has been removed and instead an audio stream source 1020 is included. The audio stream source 1020 is depicted in Figure 10B within the IP network 130, though the audio stream source 1020 may be within a different data network coupled to the IP network 130. The

30 audio stream source 1020 may comprise a server or other network component (ex. networked computer, etc.) that is operable to transmit streaming audio content to network components within the IP network 130 or other connected networks. The network components receiving the streamed audio content may include the call processing system 108 and/or the source device 1000 if the source device 1000 is

enabled to receive data over the IP network 130 or another data network coupled to the IP network 130. In some particular implementations, the audio stream source 1020 comprises a web server that is operable to continuously stream a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast a set of one or more advertisement messages, a reading of information (ex. news, weather, sport scores, stock quotes, a magazine, a newspaper, a podcast, a social media update (ex. Facebook, Twitter), etc.) or other audio content as one may desire to stream on a data network. In the example scenario of Figure 10B, the audio element to be conveyed to the source device 1000 is an audio stream that is transmitted by the audio stream source 1020. The audio stream to be conveyed to the source device 1000 may have been selected by a subscriber associated with the source device 1000 during a prior provisioning stage or may be selected by another entity such as the service provider that operates the call processing system 108 or a third party entity (ex. advertiser, government, etc.) enabled by the service provider or the subscriber. Similar to that described above for the scenario of Figure 10A, in the case of the subscriber selecting an audio stream during a prior provisioning stage, in some implementations, the subscriber may select the audio stream via a web-based interface with the call processing system 108 or with the audio stream source 1020 or through another communication interface (ex. web application, telephone, application on a telephone, etc.) with the service provider that operates the call processing system 108 or another entity enabled by the service provider. In this case, the call processing system 108 or another entity enabled by the service provider may offer a plurality of potential audio streams to the subscriber and subsequently receive selection information from the subscriber, the selection information comprising an indication of at least one of the plurality of audio streams.

In the example scenario of Figure 10B, upon looking up the audio element to be conveyed to the source device, the call processing system 108 transmits an audio stream request 1022 to the audio stream source 1020. The audio stream request 1022 may comprise IP packets that request a media connection 1024 to be established between the audio stream source 1020 and the call processing system 108. In some cases, the audio stream request 1022 may comprise a URL of a particular audio stream or another identifier that is associated with a particular audio stream. For example, the audio stream request 1022 may comprise a URL associated with an

online radio broadcast of "CBC Radio 3". Upon receiving the audio stream request 1022, the audio stream source 1020 establishes a media connection 1024 with the call processing system 108 and initiates transmitting of the selected audio stream over the media connection 1024, the call processing system 108 bridging the media connection  
5 1024 with the media connection 1004 established with the source device 1000 in order to convey the audio stream to the source device 1000. In an alternative implementation, the audio stream source 1020 may establish a direct media connection 1026 (shown as a dashed line in Figure 10B) with the source device 1000 if the call processing system 108 provides an identifier of the source device 1000  
10 within the audio stream request 1022. In this implementation, the audio stream source 1020 can convey the audio stream to the source device 1000 via the media connection 1026 without the call processing system 108 bridging the media connections. In this case, the call processing system 108 may send a termination command to the audio stream source 1020 or to the source device 1000 to terminate the media connection  
15 1026 on which the audio stream is being conveyed during step 716 of the process of Figure 7.

As described previously, in some embodiments of the present invention, other media elements could be conveyed to the source device along with or instead of an audio  
20 element. In Figure 10A, other elements could be stored within the content database 1010 and these additional media elements such as video, images and/or text could be conveyed to the source device 1000 along with, or instead of, the audio file(s). Further, in Figure 10B, the audio stream source 1020 could be a media stream source that is operable to transmit other media elements such as video, images and/or text  
25 along with, or instead of, the audio stream to the source device 1000. In both of these cases, the source device 1000 would require a data connection capable of receiving the media elements and a screen capable of displaying visual data.

Within the above description, the call processing system 108 has been described as a  
30 single system that performs signaling functionality and performs functionality after a media connection is established between it and the source device. In alternative embodiments, the system that performs the signaling functionality as described herein may be distinct to the system that performs the functionality described herein after the media connection is established with the source device. In this embodiment, the two

systems may communicate with each other or may not. Further, the two systems may be operated by two distinct corporate entities in some embodiments.

The embodiments of the present invention described above are directed to  
5 implementations in which the call processing system 108 conveys an audio element  
prior to the call being established with the destination device to replace the traditional  
ring tone that a user of the source device would normally hear. In alternative  
embodiments of the present invention as will be described with reference to Figures  
11, 12 and 13, the source device used to initiate the call may also be used to look-up  
10 and convey the audio element to a user prior to the call being established with the  
destination device. In this alternative, the source device either may not receive a  
traditional ring tone from a network element such as the SSP 102 or the call  
processing system 108 or may ignore the traditional ring tone that it receives and  
replace it with an alternative audio element.

15

Figure 11 is a logical block diagram of a communication device 1100 according to an  
example implementation of the present invention that may be used as a source device  
during an outgoing call that conveys an audio element to a user as a replacement to  
the traditional ring tone. In this implementation, the communication device 1100  
20 comprises a processing entity 1102 coupled to a database 1104, a speaker 1110 and a  
handset 1112. In some embodiments, the communication device 1100 may comprise  
only one of the speaker 1110 and the handset 1112. Further, the communication  
device 1100 of Figure 11 comprises first and second network interfaces 1106, 1108  
coupled to the processing entity 1102, though in various embodiments of the present  
25 invention, the communication device 1100 may comprise only the first network  
interface 1106, only the second network interface 1108 or both of the network  
interfaces 1106, 1108. The first network interface 1106 is operable to be coupled to  
the PSTN 120 or another network that enables POTS telephone to make/receive  
telephone calls. The second network interface 1108 is operable to be coupled to a  
30 data network such as the IP network 130 and enables the processing entity 1102 to  
make/receive VoTP telephone calls and communicate with network components  
within a data network such as the IP network 130.

The processing entity 1102, in various implementations in which the communication device 1100 includes the first network interface 1106, is operable to initiate an outgoing call over the PSTN 120, conduct look-ups within the database 1104 to locate an audio element and convey the located audio element to a user of the communication device 1100 prior to the outgoing call being established as a replacement to the traditional ring tone that may be received at the communication device 1100 from the PSTN 120. The processing entity 1102, in various implementations in which the communication device 1100 includes the second network interface 1108, is operable to initiate an outgoing call over the IP network 130, conduct look-ups within the database 1104 to locate an audio element and convey the located audio element to a user of the communication device 1100 prior to the outgoing call being established as a replacement to the traditional ring tone that may be normally conveyed to a user of the communication device 1100. The processing entity 1102, in the case that the communication device 1100 comprises the second network interface 1108, may further be operable to receive/transmit SIP messages and media packets from/to various entities within the IP network 130 via the second network interface 1108 and may be operable to perform numerous media packet processing tasks including but not limited to receiving, analyzing, generating, transmitting and routing media packets. It should be understood that, although depicted as a single element, the processing entity 1102 may comprise a plurality of elements that together operate to provide the functionality as described herein below.

The database 1104 of Figure 11 may be similar to the database 204 described with reference to Figure 2. In particular, in specific implementations, the database 1104 may comprise information concerning audio elements that are to be conveyed to a user of the communication device 1100 and any conditions that might apply to conveyance of such audio elements. In essence, in some implementations, the database 1104 may comprise entries similar to that described with reference to Figure 9 but with no need to include a column for the source identifier. In some implementations as will be described, the database 1104 may further comprise audio file(s) that are to be conveyed to a user of the communication device 1100. In other implementations, only a location identifier for the audio element to be conveyed is stored within the database 1104. It should be understood that, although depicted as a single element within the communication device 1100, the database 1104 could

comprise a plurality of storage elements and, in the case that the communication device 1100 comprises the second network interface 1108, the database 1104 may comprise one or more remote storage elements coupled to the processing entity 1102 via the second network interface 1108 or a combination of remote and local storage elements.

Figure 12 is a flow chart depicting steps performed by the processing entity 1102 within the communication device 1100 of Figure 11 according to an embodiment of the present invention upon the initiation of an outgoing call from the communication device 1100. The flow chart of Figure 12 is similar to that previously described with reference to Figure 7 but the steps are performed by the processing entity 1102 within the communication device 1100 rather than the processing entity 202 within the call processing system 108. In the example implementation of Figure 12, the outgoing call may be initiated through the PSTN 120 using SS7 signaling if the communication device 1100 comprises the first network interface 1106 or may be initiated through the TP network 130 using STP if the communication device 1100 comprises the second network interface 1108. In some embodiments in which the communication device 1100 comprises both the first and second network interfaces 1106, 1108, the outgoing call may be initiated in either manner as selected by the processing entity 1102.

Upon the initiation of the outgoing call, as depicted in Figure 12, the processing entity 1102 conducts a look-up at step 1202 to determine an audio element to be conveyed to the user of the communication device 1100 prior to the establishment of the call. The processing entity 1102 can perform the look-up on the database 1104 and/or another storage entity external to the communication device 1100 if the communication device comprises the second network interface 1108. In some embodiments, the destination identifier associated with the outgoing call may be used as a reference to locate a particular audio element and/or a random algorithm, a predetermined order in a list or temporal information (ex. time of day, week, year, etc.) may be used to select a particular audio element.

In some example implementations, during a provisioning stage, a user of the communication device 1100 may select an audio element from a set of potential audio elements offered by the processing entity 1102 or by a service provider that can

control the processing entity 1102. In this case, the processing entity 1102, an entity enabled by the processing entity 1102 or an entity that controls the processing entity 1102 may offer a plurality of potential audio elements to the user of the communication device and subsequently receive selection information from the user, 5 the selection information comprising an indication of at least one of the plurality of audio elements. The selection information may comprise an indication of at least one audio file and/or may comprise an indication of at least one audio stream broadcast on the IP network 130. In other embodiments, the user of the communication device may provide the processing entity 1102, an entity enabled by the processing entity 1102 or an entity that controls the processing entity 1102 with one or more audio elements that he/she would like to hear while waiting for the destination to accept an outgoing call. The audio element provided by the user of the communication device may be one or more audio files or a playlist of audio files. For instance, the subscriber may select/provide a particular song (ex "Kashmir" by Led Zeppelin or 15 "Dead Puppies Are So Not Cool" by Samantha and the Cramps), a jingle (ex. seasonal melodies), elevator music, a motivational statement, a voice memo generated by the subscriber or another audio element as desired by the user. In some implementations, the user may select and/or provide a plurality of audio elements and the processing entity 1102 may select one of these audio elements based on a random algorithm, a predetermined order within a list or another condition such as temporal information (time of day, week, year, etc.). 20

In further implementations, an application such as iTunes may reside on the communication device 1100 in which a user has selected one or more audio files and/or generated one or more playlists of audio files. In this case, the processing entity 1102 may access the application to select an audio element to convey to the user of the communication device. In one implementation, the user of the communication device could generate a playlist of audio files specifically for the processing entity 1102 to use to convey to the user of the communication device 1100 25 during the establishment of an outgoing call. In other implementations, the processing entity 1102 may select one of the playlists or a plurality of audio files (ex. most played audio files, highest rated audio files) to convey to the user of the communication device 1100 during the establishment of an outgoing call. 30

As described previously, the audio element may take many different forms in various implementations including: one or more audio file(s) (ex. a song, a jingle, elevator music, a motivation statement, a voice memo generated by a user of the communication device, etc.) and an audio stream being transmitted from an audio stream component within the IP network 130 (ex. a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages and a reading of information (ex. news, weather, sport scores, stock quotes, a magazine, a newspaper, a podcast, a social media update (ex. Facebook, Twitter), etc.) or another audio stream that can be broadcast by an audio stream source and conveyed to a user of the communication device). In some implementations, the audio element(s) may be stored within the database 1104. In other implementations, if the communication device 1100 comprises the second network interface 1108, a location identifier may be stored within the database 1104 or another storage entity external to the call communication device 1100. The location identifier can be used to extract the audio element(s) by the processing entity 1102 from a network component within the IP network 130. For example, a location identifier could comprise a URL, a lookup reference within an audio element database or another identifier that allows the processing entity 1102 to locate the audio element(s) within or outside of the IP network 130.

Further, as previously described, the processing entity 1102 or another processing entity in communication with the processing entity 1102 could generate an audio element that is an audio representation of scheduling information associated with a user of the communication device 1100 after accessing the scheduling information from a source of scheduling information. The source of scheduling information may be an application in which the user has stored scheduling information. The scheduling information could be stored within the database 1104 or, if the communication device comprises the second network interface 1108, the scheduling information could be stored within another storage entity external to the communication device 1100. In one example, the scheduling information could be associated with an application that runs locally on the communication device 1100. In this case, the processing entity 1102 may access the application to receive the scheduling information associated with the user of the communication device. In another example, the scheduling information could be stored in a network component

(not shown) within the IP network 130 or a data network coupled to the IP network 130. In this case, the network component may run a scheduling program, such as Outlook™ produced by Microsoft Corporation of Redmond, Washington or Google Calendar produced by Google Tnc. of Mountain View, California. The processing entity 1102 may access the location and login credential information of the scheduling information within the database 1104 or, if the communication device comprises the second network interface 1108, the processing entity 1102 may access the location and login credential information of the scheduling information from another storage entity external to the communication device 1100 using an identifier for the communication device 1100 or the user of the communication device 1100. The processing entity 1102 may then access the scheduling information from the network component storing the scheduling information through the IP network 130. The scheduling information, once accessed, can be used by the processing entity 1102 to generate an audio element. In a particular example, the processing entity 1102 could enable a text to voice function in order to create an audio representation of one or more events within the scheduling information. The processing entity 1102 may use the event(s) that will occur next to create the audio element. In alternative embodiments, a separate processing entity within the IP network 130 could be used to generate the audio element from the scheduling information.

20

Similarly to previously described, in some implementations, a user of the communication device 1100 may enable customized audio elements for particular destination identifiers. In this case, the processing entity 1102 may utilize the destination identifier to locate one or more particular audio element(s) to be conveyed. For example, a user may set-up one or more memo messages related to a particular individual associated with a destination identifier; link a particular destination identifier to reminder information; link a particular audio file to a particular destination identifier; or otherwise associate a particular audio element to a destination identifier. In one example, a subscriber may record a voice memo for a particular destination identifier to remind them of fact(s) concerning an individual associated with the destination identifier. As described above, the audio element(s) or location information associated with the audio element(s) may be stored within the database 1104 or, if the communication device 1100 comprises the second network

30

interface 1108, the audio element(s) may be stored within another storage entity external to the communication device 1100.

Further, as previously described, in other embodiments, the service provider or another third party may select audio elements that are to be conveyed to a user of the communication device 1100. In these cases, audio elements may be provided directly by the service provider or another third party to the communication device 1100. In this case, the audio element may be linked to a user of the communication device 1100 or may be a general audio element. In some examples, the audio elements in this case may comprise general information from the service provider (ex. service interruption information, billing information, marketing information, seasonal greeting information, public service information, etc.) or advertising information from third parties as selected by the service provider or by a third party. The advertisements, in some implementations, may be linked to information known by the service provider concerning the subscriber and/or an entity associated with the destination identifier. As described above, the audio element(s) or location information associated with the audio element(s) may be stored within the database 1104 or, if the communication device 1100 comprises the second network interface 1108, the audio element(s) may be stored within another storage entity external to the communication device 1100.

As shown in Figure 12, once the processing entity 1102 has looked up the audio element to be conveyed at step 1102, the processing entity 1102 initiates the conveyance of the audio element to the user of the communication device 1100 at step 1204. The conveyance of the audio element may comprise playing the audio element over the speaker 1110, playing the audio element within the handset 1112 and/or playing the audio element over another component that can transmit audio waves to the user of the communication device 1100. In other implementations in which the communication device 1100 comprises the second network interface 1108, the conveyance of the audio element may comprise establishing a media connection between the communication device 1100 and a network component within the IP network 130 or another data network coupled to the IP network 130 that may stream the audio element to the communication device 1100. In this case, the processing entity 1102 initiates the establishment of the media connection and forwards the

streamed audio element to the speaker 1110 and/or the handset 1112. It should be understood that the means for conveyance of the audio element to the user of the communication device 1100 may be determined at least partially upon the audio element that is to be conveyed. The conveyance of an audio element to a user of the communication device for two example scenarios will be described with reference to Figure 13.

In some embodiments of the present invention, other media elements could be conveyed to user of the communication device 1100 along with or instead of an audio element. For example, if the communication device 1100 can support a display (not shown) capable of projecting visual data such as video, images and/or text (ex. multimodal phones, smart phones, computer screen associated with the source device etc.), the processing entity 1102 could look-up other media elements such as video, images or text information and convey these other media elements on the display (not shown) of the communication device 1100. In this case, a user of the communication device 1100 may be able to view video, images and/or text information on the display (not shown) prior to (and possibly during) the call being established with the destination device. Similar to the various embodiments described, the other media elements could include information selected by a user of the communication device 1100, information related to an entity associated with the destination identifier (ex. memos related to the entity, images/videos of the entity, etc.), information selected by a service provider or third party (ex. alert, advertisement, account information, etc.) or other data that can be visually displayed on a display at the communication device 1100.

In some embodiments of the present invention, the processing entity 1102 determines whether an audio element being conveyed has a minimum conveyance time that is required at step 1206. A minimum time may be required or desired for the conveying of an audio element if particular information is required or desired to be conveyed to the user of the source device prior to the outgoing call being established with the destination device. This may be the case for audio elements such as voice memos, reminders, or other audio elements that convey information. If a minimum time is required at step 1206, the processing entity 1102 will wait the required minimum time at step 1208 before connecting the call. The processing entity 1202 may be provided

with minimum time information along with the audio element or may receive an indication that signifies that the full audio element needs to be played. It should be understood that in some embodiments, no minimum time requirement is needed and steps 1206 and 1208 are not implemented by the processing entity 1102.

5

If the minimum time is not required at step 1206 or if the minimum time has expired at step 1208, the processing entity 1102 causes the initiation of a call to the destination device using the destination identifier at step 1210. In some embodiments, the initiation of a call to the destination device occurs only after the minimum time  
10 has expired at step 1210 though, in other embodiments, no such delay may occur. The initiation of the call can be performed in many manners and will depend upon the network that the destination device is connected to and the protocols the network utilizes.

15 After causing initiation of the call to the destination device at step 1210, the processing entity waits for the destination device to answer the call at step 1212. During this waiting period, when a traditional "ring tone" audio would normally be provided to the user of the communication device 1100, the processing entity 1102, according to embodiments of the present invention, continues to convey the audio  
20 element(s) to the user of the communication device 1100. If the audio element ends during this waiting period, the processing entity 1102 may either convey the audio element an additional time, convey another audio element (ex. another song, ring tone) or stop conveying audio to the user of the communication device 1100.

25 Once the destination device answers the call, the processing entity 1102, as depicted in step 1214, proceeds to terminate the conveying of the audio element and cause a media connection to be established between the communication device 1100 and the desired destination device. The terminating conveying of the audio element may be prior to or substantially simultaneous with the establishment of the media connection  
30 between the communication device and the destination device. This media connection can be established in a number of manners and may be controlled by network components such as the SSP 102 or the call processing system 108 described previously.

Within some embodiments of the present invention, steps of Figure 12 are performed by the processing entity 1102 in response to the processing entity 1102 detecting an initiation of a call to a destination device by the user of the communication device 1100. The processing entity 1102 may detect an initiation of a call by the user of the communication device 1100 in a number of ways. In some implementations, the processing entity 1102 is integral to the user of the communication device 1100 initiating a call to the destination device. For example, the processing entity 1102 may provide access to a virtual keypad and/or an address book to the user, receive electronic signals to initiate a call to the destination device, receive DTMF tones from buttons pressed by the user, and/or otherwise receive an intent to call the destination device from the user. In some cases, the processing entity 1102 causes establishment of the media connection between the communication device 1100 and the destination device by transmitting DTMF tones to a SSP within the PSTN 120 or by transmitting a call request message using SIP to a call processing system, such as the call processing system 108, via the IP network 130 or another data network. In other embodiments, the processing entity 1102 is not directly involved in the establishment of the media connection between the communication device 1100 and the destination device. In this case, the processing entity 1100 may detect the initiation of a call to the destination device in other manners such as detecting a ring tone being received from a network component such as an SSP via the PSTN 120 or a call processing system, such as the call processing system 108, via the IP network 130. In embodiments of the present invention, whether the processing entity 1102 is involved in establishment of the media connection between the communication device 1100 and the destination device or not, if a traditional ring tone is received at the communication device 1100 from a network component due to the initiation of the outgoing call to the destination device, the processing entity 1102 replaces the traditional conveyance of the ring tone to the user of the communication device 1100 with the conveyance of the audio element.

Figure 13 is a simplified network block diagram illustrating two example scenarios for conveying an audio element (step 1204 within Figure 12) to a user using the communication device of Figure 11. In a first scenario, the audio element is an audio file stored within a content database 1310, the content database 1310 being a network component within the IP network 130 or another data network coupled to the IP

network 130. In a second scenario, the audio element is an audio stream transmitted by an audio stream source 1320, which may be controlled by the same or a different entity from a service provider that operates the network on which the communication device 1100 makes/receives telephone calls.

5

As shown in Figure 13 for these particular scenarios, the communication device 1100 is coupled to the IP network 130 and both the content database 1310 and the audio stream source 1320 are within the IP network 130, though one or both of the content database 1310 and the audio stream source 1320 could be within a different data network coupled to the IP network 130. In operation within both scenarios, after a call is initiated at the communication device 1100, as described previously with reference to Figure 12, the processing entity 1102 within the communication device 1100 determines an audio element to convey to a user of the communication device 1100 prior to the call being established.

15

The content database 1310 comprises a plurality of audio files that may include, but are not limited to, songs, jingles, elevator music, motivational statements, marketing messages, advertisements, service announcements and voice memos. In the first scenario of Figure 13, the audio element to be conveyed to the user of the communication device 1100 is one or more audio file(s) stored within the content database 1310. The audio file(s) may have been selected by the user of the communication device 1100 during a prior provisioning stage or may be selected by another entity such as the service provider that enables the communication device 1100 to make/receive calls or a third party entity (ex. advertiser, government, etc.) enabled by the service provider or the user of the communication device 1100. In the case of the user selecting one or more audio file(s) during a prior provisioning stage, in some implementations, the user may select the audio file(s) via an application on the communication device 1100 controlled by the processing entity 1102 or via a web-based interface with the content database 1310 or through another communication interface (ex. web application, telephone, application on a telephone, etc.) with an entity that operates the content database 1310 or another entity enabled by the service provider. In some example implementations, during a provisioning stage, a user of the communication device 1100 may select an audio element from a set of potential audio elements offered by the processing entity 1102 or by a service

provider that can control the processing entity 1102. In this case, the processing entity 1102, an entity enabled by the processing entity 1102 or an entity that controls the processing entity 1102 may offer a plurality of potential audio elements to the user of the communication device 1100 and subsequently receive selection information

5 from the user, the selection information comprising an indication of at least one of the plurality of audio elements. The selection information may comprise an indication of at least one audio file and/or may comprise an indication of at least one audio stream broadcast on the IP network 130. In other embodiments, the user of the communication device may provide the processing entity 1102, an entity enabled by

10 the processing entity 1102 or an entity that controls the processing entity 1102 with one or more audio elements that he/she would like to hear while waiting for the destination to accept an outgoing call. The audio element provided by the user of the communication device may be one or more audio files or a playlist of audio files. In an alternative implementation, the processing entity 1102 may determine user selected

15 audio file(s) by accessing audio file(s) and/or playlist(s) previously selected by the user for other purposes (ex. playlists within iTunes on the communication device or on an external computer or a web-based music website), presuming that the processing entity 1102 has been given proper permission to access such information.

20 In the first scenario of Figure 13, upon looking up the audio element to be conveyed to the user of the communication device 1100, the processing entity 1102 transmits an audio file request 1302 to the content database 1310 via the IP network 130. Upon receiving the audio file request 1302, the content database 1310 accesses the requested audio file(s), establishes a media connection 1304 with the communication

25 device 1100 and plays the audio file(s) over the media connection 1304, the processing entity 1102 forwarding the streamed audio file(s) to the speaker 1110 and/or the handset 1112 in order to convey the audio file(s) to the user of the communication device 1100. In another alternative implementation, rather than play the audio file(s), the content database 1310 may transfer the audio file(s) to the

30 communication device 1100 and the actual playing of the audio file(s) may be performed by the processing entity 1102. In these cases, a sufficiently high bandwidth connection is required to transfer the audio file(s) such that the file transfer does not noticeably delay the playing of the audio file(s) to a user of the communication device 1100.

The audio stream source 1320 may comprise a server or other network component (ex. networked computer, etc.) that is operable to transmit streamed audio content to network components within the IP network 130 or other connected networks. The network components receiving the streamed audio content may include the communication device 1100. In some particular implementations, the audio stream source 1320 comprises a web server that is operable to continuously stream an online radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages, a reading of information (ex. news, weather, sport scores, stock quotes, a magazine, a newspaper, a podcast, a social media update (ex. Facebook, Twitter), etc.) or other audio content as one may desire to stream on a data network. In the second scenario of Figure 13, the audio element to be conveyed to the user of the communication device 1100 is an audio stream that is transmitted by the audio stream source 1320. The audio stream to be conveyed to the user of the communication device 1100 may have been selected by the user during a prior provisioning stage or may be selected by another entity such as a service provider that enables the communication device 1100 to make/receive calls or a third party entity (ex. advertiser, government, etc.) enabled by the service provider or the user of the communication device 1100. Similar to that described above for the first scenario of Figure 13, in the case of the user of the communication device 1100 selecting an audio stream during a prior provisioning stage, in some implementations, the user may select the audio stream via an application on the communication device 1100 controlled by the processing entity 1102 or via a web-based interface with the audio stream source 1320 or through another communication interface (ex. web application, telephone, application on a telephone, etc.) with an entity that operates the audio stream source 1320 or another entity enabled by the service provider. In some example implementations, during a provisioning stage, a user of the communication device 1100 may select an audio stream from a set of potential audio streams offered by the processing entity 1102 or by a service provider that can control the processing entity 1102. In this case, the processing entity 1102, an entity enabled by the processing entity 1102 or an entity that controls the processing entity 1102 may offer a plurality of potential audio streams to the user of the communication device 1100 and subsequently receive

selection information from the user, the selection information comprising an indication of at least one of the plurality of audio streams.

In the second scenario of Figure 13, upon looking up the audio element to be  
5 conveyed to the user of the communication device 1100, the processing entity 1102  
transmits an audio stream request 1322 to the audio stream source 1320. The audio  
stream request 1322 may comprise IP packets that request a media connection 1324 to  
be established between the audio stream source 1320 and the communication device  
1100. In some cases, the audio stream request 1322 may comprise a URL of a  
10 particular audio stream or another identifier that is associated with a particular audio  
stream. Upon receiving the audio stream request 1322, the audio stream source 1320  
establishes a media connection 1324 with the communication device 1100 and  
initiates transmitting of the selected audio stream over the media connection 1324, the  
processing entity 1102 forwarding the audio stream to the speaker 1110 and/or the  
15 handset 1112 in order to convey the audio stream to the user of the communication  
device 1100.

As described previously, in some embodiments of the present invention, other media  
elements could be conveyed to the communication device 1100 along with or instead  
20 of an audio element. In Figure 13, other elements could be stored within the content  
database 1310 and these additional media elements such as video, images and/or text  
could be conveyed to the communication device 1100 along with, or instead of, the  
audio file(s). Further, the audio stream source 1320 could be a media stream source  
that is operable to transmit other media elements such as video, images and/or text  
25 along with, or instead of, the audio stream to the communication device 1100. In both  
of these cases, the communication device 1100 would require a display (not shown)  
capable of displaying visual data.

Those skilled in the art will appreciate that, in some embodiments, certain  
30 functionality of a given element described herein (e.g., the processing entity 202) may  
be implemented as pre-programmed hardware or firmware components (e.g.,  
application specific integrated circuits (ASTCs), electrically erasable programmable  
read-only memories (EEPROMs), etc.) or other related components. In other  
embodiments, a given element described herein (e.g., the processing entity 202) may

comprise a processor having access to a memory which stores program instructions for operation of the processor to implement functionality of that given element. The program instructions may be stored on a data storage medium that is fixed, tangible, and readable directly by the given element. The data storage medium may store data  
5 optically (e.g., an optical disk such as a CD-ROM or a DVD), magnetically (e.g., a hard disk drive, a removable diskette), electrically (e.g., semiconductor memory, floating-gate transistor memory, etc.), or in various other ways. Alternatively, the program instructions may be stored remotely but transmittable to the given element  
10 via a modem or other interface device connected to a network over a transmission medium. The transmission medium may be either a tangible medium (e.g., optical or analog communications lines) or a medium implemented using wireless techniques (e.g., microwave, infrared or other wireless transmission schemes).

Although various embodiments of the present invention have been described and  
15 illustrated, it will be apparent to those skilled in the art that numerous modifications and variations can be made without departing from the scope of the invention, which is defined in the appended claims.

## WHAT IS CLAIMED IS:

1. A method implemented by a call processing system for controlling an outgoing call initiated by a source device to a destination device, the method comprising:
  - receiving a call request message from the source device, the call request
  - 5 message comprising identifiers of the source and destination devices for the outgoing call;
  - determining an audio element from a plurality of audio elements to convey to the source device;
  - initiating conveyance of the audio element to the source device in response to
  - 10 receiving the call request message from the source device;
  - causing establishment of a media connection between the source and destination devices; and
  - terminating conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection
  - 15 between the source and destination devices.
  
2. A method according to claim 1, wherein the determining an audio element from a plurality of audio elements comprises receiving a selection of an audio element from a user associated with the source device prior to the outgoing call.
- 20
3. A method according to claim 2, wherein the receiving a selection of an audio element from a user associated with the source device comprises offering a plurality of potential audio elements to the user associated with the source device and receiving selection information from the user associated with the
- 25 source device, the selection information comprising an indication of at least one of the plurality of potential audio elements.
  
4. A method according to claim 2, wherein the receiving a selection of an audio element from a user associated with the source device comprises receiving an
- 30 indication of at least one audio file.
  
5. A method according to claim 2, wherein the receiving a selection of an audio element from a user associated with the source device comprises receiving an indication of at least one audio stream broadcast on a data network.

6. A method according to claim 1, wherein the determining an audio element from a plurality of audio elements is based at least partially upon the identifier of the source device.
- 5
7. A method according to claim 6, wherein the determining an audio element from a plurality of audio elements comprises determining an indication of an audio file to convey to the source device.
- 10
8. A method according to claim 7, wherein the indication of an audio file comprises a location of the audio file within a database local to the call processing system; and wherein the initiating conveyance of the audio element to the source device comprises accessing the audio file within the database local to the call processing system and playing the audio file to the source device over a media connection between the call processing system and the source device.
- 15
9. A method according to claim 7, wherein the indication of an audio file comprises a location of the audio file within a database remote from the call processing system; and wherein the initiating conveyance of the audio element to the source device comprises transmitting a request to the remote database to play the audio file over a media connection between the remote database and the source device.
- 20
10. A method according to claim 6, wherein the determining an audio element from a plurality of audio elements comprises determining an indication of an audio stream broadcast on a data network to convey to the source device.
- 25
11. A method according to claim 10, wherein the indication of an audio stream comprises a location on the data network of an audio stream source that broadcasts the audio stream; and wherein the initiating conveyance of the audio element to the source device comprises transmitting a request to the audio stream source to transmit the audio stream over a media connection between the audio stream source and the source device.
- 30

12. A method according to claim 10, wherein the audio stream comprises at least one of a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages and a reading of information.
- 5
13. A method according to claim 6, wherein the determining an audio element from a plurality of audio elements comprises locating scheduling information associated with the identifier of the source device within a source of scheduling information; and wherein the initiating conveyance of the audio element to the source device comprises transmitting an audio representation of the scheduling information associated with the identifier of the source device to the source device.
- 10
14. A method according to claim 6, wherein the determining an audio element from a plurality of audio elements is further based at least partially upon the identifier of the destination device.
- 15
15. A method according to claim 14, wherein the determining an audio element from a plurality of audio elements comprises locating a message for a user of the source device associated with a user of the destination device.
- 20
16. A method according to claim 15 further comprising receiving the message for the user of the source device associated with the user of the destination device from the user of the source device prior to the outgoing call.
- 25
17. A method according to claim 1, wherein the determining an audio element from a plurality of audio elements to convey to the source device comprises selecting a subset of the plurality of audio elements based at least partially upon the identifier of the source device and selecting an audio element to convey to the source device from the subset based upon a random algorithm.
- 30
18. A method according to claim 1, wherein the determining an audio element from a plurality of audio elements to convey to the source device comprises selecting a subset of the plurality of audio elements based at least partially upon the

identifier of the source device and selecting an audio element to convey to the source device from the subset based upon a predetermined order.

19. A method according to claim 1, wherein the determining an audio element from a plurality of audio elements to convey to the source device comprises selecting a subset of the plurality of audio elements based at least partially upon the identifier of the source device and selecting an audio element to convey to the source device from the subset based at least partially upon temporal information.
- If) 20. A method according to claim 1, wherein the receiving a call request message from the source device comprises receiving a Session Initiation Protocol (SIP) message that has been converted from a Signaling System 7 (SS7) message by a signaling converter that previously received the SS7 message from a Service Switching Point (SSP) associated with the source device.
- 15 21. A method according to claim 20, wherein the SS7 message comprises a Transaction Capabilities Application Part (TCAP) message initiated by an Off Hook Delay trigger on the SSP.
- 20 22. A method according to claim 1, wherein the receiving a call request message from the source device comprises receiving a SIP message from the source device.
23. A method according to claim 1 further comprising determining a time period to convey the audio element; and wherein the terminating conveyance of the audio element to the source device is in response to the time period expiring.
- 25 24. A method according to claim 1, wherein the causing establishment of a media connection between the source and destination devices comprises causing initiation of a media connection with the destination device, detecting acceptance from the destination device of the outgoing call and causing establishment of the media connection between the source and destination devices in response to the acceptance from the destination device.
- 30

25. A method according to claim 24, wherein the terminating conveyance of the audio element to the source device is in response to detecting the acceptance from the destination device of the outgoing call.
- 5 26. A method according to claim 24 further comprising determining a minimum time period to convey the audio element; and wherein the causing initiation of a media connection with the destination device is in response to the Irddium time period expiring.
- 10 27. A method according to claim 26, wherein the terminating conveyance of the audio element to the source device is in response to detecting the acceptance from the destination device of the outgoing call.
- 15 28. A method according to claim 1 further comprising determining a media element to convey to a display within the source device; and initiating conveyance of the media element to the display within the source device in response to receiving the call request message.
- 20 29. A method according to claim 28, wherein the media element comprises at least one of a video element, an image element and a text element.
30. A call processing system for controlling an outgoing call initiated by a source device to a destination device, the system comprising:
- 25 - a processing entity operable to receive a call request message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call; to determine an audio element from a plurality of audio elements to convey to the source device; and to initiate conveyance of the audio element to the source device in response to receiving the call request message from the source device; and
- 30 - a network interface operable to cause establishment of a media connection between the source and destination devices; and
- wherein the processing entity is further operable to terminate conveyance of die audio element to the source device prior to or substantially simultaneous with

the establishment of the media connection between the source and destination devices.

- 5 31. A call processing system according to claim 30, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to receive a selection of an audio element from a user associated with the source device prior to the outgoing call.
- 10 32. A call processing system according to claim 31, wherein to receive a selection of an audio element from a user associated with the source device, the processing entity is operable to offer a plurality of potential audio elements to the user associated with the source device and to receive selection information from the user associated with the source device, the selection information comprising an indication of at least one of the plurality of potential audio  
15 elements.
- 20 33. A call processing system according to claim 31, wherein, to receive a selection of an audio element from a user associated with the source device, the processing entity is operable to receive an indication of at least one audio file.
- 25 34. A call processing system according to claim 31, wherein, to receive a selection of an audio element from a user associated with the source device, the processing entity is operable to receive an indication of at least one audio stream broadcast on a data network.
- 30 35. A call processing system according to claim 30, wherein the processing entity is operable to determine an audio element from a plurality of audio elements based at least partially upon the identifier of the source device.
36. A call processing system according to claim 35, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to determine an indication of an audio file to convey to the source device.

37. A call processing system according to claim 36, wherein the indication of an audio file comprises a location of the audio file within a database local to the call processing system; and, to initiate conveyance of the audio element to the source device, the processing entity is operable to access the audio file within the database local to the call processing system and to play the audio file to the source device over a media connection between the call processing system and the source device.
38. A call processing system according to claim 37 further comprising the database.
39. A call processing system according to claim 36, wherein the indication of an audio file comprises a location of the audio file within a database remote from the call processing system; and wherein, to initiate conveyance of the audio element to the source device, the processing entity is operable to transmit a request to the remote database to play the audio file over a media connection between the remote database and the source device.
40. A call processing system according to claim 35, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to determine an indication of an audio stream broadcast on a data network to convey to the source device.
41. A call processing system according to claim 40, wherein the indication of an audio stream comprises a location on the data network of an audio stream source that broadcasts the audio stream; and wherein, to initiate conveyance of the audio element to the source device, the processing entity is operable to transmit a request to the audio stream source to transmit the audio stream over a media connection between the audio stream source and the source device.
42. A call processing system according to claim 40, wherein the audio stream comprises at least one of a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages and a reading of information.

43. A call processing system according to claim 35, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to locate scheduling information associated with the identifier of the source device within a source of scheduling information; and wherein, to initiate conveyance  
5 of the audio element to the source device, the processing entity is operable to transmit an audio representation of the scheduling information associated with the identifier of the source device to the source device.
44. A call processing system according to claim 35, wherein the processing entity is  
10 operable to determine an audio element from a plurality of audio elements further based at least partially upon the identifier of the destination device.
45. A call processing system according to claim 44, wherein, to determine an audio  
15 element from a plurality of audio elements, the processing entity is operable to locate a message for a user of the source device associated with a user of the destination device.
46. A call processing system according to claim 45, wherein the processing entity is  
20 further operable to receive the message for the user of the source device associated with the user of the destination device from the user of the source device prior to the outgoing call.
47. A call processing system according to claim 30, wherein, to determine an audio  
25 element from a plurality of audio elements to convey to the source device, the processing entity is operable to select a subset of the plurality of audio elements based at least partially upon the identifier of the source device and to select an audio element to convey to the source device from the subset based upon a random algorithm.
- 30 48. A call processing system according to claim 30, wherein, to determine an audio element from a plurality of audio elements to convey to the source device, the processing entity is operable to select a subset of the plurality of audio elements based at least partially upon the identifier of the source device and to select an

audio element to convey to the source device from the subset based upon a predetermined order.

49. A call processing system according to claim 30, wherein, to determine an audio  
5 element from a plurality of audio elements to convey to the source device, the  
processing entity is operable to select a subset of the plurality of audio elements  
based at least partially upon the identifier of the source device and to select an  
audio element to convey to the source device from the subset based at least  
partially upon temporal information.
- 10
50. A call processing system according to claim 30, wherein the call request  
message comprises a Session Initiation Protocol (SIP) message that has been  
converted from a Signaling System 7 (SS7) message by a signaling converter  
that previously received the SS7 message from a Service Switching Point (SSP)  
15 associated with the source device.
51. A call processing system according to claim 50, wherein the SS7 message  
comprises a Transaction Capabilities Application Part (TCAP) message initiated  
by an Off Hook Delay trigger on the SSP.
- 20
52. A call processing system according to claim 30, wherein the call request  
message comprises a STP message from the source device.
53. A call processing system according to claim 30, wherein the processing entity is  
25 further operable to determine a time period to convey the audio element; and  
wherein the processing entity is operable to terminate conveyance of the audio  
element to the source device in response to the time period expiring.
54. A call processing system according to claim 30, wherein, to cause establishment  
30 of a media connection between the source and destination devices, the  
processing entity is operable to cause initiation of a media connection with the  
destination device, to detect acceptance from the destination device of the  
outgoing call and to cause establishment of the media connection between the

source and destination devices in response to the acceptance from the destination device.

55. A call processing system according to claim 54, wherein the processing entity is operable to terminate conveyance of the audio element to the source device in response to detecting the acceptance from the destination device of the outgoing call.
56. A call processing system according to claim 54, wherein the processing entity is further operable to determine a minimum time period to convey the audio element; and wherein the processing entity is operable to cause initiation of a media connection with the destination device in response to the minimum time period expiring.
57. A call processing system according to claim 56, wherein processing entity is operable to terminate conveyance of the audio element to the source device in response to detecting the acceptance from the destination device of the outgoing call.
58. A call processing system according to claim 30, wherein the processing entity is further operable to determine a media element to convey to a display within the source device and to initiate conveyance of the media element to the display within the source device in response to receiving the call request message.
59. A call processing system according to claim 58, wherein the media element comprises at least one of a video element, an image element and a text element.
60. Computer-readable media containing a program element executable by a call processing system to perform a method for controlling an outgoing call initiated by a source device to a destination device, the computer-readable media comprising:
- first program code for receiving a call request message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call;

- second program code for determining an audio element from a plurality of audio elements to convey to the source device;
  - third program code for initiating conveyance of the audio element to the source device in response to receiving the call request message from the source device;
  - 5 - fourth program code for causing establishment of a media connection between the source and destination devices; and
  - fifth program code for terminating conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.
  - 10
61. A method implemented by a call processing system for controlling an outgoing call initiated by a source device, the method comprising:
- receiving a selection of an audio element from a user of the source device;
  - 15 - receiving a call request message from the source device, the call request message comprising identifiers of the source device and a destination device for the outgoing call;
  - initiating conveyance of the audio element to the source device in response to receiving the call request message from the source device;
  - 20 - causing establishment of a media connection between the source and destination devices; and
  - terminating conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.
  - 25
62. A call processing system for controlling an outgoing call initiated by a source device, the system comprising:
- a processing entity operable to receive a selection of an audio element from a user of the source device; to receive a call request message from the source device, the call request message comprising identifiers of the source device and a destination device for the outgoing call; and to initiate conveyance of the audio element to the source device in response to receiving the call request message from the source device; and
  - 30

- a network interface operable to cause establishment of a media connection between the source and destination devices; and

wherein the processing entity is further operable to terminate conveyance of the audio element to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

5

63. A method implemented by a call processing system for controlling an outgoing call initiated by a source device to a destination device, the method comprising:

10

- receiving a call request message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call;

- determining a source of an audio stream to convey to the source device;

- initiating conveyance of the audio stream from the source of the audio stream to the source device in response to receiving the call request message from the source device;

15

- causing establishment of a media connection between the source and destination devices; and

- terminating conveyance of the audio stream to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

20

64. A method according to claim 63, wherein the determining a source of an audio stream comprises receiving a selection of an audio stream from a user associated with the source device prior to the outgoing call.

25

65. A method according to claim 64, wherein the receiving a selection of an audio stream from a user associated with the source device comprises offering a plurality of potential audio streams to the user associated with the source device and receiving selection information from the user associated with the source device, the selection information comprising an indication of at least one of the plurality of potential audio streams.

30

66. A method according to claim 64, wherein the determining a source of an audio stream further comprises determining a location within a data network in which the audio stream within the selection from the user of the source device is broadcast.
- 5
67. A method according to claim 63, wherein the determining an audio stream to convey to the source device comprises locating an audio stream source on a data network that broadcasts the audio stream; and wherein the initiating conveyance of the audio stream to the source device comprises transmitting a request to the audio stream source to transmit the audio stream over a media connection
- 10
- between the audio stream source and the source device.
68. A method according to claim 63, wherein the determining an audio stream to convey to the source device comprises selecting an audio stream from a plurality
- 15
- of audio streams based upon a random algorithm.
69. A method according to claim 63, wherein the determining an audio stream to convey to the source device comprises selecting an audio stream from a plurality
- 20
- of audio streams based upon a predetermined order.
70. A method according to claim 63, wherein the determining an audio stream to convey to the source device comprises selecting an audio stream from a plurality
- of audio streams based upon temporal information.
- 25
71. A method according to claim 63, wherein the determining an audio stream is based at least partially upon the identifier of the source device.
72. A method according to claim 71, wherein the determining an audio stream to convey to the source device comprises selecting a plurality of audio streams
- 30
- based upon the identifier of the source device and selecting an audio stream to convey to the source device from the plurality of audio streams based at least partially upon one of a random algorithm, a predetermined order and temporal information.

73. A method according to claim 71, wherein the determining an audio stream is further based at least partially upon the identifier of the destination device.
74. A method according to claim 73, wherein the determining an audio stream to convey to the source device comprises selecting a plurality of audio streams based at least partially upon the identifier of the source device and selecting an audio stream to convey to the source device from the plurality of audio streams based at least partially upon the destination identifier.
75. A method according to claim 63, wherein the audio stream comprises at least one of a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages and a leading of information.
76. A method according to claim 63, wherein the receiving a call request message from the source device comprises receiving a Session Initiation Protocol (SIP) message that has been converted from a Signaling System 7 (SS7) message by a signaling converter that previously received the SS7 message from a Service Switching Point (SSP) associated with the source device.
77. A method according to claim 76, wherein the SS7 message comprises a Transaction Capabilities Application Part (TCAP) message initiated by an Off Hook Delay trigger on the SSP.
78. A method according to claim 63, wherein the receiving a call request message from the source device comprises receiving a SIP message from the source device.
79. A method according to claim 63 further comprising determining a time period to convey the audio stream; and wherein the terminating conveyance of the audio stream to the source device is in response to the time period expiring.
80. A method according to claim 63, wherein the causing establishment of a media connection between the source and destination devices comprises causing

initiation of a media connection with the destination device, detecting acceptance from the destination device of the outgoing call and causing establishment of the media connection between the source and destination devices in response to the acceptance from the destination device.

5

81. A method according to claim 80, wherein the terminating conveyance of the audio stream to the source device is in response to detecting the acceptance from the destination device of the outgoing call.

10 82. A method according to claim 80 further comprising determining a minimum time period to convey the audio stream; and wherein the causing initiation of a media connection with the destination device is in response to the minimum time period expiring.

15 83. A method according to claim 82, wherein the terminating conveyance of the audio stream to the source device is in response to detecting the acceptance from the destination device of the outgoing call.

20 84. A method according to claim 63 further comprising determining a media element to convey to a display within the source device; and initiating conveyance of the media element to the display within the source device in response to receiving the call request message.

25 85. A method according to claim 84, wherein the media element comprises at least one of a video element, an image element and a text element.

86. A call processing system for controlling an outgoing call initiated by a source device to a destination device, the system comprising:  
- a processing entity operable to receive a call request message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call; to determine a source of an audio stream to convey to the source device; and to initiate conveyance of the audio stream from the source of the audio stream to the source device in response to receiving the call request message from the source device; and

30

- a network interface operable to cause establishment of a media connection between the source and destination devices; and wherein the processing entity is further operable to terminate conveyance of the audio stream to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.
- 5
87. A call processing system according to claim 86, wherein, to determine a source of an audio stream, the processing entity is operable to receive a selection of an audio stream from a user associated with the source device prior to the outgoing call.
- 10
88. A call processing system according to claim 87, wherein, to receive a selection of an audio stream from a user associated with the source device, the processing entity is operable to offer a plurality of potential audio streams to the user associated with the source device and to receive selection information from the user associated with the source device, the selection information comprising an indication of at least one of the plurality of potential audio streams.
- 15
89. A call processing system according to claim 87, wherein, to determine a source of an audio stream, the processing entity is further operable to determine a location within a data network in which the audio stream within the selection from the user of the source device is broadcast.
- 20
90. A call processing system according to claim 86, wherein, to determine an audio stream to convey to the source device, the processing entity is operable to locate an audio stream source on a data network that broadcasts the audio stream; and wherein, to initiate conveyance of the audio stream to the source device, the processing entity is operable to transmit a request to the audio stream source to transmit the audio stream over a media connection between the audio stream source and the source device.
- 25
- 30
91. A call processing system according to claim 86, wherein, to determine an audio stream to convey to the source device, the processing entity is operable to select

an audio stream from a plurality of audio streams based upon a random algorithm.

- 5 92. A call processing system according to claim 86, wherein, to determine an audio stream to convey to the source device, the processing entity is operable to select an audio stream from a plurality of audio streams based upon a predetermined order.
- 10 93. A call processing system according to claim 86, wherein, to determine an audio stream to convey to the source device, the processing entity is operable to select an audio stream from a plurality of audio streams based upon temporal information.
- 15 94. A call processing system according to claim 86, wherein the processing entity is operable to determine an audio stream based at least partially upon the identifier of the source device.
- 20 95. A call processing system according to claim 94, wherein, to determine an audio stream to convey to the source device, the processing entity is operable to select a plurality of audio streams based upon the identifier of the source device and to select an audio stream to convey to the source device from the plurality of audio streams based at least partially upon one of a random algorithm, a predetermined order and temporal information.
- 25 96. A call processing system according to claim 94, wherein the processing entity is operable to determine an audio stream further based at least partially upon the identifier of the destination device.
- 30 97. A call processing system according to claim 96, wherein, to determine an audio stream to convey to the source device, the processing entity is operable to select a plurality of audio streams based at least partially upon the identifier of the source device and to select an audio stream to convey to the source device from the plurality of audio streams based at least partially upon the destination identifier.

- 5 98. A call processing system according to claim 86, wherein the audio stream comprises at least one of a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages and a reading of information.
- 10 99. A call processing system according to claim 86, wherein the call request message comprises a Session Initiation Protocol (SIP) message that has been converted from a Signaling System 7 (SS7) message by a signaling converter that previously received the SS7 message from a Service Switching Point (SSP) associated with the source device.
- 15 100. A call processing system according to claim 99, wherein the SS7 message comprises a Transaction Capabilities Application Part (TCAP) message initiated by an Off Hook Delay trigger on the SSP.
101. A call processing system according to claim 86, wherein the call request message comprises a SIP message from the source device.
- 20 102. A call processing system according to claim 86, wherein the processing entity is further operable to determine a time period to convey the audio stream; and wherein the processing entity is operable to terminate conveyance of the audio stream to the source device in response to the time period expiring.
- 25 103. A call processing system according to claim 86, wherein, to cause establishment of a media connection between the source and destination devices, the processing entity is operable to cause initiation of a media connection with the destination device, to detect acceptance from the destination device of the outgoing call and to cause establishment of the media connection between the source and destination devices in response to the acceptance from the destination device.
- 30 104. A call processing system according to claim 103, wherein the processing entity is operable to terminate conveyance of the audio stream to the source device in

response to detecting the acceptance from the destination device of the outgoing call.

- 5 105. A call processing system according to claim 103, wherein the processing entity is further operable to determine a minimum time period to convey the audio stream; and wherein the processing entity is operable to cause initiation of a media connection with the destination device in response to the minimum time period expiring.
- 10 106. A call processing system according to claim 105, wherein processing entity is operable to terminate conveyance of the audio stream to the source device in response to detecting the acceptance from the destination device of the outgoing call.
- 15 107. A call processing system according to claim 86, wherein the processing entity is further operable to determine a media element to convey to a display within the source device and to initiate conveyance of the media element to the display within the source device in response to receiving the call request message.
- 20 108. A call processing system according to claim 107, wherein the media element comprises at least one of a video element, an image element and a text element.
- 25 109. Computer-readable media containing a program element executable by a call processing system to perform a method for controlling an outgoing call initiated by a source device to a destination device, the computer-readable media comprising:
- first program code for receiving a call request message from the source device, the call request message comprising identifiers of the source and destination devices for the outgoing call;
  - 30 - second program code for determining a source of an audio stream to convey to the source device;
  - third program code for initiating conveyance of the audio stream to the source device in response to receiving the call request message from the source device;

- fourth program code for causing establishment of a media connection between the source and destination devices; and
- fifth program code for terminating conveyance of the audio stream to the source device prior to or substantially simultaneous with the establishment of the media connection between the source and destination devices.

5

110. A method implemented by a communication device comprising:

- determining an audio element from a plurality of audio elements to convey to a user of the communication device during establishment of an outgoing call;
- initiating conveyance of the audio element to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the communication device; and
- terminating conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the destination device.

10

15

111. A method according to claim 110, wherein the determining an audio element from a plurality of audio elements comprises receiving a selection of an audio element from a user associated with the communication device prior to the outgoing call.

20

112. A method according to claim 111, wherein the receiving a selection of an audio element from a user associated with the communication device comprises offering a plurality of potential audio elements to the user associated with the communication device and receiving selection information from the user associated with the communication device, the selection information comprising an indication of at least one of the plurality of potential audio elements.

25

113. A method according to claim 111, wherein the receiving a selection of an audio element from a user associated with the communication device comprises receiving an indication of an audio file.

30

114. A method according to claim 113, wherein the receiving an indication of an audio file comprises accessing an application on the communication device in

which a user associated with the communication device has selected at least one audio file.

- 5
15
10
15
20
25
30

115. A method according to claim 114, wherein the application on the communication device comprises at least one playlist of audio files and the receiving an indication of an audio file further comprises receiving an indication of one or more audio files within the playlist.

116. A method according to claim 111, wherein the receiving a selection of an audio element from a user associated with the communication device comprises receiving an indication of at least one audio stream broadcast on a data network.

117. A method according to claim 110, wherein the determining an audio element from a plurality of audio elements comprises determining an indication of an audio file to convey to the user of the communication device during establishment of an outgoing call.

118. A method according to claim 117, wherein the indication of an audio file comprises a location of the audio file within a database local to the communication device; and wherein the initiating conveyance of the audio element to the user of the communication device comprises accessing the audio file within the database local to the communication device and playing the audio file to the user of the communication device.

119. A method according to claim 117, wherein the indication of an audio file comprises a location of the audio file within a database remote from the communication device; and wherein the initiating conveyance of the audio element to the user of the communication device comprises transmitting a request to the remote database to play the audio file over a media connection between the remote database and the communication device.

120. A method according to claim 110, wherein the determining an audio element from a plurality of audio elements comprises determining an indication of an

audio stream broadcast on a data network to convey to the user of the communication device during establishment of an outgoing call.

5 121. A method according to claim 120, wherein the indication of an audio stream comprises a location on the data network of an audio stream source that broadcasts the audio stream; and wherein the initiating conveyance of the audio element to the user of the communication device comprises transmitting a request to the audio stream source to transmit the audio stream over a media connection between the audio stream source and the communication device.

10

122. A method according to claim 120, wherein the audio stream comprises at least one of a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages and a reading of information.

15

20 123. A method according to claim 110, wherein the determining an audio element from a plurality of audio elements comprises accessing scheduling information associated with the user of the communication device within a source of scheduling information; and wherein the initiating conveyance of the audio element to the user of the communication device comprises transmitting an audio representation of the scheduling information associated with the user of the communication device to the user of the communication device.

25 124. A method according to claim 123, wherein the source of scheduling information is a database local to the communication device which is associated with an application in which the user associated with the communication device has stored scheduling information; and wherein the accessing scheduling information associated with the user of the communication device comprises accessing the application in which the user associated with the communication device has stored scheduling information.

30

125. A method according to claim 123, wherein the source of scheduling information is a database remote to the communication device in which a user associated with the communication device has stored scheduling information; and wherein

the accessing scheduling information associated with the user of the communication device comprises accessing the database via a data network.

- 5 126. A method according to claim 110 further comprising receiving an identifier of the destination device; and wherein the determining an audio element from a plurality of audio elements is based at least partially upon the identifier of the destination device.
- 10 127. A method according to claim 126, wherein the determining an audio element from a plurality of audio elements comprises locating a message for the user of the communication device associated with a user of the destination device.
- 15 128. A method according to claim 127 further comprising receiving the message for the user of the communication device associated with the user of the destination device from the user of the communication device prior to the outgoing call.
- 20 129. A method according to claim 110, wherein the determining an audio element from a plurality of audio elements to convey to the user of the communication device comprises selecting an audio element from the plurality of audio elements based upon a random algorithm.
- 25 130. A method according to claim 110, wherein the determining an audio element from a plurality of audio elements to convey to the user of the communication device comprises selecting an audio element from the plurality of audio elements based upon a predetermined order.
- 30 131. A method according to claim 110, wherein the determining an audio element from a plurality of audio elements to convey to the user of the communication device comprises selecting an audio element from the plurality of audio elements based at least partially upon temporal information.
132. A method according to claim 110, wherein detecting the initiation of the call to the destination device by the user of the communication device comprises detecting a ring tone being received from a network component; wherein the

initiating conveyance of the audio element to the user of the communication device replaces a traditional conveyance of the ring tone to the user of the communication device.

- 5 133. A method according to claim 110 further comprising causing establishment of a media connection between the communication device and the destination device in response to detecting the initiation of the call to the destination device by the user of the communication device.
- 10 134. A method according to claim 133, wherein the causing establishment of a media connection between the communication device and the destination device comprises transmitting Dual Tone Multi-Frequency (DTMF) tones to a Service Switching Point (SSP).
- 15 135. A method according to claim 133, wherein the causing establishment of a media connection between the communication device and the destination device comprises transmitting a call request message to a call processing system via a data network.
- 20 136. A method according to claim 133, wherein the causing establishment of a media connection between the communication device and the destination device comprises causing initiation of a media connection with the destination device and detecting acceptance from the destination device of the outgoing call.
- 25 137. A method according to claim 136, wherein the terminating conveyance of the audio element to the user of the communication device is in response to detecting the acceptance from the destination device of the outgoing call.
- 30 138. A method according to claim 136 further comprising determining a minimum time period to convey the audio element; and wherein the causing initiation of a media connection with the destination device is in response to the minimum time period expiring.

139. A method according to claim 138, wherein the terminating conveyance of the audio element to the user of the communication device is in response to detecting the acceptance from the destination device of the outgoing call.
- 5 140. A method according to claim 110 further comprising determining a time period to convey the audio element; and wherein the terminating conveyance of the audio element to the user of the communication device is in response to the time period expiring.
- 10 141. A method according to claim 110 further comprising determining a media element to convey to a display within the communication device; and initiating conveyance of the media element to the display within the communication device in response to detecting the initiation of the call to the destination device by the user of the communication device.
- 15 142. A method according to claim 141, wherein the media element comprises at least one of a video element, an image element and a text element.
143. A communication device comprising:
- 20 - a network interface operable to be coupled to a network over which the communication device may initiate a call to a destination device; and
- a processing entity operable to determine an audio element from a plurality of audio elements to convey to a user of the communication device during establishment of an outgoing call; to initiate conveyance of the audio element
- 25 to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the communication device; and to terminate conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the
- 30 destination device.
144. A communication device according to claim 143, wherein, to determine an audio element from a plurality of audio elements, the processing entity is

operable to receive a selection of an audio element from a user associated with the communication device prior to the outgoing call.

5 145. A communication device according to claim 144, wherein, to receive a selection of an audio element from a user associated with the communication device, the processing entity is operable to offer a plurality of potential audio elements to the user associated with the communication device and to receive selection information from the user associated with the communication device, the selection information comprising an indication of at least one of the plurality of  
10 potential audio elements.

146. A communication device according to claim 144, wherein, to receive a selection of an audio element from a user associated with the communication device, the processing entity is operable to receive an indication of an audio file.  
15

147. A communication device according to claim 146, wherein, to receive an indication of an audio file, the processing entity is operable to access an application on the communication device in which a user associated with the communication device has selected at least one audio file.  
20

148. A communication device according to claim 147, wherein the application on the communication device comprises at least one playlist of audio files and, to receive an indication of an audio file, the processing entity is further operable to receive an indication of one or more audio files within the playlist.  
25

149. A communication device according to claim 144, wherein, to receive a selection of an audio element from a user associated with the communication device, the processing entity is operable to receive an indication of at least one audio stream broadcast on a data network.  
30

150. A communication device according to claim 143, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to determine an indication of an audio file to convey to the user of the communication device during establishment of an outgoing call.

151. A communication device according to claim 150 further comprising a database; and wherein the indication of an audio file comprises a location of the audio file within the database; and wherein, to initiate conveyance of the audio element to the user of the communication device, the processing entity is operable to access the audio file within the database and to play the audio file to the user of the communication device.
152. A communication device according to claim 150, wherein the indication of an audio file comprises a location of the audio file within a database remote from the communication device; and wherein, to initiate conveyance of the audio element to the user of the communication device, the processing entity is operable to transmit a request to the remote database to play the audio file over a media connection between the remote database and the communication device.
153. A communication device according to claim 143, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to determine an indication of an audio stream broadcast on a data network to convey to the user of the communication device during establishment of an outgoing call.
154. A communication device according to claim 153, wherein the indication of an audio stream comprises a location on the data network of an audio stream source that broadcasts the audio stream; and wherein, to initiate conveyance of the audio element to the user of the communication device, the processing entity is operable to transmit a request to the audio stream source to transmit the audio stream over a media connection between the audio stream source and the communication device.
155. A communication device according to claim 153, wherein the audio stream comprises at least one of a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages and a reading of information.

156. A communication device according to claim 143, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to access scheduling information associated with the user of the communication device within a source of scheduling information; and wherein,  
5 to initiate conveyance of the audio element to the user of the communication device, the processing entity is operable to transmit an audio representation of the scheduling information associated with the user of the communication device to the user of the communication device.
- 10 157. A communication device according to claim 156 further comprising a database which is the source of scheduling information, the database being associated with an application in which the user associated with the communication device has stored scheduling information; wherein, to access scheduling information  
15 associated with the user of the communication device, the processing entity is operable to access the application in which the user associated with the communication device has stored scheduling information.
158. A communication device according to claim 156, wherein the source of scheduling information is a database remote to the communication device in  
20 which a user associated with the communication device has stored scheduling information; and wherein, to access scheduling information associated with the user of the communication device, the processing entity is operable to access the database via a data network.
- 25 159. A communication device according to claim 143, wherein the processing entity is further operable to receive an identifier of the destination device; and wherein the processing entity is operable to determine an audio element from a plurality of audio elements based at least partially upon the identifier of the destination device.  
30
160. A communication device according to claim 159, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to locate a message for the user of the communication device associated with a user of the destination device.

- 5  
10  
15  
20  
25  
30
- 161.** A communication device according to claim **160**, wherein the processing entity is further operable to receive the message for the user of the communication device associated with the user of the destination device from the user of the communication device prior to the outgoing call.
- 162.** A communication device according to claim **143**, wherein, to determine an audio element from a plurality of audio elements to convey to the user of the communication device, the processing entity is operable to select an audio element from the plurality of audio elements based upon a random algorithm.
- 163.** A communication device according to claim **143**, wherein, to determine an audio element from a plurality of audio elements to convey to the user of the communication device, the processing entity is operable to select an audio element from the plurality of audio elements based upon a predetermined order.
- 164.** A communication device according to claim **143**, wherein, to determine an audio element from a plurality of audio elements to convey to the user of the communication device, the processing entity is operable to select an audio element from the plurality of audio elements based at least partially upon temporal information.
- 165.** A communication device according to claim **143**, wherein detecting the initiation of the call to the destination device by the user of the communication device comprises detecting a ring tone being received from a network component; wherein the processing entity is operable to replace a traditional conveyance of the ring tone to the user of the communication device with the conveyance of the audio element to the user of the communication device.
- 166.** A communication device according to claim **143**, wherein the network interface is operable to cause establishment of a media connection between the communication device and the destination device in response to detecting the

initiation of the call to the destination device by the user of the communication device.

- 5 167. A communication device according to claim 166, wherein, to cause establishment of a media connection between the communication device and the destination device, the network interface is operable to transmit Dual Tone Multi-Frequency (DTMF) tones to a Service Switching Point (SSP).
- 10 168. A communication device according to claim 166, wherein, to cause establishment of a media connection between the communication device and the destination device, the network interface is operable to transmit a call request message to a call processing system via a data network.
- 15 169. A communication device according to claim 166, wherein, to cause establishment of a media connection between the communication device and the destination device, the processing entity is operable to cause initiation of a media connection with the destination device and to detect acceptance from the destination device of the outgoing call.
- 20 170. A communication device according to claim 169, wherein the processing entity is operable to terminate conveyance of the audio element to the user of the communication device in response to detecting the acceptance from the destination device of the outgoing call.
- 25 171. A communication device according to claim 169, wherein the processing entity is further operable to determine a minimum time period to convey the audio element; and wherein the processing entity is operable to cause initiation of a media connection with the destination device in response to the minimum time period expiring.
- 30 172. A communication device according to claim 171, wherein the processing entity is operable to terminate conveyance of the audio element to the user of the communication device in response to detecting the acceptance from the destination device of the outgoing call.

173. A communication device according to claim 143, wherein the processing entity is further operable to determine a time period to convey the audio element; and wherein the processing entity is operable to terminate conveyance of the audio element to the user of the communication device in response to the time period expiring.
- 5
174. A communication device according to claim 143, wherein the network over which the communication device may initiate a call to a destination device comprises an Internet Protocol (IP) network.
- 10
175. A communication device according to claim 143, wherein the network over which the communication device may initiate a call to a destination device comprises the Public Switched Telephone Network (PSTN).
- 15
176. A communication device according to claim 143, wherein the network over which the communication device may initiate a call to a destination device comprises the Public Switched Telephone Network (PSTN) and the network interface is further operable to communicate over a data network.
- 20
177. A communication device according to claim 176, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to determine a location of the audio file within a database within the data network; and wherein, to initiate conveyance of the audio element to the user of the communication device, the processing entity is operable to transmit a request to the database to play the audio file over the data network to the communication device.
- 25
178. A communication device according to claim 176, wherein, to determine an audio element from a plurality of audio elements, the processing entity is operable to determine a location on the data network of an audio stream source that broadcasts an audio stream; and wherein, to initiate conveyance of the audio element to the user of the communication device, the processing entity is
- 30

operable to transmit a request to the audio stream source to transmit the audio stream over the data network to the communication device.

179. A communication device according to claim 143 further comprising a display;  
5 and wherein the processing entity is further operable to determine a media element to convey to the display and to initiate conveyance of the media element to the display in response to detecting the initiation of the call to the destination device by the user of the communication device.
- 10 180. A communication device according to claim 179, wherein the media element comprises at least one of a video element, an image element and a text element.
181. Computer-readable media containing a program element executable by a communication device, the computer-readable media comprising:  
15 - first program code for determining an audio element from a plurality of audio elements to convey to a user of the communication device during establishment of an outgoing call;  
- second program code for initiating conveyance of the audio element to the user of the communication device in response to detecting an initiation of a  
20 call to a destination device by the user of the communication device; and  
- third program code for terminating conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the destination device.  
25
182. A method implemented by a communication device, the method comprising:  
- receiving a selection of an audio element from a user of the communication device;  
- initiating conveyance of the audio element to the user of the communication  
30 device in response to detecting an initiation of a call to a destination device by the user of the communication device; and  
- terminating conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the destination device.

183. A communication device comprising:
- a network interface operable to be coupled to a network over which the communication device may initiate a call to a destination device;
  - 5 - a user interface operable to receive a selection of an audio element from a user of the communication device;
  - a processing entity operable to initiate conveyance of the audio element to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the communication device; and
  - 10 terminate conveyance of the audio element to the user of the communication device prior to or substantially simultaneous with establishment of the call between the communication device and the destination device.
184. A method implemented by a communication device comprising:
- 15 - determining an audio stream to convey to a user of the communication device during establishment of an outgoing call;
  - initiating conveyance of the audio stream from an audio stream source that broadcasts the audio stream to the user of the communication device in response to detecting an initiation of a call to a destination device by the user
  - 20 of the communication device; and
  - terminating conveyance of the audio stream to the user of the communication device prior to or substantially simultaneous with the establishment of the call between the communication device and the destination device.
- 25 185. A method according to claim 184, wherein the determining an audio stream comprises receiving a selection of an audio stream from a user associated with the communication device prior to the outgoing call.
- 30 186. A method according to claim 185, wherein the receiving a selection of an audio stream from a user associated with the communication device comprises offering a plurality of potential audio streams to the user associated with the communication device and receiving selection information from the user

associated with the communication device, the selection information comprising an indication of at least one of the plurality of potential audio streams.

- 5 187. A method according to claim 184, wherein the determining an audio stream comprises determining an indication of an audio stream broadcast on a data network to convey to the user of the communication device during establishment of an outgoing call.
- 10 188. A method according to claim 187, wherein the indication of an audio stream comprises a location on the data network of the audio stream source; and wherein the initiating conveyance of the audio stream to the user of the communication device comprises transmitting a request to the audio stream source to transmit the audio stream over a media connection between the audio stream source and the communication device.
- 15 189. A method according to claim 184, wherein the audio stream comprises at least one of a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages and a reading of information.
- 20 190. A method according to claim 184 further comprising receiving an identifier of the destination device; and wherein the determining an audio stream is based at least partially upon the identifier of the destination device.
- 25 191. A method according to claim 184, wherein the determining an audio stream to convey to the user of the communication device comprises selecting an audio stream from a plurality of audio streams based upon a random algorithm.
- 30 192. A method according to claim 184, wherein the determining an audio stream to convey to the user of the communication device comprises selecting an audio stream from a plurality of audio elements based upon a predetermined order.
193. A method according to claim 184, wherein the determining an audio stream to convey to the user of the communication device comprises selecting an audio

element from a plurality of audio elements based at least partially upon temporal information.

5 194. A method according to claim 184, wherein detecting the initiation of the call to the destination device by the user of the communication device comprises detecting a ring tone being received from a network component; wherein the initiating conveyance of the audio stream to the user of the communication device replaces a traditional conveyance of the ring tone to the user of the communication device.

10

195. A method according to claim 184 further comprising causing establishment of a media connection between the communication device and the destination device in response to detecting the initiation of the call to the destination device by the user of the communication device.

15

196. A method according to claim 195, wherein the causing establishment of a media connection between the communication device and the destination device comprises transmitting Dual Tone Multi-Frequency (DTMF) tones to a Service Switching Point (SSP).

20

197. A method according to claim 195, wherein the causing establishment of a media connection between the communication device and the destination device comprises transmitting a call request message to a call processing system via a data network.

25

198. A method according to claim 195, wherein the causing establishment of a media connection between the communication device and the destination device comprises causing initiation of a media connection with the destination device and detecting acceptance from the destination device of the outgoing call.

30

199. A method according to claim 198, wherein the terminating conveyance of the audio stream to the user of the communication device is in response to detecting the acceptance from the destination device of the outgoing call.

200. A method according to claim 198 further comprising determining a minimum time period to convey the audio stream; and wherein the causing initiation of a media connection with the destination device is in response to the minimum time period expiring.

5

201. A method according to claim 200, wherein the terminating conveyance of the audio stream to the user of the communication device is in response to detecting the acceptance from the destination device of the outgoing call.

10 202. A method according to claim 184 further comprising determining a time period to convey the audio stream; and wherein the terminating conveyance of the audio stream to the user of the communication device is in response to the time period expiring.

15 203. A method according to claim 184 further comprising determining a media element to convey to a display within the communication device; and initiating conveyance of the media element to the display within the communication device in response to detecting the initiation of the call to the destination device by the user of the communication device.

20

204. A method according to claim 203, wherein the media element comprises at least one of a video element, an image element and a text element.

205. A communication device comprising:

- 25 - a network interface operable to be coupled to a network over which the communication device may initiate a call to a destination device and the communication device may connect to an audio stream source;
- a processing entity operable to determine an audio stream to convey to a user of the communication device during establishment of an outgoing call; to
- 30 initiate conveyance of the audio stream from an audio stream source that broadcasts the audio stream to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the communication device; and to terminate conveyance of the audio stream to the user of the communication device prior to or substantially simultaneous

with the establishment of the call between the communication device and the destination device.

5 206. A communication device according to claim 205, wherein, to determine an audio stream, the processing entity is operable to receive a selection of an audio stream from a user associated with the communication device prior to the outgoing call.

10 207. A communication device according to claim 206, wherein, to receive a selection of an audio stream from a user associated with the communication device, the processing entity is operable to offer a plurality of potential audio streams to the user associated with the communication device and to receive selection information from the user associated with the communication device, the selection information comprising an indication of at least one of the plurality of  
15 potential audio streams.

20 208. A communication device according to claim 205, wherein, to determine an audio stream, the processing entity is operable to determine an indication of an audio stream broadcast on a data network to convey to the user of the communication device during establishment of an outgoing call.

25 209. A communication device according to claim 208, wherein the indication of an audio stream comprises a location on the data network of the audio stream source; and wherein, to initiate conveyance of the audio element to the user of the communication device, the processing entity is operable to transmit a request to the audio stream source to transmit the audio stream over a media connection between the audio stream source and the communication device.

30 210. A communication device according to claim 205, wherein the audio stream comprises at least one of a radio broadcast, an audio portion of a television broadcast, a playlist of songs, a service announcement broadcast, a set of one or more advertisement messages and a reading of information.

2 11. A communication device according to claim 205, wherein the processing entity  
is further operable to receive an identifier of the destination device; and wherein  
the processing entity is operable to determine an audio stream based at least  
partially upon the identifier of the destination device.

5

212. A communication device according to claim 205, wherein, to determine an  
audio stream to convey to the user of the communication device, the processing  
entity is operable to select an audio stream from a plurality of audio stream  
based upon a random algorithm.

10

213. A communication device according to claim 205, wherein, to determine an  
audio stream to convey to the user of the communication device, the processing  
entity is operable to select an audio stream from a plurality of audio streams  
based upon a predetermined order.

15

214. A communication device according to claim 205, wherein, to determine an  
audio stream to convey to the user of the communication device, the processing  
entity is operable to select an audio stream from a plurality of audio streams  
based at least partially upon temporal information.

20

215. A communication device according to claim 205, wherein detecting the  
initiation of the call to the destination device by the user of the communication  
device comprises detecting a ring tone being received from a network  
component; wherein the processing entity is operable to replace a traditional  
conveyance of the ring tone to the user of the communication device with the  
conveyance of the audio stream to the user of the communication device.

25

216. A communication device according to claim 205, wherein the network interface  
is operable to cause establishment of a media connection between the  
communication device and the destination device in response to detecting the  
initiation of the call to the destination device by the user of the communication  
device.

30

217. A communication device according to claim 216, wherein, to cause establishment of a media connection between the communication device and the destination device, the network interface is operable to transmit Dual Tone Multi-Frequency (DTMF) tones to a Service Switching Point (SSP).
- 5
218. A communication device according to claim 217, wherein the network interface comprises a first network interface operable to be coupled to a Public Switched Telephone Network (PSTN) and a second network interface operable to be coupled to an Internet Protocol (IP) network, the first network interface being operable to cause the establishment of the media connection between the communication device and the destination device and the second network interface being operable to cause establishment of a media connection between the audio stream source and the communication device.
- 10
219. A communication device according to claim 216, wherein, to cause establishment of a media connection between the communication device and the destination device, the network interface is operable to transmit a call request message to a call processing system via a data network.
- 15
220. A communication device according to claim 216, wherein, to cause establishment of a media connection between the communication device and the destination device, the processing entity is operable to cause initiation of a media connection with the destination device and to detect acceptance from the destination device of the outgoing call.
- 20
221. A communication device according to claim 220, wherein the processing entity is operable to terminate conveyance of the audio stream to the user of the communication device in response to detecting the acceptance from the destination device of the outgoing call.
- 25
222. A communication device according to claim 220, wherein the processing entity is further operable to determine a minimum time period to convey the audio stream; and wherein the processing entity is operable to cause initiation of a
- 30

media connection with the destination device in response to the minimum time period expiring.

223. A communication device according to claim 222, wherein the processing entity  
5 is operable to terminate conveyance of the audio stream to the user of the communication device in response to detecting the acceptance from the destination device of the outgoing call.

224. A communication device according to claim 205, wherein the processing entity  
10 is further operable to determine a time period to convey the audio stream; and wherein the processing entity is operable to terminate conveyance of the audio stream to the user of the communication device in response to the time period expiring.

15 225. A communication device according to claim 205, wherein the network over which the communication device may initiate a call to a destination device comprises an Internet Protocol (IP) network.

226. A communication device according to claim 205, wherein the network over  
20 which the communication device may initiate a call to a destination device comprises the Public Switched Telephone Network (PSTN).

227. A communication device according to claim 205, wherein the network over  
25 which the communication device may initiate a call to a destination device comprises the Public Switched Telephone Network (PSTN) and the network over which the communication device may connect an audio stream source comprises an Internet Protocol (IP) network; and wherein the network interface comprises a first network interface operable to be coupled to the PSTN and a second network interface operable to be coupled to an IP network.

30 228. A communication device according to claim 205 further comprising a display; and wherein the processing entity is further operable to determine a media element to convey to the display and to initiate conveyance of the media element

to the display in response to detecting the initiation of the call to the destination device by the user of the communication device.

229. A communication device according to claim 228, wherein the media element  
5 comprises at least one of a video element, an image element and a text element.

230. Computer-readable media containing a program element executable by a communication device, the computer-readable media comprising:  
- first program code for determining an audio stream to convey to a user of the  
10 communication device during establishment of an outgoing call;  
- second program code for initiating conveyance of the audio stream from an audio stream source that broadcasts the audio stream to the user of the communication device in response to detecting an initiation of a call to a destination device by the user of the communication device; and  
15 - third program code for terminating conveyance of the audio stream to the user of the communication device prior to or substantially simultaneous with the establishment of the call between the communication device and the destination device.



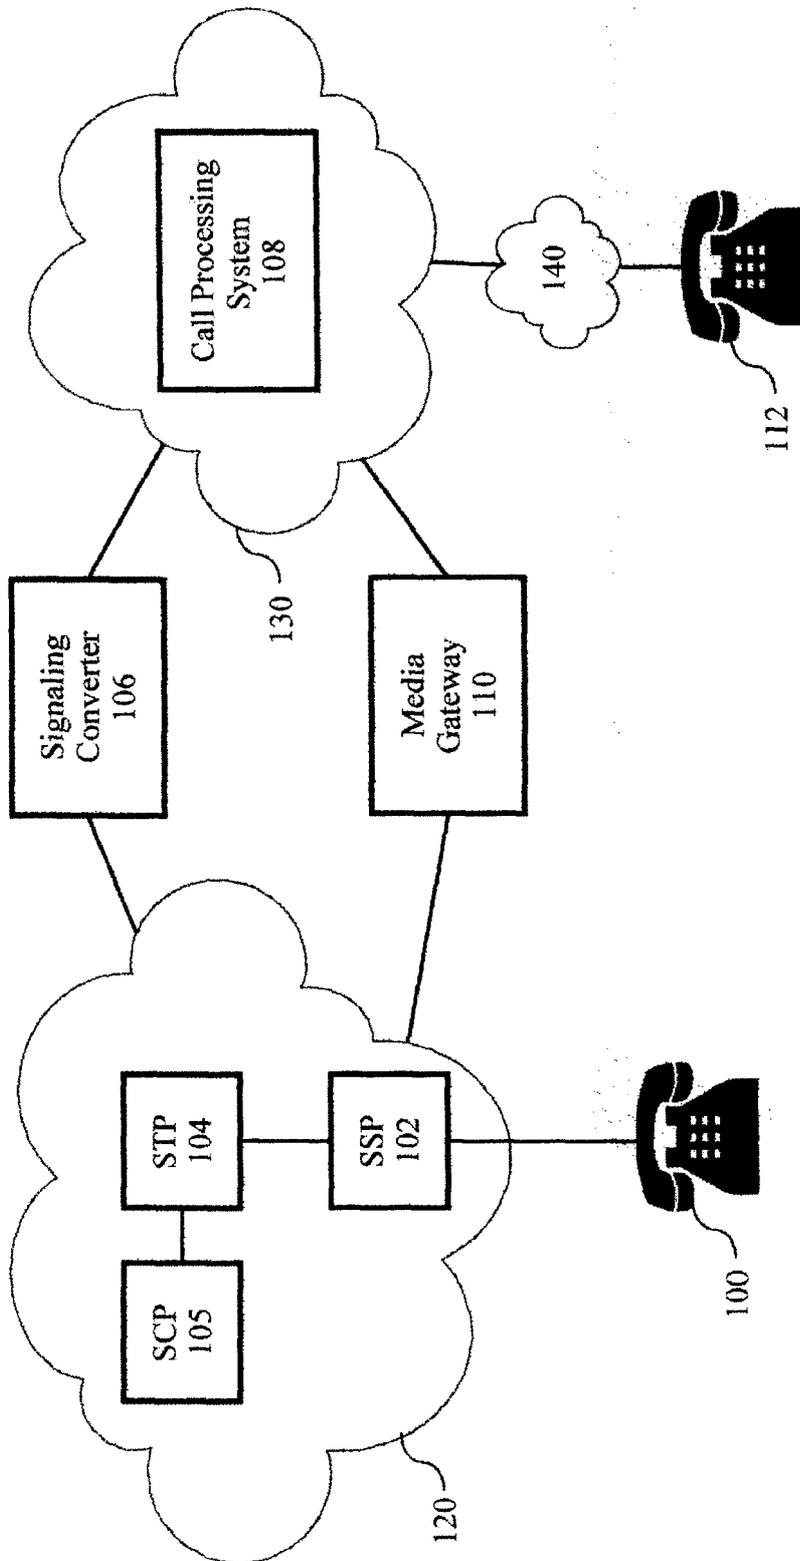


FIGURE 1

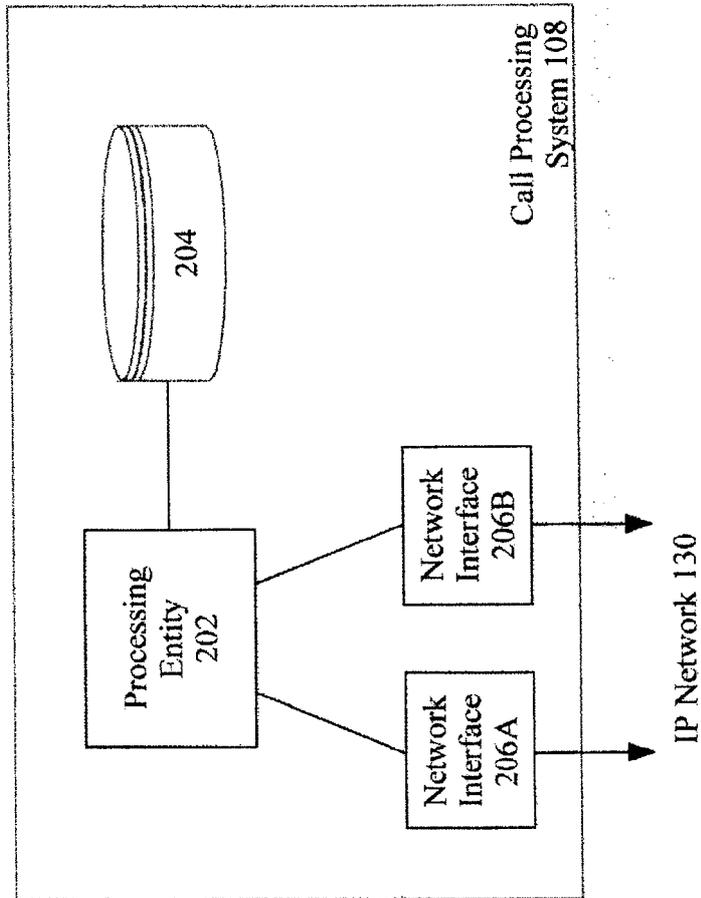


**FIGURE 2**

FIGURE 3

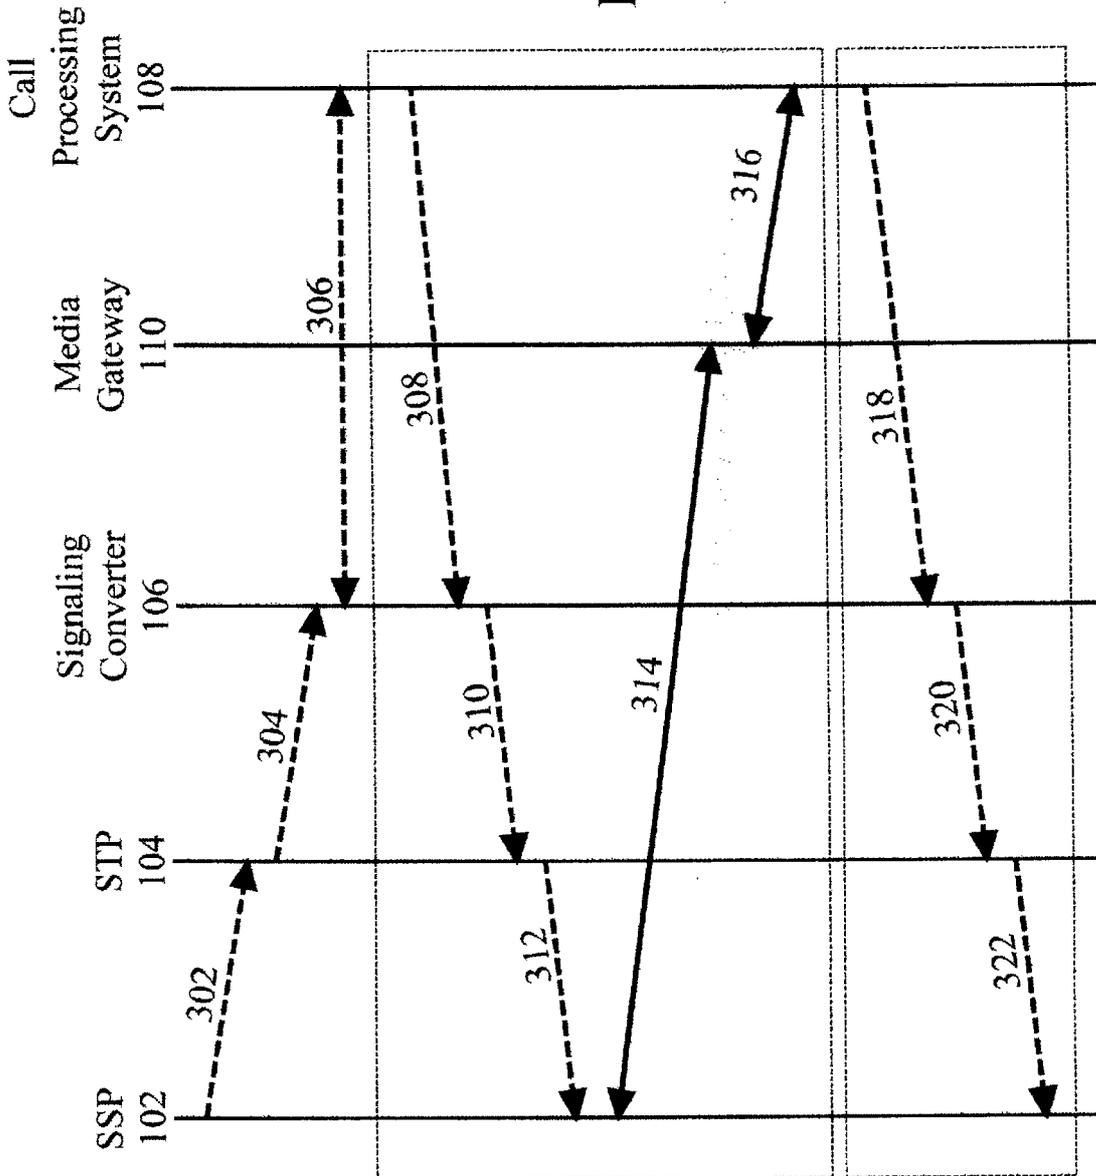

4/15

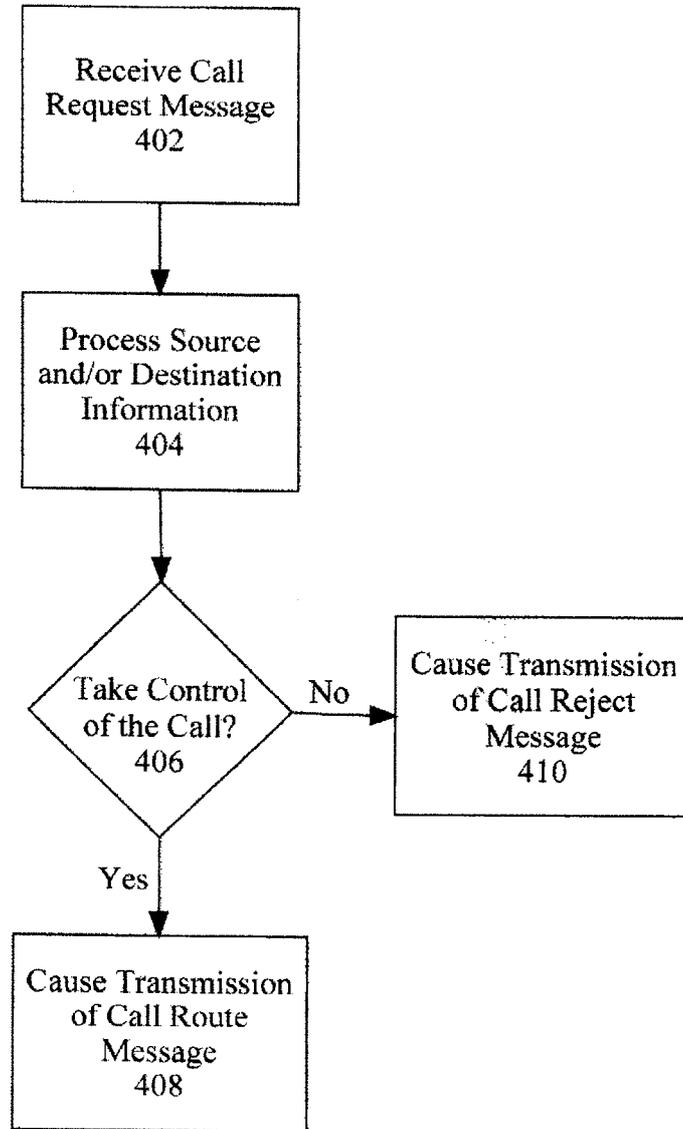

**FIGURE 4**

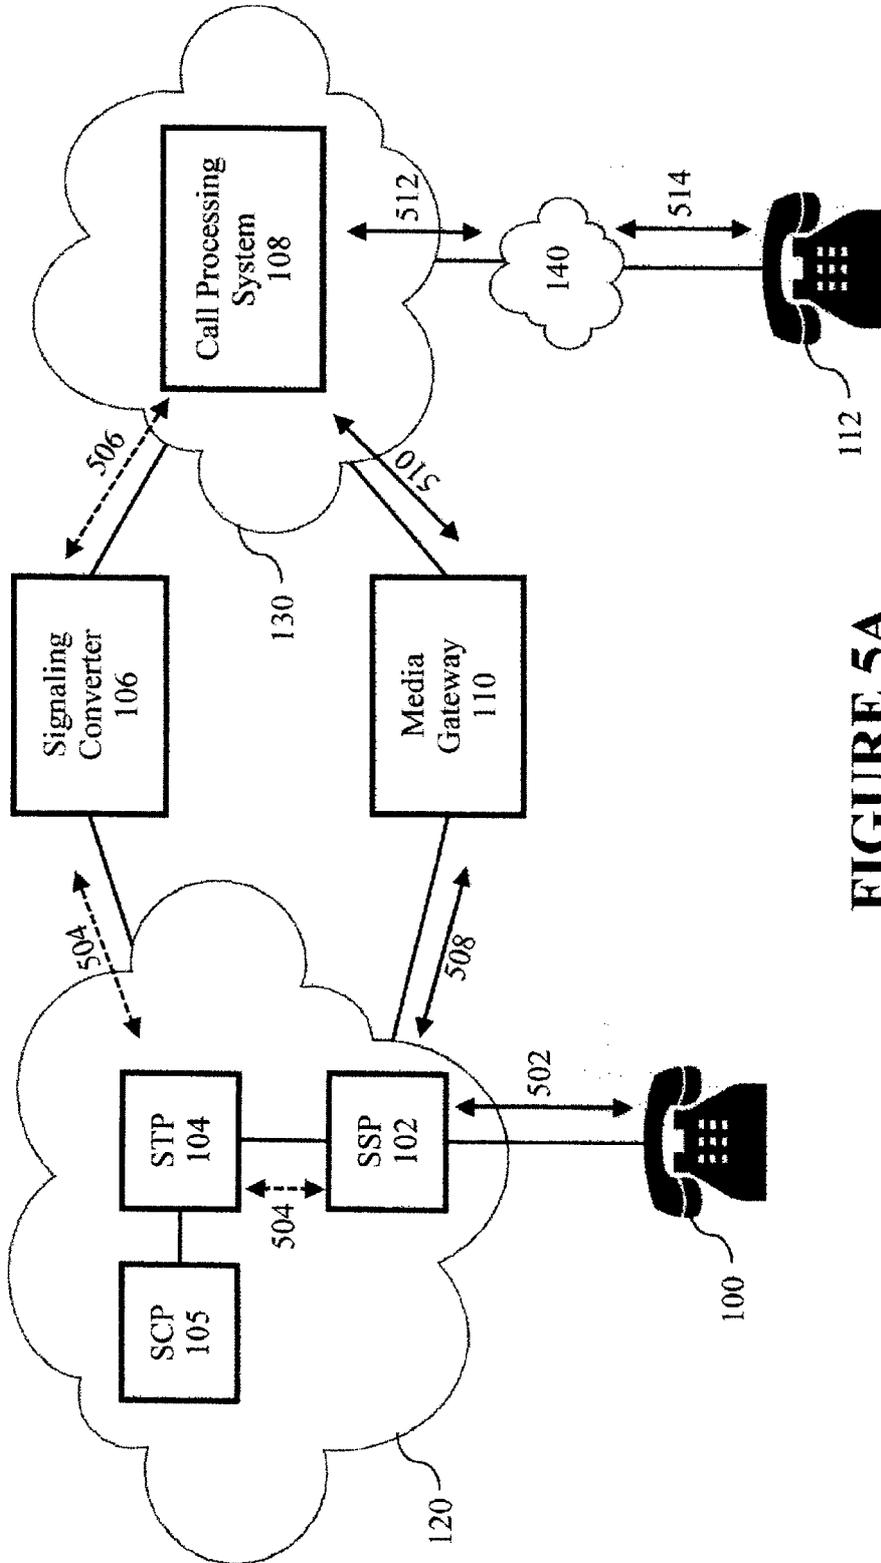


FIGURE 5A


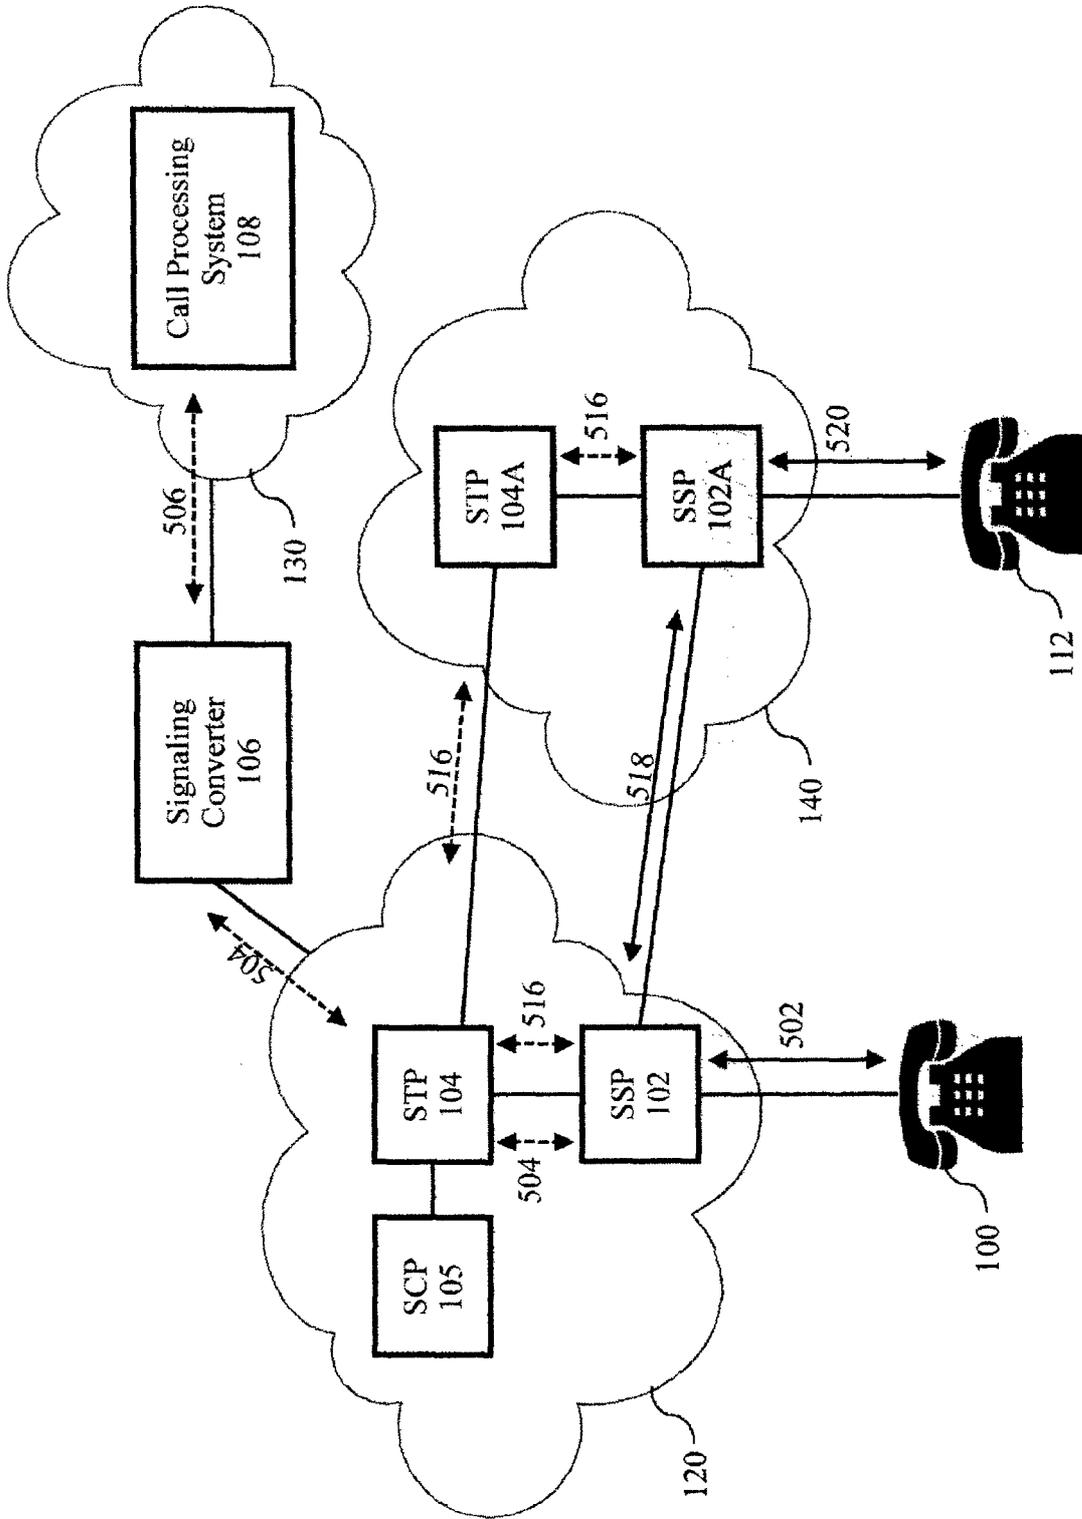



FIGURE 5B

7/15

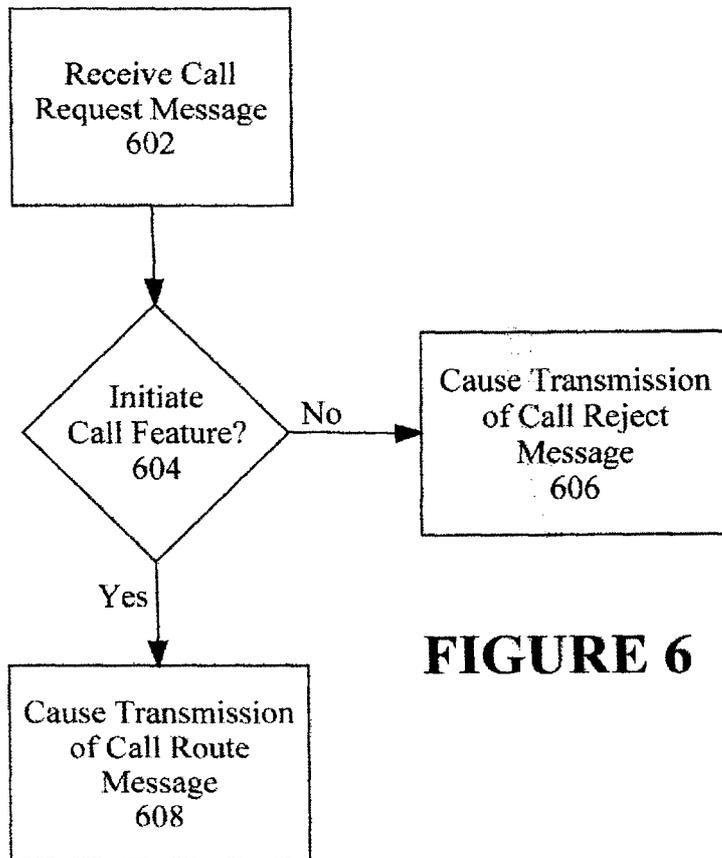


**FIGURE 6**

8/15

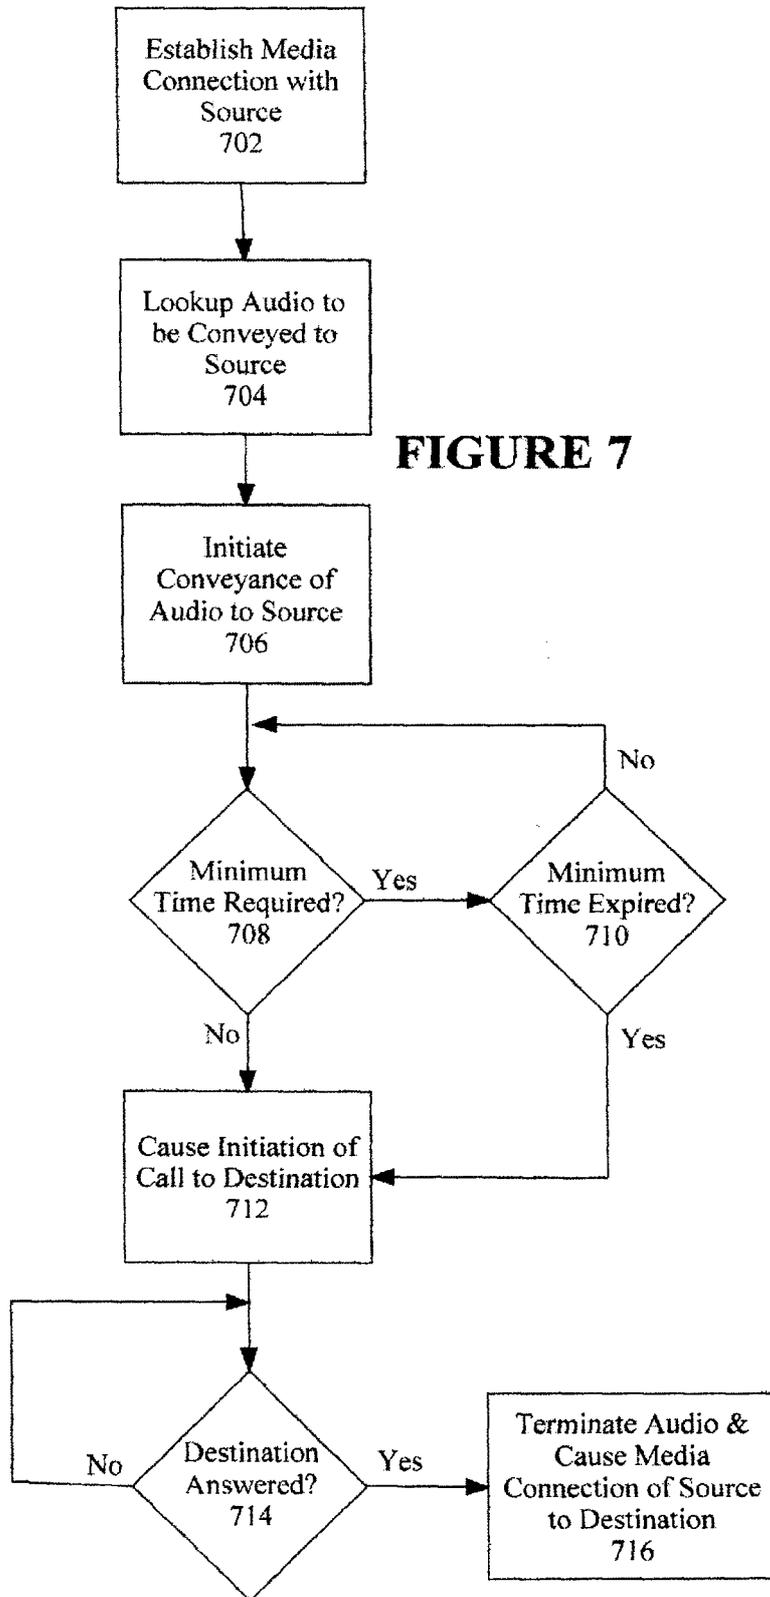

9/15

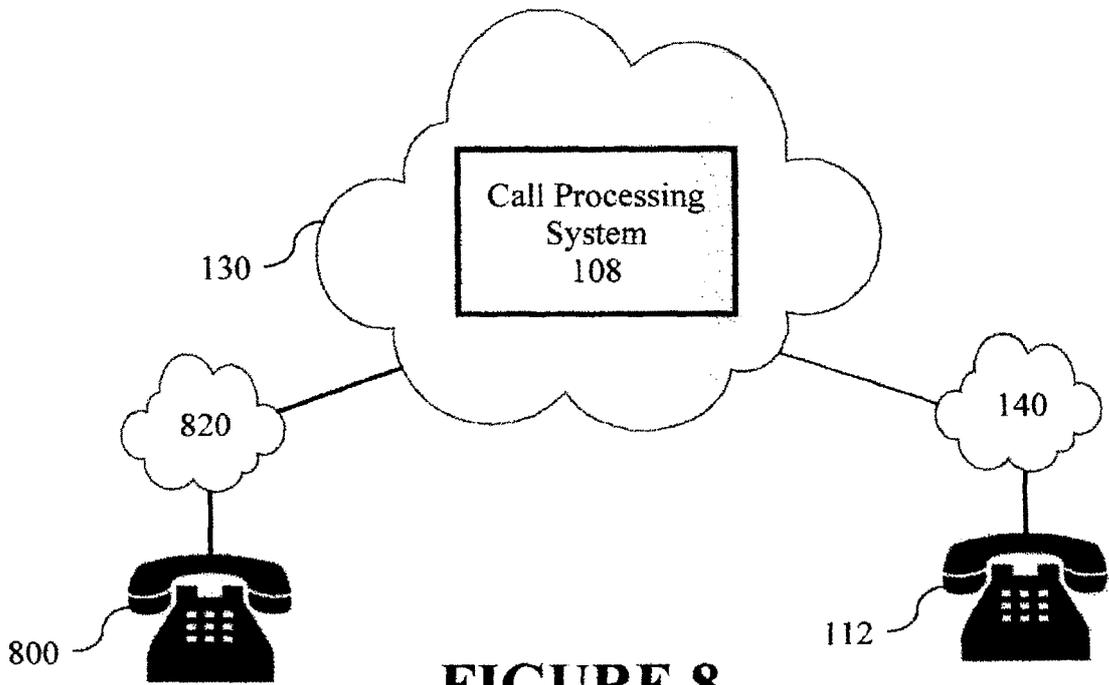

10/15

	Source 904	Audio Element(s) 906	Conditions 908
902 <sub>1</sub>	416-888-1234	Led Zeppelin - Kashmir	-----
902 <sub>2</sub>	613-777-4321	MP3 Playlist @ URL	Random
902 <sub>3</sub>	613-777-2222 613-333-2222	Economist Blog CBC Radio 3 Jazz Compilation	Morning Afternoon Evening
902 <sub>4</sub>	24.114.111	Memo to Fred Birthday Reminder	Fred's Contact # Within 2 Days
		• • •	
902 <sub>N</sub>	6139992345@bell.ca	Weather Network	Destination Area Code

204

FIGURE 9

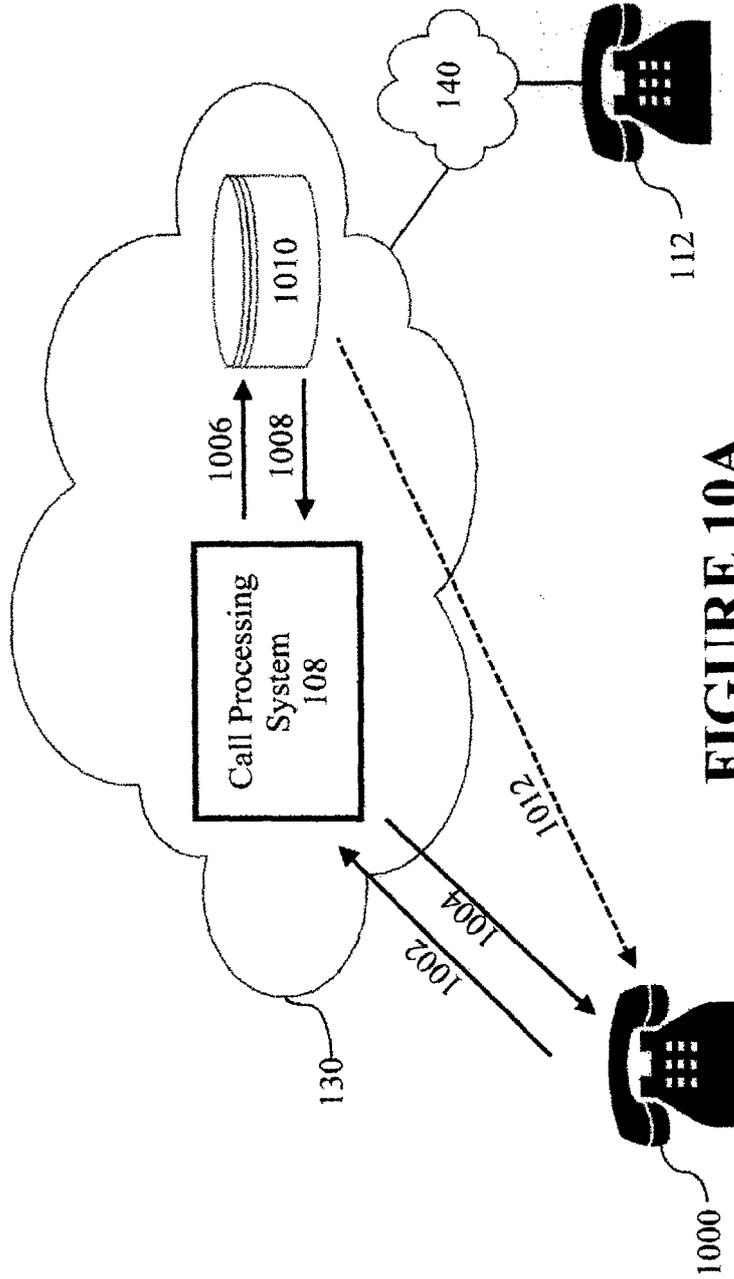


FIGURE 10A


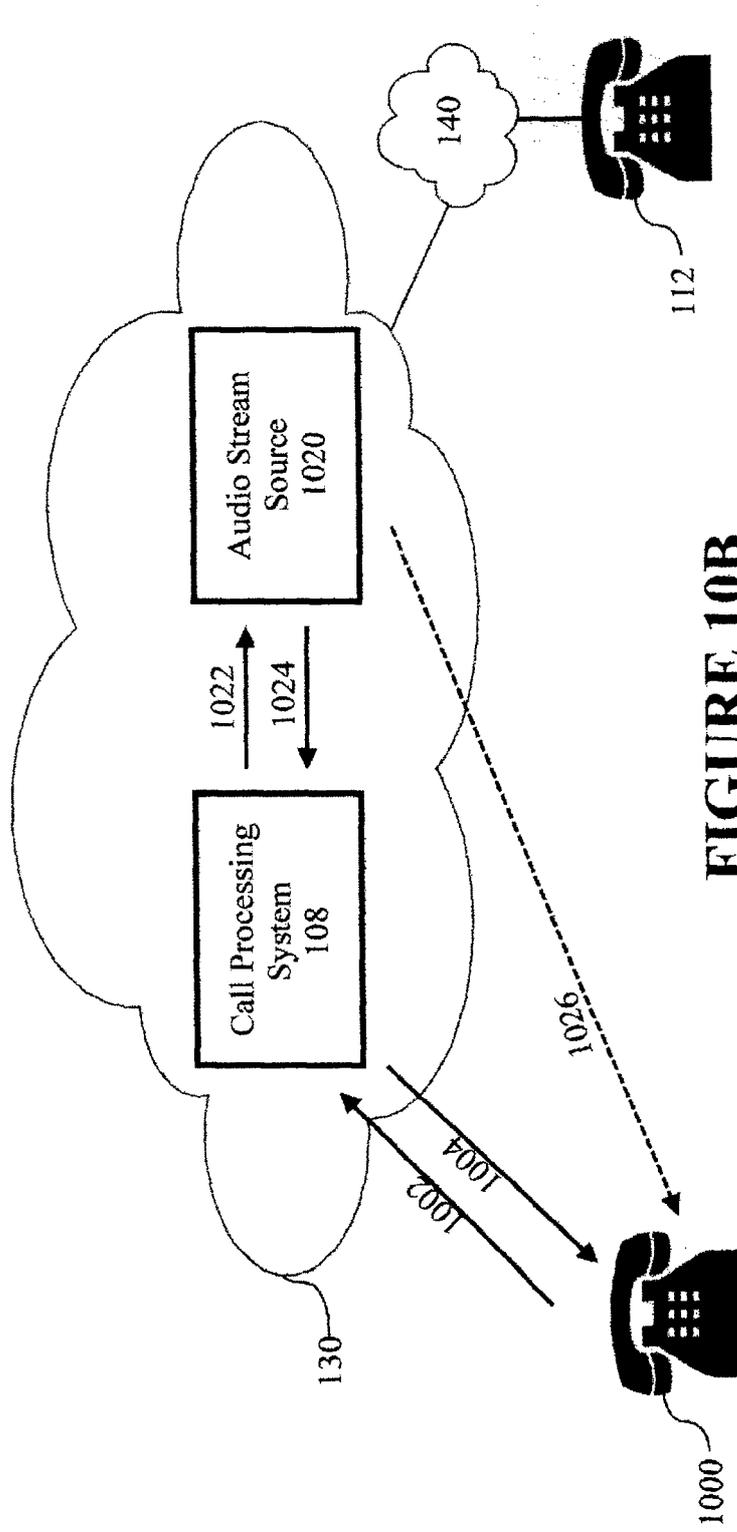



FIGURE 10B

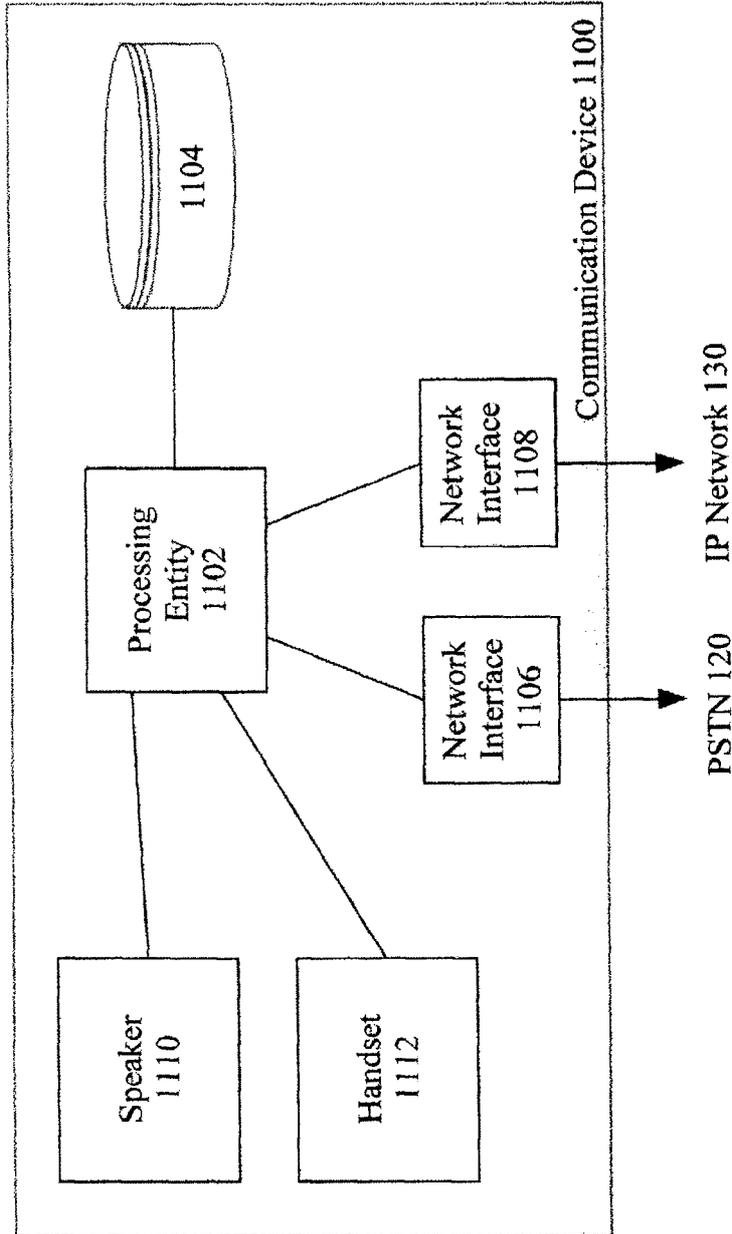


**FIGURE 11**

14/15

FIGURE 12

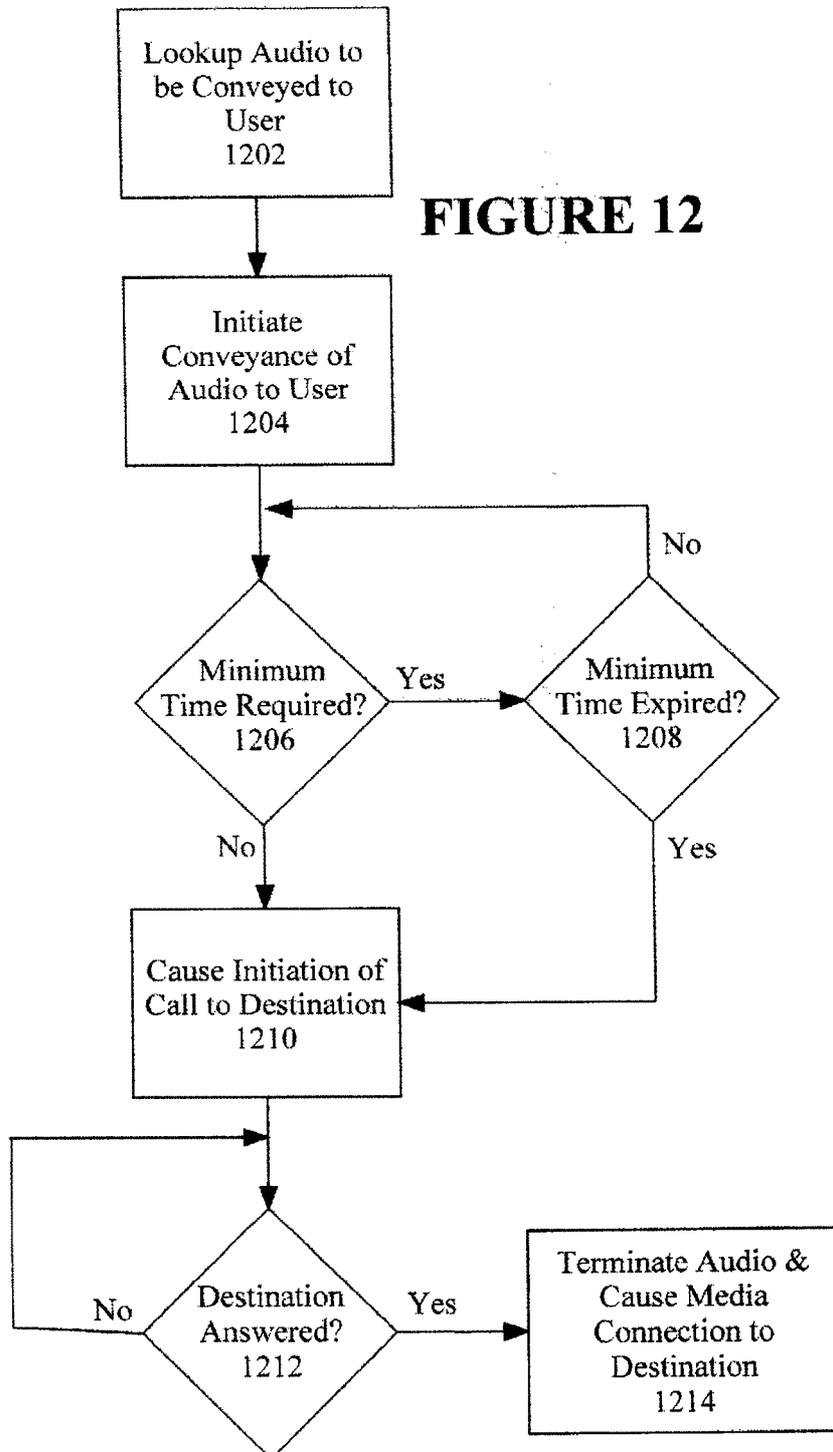

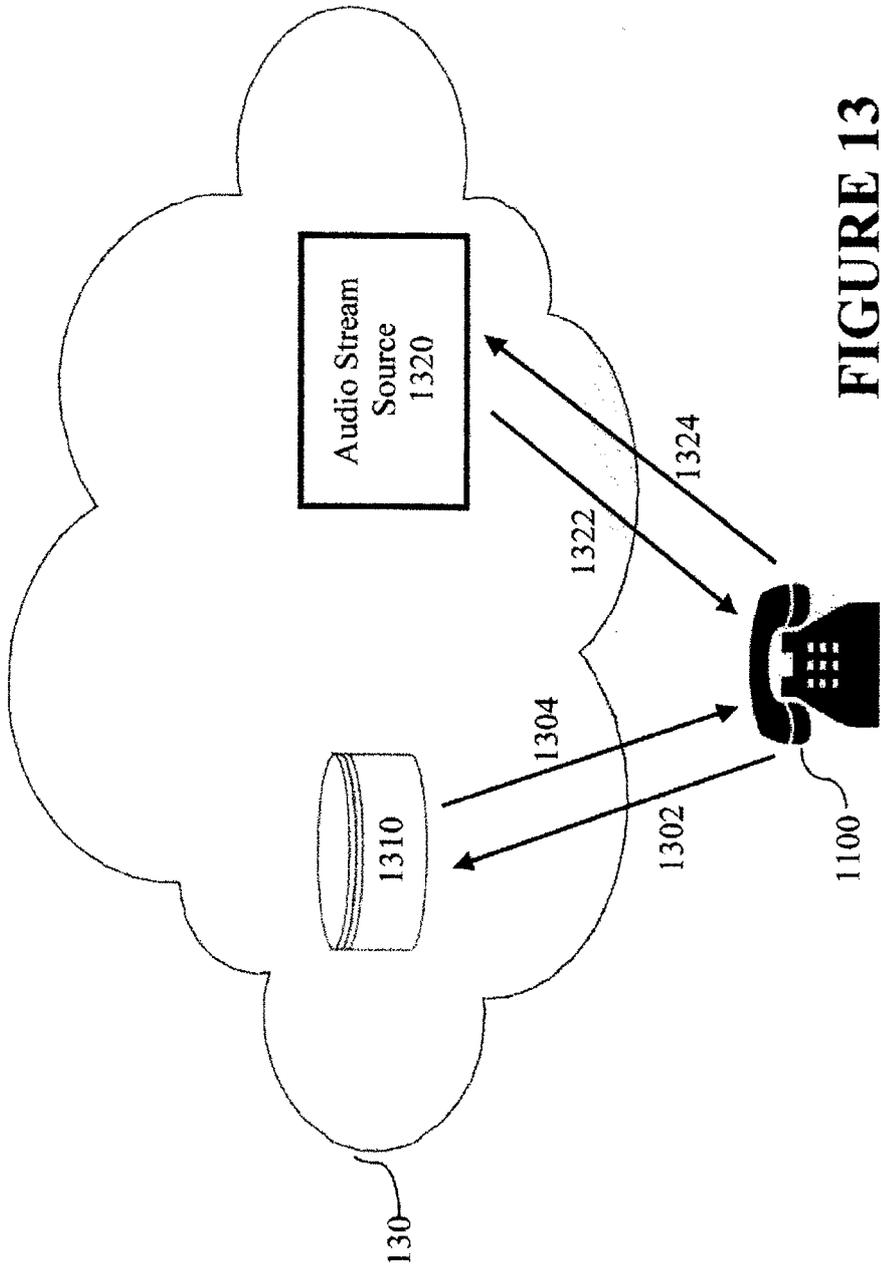

**FIGURE 13**

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/CA20 10/002078

<p>A. CLASSIFICATION OF SUBJECT MATTER  IPC: <b>H04M 3/42</b> (2006.01) , <b>H04L 12/66</b> (2006.01) , <b>H04M 1/00</b> (2006.01)  According to International Patent Classification (IPC) or to both national classification and IPC</p>														
<p>B. FIELDS SEARCHED</p> <p>Minimum documentation searched (classification system followed by classification symbols)  IPC: <b>H04M 3/42</b> (2006.01) , <b>H04L 12/66</b> (2006.01) , <b>H04M 1/00</b> (2006.01)</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p> <p>Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)  Epoque, CPD, TotalPatent (using keywords): call processing system, ring tone, ringback, audio element, audio stream, broadcast, RBT, CRBT, media, tone</p>														
<p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p> <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>US 2007/0189497 A1 (Bareis) 16 August 2007 (16-08-2007)  Abstract  Figures 1-3, 7, 8  paragraphs [0010] - [0014], [0027], [0030], [0031], [0033], [0036], [0038],  [0040], [0046] - [0050], [0055] - [0057], [0059], [0060], [0077] -  [0091], [0103]</td> <td>1-10, 12-14, 17-19, 23-40, 42-44, 47-49,  53-66, 68-73, 75, 79-89, 91-96, 98, 102-  120, 122-126, 129-153, 155-159, 162-  177, 179-187, 189-208, 210-230</td> </tr> <tr> <td>Y</td> <td></td> <td>11, 15, 16, 20, 22, 41, 45, 46, 50-52, 67,  76-78, 90, 99-101, 121, 127, 128, 154,  160, 161, 178, 188, 209</td> </tr> <tr> <td>Y</td> <td>WO 2009/125418 A2 (Satish et al.) 15 October 2009 (15-10-2009)  Abstract  page 1, lines 15-23  page 2, lines 4-14  page 4, line 3 - page 5, line 15  page 6, lines 18-27</td> <td>11, 41, 67, 90, 121, 154, 178, 188, 209</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	US 2007/0189497 A1 (Bareis) 16 August 2007 (16-08-2007) Abstract Figures 1-3, 7, 8 paragraphs [0010] - [0014], [0027], [0030], [0031], [0033], [0036], [0038], [0040], [0046] - [0050], [0055] - [0057], [0059], [0060], [0077] - [0091], [0103]	1-10, 12-14, 17-19, 23-40, 42-44, 47-49, 53-66, 68-73, 75, 79-89, 91-96, 98, 102- 120, 122-126, 129-153, 155-159, 162- 177, 179-187, 189-208, 210-230	Y		11, 15, 16, 20, 22, 41, 45, 46, 50-52, 67, 76-78, 90, 99-101, 121, 127, 128, 154, 160, 161, 178, 188, 209	Y	WO 2009/125418 A2 (Satish et al.) 15 October 2009 (15-10-2009) Abstract page 1, lines 15-23 page 2, lines 4-14 page 4, line 3 - page 5, line 15 page 6, lines 18-27	11, 41, 67, 90, 121, 154, 178, 188, 209
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
X	US 2007/0189497 A1 (Bareis) 16 August 2007 (16-08-2007) Abstract Figures 1-3, 7, 8 paragraphs [0010] - [0014], [0027], [0030], [0031], [0033], [0036], [0038], [0040], [0046] - [0050], [0055] - [0057], [0059], [0060], [0077] - [0091], [0103]	1-10, 12-14, 17-19, 23-40, 42-44, 47-49, 53-66, 68-73, 75, 79-89, 91-96, 98, 102- 120, 122-126, 129-153, 155-159, 162- 177, 179-187, 189-208, 210-230												
Y		11, 15, 16, 20, 22, 41, 45, 46, 50-52, 67, 76-78, 90, 99-101, 121, 127, 128, 154, 160, 161, 178, 188, 209												
Y	WO 2009/125418 A2 (Satish et al.) 15 October 2009 (15-10-2009) Abstract page 1, lines 15-23 page 2, lines 4-14 page 4, line 3 - page 5, line 15 page 6, lines 18-27	11, 41, 67, 90, 121, 154, 178, 188, 209												
<p><input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.</p>		<p><input checked="" type="checkbox"/> See patent family annex.</p>												
<p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>E " earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>		<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>												
<p>Date of the actual completion of the international search</p> <p>12 April 2011 (12-04-2011)</p>		<p>Date of mailing of the international search report</p> <p>29 April 2011 (29-04-2011)</p>												
<p>Name and mailing address of the ISA/CA  Canadian Intellectual Property Office  Place du Portage I, CI 14 - 1st Floor, Box PCT  50 Victoria Street  Gatineau, Quebec K1A 0C9  Facsimile No.: 001-819-953-2476</p>		<p>Authorized officer</p> <p><b>Kristy Hyam (819) 934-2673</b></p>												

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/CA2010/002078

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2007/060227 A2 (Pollitt) 31 May 2007 (31-05-2007) Abstract page 2, line 18 - page 3, line 1 page 3, line 18 - page 5, line 8 page 6, lines 20-29 page 9, line 15 - page 13, line 19 page 14, line 28 - page 15, line 9 page 17, line 24 - page 18, line 5	15, 16, 20-22, 45, 46, 50-52, 76-78, 99-101, 127, 128, 160, 161
P, A	EP 2,157,767 A1 (Wu et al.) 24 February 2010 (24-02-2010) Entire document	1-230
A	US 2007/01 16221 A1 (Kim) 24 May 2007 (24-05-2007) Entire document	1-230
A	WO 2005/048571 A2 (Dement et al.) 26 May 2005 (26-05-2005) Entire document	1-230

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
PCT/CA20 10/002078

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2007189497A1	16-08-2007	US2007189497A1	16-08-2007
WO2009125418A2	15-10-2009	WO2009125418A2 WO2009125418A3	15-10-2009 30-12-2009
WO2007060227A2	31-05-2007	AT478517T CN101416479A DE602006016330D1 EP1961203A2 EP1961203B1 EP2012516A2 EP2012516A3 ES2349724T3 GB0523919D0 GB2432744A GB2432744B US2009022283A1 WO2007060227A3	15-09-2010 22-04-2009 30-09-2010 27-08-2008 18-08-2010 07-01-2009 26-05-2010 10-01-201 1 04-01-2006 30-05-2007 12-01-201 1 22-01-2009 12-07-2007
EP2157767A1	24-02-2010	CN101340629A EP2157767A4 US2010098232A1 WO2009003422A1	07-01-2009 22-09-2010 22-04-2010 08-01-2009
US20071 16221A1	24-05-2007	KR20070012147A KR100747450B1 US7738645B2	25-01-2007 09-08-2007 15-06-2010
WO2005048571A2	26-05-2005	EP1687960A2 US20051 17726A1 US7813490B2 US2007286372A1 US2007291931A1 WO2005048571A3 WO2007142839A2 WO2007142839A3	09-08-2006 02-06-2005 12-10-2010 13-12-2007 20-12-2007 17-08-2006 13-12-2007 28-02-2008