

(51) International Patent Classification:
G06Q 20/00 (2012.01)

(21) International Application Number:

PCT/US2019/066750

(22) International Filing Date:

17 December 2019 (17.12.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16/523,022	26 July 2019 (26.07.2019)	US
16/666,735	29 October 2019 (29.10.2019)	US

(71) Applicant: **KABOODL, LLC** [US/US]; 61 Bayview Avenue, Massapequa, NY 11758 (US).(72) Inventors: **POSILLICO, Francesco, L.**; 61 Bayview Avenue, Massapequa, NY 11758 (US). **PAGE, Timothy, Allan**; 45 Chinchilla Lane, Reno, NV 89511 (US).(74) Agent: **O'ROURKE, Thomas, A.**; Bodner & O'Rourke, LLP, 425 Broadhollow Road, Ste. 120, Melville, NY 11747 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: 3D PRINTER AND INVENTORY CONTROL AND DISTRIBUTION SYSTEM FOR 3D DESIGNS

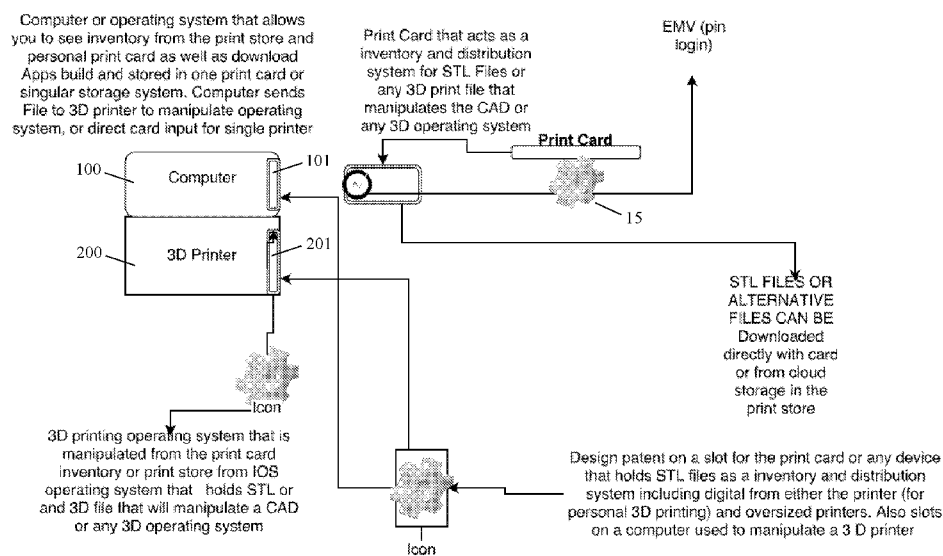


FIG. 1

(57) **Abstract:** A digital platform enables 3D printing where the designs are protected from piracy/redistribution. A single board computer (SBC) communicates with a first server and a second server. The SBC requests a unique hardware ID from the first server, which assigns and sends the ID to the SBC. The SBC submits the ID and a secret key to the second server to request registration of a user and a printer, and the second server sends private certs, a client ID, and a unique public identifier to the SBC. The second server also receives and stores 3D print designs through a designer portal, and on-demand displays the designs in a GUI screen. The SBC user may purchase a 3D print design, and the second server, in response, sends an access token to the SBC. The SBC redeems the access token for a selected 3D print, and the second server adjusts gcode for the selected 3D design for the particular printer, and streams the adjusted gcode to the printer through the SBC, thereby protecting the code from unauthorized user/replication.



SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

3D PRINTER AND INVENTORY CONTROL AND DISTRIBUTION SYSTEM FOR 3D DESIGNS

FIELD OF THE INVENTION

The present invention relates to improvements in 3D printing and 3D designs that may be downloaded and printed on a 3D printer, and more particularly to apparatus, systems, and a method for protecting such 3D designs when distributed to purchasers in retail or online store environments.

BACKGROUND OF THE INVENTION

Three-dimensional (3D) printing, also referred to as additive manufacturing, is a process in which successive layers of a material, commonly plastic, are deposited to form a three-dimensional object. The definition for the 3D object typically resides in digital data, which may originate as a three-dimensional computer aided design (i.e., solid “digital” models) of the object, or may be derived from a 3D scan of the actual object. The digital surface definition for the object is typically stored in the STL (stereolithography) file format that is native to CAD software developed by 3D Systems, Inc. and is used by the 3D printer to manufacture the object.

Injection molding tends to be less expensive for the production of greater quantities of an object. However, 3D printing is faster, and is more cost-effective where relatively few parts are desired/printed, which is common for the prototyping and proof-of-concept required for development of new designs, and also for the consumer 3D printing community and marketplace (see e.g., Pinshape: Free 3D Printable Files and Designs; Trinpy: Guaranteed Printable Designs for your Desktop 3D Printer; and 3dFilemarket.com A Growing 3D printing Community).

Few of the available repositories of 3D Printable Designs charge a fee for the downloading of its digital data. One of the drawbacks of charging a fee for such downloads is that once the source code has been obtained, the person who made the purchase now has possession of the code and can print as many copies as desired. Moreover, the one-time purchaser could even remarket the design, perhaps even without the use of public advertising, so that the designer may never become aware of the violation of the copyright in his/her original work. Software that is made readily available may enter the public domain.

To counteract piracy, and help enforce copyrights associated with software and other works, Digital Rights Management (DRM) schemes are developed and deployed in the form of access control technologies. One of the oldest versions of DRM is the product key required for the installation of software on a computer. Newer types of DRM are used to limit the alteration and unauthorized copying/distribution of e-books. See also, Wade, T.J. & Subramanya, S.R., Digital Rights Management in 3D Printing: A Proposed Reference Architecture for Design-to-Fabrication Security and Licensing, International Conference on Breakthrough in Engineering, Science & Technology- 2016 (INC-BEST'16), 2016).

The general provision of a system for copying data and limiting the extent of such copying has only been partially addressed in the prior art, as shown by the following: U.S. Patent No. 6,282,654 to Ikeda; U.S. Patent No. 6,463,538 to Elteto; U.S. Patent App. Pub. No. 2003/0018895; U.S. Patent No. 6,681,212 to Zeng; U.S. Patent No. 6,782,190 to Morito; U.S. Patent No. 6,904,527 to Parlour; U.S. Patent No. 7,111,285 to Smith; U.S. Patent No. 7,155,415 to Russell; U.S. Patent No. 7,130,831 to Howard; U.S. Patent No. 7,627,119 to Bussert; U.S. Patent No. 7,868,899 to Fennery; and U.S. Patent No. RE43,936 to Isaacson. See also, U.S. patent 8,234,715 to Zollinger, and U.S. Patent No. 9,699,519 to Watson.

However, an improved security system is thus necessary for the secure distribution of a digital 3D print file. The present invention provides several solutions to overcome drawbacks of the prior art, and which serve to protect the intellectual property of 3D designers.

OBJECTS OF THE INVENTION

It is an object of the invention to provide apparatus and a method of protecting 3D printable designs from unauthorized printing.

It is another object of the invention to provide an app store from which 3D designs are downloadable for printing, but only according to a defined print/usage limit, and with the source code being protected from piracy.

It is a further object of the invention to provide an app store from which 3D designs are downloadable for printing, and which deletes the source code after a pre-determined time period.

It is another object of the invention to provide an app store from which 3D designs are downloadable for printing, and which deletes the source code after a pre-determined number of prints are made therefrom.

It is also an object of the invention to provide a new 3D printer that is configured to accept a unique print card that may control the printing of 3D designs therefrom.

It is also an object of the invention to provide a new 3D printer that is configured with a digital rights management system, in which Blockchain may track and control the printing of 3D designs on that printer, using an embedded hash in a print file and a sent hash from an API.

It is also an object of the invention to provide a digital rights management system that may cooperate with existing 3D printers, in which Blockchain may track and control the printing

of 3D designs on that printer over the internet, using an embedded hash in a print file and a hash sent from an API, which must be compared and matched for the printer to proceed.

Further objects and advantages of the invention will become apparent from the following description and claims, and from the accompanying drawings.

SUMMARY OF THE INVENTION

This Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used to limit the scope of the claimed subject matter.

Apparatus and a method are disclosed to protect the source codes (STL FILE) that interacts with a CAD or 3D printer head operating system. The method contains three categories of storing the source codes (STL) into codes that delete while printing, codes that remain on the device and cannot be redistributed, and codes that have a ticker (codes that delete in a time range or after a specific number of usages). This method solves a problem with the existing 3D print industry with the piracy of their design codes, and allows for protecting of the IP of the design. By doing this we can store existing brands because we can protect the design codes from being redistributed. Designers are beginning to protect the designs they print, and the apparatus and method disclosed herein seeks to protect those designs from illegal redistribution. With the disclosed apparatus and/or method, the codes are protected according to those three categories because it allows for brands to sell their products, and correspondingly allows the customer to print the object according to the restrictions imposed by the purchased category. Therefore, designers and businesses can market special designs according to a time limit, or based on an

exact number or printable copies, after which the code is removed from the customer's storage device (e.g., RAM, hard drive, etc.).

BRIEF DESCRIPTION OF THE DRAWINGS

The description of the various example embodiments is explained in conjunction with appended drawings, in which:

FIG. 1 discloses a flow chart illustrating various aspect of the 3D Printer and Computer System disclosed herein;

FIG. 2 discloses a flow chart illustrating three typologies for a method of controlling a 3D Printer and Inventory Control and Distribution System;

FIG. 3 illustrates how 3D printing works based on a single board computer;

FIG. 4 illustrates how 3D printing works using a desktop app;

FIG. 5 illustrates a first series of registration steps for a single board computer in accordance with the present invention;

FIG. 6 illustrates a second series of registration steps for a single board computer in accordance with the present invention;

FIG. 6A is a flow chart of portions of the registration process for a single board computer;

FIG. 6B is a flow chart showing the steps in the process for an author of a 3D print design from design creation to receiving a payment from the sale of the design using an online design portal;

FIG. 7 illustrates a series of registration steps for a desktop app. in accordance with the present invention;

FIG. 8 illustrates and defines steps in the 3D printing process in accordance with the present invention;

FIG. 9 illustrates further steps in the registration process in accordance with the present invention;

FIG. 10 illustrates steps with respect to connectivity of a registered device for 3D printing in accordance with the present invention;

FIG. 11 illustrates process steps with respect to 3D printing in accordance with the present invention;

FIG. 12 illustrates steps with respect to connectivity of a desktop app. for 3D printing in accordance with the present invention;

FIG. 13 illustrates steps with respect to 3D printing from a desktop app. in accordance with the present invention;

FIG. 14A is a first flow chart of a portion of the 3d printing process of the present invention;

FIG. 14B is a second flow chart of a portion of the 3d printing process of the present invention;

FIG. 15 illustrates a graphical user interface (GUI) screen in accordance with the present invention, being usable to initiate signing in by a user;

FIG. 16 illustrates a graphical user interface screen usable for signing in of the user into the system;

FIG. 17 illustrates a graphical user interface screen of the present invention displaying a 3D print design, which design is available to be printed by a signed-in user;

FIG. 18 illustrates a graphical user interface screen of the present invention displaying the 3D design of FIG. 17 after having been selected by a signed-in user to be printed upon payment of the fee, and after identifying which printer of the user is to be used, which 3D design will be protected against unauthorized redistribution in accordance with the present invention;

FIG. 19 illustrates a second sign-in GUI screen that may be used for a 3D print designer to sign in to upload his/her designs that are to be offered for sale to registered users;

FIG. 20 is a GUI screen that may be used by 3D Print designers to monitor sales of their uploaded designs; and

FIG. 21 is a schematic illustration showing an exemplary computing unit capable of being programmed by the software instructions in accordance with at least one embodiment of the present invention, and which may include personal computers, cellular phones, and other mobile devices.

DETAILED DESCRIPTION OF THE INVENTION

As used throughout this specification, the word "may" is used in a permissive sense (*i.e.*, meaning having the potential to), rather than the mandatory sense (*i.e.*, meaning must). Similarly, the words "include", "including", and "includes" mean including but not limited to.

The phrases “at least one”, “one or more”, and “and/or” are open-ended expressions that are both conjunctive and disjunctive in operation. For example, each of the expressions “at least one of A, B and C”, “one or more of A, B, and C”, and “A, B, and/or C” mean all of the following possible combinations: A alone; or B alone; or C alone; or A and B together; or A and C together; or B and C together; or A, B and C together.

Also, all references (e.g., patents, published patent applications, and non-patent literature) that are cited within this documents are incorporated herein in their entirety by reference.

Furthermore, the described features, advantages, and characteristics of any particular embodiment disclosed herein, may be combined in any suitable manner with any of the other embodiments disclosed herein.

The current 3D print market operates on a closed network, which lends itself to certain solutions. Where the 3D print market would operate on an open network, other solutions may be utilized.

The present invention provides for the protection of source code for a 3D design, and interacts with the operating system that controls a 3D printer (see e.g., U.S. Patent Nos.: 5,143,817 to Lawton; 5,171,490 to Fudim; 5,192,559 to Hull; and 10,232,603 to Hartman), and/or controls a computer to which the 3D printer is connected. The system may provide several different forms of protection for the source code, and may include a particularly configured 3D printer.

In a first form of protection, the source code may be stored as code that immediately deletes after the object is printed, or which code deletes portions of the code as corresponding portions of the object are printed (i.e., “Typology B” in FIG. 2).

In a second form of protection, the source code is stored in the computer and remains on the device, but is protected from being redistributed (i.e., "Typology A" in FIG. 2).

In a third form the source code may be stored as code that utilizes a counter, so that the code automatically deletes after a specified time period has elapsed, or which automatically deletes after a pre-determined number of usages for printing of the object on the 3D printer has occurred (i.e., "Typology C" in FIG. 2). These three forms of protection permit 3D designs to be marketed and sold, particularly online, while serving to protect the intellectual property interest of the designer in his/her designs.

In another embodiment, Blockchain may also be utilized to protect the copyrights and the integrity of design files after it is transferred over the internet.

Another problem solved by the present invention is the provision of a system that may universally accommodate all of the different types of 3D printers, and different 3D print objects, which require a different set up. There currently are seven different types of 3D printers:

- Stereolithography (SLA)
- Digital Light Processing (DLP)
- Fused deposition modeling (FDM)
- Selective Laser Sintering (SLS)
- Selective laser melting (SLM)
- Electronic Beam Melting (EBM)
- Laminated object manufacturing (LOM)

All 3D printers are used by consumers by downloading digital files to an SD card and plugging the SD card into a printer, or by digitally downloading the digital file and sending it to the printer. However, the digital file must be adjusted at/for the printer physically by the consumer. The STL file is processed by a piece of software called a "slicer," which converts the

model of the object into a series of thin layers and produces a G-code file containing instructions to print the slices, which instructions are tailored to a specific type of 3D printer (e.g., an FDM printer). This G-code file can be printed using 3D printing client software (which loads the G-code, and uses it to instruct the 3D printer during the 3D printing process). The 3D printers have no communication in or out because the industry is closed source and organizations have different designs for different printers. Even with current pay-to-print methods for existing products, the file is still download and must be handled by the consumer and it is therefore not protected.

Use of the methods described herein provide a full automated process with respect to printing of a purchased design file without compromising the IP of the design, by protecting the STL data file, throughout the entire business process.

The three methods disclosed herein are not used/available at the present time because all printers are closed systems that don't protect the design through the whole business process. There is no existing universal plug for designers and various brands to make one design be printable for all the different types of printers. The present invention provides that universal plug, and will create a new marketplace by allowing one design to be printed by all the different types of printers with a click of a button. The herein disclosed physical method protects designs on a card device, etc., and uses the same protection methods allowing customers with designs for a physical object to freely market them while being protected, whereas they heretofore were unable to prevent them from unauthorized redistribution. The present inventions provides physical and/or electronic methods that allows for printing at different locations, while still protecting the designs/code. This enables customers to print at kiosks if they don't want to purchase home printers, while enabling the code to be printed.

The first solution is a universal solution that uses a communication tool that plugs into a printer and delivers the correct code for a design to the printer being used, creating an automated process where the consumer can print with just a press of a button, and not have to adjust the printer(s) and/or the code. FIG. 1 illustrates a new computer system **100**, and a new 3D Printer **200**, each of which may be configured to be controlled by a print card **15**, referred to as a raspberry pie. The computer **100** may include a slot **101**, which may be configured to receive the print card **15** therein. The print card **15** may act as an inventory and distribution system for STL files or other such files containing printable 3D data. The print card **15** may also manipulate the operating system of the computer **100** to perform printing according to the three typologies defined above, which may be encoded into the print card according to the characteristics paid for at the time of purchase (i.e., permission to print 2 copies of the object before the code is deleted). Use of the print card may require a personal identification number (PIN) that may be assigned at the time the card is purchased, or at some later time.

In one embodiment of the print card, an analogy may be drawn between the print card of the present invention, and a bank debit card, where along with use of a personal identification number (PIN), the user is allowed to shop via an app/gateway within an online cloud store, and make secure purchases of the source code for a desired 3D object, the printing of which is controlled according to the above-noted methods. The DRM associated with the purchased code is then stored on the card. The card permits access to the online cloud store.

The operating system of the computer **100**, which may be manipulated by the print card **15**, may allow the user to see the inventory of designs stored on the card, and may also allow the user to browse and download printable 3D designs using an application program ("App") that similarly protects the designs. The computer, under the control of the print-card-manipulated

operating system, may send the digital file defining the 3D object to a 3D printer. The operating system of the 3D printer **200** may also correspondingly be manipulated by the print card **15** according to the purchased typology ("A" or "B" or "C" in FIG. 2), particularly if it has its own memory.

A unique 3D printer **200** may also be configured to print designs directly using the print card **15**, as the printer **200** may similarly be configured with a slot **201** that may receive the card therein. The print card **15** may have structure similar to, and may also be configured to operate in a manner similar to, a USB flash drive, as shown for example by U.S. Patent No. 6,763,410 to Yu; U.S. Patent No. 6,733,329 to Yank; and U.S. Patent No. 7,287,705 to Tang. The corresponding slots **101** and **201** may thus be configured to read the data from the card **15** being so structured, to operate as described herein.

FIG. 3 illustrates how 3D printing works based on a single board computer (SBC) device, which may have an embedded Wi-Fi module for internet connectivity, and which may connect with a 3D printer through a USB interface. The SBC device should have 2-way communication with the 3D printer device to be able to send print commands thereto. In one embodiment, customers can browse through different 3D models available for 3D printing from a library of such models. All 3D models may be uploaded by designers into the library through an independent designer web portal. Users of the system of the present invention can purchase a model and print it by sending an instruction to their purchased SBC device from the user website over the internet. In one embodiment the unique SBC device may connect with any supported 3D printer through a USB cable/port. The current methodologies in practice for 3D printing don't allow direct prints to be made on the 3D printer. The SBC device connected with the 3D printer may also be connected with the internet, which will enable the printer to act as an IOT device.

Users can then directly print the files from an associated web portal, and the SBC device may not be directly connected with the user's computer. This also takes out the device/platform dependence for the selection of 3D prints, it can be accessed from any web enabled device including computers, laptops, tablets and mobile phones. In current practice, users download the 3D print files and then manually have to print the 3D object, this takes out the hassle and users with a beginner's skill level can easily print the files. And it also helps secure the 3D printable files, as the files are never accessible to the user and never transferred to the printer's memory, this helps achieve the Pay Per Print business model of the present invention.

FIG. 4 further illustrates how 3D printing works using a desktop app. associated with the present invention. An independent desktop application may be made available for different platforms, including OS X, and Microsoft Windows. The app. can have a complete graphic user interface (GUI) for the 3D printing customers. A light version of the App may be configured to always be running on the device and may be accessed from a toolbar / status bar. Customers can browse through different 3D models available for print on the website or through the full version of the App. User can purchase a model and print it by sending an instruction to their connected 3D printer from the desktop or through the user website. A desktop application may be used for slicing and then transferring printable files to the printer, however the desktop application of the present invention also allows user to browse through a list of available 3D printable models and then print any of the models. The 'light version' of the app helps achieve the "print from anywhere" model of the present invention, if users have this app installed and has it registered under the registered account they can send prints to the printer connected with this application. Users can directly print the files from the web portal, by selecting this application under the list of connected printers. In current practices, users download the files and then manually have to

print the 3D object, this takes out the hassle and users can print the files with a beginner's skill level. It also helps secure the 3D printable files, as the files are never accessible to the user and never transferred to the printer's memory, this also helps to achieve the Pay Per Print business model.

FIG. 5 illustrates a first series of registration steps for a single board computer in accordance with the present invention. When the SBC device is manufactured and prepared for market, it should first complete a device registration process as follows. The SBC device may call an internal server and request and receive a unique hardware ID for the device, which ID may be a long alphanumeric string. This is designed to prevent brute force attacks and Denial of Service (DoS) attacks on the Central (Intigo) server. Once a unique Id is received by the device, the device should call the central Intigo server along with a secret key known only by the device, to register itself as an available device. The secret key may be securely embedded in the software; it may be encrypted, and may be a very long sequence of alpha-numeric characters, much like an SSL public/private key, an example of which follows:

```
MIIFDjBABgkqhkiG9w0BBQ0wMzAbBgkqhkiG9w0BBQwwDgQIS2qgprFqPxECAggA
MBQGCCCqGS1b3DQMHBAGD1kGN4ZslJgSCBMi1xk9jhlPxP3FyaMIUq8QmckXC3Sa
9g73NQbtqZwI+9X5OhpSg/2ALxlCCjbqvzgSu8gfFZ4yo+Xd8VucZDmDSpzZGDod
```

The central server returns private key certs, a client ID and a unique public identifier. Each device can only be registered once, to prevent bloating on AWS devices gateway. The internal server is designed for internal access only; this is primarily to be used in SBC device provisioning once the device is prepared for market. The device may connect with the internal server using the internet over a secure HTTPs connection which is accessible only from allowed IP addresses, and the internal server assigns a unique hardware id for the device (which can also

be accessed by the Central server). Once the hardware id is assigned to the device, the SBC device can now be registered as a thing through the central server. The purpose of having an internal server for hardware ID is to prevent brute force attacks on the system, as a device can be registered using any SBC ID as reference and there is no way to validate the IDs sent to the server. The internal server generates a unique system known hardware ID for the devices. The internal server may be placed inside the vicinity where the SBC devices will be manufactured/prepared for market, or it can be cloud based with access limited to certain IP locations known to the system. The reason for using an "internal server" and the "central server" is so that the internal server is only used to generate hardware IDs for the SBC devices or license numbers for the desktop applications. The purpose of internal server is to control the access to the server that prevents fake device registrations. The central server is accessible publically and serves all the content for web portals and manages the print system. For devices the central server only accepts incoming web calls having a registered hardware id. The two servers will preferably be separated and all the portals will only have access to the central server, which is primarily for security; the internal server if made public can be used for brute force to bloat the database and to have denial of service attacks on the complete system. With respect to the use of both a "private key" and a "public identifier," the devices connect with an AWS device Gateway through the MQTT protocol over TLS V1.2 to establish a connection. The device uses CA Certs, which are installed on the device to validate the authenticity of devices gateway, and then uses both Private key and Public Pem files to verify its identity for the connection.

FIG. 6 illustrates a second series of registration steps for a single computer in accordance with the present invention. The central server may expose a public API for devices which can be accessed over a secure channel. The API takes the secret key, and hardware id to validate the

request and process the registration on an Amazon Web Services (AWS) IOT devices gateway. The API returns the private key certs, client ID and unique public identifier which will be stored permanently on the device. The central server may call AWS IOT services using a restful API and register the device as a thing on things gateway. The central server may register all the devices on AWS IOT and also generates a human readable client id, which becomes the identity of the device. When the user wants to connect that specific device with their registered account, they will use this client ID. Note- the AWS IOT is a service that enables us to send and receive notifications to the devices. The devices are registered on AWS, however client IDs are saved on the central server. And also controls the information regarding which device is being connected to what user account.

FIG. 7 illustrates a series of registration steps for a desktop app. in accordance with the present invention. Users can download the desktop App through respective App stores e.g. App Store for OS X and Windows Store for Windows based systems. Each desktop App may have a unique license key and may be activated when the user logs in to the App. The App connects with the central (Intigo) licensing server to check the authentication and validity of desktop App. The desktop App once connected with the user account will have synced data and the user can select the App from the list of printer devices on the user web portal.

FIG. 8 illustrates and defines steps in an embodiment of the 3D printing process in accordance with the present invention. All the 3D models are upload by designers through a dedicated designer web portal. Designers can register on the portal through an invite or by accessing the portal and signing up using an email address. Users can browse through available 3D models through a Website from their personal computers, laptops or mobile device or through a platform specific Mobile App, e.g. iOS App, Android App, Windows 10 App. Users

can view details of each 3D model; the details may include 3D view(s) of the model, an image gallery of the model from different angles. User can also select the models for Print from the model detail screen. To print a model users must be logged into the user. The print feature will only be available for registered users. When the user clicks Print, the system will check for an available device. If the user has no registered device or any connected desktop App, the user will be prompted to add a device with instruction on how to get a device or the desktop application. If there are devices connected with the user's account, the user is prompted with a drop down list to select the device or the connected desktop App. After selecting the device or desktop App, the user will have to enter Payment details or an option to use a previously saved payment method. Once payment is successful, print notification is sent to the selected device or desktop App. The user will have to pay for each print; each new print will only initiate once payment is successful. If the user selects a previously printed model they will have to pay for the print again. The print price may be controlled through an Admin portal, it can be same price for all the models or each model can have an independent price for print.

FIG. 9 illustrates further steps in a registration process in accordance with the present invention. Once a device is purchased by the user, the user should connect the device with their registered Intigo account. (Note- the device registration process is for provisioning new devices on the system independent of the user, once the device is registered and a client ID is allocated, it can then be connected with a registered Intigo user account, and the user can register for an account through web portal/application, signing up using email address, and can have an account without any device being connected). The user can use the unique public identifier and enter the client ID printed on the device into a web portal to connect the device, and this process can also be achieved by printing a QR code on the device with an embedded identifier so the users won't

have to manually add the code. Once the device is connected with a user, it can't be connected with any other user and the device is marked as an active device until the user deliberately transfers the device to another account.

FIG. 10 illustrates steps with respect to connectivity of a registered device for 3D printing in accordance with the present invention. The Single Board Computer (SBC) device may implement an IOT device sdk in the device or use Python libraries to constantly listen for new notifications over internet using the MQTT protocol. The MQTT is a low bandwidth, lightweight protocol that works on top of the TCP/IP protocol. Once the device is marked as active on the server, i.e., it is connected with a user, it can be used to print 3D models. Every time user purchases a print and sends the instructions to print, this connected device will get a notification over MQTT. The notification will only tell the device that a new print is available for the user and send a single-time access token along with printable model ID for the user. The central server will maintain all the configuration settings configured by the user for printing, including print quality, in-fill density and temperature settings; these will be used by the device to generate 3D printer readable gCode. In this embodiment the token may be a digital entity, which may be an encoded string, that may be used by the central server to identify and verify access to the system. An example of the access token follows:

```
EAAXK30wgRWcBAGVtmRGkvFGxQG1NPnLZBmi9VYeZCZAKRUHkLEYfdXBisLTNR
W4Ic84mqjyrp3lX0glWzbZBNhaDv2lhz6vNkzZBhmyBx7PBXU9VBJoB5jKFRdineA7iSmel
iAFtD4HI0veZBX4VV3CRQHF4nZBwjtdnz9E1iQa1KLy8sVXsWp6CU50X6aTm6GlrRRFS
UuwVZA85LZAbQBwHjSrpE0ReAYpBMCKoYCM3pQZDZD
```

In one embodiment, the access token may be usable for a limited time, or for a single time, or for different types of access to the system.

FIG. 11 illustrates other aspects with respect to 3D printing in accordance with the present invention. Once print notification is received on the device along with a single-time access token, the device may communicate with the central server using the HTTP protocol using a secure public API. The central server returns the printable file to the device over a secure channel and also sends all the user selected configurations for gCode generation. Once the device successfully downloads the file and converts the code it notifies the system using the MQTT protocol, and a notification is sent to user that the file is ready to be printed. After successfully printing of the model, the device notifies the system over the secure channel and deletes the files from it's internal storage. For each new print the user will have to follow the process again and purchase the rights to print the file again.

FIG. 12 describes other aspects with respect to connectivity of a desktop app, for 3D printing in accordance with the present invention. The Desktop App may contain a full version and a light version running as a service and can be accessed through a toolbar / status bar, and may start on each boot up of the desktop. This may always be running in the background even if the full version of the App is not running on user's desktop. The App may implement a Push notification system to get notifications from the Intigo Server. Once a desktop App is marked Active on the server, i.e. it is connected with a user, it can be used to print 3D models. Every time a user purchases a 3D print and sends the instructions to print by selecting the desktop App from the drop down list, the desktop App will get a notification. The desktop App may also check for any pending notifications on startup to check for missed notifications. The notification will only tell the App that a new print is available for the user and may send a single-time access token along with a printable model ID for the user. The central server may maintain all the

configuration settings configured by the user for print including print quality, in-fill density and temperature settings; these may be used by the device to generate 3D printer readable gCode.

FIG. 13 describes other aspects with respect to 3D printing from a desktop app, in accordance with the present invention. Once print notification is received on the App along with a single-time access token, the device communicates with the central server over the HTTPS protocol using a secure public API. The central server may return the printable file to the device over a secure channel and also sends all the user selected configurations for gCode generation and if gCode file is available it will send a link to the downloadable gCode file. The App may then check for connected printers over USB. The App will then start printing the file and will show the status of the print. After successful printing of the model, the App notifies the system over the secure channel and deletes the files from it's cache. For each additional 3D print the user will have to follow the process again and purchase the rights to print the file again.

In one embodiment of the invention, as shown in FIG. 6A, a computer system may be configured for a method of controlling use of downloadable proprietary source code defining 3-D object data usable for printing the object on a 3D printer. The computer system may include a first (internal) server, a second (central) server, and a single board computer. The first server, the second server, and the single board computer (SBC) may each include: a central processing unit and a non-transitory computer-readable storage medium (CRSM) comprising instructions to program the first server, second server, and single board computer, respectively. The instructions on the CRSM of the SBC may be configured to request a unique hardware ID from the first server, and the instructions on the CRSM of the first server may be configured to assign and send a unique hardware ID to the SBC. The CRSM of the first server may also be configured to send the newly assigned unique hardware ID to the second server. The instructions

on the CRSM of the SBC may be configured to submit the unique hardware ID and a secret key to the second server to request registration of a user and a printer with the second server, and the instructions on the CRSM of the second server may be configured to send private certs, a client ID, and a unique public identifier to the SBC in response. The instructions on the CRSM of the second server configure the second server to receive and store the code defining 3D print designs from registered designers through a web designer portal, and to on-demand display the 3D print designs in a GUI screen (e.g., FIG. 17). The instructions on the CRSM of the SBC may be configured for a registered user to purchase a quantity of 3D print designs in the GUI, and the instructions on the CRSM of the second server may be configured to send an access token to the SBC in response to the purchase. The instructions on the CRSM of the SBC may be configured for redeeming the access token for a selected 3D print displayed in the GUI, and the instructions on the CRSM of the second server may be configured to adjust gcode of the selected 3D design for the particular printer(s) that was identified by the user during the registration or at a later time, and to stream the adjusted gcode to that printer. Note that more than one 3D printer type may be registered and used, and the system will provide adjusted gcode for the selected for the print. In one embodiment the CRSM of the second server may be configured to stream the adjusted gcode to the printer through the SBC, as shown in FIG. 6A, with Https streaming over a web connection to the SBC device either and internet connection provided to the SDC device, or Wi-Fi, or physical cable. The MQTT protocol may be used for messaging and notifications not data transfer. In another embodiment the CRSM of the second server may be configured to stream the adjusted gcode directly to the printer.

In another embodiment, as shown generally in the flow chart of FIG. 6B, the author of a 3D design may create a print file for the design using the file format of their preference. The

author may then download the API in which all transactions are tracked using a public ledger. The author may then upload the print file to the designer portal using the API, where it is available online for purchase by consumers. The uploaded file may have a hash embedded therein. When a consumer purchases the design, the API authorizes and streams the code for printing to the consumer, and tracks payment received from the consumer and payments made to the author of the purchased design. In the case where a consumer does not have access to his/her own printer, a print management network of the API locates the closest available public printer to complete the printing process.

Also, in one embodiment, the API may be configured to feature a token reward program where a user receives a fractional remuneration on their exposed big data of user information to advertisers. The rewards program may increase the number of registrants to the platform, provide more value to the advertisers.

As noted above, Blockchain may be used to protect the intellectual property and integrity of design files, and may involve a multi-step process as follows. First, the designer uploads his/her design through the API. Next the API adds a hash to the design file, publishes the hash to the Blockchain, and appends the hash to the file. (Note- Blockchain hashes enable security during message transmission when the message is intended for a particular recipient only, whereby a formula generates the hash to protect the security of the transmission against tampering- see, "What is Hashing? [Step-by-Step Guide- Under the Hood of Blockchain]", available at: <https://blockgeeks.com/guides/what-is-hashing/>). In one embodiment, the file with the hash may be stored on a central server from where it may be streamed to the purchaser. In another embodiment, the API instead sends the file with the hash to the author/seller who deposits it onto his/her database, and later on when the design is purchased by a consumer, the

API sends a request to the author asking the author to stream the design file to the designated 3D printer (i.e., the purchaser). Alternatively, when the file with the hash is stored on the central server, the API sends the design file with the embedded hash to the purchaser/3D printer. In either case, the API verifies if both hashes match- the hash in the file sent by from the author database or from the central server, and the hash sent by the API to the printer. If the match is positive, then the design file after streaming over the internet to the 3D printer is not corrupted and is ready to print with the keyways provided by the API. The API creates a unique pair of codes for the design file each time it is purchased for printing, so that the design file sent to the 3D printer cannot be used again to print.

There are two embodiments for corroborating (i.e., for comparing) the embedded hash in the design file and the hash sent by the API. In one embodiment, similar to the embodiment discussed hereinabove, a particularly constructed 3D printer system may be configured to receive both the print file with the embedded hash (which may be in the first few lines of the code) and the hash sent by the API, and may be further configured to automatically compare the two hashes and to print the 3D design only when the hashes match.

The Blockchain of the API will keep track of these transactions and record them on a public ledger. Where multiple copies of the design have been purchased, the Blockchain will be updated as each copy is made. The Blockchain will automatically make the required payment or payments (e.g., payment to the author) after the order is fulfilled. This process provides designers with proof of ownership to dispute copycats when needed, and the integrity of the data files are checked for corruption of the data before the 3D printer starts to move.

The tokens used herein, named ITO tokens, may be issued on the Ethereum Blockchain, which is capable of storing transactions and running smart contracts. In one embodiment the ITO

token(s) may be ERC-20 compliant, and in another embodiment the ITO token(s) may be ERC223 compliant. ERC-20 tokens are advantageous to the end users as they provide fast and streamlined transactions, quick confirmation of transactions, reduced risk of contract breaking, improved security, lower fees, and expert ability to handle incoming transactions in smart contracts. The ERC-20 token has six mandatory functions and three optional functions. The three optional functions include the ability to name the token, to assign the token a symbol, and the ability to determine how dividable the token is by specifying a number of decimal places. The mandatory functions include creating a method that defines the total supply ("totalSupply") of the tokens so that when the limit is reached, the smart contract will refuse to create new tokens; creating a balance of ("balanceOf") method, which has to return how many tokens a given address has; a first transfer function ("transfer") which takes a certain amount of tokens from the "totalSupply" and gives them to a user; a second transfer function ("transferFrom") which can be used to transfer tokens between any two users who have them; an "approve" method that verifies that the contract can give a certain amount of tokens to a user taking into account the total supply; the "allowance" method is similar, except that it checks to see if one user has enough balance to send a number of tokens to someone else.

The ERC-20 tokens are also customizable. The ITO tokens are ERC-20 tokens customized herein to also enable the following features:

- automated buying & selling: you can assign a token's value to that of another token or currency by creating a fund that you can automatically buy or sell in order to maintain the balance;
- auto refill option: transactions conducted on the Ethereum Blockchain require payments to minors in "gas," and the customization program the token to

auto refill “gas” for future transactions once it goes down to a certain level;

-token freeze- so that if instructions from a regulatory authority request a freeze in the circulation, the tokens can be frozen, and subsequently unfrozen when authorized to do so;

-a centralized mint can be used to modify the number of tokens in circulation if needed.

The following is a discussion of a section of the smart contract integrated into the Blockchain of the API to perform payment once an order is confirmed, The following illustration is simplified to be easier to understand, so therefore some variables are made to be constants, the example omits the number of prints allowed, and the example does not differentiate different messages and instructions to the printer and designer. In the example it is assumed that the customer orders a product listed for \$60. The exchange rate of the token for the API is 1:100, i.e., the token is worth \$.01. The list price consists of \$59.95 charged by the 3D printer to print the product and delivery. The loyalty reward to the designer is \$0.02, and the commission to the API is \$0.03. Without optimization of codes, part of the smart contract in Solidarity looks as follows:

```
function printthisitem(uint256 itemcode) public {
    require(tokenContract.transferFrom(msg.sender, address(service_contract), 5995));
    require(tokenContract.transferFrom(msg.sender, address(designer), 2));
    require(tokenContract.transferFrom(msg.sender, address(intigo_platform), 3));
    mapping (address => string) message;
    function sendMessage(address _servicecontract, string _message) {
        message[_servicecontract] = _message;
    }
    function sendMessage(address _designer, string _message) {
        message[_designer] = _message;
    }
    function readMessage() returns (string) {
        return message[msg.sender];
    }
}
```

The first “require” line carries out the pre-approved transfer of 5995 ITO tokens from the sender (i.e., the consumer) of the message to the service contract. The second “require” line does the same by requiring the transfer of two ITO tokens from the consumer to the designer as a royalty payment. The third “require” line is similar by requiring the transfer of three ITO tokens from the consumer to the API platform as a commission. If line 1, 2, or 3 fails for any reason then the function will terminate, ensuring that the contract is paid for the work it undertakes. Otherwise it sends a message to the service contract to print out the desired item as requested. A message and instructions is sent to the printer to print the order. A separate message is sent to the designer, notifying him that his design was used and a royalty paid to his API wallet. Notice that the `transferfrom()` function shows that it is called as part of the `printthisitem()` transaction, not requiring any manual intervention on behalf of the service contract to trigger it (this also means that it will not show up as a separate transaction on the Blockchain, but be part of the `printthisitem()` transaction), so all the payments are made automatically and deducted and credited to the appropriate parties, all handled by the smart contract neatly.

The computer system disclosed herein, and corresponding software, may include components of any standard computing device, such as a server, a tablet, a cell phone, or other mobile smart device, so a description of such an accessorized exemplary computer system is hereinafter disclosed, even though a particular embodiment may not require all of the described components. Exemplary computer system **200** (i.e., a client device associated with a particular user) is shown schematically in FIG. 21, and which may comprise computing unit **201** interacting with external peripherals **202**, such as a separate touch screen display **244**, and interacting with network resources **203**, including use of the internet **261**, and other computers (or other client devices or a server), which may be a laptop computer **262** (i.e., a second client

device associated with a second user), a smart phone **263** (i.e., a third client device associated with a third user), a server **264**, etc.

The computing unit **201** may include a data bus **224** for communicating information across and among various parts of computing unit **201**, and a central processing unit, which may be a microprocessor (hereinafter “processor” or “CPU”) **222** coupled with a bus **224** for processing information and performing other computational and control tasks. Computing unit **201** may also include a volatile storage **225**, such as a random access memory (RAM) or other dynamic storage device, coupled to bus **224** for storing various information as well as instructions to be executed by processor **222**. The volatile storage **225** may also be used for storing temporary variables or other intermediate information during execution of instructions by processor **222**. Computing unit **201** may further include a read only memory (ROM) or an erasable programmable memory (EPROM) **227** or other static non-transitory storage device coupled to bus **224** for storing static information and instructions for processor **222**, such as basic input-output system (BIOS), as well as various system configuration parameters. A persistent storage device or non-volatile memory **226**, such as a magnetic disk, optical disk, or solid-state flash memory device may be provided and may be coupled to bus **224** for storing information and instructions.

Computing unit **201** may be coupled via bus **224** to an integral display **221**, possibly a touch-screen display, for use in displaying information to a user. If desired, computing unit **201** may be coupled via bus **224** to an external display screen **244**. An external input device **243** (e.g., a standard keyboard) may be coupled to bus **224** for communicating information and command selections to processor **222**. A cursor control device **242**, such as a mouse, a trackball, or cursor direction keys, may be used for communicating direction information and command selections to

processor **222** and for controlling cursor movement on display **244**. An external storage device **241** may be connected to the computing unit **201** via bus **224** to provide an extra or removable storage capacity for the computing unit **201**, which may be used to facilitate exchange of data with other computer systems.

Some of the techniques herein may be performed by computing unit **201** in response to processor **222** executing one or more sequences of one or more instructions contained in the volatile memory **225**. Execution of the sequences of instructions contained in a non-transitory memory may cause processor **222** to perform the process steps described herein. In alternative embodiments, specific hard-wired digital circuitry may be used in place of, or in combination with, software instructions to implement the invention.

The term "computer-readable medium" as used herein refers to any medium that participates in providing instructions to processor **222** for execution. The computer-readable medium is just one example of a machine-readable medium, which may carry instructions for implementing any of the methods and/or techniques described herein. Various forms of computer readable media may contain one or more sequences of one or more instructions for the processor **222** to execute, including non-volatile media (storage device **226**), and volatile media (storage device **225**). Common forms of non-transitory computer-readable media include, for example, a floppy disk, a hard disk, magnetic tape, or any other magnetic medium, a CD-ROM, a flash drive, and a memory card.

The computing unit **201** may thus also include a communication interface, such as network interface card **223** coupled to the data bus **222**. Communication interface **223** may provide a two-way data communication coupling to a network link that may be connected to a local network. For example, communication interface **223** may be an integrated services digital

network (ISDN) card or a modem to provide a data communication connection to a corresponding type of telephone line, or it may be a local area network interface card (LAN NIC) to provide a data communication connection to a compatible LAN.

Network link **223** also typically provides data communication to other network resources. For example, the network link may provide a connection over the internet **261** to the world-wide-web. Thus, the computing unit **201** can access resources located anywhere using the Internet **261**. Also, the computing unit **201** may also be accessed by, or communicate with, other computers (e.g. **262**), or another smart device (e.g., smartphone **263**), generally with permission, and which may be located anywhere with access to the internet **261**.

CLAIMS

What is claimed is:

1. A method of controlling the selling and purchasing of a seller's proprietary 3D object design, and printing of the 3D object by a purchaser on a 3D printer that prevents other unauthorized printing, said method comprising the steps of:

- creating a print file for the design of the proprietary 3D object using a file format of the seller's preference;

- creating a smart contract using ethereum blockchain comprising:

- allocating a total supply of erc-20 tokens; and

- controlling selling and buying of the seller's 3D object design comprising:

- appending a hash to the print file of the proprietary 3D object; and

- publishing the hash in the Blockchain ledger;

- selecting of the seller's 3D object by the purchaser and transferring of a required amount of erc-20 tokens from the purchaser for one or more prints of the 3D object;

- streaming of the print file with the appended hash to the purchaser;

- sending the hash to the printer, and comparing of the sent hash to the appended hash in the print file of the proprietary 3D object; and

- printing of the 3D object using the print file of the proprietary 3D object when the sent hash matches the appended hash in the print file of the proprietary 3D object; wherein printing of the object comprises sequentially depositing a plurality of cross-sectional layers of the proprietary 3D object.

2. The method according to claim 1, further comprising: transferring to the seller a royalty being an agreed upon percentage of the required amount of ERC-20 tokens received from the purchaser;

3. The method according to claim 2, further comprising: collecting a sales commission being an agreed upon percentage of the required amount of ERC-20 tokens received from the purchaser.

4. The method according to claim 3, further comprising: publishing the royalty and the sales commission in the Blockchain ledger.

5. The method according to claim 4, further comprising: creating a print management network for locating a closest available public printer for completing printing of the 3D object when the purchaser does not have a 3D printer.

6. A system for controlling the selling and purchasing of a seller's proprietary 3D object design, and for printing of the 3D object by a purchaser on a 3D printer that prevents other unauthorized printing of the seller's proprietary 3D object design, said system comprising:

a server;

a 3D printer configured to build a 3D object by sequential deposition of a plurality of cross-sectional layers of the 3D object;

one or more client devices configured to transmit the seller's proprietary 3D object design wirelessly over a network to said server;

wherein said server is configured to receive the seller's transmitted proprietary 3D object design; said server further configured to create a smart contract with ethereum blockchain to control sales and purchases of the seller's 3D object design; wherein said

smart contract is configured to append a hash to the print file of the seller's proprietary 3D object and store the print file with the appended hash in a non-transitory memory, and to publish the hash in a ledger of the blockchain;

wherein said server is further configured to sell the seller's proprietary 3D object design on an internet webpage;

wherein when the purchaser purchases a quantity of copies of the seller's proprietary 3D object design on the internet webpage, said server streams the stored print file with the appended hash to said 3D printer, and separately transmits the hash to the 3D printer;

wherein said 3D printer is configured to compare the transmitted hash to the appended hash in the print file, and to print only the purchased quantity of copies of said 3D object design when the appended hash in the print file matches the transmitted hash.

7. The system according to claim 6, wherein said server is configured to sell the seller's 3D object to the purchaser for a required amount of **erc-20** tokens.

8. The system according to claim 7, wherein said server is configured to transfer to the seller a royalty being an agreed upon percentage of the required amount of **erc-20** tokens received from the purchaser.

9. The system according to claim 8, wherein said server is configured to collect a sales commission being an agreed upon percentage of the required amount of **erc-20** tokens received from the purchaser.

10. The system according to claim 9, wherein said server is configured to publish the royalty and the sales commission in the Blockchain ledger.

11. A computer system configured for a method of controlling use of downloadable proprietary source code defining 3-D object data usable for printing the object on a 3D printer, said computer system comprising:

a first server, said first server comprising: a first central processing unit and a first non-transitory computer-readable storage medium comprising instructions to program said first server;

a second server, said second server comprising: a second central processing unit and a second non-transitory computer-readable storage medium comprising instructions to program said second server;

a single board computer (SBC), said SBC comprising: a third central processing unit and a third non-transitory computer-readable storage medium (CRSM) comprising instructions to program said SBC;

wherein said instructions on said third CRSM are configured to request a unique hardware ID from said first server, and said instructions on said first CRSM are configured to assign and send the unique hardware ID to said SBC;

wherein said instructions on said third CRSM are configured to submit the unique hardware ID and a secret key to said second server to request registration of a user and a printer with said second server, and said instructions on said second CRSM are configured to send private certs, a client ID, and a unique public identifier to said SBC;

wherein said instructions on said second CRSM configure said second CRSM to receive and store one or more 3D print designs through a web designer portal, and to on-demand display the 3D print designs in a GUI screen;

wherein said instructions on said third CRSM are configured for purchasing a quantity of the 3D print designs in the GUI, and said instructions on said second CRSM are configured to send an access token to said SBC in response to said purchasing;

wherein said instructions on said third CRSM are configured for redeeming the access token for a selected 3D print displayed in said GUI, and said instructions on said second CRSM are configured to adjust gcode of the selected 3D design for the printer, and to stream the adjusted gcode to the printer through said SBC.

12. The computer system according claim 11, wherein said response to said purchasing is sent using the MQTT protocol.

13. The computer system according claim 11, wherein said access token comprises an alpha-numeric sequence.

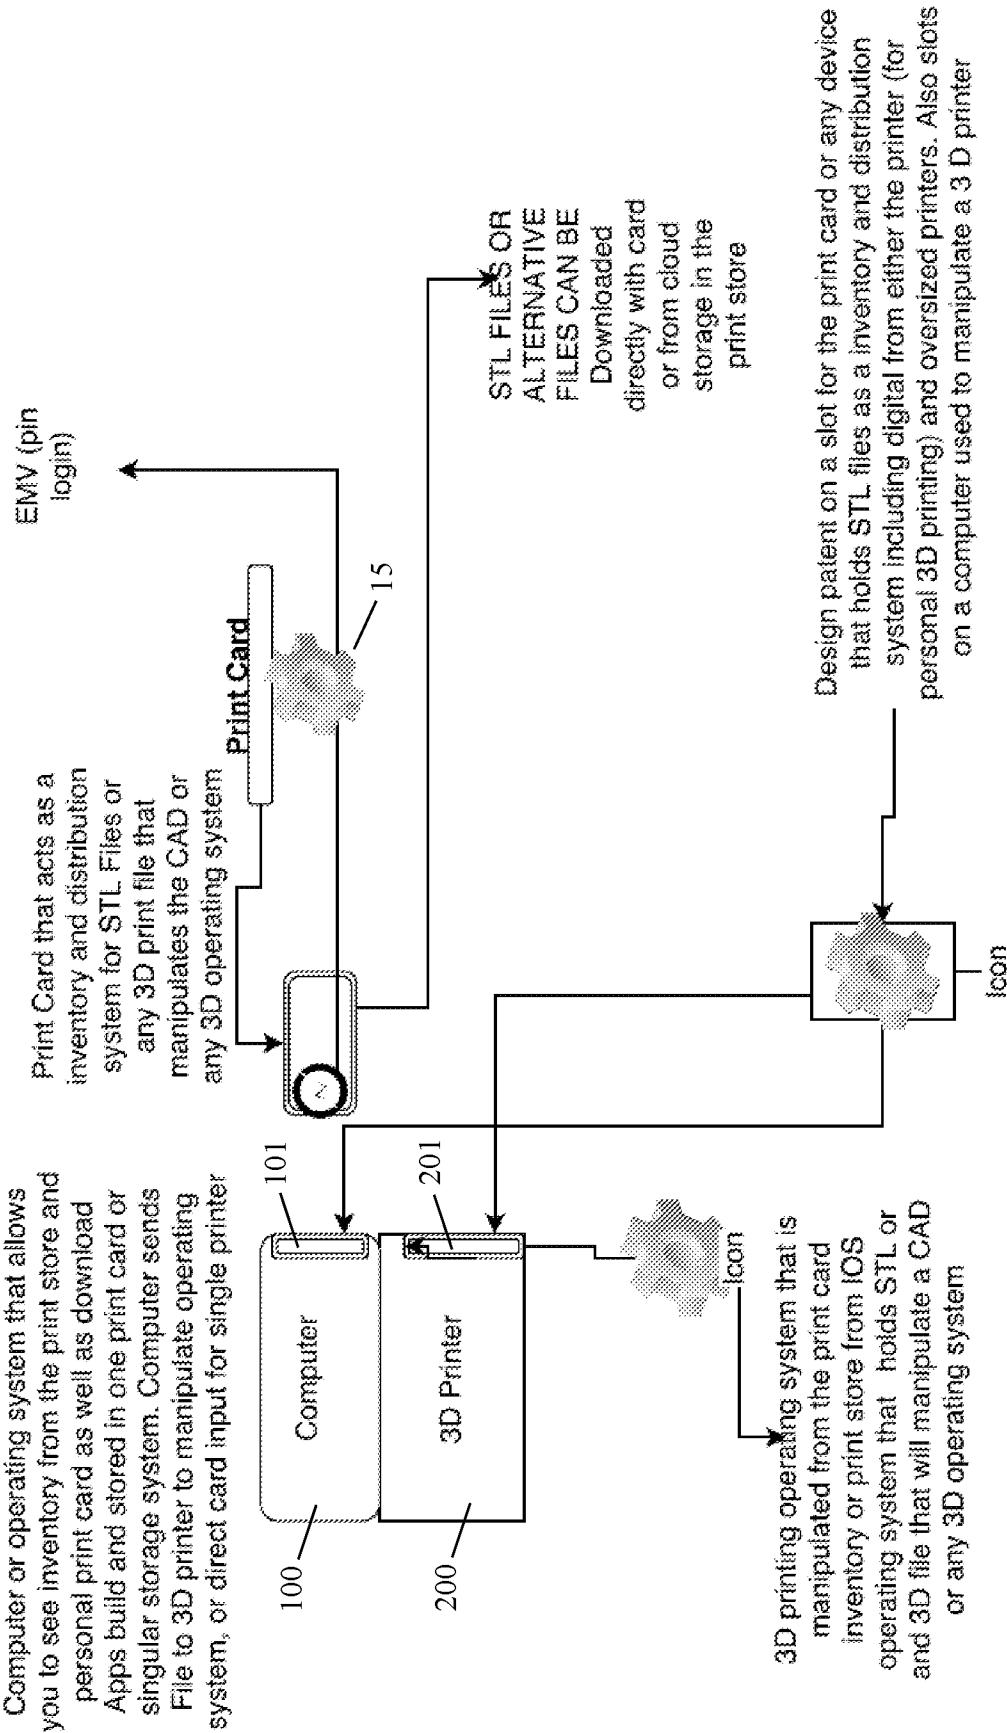


FIG. 1


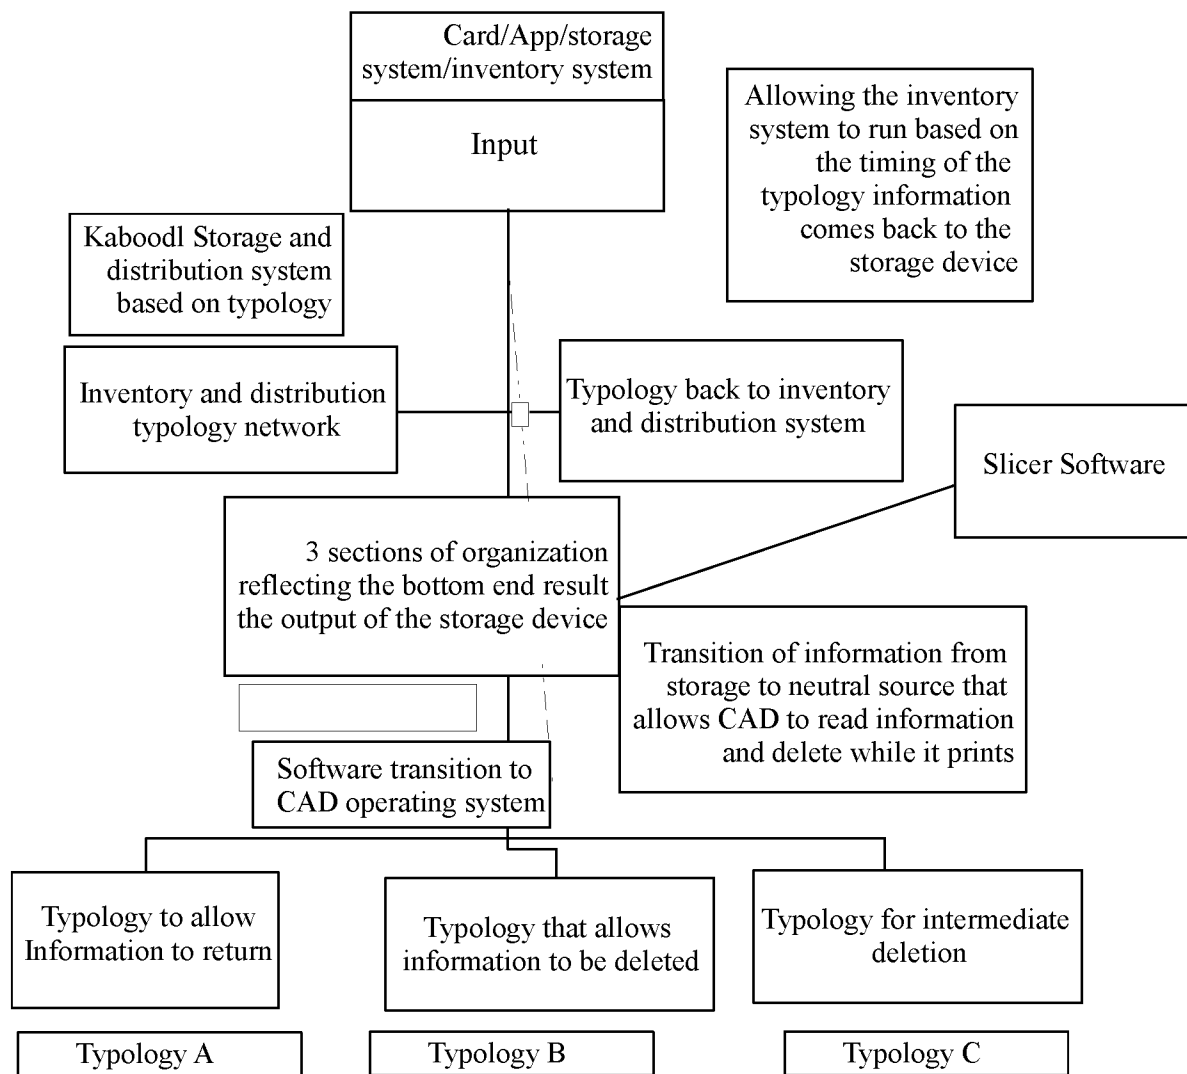


FIG. 2

FIG. 3

3D Printing: How it works

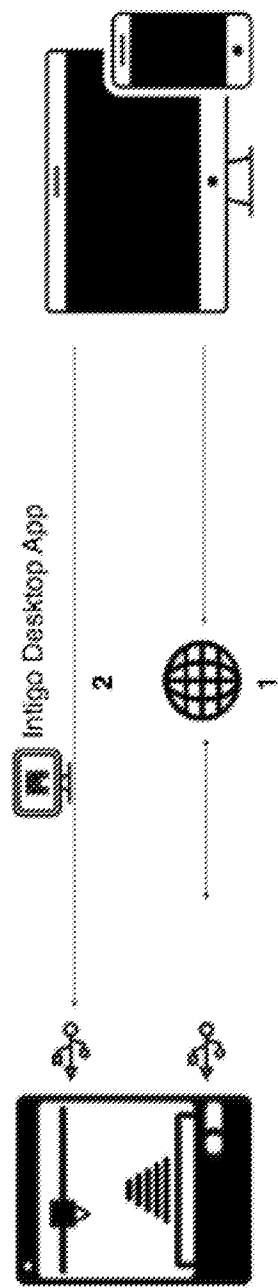


1. Single Board Computer

- Single Board Computer (SBC)
- Embedded Wi-Fi module for internet connectivity
- Device connects with a 3D printer through USB interface
- Device must have 2-way communication with the device to send print commands
- Customers can browse through different 3D model available for print
- All 3D models are uploaded by designers through an independent designer web portal
- User can purchase a model and print it by sending a instruction to their purchased device from the user website over the internet
- The 3D printer or SBC device doesn't have to be connected directly with the user device

FIG. 4

3D Printing: How it works

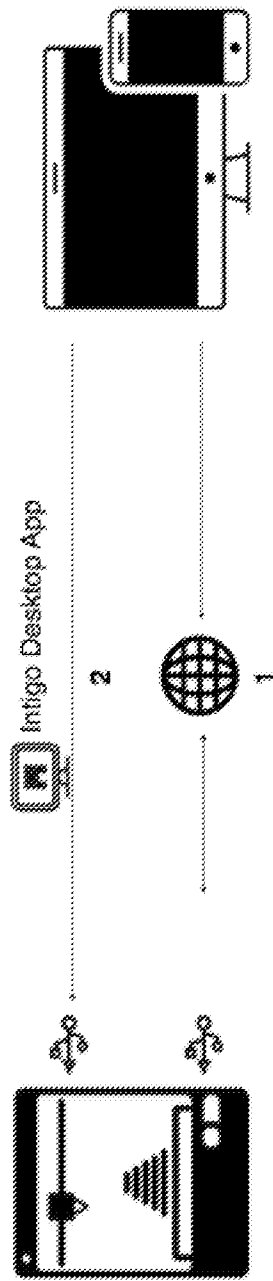

2. Intigo Desktop App

- Independent desktop application available for different platforms including OS X, Microsoft Windows
- App can have a complete UI for the customers
- A light version of the App will always be running on the device and can be accessed from toolbar/status bar
- Customers can browse through different 3D model available for print on the website or through the full version of the App
- All 3D models are uploaded by designers through an independent designer web portal
- User can purchase a model and print it by sending a instruction to their connected printer from the desktop or through the user website

FIG. 5
Single Board Computer: Registration

- When device is manufactured and prepared for Market. It should first complete a device registration process
- The device should call an internal server and get a unique hardware id for the device (this is to prevent brute force attacks and DoS-Denial of Service attacks on Central Intigo server)
- Once a unique id is received at the device, the device should call the central Intigo server along with a secret key known to the devices only, to register itself as an available device. The central server returns private key certs, client ID and a unique public identifier
- Every device can only be registered once, to prevent bloating on AWS devices gateway.

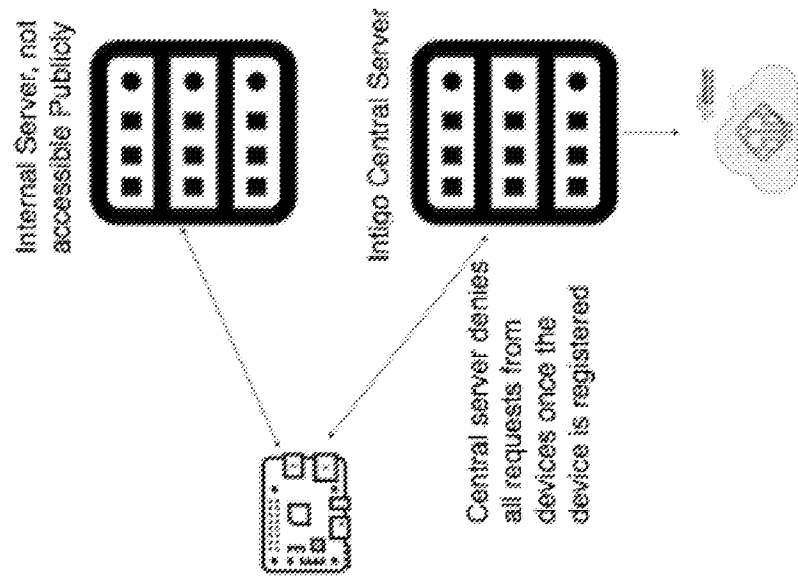
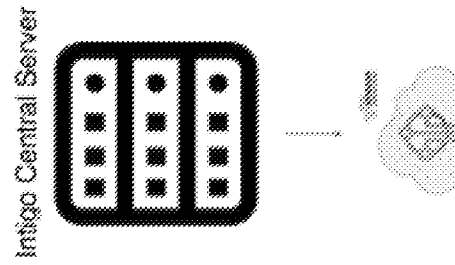


FIG. 6

Single Board Computer: Registration

- Central server exposes a public API for devices which can be accessed over a secure channel
- API takes secret key, hardware id to validate the request and process the registration on AWS IOT devices gateway
- API returns the private key certs, client id and unique public identifier which will be stored permanently on the device
- Central server call AWS IOT services using a restful API and registers the device as a thing on things gateway



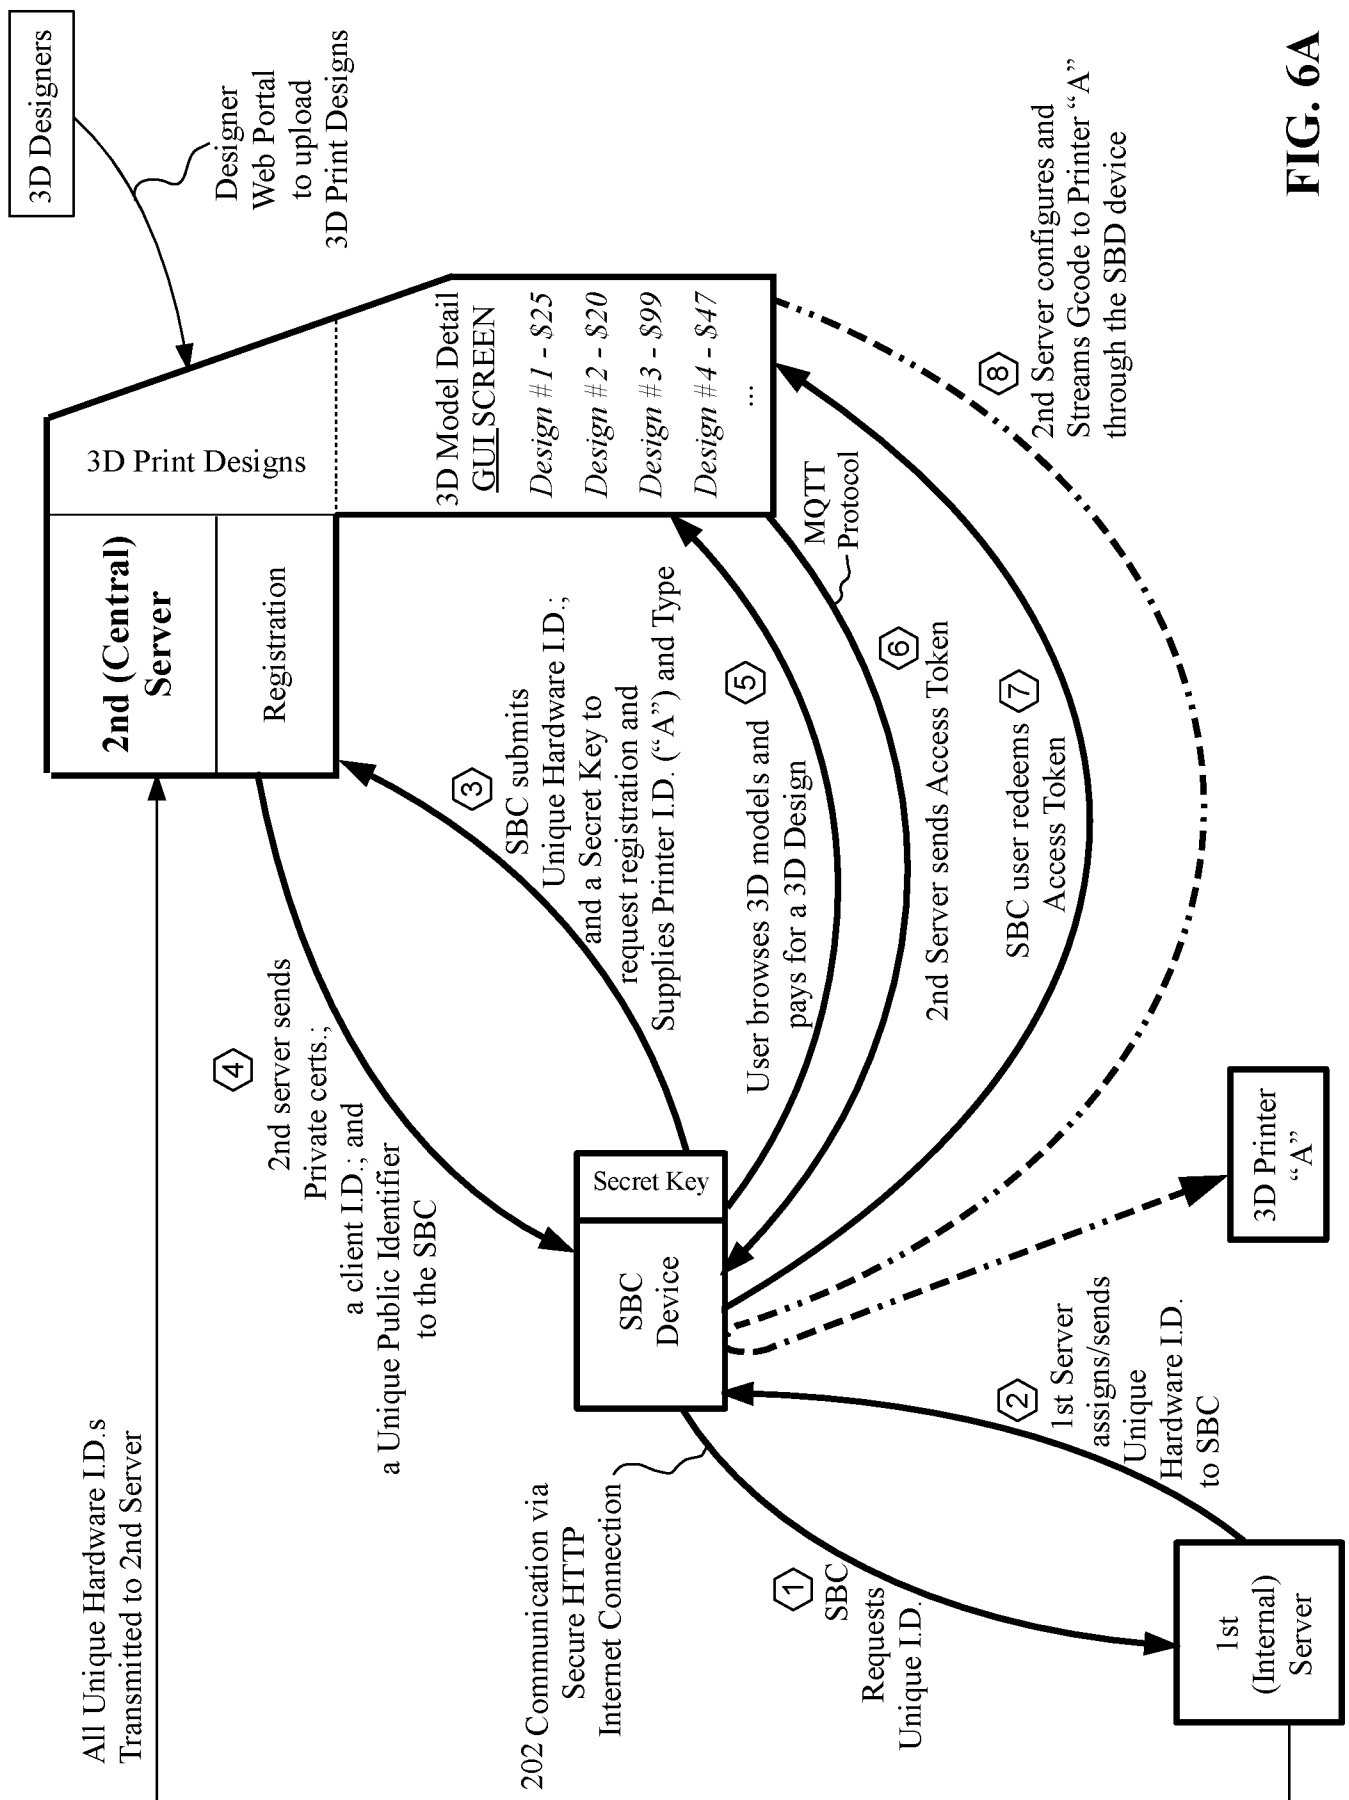


FIG. 6A

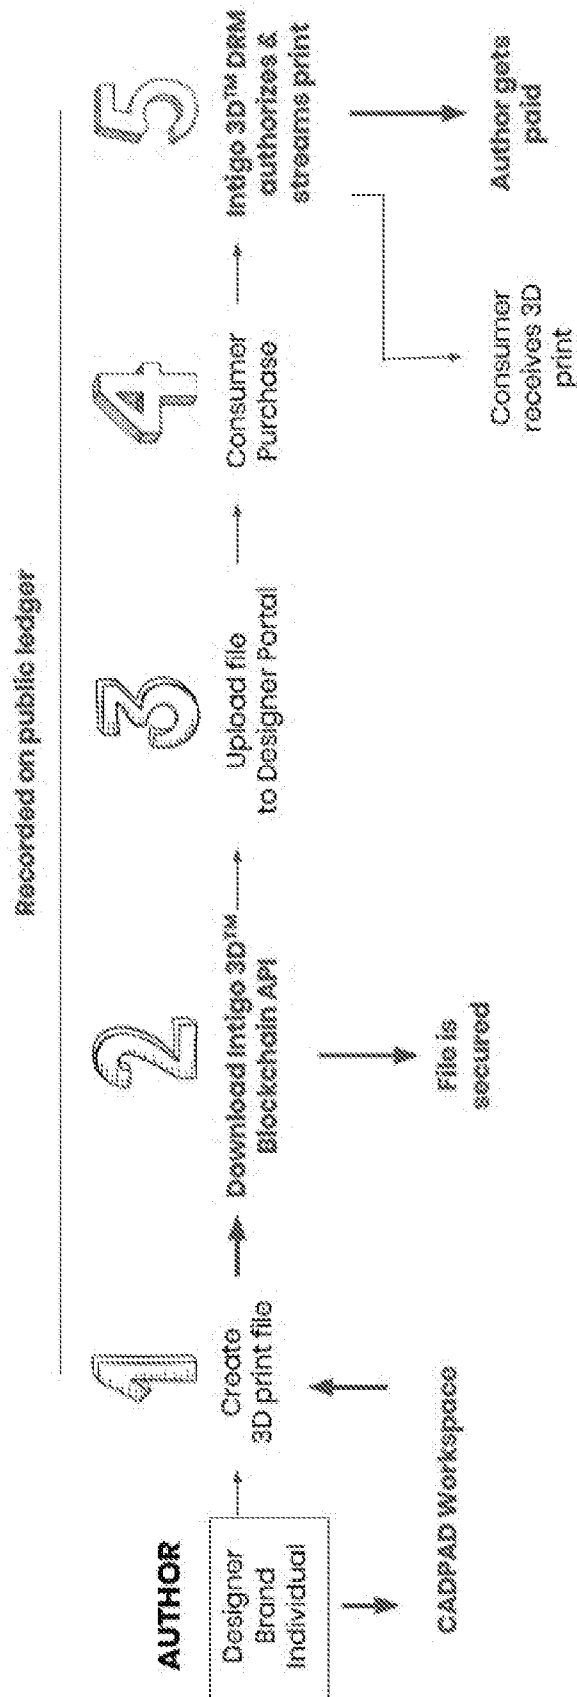


FIG. 6B

FIG. 7

Intigo Desktop App: Registration

- Users can download the desktop App through respective App stores e.g. App Store for OS X and Windows Store for Windows based systems
- Each desktop App will have a unique license key and will be activated when user logs in to the App
- App connects with Intigo Licensing server to check the authentication and validity of desktop App
- The desktop App once connected with the user account will have synced data and user can select the App from the list of printer devices on user web portal


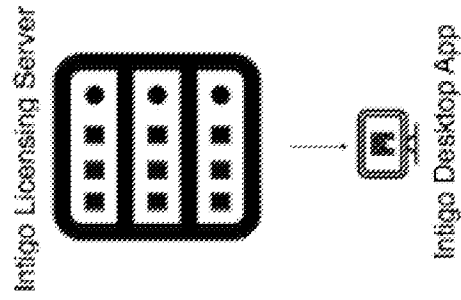


FIG. 8

3D Models


- All the 3D models are upload by designers through a dedicated designer web portal. Designers can register on the portal through an invite or by accessing the portal and sign up using email address
- Users can browse through available 3D models through a Website from their personal computers, laptops or mobile device or through a platform specific Mobile App e.g. iOS App, Android App, Windows 10 App
- User can view details of each 3D model; the details will include 3D view of the model, image gallery of the model from different angles. User can also select the models for Print from the model detail screen. To print a model users must be logged into the user. The print feature will only be available for registered users When uses clicks Print; system will check for available device. If user has no registered device or any connected desktop App; user will be prompted to add a device with instruction on how to get a device or the desktop application
- If there are devices connected with user account, user is prompted with a drop down list to select the device or the connected desktop App
- After selecting the device or desktop App, user will have to enter Payment details or an option to use a previously saved payment method. Once payment is successful print notification is sent to selected device or desktop App
- User will have to pay per print; each new print will only initiate once payment is successful. If user selects a previously printed model they will have to pay for the print again.
- Print price is controlled through an Admin portal, it can be same price for all the models or each model can have an independent price for print

FIG. 9
Single Board Computer: User Registration



- Once device is purchased by the user, user should connect the device with their registered Intigo account
- User can use the unique public identifier and enter the identifier through web portal to connect the device, this process can also be achieved by printing a QR code on device with embedded identifier so users won't have to manually add the code.
- Once the device is connected with user, it can't be connected with any other user and the device is marked as an active device until user deliberately transfer the device to another account

FIG. 10
Single Board Computer: Connectivity

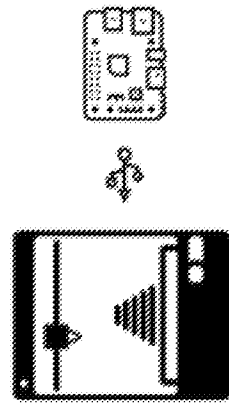


- The Single Board Computer (SBC) device implements IOT device sdk in the device or use Python libraries to constantly listen for new notifications through internet over MQTT protocol
- MQTT is a low bandwidth, lightweight protocol that works on top of TCP/IP protocol
- Once the device is marked Active on the server i.e. it is connected with a user, it can be used to print 3D models
- Every time user purchases a print and send the instructions to print, this connected device will get a notification over MQTT
- The notification will only tell the device that a new print is available for the user and send single-time access token along with printable model id for the user
- The central server will maintain all the config settings configured by the user for print including print quality, in-fill density and temperature settings; these will be used by the device to generate 3D printer readable gCode

FIG. 11
Single Board Computer: Printable file




- Once print notification is received on the device along with a single-time access token, the device communicates with Intigo central server over HTTP protocol using a secure public API
- Central server returns the printable file to the device over a secure channel and also sends all the user selected configurations for gCode generation
- Once the device successfully downloads the file and converts the code it notifies the system over MQTT protocol and a notification is sent to user that the file is ready to be printed
- After successful print the device notifies the system over secure channel and deletes the files from it's internal storage
- For each new print user will have to follow the process again and purchase the rights to print the file again

FIG. 12
Intigo Desktop App: Connectivity

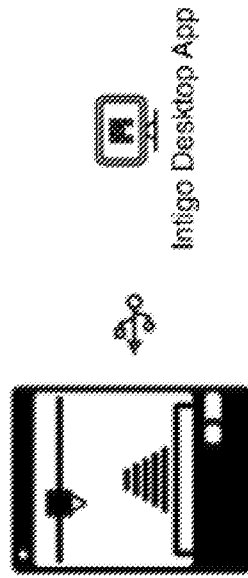

- The Desktop App contains a full version and a light version running as a service and can be accessed through toolbar/status bar and starts on each boot up of the desktop. This will always be running in the background even if the full version of the App is not running on user's desktop. The App implements a Push notification system to get notifications from the Intigo Server.
- Once a desktop App is marked Active on the server i.e. it is connected with a user; it can be used to print 3D models
- Every time user purchases a print and sends the instructions to print by selecting the desktop App from drop down list, the desktop App will get a notification. The desktop App also checks for any pending notifications on startup to check for missed notifications
- The notification will only tell the App that a new print is available for the user and will send a single-time access token along with printable model id for the user
- The central server will maintain all the config settings configured by the user for print, including print quality, in-fill density and temperature settings; these will be used by the device to generate 3D printer readable gCode

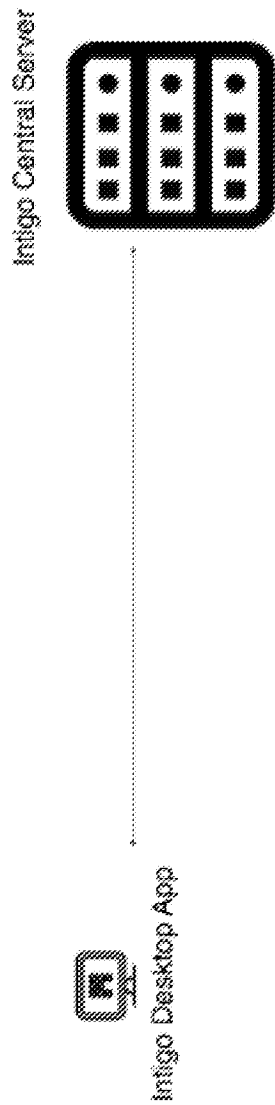FIG. 13**Intigo Desktop App: Printable file**

- Once print notification is received on the App along with a single-time access token, the device communicates with Intigo central server over HTTPS protocol using a secure public API
- Central server returns the printable file to the device over a secure channel and also sends all the user selected configurations for gCode generation and if gCode file is available it will send a link to the downloadable gCode file
- The App then checks for connected printers over USB
- The App will then start printing the file and will show status of the print
- After successful print the App notifies the system over secure channel and deletes the files from it's cache
- For each new print user will have to follow the process again and purchase the rights to print the file again


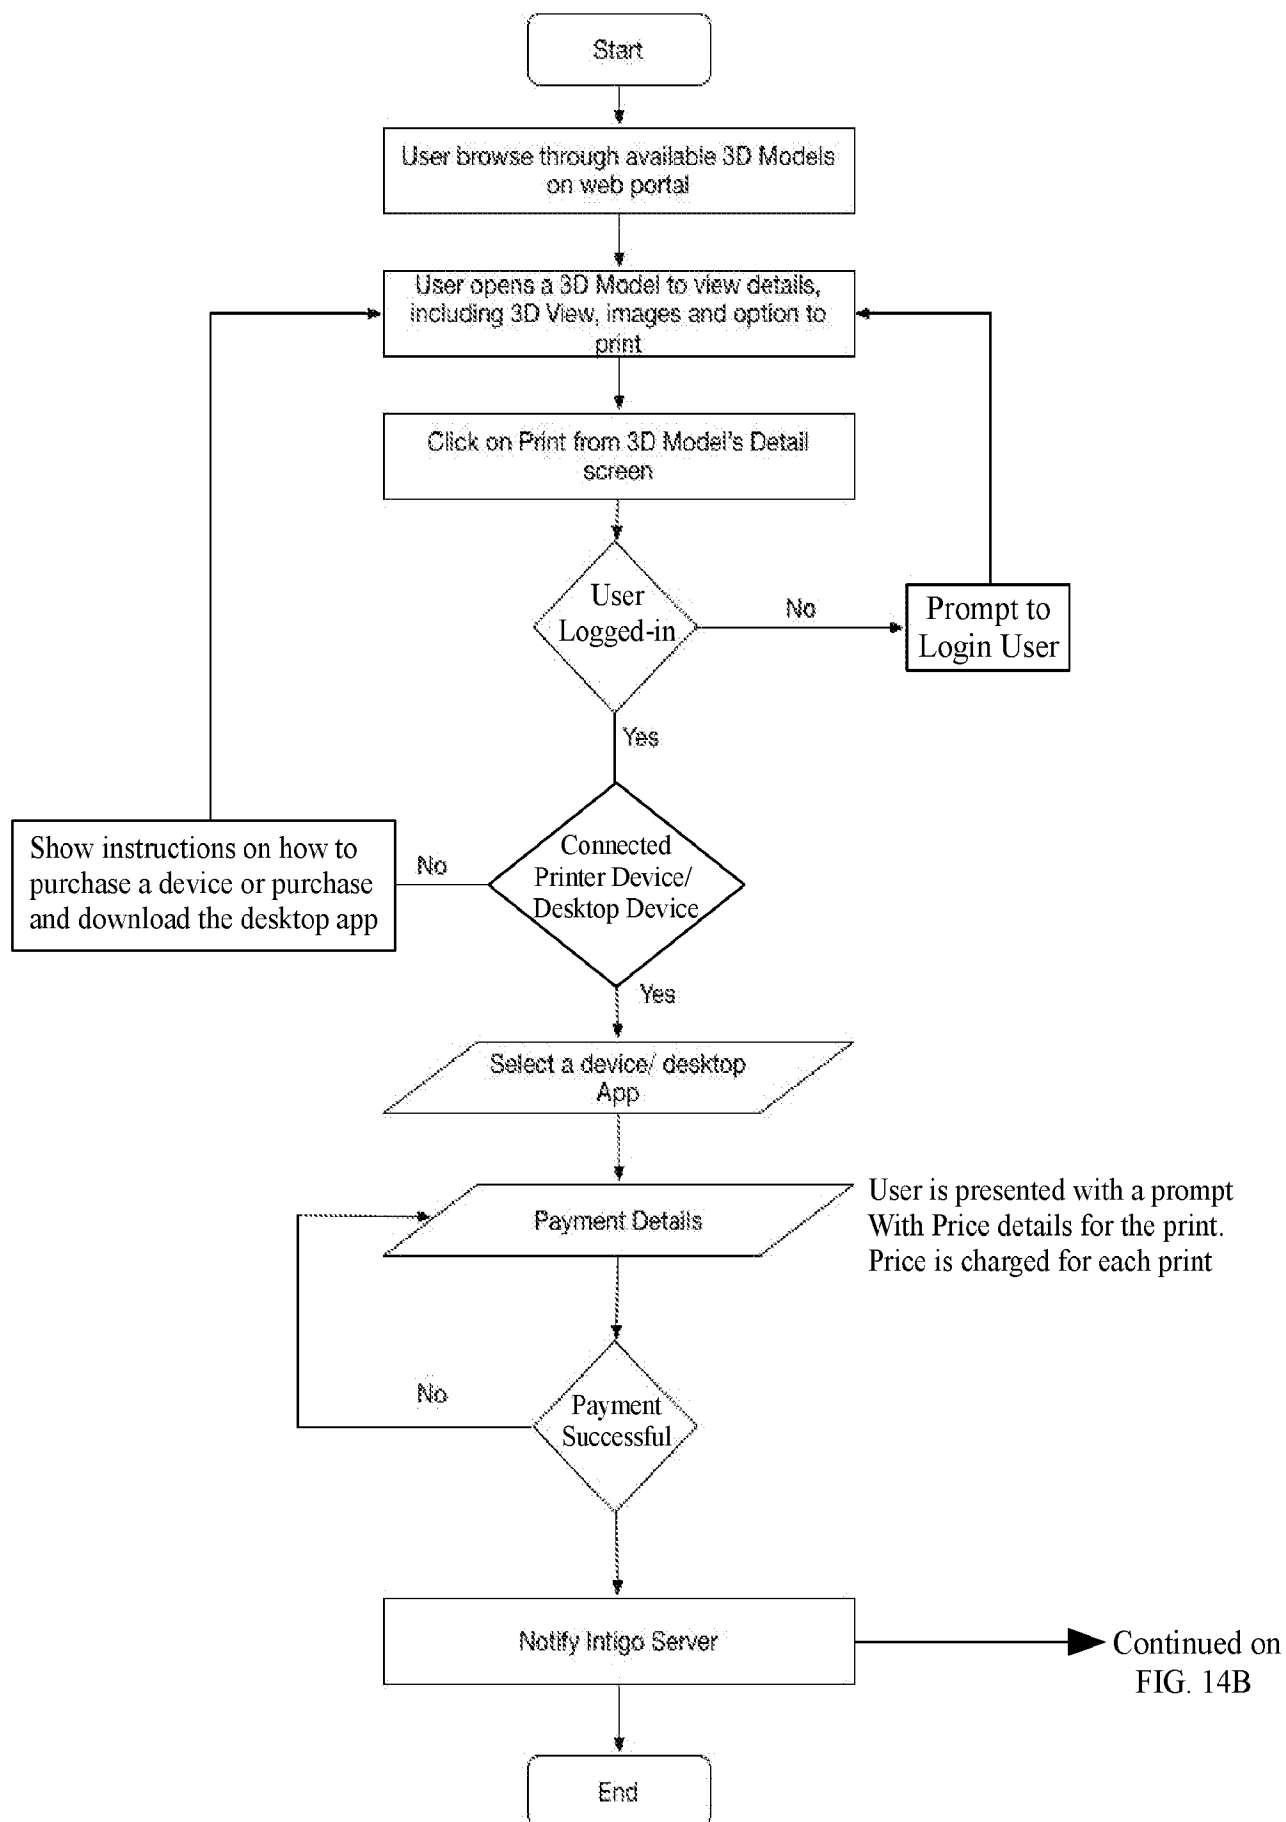


FIG. 14A

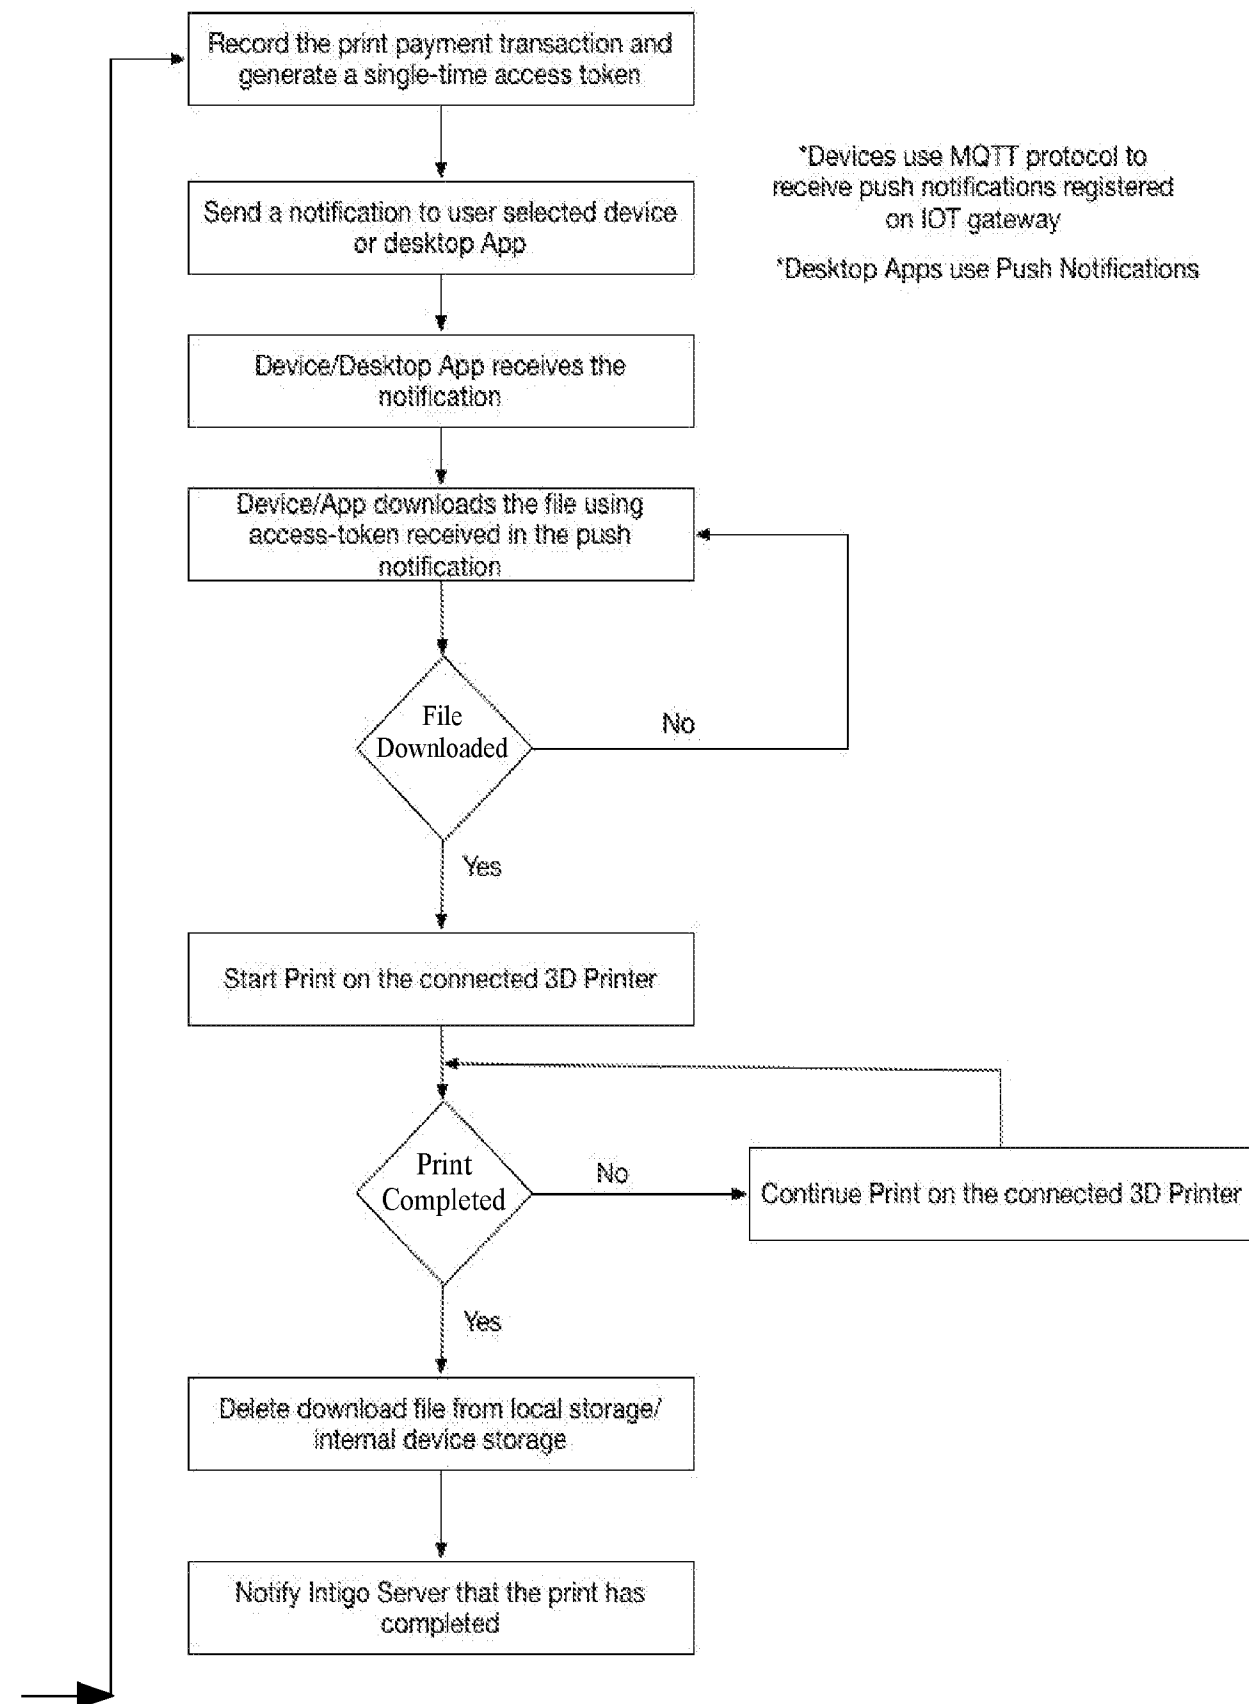

Continued
from
FIG. 14A

FIG. 14B

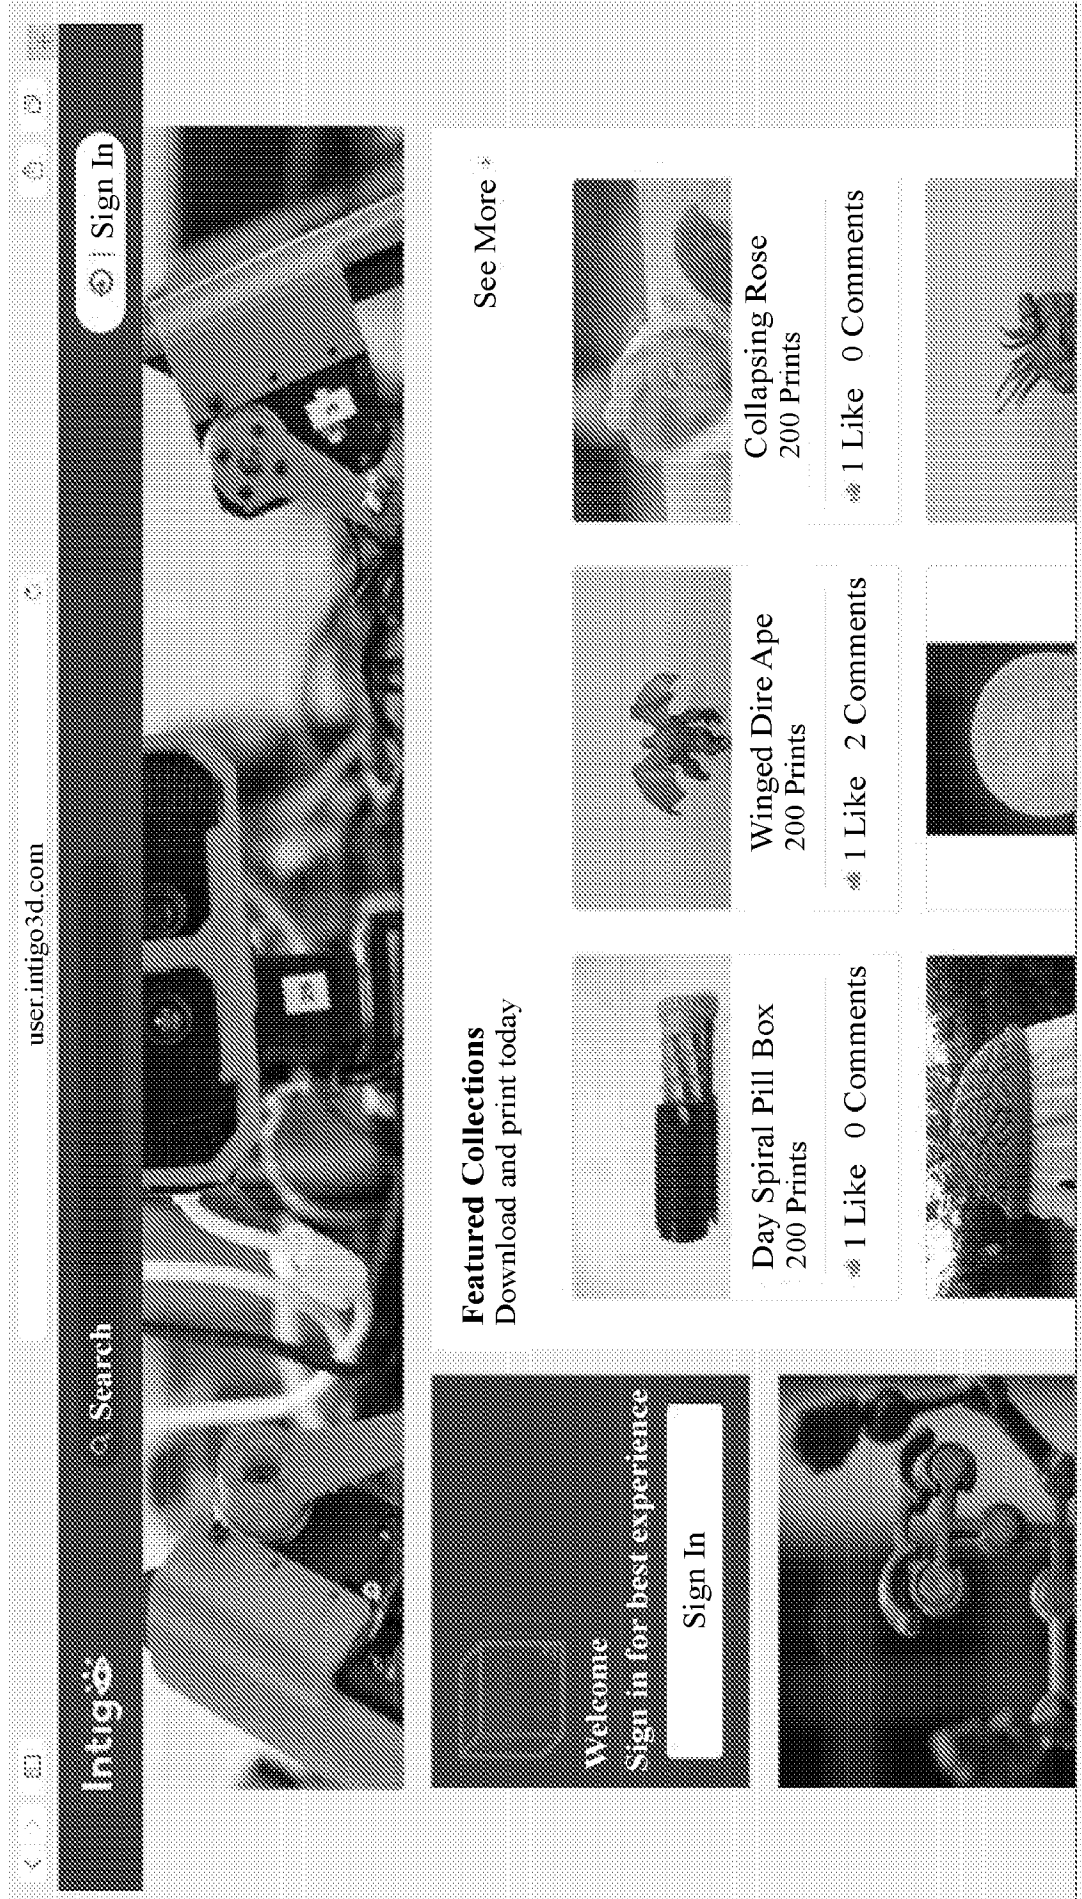


FIG. 15

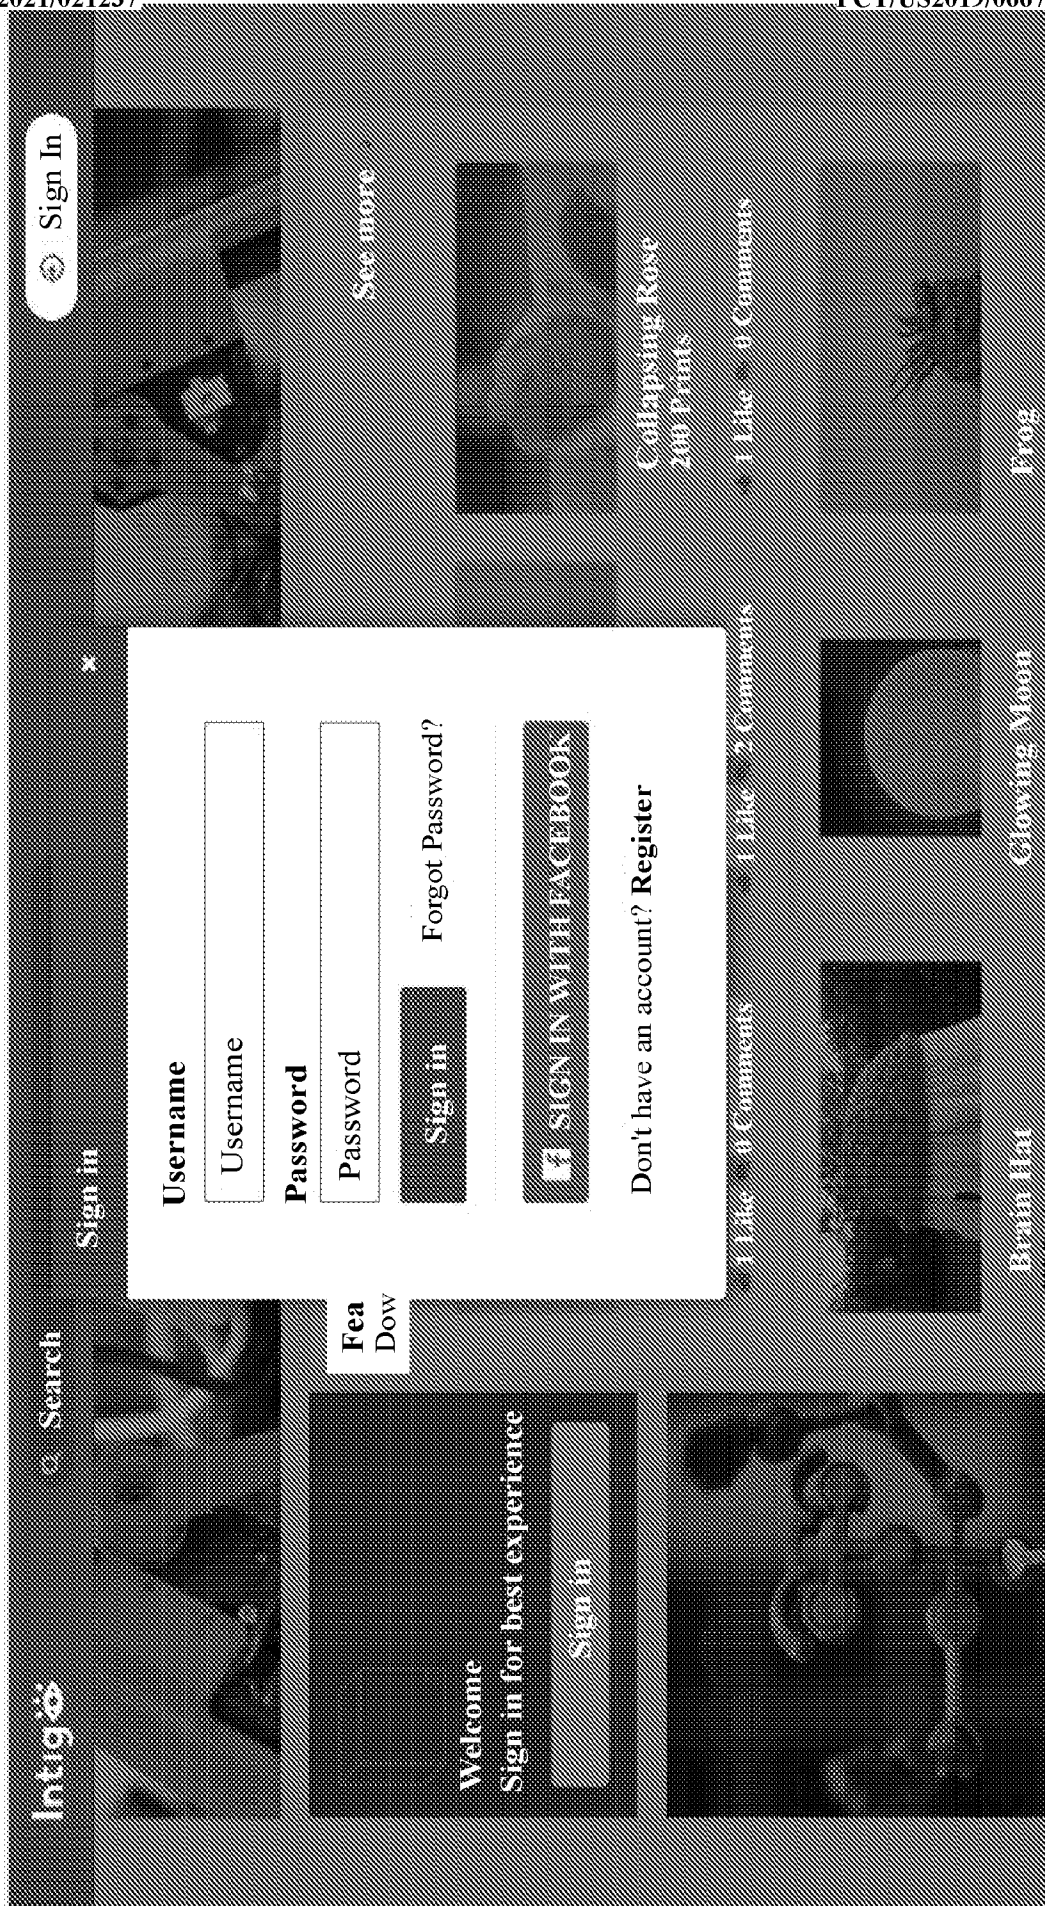


FIG. 16

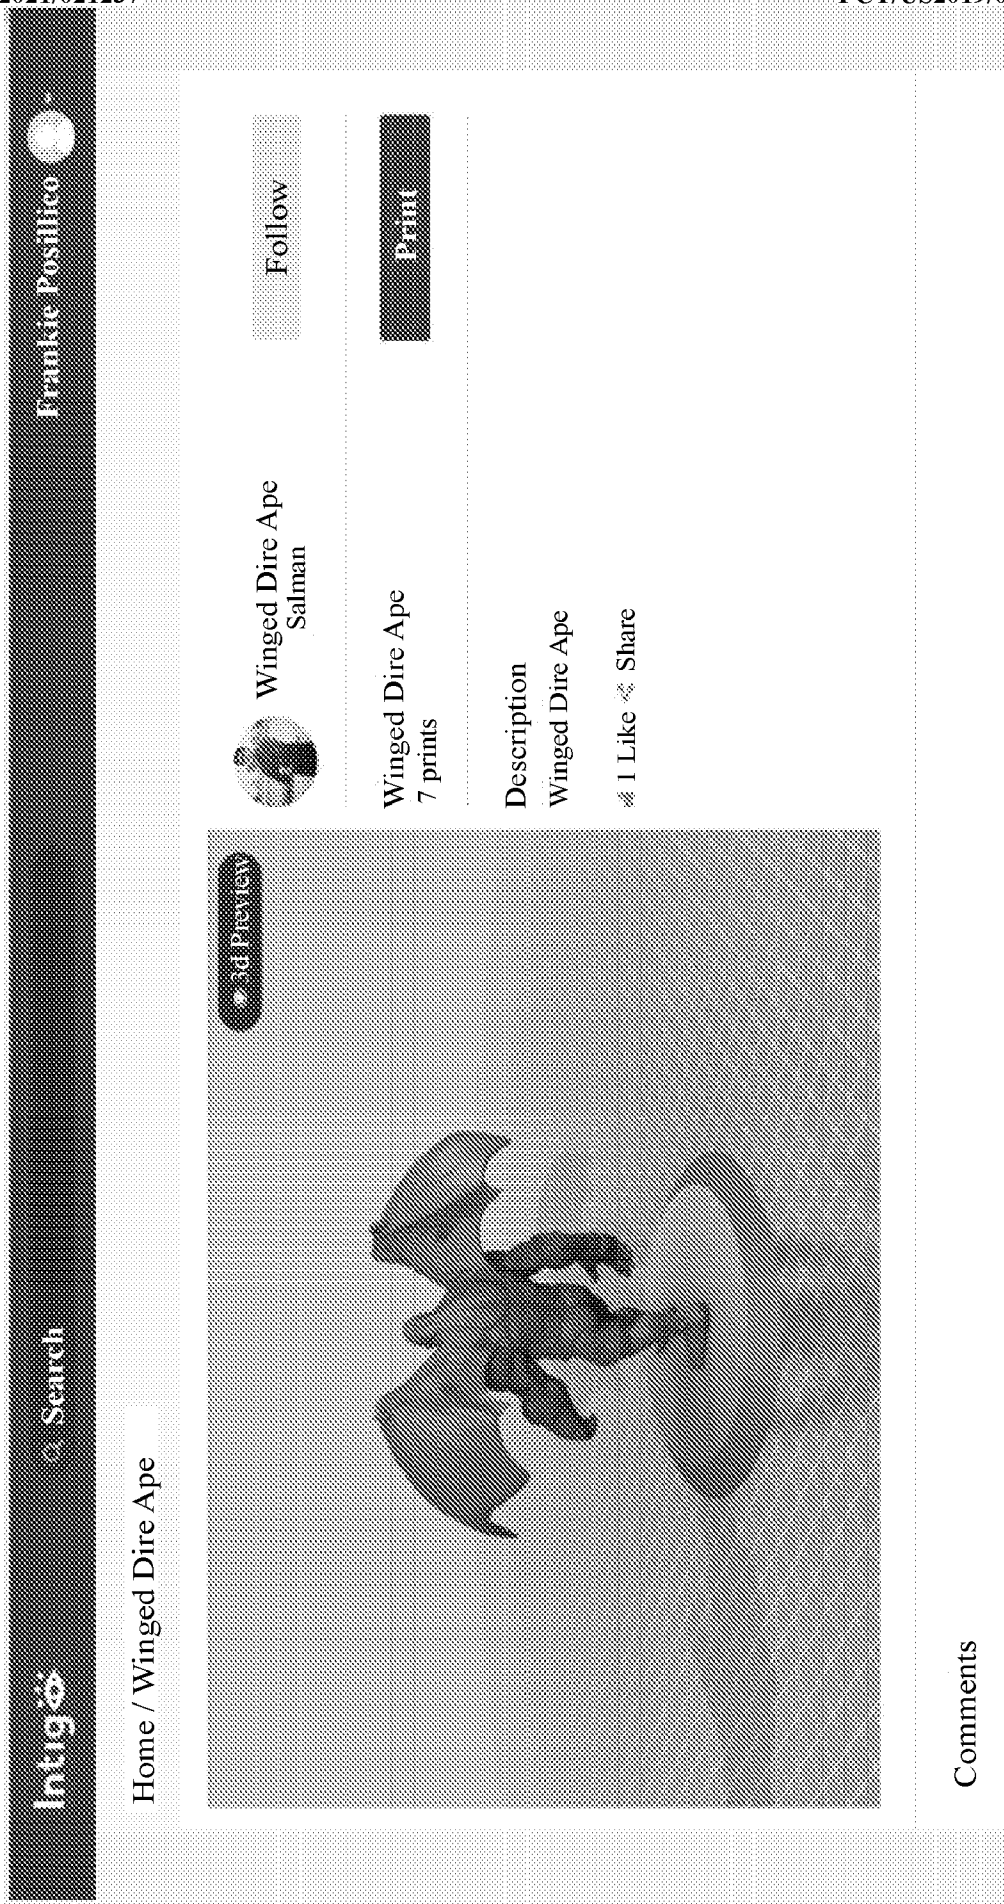


FIG. 17

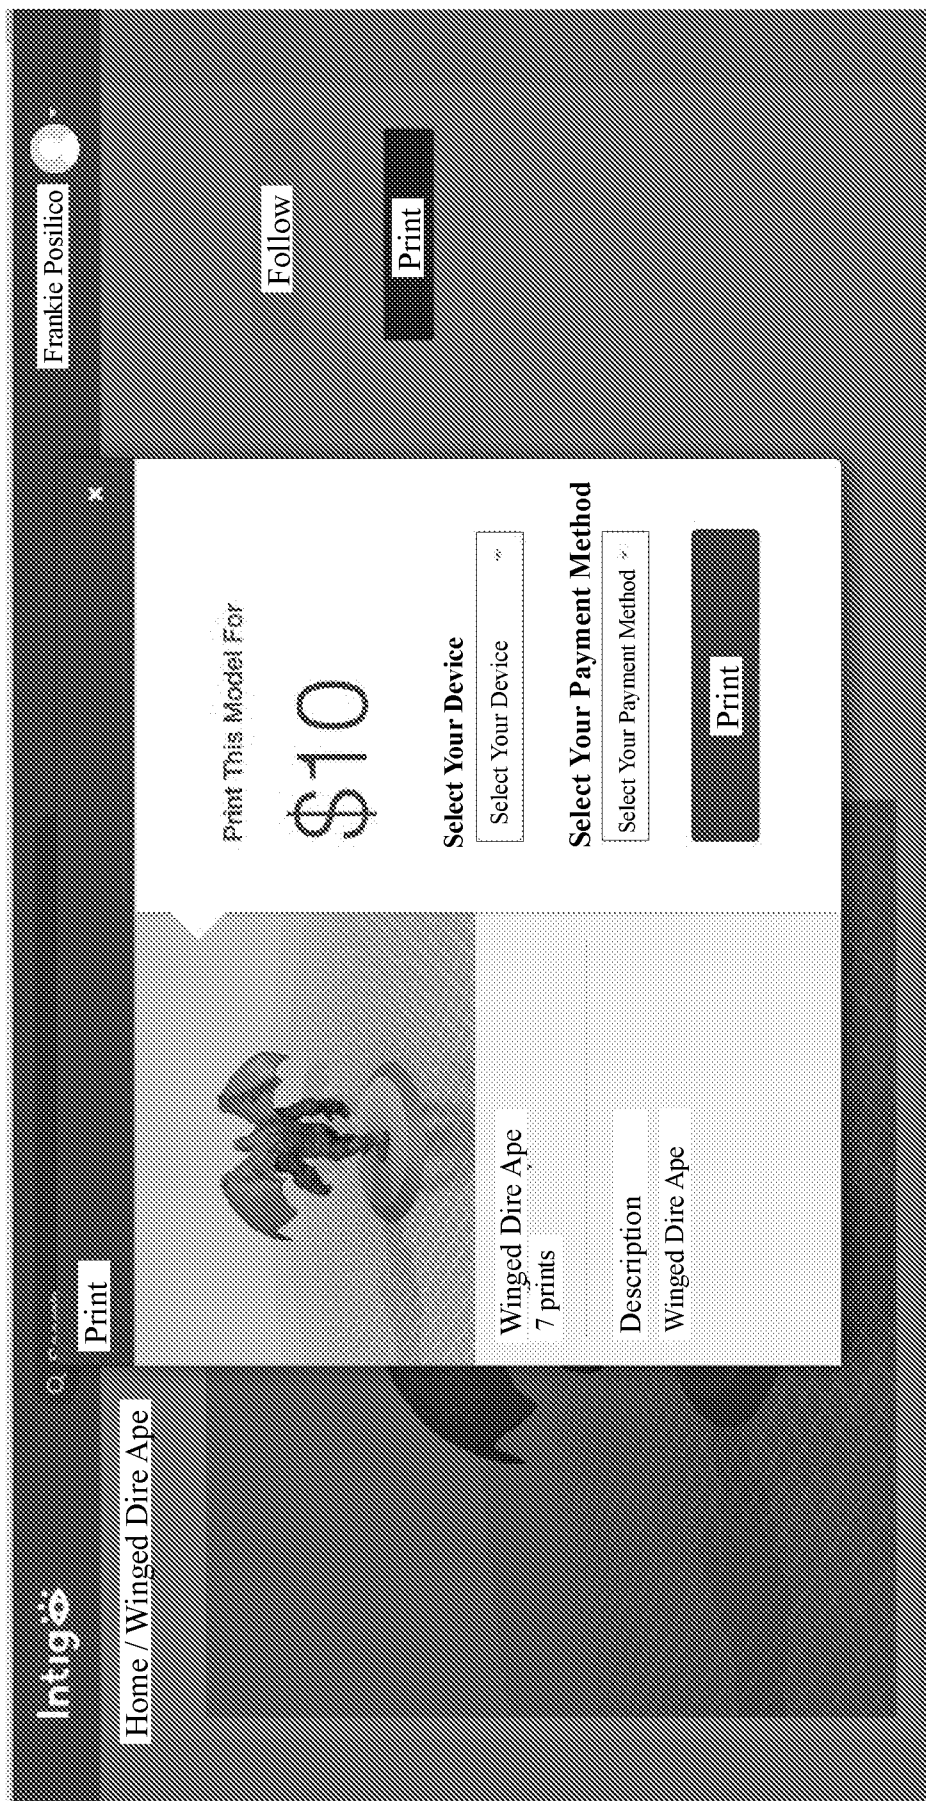


FIG. 18

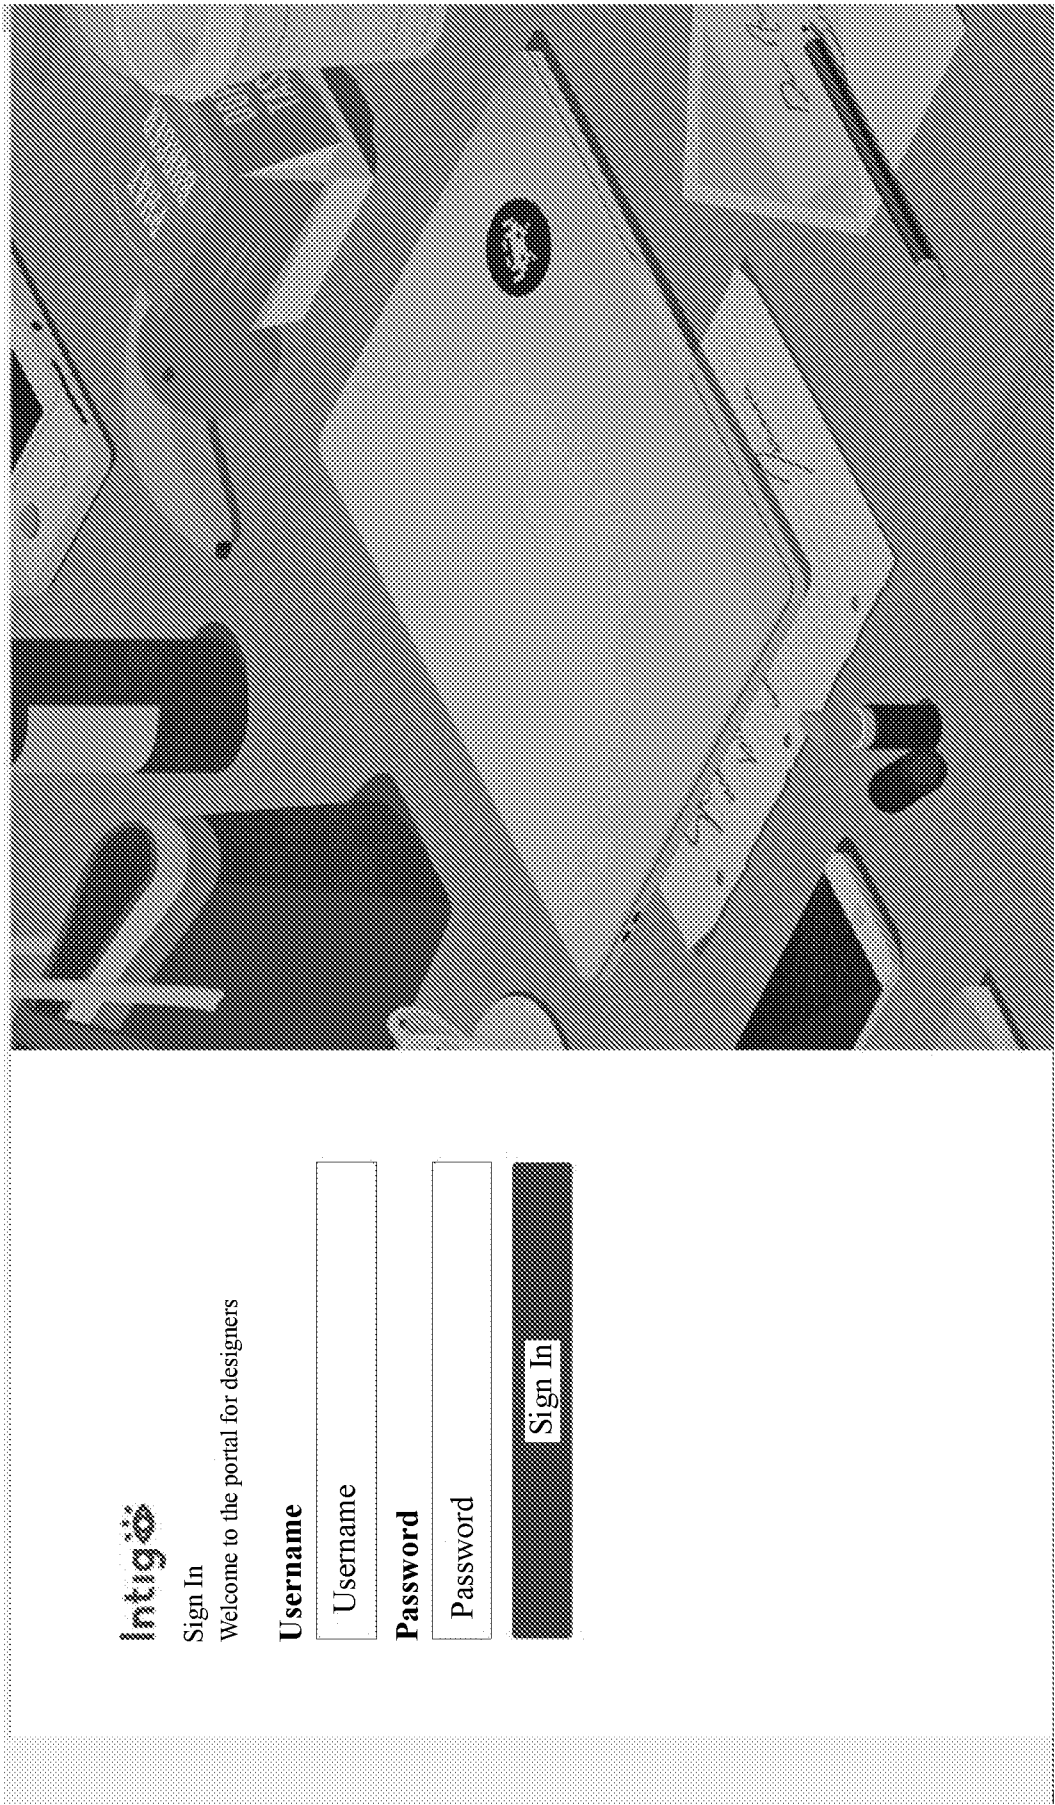


FIG. 19



FIG. 20

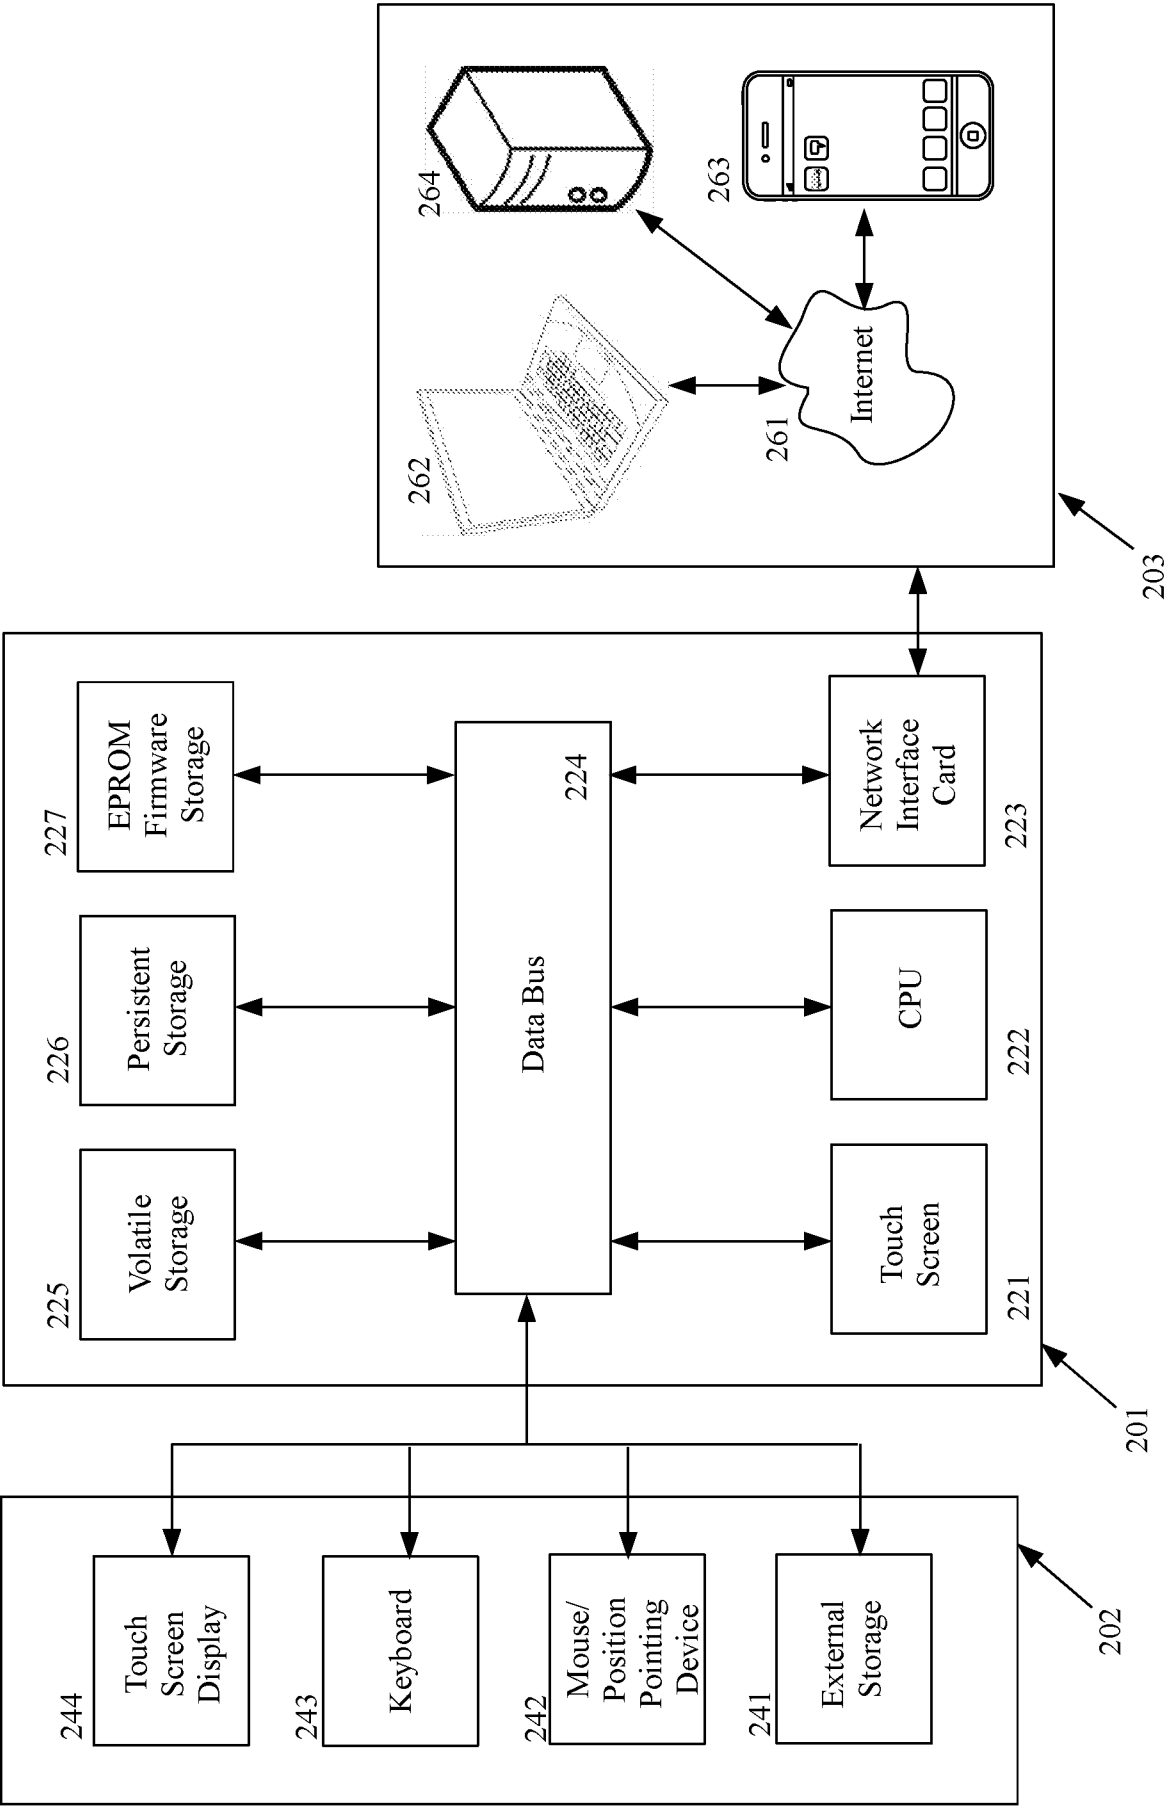


FIG. 21

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2019/066750

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06Q20/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06Q G07G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 3 226 165 A1 (MILAZOO ANDREA MARIA) 4 October 2017 (2017-10-04) paragraph [0001] paragraph [0005] - paragraph [0006] paragraph [0010] paragraph [0015] paragraph [0030] paragraph [0044] paragraph [0054] paragraph [0060] paragraph [0068] - paragraph [0069] paragraph [0073] paragraph [0088] ----- -/-	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 April 2020

Date of mailing of the international search report

08/05/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Stark, Konrad

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2019/066750

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2017/206523 A1 (GOERINGER STEVEN JOHN [US] ET AL) 20 July 2017 (2017-07-20) paragraph [0134] - paragraph [0138] paragraph [0164] paragraph [0179] - paragraph [0180] -----	1-13
X	YOJI YAMATO ET AL: "Proposal of Real Time Predictive Maintenance Platform with 3D Printer for Business Vehicles", ARXIV.ORG, CORNELL UNIVERSITY LIBRARY, 201 OLIN LIBRARY CORNELL UNIVERSITY ITHACA, NY 14853, 30 November 2016 (2016-11-30), XP081396788, sections 2, 4 -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2019/066750

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 3226165	A1	04-10-2017	AU 2017201867 A1 12-10-2017
			EP 3226165 A1 04-10-2017
			US 2017279783 A1 28-09-2017

US 2017206523	A1	20-07-2017	NONE
