



(86) Date de dépôt PCT/PCT Filing Date: 2007/04/24

(87) Date publication PCT/PCT Publication Date: 2007/11/08

(45) Date de délivrance/Issue Date: 2013/12/17

(85) Entrée phase nationale/National Entry: 2008/10/24

(86) N° demande PCT/PCT Application No.: US 2007/010149

(87) N° publication PCT/PCT Publication No.: 2007/127312

(30) Priorité/Priority: 2006/04/25 (US60/794,604)

(51) Cl.Int./Int.Cl. *H04L 12/24* (2006.01)

(72) Inventeurs/Inventors:

LEVY, JOSEPH S., US;
GRANDHI, SUDHEER A., US;
RUDOLF, MARIAN, CA;
ZUNIGA, JUAN CARLOS, CA


(73) Propriétaire/Owner:

INTERDIGITAL TECHNOLOGY CORPORATION, US

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : FONCTIONNEMENT DE CANAL A HAUT DEBIT DANS UN RESEAU SANS FIL DE ZONE LOCALE MAILLE

(54) Title: HIGH-THROUGHPUT CHANNEL OPERATION IN A MESH WIRELESS LOCAL AREA NETWORK

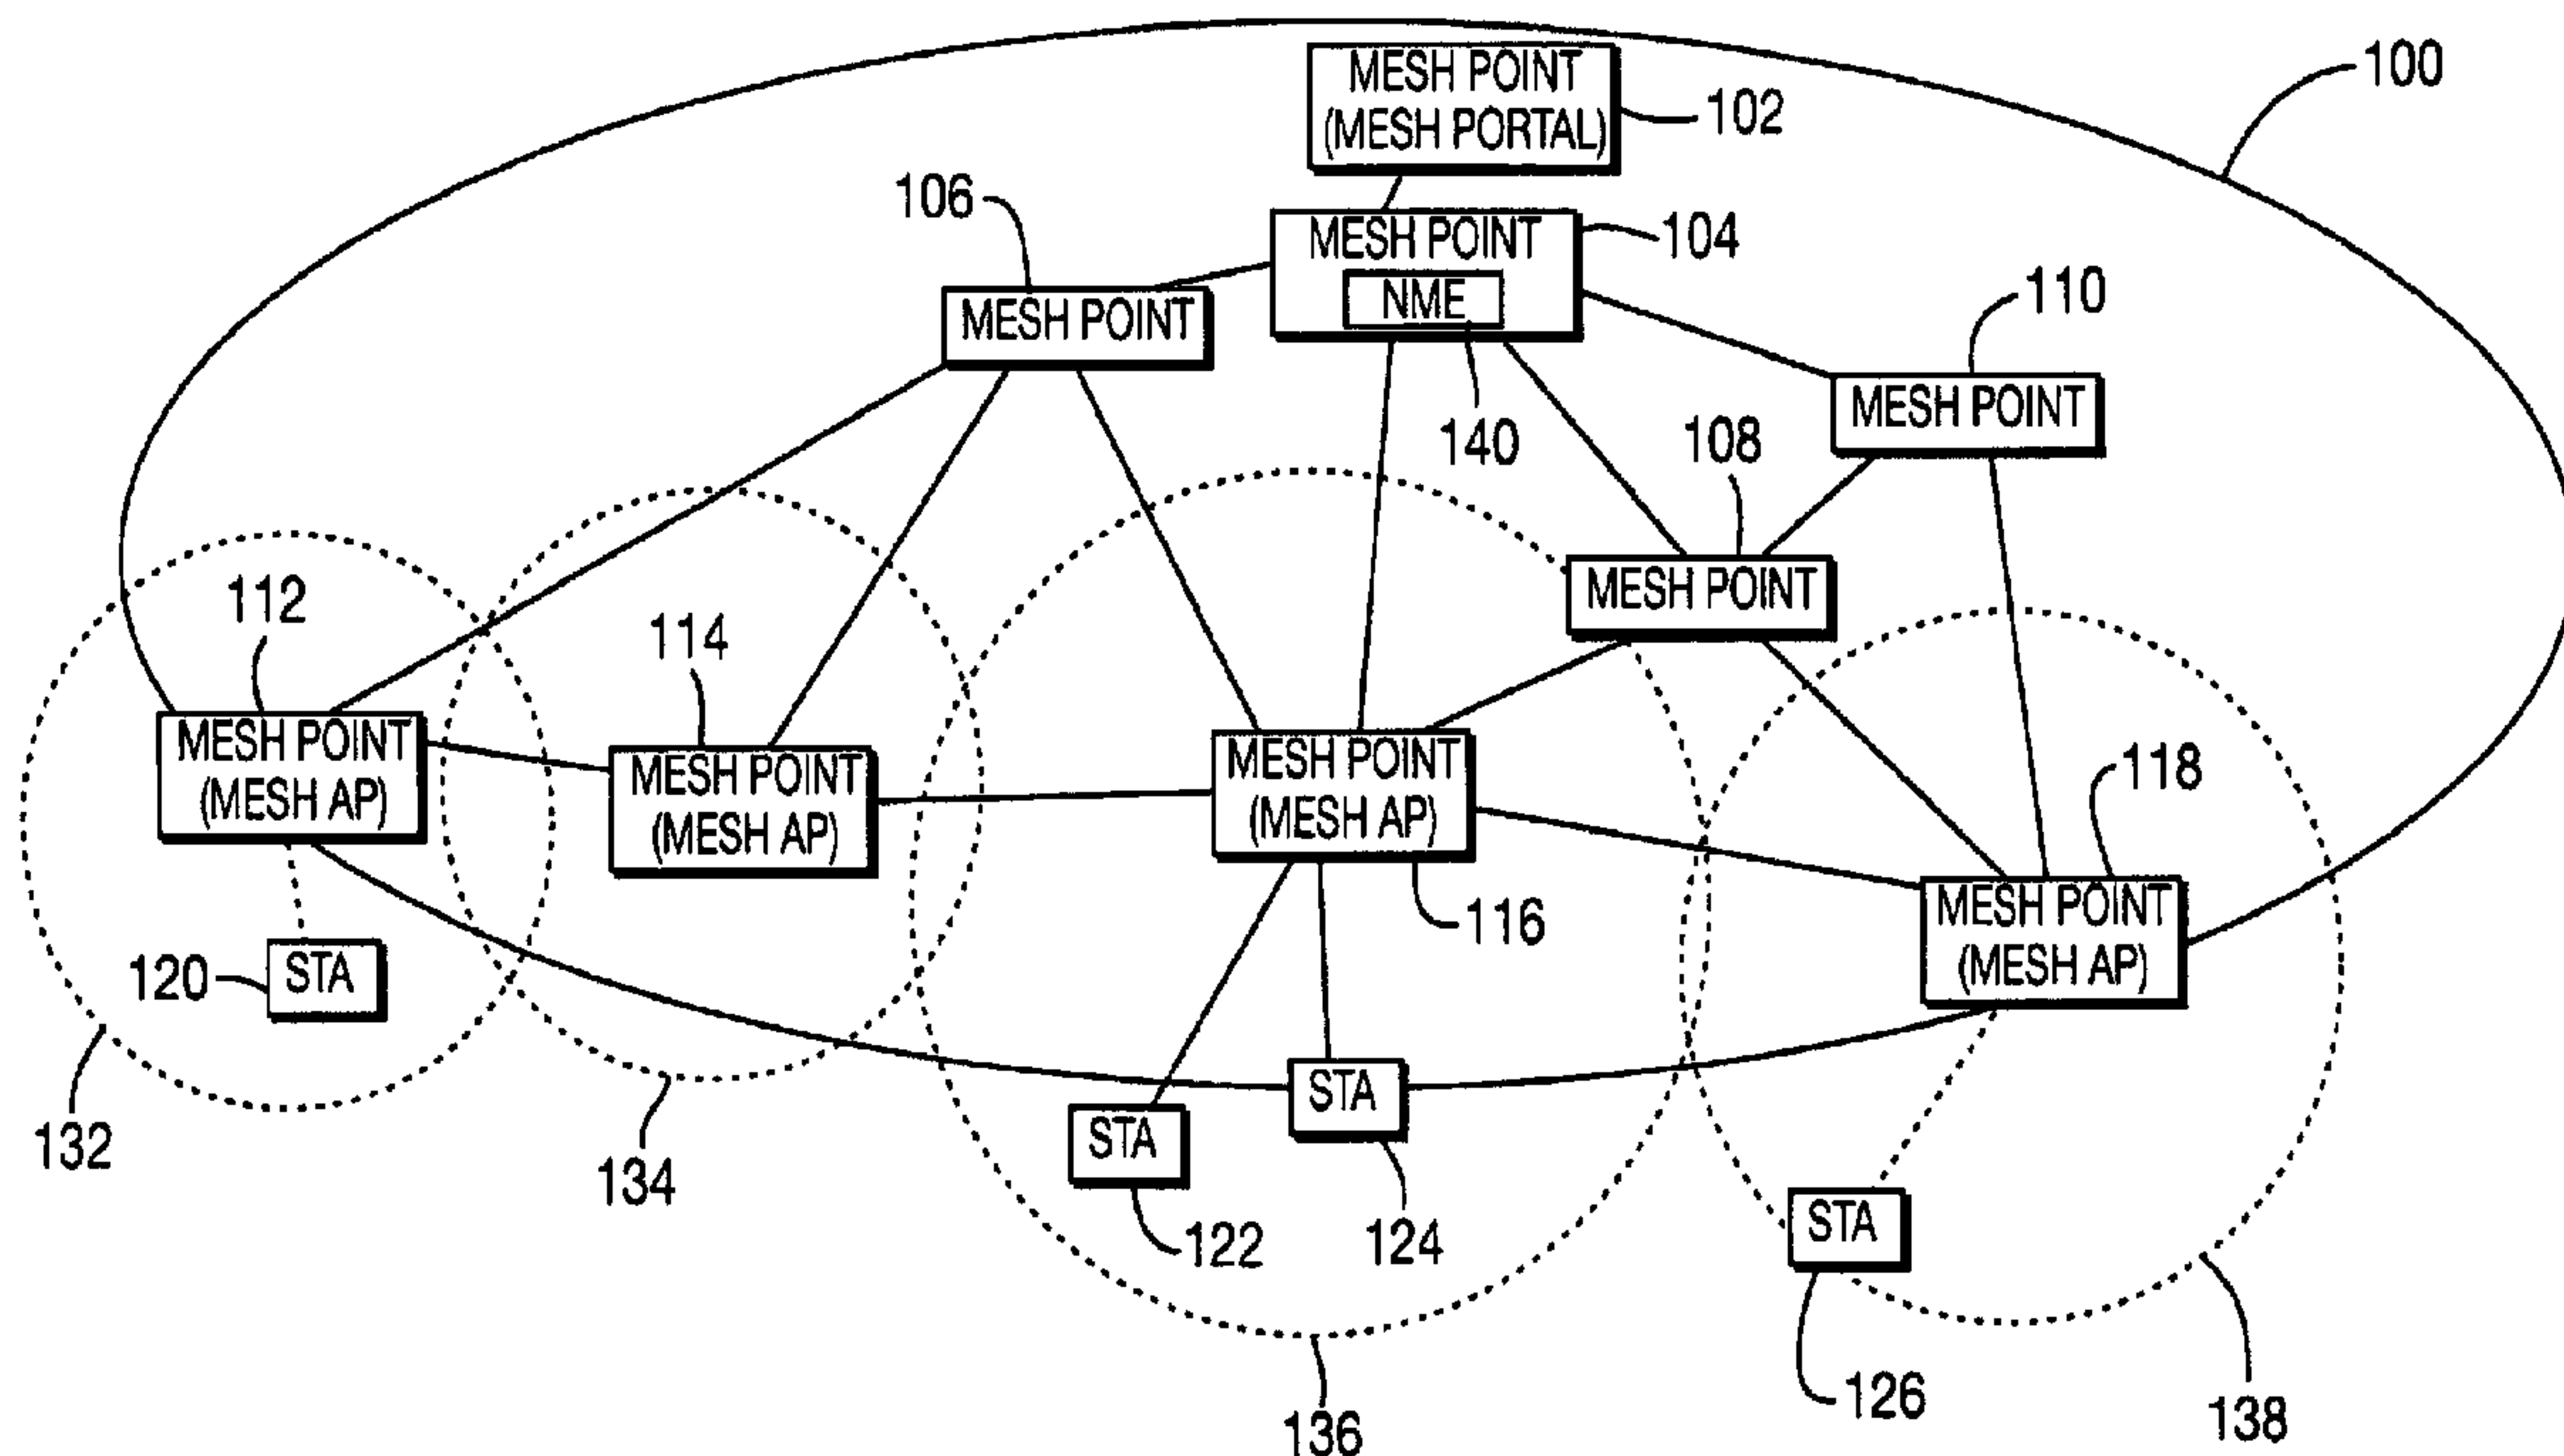

(57) Abrégé/Abstract:

High throughput channel operation in a mesh wireless local area network (WLAN) is disclosed. A mesh network comprises a plurality of mesh points and a network management entity (NME). The NME is configured to retrieve capability and configuration data from the mesh points. The NME configures at least one mesh point with respect to IEEE 802.11n channelization and legacy protection mode based on the capability and configuration data.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
8 November 2007 (08.11.2007)

PCT

(10) International Publication Number
WO 2007/127312 A3

(51) International Patent Classification:

H04L 12/24 (2006.01)

(21) International Application Number:

PCT/US2007/010149

(22) International Filing Date: 24 April 2007 (24.04.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/794,604 25 April 2006 (25.04.2006) US

(71) Applicant (for all designated States except US): **INTER-****DIGITAL TECHNOLOGY CORPORATION** [US/US];

3411 Silverside Road, Concord Plaza, Suite 105, Hagley Building, Wilmington, Delaware 19810 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RUDOLF, Marian**

[DE/CA]; 1958 Rue Workman, Montreal, Québec H3J 2P3

(CA). **ZUNIGA, Juan, Carlos** [MX/CA]; 955 Rue GohierVille St. Laurent, Montreal, Québec H4L 3J4 (CA). **LEVY,****Joseph, S.** [US/US]; 26 East Webster Street, Merrick, NewYork 11566 (US). **GRANDHI, Sudheer A.** [US/US]; 1605

North James Street, Mamaroneck, New York 10543 (US).

(74) Agent: **BALLARINI, Robert, J.**; Volpe And Koenig, P.c.,

United Plaza, Suite 1600, 30 S. 17th Street, Philadelphia, Pennsylvania 19103 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:

27 December 2007

[Continued on next page]

(54) Title: HIGH-THROUGHPUT CHANNEL OPERATION IN A MESH WIRELESS LOCAL AREA NETWORK

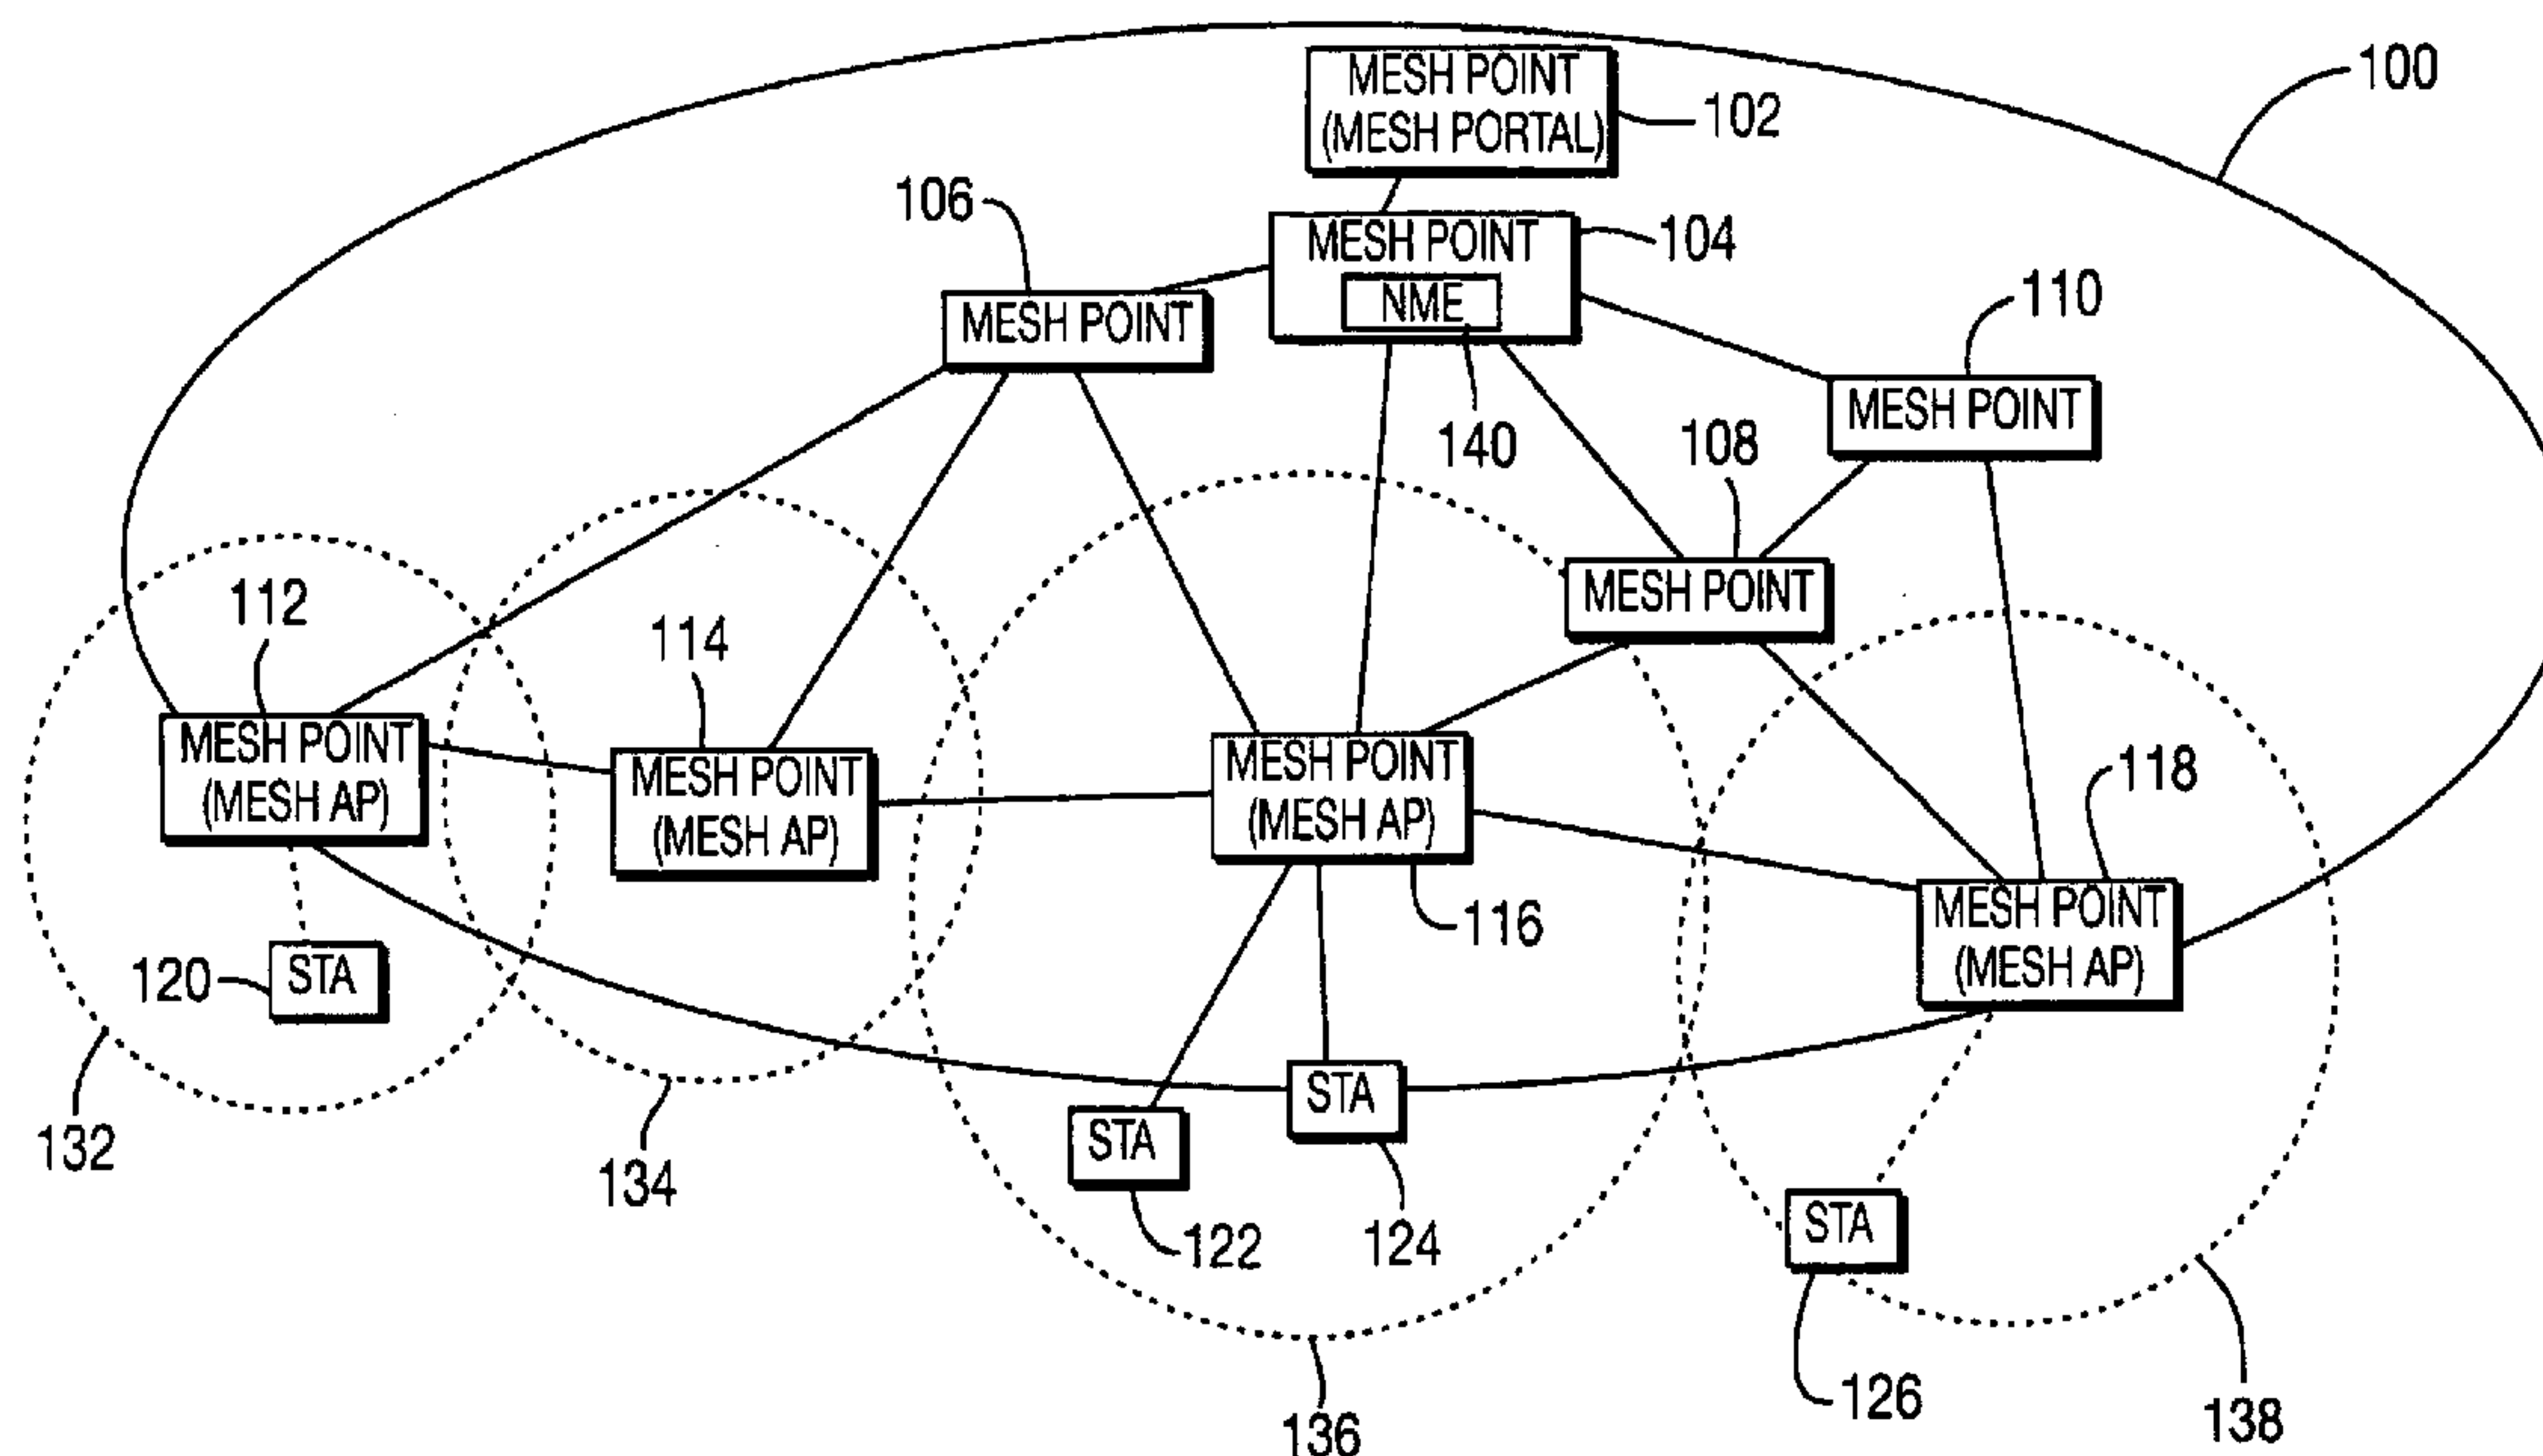

(57) Abstract: High throughput channel operation in a mesh wireless local area network (WLAN) is disclosed. A mesh network comprises a plurality of mesh points and a network management entity (NME). The NME is configured to retrieve capability and configuration data from the mesh points. The NME configures at least one mesh point with respect to IEEE 802.11n channelization and legacy protection mode based on the capability and configuration data.

WO 2007/127312 A3

WO 2007/127312 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**[0001] HIGH-THROUGHPUT CHANNEL OPERATION
IN A MESH WIRELESS LOCAL AREA NETWORK**

[0001] FIELD OF INVENTION

[0002] The present invention is related to wireless local area networks (WLANs). More specifically, the present invention is related to high throughput channel operation in a mesh WLAN.

[0003] BACKGROUND

[0004] IEEE 802.11s is a draft specification for providing a means to form a mesh wireless backhaul with IEEE 802.11 WLAN technology. Mesh networks are also known as multi-hop networks, since data packets may be relayed more than once in order to reach their destination. This presents a different paradigm as compared to the original WLAN standard, which addresses only star topologies for stations (STAs) to be connected to an access point (AP) effectively using single hop communications through a basic service set (BSS).

[0005] IEEE 802.11s only addresses network nodes that form a mesh network and the WLAN mesh operation in the backhaul that is transparent to all STAs. This means that, similar to legacy IEEE 802.11 WLAN, STAs still connect to an AP, (i.e., mesh AP having a mesh capability), through a BSS. The mesh AP interfaces on its backhaul side to other mesh points which forward and route traffic through the mesh network to a destination. The destination may be a mesh portal which routes the traffic to the external network or may be another mesh AP attached to the mesh network. By choosing this approach, even legacy STAs may still operate in a mesh-enabled WLAN. The communication between STAs and a mesh AP in a BSS is completely independent from the mesh network. The STAs are unaware of the presence of the mesh network in the backhaul.

[0006] The IEEE 802.11s WLAN mesh standard has been designed under the assumption that legacy IEEE 802.11a/b/g radio interface may be implemented on the mesh points. The IEEE 802.11s standard is mostly radio

interface agnostic. For example, routing and forwarding of data packets are not dependent on the particularities of an IEEE 802.11a/b/g radio interfaces, (such as modulation scheme or channel coding).

[0007] IEEE 802.11s also allows different ways for simultaneous multi-channel operation. One way to implement multi-channel operation is to use multiple IEEE 802.11 radio devices on a mesh point in order to increase the available data throughput capability. Another possibility is to use a single radio device, (so-called common channel framework (CCF)), for more than one channel.

[0008] IEEE 802.11n specification is another specification for providing a high throughput (HT) WLAN. Some of the IEEE 802.11n throughput-enhancing features are aggregation, enhanced block acknowledgement (BA), reverse direction grant, power save multiple poll (PSMP), and operational bandwidth. In IEEE 802.11n, a data rate is increased by annexing or bonding two adjacent channels. The data rate increase is also achieved by using several more data tones with 802.11 40 MHz operation relative to 2×20 MHz channel occupancy with 802.11a/g. However, not all IEEE 802.11n devices may support 40 MHz operation and, therefore, the transition of operation from 20 MHz to 40 MHz should be managed efficiently. In order to achieve this, the IEEE 802.11n standard provides some channel management mechanisms.

[0009] In IEEE802.11n, three operating modes are allowed according to bandwidth and BSS capability: 20 MHz operation, 20/40 MHz operation and Phased Coexistence Operation (PCO). Each of these modes has associated rules of operation. In a 20 MHz operation, all STAs will operate only in a 20 MHz mode whether or not the STAs are 20 MHz or 20/40 MHz capable. In a 20/40 MHz operation, STAs choose the bandwidth by using a transmission channel width action message. In addition, a 40 MHz device will protect its transmission with legacy control frames such as request-to-send (RTS) or clear-to-send (CTS) frames, if the AP of its BSS indicates that there are 20 MHz and/or legacy STAs in the BSS. In the PCO mode, which is an optional mechanism, the BSS alternates between 20 MHz and 40 MHz modes.

[0010] Although the IEEE 802.11s WLAN mesh standard attempts to

remain radio agnostic to the largest extent possible, integration of an IEEE 802.11n high-throughput radio, instead of an 802.11a/b/g, still poses several problems. For example, unlike previous IEEE 802.11a/b/g systems that operate only in 20 MHz bandwidth, IEEE 802.11n operates in both 20 MHz and 40 MHz bandwidths.

[0011] With Enhanced Distributed Channel Access (EDCA)-based mesh channel access mode, when a mesh point contends and gets an access to the channel, mesh points on a particular link or in a neighborhood have to agree either before the channel access or during the channel access about the specifics of the channelization scheme to be used, (i.e., 20 MHz vs. 40 MHz). Moreover, IEEE 802.11n uses a slightly altered sub-carrier configuration when using full 40 MHz mode, (i.e., using a higher number of data tones when operating in 40 MHz mode compared to dual channel 2×20 MHz 802.11a radios). Dual 2×20 MHz channel operation is also possible for coexistence with legacy radios. Because current IEEE 802.11s technology only allows orthogonal frequency division multiplexing (OFDM) parameters to be communicated to advertise current channel identification to neighbor MPs, the use of IEEE 802.11n radios in an IEEE 802.11s WLAN mesh networks is severely limited due to the limitation with legacy 20 MHz mode even if an IEEE 802.11n radio is used.

[0012] Another problem with the current IEEE 802.11s WLAN mesh networks is the set-up and configuration of a particular mesh link, a neighborhood in the mesh or the entire mesh network with respect to high-throughput channelization modes and configurations to be used. For example, it is currently not possible to prevent or allow the use of 40 MHz access in either version (full 40 MHz or 2×20 MHz) on a particular link, in a mesh neighborhood, or for the entire mesh. This is a limitation with the current IEEE 802.11s technology in the sense that it constitutes an obstacle towards efficient use of 802.11n radios and all the proposed IEEE 802.11n enhancements with WLAN mesh technology.

[0013] Therefore, it would be desirable to have a scheme to overcome the above shortcomings and allow efficient integration of IEEE 802.11n radios into

IEEE 802.11s WLAN mesh networks.

[0014] SUMMARY

[0015] The present invention is related to high throughput channel operation in a mesh WLAN. A mesh network comprises a plurality of mesh points and a network management entity (NME). The NME is configured to retrieve capability and configuration data from the mesh points. The NME configures at least one mesh point with respect to IEEE 802.11n channelization and legacy protection mode based on the capability and configuration data.

[0016] BRIEF DESCRIPTION OF THE DRAWING

[0017] A more detailed understanding of the invention may be had from the following description of a preferred embodiment, given by way of example and to be understood in conjunction with the accompanying drawing wherein:

[0018] Figure 1 is a diagram of a mesh network in accordance with the present invention.

[0019] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0020] When referred to hereafter, the terminology "STA" includes but is not limited to a wireless transmit/receive unit (WTRU), a user equipment (UE), a fixed or mobile subscriber unit, a pager, a cellular telephone, a personal digital assistant (PDA), a computer, or any other type of user device capable of operating in a wireless environment. When referred to hereafter, the terminology "AP" includes but is not limited to a Node-B, a site controller, a base station, or any other type of interfacing device capable of operating in a wireless environment.

[0021] Figure 1 is a diagram of a mesh network 100 in accordance with the present invention. The mesh network 100 comprises a plurality of mesh points 102-118. The mesh network 100 may include a mesh portal 102. The mesh portal 102 is a mesh point that has a connection with an external network, (e.g., a wired network). Some of the mesh points may be mesh APs 112-118. Each of the mesh APs 112-118 is a mesh point that also works as an AP in its own BSS

132-138. On one side, the mesh AP 112-118 acts as a non-mesh AP to serve STAs 120-126 in its BSS, and on the other side, the mesh AP 112-118 acts as a wireless bridge to receive, forward and route packets through the mesh network 100. An NME 140 is provided to the mesh network 100. The NME 140 may be included in one or more mesh points 102-118 in the mesh network 100. For illustration purposes, Figure 1 shows only one NME 140 located in mesh point 104. However, the NME may be located in any mesh point 102-118 and more than one NME may be provided to the mesh network 100. Alternatively, the NME 140 may be located out of the mesh network 100 and communicate with the mesh network 100 through the mesh portal 102. Among the mesh points 102-118, at least one mesh point is IEEE 802.11n-capable.

[0022] The NME 140 retrieves capability and configuration data from the mesh points 102-118 and configures the mesh points 102-118 with respect to IEEE 802.11n channelization mode, (i.e., 20 MHz, 2×20 MHz, or 40 MHz), legacy protection mode and any other configuration for a particular mesh link, a particular mesh point, a subset of mesh points in the mesh network 100, or the entire mesh network 100. The mesh points 102-118 may be divided into subsets based on a particular link or any other logical criteria. For example, if the NME 140 knows from capability and configuration data from the mesh points 102-118 that there is one or more mesh points that use the legacy physical layer transmission format, (e.g., IEEE 802.11a/b/g), and/or legacy STAs in the mesh network 100 or a subset of the mesh network 100, the NME 140 configures the mesh points in the vicinity of such mesh points and STAs to use legacy physical layer transmission format, (e.g., legacy RTS/CTS frames), to precede any transmissions from IEEE 802.11n-based mesh points. For example, a mesh point using a 40 MHz bandwidth, (i.e., an MP using IEEE 802.11n physical layer transmission format), will protect its transmission with legacy control frames, such as request-to-send (RTS) or clear-to-send (CTS) frames.

[0023] Exemplary capability and configuration data that may be retrieved by the NME 140 is shown in Table 1. The NME 140 configures the mesh points 102-118 such that either the mesh network 100 is coherent and similar

capabilities are supported across the whole mesh network 100 to support the minimum common parameter, or at least peer mesh points in a particular wireless link are configured coherently.

802.11n Enhancements	Required Level of Support
Physical (PHY) level spoofing	Mandatory. The length field of the legacy signal (L-SIG) field of a mixed mode packet shall have a value equivalent to the duration of the current physical level convergence procedure protocol data unit (PPDU) when L-SIG transmission opportunity (TXOP) protection is not used.
Mechanisms to manage coexistence of 20 and 40 MHz channels.	Mandatory Both transmitter and receiver shall support
Channel management and selection methods.	Mandatory Both transmitter and receiver shall support
Reduced Inter-Frame Spacing (RIFS) Protection	Mandatory
Green Field Protection	Mandatory
Space time block codes (STBC) Control Frames	STBC Control Frames allow stations to associate beyond the non-STBC range.
L-SIG TXOP Protection	Optional TXOP protection through L-SIG.
PCO (Phased Coexistence Operation)	Optional PCO is an optional BSS mode with alternating 20 MHz phase and 40 MHz phase controlled by PCO AP. A PCO capable STA may associate with the BSS as a PCO STA.

Table 1

[0024] The capability and configuration data of the mesh points 102-118 may be stored in a data base in a mesh point 102-118, or in the NME 140. Alternatively, the database may reside outside the mesh network 100.

[0025] The NME 140 may request the capability and configuration data from the mesh points 102-118 during the association process, or shortly after the mesh point 102-118 undergoes an association process with the mesh network 100. The retrieval of the capability and configuration data may be a part of the association process, or may be performed separately. The mesh points 102-118 may send the capability and configuration data in response to a request from the NME 140. Alternatively, the mesh points 102-118 may report the capability and configuration data to the NME 140 without solicitation from the NME 140. Polling may be used to trigger the reporting of the capability and configuration

data.

[0026] The NME 140 configures all or part of the mesh network 100 with respect to IEEE 802.11n channelization mode, (i.e., 20 MHz, 2×20 MHz, or 40 MHz), configuration, and legacy protection mode based on the capability and configuration data collected from the mesh points 102-118. The configuration may be coupled to a timer such that the configuration is valid for only a certain period of time. The timer may be triggered by a certain event, such as detection of a legacy STA. The configuration may be updated periodically. The NME 140 may configure a particular mesh link, a set of mesh links, a subset of mesh points, or the entire mesh network. The current configuration data, (i.e., IEEE 802.11n channelization mode, legacy protection mode, capability support, capability settings, configured conditions, (e.g., timers or events), and the like), of the mesh points 102-118 may be stored in a database, (e.g., management information base (MIB)), on the mesh points 102-118 or the NME 140.

[0027] The NME 140 may configure the mesh points 102-118 using a dedicated message exchange. Alternatively, the NME 140 may use multicast or broadcast messages to configure the mesh points 102-118. The signalling for the configuration may be performed using a conventional network signaling protocol at any layer of the protocol processing stack. For example, a simple network management protocol (SNMP) over user datagram protocol (UDP) over Internet Protocol (IP) may be used. Alternatively, layer 2 (L2) signalling frames of Eithertype or IEEE 802.3 or 802.11 type may be used.

[0028] IEEE 802.11n capable devices may use the 40 MHz option occupying another 20 MHz channel, (i.e., extension channel). In such case, a channel collision may occur on the extension channel. In order to avoid channel collision, the IEEE 802.11n-capable mesh points may block the extension channel for the 40 MHz operation from their channel map either by statically, semi-dynamically, or dynamically.

[0029] For the static configuration, the extension channel is marked as unavailable for IEEE 802.11n-capable mesh points during the start-up configuration. This may be pre-configured, for instance, by the service provider,

through a subscriber identity module (SIM)-card-like configuration, or through a software/driver download.

[0030] For the semi-dynamic configuration, the extension channel may be marked as unavailable by exchanging specific configuration information, (e.g., management frames, SNMP to MIB, or the like), between the IEEE 802.11n-capable mesh points and other mesh points. The extension channel may be set unavailable when collisions are detected. Collisions may be detected based on collected statistics. By way of example, SNMP and MIB are conventional and associated mechanisms that can be used. This configuration changes may happen when an IEEE 802.11n-capable mesh point joins the mesh network. Alternatively, the allowed, disallowed, or recommended channel or channel width configuration, legacy protection mode may be communicated between the mesh points during the association process.

[0031] For the dynamic configuration, the extension channel may be blocked in real-time and for a limited time, (e.g., channel coordination window, or a specific period), by exchanging control or management frames. For example, a mesh point wishing to use the extension channel may send a control frame marking the extension channel as used for the current period.

[0032] A mesh point wishing to block the extension channel from being used by the IEEE 802.11n-capable mesh points may send control or management frames to other mesh points, (for example, when a collision is detected on the extension channel). For this purpose, a new control frame may be defined to declare collision in the extension channel. Alternatively, a conventional congestion control message may be used for this purpose.

[0033] Similarly and for both the CCF and the EDCA-based mesh access modes, mesh points may communicate through L2 messages their intention to use 20 MHz, 2×20 MHz, or 40 MHz operation to neighboring mesh points, a subset of the mesh points in the mesh network, or the entire mesh network that they intend to use a particular channel configuration, legacy protection mode during the upcoming TXOP, channel access window, or allocated channel access time.

[0034] The L2 messages may be unicast, multicast or broadcast messages. The message may be management frames, control-frames, or any other type of frames. The L2 messages may be used either shortly preceding a channel access attempt, (such as when MRTS/MCTS is used), or be part of signalling frames exchanged during the channel access itself.

[0035] Mesh points may periodically send information about anticipated, advertised, or observed channel configuration through L2 messages to one or more neighboring mesh points, a subset of mesh points in the mesh network, or the entire mesh network. For example, a mesh point may inform one or more other mesh points that a particular channel configuration is valid for a particular TXOP, a period of time, or until occurrence of a certain event to another mesh point through the L2 messages.

[0036] A mesh point, upon learning channel configuration of a particular neighbor mesh point either through configuration by the NME 140 or from message exchange with other mesh points of the mesh network, establishes a database which maps the mesh points to specific IEEE 802.11n channelization mode, (i.e., 20 MHz, 2×20 MHz, or 40 MHz), configuration, and legacy protection mode. The mesh point uses this database whenever the mesh point attempts to access a channel to choose an optimum channel and/or bandwidth. The database may also be used to determine routing or forwarding paths through the mesh network.

[0037] Embodiments.

[0038] 1. A mesh network comprising a plurality of mesh points.

[0039] 2. The mesh network of embodiment 1 further comprising an NME configured to retrieve capability and configuration data from the mesh points and configure at least one mesh point with respect to IEEE 802.11n channelization and legacy protection mode based on the capability and configuration data.

[0040] 3. The mesh network of embodiment 2 wherein the capability and configuration data includes information regarding at least one of PHY level spoofing.

[0041] 4. The mesh network as in any one of embodiments 2-3, wherein the capability and configuration data includes information regarding mechanisms to manage coexistence of 20 MHz and 40 MHz channels.

[0042] 5. The mesh network as in any one of embodiments 2-4, wherein the capability and configuration data includes information regarding management and channel selection methods.

[0043] 6. The mesh network as in any one of embodiments 2-5, wherein the capability and configuration data includes information regarding RIFS protection.

[0044] 7. The mesh network as in any one of embodiments 2-6, wherein the capability and configuration data includes information regarding green field protection.

[0045] 8. The mesh network as in any one of embodiments 2-7, wherein the capability and configuration data includes information regarding STBC control frames.

[0046] 9. The mesh network as in any one of embodiments 2-8, wherein the capability and configuration data includes information regarding L-SIG TXOP protection.

[0047] 10. The mesh network as in any one of embodiments 2-9, wherein the capability and configuration data includes information regarding PCO.

[0048] 11. The mesh network as in any one of embodiments 2-10, wherein the capability and configuration data of the mesh points is stored in a data base in the mesh points.

[0049] 12. The mesh network as in any one of embodiments 2-10, wherein the capability and configuration data of the mesh points is stored in a database outside the mesh network.

[0050] 13. The mesh network as in any one of embodiments 2-12, wherein the capability and configuration data is retrieved from the mesh points during or after an association process.

[0051] 14. The mesh network as in any one of embodiments 2-13, wherein the NME sends a request to the mesh points for retrieving the capability

and configuration data.

[0052] 15. The mesh network as in any one of embodiments 2-13, wherein the mesh points send the capability and configuration data in response to the request.

[0053] 16. The mesh network as in any one of embodiments 2-13, wherein the mesh points report the capability and configuration data to the NME without a request from the NME.

[0054] 17. The mesh network as in any one of embodiments 2-16, wherein configuration for the mesh points is coupled to a timer such that the configuration is valid for only a certain period of time.

[0055] 18. The mesh network of embodiment 17 wherein the timer is triggered by a predetermined event.

[0056] 19. The mesh network as in any one of embodiments 2-18, wherein configuration for the mesh points is updated periodically.

[0057] 20. The mesh network as in any one of embodiments 2-19, wherein the NME configures one of a particular mesh link.

[0058] 21. The mesh network as in any one of embodiments 2-19, wherein the NME configures a subset of the mesh points.

[0059] 22. The mesh network as in any one of embodiments 2-19, wherein the NME configures the entire mesh network.

[0060] 23. The mesh network as in any one of embodiments 2-22, wherein information regarding configuration of the mesh points is stored in a database on at least one of the NME and the mesh points.

[0061] 24. The mesh network as in any one of embodiments 2-23, wherein the NME configures the mesh points using a dedicated message exchange.

[0062] 25. The mesh network as in any one of embodiments 2-23, wherein the NME configures the mesh points using one of multicast messages and broadcast messages.

[0063] 26. The mesh network as in any one of embodiments 2-23, wherein the NME uses an SNMP to configure the mesh points.

- [0064] 27. The mesh network as in any one of embodiments 2-23, wherein the NME uses L2 signalling frames to configure the mesh points.
- [0065] 28. The mesh network as in any one of embodiments 2-27, wherein at least one mesh point blocks an extension channel for 40 MHz operation from its channel map.
- [0066] 29. The mesh network of embodiment 28 wherein the extension channel is blocked statically during start-up configuration.
- [0067] 30. The mesh network of embodiment of 28 wherein the extension channel is configured by a service provider.
- [0068] 31. The mesh network of embodiment 28 wherein the extension channel is configured through a subscriber identity module (SIM)-card-like configuration.
- [0069] 32. The mesh network of embodiment 28 wherein the extension channel is configured through a software/driver download.
- [0070] 33. The mesh network of claim 28 wherein the extension channel is blocked semi-dynamically in accordance with a configuration message.
- [0071] 34. The mesh network of embodiment 33 wherein the mesh points communicate information regarding channel configuration and legacy protection mode with another mesh points during an association process.
- [0072] 35. The mesh network of embodiment 33 wherein the extension channel is blocked based on the information.
- [0073] 36. The mesh network of embodiment 28 wherein the extension channel is blocked dynamically in real-time.
- [0074] 37. The mesh network of embodiment 28 wherein the extension channel is blocked dynamically for a limited time.
- [0075] 38. The mesh network of embodiment 28 wherein the mesh point blocks the extension channel based on a message from neighbor mesh points.
- [0076] 39. The mesh network of embodiment 38 wherein a congestion control message is used for carrying the message.
- [0077] 40. The mesh network of embodiment 38 wherein the mesh points communicate with each other through an L2 message.

[0078] 41. The mesh network of embodiment 40 wherein the L2 message is a unicast message.

[0079] 42. The mesh network of embodiment 40 wherein the L2 message is a multicast message.

[0080] 43. The mesh network as in any one of embodiments 40-42, wherein the L2 may be one of a management frame and a control frame.

[0081] 44. The mesh network as in any one of embodiments 40-43, wherein the L2 message is sent shortly preceding a channel access attempt.

[0082] 45. The mesh network of embodiment 44 wherein the L2 message is sent as a part of signalling frames for channel access.

[0083] 46. The mesh network as in any one of embodiments 2-45, wherein the mesh points are configured to establish a database which maps mesh points in the mesh network to specific IEEE 802.11n channelization and legacy protection mode.

[0084] 47. The mesh network of embodiment 46 wherein the mesh points use the database to choose an optimum channel and bandwidth.

[0085] 48. The mesh network as in any one of embodiments 46-47, wherein the mesh points use the database to determine routing and forwarding paths through the mesh network.

[0086] Although the features and elements of the present invention are described in the preferred embodiments in particular combinations, each feature or element can be used alone without the other features and elements of the preferred embodiments or in various combinations with or without other features and elements of the present invention. The methods or flow charts provided in the present invention may be implemented in a computer program, software, or firmware tangibly embodied in a computer-readable storage medium for execution by a general purpose computer or a processor. Examples of computer-readable storage mediums include a read only memory (ROM), a random access memory (RAM), a register, cache memory, semiconductor memory devices, magnetic media such as internal hard disks and removable disks, magneto-optical media, and optical media such as CD-ROM disks, and digital versatile

disks (DVDs).

[0087] Suitable processors include, by way of example, a general purpose processor, a special purpose processor, a conventional processor, a digital signal processor (DSP), a plurality of microprocessors, one or more microprocessors in association with a DSP core, a controller, a microcontroller, Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs) circuits, any other type of integrated circuit (IC), and/or a state machine.

[0088] A processor in association with software may be used to implement a radio frequency transceiver for use in a wireless transmit receive unit (WTRU), user equipment (UE), terminal, base station, radio network controller (RNC), or any host computer. The WTRU may be used in conjunction with modules, implemented in hardware and/or software, such as a camera, a video camera module, a videophone, a speakerphone, a vibration device, a speaker, a microphone, a television transceiver, a hands free headset, a keyboard, a Bluetooth® module, a frequency modulated (FM) radio unit, a liquid crystal display (LCD) display unit, an organic light-emitting diode (OLED) display unit, a digital music player, a media player, a video game player module, an Internet browser, and/or any wireless local area network (WLAN) module.

* * *

CLAIMS:

1. An access point (AP) comprising:
 - a wireless receiver configured to receive, from each of a plurality of wireless transmit receive units (WTRUs), configuration information, wherein configuration information received from at least one of the plurality of WTRUs includes information regarding coexistence of a 20 MHz channel and a 40 MHz channel, green field protection information, space time block coding (STBC) information, and legacy signal field (L-SIG) transmission opportunity (TXOP) protection information; and
 - a wireless transmitter configured to transmit, to at least one of the plurality of WTRUs, instructions for controlling operation of at least one of the plurality of WTRUs regarding IEEE 802.11n channelization and legacy protection, wherein a content of the instructions for controlling the operation of the at least one of the plurality of WTRUs regarding IEEE 802.11n channelization and legacy protection is based at least on the configuration information from each of the plurality of WTRUs.
2. The AP of claim 1, wherein the configuration information received from at least one of the plurality of WTRUs further includes information regarding at least one of physical layer spoofing, reduced inter-frame spacing (RIFS) protection and phased coexistence operation (PCO).
3. The AP of claim 1, wherein the wireless receiver is further configured to wirelessly receive the configuration information from each of the plurality of WTRUs during or after an association process.
4. The AP of claim 1, wherein the wireless transmitter is further configured to wirelessly transmit a request for configuration information to at least one of the plurality of WTRUs; and the wireless receiver is further

configured to wirelessly receive the configuration information in response to the request.

5. The AP of claim 1, wherein the wireless receiver is configured to wirelessly receive periodic updates of the configuration information from each of the plurality of WTRUs and the wireless transmitter is further configured to wirelessly transmit periodic updates of the instructions for controlling operation of the at least one of the plurality of WTRUs to the at least one of the plurality of WTRUs.

6. The AP of claim 1, wherein the wireless transmitter is configured to transmit the instructions for controlling operation of the at least one of the plurality of WTRUs using at least one of a dedicated message exchange, a multicast message, or a simple network management protocol.

7. The AP of claim 1, wherein the AP is configured to receive a software/driver download comprising extension channel configuration data.

8. The AP of claim 1, wherein the instructions for controlling the operation of the at least one of the plurality of WTRUs comprises extension channel block command information, and the wireless transmitter is configured to wirelessly transmit the extension channel block command information during an association process.

9. The AP of claim 8, wherein the wireless transmitter is configured to wirelessly transmit a congestion control message, wherein the congestion control message includes the extension channel block command information.

10. The AP of claim 1, wherein the configuration information received from at least one of the plurality of WTRUs includes information regarding mechanisms to manage channel management and channel selection methods.

11. The AP of claim 1, wherein the wireless receiver and the wireless transmitter are configured to operate at a channel bandwidth of 20 MHz or 40 MHz.

12. An wireless transmit and receive unit (WTRU) comprising:

a wireless transmitter configured to transmit configuration information, wherein the configuration information includes information regarding coexistence of a 20 MHz channel and a 40 MHz channel, green field protection information, space time block coding (STBC) information, and legacy signal field (L-SIG) transmission opportunity (TXOP) protection information; and

a wireless receiver configured to receive instructions for controlling operation of the WTRU regarding IEEE 802.11n channelization and legacy protection, wherein a content of the instructions for controlling the operation of the WTRU regarding IEEE 802.11n channelization and legacy protection is based at least on the configuration information.

13. The WTRU of claim 12, wherein the configuration information further includes information regarding at least one of physical layer spoofing, reduced inter-frame spacing (RIFS) protection and phased coexistence operation (PCO).

14. The WTRU of claim 12, wherein the wireless transmitter is further configured to wirelessly transmit the configuration information during or after an association process.

15. The WTRU of claim 12, wherein the wireless receiver is further configured to wirelessly receive a request for the configuration information; and

the wireless transmitter is further configured to wirelessly transmit the configuration information in response to the request.

16. The WTRU of claim 12, wherein the wireless transmitter is configured to wirelessly transmit periodic updates of the configuration information and the wireless receiver is further configured to wirelessly receive periodic updates of the instructions for controlling operation of the WTRU.

17. The WTRU of claim 12, wherein the wireless receiver is configured to receive the instructions for controlling operation of the WTRU from at least one of a dedicated message exchange, a multicast message, or a simple network management protocol.

18. The WTRU of claim 12, wherein the instructions for controlling the operation of the WTRU comprises extension channel block command information, and the wireless receiver is configured to wirelessly receive the extension channel block command information during an association process.

19. The WTRU of claim 18, wherein the wireless receiver is configured to wirelessly receive a congestion control message, wherein the congestion control message includes the extension channel block command information.

20. The WTRU of claim 12, wherein the configuration information includes information regarding mechanisms to manage channel management and channel selection methods.

21. The WTRU of claim 12, wherein the wireless transmitter and the wireless receiver are configured to operate at a channel bandwidth of 20 MHz or 40 MHz.

22. A wireless transmit/receive unit (WTRU) configured as a node on a mesh network, wherein the WTRU comprises:

a radio configured to operate at 20 Mhz or 40 Mhz,

a receiver configured to retrieve a plurality of capability and configuration data from a plurality of WTRUs in a mesh network, wherein the capability and configuration data includes information regarding mechanisms to manage:

a coexistence of 20 Mhz and 40 Mhz channels;

channel management; and

channel selection methods;

a memory unit configured to store the capability and configuration data; and

a transmitter configured to transmit to at least one of the plurality of WTRUs at least one set of node-specific configuration data comprising channelization and legacy protection data based on the capability and configuration data.

23. The WTRU as in claim 22 wherein the capability and configuration data further includes information regarding at least one of:

physical (PHY) level spoofing;

reduced inter-frame spacing (RIFS) protection;

green field protection;

space time block coding (STBC) control frame;

legacy signal field (L-SIG) transmission opportunity (TXOP) protection; and

phased coexistence operation (PCO).

24. The WTRU as in claim 22 wherein the WTRU is configured to retrieve the capability and configuration data during or after an association process.

25. The WTRU as in claim 22 wherein the WTRU is further configured to:

send a request to retrieve capability and configuration data to at least one of the plurality of WTRUs in a mesh network;
and
receive capability and configuration data in response to the request.

26. The WTRU as in claim 22 further comprising a timer wherein the timer is coupled to a mesh point configuration such that the mesh point configuration is valid for set period of time.

27. The WTRU as in claim 26 wherein the timer is triggered by a predetermined event.

28. The WTRU as in claim 22 wherein the WTRU is configured to receive periodic updates of the capability and configuration data.

29. The WTRU as in claim 22 wherein the WTRU is configured to transmit periodic updates of the capability and configuration data to the plurality of WTRUs in the mesh network.

30. The WTRU as in claim 22 wherein the WTRU is further configured to transmit to a mesh link, a set of mesh links, a mesh node, a set of mesh nodes and an entire mesh network .

31. The WTRU as in claim 22 wherein the WTRU is configured to transmit node-specific data using a dedicated message exchange.

32. The WTRU as in claim 22 wherein the WTRU is configured to transmit node-specific data in a multicast message.

33. The WTRU as in claim 22 wherein the WTRU is configured to transmit node-specific data using simple network management protocol (SNMP).

34. The WTRU as in claim 22 wherein the WTRU is configured to transmit node-specific data using layer 2 (L2) signaling frames.

35. The WTRU as in claim 22 wherein the WTRU is configured to block an extension channel for 40 MHz operation from its channel map.

36. The WTRU as in claim 35 wherein the WTRU is configured to block the extension channel statically during start-up configuration.

37. The WTRU as in claim 35 wherein the WTRU is configured to receive extension channel configuration data from a service provider.

38. The WTRU as in claim 35 wherein the WTRU is configured to retrieve extension channel configuration data from a subscriber identity module (SIM).

39. The WTRU as in claim 35 wherein the WTRU is configured to receive a software/driver download comprising extension channel configuration data.

40. The WTRU as in claim 22 wherein the node-specific configuration data comprises extension channel block command information and the WTRU is configured to transmit the extension channel block command information during an association process.

41. The WTRU as in claim 40 wherein the WTRU is configured to transmit a congestion control message wherein the congestion control message includes the extension channel block command information.

42. An access point (AP) comprising:

a wireless receiver configured to receive, from each of a plurality of wireless transmit receive units (WTRUs), information about at least one configuration of each of the plurality of WTRUs regarding coexistence of a 20 MHz channel and a 40 MHz channel; and

a wireless transmitter configured to transmit, to at least one of the plurality of WTRUs, instructions for controlling operation of the at least one of the plurality of WTRUs regarding IEEE 802.11n channelization and legacy protection, wherein a content of the instructions for controlling the operation of the at least one of the plurality of WTRUs regarding IEEE 802.11n channelization and legacy protection is based at least on the information about the at least one configuration of each of the WTRUs regarding the coexistence of the 20 MHz channel and the 40 MHz channel.

43. The AP of claim 42, wherein the information about the at least one configuration of each of the plurality of WTRUs further includes information regarding at least one of physical layer spoofing, reduced inter-frame spacing (RIFS) protection, green field protection, space time block coding (STBC) control frame, legacy signal field (L-SIG) transmission opportunity (TXOP) protection, and phased coexistence operation (PCO).

44. The AP of claim 42, wherein the wireless receiver is further configured to wirelessly receive the information about the at least one configuration of each of the plurality of WTRUs during or after an association process.

45. The AP of claim 42, wherein the wireless transmitter is further configured to wirelessly transmit a request for the instructions for controlling the operation of the at least one of the plurality of WTRUs to at least one of the plurality of WTRUs, and the wireless receiver is further configured to wirelessly receive the instructions for controlling the operation of the at least one of the plurality of WTRUs in response to the request.

46. The AP of claim 42, wherein the wireless receiver is further configured to wirelessly receive periodic updates of the information about the at least one configuration of each of the plurality of WTRUs, and the wireless transmitter is further configured to wirelessly transmit periodic updates of the instructions for controlling operation of the at least one of the plurality of WTRUs to the at least one of the plurality of WTRUs.

47. The AP of claim 42, wherein the wireless transmitter is further configured to transmit the instructions for controlling operation of the at least one of the plurality of WTRUs using at least one of a dedicated message exchange, a multicast message, or a simple network management protocol.

48. The AP of claim 42, wherein the wireless receiver is further configured to wirelessly receive a software/driver download comprising extension channel configuration data.

49. The AP of claim 42, wherein the instructions for controlling the operation of the at least one of the plurality of WTRUs comprises extension channel block command information, and the wireless transmitter is further

configured to wirelessly transmit the extension channel block command information during an association process.

50. The AP of claim 49, wherein the wireless transmitter is further configured to wirelessly transmit a congestion control message, wherein the congestion control message includes the extension channel block command information.

51. The AP of claim 42, wherein the information about the at least one configuration of each of the plurality of WTRUs includes information regarding mechanisms to manage channel management and channel selection methods.

52. The AP of claim 42, wherein the wireless receiver and the wireless transmitter are configured to operate at a channel bandwidth of 20 Mhz or 40 Mhz.

53. A wireless transmit/receive unit (WTRU) comprising:
a transmitter configured to transmit, to an access point (AP), information about at least one configuration of the WTRU regarding coexistence of a 20 MHz channel and a 40 MHz channel; and
a receiver configured to receive, from the AP, instructions for controlling operation of the WTRU regarding IEEE 802.11n channelization and legacy protection, wherein a content of the instructions for controlling the operation of the WTRU regarding IEEE 802.11n channelization and legacy protection is based at least on the information about the at least one configuration of the WTRU regarding the coexistence of the 20 MHz channel and the 40 MHz channel.

54. The WTRU of claim 53, wherein the information about the at least one configuration of the WTRU further includes information regarding at

least one of physical layer spoofing, reduced inter-frame spacing (RIFS) protection, green field protection, space time block coding (STBC) control frame, legacy signal field (L-SIG) transmission opportunity (TXOP) protection, and phased coexistence operation (PCO).

55. The WTRU of claim 53, wherein the transmitter is further configured to transmit the information about the at least one configuration of the WTRU during or after an association process.

56. The WTRU of claim 53, wherein the transmitter is further configured to transmit a request for the instructions for controlling the operation of the WTRU to the AP, and the receiver is further configured to receive the instructions for controlling the operation of the WTRU from the AP in response to the request.

57. The WTRU of claim 53, wherein the transmitter is further configured to transmit periodic updates of the information about the at least one configuration of the WTRU to AP, and the receiver is further configured to receive periodic updates of the instructions for controlling operation of the WTRU from the AP.

58. The WTRU of claim 54, wherein the receiver is further configured to receive the instructions for controlling operation of the WTRU via at least one of a dedicated message exchange, multicast messaging, or a simple network management protocol.

59. The WTRU of claim 54, wherein the instructions for controlling the operation of the WTRU comprise extension channel block command information, and the receiver is further configured to receive the extension channel block command information during an association process.

60. The WTRU of claim 59, wherein the receiver is further configured to receive a congestion control message, wherein the congestion control message includes the extension channel block command information.

61. The WTRU of claim 54, wherein the information about the at least one configuration of the WTRU includes information regarding mechanisms to manage channel management and channel selection methods.

62. The WTRU of claim 54, wherein the transmitter and the receiver are configured to operate at a channel bandwidth of 20 Mhz or 40 Mhz.

