



(51) International Patent Classification:

A63H 13/10 (2006.01) F41B 7/08 (2006.01)
A63H 17/00 (2006.01)

(21) International Application Number:

PCT/EP2014/054840

(22) International Filing Date:

12 March 2014 (12.03.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA 2013 70148 12 March 2013 (12.03.2013) DK

(71) Applicant: LEGO A/S [DK/DK]; Aastvej 1, DK-7190
Billund (DK).

(72) Inventor: GARLING, Aske Klejstrup; Munkebjergvæn-
get 2, DK-5230 Odense M (DK).

(74) Agent: SCHWARZE, Holm; Guardian IP Consulting I/S,
Diplomvej, Building 381, DK-2800 Kgs. Lyngby (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SHOOTING TOY

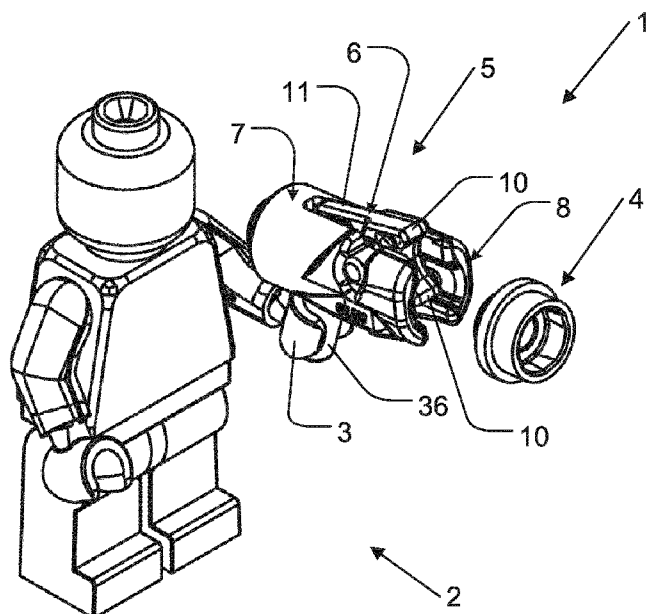


Fig. 1

(57) Abstract: The shooting toy (1) includes a shooter (5) and a projectile (4) to be ejected from the shooter. A trigger element (6) is movably mounted in a shooter body (7) and has a pusher part (10) adapted to push the projectile (4) away from its loaded position. The shooter (5) is adapted to eject the projectile (4) along a centre axis of a cylindrical surface of the projectile (4). A pinching element (8) is adapted to prevent ejection in said direction of the projectile (4) in its loaded position in the shooter body (7) by means of frictional force acting between a pinching surface of the pinching element (8) and the cylindrical surface of the projectile (4). The pinching surface is adapted to guide the cylindrical surface of the projectile (4) in the ejection direction.



Published:

— *with international search report (Art. 21(3))*

Shooting toy

The present invention relates to a shooting toy including a shooter and a projectile to be ejected from the shooter, the shooter including a shooter body, at least one pinching element adapted to pinch the projectile and thereby hold it in the shooter body in a loaded position and a trigger element being movably mounted in the shooter body between a passive position, in which the projectile may occupy its loaded position in the shooter body, and an activated position, the trigger element having a pusher part adapted to push the projectile away from its loaded position when the trigger element is moved from its passive position to its activated position, the trigger element having a finger touch part adapted to be activated by an operator, and the projectile having a cylindrical surface.

US 4,277,068 discloses a flying saucer toy consisting of a pistol and a flying disc to be fired from said pistol. The pistol includes a pair of resilient pinching blades between which the flying disc is retained in its loaded position, one pinching blade having a first relatively high friction corner while the other having a second slippery or relatively low friction corner. In the loaded position of the disc, the disc is gripped mechanically between said first and second corners as these corners are spaced slightly less from each other than the diameter of the disc, thereby holding around the periphery of the disc. As the disc is launched, a thrust is being provided by the pinching blades to the disc, being transformed into a torque between the first relatively high friction corner and the second slippery or relatively low friction corner, thereby rotating the disc. The flying disc has an inwardly concave bottom adapted to receive a lift efficiently. However, because of its configuration adapted to apply a rotating movement to the flying saucer, this toy is specifically suitable to eject a flat, disc-formed element and not a projectile having another form, such as for instance a ball or a short stud-formed element. Furthermore, this toy would be difficult to operate in a relatively small scale version, because a suitably

sized handle is necessary in order to hold the device when operating the trigger.

JP10216370 A discloses a similar flying saucer toy consisting of a pistol and
5 a flying disc to be fired from said pistol. In the loaded position of the disc, the disc is gripped mechanically between two opposed half-circular arms abutting the periphery of the disc, thereby mechanically locking the disc in position. This toy is also specifically suitable to eject a flat, disc-formed element and not a projectile having another form, such as for instance a ball or a short
10 stud-formed element. This toy would also be difficult to operate in a relatively small scale version, because a suitably sized handle is necessary in order to hold the device when operating the trigger.

US 6,460,527 B1 discloses a projectile and launcher combination, in which
15 the launcher is formed with a tubular passage having a convergently tapered inner end. A projectile element is provided at its back end with a plurality of rearwardly extending, cantilever mounted resilient leaf spring elements arranged to be received in and displaced radially inward by the convergently tapered portion of the tubular passage. When the projectile is loaded into the
20 launcher, the leaf spring elements tend to eject it forwardly. A retention arrangement is provided to hold the projectile until it is ready to be ejected: A guide shaft extends rearwardly well beyond the free ends of the leaf spring elements and is provided with a rounded annular enlargement adapted to be received in a shallow annular groove in the launcher. Thus, during the last
25 portion of the projectile loading operation, extra force must be applied to the projectile element to force it in place. When the projectile is released from retention, the outward pressure of the leaf spring elements on the convergent walls forcibly ejects the projectile from the launcher passage. However, this toy is only suitable for a relatively long projectile, because the projectile must
30 be provided with said preloaded, resilient leaf spring elements. Furthermore, these leaf spring elements will lose their elasticity over time, so that if the pro-

jectile has been loaded in the launcher for instance during a period of one year or more, leaf spring elements will not operate properly anymore. This may indeed not be satisfactorily for quality toy products, as these are often stored for years and then reused for younger children.

5

The prior art shooting toys discussed above are specifically suitable for either disc-shaped or missile-shaped projectiles. For instance, these prior art shooting toys are not suitable for ejecting a certain well known, relatively small circular coupling device being one of the various plastic toy construction elements available under the name LEGO (registered trademark). This circular coupling device, in this description denoted the 1x1 circular stud coupling, is provided in the form of a rotationally symmetrical unit and comprises a coupling stud on its top surface and a coupling skirt on its underside which is complementary relative to the coupling stud so that two of these coupling devices may be interconnected or that they may be connected to any one of the above-mentioned several other various plastic toy construction elements available under the name LEGO.

The object of the present invention is to provide a simple shooting toy suitable for ejecting a relatively small projectile.

In view of this object, the shooter is adapted to eject the projectile along a centre axis of the cylindrical surface of the projectile, the at least one pinching element is adapted to prevent ejection in said direction of the projectile in its loaded position in the shooter body by means of frictional force acting between at least one pinching surface of the at least one pinching element and the cylindrical surface of the projectile, and said at least one pinching surface is adapted to guide the cylindrical surface of the projectile in the ejection direction of the projectile along the centre axis of the cylindrical surface of the projectile during ejection of the projectile.

In this way, a stationary frictional force acting between the pinching surface of the pinching element and the cylindrical surface of the projectile may retain the projectile in its loaded position during the building-up of a suitable ejection force acting on the projectile by means of the pusher part of the trigger element. When the required ejection force is reached, the stationary friction force may be overcome and the projectile may be released and may be ejected powerfully enough to fly a certain distance through the air.

In an embodiment, the at least one pinching element has the form of a tubular or at least partly or substantially tubular element adapted to interact with the cylindrical surface of the projectile by means of the at least one pinching surface. Thereby, in its simplest form, the tubular or at least partly or substantially tubular element may have a cylindrical face forming the pinching surface or being provided with one or more pinching surfaces. For instance, the above-mentioned 1x1 circular stud coupling may be loaded by inserting the coupling stud on its top surface into the tubular or at least partly or substantially tubular element forming the pinching element or, alternatively, said tubular or at least partly or substantially tubular element forming the pinching element may be inserted into the coupling skirt on the underside of the stud coupling.

In an embodiment, the tubular or at least partly or substantially tubular element forming the at least one pinching element, at least along a part of its length, is divided into parts by means of at least one cut-out in a wall of said element. Thereby, the part or parts of the wall formed between the at least one cut-out in the wall, depending on the material forming the pinching element, may be allowed to flex, preferably elastically, more or less, whereby a larger frictional force may be built up between the pinching surface of the pinching element and the cylindrical surface of the projectile when the projectile is inserted into its loaded position in the shooter body.

In an embodiment, the at least one pinching surface has the form of a raised surface on an at least partly cylindrical surface of the tubular or at least partly or substantially tubular element. Thereby, by a certain limitation of the extent of the contact surface between the pinching surface and the cylindrical surface of the projectile, it may be ensured that the pinching surface is in fact evenly pressed suitably against part of the cylindrical surface of the projectile, also in the case that the pinching element is allowed to flex elastically during insertion of the projectile. If, on the other hand, the pinching surface would be formed almost entirely by a cylindrical surface of the tubular or at least partly or substantially tubular element, flexing of the pinching element could result in the pinching surface being not evenly pressed against the cylindrical surface of the projectile.

In an embodiment, the shooter body is at least partly formed by a tubular or at least partly or substantially tubular element having a first part forming the at least one pinching element and having a second part accommodating the trigger element. Thereby, a compact device may be obtained.

In an embodiment, the trigger element is mounted pivotally in a slot in a wall of the shooter body so that the pusher part is located inside the at least partly or substantially tubular element and so that the finger touch part is located outside said element.

In an embodiment, the trigger element is so arranged in the shooter body that a line extending through the pusher part and the finger touch part forms an acute angle with a central axis of the tubular or at least partly or substantially tubular element of the shooter body. Thereby, it may be possible triggering the shooting toy simply by pressing it between two fingertips, one fingertip pressing the finger touch part of the trigger element and the other fingertip pressing an opposed part of the shooter body. Thereby operation of even very small-scale versions of the shooting toy may be facilitated.

In an embodiment, the trigger element has a V-formed part, each leg of the V-form forming a separate pusher part at its end, and the entire trigger element is symmetrical or substantially symmetrical about the symmetry axis of the V-form. Thereby, the trigger element may be mounted in the shooter body by the user without possibility of mounting the trigger element wrong.

In an embodiment, the projectile has the form of a circular stud coupling in the form of a rotationally symmetrical unit comprising a coupling stud on its top surface and a coupling skirt on its underside which is complementary relative to the coupling stud, wherein the at least one pinching element is adapted to interact with the coupling stud of the projectile, and wherein the shooter body, opposite the at least one pinching element, is provided with a coupling stud corresponding to the coupling stud of the circular stud coupling and adapted to interconnect with the coupling skirt of the circular stud coupling. Thereby, a number of spare projectiles may be stored on the shooter body by connecting them to the coupling stud of the shooter body.

The invention will now be explained in more detail below by means of examples of embodiments with reference to the very schematic drawing, in which

Fig. 1 is a perspective view of a Lego minifigure holding a shooting toy according to the invention;

Fig. 2 is a perspective view of a shooting toy according to the invention, however, without a projectile loaded;

Fig. 3 is a side view of the shooter body of the shooting toy in Fig. 2;

Fig. 4 is a side view of the trigger element of the shooting toy in Fig. 2;

Fig. 5 is an end view of the shooter body in Fig. 3, seen from the right side;

Fig. 6 is an end view of the trigger element in Fig. 4, seen from the right side;

- 5 Fig. 7 is a side view of the shooting toy in Fig. 2, however with a projectile loaded;

Fig. 8 is an end view of the shooting toy in Fig. 7, seen from the left side;

- 10 Fig. 9 is an axial section through the shooting toy in Fig. 8 taken along the line IX- IX;

Fig. 10 is a top view of the shooting toy in Fig. 7;

- 15 Fig. 11 is an axial section through the shooting toy in Fig. 7 taken along the line XI- XI;

Fig. 12 is an end view of the shooting toy in Fig. 7, seen from the right side;

- 20 Figs. 13 to 17 correspond to Figs. 7 to 10 and 12, respectively, however, without a projectile loaded;

Fig. 18 is a cross-section through the shooting toy in Fig. 16 taken along the line XVIII- XVIII;

25

Fig. 19 is a side view of a projectile as shown in Fig. 1; and

Fig. 20 is a perspective view of the projectile in Fig. 19.

- 30 Fig. 1 illustrates a Lego minifigure 2 holding a shooter 5 of a shooting toy 1 according to the present invention in a left hand 3, whereby a projectile 4 in

the form of the above-described 1x1 circular stud coupling is just ejected from the shooter 5 of the shooting toy 1. The projectile 4 is ejected by pressing a trigger element 6 by means of a finger of the user, for instance a child playing with the minifigure 2.

5

Fig. 2 illustrates the shooter 5 in greater detail, however without the projectile 4. The shooter 5 includes a shooter body 7, a pinching element 8 adapted to pinch the projectile 4 and thereby hold it in the shooter body 7 in a loaded position as for instance illustrated in Figs. 7 and 9. The shooter 5 furthermore includes the trigger element 6 being movably mounted in the shooter body 7 between a passive position, in which the projectile 4 may occupy its loaded position in the shooter body 7, as for instance illustrated in Figs. 2, 7 and 9, and an activated position, as for instance illustrated in Figs. 1, 13 and 15.

15 The trigger element 6 has a pusher part 10 adapted to push the projectile 4 away from its loaded position when the trigger element 6 is moved from its passive position to its activated position, so that the projectile 4 may be ejected from the shooter body 7. The trigger element 6 furthermore has a finger touch part 11 adapted to be activated by the finger of an operator. Although this finger touch part 11 conveniently may be activated by pressing it by means of the tip of a finger, of course, it may also be activated by any other suitable means, such as by means of a toy tool, for instance a toy brick or the like.

25 As explained above, the projectile 4 may have the form of a 1x1 circular stud coupling 13, illustrated for instance in Fig. 20. The 1x1 circular stud coupling 13 is provided in the form of a rotationally symmetrical unit and comprises a coupling stud 14 on its top surface and a coupling skirt 15 on its underside which is complementary relative to the coupling stud 14 so that two of these coupling devices may be interconnected by insertion of the coupling stud 14 of one coupling device into the coupling skirt 15 of another coupling device,

30

as it is well known, or that they may be connected to any one of the above-mentioned several other various plastic toy construction elements available under the name LEGO. The coupling stud 14 has a top surface 18 which the pusher part 10 of the trigger element 6 may abut when the projectile 4 is to be ejected. As illustrated in Figs. 19 and 20, the 1x1 circular stud coupling 13 has a cylindrical part 19 between the coupling stud 14 the coupling skirt 15. However, the projectile 4 may also be a not shown, however well known, 1x1 square stud coupling having a square skirt instead of the cylindrical part 19 and the circular coupling skirt 15 of the illustrated 1x1 circular stud coupling 13.

As also illustrated in Fig. 20, the projectile 4 has a cylindrical surface 12. The shooter 5 is adapted to eject the projectile 4 along a centre axis 16 of the cylindrical surface 12 of the projectile 4, as illustrated for instance in Figs. 1 and 9.

The pinching element 8 is adapted to prevent ejection in the above-mentioned direction of the projectile 4 in its loaded position in the shooter body 7 by means of frictional force acting between pinching surfaces 17 of the pinching element 8 and the cylindrical surface 12 of the projectile 4. Furthermore, as it will be understood, said pinching surfaces 17 are adapted to guide the cylindrical surface 12 of the projectile 4 in the ejection direction of the projectile 4 along the centre axis 16 of the cylindrical surface 12 of the projectile 4 during ejection of the projectile 4.

25

In the illustrated embodiment, the pinching element 8 has the form of a tubular or at least partly or substantially tubular element adapted to interact with the cylindrical surface 12 of the projectile 4 by means of four pinching surfaces 17, each having the form of a raised surface on a cylindrical surface 20 of the tubular or at least partly or substantially tubular element forming the pinching element 8, as illustrated in Fig. 18. The distance between two op-

30

posed pinching surfaces 17 is slightly smaller than the diameter of the cylindrical surface 20. Any suitable number of pinching surfaces 17 is possible, and the pinching surfaces 17 may simply be positioned on a diameter 38 being slightly smaller than the diameter of the cylindrical surface 20.

5

Furthermore, as illustrated in Fig. 18, the tubular or at least partly or substantially tubular element forming the at least one pinching element 8, is divided into two opposed parts 22 by means of two opposed cut-outs 23 in a wall 21 of said element. The tubular or at least partly or substantially tubular element forming the at least one pinching element 8 may be divided into any suitable number of parts, such as three, four, five or even any larger number.

10

The shooter body 7 is at least partly formed by a tubular or at least partly or substantially tubular element having a first part 24 forming the at least one pinching element 8 and having a second part 25 accommodating the trigger element 6. The trigger element 6 is mounted pivotally in a slot 26 in a wall 27 of the shooter body 7 so that the pusher part 10 is located inside the at least partly or substantially tubular element and so that the finger touch part 11 is located outside said element. The trigger element 6 is provided with pivot pins 32 adapted to be mounted in bearings 33 in the wall 27 of the shooter body 7. The bearings 33 are adapted to elastically flex and thereby grip the pivot pins 32 when the user presses the pivot pins 32 into engagement with the bearings 33. The bearings 33 therefore has a first section 34 with a diameter corresponding to or slightly larger than that of the pivot pins 32 and a second section 35 with a cross-sectional dimension slightly smaller than said diameter.

15

20

25

The shooter body 7 is provided with a handle 36 in the form of a slightly angled pin extending downwardly from the lower part of the shooter body 7 so that a Lego minifigure 2 may hold the shooter 5 in its hand 3 by said handle 36.

30

- The trigger element 6 is so arranged in the shooter body 7 that a line 28 extending through the pusher part 10 and the finger touch part 11 forms an acute angle with a central axis 29 of the tubular or at least partly or substantially tubular element of the shooter body 7, as illustrated in Figs. 9 and 15. Thereby, it may be possible triggering the shooting toy 1 simply by pressing it between two fingertips, one fingertip pressing the finger touch part of the trigger element and the other fingertip pressing an opposed part of the shooter body. Thereby operation of even very small-scale versions of the shooting toy may be facilitated. Preferably, the shooter body 7 has a diameter of less than 15 mm, more preferred less than 12 mm and most preferred less than 10 mm. Preferably, the shooter body 7 has a length of less than 25 mm, more preferred less than 20 mm and most preferred less than 18 mm.
- 15 The trigger element 6 has a V-formed part 30, each leg of the V-form forming a separate pusher part 10 at its end, and the entire trigger element 6 is symmetrical or substantially symmetrical about the symmetry axis of the V-form as best illustrated in Fig. 4.
- 20 As illustrated in the figures, opposite the pinching element 8, the shooter body 7 is provided with a coupling stud 31 corresponding to the coupling stud 14 of the 1x1 circular stud coupling 13 and adapted to interconnect with the coupling skirt 15 of the 1x1 circular stud coupling 13, thereby enabling the user to store a number of projectiles 4 on the back of the shooter body 7.
- 25 Advantageously, the pinching element 8 and possibly the shooter body 7 may be formed, for instance by injection moulding, from ABS which among its properties has good toughness and rigidity, low creep, and good dimensional stability. Thereby, the pinching element 8 may retain its elasticity over
- 30 a very long time, such as 10 years or more.

In the embodiment illustrated in the figures, it may be understood that the projectile 4, in its loaded position, is held practically only by friction force between the pinching surfaces 17 and the cylindrical surface 12 of the projectile 4. Furthermore, it may be understood that in the loaded position of the projectile 4 in the shooter body 7, the two opposed parts 22 of the pinching element 8 may be flexed slightly away from each other in relation to a resting position that they take up when the projectile 4 is not loaded. This may be obtained by forming the diameter on which the pinching surfaces 17 are located in the resting position of the two opposed parts 22 slightly smaller than the diameter of the cylindrical surface 12 of the projectile 4, such as, for instance, more than 1%, more than 3% or even more than 5% smaller. By this arrangement, it may be obtained that a larger friction force is present between the pinching surfaces 17 and the cylindrical surface 12 of the projectile 4 in the loaded position of the projectile 4. Furthermore, thereby it may be possible to slightly boost the ejection of the projectile 4 just before it leaves the shooter body 7 by rounding a tip end 37 of the pinching surfaces 17 so that this rounded tip end 37 may "kick" the projectile 4 in the ejection direction as the two opposed parts 22 flex back to their resting position. It may also be understood, that in the embodiment illustrated in the figures, the two opposed parts 22 of the pinching element 8 are not flexed further away from each other during ejection of the projectile 4. However, in a not shown embodiment, this could be the case, if the two or more opposed parts 22 of the pinching element 8 were formed with a slightly hook-formed tip end gripping over the cylindrical part 19 or other part of the 1x1 circular stud coupling 13 in the loaded position of the projectile 4.

Claims

1. A shooting toy (1) including a shooter (5) and a projectile (4) to be ejected from the shooter, the shooter (5) including a shooter body (7), at least one
5 pinching element (8) adapted to pinch the projectile (4) and thereby hold it in the shooter body (7) in a loaded position and a trigger element (6) being movably mounted in the shooter body (7) between a passive position, in which the projectile (4) may occupy its loaded position in the shooter body (7), and an activated position, the trigger element (6) having a pusher part
10 (10) adapted to push the projectile (4) away from its loaded position when the trigger element (6) is moved from its passive position to its activated position, the trigger element (6) having a finger touch part (11) adapted to be activated by an operator, and the projectile (4) having a cylindrical surface (12), **characterised in that** the shooter (5) is adapted to eject the projectile (4) along a
15 centre axis (16) of the cylindrical surface (12) of the projectile (4), in that the at least one pinching element (8) is adapted to prevent ejection in said direction of the projectile (4) in its loaded position in the shooter body (7) by means of frictional force acting between at least one pinching surface (17) of the at least one pinching element (8) and the cylindrical surface (12) of the
20 projectile (4), and in that said at least one pinching surface (17) is adapted to guide the cylindrical surface (12) of the projectile (4) in the ejection direction of the projectile (4) along the centre axis (16) of the cylindrical surface (12) of the projectile (4) during ejection of the projectile.
- 25 2. A shooting toy according to claim 1, wherein the at least one pinching element (8) has the form of a tubular or at least partly or substantially tubular element adapted to interact with the cylindrical surface (12) of the projectile (4) by means of the at least one pinching surface (17).
- 30 3. A shooting toy according to claim 1 or 2, wherein the tubular or at least partly or substantially tubular element forming the at least one pinching ele-

ment (8), at least along a part of its length, is divided into parts (22) by means of at least one cut-out (23) in a wall (21) of said element.

4. A shooting toy according to claim 2 or 3, wherein the at least one pinching
5 surface (17) has the form of a raised surface on an at least partly cylindrical surface (20) of the tubular or at least partly or substantially tubular element.

5. A shooting toy according to any one of the preceding claims, wherein the
10 shooter body (7) is at least partly formed by a tubular or at least partly or substantially tubular element having a first part (24) forming the at least one pinching element (8) and having a second part (25) accommodating the trigger element (6).

6. A shooting toy according to claim 5, wherein the trigger element (6) is
15 mounted pivotally in a slot (26) in a wall (27) of the shooter body (7) so that the pusher part (10) is located inside the at least partly or substantially tubular element and so that the finger touch part (11) is located outside said element.

20 7. A shooting toy according to claim 6, wherein the trigger element (6) is so arranged in the shooter body (7) that a line (28) extending through the pusher part (10) and the finger touch part (11) forms an acute angle with a central axis (29) of the tubular or at least partly or substantially tubular element of the shooter body (7).

25

8. A shooting toy according to any one of the preceding claims, wherein the
trigger element (6) has a V-formed part, each leg of the V-form forming a
separate pusher part (10) at its end, and wherein the entire trigger element
(6) is symmetrical or substantially symmetrical about the symmetry axis of
30 the V-form.

9. A shooting toy according to any one of the preceding claims, wherein the projectile (4) has the form of a circular stud coupling (13) in the form of a rotationally symmetrical unit comprising a coupling stud (14) on its top surface and a coupling skirt (15) on its underside which is complementary relative to
- 5 the coupling stud (14), wherein the at least one pinching element (8) is adapted to interact with the coupling stud (14) of the projectile (4), and wherein the shooter body (7), opposite the at least one pinching element (8), is provided with a coupling stud (31) corresponding to the coupling stud (14) of the circular stud coupling (13) and adapted to interconnect with the coupling skirt (15) of the circular stud coupling (13).
- 10

1/6

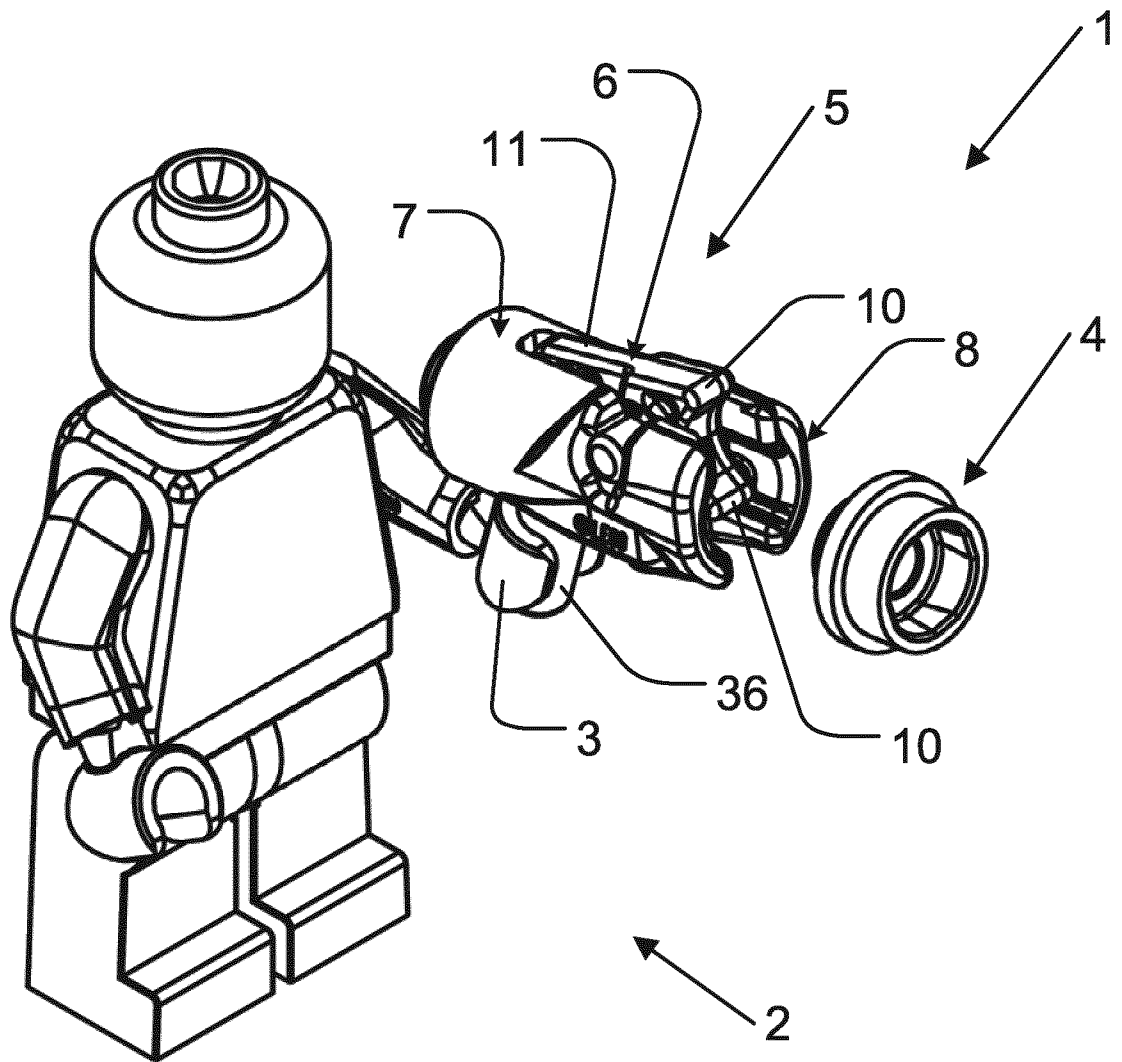


Fig. 1

2/6







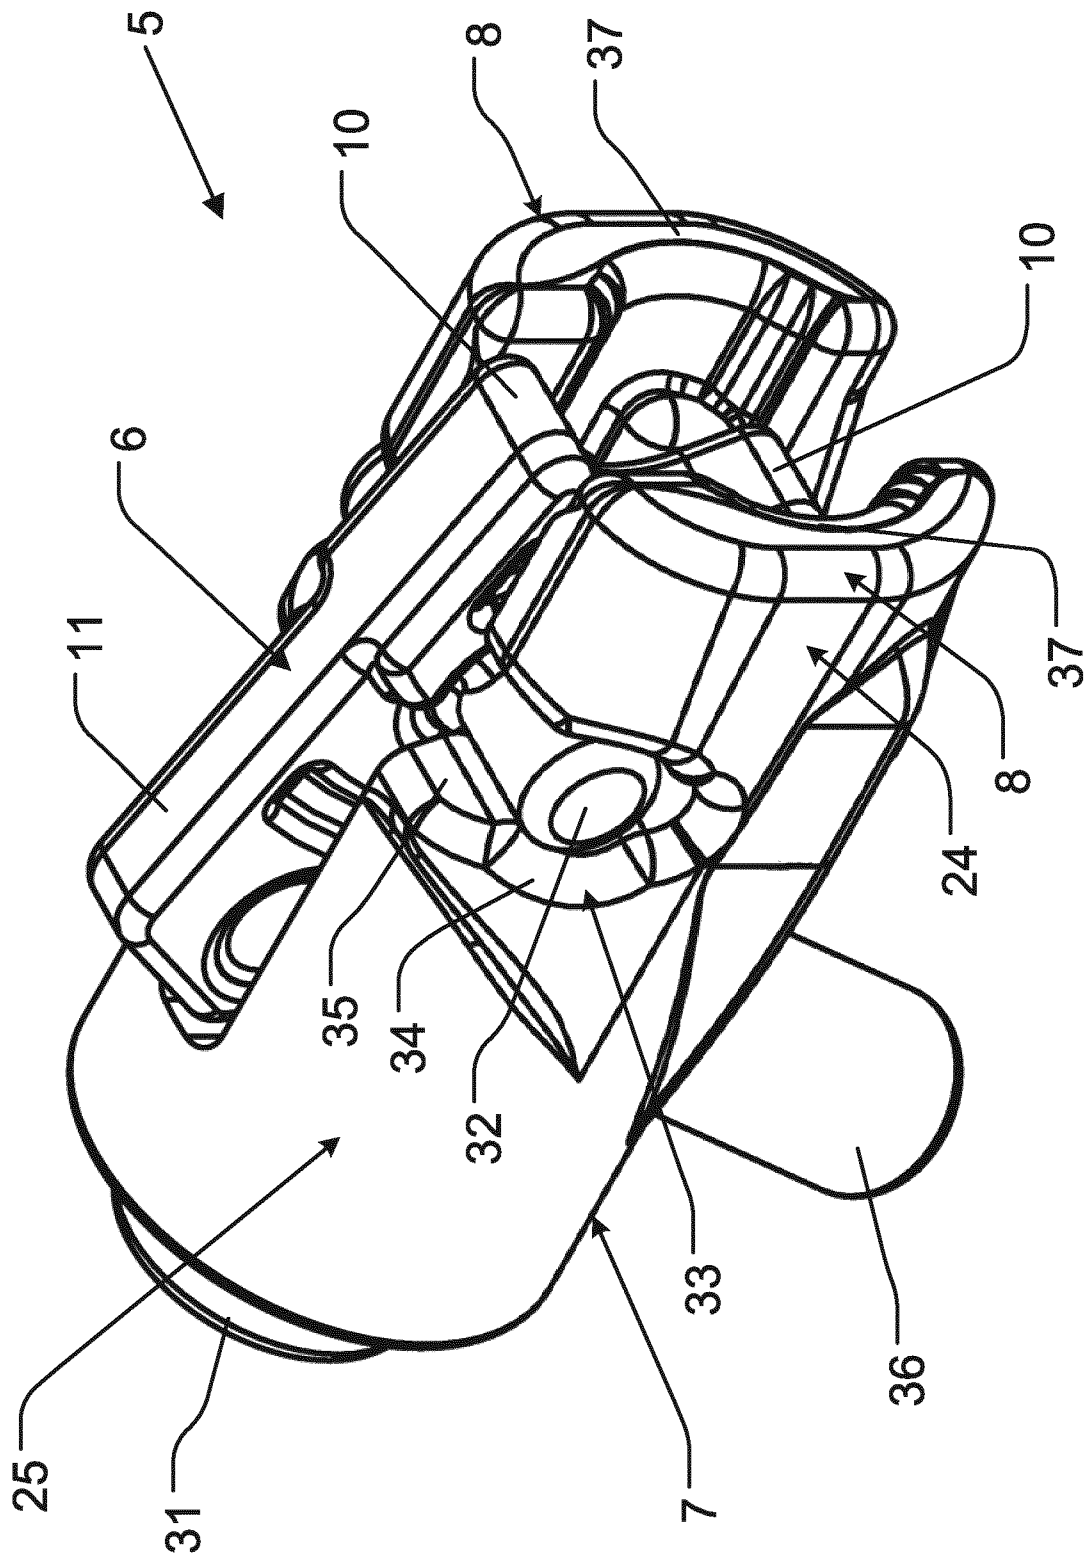


Fig. 2

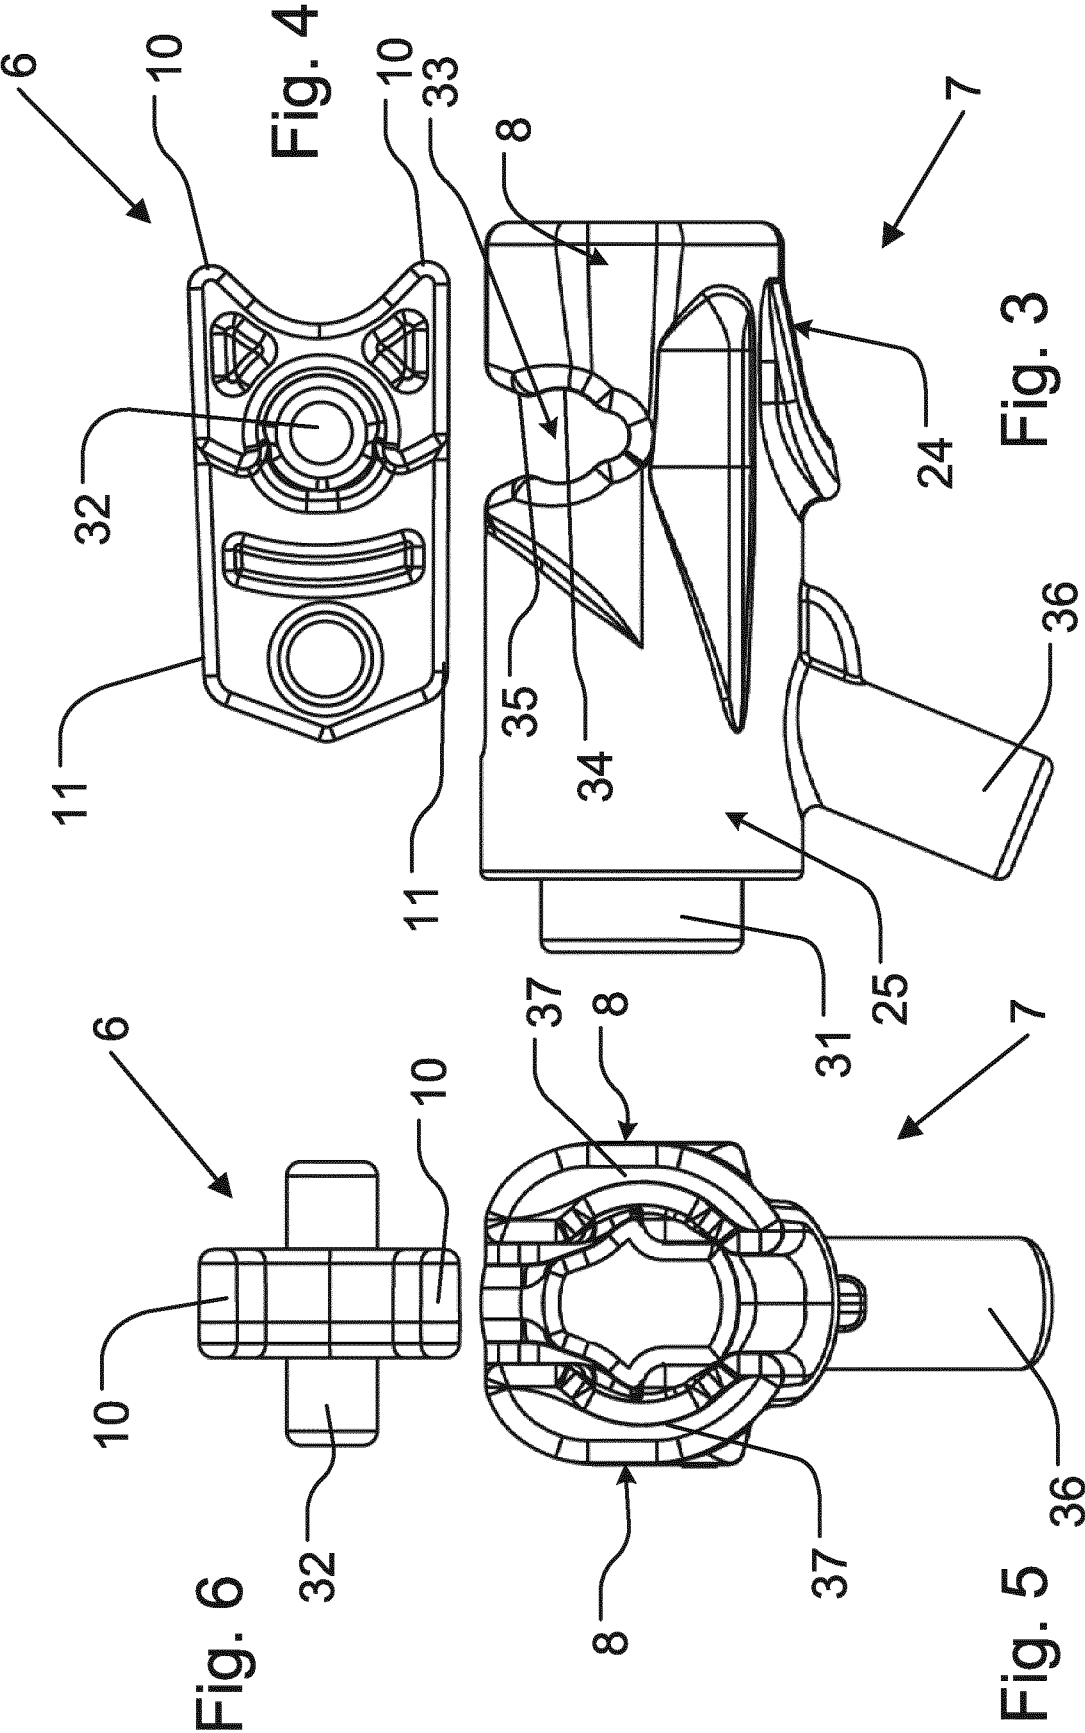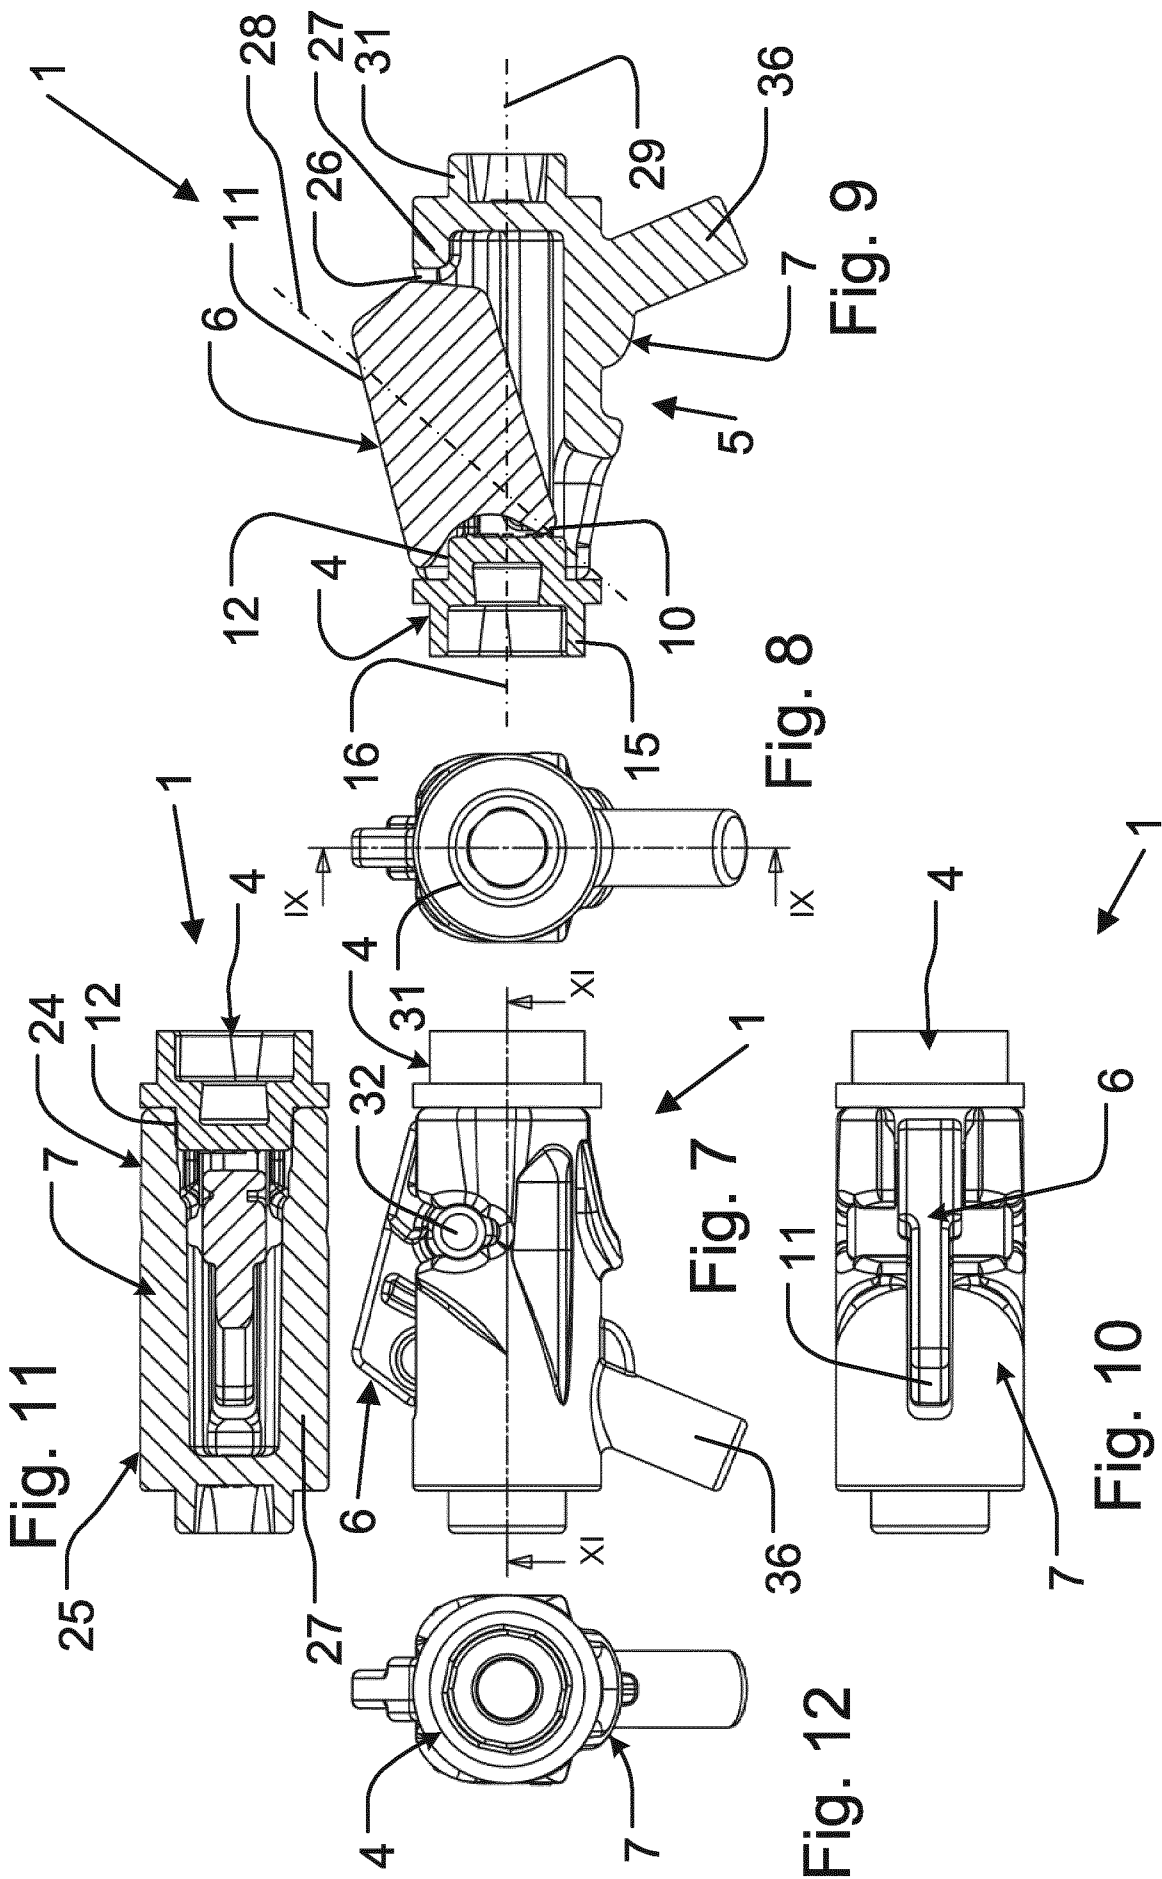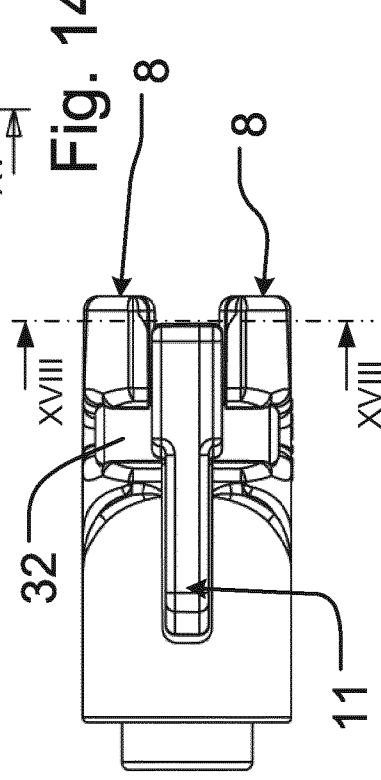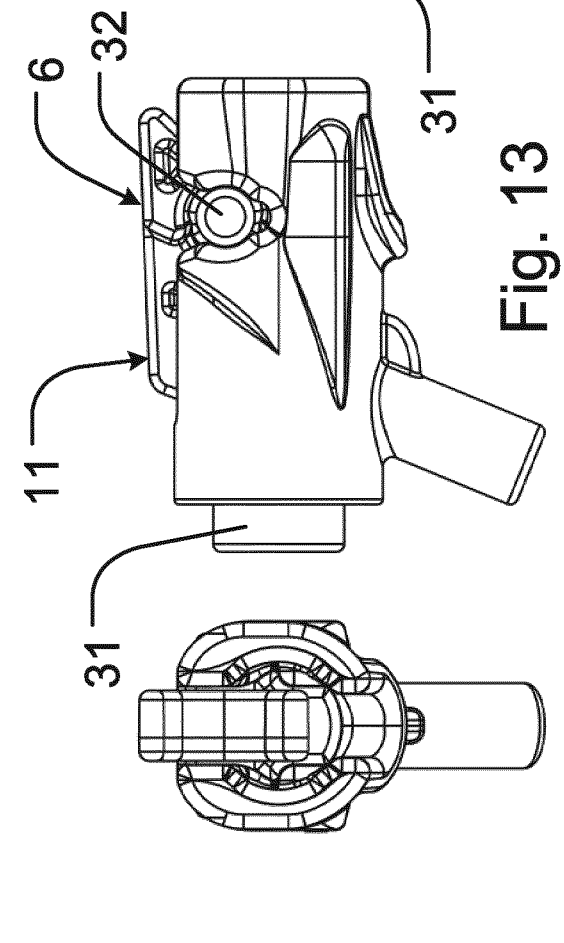

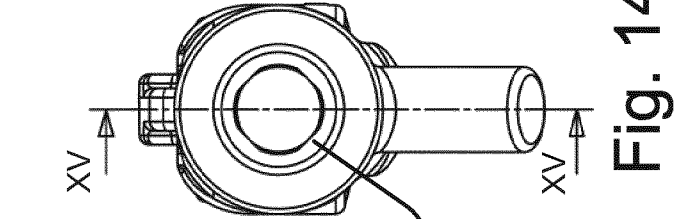

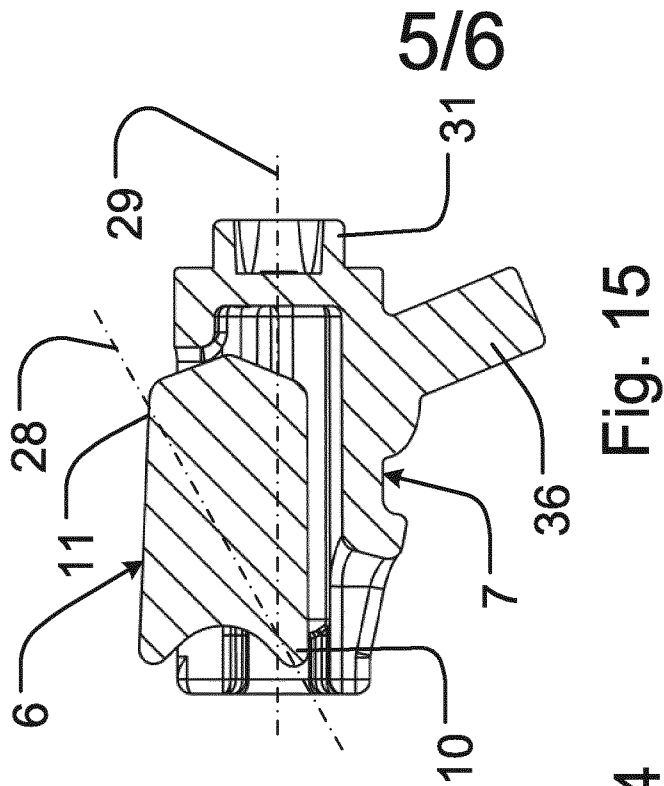

6/6

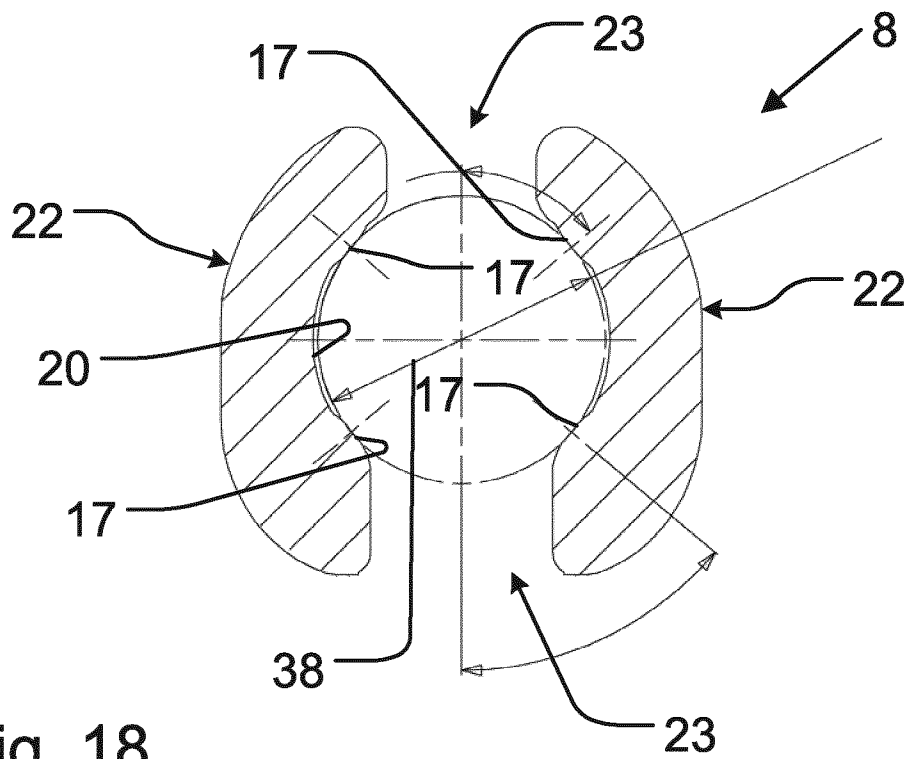


Fig. 18

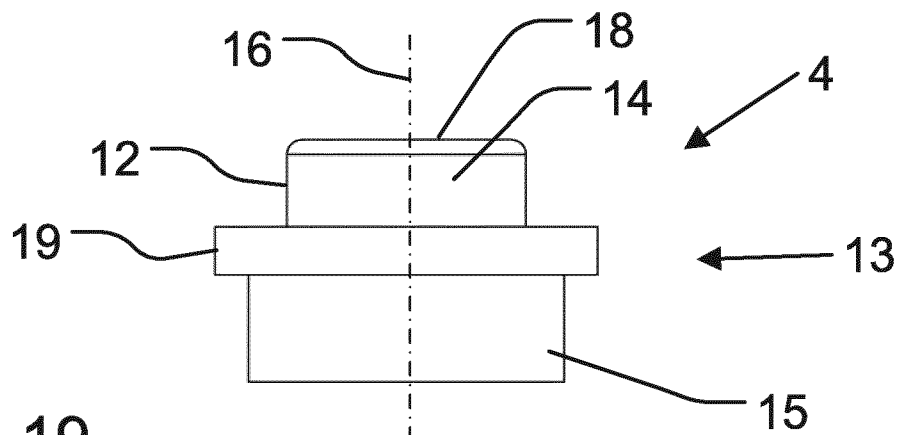


Fig. 19

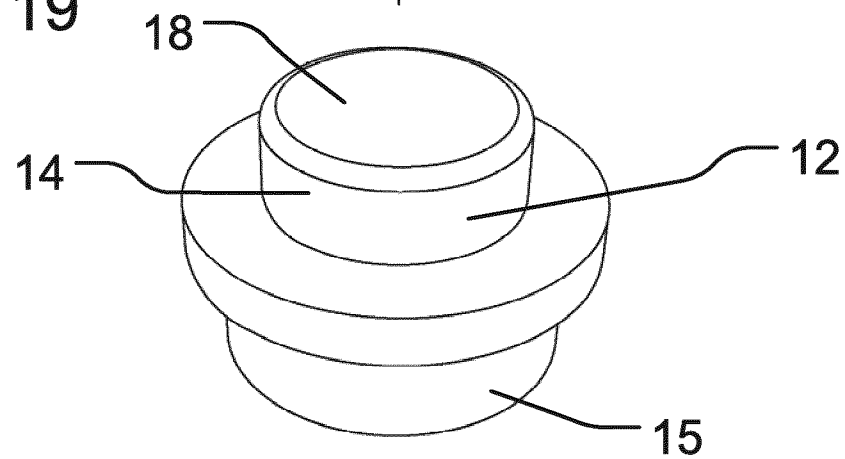


Fig. 20

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2014/054840

A. CLASSIFICATION OF SUBJECT MATTER

INV. A63H13/10 A63H17/00 F41B7/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A63H F41B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 171 649 A (PHILIP ROBERT RAUER) 24 November 1921 (1921-11-24)	1,2,5
A	page 2, line 11 - line 44; figures -----	3,4,6-9
A	WO 02/064230 A1 (MATTEL INC [US]) 22 August 2002 (2002-08-22)	1-9
	page 33, line 30 - page 34, line 17; figure 14 -----	
A	US 2004/087241 A1 (AGOSTINI MATTHEW FELIX [US] ET AL) 6 May 2004 (2004-05-06)	1-9
	paragraph [0020] - paragraph [0037]; figures -----	
A	US 4 569 666 A (WOLF TOBIN [US]) 11 February 1986 (1986-02-11)	1-9
	column 2, line 17 - line 40; figures ----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 June 2014

Date of mailing of the international search report

11/06/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lucas, Peter

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2014/054840

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 2 078 645 U (LI XINYA [CN]) 12 June 1991 (1991-06-12) the whole document -----	1-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2014/054840

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 171649	A	24-11-1921	NONE
WO 02064230	A1	22-08-2002	AU 2002251903 B2 16-02-2006
		CA 2424509 A1	22-08-2002
		EP 1317314 A1	11-06-2003
		HK 1058161 A1	17-07-2009
		MX PA03003443 A	06-12-2004
		US 2003220044 A1	27-11-2003
		WO 02064230 A1	22-08-2002
US 2004087241	A1	06-05-2004	AT 399044 T 15-07-2008
		AU 2003287414 A1	07-06-2004
		CA 2502768 A1	21-05-2004
		CN 2792578 Y	05-07-2006
		EP 1562684 A1	17-08-2005
		FR 2846567 A3	07-05-2004
		TW M250703 U	21-11-2004
		US 2004087241 A1	06-05-2004
		WO 2004041388 A1	21-05-2004
US 4569666	A	11-02-1986	NONE
CN 2078645	U	12-06-1991	NONE