



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2069595 C 2003/08/19

(11)(21) **2 069 595**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) Date de dépôt/Filing Date: 1992/05/26
(41) Mise à la disp. pub./Open to Public Insp.: 1992/12/21
(45) Date de délivrance/Issue Date: 2003/08/19
(30) Priorité/Priority: 1991/06/20 (07/718,064) US

(51) Cl.Int.⁵/Int.Cl.⁵ C08L 69/00, C08L 71/02
(72) Inventeurs/Inventors:
POWELL, DOUGLAS G., US;
KRISHNAN, SIVARAM, US
(73) Propriétaire/Owner:
BAYER CORPORATION, US
(74) Agent: OGILVY RENAULT

(54) Titre : COMPOSITION A BASE DE POLYCARBONATE RESISTANTE AUX RAYONS GAMMA
(54) Title: COLOR-STABLE POLYCARBONATE COMPOSITION RESISTANT TO GAMMA-RADIATION

(57) **Abrégé/Abstract:**

A thermoplastic polycarbonate molding composition which is rendered resistant to deterioration induced by exposure to gamma radiation is disclosed. The composition is imparted an improved degree of color stability upon the incorporation of a minor amount of a poly(alkylene oxide) oligomer and a halogenated aromatic acid derivative therewith. In addition, the composition is characterized by its low initial color and the small change in its yellowness index after a waiting period of several weeks.



A COLOR-STABLE POLYCARBONATE COMPOSITION
RESISTANT TO GAMMA-RADIATION

ABSTRACT OF THE DISCLOSURE

A thermoplastic polycarbonate molding composition which is rendered resistant to deterioration induced by exposure to gamma radiation is disclosed. The composition is imparted an improved degree of color stability upon the incorporation of a minor amount of a poly(alkylene oxide) oligomer and a halogenated aromatic acid derivative therewith. In addition, the composition is characterized by its low initial color and the small change in its yellowness index after a waiting period of several weeks.

A COLOR-STABLE POLYCARBONATE COMPOSITION
RESISTANT TO GAMMA-RADIATION

Field of the Invention

5 The invention relates to thermoplastic molding compositions and more particularly to polycarbonate compositions which are rendered resistant to discoloration induced by gamma radiation.

SUMMARY OF THE INVENTION

10 The present invention resides in the finding that a thermoplastic polycarbonate molding composition is rendered resistant to discoloration induced by exposure to gamma radiation. The composition is imparted an improved degree of color stability upon the incorporation of a minor amount of a poly(alkylene oxide) oligomer and a halogenated aromatic acid
15 derivative therewith. In addition, the composition is characterized by its low initial color and the small change in its yellowness index after a waiting period of several weeks.

BACKGROUND OF THE INVENTION

20 Because of their desirable profile of physical and mechanical properties polycarbonate resins are frequently selected for use in molding articles geared for the medical field. In these application, the resistance of the material to deterioration induced by exposure to sterilizing radiation is often times of prime importance. Articles molded from
25 polycarbonate while meeting most other criteria, fall short in terms of their resistance to gamma radiation. These articles suffer yellowing due to the decomposition of the resin. U.S. Patents 4,996,244; 4,996,245; 4,996,246; and 4,996,247 are considered to disclose relevant technology.

30 The art is noted to include European Patent Application 376,289 which disclosed a relevant polycarbonate composition containing a blend of a polycarbonate derived from

a halogenated bisphenol and a polyalkylene glycol or its ether, silyl ether or ester. Also relevant is European Patent Application 359,366 which disclosed relevant gamma radiation resistant polycarbonate compositions which contain an organic halogen compound. Of particular importance in the present context are U.S. Patents 4,874,802 ; 4,904,710 and 4,804,692 which disclosed relevant polycarbonate compositions containing polyether compounds including the stabilizing polyalkylene oxide of the present invention.



While the technical solutions offered to date do in fact reduce the permanent yellowing of polycarbonate compositions and impart desirable stability to the articles molded therefrom, a temporary color change characterizes these compositions. This color may take as long as several weeks to subside, especially in the absence of light. This causes undesirable color changes in tinted or dyed polycarbonate resin. In addition, the long period needed to stabilize the color constrains the producers of sterilized parts because of the long delay before a stable, desirable color is attained.

DETAILED DESCRIPTION OF THE INVENTION

Aromatic polycarbonates within the scope of the present invention are homopolycarbonates and copolycarbonates and mixtures thereof.


The polycarbonates generally have a weight average molecular weight of 10,000-200,000, preferably 20,000-80,000 and their melt flow rate, per ASTM D-1238 at 300°C, is about 1 to about 65 gm/10 min., preferably about 2-15 gm/10 min. They may be prepared, for example, by the known diphasic interface process from a carbonic acid derivative such as phosgene and dihydroxy compounds by polycondensation (see German Offenlegungsschriften 2,063,050; 2,063,052; 1,570,703; 2,211,956; 2,211,957 and 2,248,817; French Patent 1,561,518; and the monograph H. Schnell, "Chemistry and Physics of Polycarbonates", Interscience Publishers, New York, New York, 1964).

In the present context, dihydroxy compounds suitable for the preparation of the polycarbonates of the invention conform to the structural formulae (1) or (2).

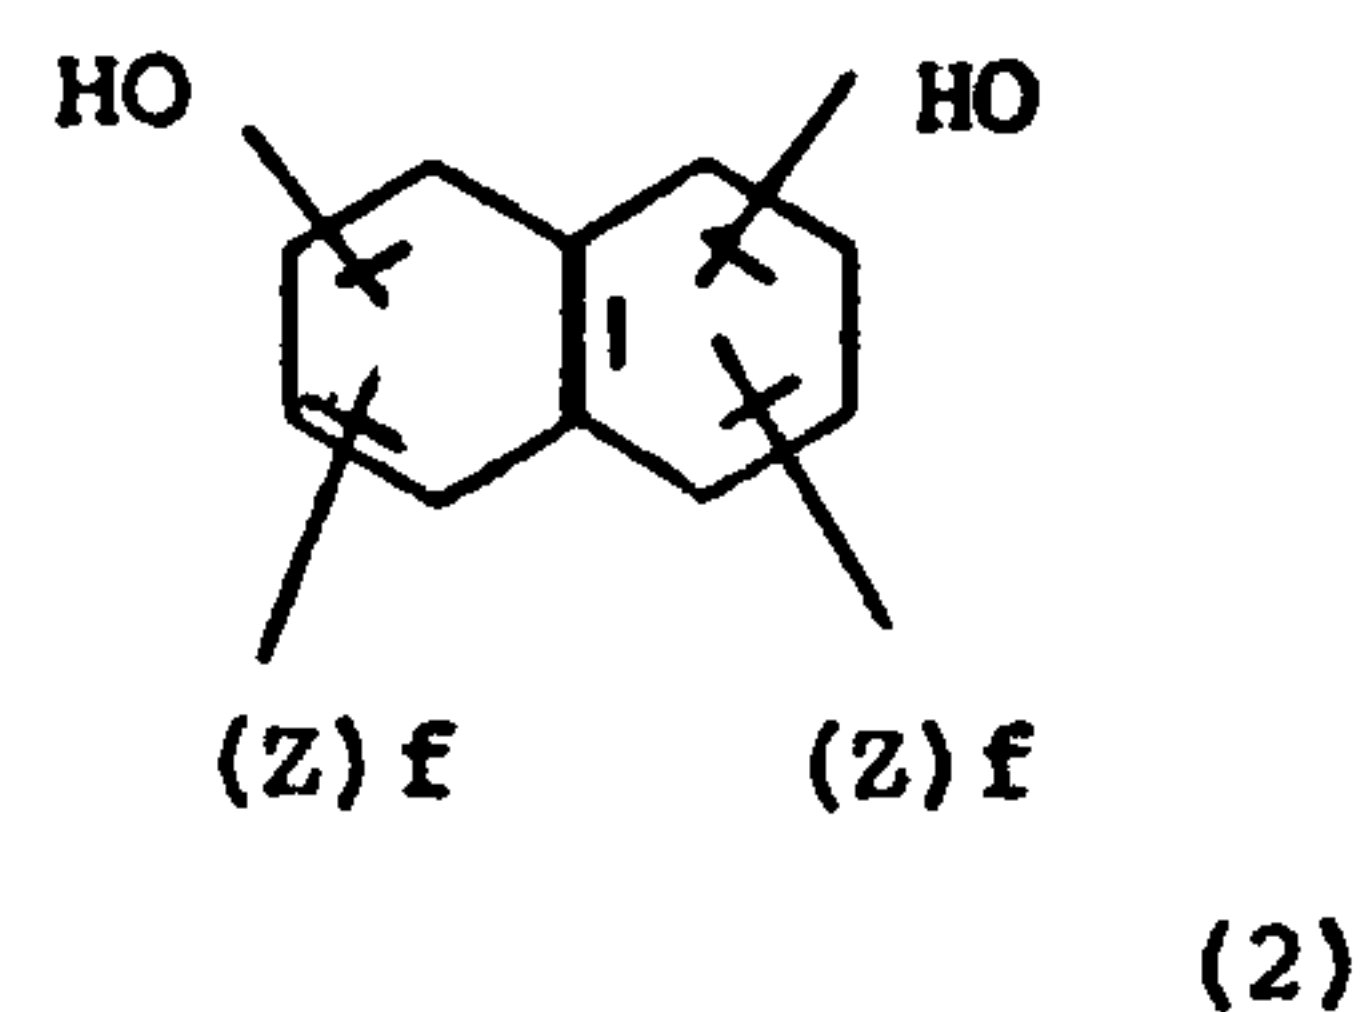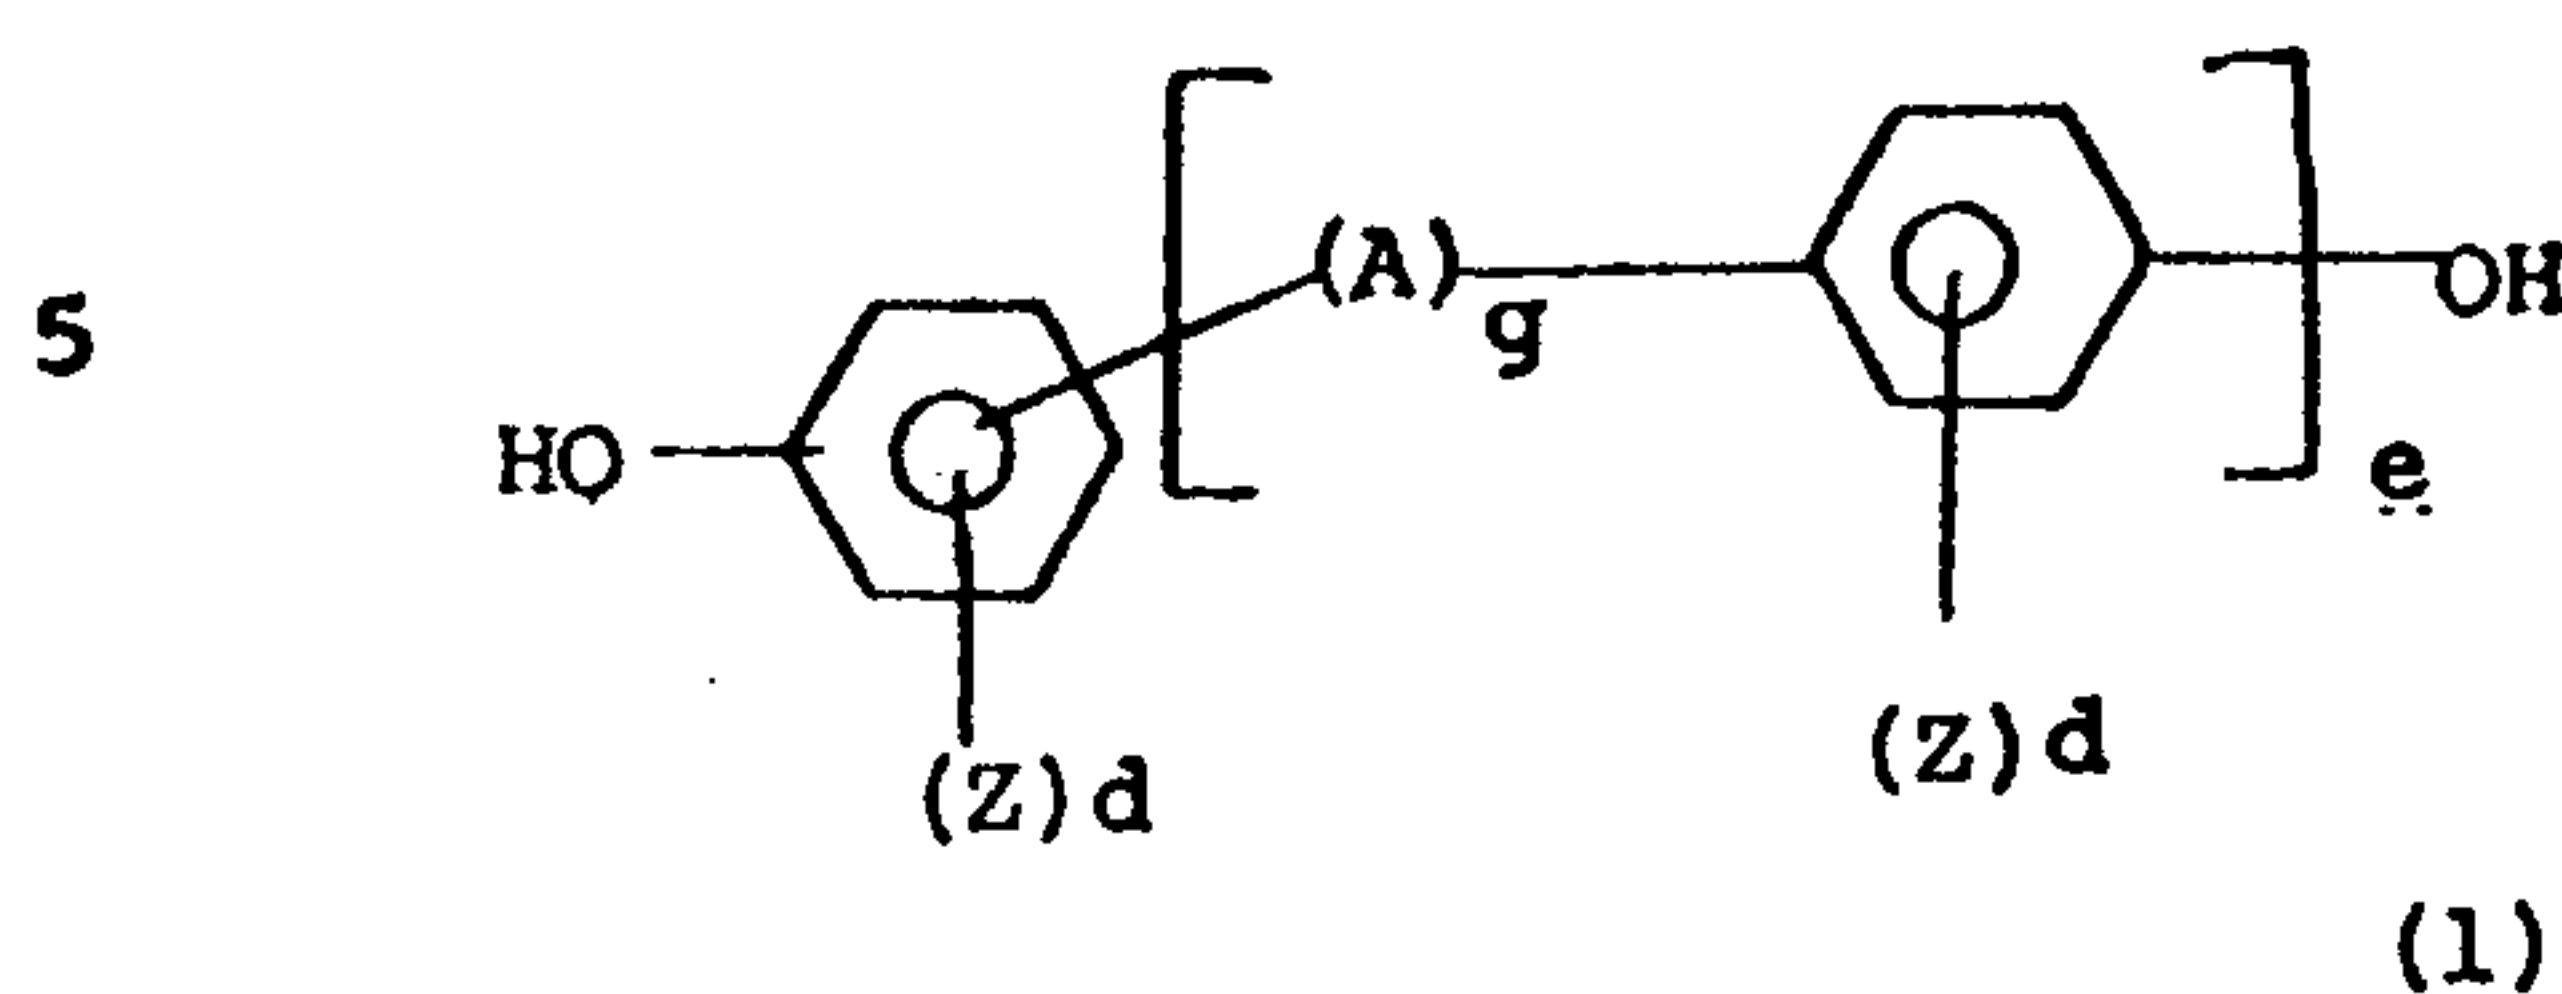

wherein

A denotes an alkylene group with 1 to 8 carbon atoms, an
alkylidene group with 2 to 8 carbon atoms, a cycloalkylene
group with 5 to 15 carbon atoms, a cycloalkylidene group with 5
to 15 carbon atoms, a carbonyl group, an oxygen atom, a sulfur
10 atom, -SO- or -SO₂- or a radical conforming to

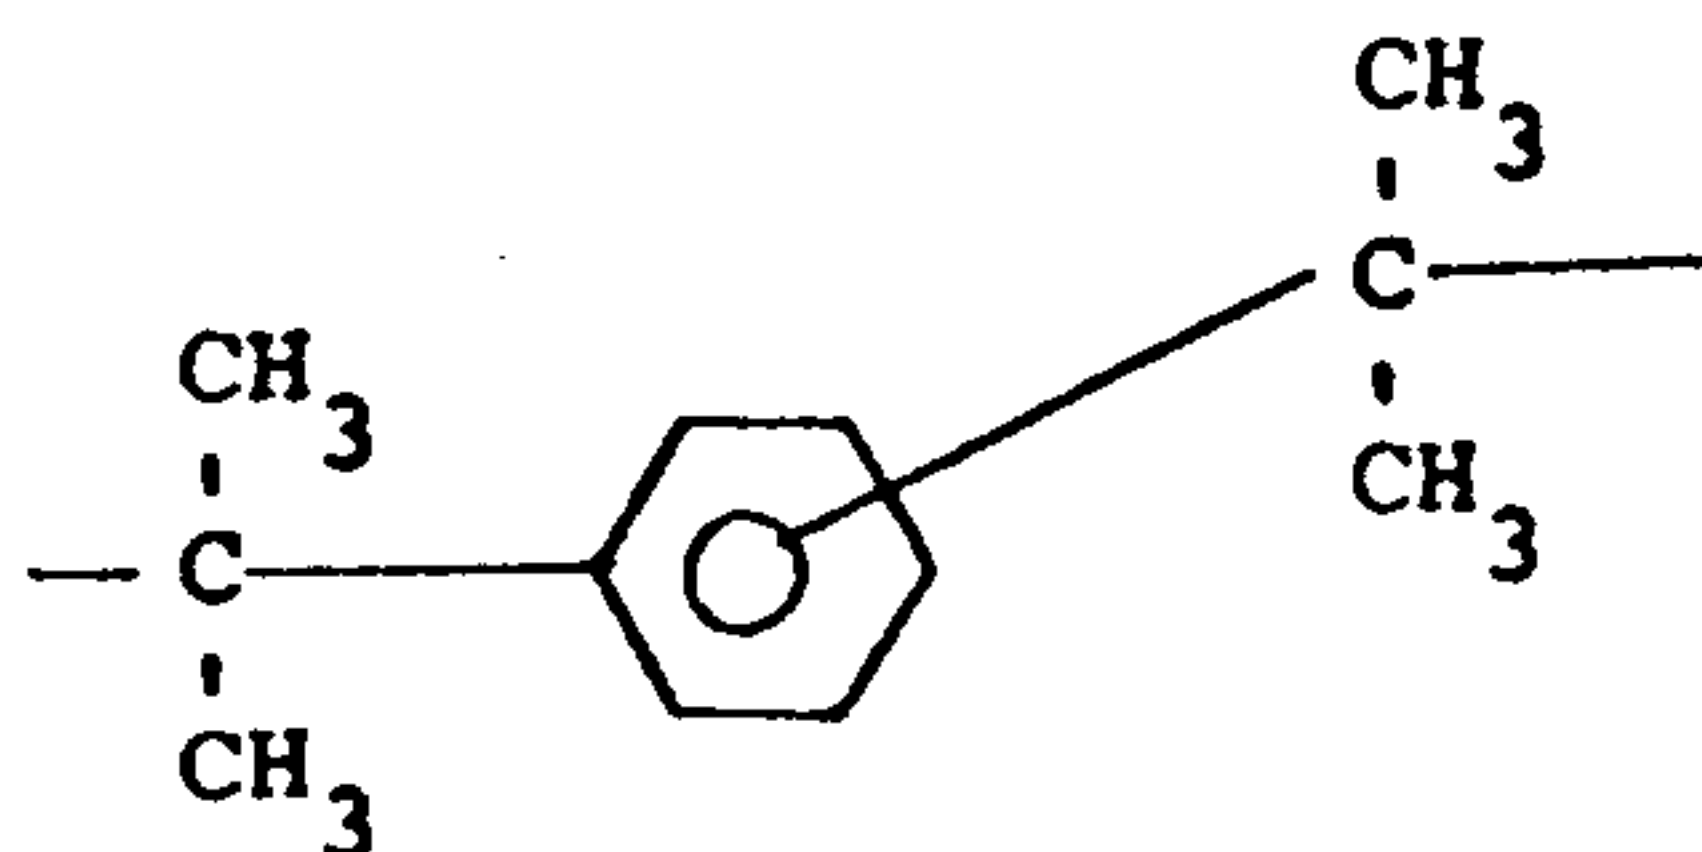

15

e and g both denote the number 0 to 1;
Z denotes F, Cl, Br or C₁-C₄-alkyl and if several Z radicals
are substituents in one aryl radical, they may be identical or
different from one another;
20 d denotes an integer of from 0 to 4; and
f denotes an integer of from 0 to 3.

Among the dihydroxy compounds useful in the practice
of the invention are hydroquinone, resorcinol, bis-(hydroxy-
phenyl)-alkanes, bis-(hydroxyphenyl)-ethers, bis-(hydroxy-
phenyl)-ketones, bis-(hydroxyphenyl)-sulfoxides, bis-(hydroxy-
phenyl)-sulfides, bis-(hydroxyphenyl)-sulfones, and α,α-bis-
25 (hydroxyphenyl)-diisopropyl-benzenes, as well as their
nuclear-alkylated compounds. These and further suitable
aromatic dihydroxy compounds are described, for example, in
Mo-3637

U.S. Patents 3,028,356; 2,999,835; 3,148,172; 2,991,273;
3,271,367; and 2,999,846.

Further examples of suitable bisphenols are 2,2-bis-
(4-hydroxy-phenyl)-propane (bisphenol A), 2,4-bis-(4-hydroxy-
5 phenyl)-2-methyl-butane, 1,1-bis-(4-hydroxyphenyl)-cyclohexane,
 α,α' -bis-(4-hydroxyphenyl)-p-diisopropylbenzene, 2,2-bis-
(3-methyl-4-hydroxyphenyl)-propane, 2,2-bis-(3-chloro-
4-hydroxyphenyl)-propane, bis-(3,5-dimethyl-4-hydroxyphenyl)-
methane, 2,2-bis-(3,5-dimethyl-4-hydroxyphenyl)-propane,
10 bis-(3,5-dimethyl-4-hydroxyphenyl)-sulfide, bis-(3,5-dimethyl-
4-hydroxyphenyl)-sulfoxide, bis-(3,5-dimethyl-4-hydroxyphenyl)-
sulfone, hydroxy-benzophenone, 2,4-bis-(3,5-dimethyl-4-hydroxy-
phenyl)-cyclo-hexane, α,α' -bis-(3,5-dimethyl-4-hydroxyphenyl)-
p-diisopropylbenzene and 4,4'-sulfonyl diphenol.

15 Examples of particularly preferred aromatic
bisphenols are 2,2-bis-(4-hydroxyphenyl)-propane,
2,2-bis-(3,5-dimethyl-4-hydroxyphenyl)-propane and 1,1-bis-
(4-hydroxyphenyl)-cyclohexane.

The most preferred bisphenol is 2,2-bis-(4-hydroxy-
20 phenyl)-propane (bisphenol A).

The polycarbonates of the invention may entail in
their structure units derived from one or more of the suitable
bisphenols.

25 Among the resins suitable in the practice of the
invention are included phenolphthalein-based polycarbonate,
copolycarbonates and terpolycarbonates such as are described in
U.S. Patents 3,036,036 and 4,210,741.

30 The polycarbonates of the invention may also be
branched by condensing therein small quantities, e.g., 0.05-2.0
mol % (relative to the bisphenols) of polyhydroxyl compound.
Polycarbonates of this type have been described, for example,
in German Offenlegungsschriften 1,570,533; 2,116,974 and
2,113,374; British Patents 885,442 and 1,079,821 and U.S.
Patent 3,544,514. The following are some examples of

Mo-3637

-5-

polyhydroxyl compounds which may be used for this purpose:
phloroglucinol; 4,6-dimethyl-2,4,6-tri-(4-hydroxyphenyl)-heptane; 1,3, 5-tri-
(4-hydroxyphenyl)-benzene; 1,1,1-tri-(4-hydroxyphenyl)-ethane; tri-(4-
5 hydroxyphenyl)-phenylmethane; 2,2-bis-[4,4-(4,4'-dihydroxydiphenyl)]-
cyclohexyl-propane; 2,4-bis-(4-hydroxy-1-isopropylidene)-phenol; 2,6-bis-
(2'-dihydroxy-5'-methylbenzyl)-4-methylphenol; 2,4-dihydroxy-benzoic
acid; 2-(4-hydroxyphenyl)-2-(2,4-dihydroxyphenyl)-propane and 1,4-bis-
10 (4,4'-dihydroxytriphenylmethyl)-benzene. Some of the other polyfunctional
compounds are 2,4-dihydroxy-benzoic acid, trimesic acid, cyanuric
chloride and 3,3-bis-(4-hydroxyphenyl)2-oxo-2,3-dihydroindole.

In addition to the polycondensation process mentioned above, other
processes for the preparation of the polycarbonates of the invention are
polycondensation in a homogeneous phase and transesterification. The
15 suitable processes are disclosed in U. S. Patents 3,028,365; 2,999,846;
3,153,008; and 2,991,273.

The preferred process for the preparation of polycarbonates is the
interfacial polycondensation process.

Other methods of synthesis in forming the polycarbonates of the
20 invention such as disclosed in U. S. Patent 3,912,688 may be used.

Suitable polycarbonate resins are available in commerce, for
instance, Makrolon* FCR, Makrolon* 2600, Makrolon* 2800 and Makrolon*
3100, all of which are bisphenol based homopolycarbonate resins differing
in terms of their respective molecular weights and characterized in that
25 their melt flow indices (MFR) per ASTM D-1238 are about 16.5-24, 13-16,
7.5-13.0 and 3.5-6.5 gm/10 min., respectively. These are products of
Bayer Corporation of Pittsburgh, Pennsylvania.

A polycarbonate resin suitable in the practice of the invention is
known and its structure and methods of preparation

30


*trade-mark

Mo-3637

A

have been disclosed, for example in U.S. Patents 3,030,331; 3,169,121; 3,395,119; 3,729,447; 4,255,556; 4,260,731; 4,369,303 and 4,714,746.

5 The halogenated aromatic acid derivative suitable in the context of the invention is a compound conforming to

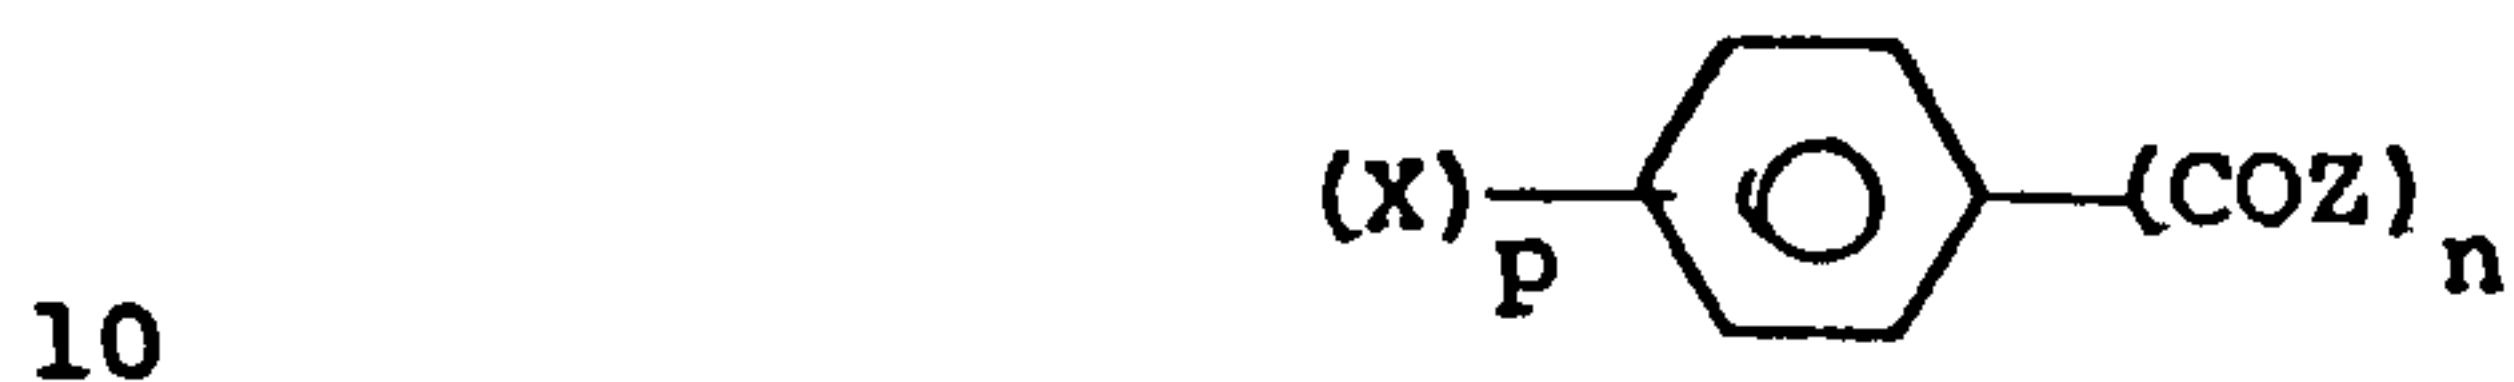

where X denotes chlorine or bromine atom, p is an integer of from 1 to 5, n is an integer from 1 to 4 and Z is an oxygen atom, a C₁₋₂₂ alkoxy, cycloalkoxy, aroxy, alkyl-aroxy or cycloalkyl-aryoxy radical, an amido, alkylamido, or aryl-amido radical. Optionally, Z may be substituted by at least one member selected from the group consisting of S, O, Cl and Br atoms.

15

In a preferred embodiment, the halogenated aromatic acid derivative conforms to



where X is a chlorine or bromine atom, n is an integer of 1 to 4, p is an integer of 1 to 5, and R is a C₁₋₂₂ alkyl, cycloalkyl, aryl, alkyl-aryl or cycloalkyl-aryl radical. Optionally, R may be substituted by at least one member selected from the group consisting of S, O, Cl and Br atoms.

25


A more preferred embodiment entails a halogenated phthalic acid ester, most preferably tetrabromophthalate.

The halogenated aromatic acid derivative of the invention may be prepared by conventional procedures well known in the art.


5 Examples of halogenated aromatic acid derivatives are described in U.S. Patents 4,098,704; 4,298,517; 4,397,977, 4,904,795.

Suitable halogenated aromatic acid derivatives including the preferred tetrabromophthalate, are available in commerce.

10 The poly(alkylene oxide) oligomer of the invention conforms structurally to

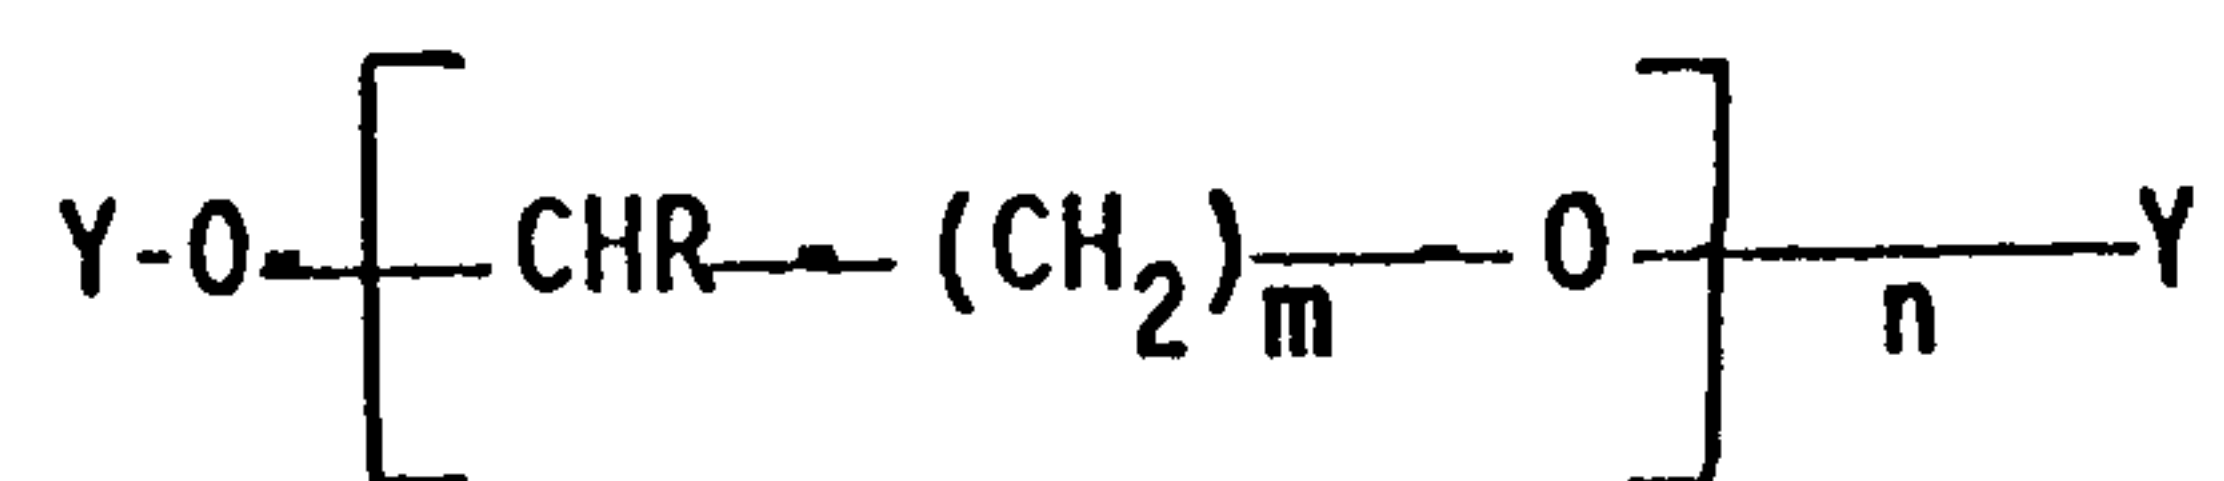

15 Preferably, the oligomer conforms to

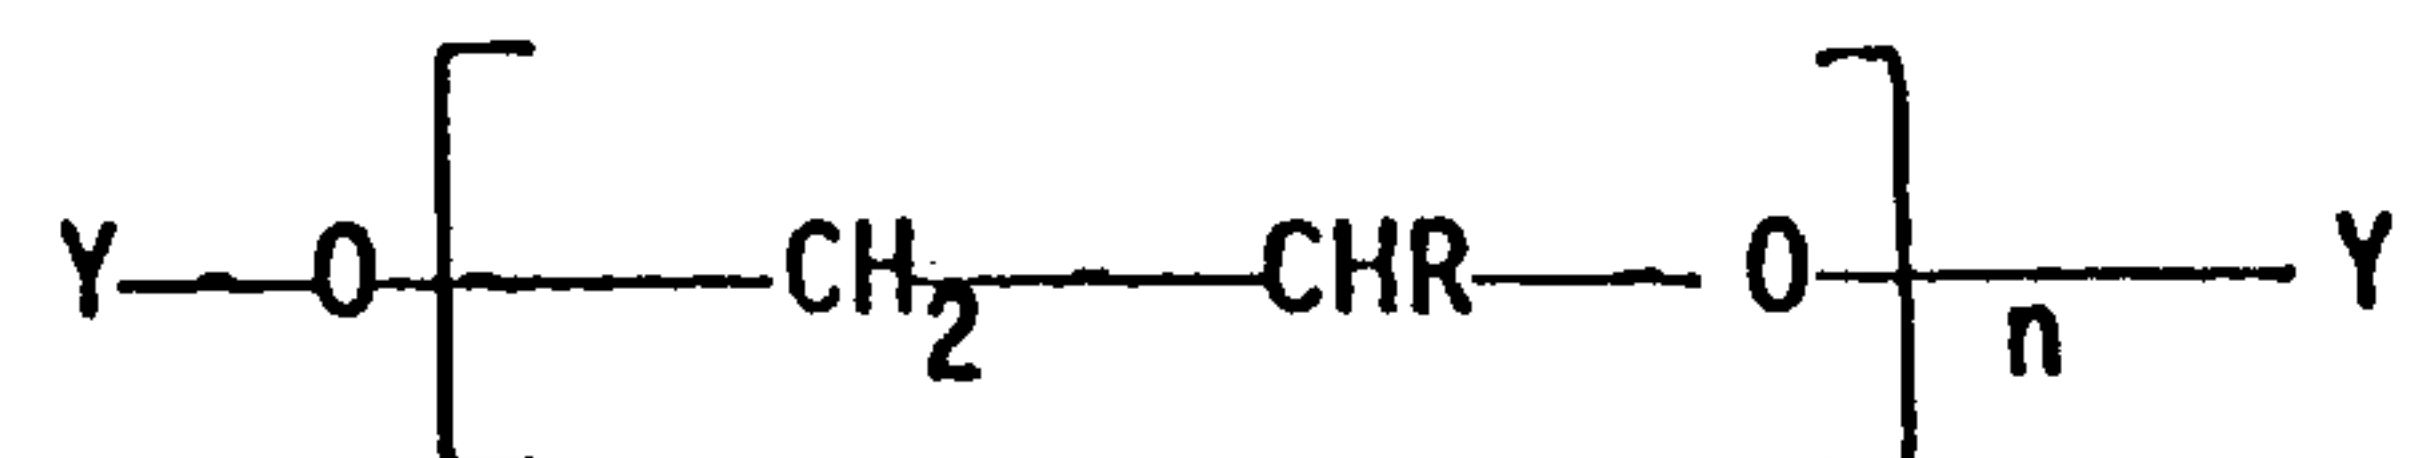

20 where Y denotes a hydrogen atom, a C₁₋₃₀ linear or branched alkyl or acyl radicals, a silyl or a pyranil radical, R is a C₁₋₂₂ alkyl, cycloalkyl, aryl, alkylaryl or cycloalkyl-aryl radicals, m is an integer from 1 to 4, and n is an integer of 1 to 70, preferably 30 to 50 and more preferably about 35 to 40.

25 The composition of the invention contains both the halogenated aromatic acid derivative and the poly(alkylene oxide) oligomer. These components are introduced to the polycarbonate resin at sufficient amounts to stabilize the composition against increase in yellowness upon exposure to gamma radiation. More preferably, the relative amounts of these additive components is about 0.1 to about 10 %, more preferably 0.2 to 5.0 %, of the halogenated aromatic acid derivative, and 0.1 to 5%, more preferably 0.5 to 1.0 % of the poly(alkylene oxide) oligomer, said percents being relative to the weight of the composition. The incorporation of the


30

Mo-3637

components to the composition and the processing of the inventive composition are carried out following conventional procedures which are well known in the art.

Experimental

5 Compositions within the scope of the invention have been prepared and their properties evaluated. The results of the evaluation are summarized below. In demonstrating the invention, the compositions were based on Makrolon*2508 polycarbonate resin, a bisphenol-A based homopolycarbonate
10 having a Melt flow index - as determined in accordance with ASTM D 1238 of about 16 gm/10 minutes, a product of Bayer Corporation. The polyether was an oligomer of propylene glycol conforming structurally to

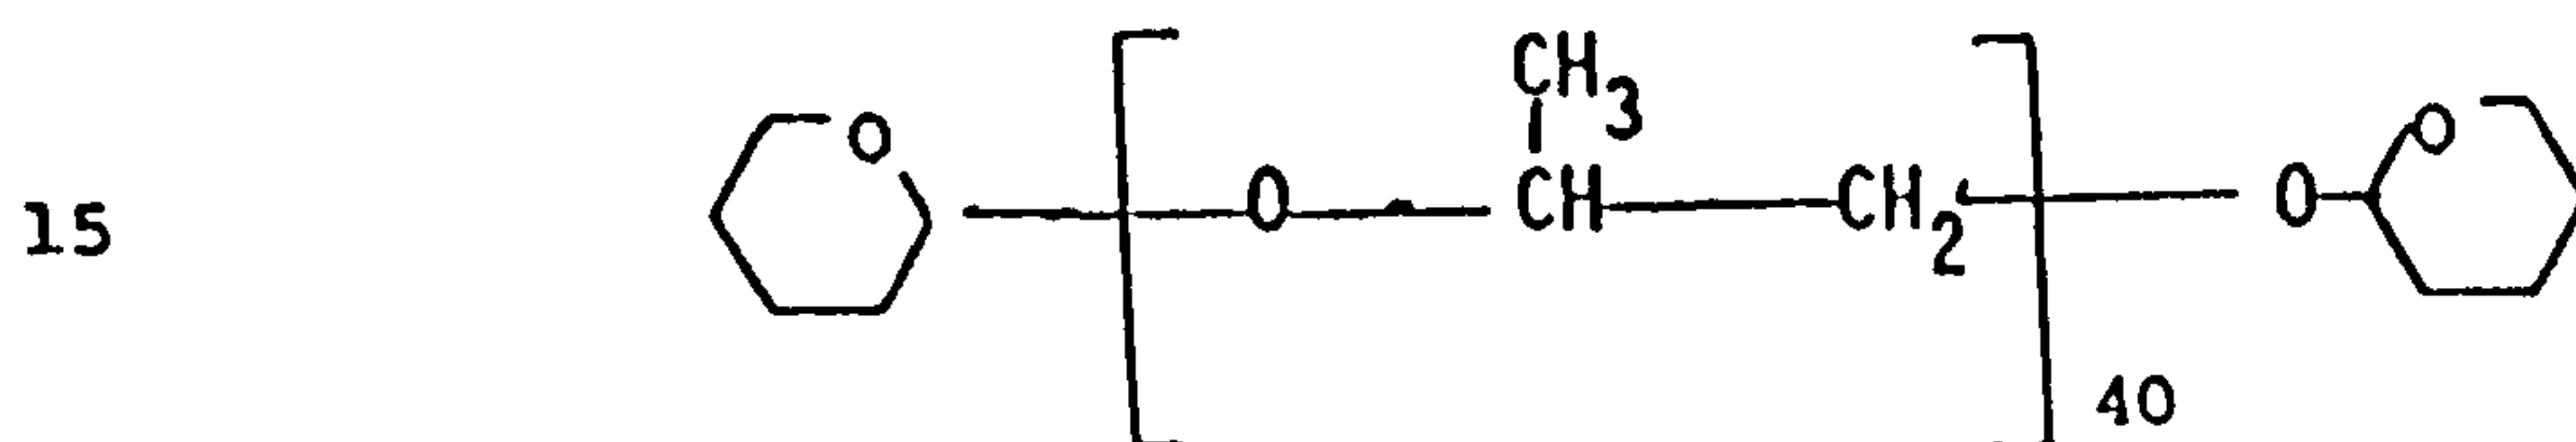

The halogenated aromatic acid derivative was di-2-ethylhexyl tetrabromophthalate (TBPH), available commercially as Pyronil*45, a product of Penwalt Corporation, King of Prussia, Pennsylvania.

20 The compositions were processed conventionally following procedures known in the art. After tumble blending the compositions were pelletized on a ZSK twin screw extruder where the temperatures profile was 190, 240, 270, 270, 270 and 270°C.; Screw speed 300 rpm. Color chips measuring 2.0" x 3.0" x 0.100" were injection molded using a typical molding machine
25 with a resin melt temperature of between 540 and 600°F. The chips were subjected to gamma radiation at a dose of 2.5 Mrad. The irradiated chips were stored in darkness. At intervals, the yellowness indices of the chips were measured in accordance
30 with ASTM D 1925. The results are shown in the table below.

*trade-mark

Mo-3637

TABLE 1

		1	2	3	4
	Components, wt.%				
	Polycarbonate,	100	99.0	99.5	99.5
	Propylene glycol oligomer	0.0	0.5	0.0	0.5
5	TBPH	0.0	0.5	0.5	0.0
	Yellowness Index				
	Pre-irradiation	4.81	3.63	3.88	4.17
	6 days after irradiation	21.8	11.74	15.56	15.58
10	9 days after irradiation	17.65	11.32	15.01	13.75
	29 days after irradiation	16.64	10.94	13.89	17.3
	35 days after irradiation	16.89	10.87	13.68	12.6
15	55 days after irradiation	17.28	10.59	13.5	12.21
	Delta Yellowness Index (from 6 to 55 days after irradiation)	4.52	1.15	2.06	3.37
20					
25					
20	Mo-3637				

5 The yellowness index measurements show that the polyether and the brominated phthalate ester are nearly equivalent in terms of their efficacy in imparting gamma stability to the composition. The color however continues to change significantly over several weeks. The composition in accordance with the invention - Example 2 - shows both lower initial color and smaller change - as reflected by the delta yellowness index- during the same period.

10 In an additional set of experiments, the results of which are shown below, the synergy associated with the present invention is clearly demonstrated.

15

20

25

30

TABLE 2

		5	6	7	8
	Components, wt.%				
	Polycarbonate,	100	99.25	99.25	99.25
5	Propylene glycol oligomer	0.0	0.37	0.74	0.0
	TBPH	0.0	0.37	0.0	0.74
	Yellowness Index				
	Pre-irradiation	3.57	2.58	2.14	3.30
10	12 days after irradiation	21.59	10.95	12.88	12.97
	25 days after irradiation	19.48	10.61	12.23	12.71
	56 days after irradiation	18.35	10.49	11.96	12.43
15	Delta Yellowness Index (from 12 to 56 days after irradiation)	3.24	0.46	0.92	0.54
20					
25					
30					

Mo-3637

Although the invention has been described in detail
in the foregoing for the purpose of illustration, it is to be
understood that such detail is solely for that purpose and that
variations can be made therein by those skilled in the art
5 without departing from the spirit and scope of the invention
except as it may be limited by the claims.

10

15

20



25

30

-13-


The embodiments of the invention in which exclusive property or privilege is claimed are defined as follows:

1. A thermoplastic molding composition comprising an aromatic polycarbonate resin prepared from at least one dihydroxy compound that conforms to formula (1) or (2)

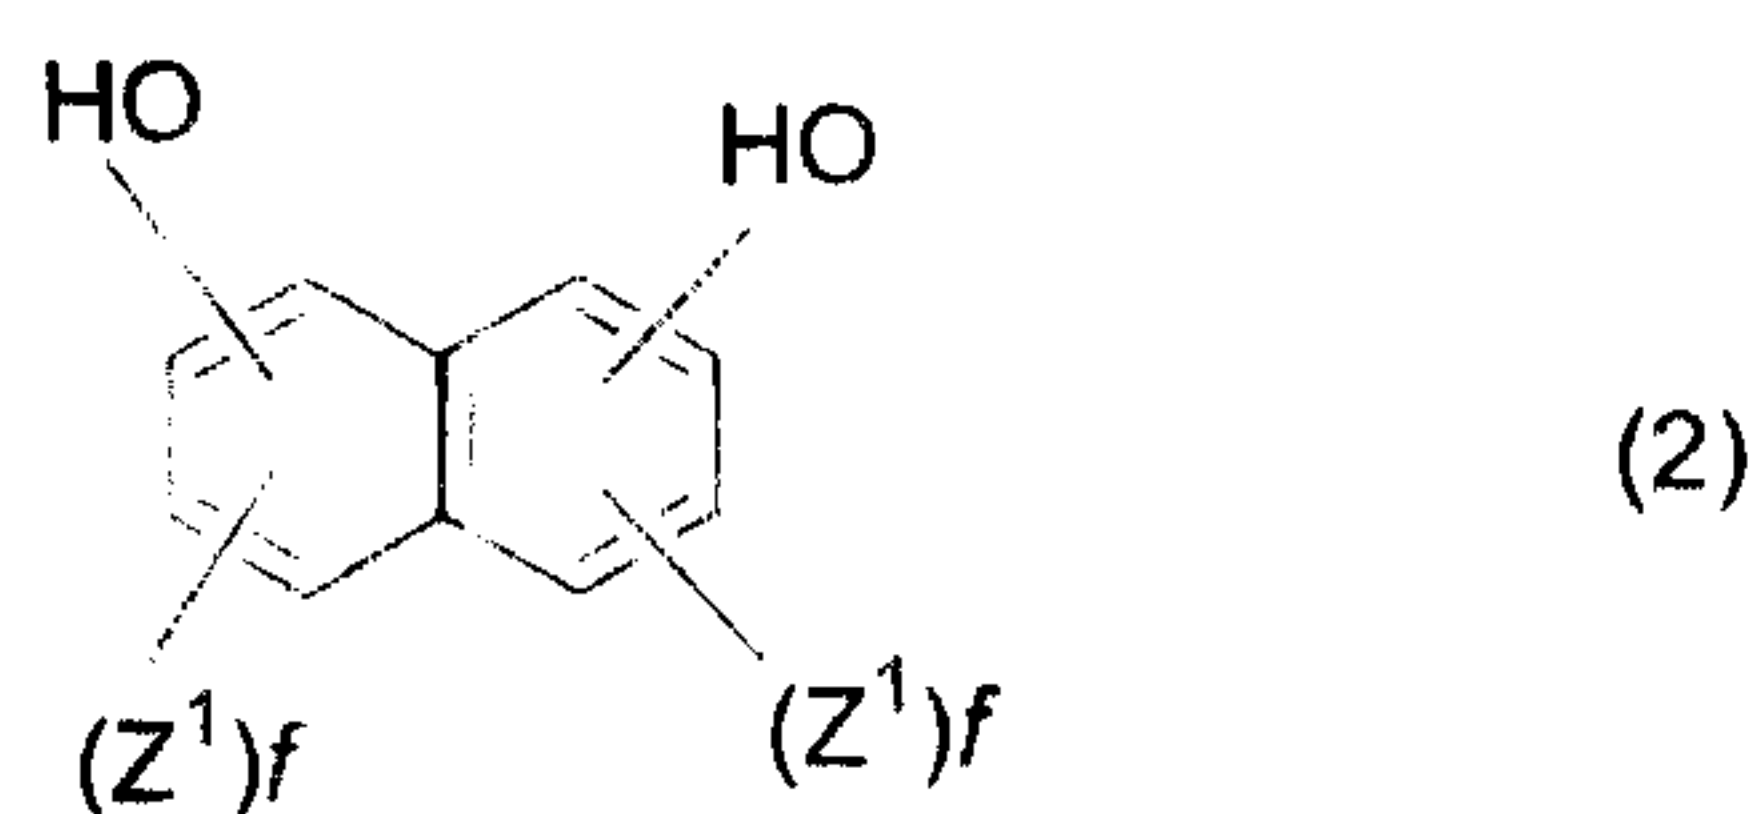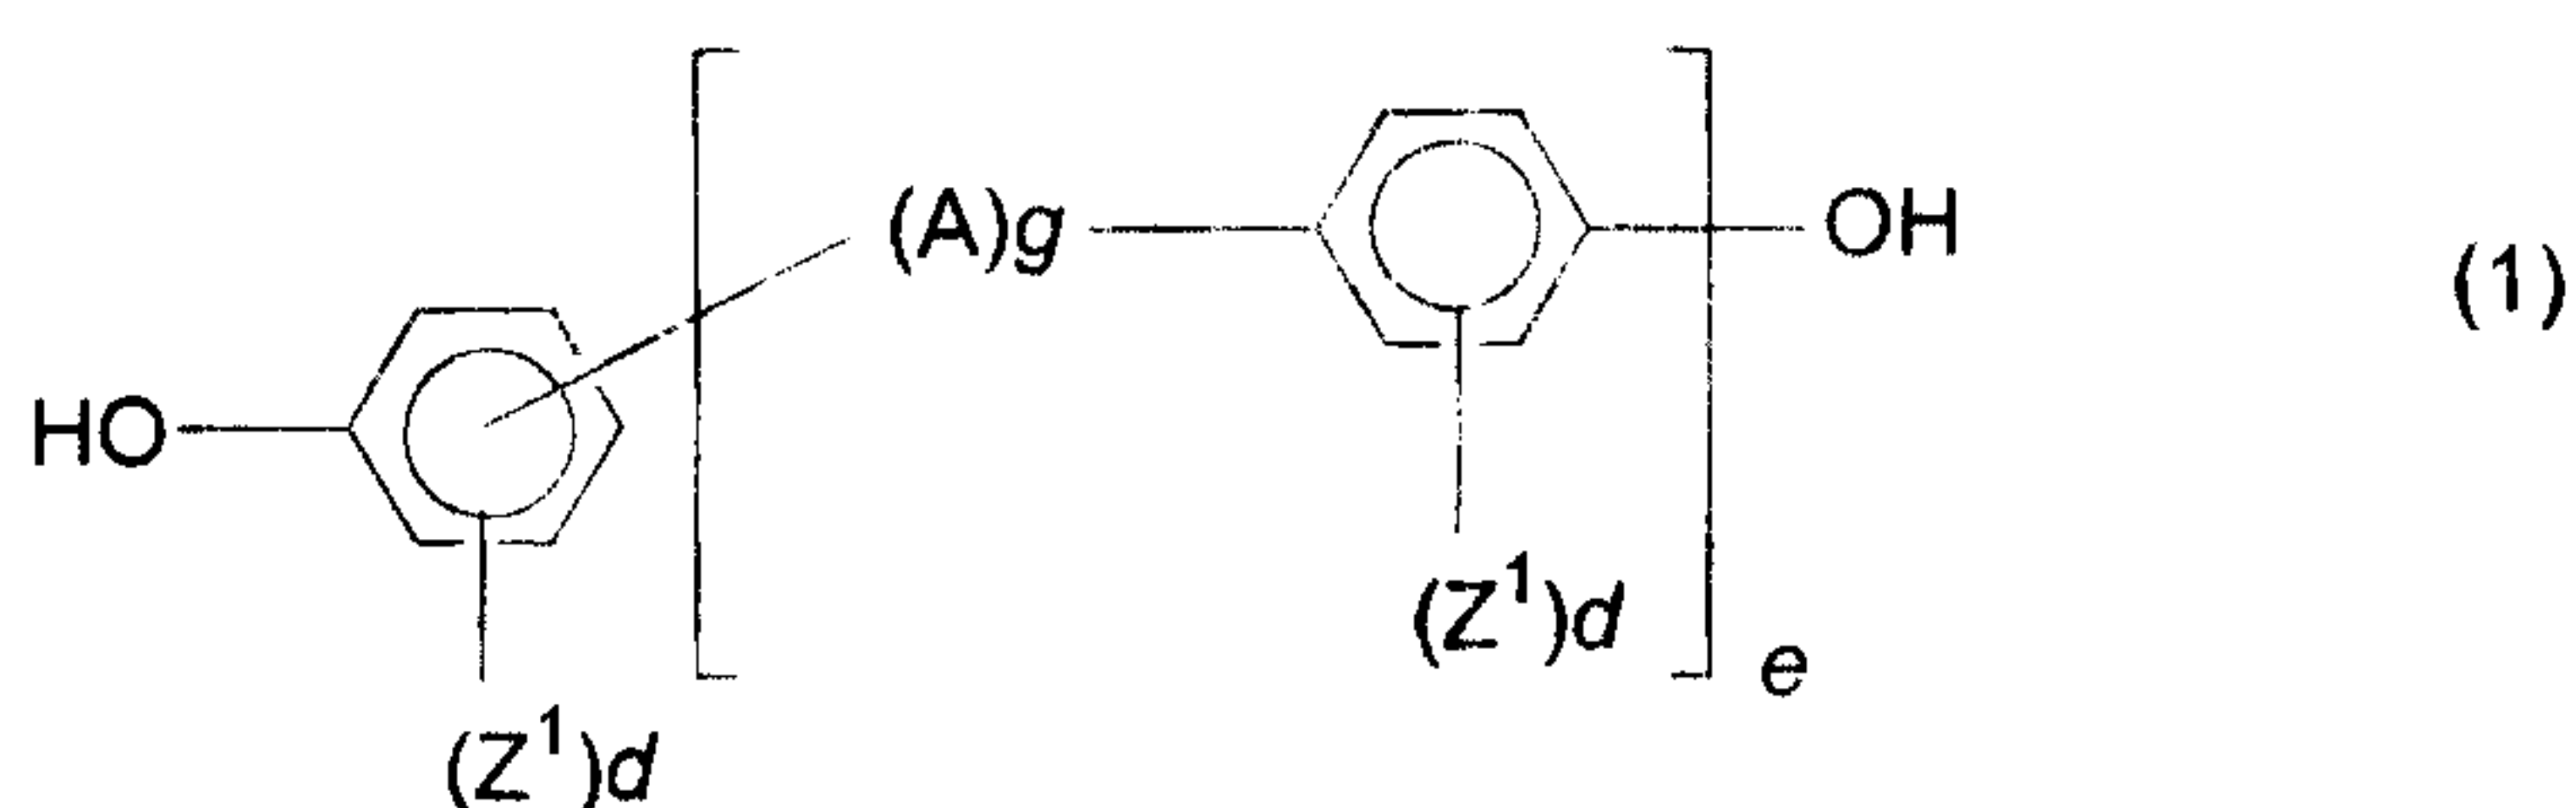

wherein

- 10 A denotes an alkylene group with 1 to 8 carbon atoms, an alkylidene group with 2 to 8 carbon atoms, a cycloalkylene group with 5 to 15 carbon atoms, a cycloalkylidene group with 5 to 15 carbon atoms, a carbonyl group, an oxygen atom, a sulfur atom, -SO- or -SO₂- or a radical conforming to

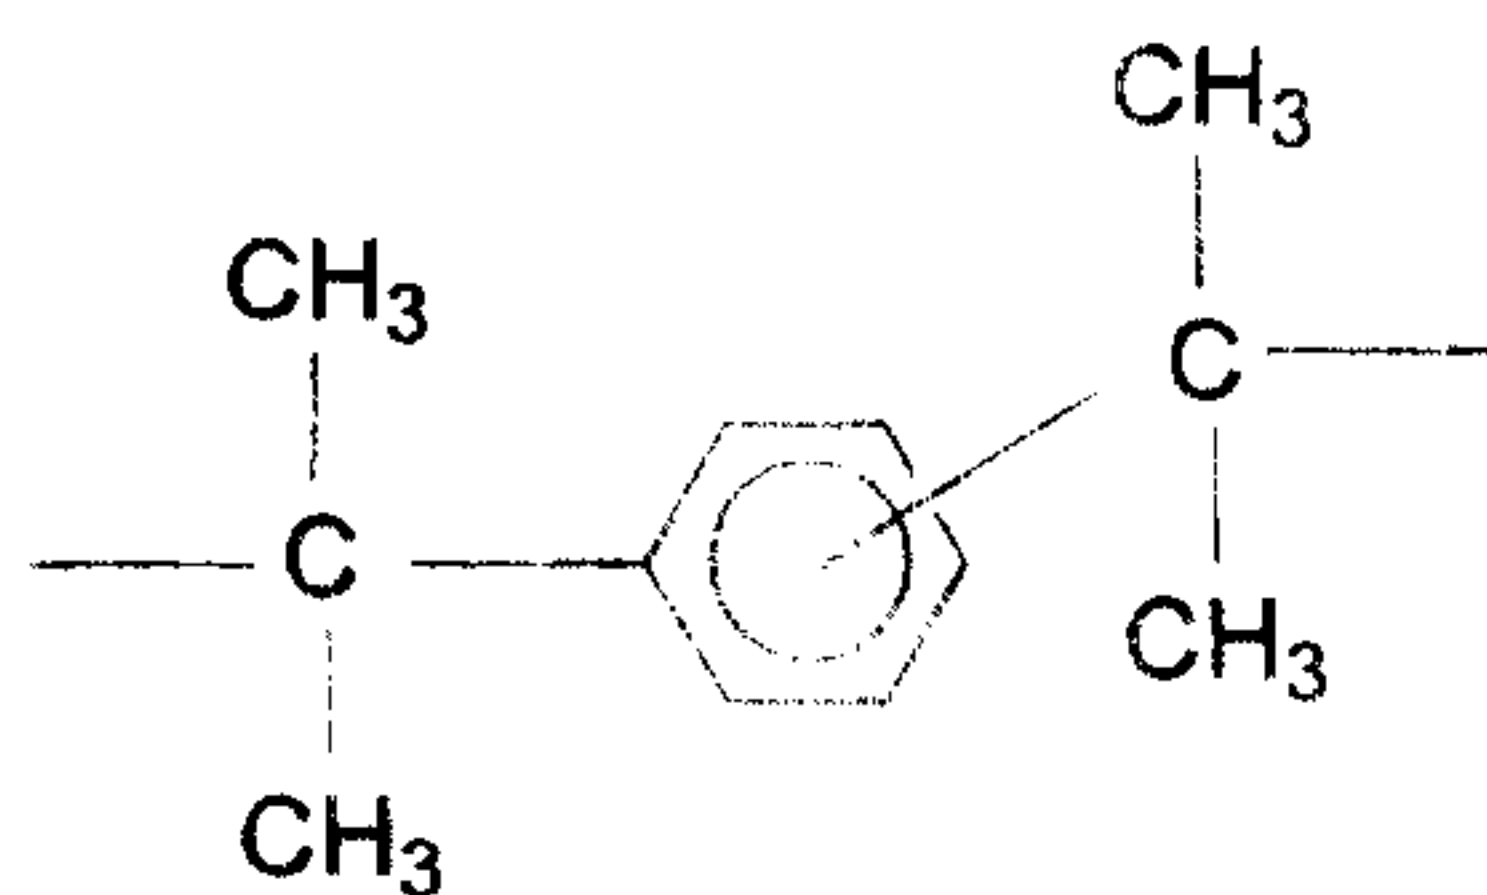

e and g both denote the number 0 to 1;


-14-

Z^1 denotes C_{1-4} -alkyl and if several Z^1 radicals are substituents in one aryl radical, they may be identical or different from one another;

5 d denotes an integer of from 0 to 4; and

f denotes an integer of from 0 to 3;


(i) a halogenated aromatic acid derivative conforming to

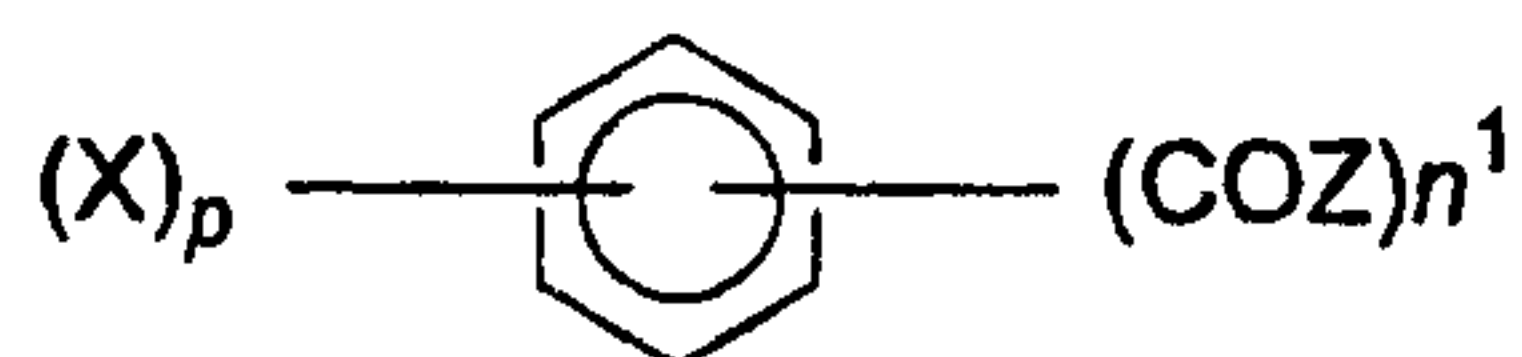

10 wherein X denotes chlorine or bromine, p is an integer of from 1 to 5, n^1 is an integer from 1 to 4 and Z is a C_{1-22} -alkoxy, cycloalkoxy, aroxy, alkyl-aroxy or cycloalkyl-aroxy radical, an amido, alkylamido, or arylamide radical,

and

(ii) a poly(alkylene oxide) oligomer conforming to

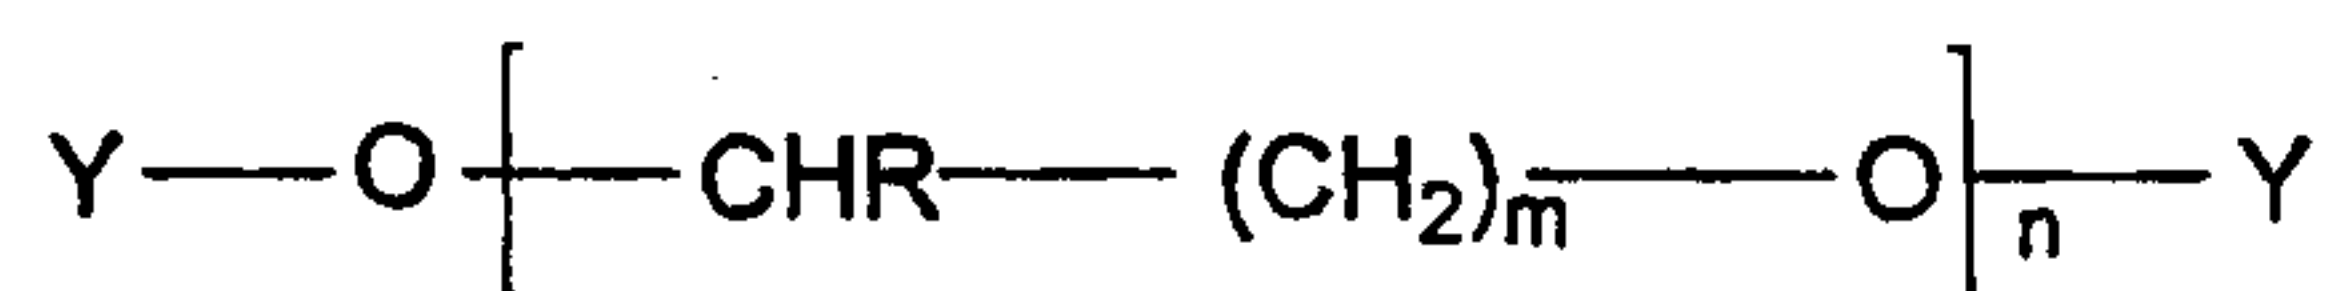

15

where

Y denotes a C_{1-30} linear or branched alkyl or acyl radicals, or a pyranlyl radical,

20 R is a C_{1-22} alkyl, cycloalkyl, aryl, alkylaryl or cycloalkyl-aryl radical, and


m is an integer of from 1 to 4, and

n is an integer of 1 to 70,

said (i) being present in an amount of 0.1 to 10% and said (ii) being present in an amount of 0.1 to 5%, the percents, both occurrences being
25 relative to the weight of the composition.


-15-

2. The composition of Claim 1 wherein said aromatic acid derivative is a halogenated aromatic acid ester conforming to:

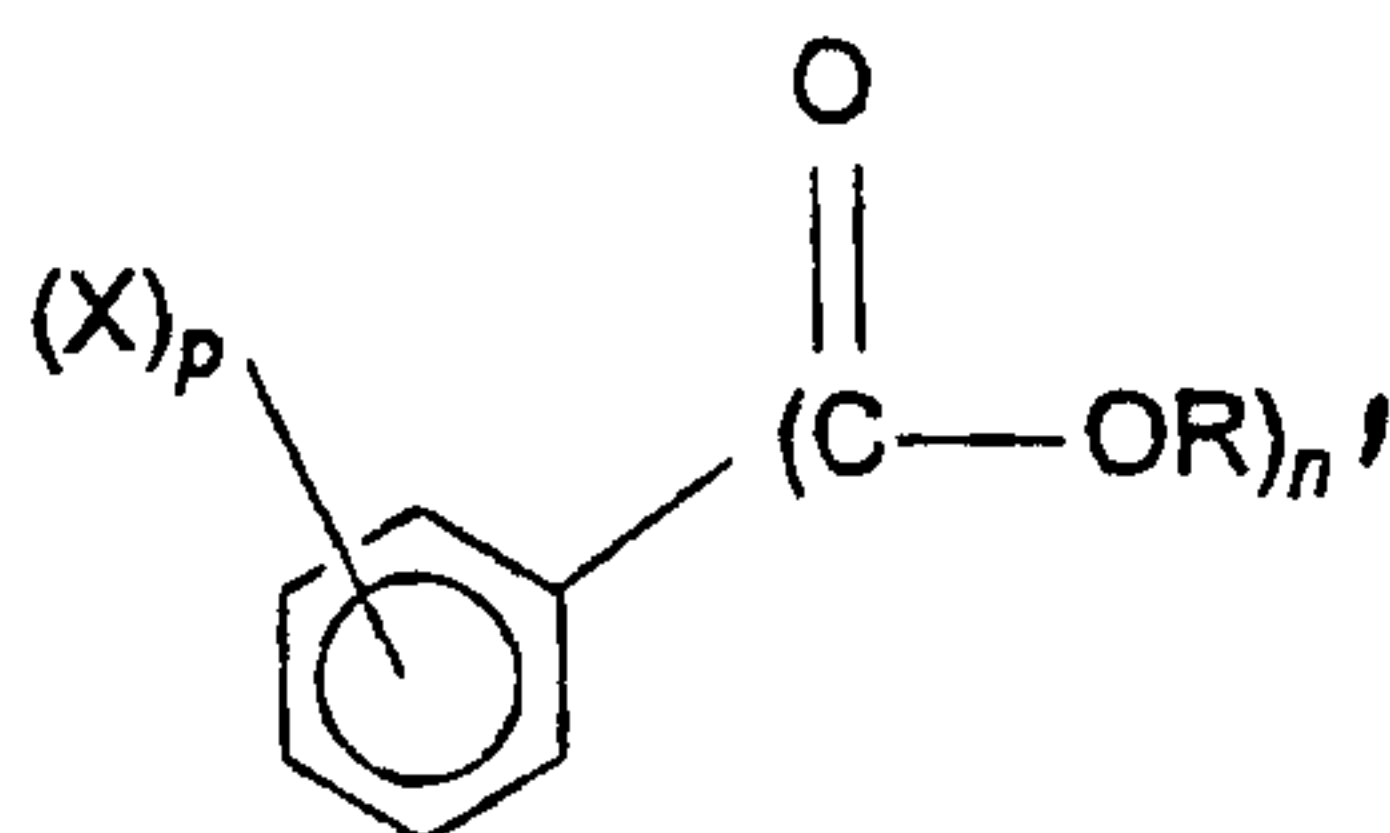

5 where X denotes chlorine or bromine atom, p is an integer from 1 to 5; n^1 is an integer from 1 to 4, and R is a C_{1-22} alkyl, cycloalkyl, aryl, alkylaryl or cycloalkyl-aryl radical.

3. The composition of Claim 1 wherein said oligomer conforms to

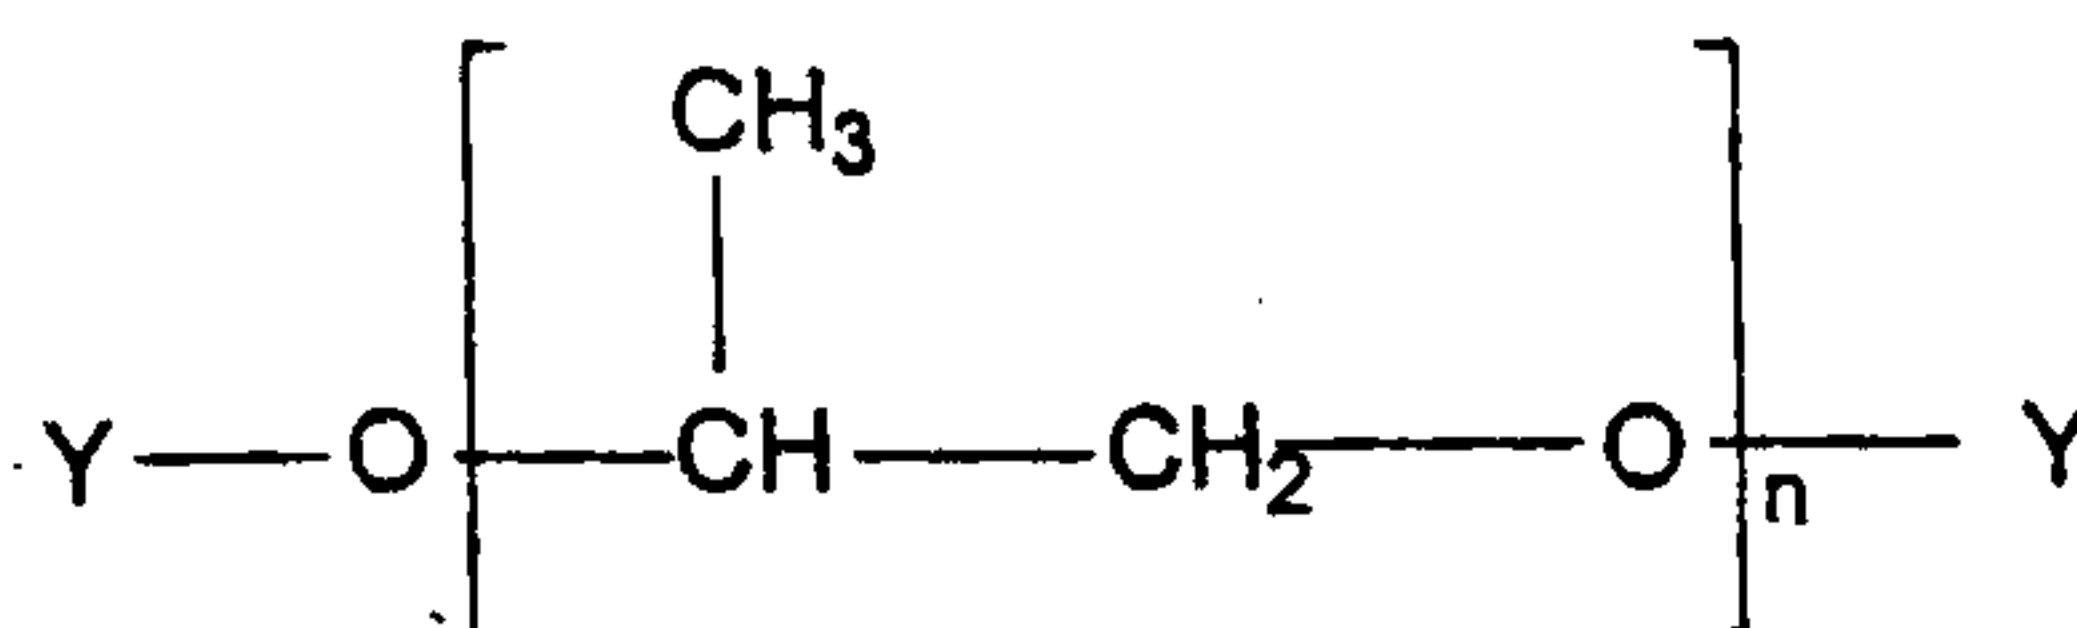

10

where Y denotes, a C_{1-30} linear or branched alkyl or acyl radicals, or a pyranyl radical, and n is an integer of 1 to 70.

4. The composition of Claim 1 wherein said n is 1 to 30.
5. The composition of Claim 1 wherein said n is 1 to 5.
- 15 6. The composition of Claim 5 wherein said aromatic acid derivative is a tetrabromophthalate ester.
7. The composition of Claim 1 wherein said (i) is present in an amount of 0.2 to 1.0% and said (ii) is present in an amount of 0.5 to 1.0% relative to the weight of the composition.
- 20 8. The composition of Claim 7 wherein said (ii) is poly(propylene oxide).

-16-

9. The composition of Claim 8 wherein said (i) is tetrabromophthalate ester.

10. A thermoplastic molding composition comprising an aromatic polycarbonate resin and


(i) 0.1 to 10% of a halogenated aromatic acid derivative conforming to



X denotes chlorine or bromine atom, p is an integer of from 1 to 5, n¹ is an integer from 1 to 4 and Z is a C₁₋₂₂ alkoxy, cycloalkoxy, aroxy, alkyl-aroxy or cycloalkyl-aryloxy radical, an amido, alkylamido or aryl-amido radical


and

(ii) 0.1 to 5% of a poly(alkylene oxide) oligomer conforming to

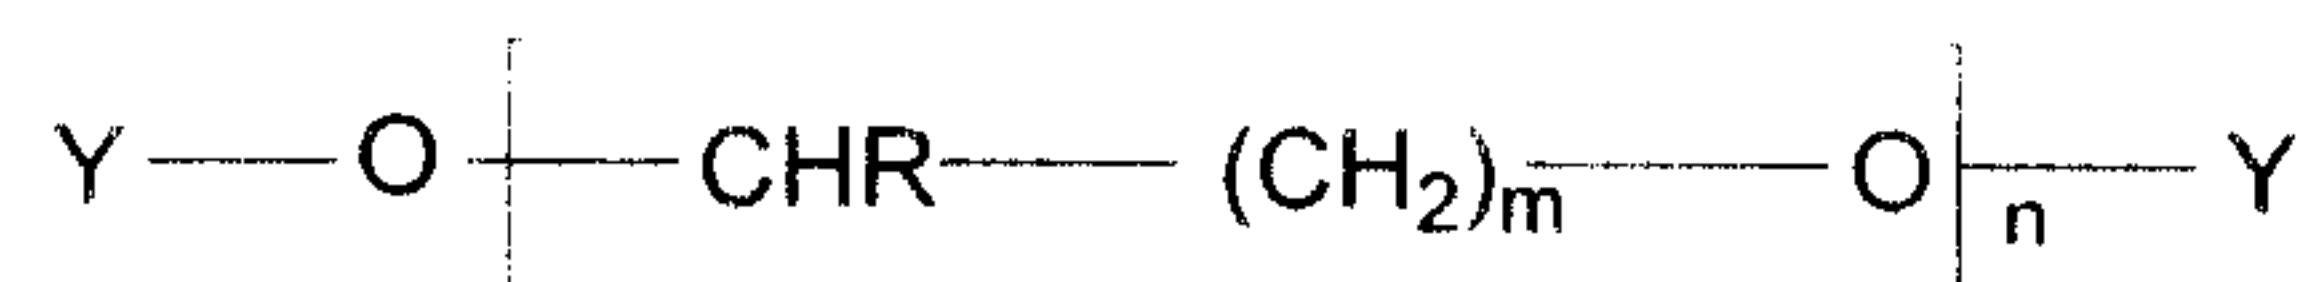

where Y denotes a pyranil radical, R is a C₁₋₂₂ alkyl, cycloalkyl, aryl, alkylaryl or cycloalkyl-aryl radicals and m is an integer of from 1 to 4 and n is an integer of 1 to 70, the percents, both occurrences being relative to the weight of the composition.

11. The composition of Claim 10 wherein said oligomer conforms to

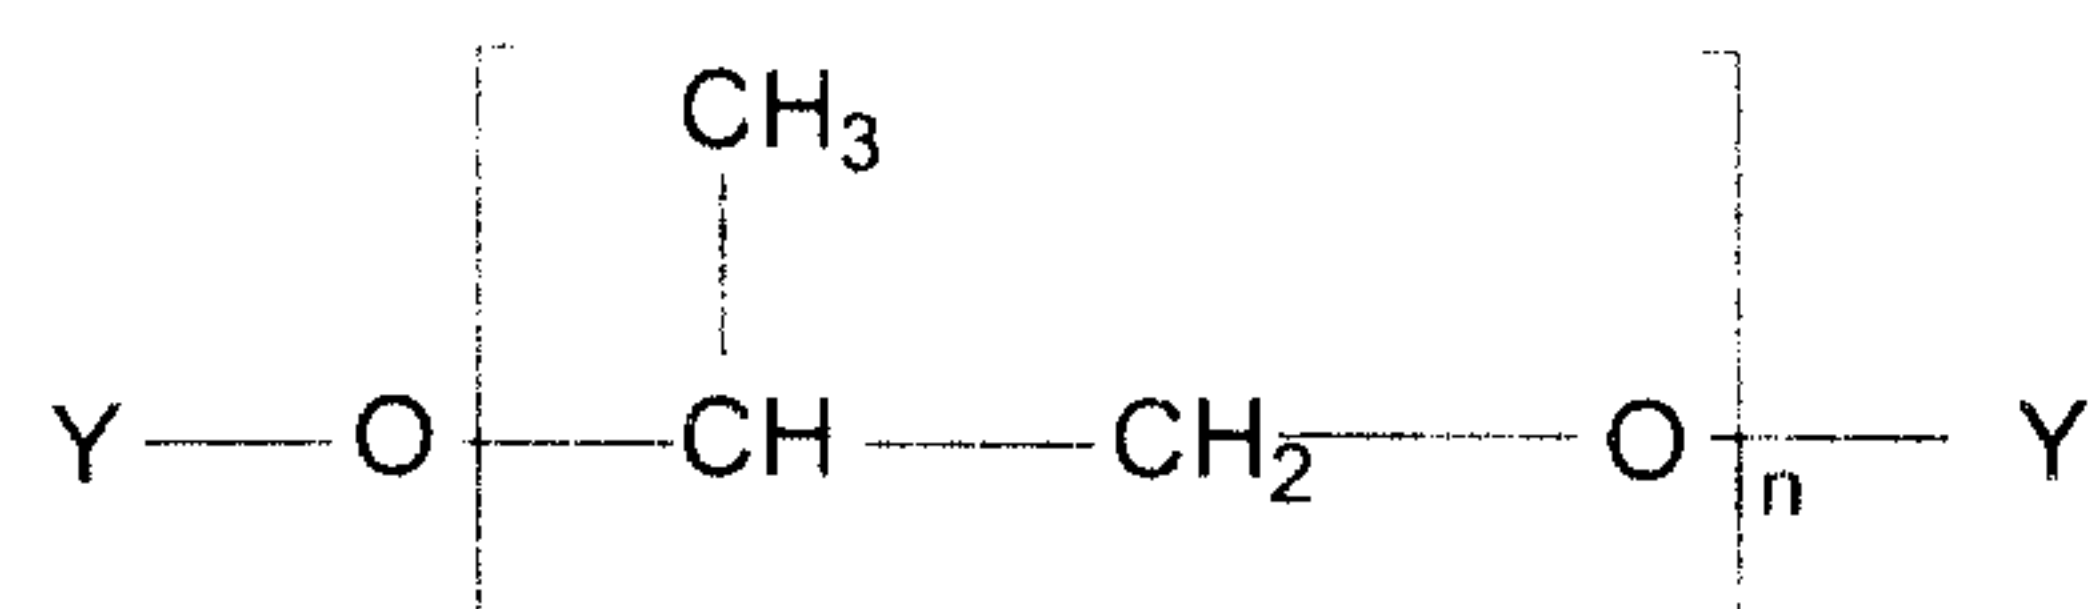

where Y denotes a pyranil radical.

12. The composition of Claim 10 wherein n is 1 to 5 and wherein said aromatic acid derivative is a tetrabromophthalate ester.

-17-

13. The composition of Claim 10 wherein said (i) is
tetrabromophthalate ester, and is present in an amount of 0.2 to 1.0% and
said (ii) is present in an amount of 0.5 to 1.0% relative to the weight of the
5 composition.