

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Printing machine

(51)⁶ International Patent Classification(s)
B41F 15/08 (2006.01) 20060101ALI2005100
B41F 15/18 (2006.01) ^{8BMEP} **B41M**
B41M 1/12 (2006.01) 1/12
B41M 3/14 (2006.01) 20060101ALI2006072
B41F 15/08 ^{2BMEP} **B41M**
20060101AFI2005100 3/14
^{8BMEP} **B41F** 20060101ALN200607
15/18 ^{22BMEP}
PCT/IB2004/002144

(21) Application No: 2004251123

(22) Application Date: 2004 .06 .29

(87) WIPO No: W005/000585

(30) Priority Data

(31) Number	(32) Date	(33) Country
03014827.4	2003 .06 .30	EP

(43) Publication Date : 2005 .01 .06

(71) Applicant(s)
KBA Giori S.A.

(72) Inventor(s)
Gygi, Matthias

(74) Agent/Attorney
PIZZEYS, Level 14, ANZ Centre 324 Queen Street, Brisbane, QLD, 4000

(56) Related Art
US 5339731
IT 1240424
EP 710508

(12) DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITÉ DE COOPÉRATION
EN MATIÈRE DE BREVETS (PCT)

(19) Organisation Mondiale de la Propriété
Intellectuelle
Bureau international



(43) Date de la publication internationale
6 janvier 2005 (06.01.2005)

PCT


(10) Numéro de publication internationale
WO 2005/000585 A1

- (51) Classification internationale des brevets⁷ :
B41F 15/08, 15/18,
B41M 3/14, B42D 15/00, B65H 29/00
- (21) Numéro de la demande internationale :
PCT/IB2004/002144
- (22) Date de dépôt international : 29 juin 2004 (29.06.2004)
- (25) Langue de dépôt : français
- (26) Langue de publication : français
- (30) Données relatives à la priorité :
03014827.4 30 juin 2003 (30.06.2003) JP
- (71) Déposant (pour tous les États désignés sauf US) : KBA-
GIORI S.A. [CH/CH]; 4, Rue de la Paix, CH-1003 Lau-
sanne (CH).
- (72) Inventeur; et
- (75) Inventeur/Déposant (pour US seulement) : GYGL,
- Matthias [CH/CH]; 10, Avenue des Planches, CH-1820
MONTREUX (CH).
- (74) Mandataires : GROSFILIER, Philippe etc.; C/O
BUGNION S.A., Case Postale 375, CH-1211 Genève 12
(CH).
- (81) États désignés (sauf indication contraire, pour tout titre de
protection nationale disponible) : AE, AG, AI, AM, AT,
AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO,
CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB,
GD, GE, GH, GM, GR, HU, ID, IL, IN, IS, JP, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) États désignés (sauf indication contraire, pour tout titre
de protection régionale disponible) : ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Suite sur la page suivante]

(54) Title: PRINTING MACHINE

(54) Titre : MACHINE D'IMPRESSION

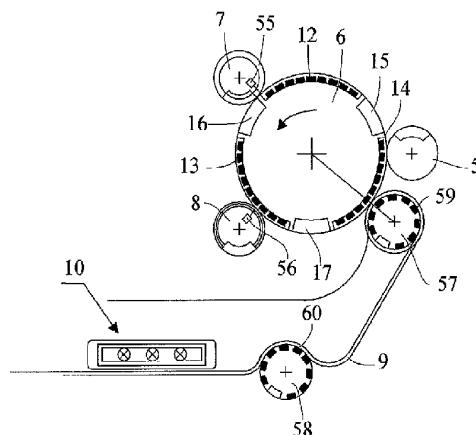

(57) Abstract: A printing machine including at least one transfer system (5) for transferring a substrate (1) onto a printing cylinder (6), at least one cylindrical or planar screen (7, 8) with a scraper, which screen engages the printing cylinder (6) and prints the substrate using an ink that contains pigments of which the orientation can be adjusted by means of a magnetic field, and a discharge system (9) for removing the substrate (1). The printing cylinder comprises at least one magnetic element on the printing surface thereof, which magnetic element is positioned in a location corresponding to said printing of the substrate by said screen (7, 8).

[Suite sur la page suivante]

WO 2005/000585 A1



ZW), eurasien (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
européen (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NI, SN, TD, TG).

*En ce qui concerne les codes à deux lettres et autres abrévia-
tions, se référer aux "Notes explicatives relatives aux codes et
abréviations" figurant au début de chaque numéro ordinaire de
la Gazette du PCT.*

Publiée :

— avec rapport de recherche internationale

(57) Abrégé : La machine d'impression comprend au moins un système de transfert (5) pour amener un substrat (1) sur un cylindre d'impression (6), au moins un tamis (7,8) de forme cylindrique ou plane avec une râcle, ledit tamis coopérant avec le cylindre d'impression (6) et destiné à imprimer le substrat avec une encre contenant des pigments orientables par un champ magnétique et un système de décharge (9) pour emmener le substrat (1). Le cylindre d'impression comporte au moins un élément magnétique sur sa surface d'impression, ledit élément magnétique étant placé à un endroit correspondant à ladite impression sur ledit substrat effectuée par ledit tamis (7,8).

PRINTING MACHINE

The present invention relates to a sheet-fed or web-fed printing machine, to a printing method and to a security element for paper securities.

Background of the invention

In the field of paper securities, particularly banknotes, there is an increasing need for security elements as protection against forgery. In the last few years, computers, scanners and photocopiers have undergone appreciable technical improvements and it is currently possible to purchase high-performance equipment at a reasonable price. As the performance of this equipment has become very good, it has become necessary to develop new security elements, which themselves also perform better, for paper securities such as banknotes, checks, credit cards, passports or identity documents and other similar documents so as to protect these documents against forgery and prevent them from being able to be copied by present-day computers, scanners and photocopiers.

Known security elements for combating forgery are, for example, formed of combinations of the superposition of lines and/or patterns with colors, which are visible only under certain conditions, for example under UV light, or when held up to the light. The benefit of such security elements is that they are easy to print or to place on the document that is to be protected and can be checked using simple equipment, even using the naked eye, but are impossible to reproduce using present-day printers, scanners and photocopiers.

Description of the prior art

By way of example, patent US 6,050,606, incorporated by reference into this application, describes a security
5 element for paper securities, for example for banknotes. This security element is formed with a background having at least two juxtaposed regions, each region comprising its own geometric designs, said regions having a different color density. The security
10 element further comprises a pattern corresponding to the region of lowest color density which is printed in superposition on said region in a color chosen so as to compensate for the difference in color density between said two regions. Thus, the security element appears
15 uniform and patternless to the naked eye, but the pattern becomes clearly visible if said element is photocopied.

Patent US 5,443,579, incorporated by reference into
20 this application, describes another method for printing a latent image on a substrate. According to that patent, the printing of lines in relief is combined with the printing of lines without relief. Thus, a latent color image is created that cannot be reproduced
25 with a photocopier or other photomechanical methods.

Patents US 5,853,197 and US 5,487,567, incorporated by reference into this application, display security elements which are not easily visible to the naked eye
30 but which, by contrast, become clearly evident when the element is reproduced by photocopying or scanning.

Another specific technique employs watermarks in which the substrate, for example, paper, is marked with lines
35 or a pattern which are visible only when held up to the light. Another development of this technique relates to pseudo-watermarks formed by the creation of a window in the substrate, this technique being used in particular

with paper substrates which are not themselves normally transparent, said window for its part being transparent.

- 5 Patent US 6,082,778, the content of which is incorporated by reference into this application, describes an identity card protected against unauthorized copying by photocopiers. In that patent, the idea is to create a security element by combining
- 10 the protective effect afforded by a thin film of metal with the physical, particularly optical, properties of an additional layer, the combination of the effects of which prevents the card from being reproduced. Under a transparent cover layer there is a layer of metal over
- 15 the top of a layer having specific optical properties. In a first embodiment, the metal layer is locally demetalized thus exposing the layer with specific optical properties, that is to say rendering it visible in the demetalized zone. The difference in contrast
- 20 between the layers renders the marks formed by demetalization easy to recognize with the naked eye. In one particular embodiment, the layer with specific optical properties has a dark color, for example is black. The combination of direct reflection of the
- 25 metalized zone and of a layer with high absorption (black layer) prevents the difference in contrast from being detected such that the information formed by the demetalization completely disappears on a copy of this security element.
- 30 In another embodiment, the layer with specific optical properties contains fluorescent or phosphorescent substances which, when irradiated with the light of a photocopier, do not emit any light at a wavelength in
- 35 the visible spectrum, which means that that zone is not reproduced either.

According to other techniques known in the state of the

art, use is made of a laser either to mark the substrate directly or to mark a layer applied to said substrate and thus create security elements that are impossible to reproduce using a photocopier or scanner.

5

Other security elements use optically variable devices ("OVDs"[®]) in the form of metalized patches (known as "foils") or holograms and also moirés and other similar patterns, all of these being, on the one hand, very difficult if not impossible to copy with current equipment but also, on the other hand, very easy to check visually using appropriate means or with the naked eye.

10

15

It is also known practice to use special inks such as optically variable inks for printing particular patterns or geometric shapes on the paper security substrate. These inks, known per se in the state of the art, contain pigments with a varying optical effect and change color according to the angle from which they are viewed. By way of example, publications US 2002/0160194 A1, US 2002/0182383 A1 and EP 1 239 307 disclose such inks and their contents are incorporated by reference into this application inasmuch as they describe the principle and composition of such inks.

20

25

When such inks are used, it has been found that the pigments with a varying optical effect containing an additional magnetic layer could be orientated by the application of a magnetic field, thus creating particular effects. This particular technique is described in publications US 6,103,361, US 5,630,877, WO 03/000801 and US 5,364,689 and incorporated by reference into this application.

30

35

However, one of the problems encountered when printing with optically variable ink lies in the fact that this ink is often used to print the value of the paper

security (e.g. banknote), this value being generally indicated parallel to the length of the banknote. In addition, there is still a search to create an optical effect that is visible when the paper security is turned about an axis parallel to the length of said paper security (up-down movement) rather than an axis parallel to the width (left-right) movement, the first movement being more intuitive to a user.

Conventionally, the sheets bearing impressions of paper securities arranged in matrix form move in the widthwise direction of said impressions so that the integration of stationary magnets in a conventional printing machine entails a movement parallel to the width of the impressions in order to create a visible effect (the left-right movement mentioned above)

Creating an effect in the desired direction (the up-down movement mentioned above) entails change to the direction of travel of the sheets if the particular effect is to be obtained in the desired direction (the up-down movement mentioned above). Thus, existing machines need to be modified significantly, and this is of little economic benefit and increases the time needed for printing.

Hence, one object of the invention is to improve the known methods and devices.

The reference to any prior art in this specification is not, and should not be taken as an acknowledgement or any form of suggestion that the referenced prior art forms part of the common general knowledge in Australia.

Summary of the invention

It is an object of certain embodiments of the present invention to provide a printing machine and method for increasing the security printing operations.

5 More specifically, it is an object of certain embodiment of the present invention to provide a printing system, particularly for paper securities, that can be readily incorporated into existing machines and systems .

10 Another object of certain embodiments of the present invention is to make available a printing method for paper securities which is more efficient and offers increased security.

15 An additional object of certain embodiments of the present invention is to provide an improved security element.

Accordingly in one aspect of the present invention there is provided a printing machine for printing a substrate in the form of a sheet or continuous web, said substrate being
 20 intended to receive at least one impression, comprising at least one transfer system for conveying the substrate onto an impression cylinder, at least one screen of cylindrical or flat shape equipped with a doctor blade, the screen collaborating with the impression cylinder and intended to
 25 print the substrate by screen-printing with an ink containing pigments that can be orientated by a magnetic field and an unloading system for carrying the substrate away after the printing operation, wherein said impression cylinder comprises at least one magnetic element on its printing surface, said
 30 magnetic element being placed at a location corresponding to said impression on said substrate performed by said screen.

6a

In another aspect of the present invention there is provided a printing machine for printing a substrate in the form of a sheet or continuous web, said substrate being intended to receive at least one impression, comprising at least one transfer system for conveying the substrate onto an impression cylinder, at least one screen of cylindrical or flat shape equipped with a doctor blade, the screen collaborating with the impression cylinder and intended to print the substrate by screen-printing with an ink containing pigments that can be orientated by a magnetic field and an unloading system for carrying the substrate away after the printing operation, wherein the unloading system comprises a cylinder having at least one magnetic element on its surface, said magnetic element being placed at a location corresponding to said impression on said substrate performed by said screen.

In yet another aspect of the present invention there is provided a cylinder for printing or transferring a substrate in the form of a sheet or continuous web, said substrate being intended to receive at least one screen-printed impression with an ink containing pigments that can be orientated by a magnetic field, which cylinder comprises at least one magnetic element on its surface to orientate the pigments of said ink, and wherein said at least one magnetic element is covered by a sheet of non-magnetic material.

In a further aspect of the present invention there is provided a method for screen-printing a substrate in the form of a sheet or of a web in which an impression is formed using an ink containing magnetic pigments, said impression being formed by passing said substrate in contact with an impression cylinder with which there collaborates at least one screen of cylindrical or flat shape equipped with a doctor blade for screen-printing said ink; wherein said impression is subjected to a magnetic field before it dries so as to orientate said pigments.

6b

Throughout the specification the term "comprising" shall be understood to have a broad meaning similar to the term "including" and will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps. This definition also applies to variations on the term "comprising" such as "comprise" and "comprises".

Description of the drawings

The invention will be better understood from description of several embodiments thereof and the by reference to the attached drawings, in which:

figure 1 shows a schematic depiction of a screen-printing machine,

figure 2 shows one embodiment of an impression cylinder according to the invention,

figures 3A and 3B show two variants of the embodiment of figure 2,

figure 4 shows an operating diagram for the effect obtained by the invention,

figures 4A and 4B schematically show a first configuration of orientation of magnetic pigments of varying optical effect,

figures 5A and 5B schematically show a second configuration of orientation of magnetic pigments of varying optical effect,

figures 6A and 6B schematically show a third configuration of orientation of magnetic pigments of

varying optical effect.

Description of the preferred embodiments

5 A conventional sheet-fed printing machine is described first of all with reference to figure 1. This known machine was described in detail in patent US 6,109,172 and its content is incorporated by reference into this application inasmuch as regards the operating principle
10 of a screen-printing machine. The machine comprises a magazine 1 containing sheets for printing, a feed device 2 for successively transferring sheets along the path 3 toward a feed cylinder 4, a transfer cylinder 5 for conveying the successive sheets onto an impression
15 cylinder 6, two screen cylinders 7 and 8 with doctor blades and collaborating with the impression cylinder 6 and a chain gripper system 9 which, once the sheets have been printed, transports the sheets to outlet magazines 10.

20 Since the machine comprises two screen cylinders 7 and 8 with doctor blades 55, 56, it is capable of screen-printing in two colors on the successive sheets. On the impression cylinder 6 the sheets pass first of all over
25 the first screen cylinder 7, where they are screen-printed in a first color, then they pass over the second screen cylinder 8 where they are screen-printed in a second color. This second impression may be printed in a different zone to the impression printed
30 by the first screen cylinder 7 or in the same zone. In the latter instance, it is necessary to add a system for drying the ink deposited by the first screen cylinder 7, for example UV lamps or some other equivalent system.

35 Figure 2 shows an impression cylinder 6 in section according to the present invention in the configuration of figure 1, namely surrounded by a feed cylinder, two

screen cylinders 7 and 8, an unloading system 9, for example a gripper chain, and a drying system 10, for example UV lamps.

5 According to the invention, the impression cylinder 6 comprises a plurality of magnets 12, 13 and 14 placed in a distribution corresponding to the impressions on the substrate sheets, each set of magnets being separated by notches 15, 16, 17 in the impression
10 cylinder 6, in which grippers for holding the sheets on the cylinder 6 are positioned. These magnets may be fixed to the cylinder by any appropriate means, particularly by bonding, screwing or some equivalent means.

15 According to a first variant of the invention, the magnetic elements 59 (for example magnets) are positioned not directly in the impression cylinder 6 but in an unloading cylinder 57.

20 According to a second variant of the invention, the magnetic elements 60 (for example magnets) are placed in an intermediate cylinder 58 situated between the unloading cylinder and the UV lamps 10, in the
25 direction of travel of the substrate.

According to another variant, the magnets are positioned both in the impression cylinder 6 and/or in the unloading cylinder 57 and/or in the intermediate
30 cylinder 58.

The benefit of the two variants is that they make it possible to keep a conventional impression cylinder without the risk of creating lumps or recesses in the
35 impressions as a result of an uneven surface of the impression cylinder 6.

Figures 3A and 3B schematically depict two partial

views of an impression cylinder with two variants of magnets. In the first variant (figure 3A), the impression cylinder 6 comprises at least one notch 18 in which the gripper system 19 holding the substrate 1 which is being printed is located.

The cylinder comprises in addition a second notch 20 in which magnets 21, 22 are positioned in a distribution corresponding to that of the impressions on the substrate (not depicted). The magnets 21, 22 are covered by a sheet 24 of nonmagnetic material, for example of aluminum or stainless steel. In this variant, the magnets 21, 22 are permanent magnets.

In the variant of figure 3B, the identical elements are referenced in the same way as in figure 3A, and the difference is in the means used by way of magnets. In this variant, use is made of coils 25, 26.

The principles set out with reference to figures 3A and 3B in the case of the impression cylinder 6 apply of course in the same way to the variants of the invention indicated hereinabove, when it is the unloading cylinder 57 and/or the intermediate cylinder 58 which supports the magnetic elements.

The principle used in the present invention is shown schematically in figure 4. This figure depicts a substrate 27, for example a sheet of paper, on which an impression of optically variable ink has been deposited. The impression cylinder 6 comprises, as depicted, a permanent magnet 28 which creates magnetic field lines 29, 30 depicted in this figure. Furthermore, since the optically variable ink contains magnetic pigments of varying optical effect, the magnetic field lines 29, 30 will orientate these pigments in the directions indicated in this figure 4. In a central zone 31, the pigments will be aligned

vertically whereas in the lateral zones 32 and 33, the pigments will adopt a more horizontal configuration, as depicted. Thus, according to the angle from which the impression is viewed, the apparent color of the impression will change and a change in orientation will have a dynamic result on the impression with changes in color followed in the impression.

One of the advantages of the system according to the invention is that since the sheet is stationary with respect to the magnets, the abovementioned problem associated with the habitual direction of travel of the sheets with respect to the direction in which the optical effect is to be created is avoided. It is now possible to create this effect without changing the directions of travel of the successive sheets, or even, on one and the same sheet, to create security elements with optical effects in different directions (which may or may not be mutually perpendicular) with no influence over the direction of travel of the successive sheets or the need to print successive impressions using optically variable ink.

Figures 4A and 4B show a first optical effect that can be obtained with the machine according to the invention. In figure 4A, an impression 40 in ink containing magnetic pigments with a varying optical effect forms the numeral "100". In order to depict the obtained effect correctly, the upper half of this impression 40 is paler and its lower half is darker.

The impression 41 in figure 4A depicts the same impression as the impression 40 but having undergone rotation about the axis X so as to vary the angle from which the impression is viewed. From this position, it is now the lower half which is paler and the upper half which is darker.

In order to obtain this effect, the pigments are oriented by means of a magnet as in the section A-A depicted in figure 4B, that is to say approximately at 45° in the left-hand part 42 and approximately at 135°
5 in the right-hand part 43.

Thus, by rotating in both directions about the axis X, a determined variation in the colors in the two halves of the impression is obtained and results in a dynamic
10 optical effect that is impossible to copy using conventional means such as scanners or photocopiers.

A second optical effect that can be created with the invention is described with reference to figures 5A and
15 5B. The impression 44 forms the numeral "100" and comprises a lighter zone in its upper part. By turning the impression about the axis X, the lighter zone then moves within the impression, as shown in the impressions 45 and 46, to move into the central part of
20 the impression (impression 45) and into the lower part thereof (impression 46).

This optical effect is obtained by orientating the pigments as depicted in figure 5B which corresponds to
25 section B-B of figure 5A. As depicted (from left to right), the pigments are first of all orientated practically vertically (zone 47) then gradually arrive in horizontal orientation (zone 48) then finally return to a practically vertical orientation (zone 49).

30 Thus, by rotations in two directions about the axis X, the visual effect of a movement of a pale zone within the impression is obtained and this results in a dynamic optical effect that is impossible to copy by
35 photocopying or scanning.

A third optical effect is depicted in figures 6A and 6B. This effect is obtained by two superposed

impressions created using the same optically variable ink. When the impression is viewed at right angles (impression 50), the impression is bright and the background is matt. If the impression is turned in any
5 direction whatsoever there is then a reversal of the bright and matt zones (impression 51). In addition, if the orientation is changed laterally (impression 52), a variation in color is also obtained.

10 These optical effects are obtained by the impressions as depicted in the section C-C of the figure 6B in which there is a first layer 53 with pigments orientated in a first direction and a second layer 54 with pigments orientated in a second direction, the two
15 directions being different. These layers are deposited successively on the substrate and the first layer 53 has to be dried before the second is deposited, so as to maintain the orientation of the pigments in said first layer.

20 The invention is not restricted to the embodiments described but variations can be made within the scope of the claimed protection. For example, the screen may be borne by a cylinder (as in the machine of figures 1
25 and 2) or may also be flat.

Various types of ink are also possible, provided that they contain magnetically orientable pigments.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A printing machine for printing a substrate in the form of a sheet or continuous web, said substrate being intended to receive at least one impression, comprising at least one transfer system for conveying the substrate onto an impression cylinder, at least one screen of cylindrical or flat shape equipped with a doctor blade, the screen collaborating with the impression cylinder and intended to print the substrate by screen-printing with an ink containing pigments that can be orientated by a magnetic field and an unloading system for carrying the substrate away after the printing operation, wherein said impression cylinder comprises at least one magnetic element on its printing surface, said magnetic element being placed at a location corresponding to said impression on said substrate performed by said screen.
 2. The printing machine as claimed in claim 1, in which the substrate receives a plurality of impressions-arranged in the form of a matrix and wherein the impression cylinder comprises a plurality of magnetic elements arranged in a corresponding matrix form.
 3. A printing machine for printing a substrate in the form of a sheet or continuous web, said substrate being intended to receive at least one impression, comprising at least one transfer system for conveying the substrate onto an impression cylinder, at least one screen of cylindrical or flat shape equipped with a doctor blade, the screen collaborating with the impression cylinder and intended to print the substrate by screen-printing with an ink containing pigments that can be orientated by a magnetic field and an unloading system for carrying the substrate away after the printing operation, wherein the unloading system comprises a cylinder having at

least one magnetic element on its surface, said magnetic element being placed at a location corresponding to said impression on said substrate performed by said screen.

5 4. The printing machine as claimed in claim 3, in which said cylinder is an unloading cylinder.

5. The printing machine as claimed in claim 3, in which said cylinder is an intermediate cylinder.

10 6. The printing machine as claimed in one of the preceding claims, in which said magnetic element or elements create a magnetic field in a predetermined direction.

15 7. The printing machine as claimed in claim 6, in which said magnetic element or elements are orientated in a direction parallel and/or perpendicular to the direction of travel of the substrate.

20 8. A cylinder for printing or transferring a substrate in the form of a sheet or continuous web, said substrate being intended to receive at least one screen-printed impression with an ink containing pigments that can be orientated by a magnetic field, which cylinder comprises at least one magnetic
25 element on its surface to orientate the pigments of said ink, and wherein said at least one magnetic element is covered by a sheet of non-magnetic material.

30 9. The cylinder as claimed in claim 8, wherein said sheet is made of aluminum or of stainless steel.

10. The cylinder as claimed in claim 8, and which comprises a plurality of magnetic elements arranged in a matrix form.

11. The printing machine as claimed in either of claims 1 and 3, wherein the impression cylinder or the cylinder of the unloading system is a cylinder as defined in claim 8, 9 or 10.
- 5 12. A method for screen-printing a substrate in the form of a sheet or of a web in which an impression is formed using an ink containing magnetic pigments, said impression being formed by passing said substrate in contact with an impression cylinder with which there collaborates at least one screen of
10 cylindrical or flat shape equipped with a doctor blade for screen-printing said ink; wherein said impression is subjected to a magnetic field before it dries so as to orientate said pigments.
- 15 13. The printing method as claimed in claim 12, in which the magnetic field orientates the pigments in a predetermined direction.
- 20 14. The printing method as claimed in claim 13, in which the pigments are orientated parallel and/or perpendicular to the direction of travel of the substrate.
- 25 15. The printing method as claimed in one of claims 12 to 14, in which a first impression is formed on the substrate using an ink with varying optical effect, said impression is subjected to a first magnetic field orientating the pigments in a first direction, said first impression is dried, a second impression is formed on the first impression using an ink with varying optical effect, said second impression is subjected to
30 a second magnetic field orientating the pigments in a second direction, and said second impression is dried.
16. The method as claimed in claim 15, in which the first direction and the second direction are different.

17. The method as claimed in one of claims 12 to 16, in which said impression comprises a plurality of individual impressions arranged in matrix form.

5

18. The method as claimed in one of claims 12 to 17, wherein said magnetic field needed for orientating said pigments is produced by means of a cylinder bearing at least one magnetic element on its surface.

10

19. The method as claimed in claim 17, wherein a corresponding magnetic field is produced for each of said individual impressions.

15 20. A printing machine for printing a substrate substantially as hereinbefore described with reference to the accompanying drawings.

20 21. A cylinder for printing or transferring a substrate substantially as hereinbefore described with reference to the accompanying drawings.

25 22. A method for screen-printing a substrate substantially as hereinbefore described with reference to the accompanying drawings.

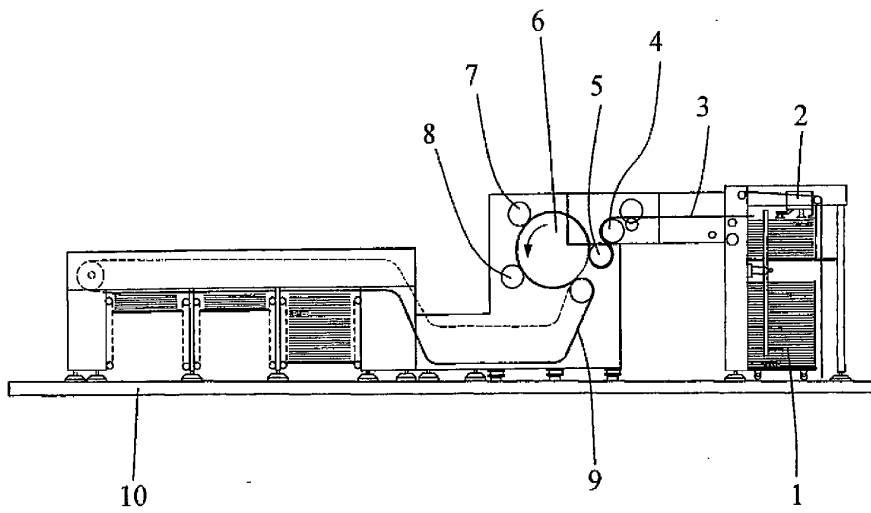
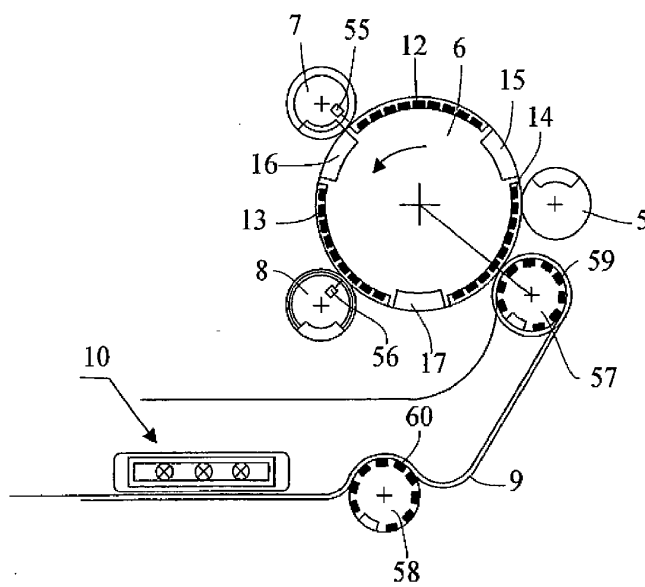
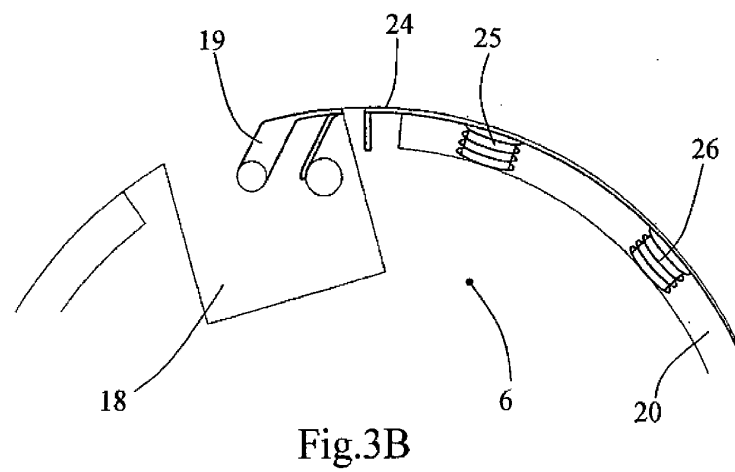
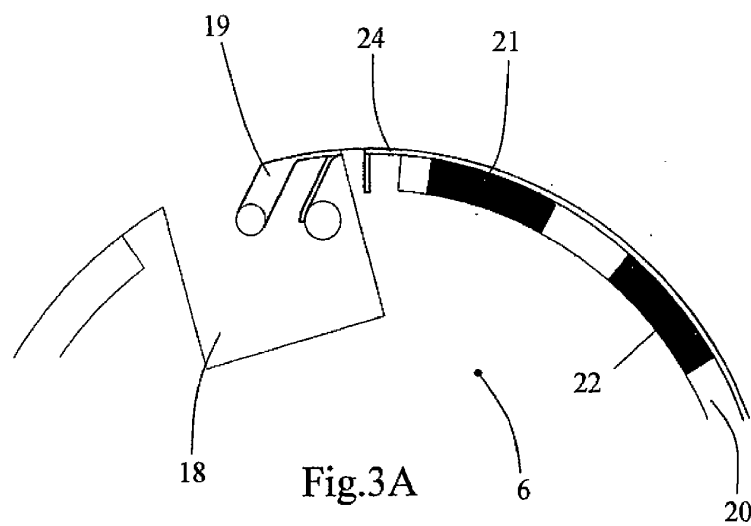


Fig.1

Fig.2





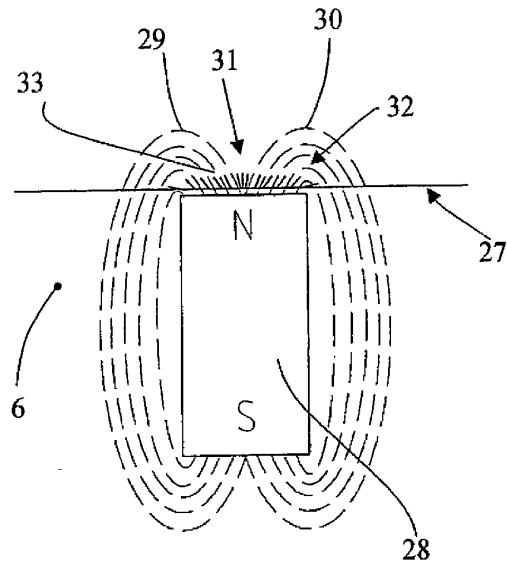


Fig.4

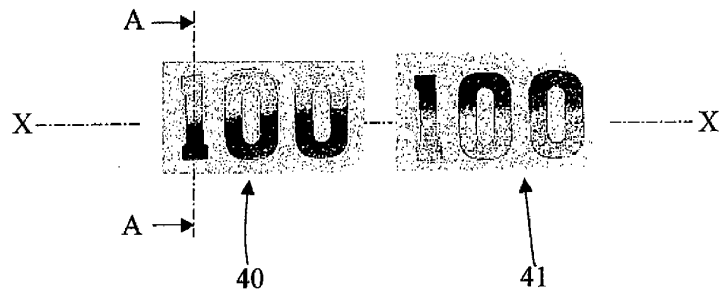


Fig. 4A

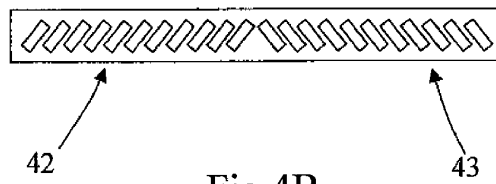


Fig. 4B

