



US 20090050812A1

(19) **United States**

(12) **Patent Application Publication**
Dunleavy et al.

(10) **Pub. No.: US 2009/0050812 A1**

(43) **Pub. Date: Feb. 26, 2009**

(54) **DETECTION OF IONISING RADIATION**

(86) PCT No.: **PCT/GB2007/050780**

(75) Inventors: **Michael Dunleavy**, Bristol (GB);
Sajad Haq, Glasgow (GB);
Douglas Beverley Stevenson King,
Lancashire (GB); **Nicholas**
Giacomo Robert Colosimo,
Lancashire (GB); **Jonathan**
Alexander Silvie, Cumbria (GB);
Philip Lawrence Webberley,
Lancashire (GB)

§ 371 (c)(1),
(2), (4) Date: **Feb. 14, 2008**

(30) **Foreign Application Priority Data**

Dec. 29, 2006 (GB) 0626055.8

Publication Classification

(51) **Int. Cl.**
G01T 1/20 (2006.01)

(52) **U.S. Cl.** **250/368**

(57) **ABSTRACT**

A detector for detecting ionising radiation comprises a scintillator 10 selected to emit light in response to incidence thereon of radiation to be detected, at least one detector 16 for detecting said emitted light, and at least one optical waveguide 12 for transmitting said emitted light to said detector 16. The optical waveguide typically comprises a flexible solid or hollow fibre that can be incorporated into a flexible mat or into a fibre-reinforced structure, so that the detector is integrated therewith.

Correspondence Address:
BUCHANAN, INGERSOLL & ROONEY PC
POST OFFICE BOX 1404
ALEXANDRIA, VA 22313-1404 (US)

(73) Assignee: **BAE SYSTEMS plc**, London (GB)

(21) Appl. No.: **11/990,453**

(22) PCT Filed: **Dec. 21, 2007**

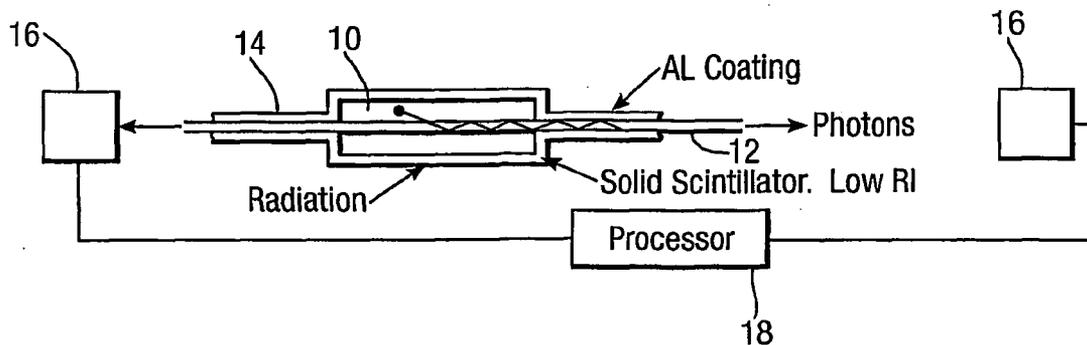


Fig. 1.

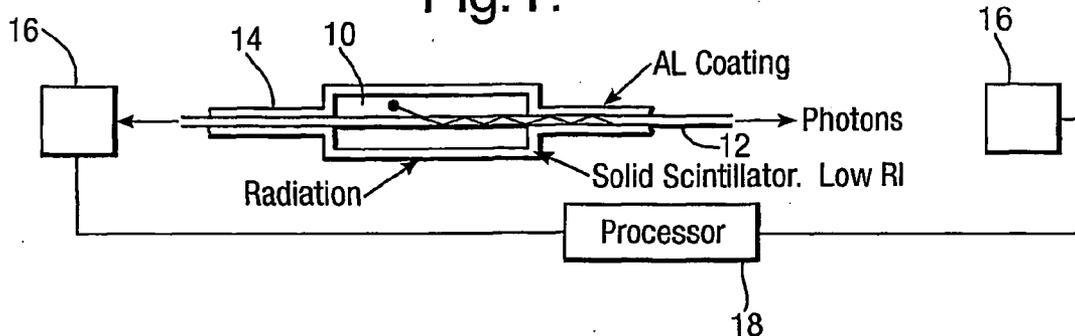


Fig. 2.

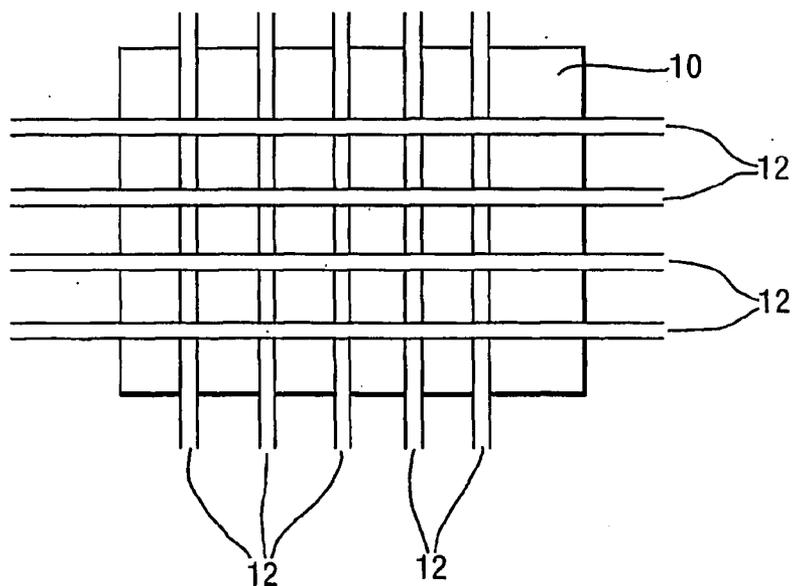


Fig. 3.

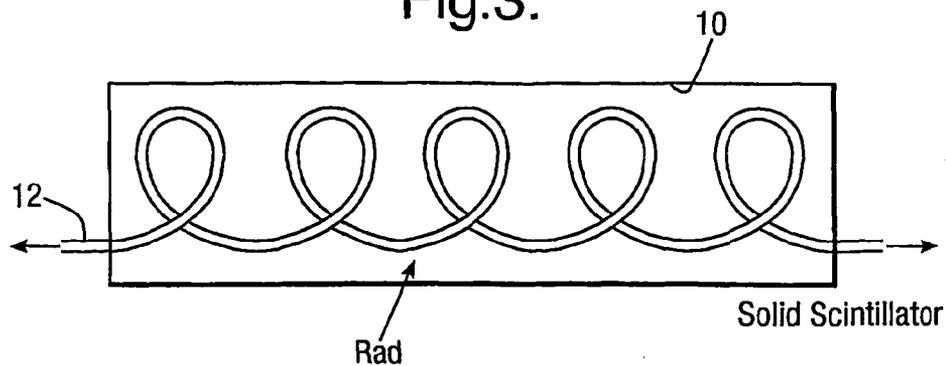


Fig.4.

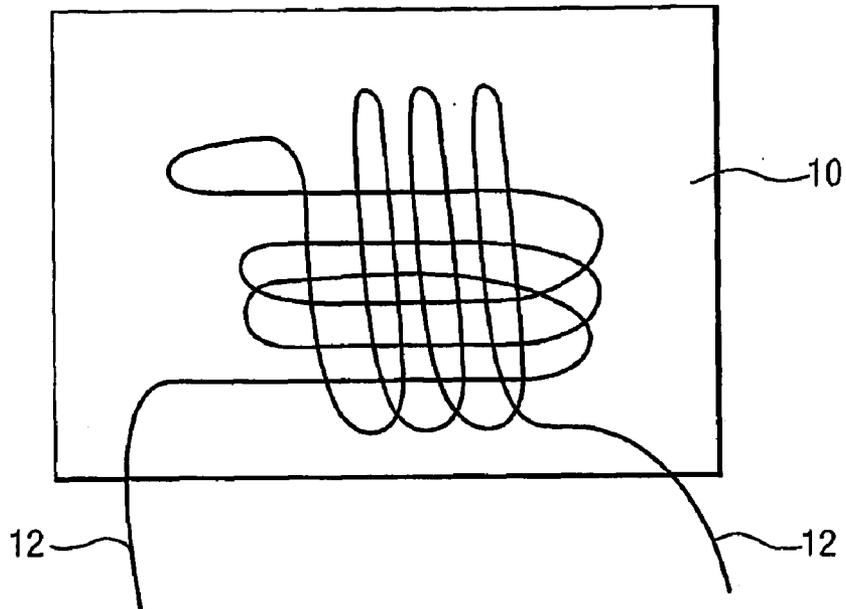


Fig.5.

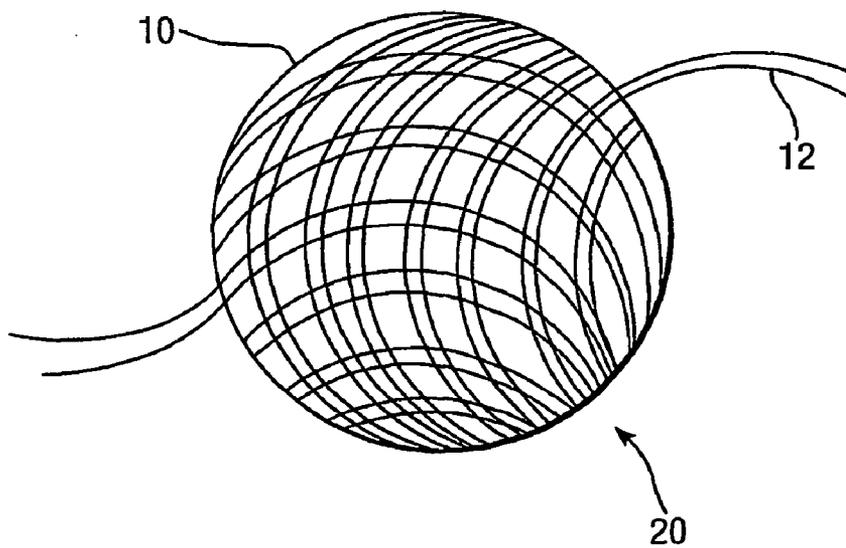


Fig.6a.

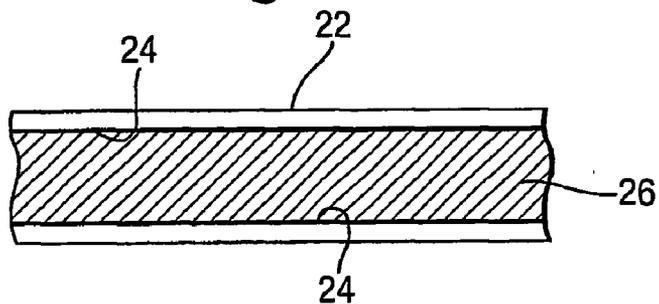


Fig.6b.

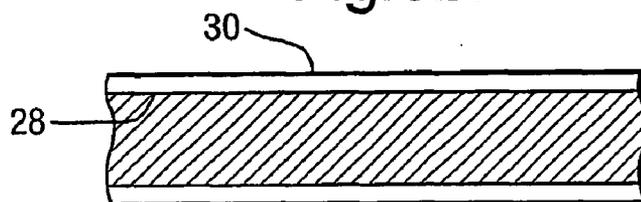


Fig.7.

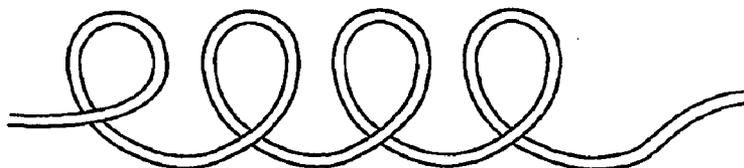


Fig.8.

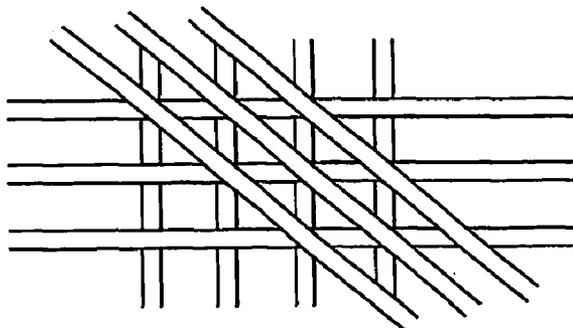


Fig. 9.

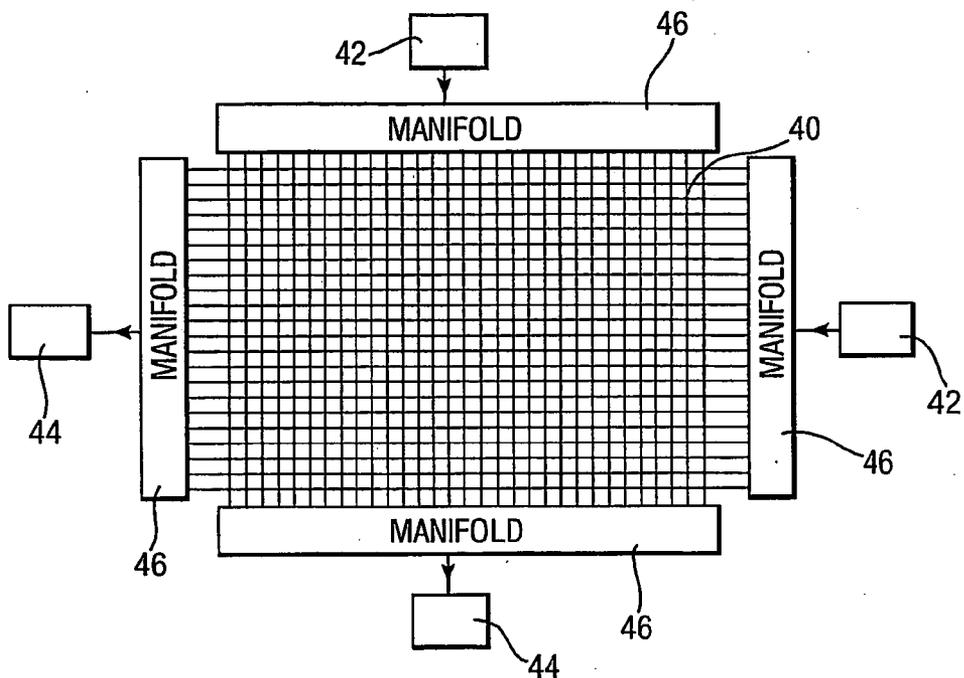


Fig. 10.

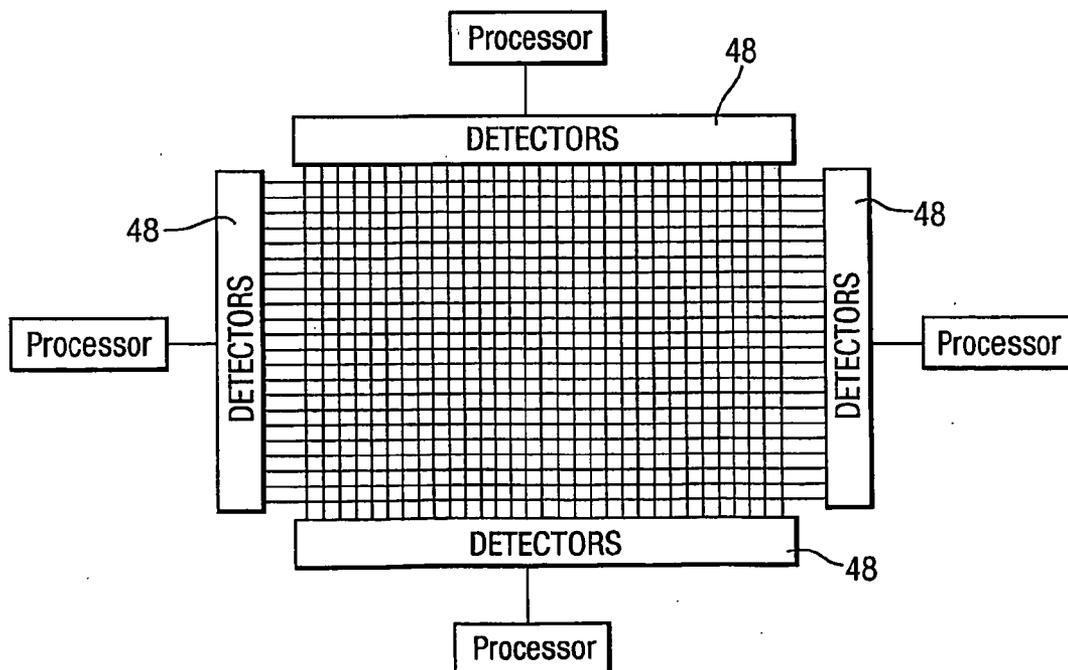
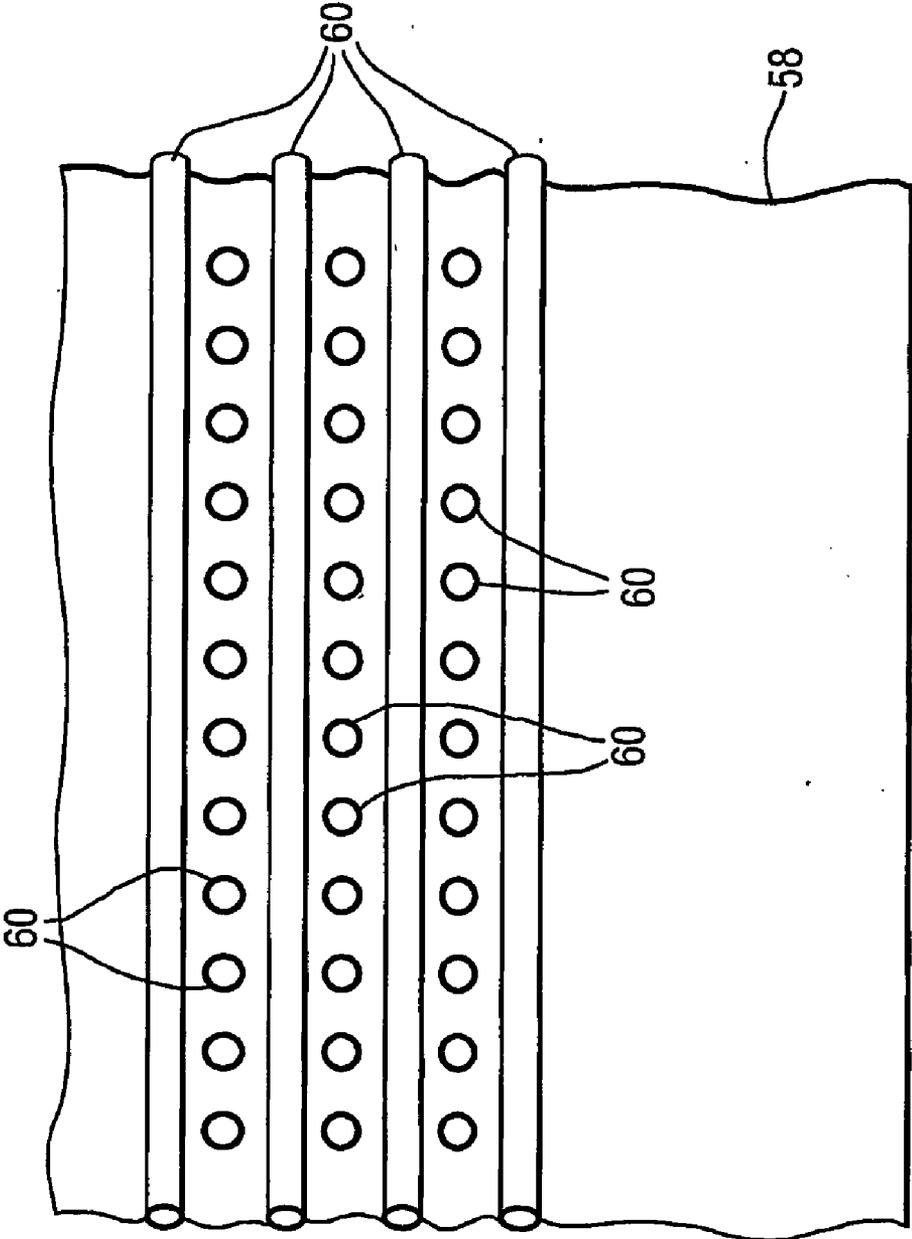


Fig.11.



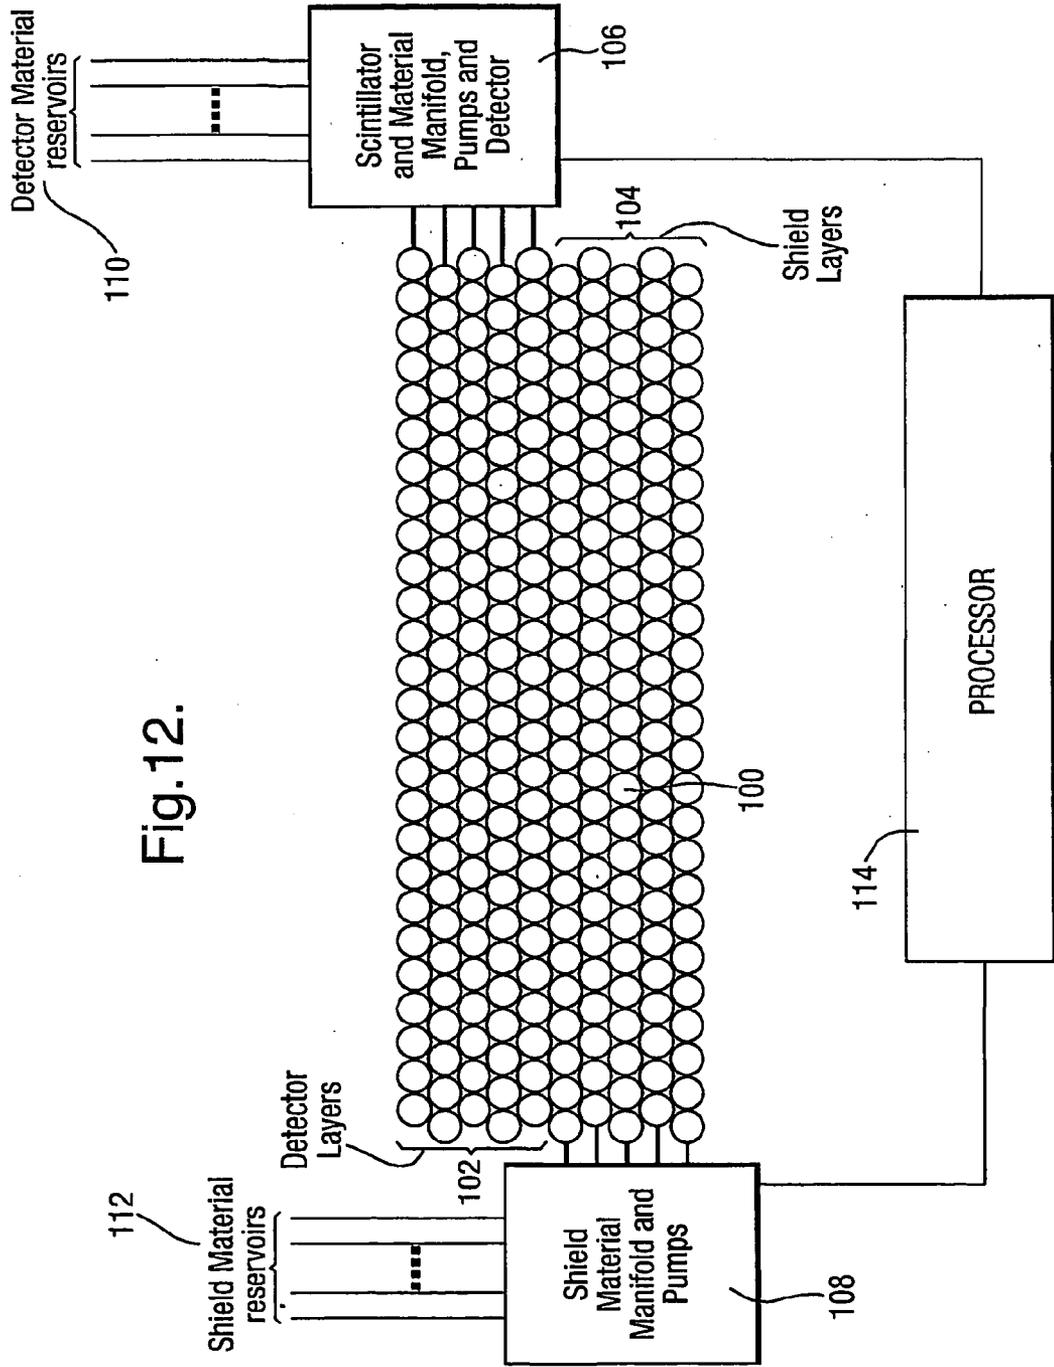


Fig.12.

DETECTION OF IONISING RADIATION

[0001] This invention relates to apparatus and methods for the detection of ionising radiation.

[0002] The term "ionising radiation" is used in the conventional sense to mean alpha particles, beta particles, x-rays, gamma radiation, neutrons and protons. There are many instances where it is required to detect ionising radiation. For example medical or scientific staff and those working in other facilities where radioactive material is used carry personal dosimeters to monitor the amount of radiation to which they have been exposed. It is also important routinely to monitor such facilities against inadvertent leakage of radiation. Conventionally, detectors such as Geiger tubes, liquid scintillators with an attached photo multiplier or photodiode, and solid state detectors are used. Although such devices exist, they tend to be separate instruments that are not readily incorporated into structures or fabrics. In addition, the static devices are not readily capable of detecting more than just the presence and magnitude of the radiation signal. They do not accurately locate the source of the signal and this has to be done separately by a portable device.

[0003] We have designed a detection apparatus and method that can be used on its own or incorporated into a structure or fabric and which can be designed to allow the source of the radiation to be detected.

[0004] Accordingly, in one aspect, this invention provides a detector for detecting ionising radiation, said detector comprising:

[0005] a scintillator selected to emit light in response to incidence thereon of radiation to be detected;

[0006] at least one detector for detecting said emitted light, and at least one optical waveguide for transmitting said emitted light to said detector.

[0007] In this arrangement there may be a single scintillator associated with each waveguide or there may be several scintillators spaced along the length of the waveguide to provide an extended detection region.

[0008] There are several different possible configurations of scintillator and waveguide; in one arrangement said waveguide is an optical fibre and said scintillator is a solid scintillator element through which said optical fibre passes, whereby light emissions in said scintillator element are transmitted to said detector by said fibre. Preferably the refractive index of the scintillator element is less than that of the optical fibre.

[0009] Conveniently at least part of the external surfaces of the scintillator element and the optical fibre are provided with a coating of reflective material. The reflective material may be selected from gold, silver, platinum, indium and aluminium.

[0010] In order to increase the light signal there may be a plurality of optical fibres passing through said scintillator element and in optical contact therewith, and means for detecting said light emissions. Likewise said optical fibres may be disposed orthogonally in rows and columns, or orthogonally in three dimensions (x, y, z). Where the fibres are disposed in rows and columns, successive planes of rows and columns may be stacked.

[0011] The optical fibre may follow a helical or serpentine path through said scintillator element. The optical fibre may be provided as a woven fabric element. The scintillator element may be of spherical shape, with said optical fibre wrapped into a ball configuration.

[0012] In another arrangement said at least one waveguide comprises a hollow fibre containing a scintillator material. The scintillator material may comprise a liquid, gel or solid. Where it is a liquid or gel, the detector may include means for selectively introducing and withdrawing said scintillator material from said hollow fibre. In this way the scintillator material may be removed or replaced with another material where different radiation is to be detected, or where the fibres are to be filled with a liquid or gel shielding material. With a hollow fibre or tubular arrangement light emissions can be transmitted to the detector in different ways. In one scheme, the light emissions may be transmitted to said detector down the central space of the tube by total internal reflection off the inner walls of said fibre. To assist this at least part of the inner surface of the fibre may be provided with a coating of reflective material.

[0013] Alternatively, the light emissions may be transmitted to said detector through the fibre wall by total internal reflection within the fibre wall, and to assist this at least part of the external surface of the fibre may be provided with a coating of reflective material. In both cases suitable reflective materials include gold, silver, platinum, indium and aluminium.

[0014] The fibres may be arranged in a wide variety of layouts and shapes as described above.

[0015] In order to determine the location of the incidence of radiation on the scintillator, the detector may include means for detecting light emissions at opposite ends of said waveguide and means responsive to the timings of the light emissions to determine the location of the incident radiation along the length of the waveguide. Where the fibres are arranged in two or three dimensions this allows the incidence to be detected in two or three dimensions.

[0016] Where for example the detector is designed to detect neutrons, the detector may include a moderator material to moderate or slow the radiation incident on said scintillator material. The moderator material may be contained in a hollow fibre adjacent the scintillator material.

[0017] The scintillator material may be responsive to at least one of alpha particles, beta particles (electrons), x-ray radiation, gamma radiation, neutrons, protons. The selection and use of suitable scintillator materials is well known to those skilled in the art.

[0018] To allow radiation of different types to be detected, the detector may include a plurality of respective scintillators or groups thereof and a plurality of associated waveguides, with each scintillator or group thereof being responsive to a selected radiation. Thus the scintillators or groups thereof may be arranged in layers, with each layer being responsive to a predetermined radiation.

[0019] To allow the condition of the fibre to be monitored or diagnosed, the detector may include means for injecting light into the optical waveguide, and means for detecting and processing of the detected light signal to determine a condition of the optical fibre.

[0020] Advantageously the detector may allow optical data to be transmitted along the waveguide at a non-conflicting wavelength. Likewise heating or coolant medium may be passed down adjacent hollow fibres.

[0021] In another aspect, this invention provides a fibre composite structure including a matrix material, a plurality of structural fibres, and at least one optical waveguide embedded therein, with a scintillator in optical contact with said waveguide and selected to emit light in response to ionising

radiation, and a detector for detecting light emissions transmitted from said scintillator by said waveguide.

[0022] Preferably the structure includes a plurality of scintillators and a plurality of optical waveguides embedded in said matrix.

[0023] In another aspect, this invention provides a flexible textile material comprising textile fibres and incorporating therein at least one optical waveguide, with a scintillator in optical contact with said waveguide and selected to emit light in response to ionising radiation, and a detector for detecting light emissions transmitted by said waveguide.

[0024] In another aspect, this invention provides a method of detecting and locating of the incidence of radiation along an elongate path or structure which comprises providing at least one elongate optical waveguide having disposed therealong at least one scintillator element, and a detector for detecting light emissions transmitted by said waveguide from said scintillator element or elements.

[0025] In another aspect, this invention provides a method of detecting and locating emission of radiation from a space which comprises surrounding at least part of said space with a plurality of fibres each having scintillator elements associated therewith and detecting emission of light from said scintillator elements at the ends of said fibres.

[0026] The detector of this invention may be used in conjunction with a radiation shield. The shield may be passive in a sense of being selected to reflect or absorb one or more preset types of radiation to provide a shielding effect, or it could be adapted to change its shielding spectrum according to the nature of the radiation that is detected by the radiation detector. Thus, for a structure that may be exposed to different types of radiation there may be a detector layer and a shielding layer. The detector layer may be connected to a processor which monitors the output from the detector to determine the particular radiation types, intensities etc incident upon the detector and then adaptively controls the shielding characteristics to selectively absorb or reflect one or more of the detected radiation types. The detector may determine a 2-D image of the incidence and intensities of any radiation types reaching the detector.

[0027] In one arrangement, there may be a detector layer made up of fibres containing or contacting said scintillator materials in a fibre composite lay up, and beneath the detector there may be a shielding layer made up of hollow fibres each containing or fillable with a radiation shielding material. The fibres may be connected to a suitable manifold or pump system that is operable to selectively introduce or withdraw different shielding materials to or from the hollow fibres, with the shielding material or materials being selected on the basis of the detected radiation. Thus, if such a structure is exposed to, say, neutron radiation, this is detected by the processor which will then control the manifold and pump arrangement to introduce into the hollow fibres a suitable neutron shielding material, either just in the fibres in the vicinity of the detected incidence or over the whole structure, depending on the particular application.

[0028] In this manner, an active or adaptive shield is provided in which the shielding material is actively selected and supplied to provide its shielding effect in direct response to the detected radiation. This means that the shield material can be selected according to the nature, and intensity of the incident radiation.

[0029] Thus in another aspect this invention provides a combination comprising a detector as described above in

combination with a radiation shield means, wherein the detector is operable to monitor and/or control the effectiveness of the radiation shield means.

[0030] Preferably the shield means is adapted to allow the radiation shielding characteristics thereof to be adjusted and the combination preferably further includes a processor responsive to the output of said detector to control the radiation shielding characteristics of the shield to at least reduce the transmission of radiation therethrough.

[0031] The invention also extends to a radiation shield device comprising a plurality of hollow fibres filled with or fillable with one or more radiation shielding materials.

[0032] Whilst the invention has been described above it extends to any inventive combination of the features set out above or in the following description.

[0033] The invention may be performed in various ways and, by way of example only, an embodiment thereof will now be described with reference to the accompanying drawings, in which:

[0034] FIG. 1 is a schematic view of a first embodiment of radiation detector in accordance with this invention in which a fibre waveguide passes through a scintillator material;

[0035] FIG. 2 is a schematic view of a two-dimensional radiation detector in accordance with this invention;

[0036] FIG. 3 is a schematic view of a helical arrangement;

[0037] FIG. 4 is a schematic view of a woven arrangement

FIG. 5 is a schematic view of a spherical arrangement;

[0038] FIG. 6(a) and 6(b) are respective schematic views of alternative embodiments of radiation detector in accordance with this invention in which the scintillator material is contained within a hollow fibre;

[0039] FIG. 7 is a schematic view of a helical arrangement;

[0040] FIG. 8 is a schematic view of an orthogonal X, Y, Z arrangement;

[0041] FIG. 9 is a schematic view of a two-dimensional arrangement which allows a liquid or gel scintillator material to be removed or replaced in the hollow fibres;

[0042] FIG. 10 is a schematic view of a two-dimensional arrangement in which the location of the incidence of the array may be detected;

[0043] FIG. 11 is a section view through a fibre composite structure in accordance with this invention comprising orthogonally arranged layers of fibres, and

[0044] FIG. 12 is a schematic view of an embodiment of active radiation shielding device in accordance with this invention.

[0045] Referring initially to FIG. 1 this shows a fibre sensor with a scintillator provided on the outside for detecting radioactive sources. In this embodiment, a solid scintillator **10** of low refractive index has a solid optical fibre **12** running through it in optically transmissive contact. The fibre and the scintillator have an external aluminium coating **14** to prevent the escape of light and also to prevent the admission of external light. The scintillator material is selected in accordance with the particular radiation to be detected so that it provides a detectable light emission when radiation of that type is incident. When the scintillator is bombarded by suitable radiation, it will emit light that enters the fibre and becomes trapped by total internal reflection. Light photons exit through both ends of the fibre. The fibre **12** may be glass or plastic, for example poly methyl methacrylate. The fibre **12** can be narrow or quite thick—of the order of a millimetre. The photons are electrically detected at each end of the fibre using a suitable detector **16** which may be an avalanche photodiode, an

active pixel sensor, or a charge coupled device, some distance away out of the field of the radiation. The scintillator can be chosen to respond to alpha, beta (electron), x-ray, gamma, neutron or proton radiation.

[0046] The aluminium coating **14** behaves well at the UV end of the spectrum. Alternative materials include silver for longer wavelengths. The coating **14** may also carry a scratch resistant layer of plastic or a suitable paint for protection.

[0047] For neutron detection, the scintillator can be surrounded by a hydrogenous material, notably polythene or water to moderate or slow down high energy neutrons.

[0048] For detection, photons from either end of the fibre can be used; the time difference between the photons detected at each end on the detectors **16** may be determined using a processor **18** to thereby determine the location of the incident radiation.

[0049] The sensor may be quite short with a single block of solid scintillator, or it may be very long with scintillator blocks spaced along the length, or the entire fibre length encased in scintillator material. In another arrangement, not shown, the sensor may comprise multiple fibres in a parallel bundle for redundancy and efficiency of detection.

[0050] Referring now to FIG. 2, the fibres **12** can be mounted in the scintillator **10** in an x-y plane with the fibres running in orthogonal rows and columns and respective detectors (not shown) at each end. In this way, detection can be provided over an extended area. Likewise, a cube may be made up of successive stacked x-y planes or it may be made up of orthogonally arranged x, y, z direction fibres. The 2-D array or the 3-D structure can be embedded in a common scintillator.

[0051] A graded scintillator profile may be arranged by stacking successive x-y planes in which the scintillator material is different between planes, for detecting different types of radiation at different planes. For example an arrangement could be made to detect beta particles at an outer layer, gamma radiation towards the middle and neutrons towards the centre. Likewise layered structures may be built for the detection of thermal, epithermal, and fast neutrons.

[0052] Referring to FIG. 3, to increase photon capture the fibre may follow a helical or serpentine path through the scintillator material **10**. Due to the losses associated with tight bending radii the number of turns within the scintillator material should be limited.

[0053] Referring to FIG. 4, the fibre may traverse the scintillator material **10** in a woven pattern. FIG. 5 shows another embodiment where the fibre **12** is wrapped to make a fibre ball **20** around and contained in the scintillator **10**.

[0054] In the arrangements of FIG. 6, the fibre sensor is provided with a scintillator material on the inside. There are two versions of this arrangement; in FIG. 6(a) there is a hollow fibre **22** that is mirrored on the inside with an aluminium coating **24** and the remainder of the internal space filled with either a liquid, a gel or solid scintillator **26**. In this arrangement, incidence of the appropriate radiation on the scintillator material causes generation of a photon which is caused to traverse to the end of the fibre through total internal reflection of the coating on the inner wall of the fibre. In this embodiment the hollow fibre **22** acts purely as a structural tube and not as a light guide.

[0055] Referring now to FIG. 6(b) in this arrangement an optical fibre **28** is provided with an external mirror coating **30** of aluminium or a suitable optical cladding of refractive index less than that of the fibre to support total internal reflection.

The scintillator gel **32** or liquid of a similar refractive index to that of the fibre wall is contained within the fibre **28**. Again, in FIGS. 6(a) and (b) incidence of radiation of the appropriate type causes scintillation and the photons are passed to the detectors (not shown) at the end of the fibre by total internal reflection.

[0056] As with the embodiment of FIG. 1, the fibres may be mounted in an x-y plane similar to FIG. 2 or in a helical structure (FIG. 7) or in a 3-D cube (FIG. 8). Similarly a fibre ball can be provided. Of course in these latter arrangements, the scintillator material is contained within the tube and so no external scintillator material is required.

[0057] Referring to FIG. 9, in this arrangement optical fibres containing scintillator material are arranged in an x-y plane and connected to respective supplier and return chambers **42, 44** by means of respective inlet and outlet manifolds **46**. In this arrangement, the scintillator material within the fibres may be removed or exchanged for a different material. The array of FIG. 9 may be tuned to allow it to detect radiation of different form by pumping out the existing scintillator material and replacing it with a different scintillator material. The manifolds will also contain the photon detectors at the end of each fibre. The array may also have one or more reservoirs of selected liquid or gel shielding materials that can be pumped into the fibres after removal of the scintillator material, to effect shielding of the structure.

[0058] Referring now to FIG. 10, in this arrangement the arrival times of the photons at the ends of each fibre **40** is detected by respective detectors in arrays **48**, thereby to determine the exact location of the radiation event that caused the emission of the photon. It will be appreciated that this enables the x-y coordinates of a radiation source to be detected by the processors. This arrangement is particularly useful in detecting leakage of radiation or radiation hotspots.

[0059] Referring now to FIG. 11, and the detectors described above are intended to be incorporated into other materials. In FIG. 11 a conventional composite fibre lay-up **58** is overlaid by detector fibres **60** filled with scintillator material and arranged in x-y fashion. This provides detection integrated in the existing composite structure.

[0060] Other modifications include the construction of special layered structures. For example in one such structure the innermost layer would typically be used to detect thermal neutrons. The layer would be made up of fibres containing a scintillator material and surrounded by polythene. The polythene moderator could be replaced or supplemented by the use of auxiliary fibres carrying a liquid moderator. Middle layers of the structure would typically be used with the detection of epithermal neutrons, high energy neutrons and gamma protons. For the detection of epithermal neutrons, a fibre with an internal mirror coating of silver, platinum, gold or possibly indium are advantageous because these elements resonate at the epithermal energies and will greatly improve the detection efficiency. These metals emit gamma photons which are readily detected by a liquid scintillator. The outer layer may be used for the detection of alpha and, if required, beta particles (electrons). The order of the layers may be adjusted and the scintillator in a given layer may be dual purpose, also acting as a moderator.

[0061] Mixed or multiple scintillators can be used and fibres for different layers can be linked in series or brought out separately. The array may embody redundant fibre for test purposes or reasons of reliability. Additional fibres may be placed around the detector to maintain a given temperature by

allowing pumping of coolant or heating fluid through them. Additional hollow fibres may also be placed around the detector to provide thermal insulation and protection.

[0062] In one arrangement, the detector is made up as a flexible mat; such a mat may be used in non-destructive testing in a manner similar to a flexible photographic plate. Thus the mat could be laid over the structure to be tested and the structure then exposed to a flash of x-rays from the side opposite the mat, with the position of holes or cracks being evident from the locations of radiation detected on the mat.

[0063] It is also possible to weave the material into clothing for example to monitor or detect exposure to radiation. The clothing could be in the form of the bodysuit, gloves, etc.

[0064] The detector may also be encased in a suitable matrix material such as concrete or other structural or shielding material so as to detect or monitor the condition of an enclosed object. For example, to monitor a nuclear reactor in a power station, the reactor could be housed within a building structure in which the fibre detectors are embedded in the walls of the building. Alternatively the detector may be embedded in the external surface of a building or vehicle or vessel at risk from exposure to radiation.

[0065] In its elongate fibre form the detector can also provide monitoring along the length of an elongate structure such as the interior of a submarine hull, or alongside a road or down a mineshaft, and provide information on the location of any radiation incident thereon.

[0066] The detectors can also be used in conjunction with active or passive shielding devices to monitor the effectiveness of the shielding and to detect the nature of the radiation to allow the shielding to be correspondingly adjusted.

[0067] Referring now to FIG. 12, in this arrangement a composite structure is made up of a plastics material matrix (not shown) in which are distributed hollow fibres 100 e.g. of glass. The fibres are arranged into layers, an outer detector layer 102 and an inner shielding layer 104. Each layer has a respective manifold and pump system 106, 108, which allows preset material in liquid, or gel form to be introduced into the hollow fibres 100 from respective reservoirs 110, 112. The construction of the detector layer is similar to that of previous embodiments and allows respective scintillation materials to be introduced into and withdrawn from the fibres or groups thereof so that they act as detectors of the respective radiation.

[0068] The manifolds 106, 108 are designed to allow different materials to be selectively introduced into and withdrawn from the hollow fibres. The scintillation manifold 106 also includes detectors (not shown but similar to detectors in arrays 48 in FIG. 10) for detecting scintillation occurring in the detector layer 102 due to the incidence of radiation of the relevant type. The detectors are preferably operable to detect the position of the incidence of radiation so that a two-dimensional map of incidence and radiation type may be determined. A processor 114 receives the outputs from the detectors associated with the manifold 106 and controls the manifold and pumps of the detector manifold to tune or render the detection layer or selected regions or sub-layers thereof sensitive to different radiation types. The processor also controls the manifold and pump system 108 for the shield materials. The processor 112 is programmed to detect incidence of radiation of the various types and then to cause a shield material (or combination thereof) optimised for shielding of the radiation of that type or types to be introduced into the hollow fibres, at least in the area of incidence of that radiation.

[0069] The invention also extends to an active shield arrangement per se, comprising a fibre arrangement of hollow fibres and means reintroducing selectively into said fibres a predetermined shielding material or materials.

1. A detector for detecting ionising radiation, said detector comprising:

- a scintillator selected to emit light in response to incidence thereon of radiation to be detected;
- at least one detector for detecting said emitted light, and
- at least one optical waveguide for transmitting said emitted light to said detector.

2. A detector according to claim 1, wherein said waveguide is an optical fibre and said scintillator is a solid scintillator element through which said optical fibre passes, whereby light emissions in said scintillator element are transmitted to said detector by said fibre.

3. A detector according to claim 1 or claim 2, wherein the refractive index of the scintillator element is less than that of the optical fibre.

4. A detector according to claim 2, wherein at least part of the external surfaces of the scintillator element and the optical fibre are provided with a coating of reflective material.

5. A detector according to claim 4, wherein said reflector material is selected from the group consisting of gold, silver, platinum, indium and aluminium.

6. A detector according to claim 2, which includes a plurality of optical fibres passing through said scintillator elements and in optical contact therewith, and means for detecting said light emissions.

7. A detector according to claim 6, wherein said optical fibres are disposed orthogonally in rows and columns.

8. A detector according to claim 6, wherein said optical fibres are disposed orthogonally in three dimensions (X,Y,Z).

9. A detector according to claim 7, wherein said optical fibres are arranged in stacked planes of rows and columns.

10. A detector according to any of claims 2, wherein said optical fibre follows a helical or serpentine path through said scintillator elements.

11. A detector according to any of claims 2, wherein said optical fibre is provided as a woven fabric element.

12. A detector according to claim 2, wherein said scintillator element is of spherical shape, with said optical fibre wrapped into a ball configuration.

13. A detector according to claim 1, wherein said at least one waveguide comprises a hollow optical fibre containing a scintillator material.

14. A detector according to claim 13, wherein said scintillator material comprises a liquid, gel or solid.

15. A detector according to claim 14, wherein said scintillator material is a liquid or gel, and including means for selectively introducing and withdrawing said scintillator material from said hollow fibre.

16. A detector according to claim 13, wherein the light emissions are transmitted to said detector down the central space of a tube by total internal reflection off inner walls of said fibre.

17. A detector according to claim 16, wherein at least part of the inner surface of the fibre is provided with a coating of reflective material.

18. A detector according to any of claim 13, wherein the light emissions are transmitted to said detector through the fibre wall by total internal reflection within the fibre wall.

19. A detector according to claim 18, wherein at least part of the external surface of the fibre is provided with a coating of reflective material.

20. A detector according to claim 17, wherein the reflective material is selected from the group gold, silver, platinum, indium and aluminium.

21. A detector according to claim 13, which includes a plurality of optical fibres passing through said scintillator elements and in optical contact therewith, and means for detecting said light emissions.

22. A detector according to claim 21, wherein said optical fibres are disposed orthogonally in rows and columns.

23. A detector according to claim 21, wherein said optical fibres are disposed orthogonally in three dimensions (X,Y,Z).

24. A detector according to claim 21, wherein said optical fibres are arranged in stacked planes of rows and columns.

25. A detector according to claim 13, wherein said optical fibre follows a helical or serpentine path through said scintillator elements.

26. A detector according to claim 13, wherein said optical fibre is provided as a woven fabric element.

27. A detector according to claim 13, wherein said scintillator element is of spherical shape, with said optical fibre wrapped into a ball configuration.

28. A detector according to claim 1, including means for detecting light emissions at opposite ends of said waveguide and means responsive to the timings of the light emissions to determine the location of the incident radiation along the length of the waveguide.

29. A detector according to claim 28, including means for detecting the location of the incident radiation in two dimensions.

30. A detector according to claim 1, including a moderator material to moderate the radiation incident on said scintillator material.

31. A detector according to claim 30, wherein the moderator material is contained in a hollow fibre adjacent the scintillator material.

32. A detector according to claim 1, wherein said scintillator material is responsive to at least one of alpha particles, beta particles (electrons), x-ray radiation, gamma radiation, neutrons, protons.

33. A detector according to claim 1, including a plurality of respective scintillators or groups thereof and a plurality of associated waveguides, with each scintillator or group thereof being responsive to a selected radiation.

34. A detector according to claim 33, wherein said scintillators or groups thereof are arranged in layers, with each layer being responsive to a predetermined radiation.

35. A detector according to claim 1, including means for injecting light into the optical waveguide, and means for detecting and processing of the detected light signal to determine a condition of the optical fibre.

36. A fibre composite structure including a matrix material, a plurality of structural fibres, and at least one optical waveguide embedded therein, with a scintillator in optical contact with said waveguide and selected to emit light in response to ionising radiation, and a detector for detecting light emissions transmitted from said scintillator by said waveguide.

37. A fibre composite structure according to claim 36, which includes a plurality of scintillators and a plurality of optical waveguides embedded in said matrix.

38. A flexible textile material comprising textile fibres and incorporating therein at least one optical waveguide, with a scintillator in optical contact with said waveguide and selected to emit light in response to ionising radiation, and a detector for detecting light emissions transmitted by said waveguide.

39. A method of detecting and locating of the incidence of radiation along an elongate path or structure which comprises providing at least one elongate optical waveguide having disposed therealong at least one scintillator element, and a detector for detecting light emissions transmitted by said waveguide from said scintillator element or elements.

40. A method of detecting and locating emission of radiation from a space which comprises surrounding at least part of said space with a plurality of fibres each having scintillator elements associated therewith and detecting emission of light from said scintillator elements at the ends of said fibres.

41. A combination comprising a detector as claimed in claim 1 combination with a radiation shield means, wherein the detector is operable to monitor and/or control the effectiveness of the radiation shield means.

42. A combination according to claim 41 wherein the shield means is adapted to allow the radiation shielding characteristics thereof to be adjusted.

43. A combination according to claim 42, further comprising a processor responsive to the output of said detector to control the radiation shielding characteristics of the shield to at least reduce the transmission of radiation therethrough.

* * * * *