

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number  
**WO 2005/014146 A1**

(51) International Patent Classification<sup>7</sup>: **B01D 53/94**,  
F01N 3/28

(21) International Application Number:  
PCT/EP2004/008539

(22) International Filing Date: 29 July 2004 (29.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
103 35 785.8 5 August 2003 (05.08.2003) DE

(71) Applicant (for all designated States except US): **UMI-CORE AG & CO. KG** [DE/DE]; Rodenbacher Chaussee 4, 63457 Hanau-Wolfgang (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PFEIFER, Marcus** [DE/DE]; Wittkuller Strasse 154a, 42719 Solingen (DE). **SOEGER, Nicola** [DE/DE]; Mellenseestr. 53, 63456 Hanau (DE). **DEMEL, Yvonne** [DE/DE]; Fachfeldstr. 31, 60386 Frankfurt (DE). **KUHL, Tobias** [DE/DE]; Bruchwiesenweg 23, 63457 Hanau (DE). **SPURK, Paul**,

**Christian** [DE/DE]; Georgenstr. 14a, 64331 Weiterstadt (DE). **GIESHOFF, Jürgen** [DE/DE]; Am Burgwerksrain 10, 63599 Biebergmünd (DE). **LOX, Egbert** [BE/DE]; Am Lärchentor 8, 36355 Grebenhain (DE). **KREUZER, Thomas** [DE/DE]; Philipp-Reis-Str. 13, 61184 Karben (DE).


(74) Agent: **VOSSIUS & PARTNER**; Siebertstrasse 4, 81675 Munich (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: CATALYST ARRANGEMENT AND METHOD OF PURIFYING THE EXHAUST GAS OF INTERNAL COMBUSTION ENGINES OPERATED UNDER LEAN CONDITIONS

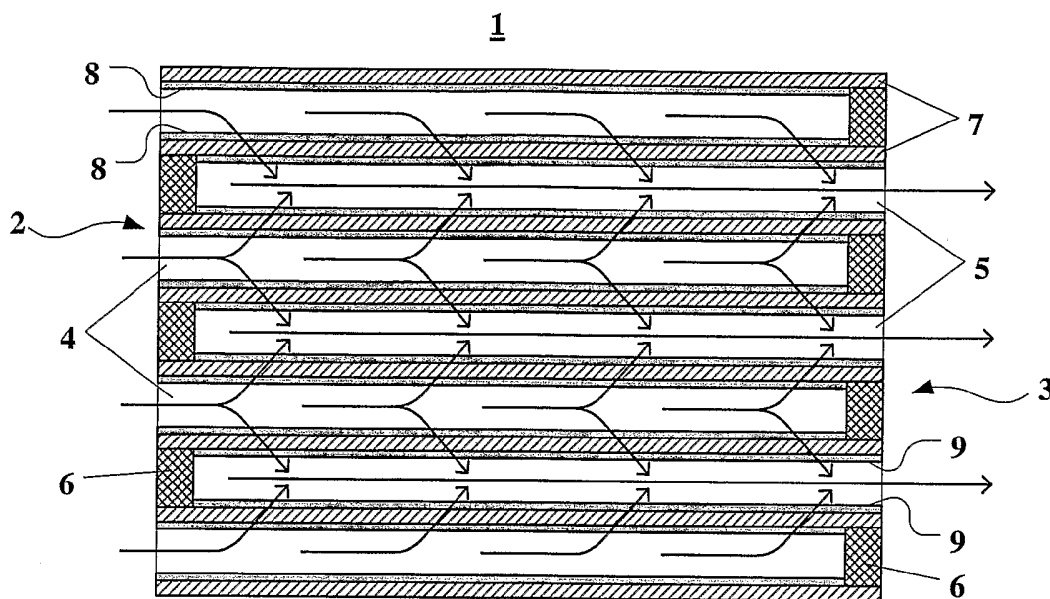

(57) Abstract: The invention relates to a catalyst arrangement for purifying the exhaust gases of internal combustion engines operated under lean conditions. It is proposed that a thinwalled, porous carrier be coated on one side with a nitrogen oxide storage catalyst and on the other side with an SCR catalyst. When the exhaust gas is passed through the catalytic coatings and the support material, a significant improvement in the nitrogen oxide conversion is achieved compared to a series arrangement of the catalysts on separate carriers. Wall flow filters have been found to be useful as thin-walled carriers.

WO 2005/014146 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## **Catalyst arrangement and method of purifying the exhaust gas of internal combustion engines operated under lean conditions**

### **Description**

The invention relates to the purification of exhaust gas from internal combustion engines operated under lean conditions, in particular purification of exhaust gas from diesel engines. The invention describes a catalyst arrangement and a method of purifying the exhaust gas of these engines.

Internal combustion engines operated under lean conditions will hereinafter also be referred to as lean burn engines. They are operated using a lean air/fuel mixture. Their exhaust gas therefore comprises not only the usual pollutants carbon monoxide (CO), nitrogen oxides (NO<sub>x</sub>) and unburnt hydrocarbons (HC) and particles (PM) but also a high proportion of up to 15% by volume of oxygen, so that the exhaust gas has a net oxidizing action. For this reason, the exhaust gas purification methods using three-way catalysts which are customary for stoichiometrically operated internal combustion engines cannot be employed. In particular, the conversion of the nitrogen oxides into nitrogen in the oxidizing exhaust gas atmosphere presents considerable difficulties.

The main components of the nitrogen oxides in the exhaust gas of lean burn engines are nitrogen monoxide (NO) and nitrogen dioxide (NO<sub>2</sub>), with nitrogen monoxide being the predominant component. Depending on the operating conditions of the internal combustion engine, the proportion of nitrogen monoxide is from 60 to 95% by volume of the total nitrogen oxides.

For the reduction of nitrogen oxides in oxidizing exhaust gases, the method of selective catalytic reduction (SCR) has been known for a long time. Here, ammonia is added as reducing agent to the exhaust gas and this gas mixture is then passed over a catalyst for the selective catalytic reduction (SCR catalyst). The nitrogen oxides are selectively reacted with the ammonia over the SCR catalyst to form nitrogen and water. This method is now used commercially in the purification of offgases from power stations. Typical SCR catalysts comprise, for example, solid state acids from the system TiO<sub>2</sub>/WO<sub>3</sub>/MoO<sub>3</sub>/V<sub>2</sub>O<sub>5</sub>/SiO<sub>2</sub>/SO<sub>3</sub> as catalytically active components. Other SCR catalysts are based on acid-resistant zeolites exchanged with transition metals, for example dealuminated Y zeolites, mordenite, silicalite or ZSM-5. The working temperature of these catalysts is from about 300 to 500°C.

Owing to the need to add a reducing agent to the exhaust gas, the SCR method is very complicated for use in mobile applications. For this reason, the NO<sub>x</sub>-storage technology has been developed as an alternative to the SCR method. Here, the nitrogen oxides present in the lean exhaust gas are temporarily stored in the form of nitrates on a nitrogen oxide storage catalyst. After the storage capacity of the storage catalyst is exhausted, it has to be regenerated. For this purpose, the internal combustion engine is briefly operated using a rich air/fuel mixture, i.e. more fuel than can be completely burnt by means of the combustion air is introduced into the air/fuel mixture, so that the exhaust gas is rich. It thus contains unburnt hydrocarbons. The stored nitrates are decomposed into nitrogen oxides in the rich exhaust gas and react with the unburnt hydrocarbons present in the rich exhaust gas as reducing agent to form nitrogen and water.

To store the nitrogen oxides in the form of nitrates, nitrogen oxide storage catalysts comprise basic components such as oxides of the alkali metals and the alkaline earth metals, and also of rare earth metals such as cerium oxide and lanthanum oxide. Preference is given to using barium oxide and strontium oxide. In addition, the nitrogen oxide storage catalysts further comprise catalytically active noble metals, usually platinum. The task of these noble metals is to oxidize the nitrogen monoxide which is predominantly present in the exhaust gas to nitrogen dioxide. Only this is able to react, in the presence of the water vapor in the exhaust gas, with the storage components to form nitrates. During the regeneration of the storage catalyst, the desorbed nitrogen oxides are reduced to nitrogen and water over the catalytically active noble metals.

Cyclic operation of an engine with alternate lean and rich air/fuel mixtures is necessary for the use of nitrogen oxide storage technology for the purification of the exhaust gases of lean burn engines. Here, lean operation is the normal mode of operation of the lean burn engine. During this phase of operation, the nitrogen oxides in the exhaust gas are stored by the storage catalyst (storage phase). During rich operation, the nitrogen oxides are desorbed again and reacted (desorption phase). The storage phase usually lasts for from 1 to 2 minutes, while the desorption phase requires only a brief period of from 5 to 20 seconds.

To improve the two methods described when applied to purification of the exhaust gases of lean burn engines, various solutions have become known. The European patent publication EP 0 733 354 A1 describes a selective catalytic reduction method in which the ammonia required for the reduction is generated from the nitrogen oxides present in the exhaust gas. For this purpose, the exhaust gas purification unit contains a three-way

catalyst and a downstream SCR catalyst. The lean burn engine is, as in the case of the nitrogen oxide storage technology, operated alternately with rich and lean air/fuel mixtures. During operation with a rich air/fuel mixture, ammonia is formed from the nitrogen oxides present in the exhaust gas over the three-way catalyst. During this phase, the ammonia is stored on the downstream SCR catalyst. During operation with a lean air/fuel mixture, the nitrogen oxides pass the three-catalyst and are converted selectively into nitrogen and water over the SCR catalyst using the previously stored ammonia. In the method described by EP 0 733 354 A1, the ammonia is thus generated on board the vehicle and does not have to be introduced separately into the exhaust gas.

10 The German patent publication DE 198 20 828 A1 describes an improvement of the method of EP 0 733 354 A1. For this purpose, a nitrogen oxide storage catalyst is installed upstream of the three-way catalyst. During the lean phases, the nitrogen oxide storage catalyst stores the major part of the nitrogen oxides present in the exhaust gas. During the rich phase, the nitrogen oxides are desorbed and partly converted into ammonia by the three-way catalyst. The exhaust gas purification apparatus described by 15 DE 198 20 828 A1 is said to give an improved degree of conversion of the nitrogen oxides compared to the apparatus of EP 0 733 354 A1.

However, both solutions are very complicated in terms of apparatus. They require at least two separate catalyst units and the conversion of nitrogen oxides which they are able to achieve has to be improved further. It is therefore an object of the present invention to provide an apparatus which has a significantly simpler construction than the apparatuses known from the prior art and makes it possible to achieve a further improvement in the conversion of nitrogen oxides.

This object is achieved by a catalyst arrangement which comprises an open-pored, porous carrier having an entry surface and an exit surface for the exhaust gas. In the catalyst arrangement, the entry and exit surfaces of the carrier are coated with different, catalytically active layers, with the catalyst layer on the exit surface being formed by a catalyst for selective catalytic reduction and the catalyst layer on the entry surface being able to store nitrogen oxides under lean exhaust gas conditions and to convert nitrogen oxides into ammonia under rich exhaust gas conditions.

The invention is explained in more detail below with the aid of figures 1 and 2. In the figures:

**Figure 1** shows the structure of a wall flow filter coated according to the invention

**Figure 2** shows NO<sub>x</sub> conversion curves for the catalyst arrangements 1 to 4 described in the examples

According to the invention, the catalyst arrangement comprises only one catalyst unit having two different catalysts which are not in direct contact but are merely located  
5 close to one another on the catalyst unit. Between them is the open-pored carrier. This carrier can, for example, be configured as a disk through which the exhaust gas passes in a perpendicular direction. However, preference is given to using a wall flow filter as is used for removing soot particles from the exhaust gas of diesel engines as carrier.

Figure 1 shows a cross section through the catalyst arrangement of the invention using a  
10 wall flow filter as carrier. A wall flow filter has a similar structure to the known honeycomb catalyst carriers made of a ceramic material. Such a honeycomb carrier (1) has a large number of closely spaced flow channels (4, 5) for the exhaust gas which pass through it from an entry face (2) to an exit face (3). In a wall flow filter, these flow channels are alternately closed by a ceramic plug (6), so that inlet channels (4) and  
15 outlet channels (5) are formed. Owing to this construction, the exhaust gas has to pass through the porous dividing walls (7) between the flow channels on its way from the entry face to the exit face of the carrier. The entry surface for the exhaust gas is in this case formed by the wall surfaces of the inlet channels (4) and carries the first catalyst layer (8). The wall surfaces of the outlet channels form the exit surface and are coated  
20 with the second catalyst layer (9).

The two catalyst layers (8, 9) are separated physically by the porous carrier. It has been found to be advantageous to keep the thickness of the carrier as small as possible. Preference is given to the entry and exit surfaces being at a distance of less than 1 mm, in particular less than 0.5 mm, from one another. The carrier has to have an open-pored  
25 structure so that exhaust gas can flow through it. Preference is given to using carriers made of a ceramic material such as cordierite, silicon carbide or aluminum titanate.

The catalysts are applied in the form of dispersion coatings to the entry and exit surfaces of the catalyst arrangement. These coatings comprise finely particulate, oxidic support materials to which the catalytically active components have been applied in finely  
30 divided form. The particle diameters of the oxidic support materials are usually in the range from 5 to 9  $\mu\text{m}$ , and the catalyst barely penetrates, depending on the chosen mean pore diameter of the filter material, into the filter body.

In contrast, impregnation with a solution of precursor compounds of catalytically active components leads to penetration of the filter body by these components. It has been

found that the advantageous separation of the two catalyst layers can also be achieved to a sufficient extent when one of the two catalysts is introduced by impregnation into the filter body itself and the second catalyst is then applied in the form of a dispersion coating to the entry or exit surface of the filter body.

- 5 In principle, entry surface and exit surface can be coated with various combinations of different catalysts. Useful combinations are a three-way catalyst or a nitrogen oxide storage catalyst on the entry surface and an SCR catalyst on the exit surface, and the combination of an SCR catalyst, a nitrogen oxide storage catalyst, an HC-DeNO<sub>x</sub>-catalyst or a hydrocarbon storage material on the entry surface with a diesel oxidation  
10 catalyst on the exit surface. Likewise, a three-way catalyst on the entry surface can be combined with a nitrogen oxide storage catalyst on the exit surface. The combination of a nitrogen oxide storage catalyst on the entry surface with a diesel oxidation catalyst on the exit surface is also advantageous.

15 To treat the exhaust gas of lean burn engines, preference is given, according to the invention, to a catalyst (8) being applied to the entry surface which can adsorb at least part of the nitrogen oxides present in the exhaust gas under lean operating conditions and, under rich exhaust gas conditions, convert part of the desorbed nitrogen oxides into ammonia. To carry out the selective catalytic reduction, the exit surface is coated with an SCR catalyst (9).

20 The catalyst (8) can in this case be a nitrogen oxide storage catalyst or a three-way catalyst. While in the case of a nitrogen oxide storage catalyst, the nitrogen oxide storage function under lean exhaust gas conditions is particularly pronounced and the capability of forming ammonia from the stored nitrogen oxides is a by-product, these circumstances are precisely reversed in the case of a three-way catalyst. However, it is  
25 also possible to use catalysts which lie between these two extremes, for example a three-way catalyst whose storage capability for nitrogen oxides has been increased by addition of nitrogen oxide storage components. The catalyst on the entry surface can also be a double-layer catalyst in which one layer is formed by a nitrogen oxide storage catalyst and the second layer is formed by a three-way catalyst.

30 The optimum composition of the catalyst on the entry surface of the carrier depends finally on the properties of the internal combustion engine and the spectrum of pollutants in its emissions and can be determined by a person skilled in the art by means of simple tests. The conversion of the nitrogen oxides by means of the proposed catalyst

arrangement can also be optimized for a given catalyst for the entry surface by appropriate programming of the engine control system.

The exhaust gas from the internal combustion engine which is to be treated is, in the catalyst arrangement of the invention, passed firstly through the catalyst layer on the entry surface of the carrier, then through the porous carrier and immediately afterward through the SCR catalyst on the exit surface. As will be shown by the examples, this arrangement leads to significantly improved conversion of the nitrogen oxides compared to the known series arrangement of two separate catalyst units comprising a nitrogen oxide storage catalyst and an SCR catalyst.

The experimental results make it obvious that a synergistic effect is present here. The reasons for this are presumably the very short distance to be covered between exit from the catalyst on the entry surface and entry into the catalyst on the exit surface. In addition, in the catalyst arrangement of the invention, the exhaust gas is forced to flow through the catalyst layers, while in the case of conventional honeycomb catalysts the exhaust gases are conveyed tangentially past the catalyst layers and interaction with the catalyst layer takes place only via diffusion effects. Contrary to that, forced interaction with the catalyst layers takes place in the case of the catalyst arrangement of the invention.

A further advantage of this arrangement is that the catalyst layer comprising a noble metal on the entry surface is clearly separated from the SCR catalyst applied to the exit surface by the essentially inert, porous carrier. This is because the physical separation reduces a possibly damaging interaction between the two different catalysts. Thus, it is known that vanadium-containing SCR catalysts can become deactivated on contact with other high surface area supported catalysts as a result of thermal migration of the vanadium.

The catalysts used for the catalyst layer on the entry site is preferably a nitrogen oxide storage catalyst which comprises basic compounds of the alkaline earth metals for storing the nitrogen oxides and catalytically active platinum group metals. As alkaline earth metals, preference is given to using barium and/or strontium which can be incorporated in the catalyst in the form of oxides, hydroxides or carbonates. Preferred platinum group metals are platinum and/or rhodium which have been applied in finely divided form to a separate support material such as active aluminum oxide, cerium oxide, zirconium oxide, silicon dioxide or titanium oxide or to a cerium/zirconium mixed oxide. Especially preferred is a nitrogen oxide storage catalyst which comprises

barium carbonate as storage component and platinum and rhodium on a cerium/zirconium mixed oxide and, in addition, active aluminum oxide.

The SCR catalyst on the exit site preferably comprises at least one zeolite exchanged with a transition metal, in particular with iron, copper, cerium or manganese. As an  
5 alternative, it is also possible to use a catalyst based on a solid state acid system  $\text{TiO}_2/\text{WO}_3/\text{MoO}_3/\text{V}_2\text{O}_5/\text{SiO}_2/\text{SO}_3$ . Preferred solid state acid systems are  $\text{TiO}_2$  or  $\text{TiO}_2/\text{Al}_2\text{O}_3$  or  $\text{TiO}_2/\text{SiO}_2$  in combination with  $\text{V}_2\text{O}_5$  or  $\text{V}_2\text{O}_5/\text{WO}_3$  or  $\text{V}_2\text{O}_5/\text{MoO}_3$ .

In the following studies, the nitrogen oxide conversions which could be achieved using a nitrogen oxide storage catalyst and an SCR catalyst in various combinations were  
10 measured as a function of the exhaust gas temperature upstream of the catalyst arrangement. Nitrogen oxide storage catalyst and SCR catalyst had the following compositions.

#### **Nitrogen oxide storage catalyst:**

To produce the nitrogen oxide storage coatings, a cerium/zirconium mixed oxide  
15 (weight ratio 70/30) was firstly loaded with platinum and rhodium in a weight ratio of 10/1 by pore volume impregnation. This material was then processed together with aluminum oxide and barium carbonate to form a coating suspension.

#### **SCR catalyst:**

An H-ZSM-5 zeolite (molar ratio of  $\text{SiO}_2/\text{Al}_2\text{O}_3 = 40$ ) was exchanged with iron to its  
20 exchange capacity by solid state ion exchange using iron chloride ( $\text{FeCl}_3$ ) and subsequently suspended in water. The exchanged zeolite contained 3.5% by weight of iron, calculated as oxide.

#### **Comparative example 1:**

The entry surface of a wall flow filter made of cordierite and having a diameter of  
25 25.4 mm, a length of 152.4 mm and a cell density of  $46.5 \text{ cm}^{-2}$  (300 cpsi) was coated with the coating suspension for the nitrogen oxide storage catalyst. After removal of excess coating suspension, the coating was dried and calcined at  $500^\circ\text{C}$ . The coated filter had a coating concentration of 150 g per liter of filter body, of which 1.94 g/l was platinum and 12.1 g/l was barium, calculated as barium oxide.

30 The nitrogen oxide storage catalyst produced in this way will hereinafter be referred to as catalyst arrangement C1.

**Comparative example 2:**

A further nitrogen oxide storage catalyst was produced as described in comparative example 1 and combined with an SCR catalyst which had been obtained by coating the entry surface of a further filter body with the zeolite suspension, drying it and calcining it. The coating concentration in this case was 100 g/l of filter body.

The nitrogen oxide storage catalyst and downstream SCR catalyst form the catalyst arrangement C2.

**Comparative example 3:**

The entry surface of a further filter body having the abovementioned dimensions was coated with a double layer of the SCR catalyst and the nitrogen oxide storage catalyst. For this purpose, the entry surface of the filter body was coated firstly with the SCR catalyst (100 g/l) and then with the nitrogen oxide storage catalyst (150 g/l).

The finished catalyst had a total coating concentration of 250 g/l of filter body, of which 1.94 g was platinum and 12.1 g was barium, calculated as oxide. It will hereinafter be referred to as catalyst arrangement 3.

**Example 1:**

A further filter body was coated according to the invention on its entry surface with the nitrogen oxide storage catalyst (150 g/l) and on its exit surface with the SCR catalyst (100 g/l).

This catalyst will be referred to as catalyst arrangement 4.

**Application example:**

The catalyst arrangements described were examined in a model gas unit in respect of their nitrogen oxide conversions as a function of the exhaust gas temperature upstream of the catalyst arrangement.

On the model gas unit, the catalyst arrangements were alternatively exposed to lean and rich model exhaust gas and the nitrogen oxide conversions were determined. The test conditions are reported in the following table.

**Table 1:** Test conditions

		Operating phases	
		lean	rich
Time	[s]	80	10
$\lambda$ *)		1.5	0.8
NO	[ppm by volume]	500	500
O2	[% by volume]	8	0
CO2	[% by volume]	10	10
HC	[ppm by volume]	300	300
CO	[% by volume]	0	4
H2	[% by volume]	0	1.3
H2O	[ppm by volume]	10	10
N2		balance	balance
Space velocity	[h <sup>-1</sup> ]	26.000	26.000
Volume flow	[standard m <sup>3</sup> /h]	1931	1931

\*)  $\lambda$ : Air ratio (air/fuel ratio standardized to stoichiometric conditions)

The measured results are shown in figure 2.

Catalyst arrangement 1 consists only of a nitrogen oxide storage catalyst. The NOx conversion curve shown in figure 2 is typical of such a catalyst. In comparison with catalyst arrangement 1, catalyst arrangement 2 has an SCR catalyst arranged downstream of the nitrogen oxide storage catalyst on a separate carrier. This enables the NOx conversions to be increased, especially in the temperature range above 230°C, but the width of the conversion curve remains approximately unchanged. Below 230°C, the NOx conversions achieved by the NOx storage catalyst alone and in combination with the SCR catalyst are virtually identical. At these low temperatures, the SCR catalyst does not achieve any conversion in the present, NO<sub>2</sub>-free model exhaust gas.

When SCR catalyst and nitrogen oxide storage catalyst are applied as a double layer to the entry side of the carrier (catalyst arrangement 3), the conversion curve deteriorates significantly compared to the sole use of a nitrogen oxide storage catalyst. At temperatures above 300°C, this catalyst arrangement gives lower conversion rates than a

pure nitrogen oxide storage catalyst. This is attributable to partial poisoning of the SCR catalyst by traces of noble metal from the nitrogen oxide storage catalyst. At relatively high temperatures, these lead to partial oxidation of the ammonia stored in the SCR catalyst under lean operating conditions, for example to form NO. This demonstrates the adverse effect of direct contact between noble metal catalyst and SCR catalyst.

In contrast, catalyst arrangement 4 according to the invention displays a significant improvement in the NOx conversion curve, both in terms of the maximum and in terms of the width of the curve. This demonstrates the abovementioned synergistic effect of the two catalyst layers which closely follow one another in the flow direction of the exhaust gas. Although this arrangement is identical to catalyst arrangement 2 in respect of the catalyst sequence in the flow direction of the exhaust gas, the arrangement according to the invention gives a significant improvement in the conversion curve. This could not have been expected on the basis of the known catalyst arrangements on separate carrier bodies. The catalyst arrangement of the invention displays a significantly improved activity over the entire temperature range, in particular in the low-temperature and high-temperature ranges.

### Claims

1. A catalyst arrangement for purifying the exhaust gases of internal combustion engines, which comprises an open-pored, porous carrier having an entry surface and an exit surface for the exhaust gas, wherein the entry and exit surfaces of the carrier are coated with different, catalytically active layers, with the catalyst layer on the exit surface being formed by a catalyst for selective catalytic reduction and the catalyst layer on the entry surface being able to store nitrogen oxides under lean exhaust gas conditions and to convert nitrogen oxides into ammonia under rich exhaust gas conditions.
2. A catalyst arrangement according to claim 1, wherein the catalyst layer on the entry surface is formed by a nitrogen oxide storage catalyst.
3. A catalyst arrangement as claimed in claim 2, wherein the nitrogen oxide storage catalyst comprises basic compounds of the alkaline earth metals and catalytically active platinum group metals.
4. A catalyst arrangement as claimed in claim 3, wherein the nitrogen oxide storage catalyst comprises platinum and rhodium on a cerium/zirconium mixed oxide and, in addition, active aluminum oxide and barium carbonate.
5. A catalyst arrangement as claimed in any of claims 1 to 4, wherein the SCR catalyst comprises at least one zeolite exchanged with a transition metal.
6. A catalyst arrangement as claimed in any of claims 1 to 4, wherein the SCR catalyst comprises a solid state acid system selected from the group consisting of titanium oxide or titanium oxide/aluminum oxide or titanium oxide/silicon dioxide in combination with vanadium, vanadium/tungsten oxide or vanadium/molybdenum oxide.
7. A catalyst arrangement as claimed in claim 1, wherein the catalyst layer on the entry surface is formed by a three-way catalyst.
8. A catalyst arrangement as claimed in claim 7, wherein the three-way catalyst comprises at least one noble metal from the platinum group on a high surface area support material and, in addition, at least one oxygen storage component based on cerium oxide.

9. A catalyst arrangement as claimed in claim 1, wherein the open-pored, porous carrier is a wall flow filter.
- 5 10. A method of purifying the exhaust gas of internal combustion engines operated under lean conditions with the air/fuel mixture supplied to the engine changing cyclically from lean to rich, wherein the catalyst layer on the exit surface is formed by a catalyst for selective catalytic reduction and the catalyst layer on the entry surface is able to store nitrogen oxides under lean exhaust gas conditions and to convert nitrogen oxides into ammonia under rich exhaust gas conditions.
- 10 11. A method as claimed in claim 10, wherein the open-pored, porous carrier is a wall flow filter.

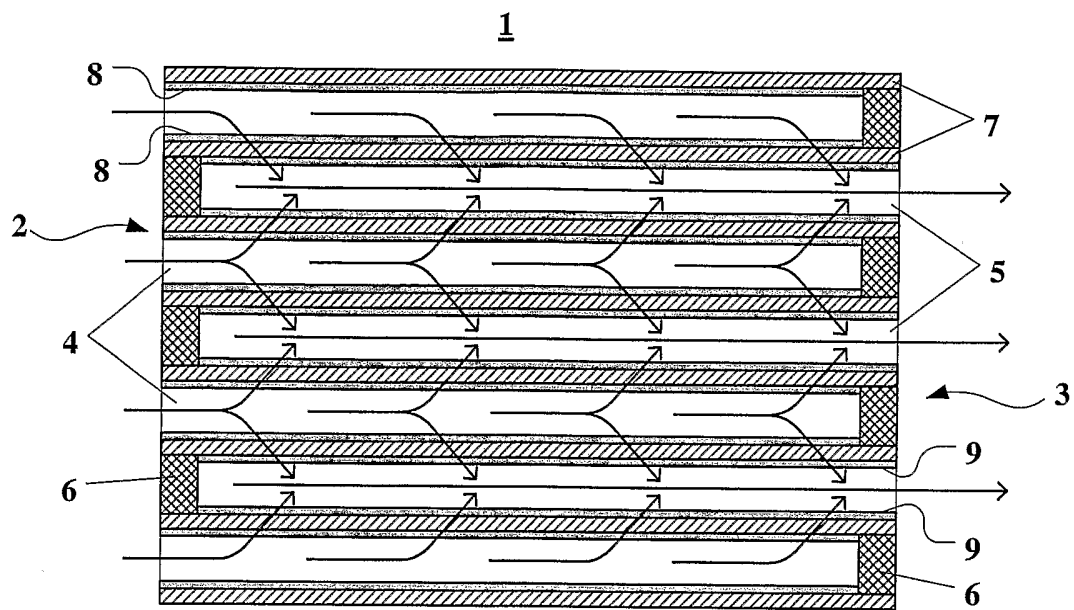


Figure 1

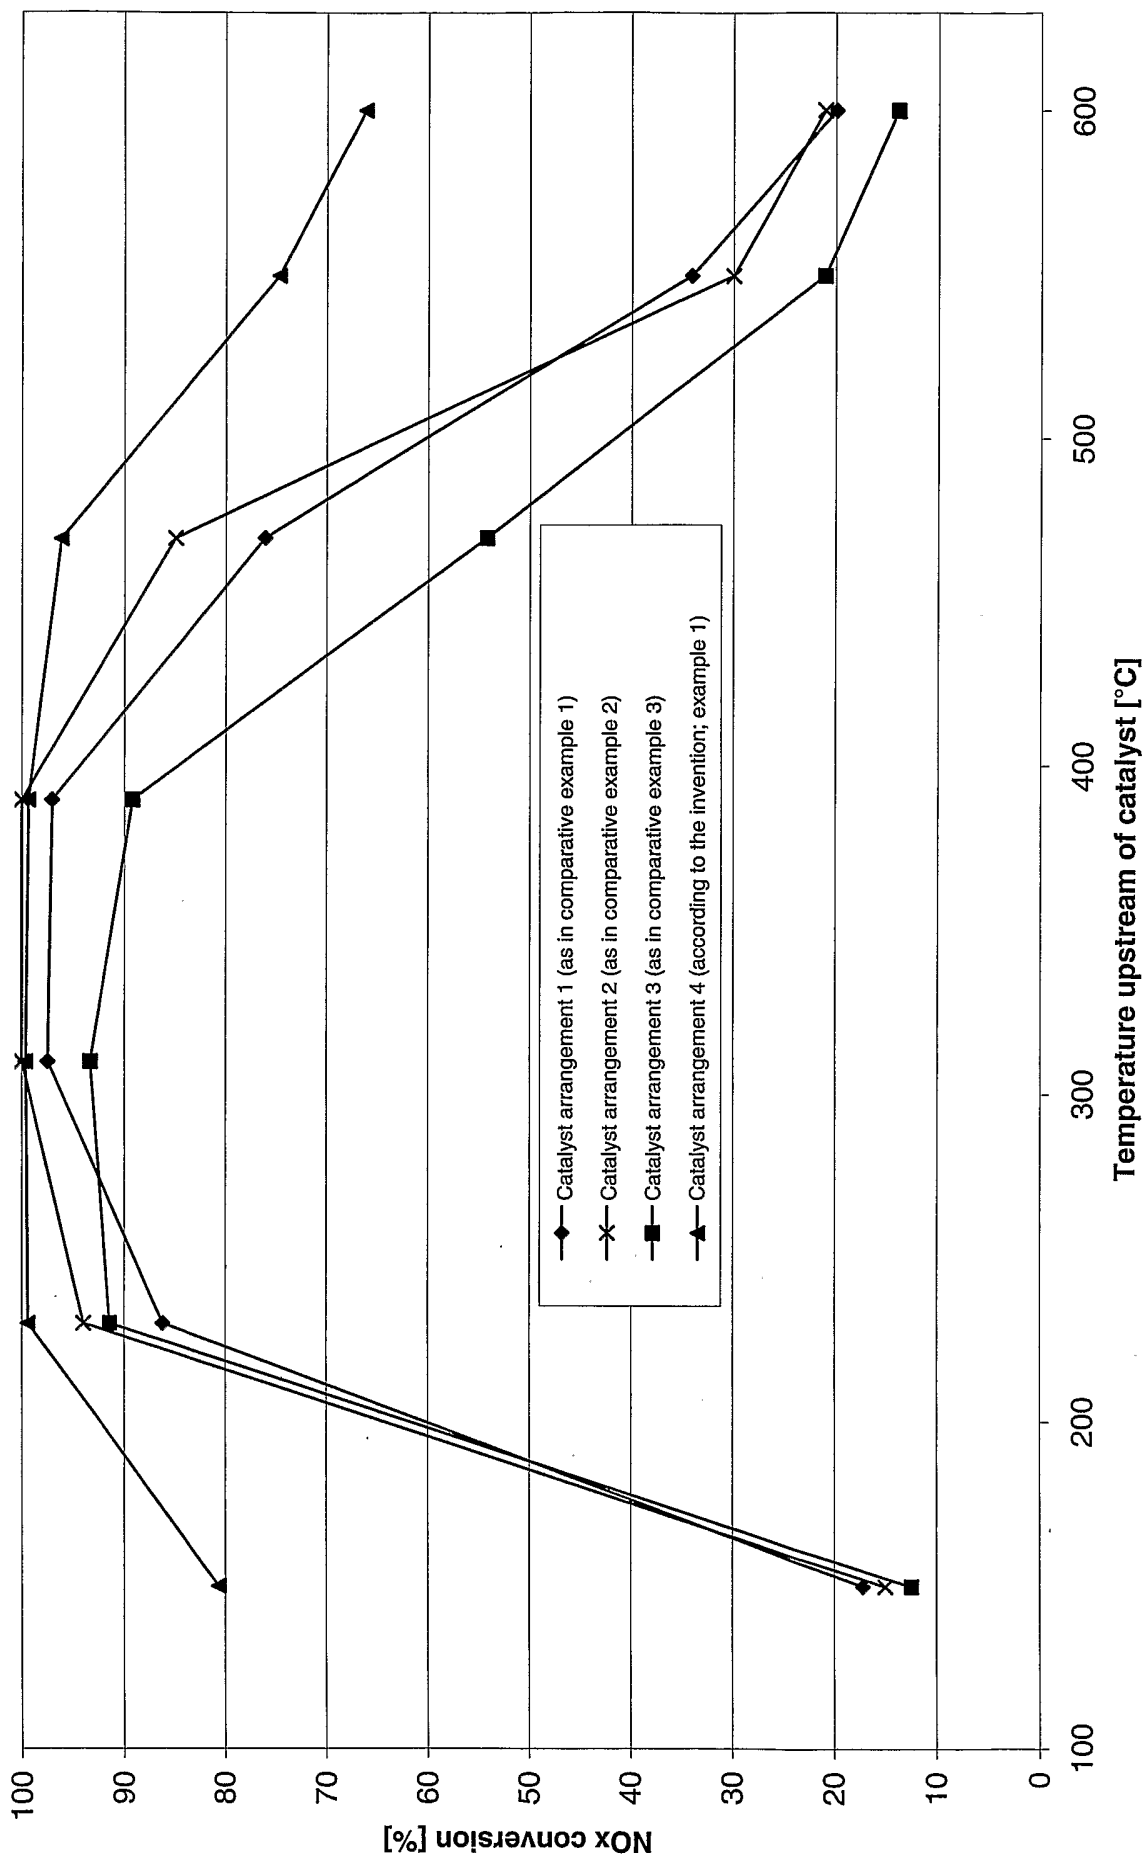


Figure 2

**INTERNATIONAL SEARCH REPORT**

International Application No  
PCT/EP2004/008539

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B01D53/94 F01N3/28

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B01D F01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal

<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	EP 0 984 142 A (TOYOTA JIDOSHA KK) 8 March 2000 (2000-03-08) paragraph '0014! - paragraph '0016!; claims; figure 2	1,2,5,9 3,4,6-8, 10,11
X A	US 5 492 679 A (FRANK AMENT ET AL.) 20 February 1996 (1996-02-20) column 3, line 35 - column 4, line 2; figures 2,3	1 2-11
A	WO 01/12320 A (JOHNSON MATTHEY PUBLIC LTD COMP) 22 February 2001 (2001-02-22) claims; figure 1	1-11
A	DE 198 20 828 A (DAIMLERCHRYSLER) 18 November 1999 (1999-11-18) cited in the application claims	1-11
	----- -/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search  13 October 2004	Date of mailing of the international search report  20/10/2004
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer  Bogaerts, M

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/008539

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 773 354 A (TOYOTA JIDOSHA KK) 14 May 1997 (1997-05-14) cited in the application claims -----	1-11
A	EP 1 033 161 A (DORNIER GMBH) 6 September 2000 (2000-09-06) claims; figures 1,2 -----	1-11
A	EP 1 147 802 A (KEMIRA METALKAT OY) 24 October 2001 (2001-10-24) -----	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/008539

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0984142	A	08-03-2000	DE 69824847 D1 EP 0984142 A1 JP 3248187 B2 US 6367246 B1 WO 9848153 A1	05-08-2004 08-03-2000 21-01-2002 09-04-2002 29-10-1998
US 5492679	A	20-02-1996	DE 19539728 A1	30-04-1997
WO 0112320	A	22-02-2001	EP 1133355 A1 WO 0112320 A1 US 2004175315 A1 US 6753294 B1	19-09-2001 22-02-2001 09-09-2004 22-06-2004
DE 19820828	A	18-11-1999	DE 19820828 A1 DE 59900369 D1 EP 0957242 A2 JP 3108919 B2 JP 2000027634 A US 6176079 B1	18-11-1999 06-12-2001 17-11-1999 13-11-2000 25-01-2000 23-01-2001
EP 0773354	A	14-05-1997	JP 9133032 A DE 69616235 D1 DE 69616235 T2 EP 0773354 A1 US 5782087 A	20-05-1997 29-11-2001 27-06-2002 14-05-1997 21-07-1998
EP 1033161	A	06-09-2000	DE 19908023 A1 DE 59909112 D1 EP 1033161 A1	31-08-2000 13-05-2004 06-09-2000
EP 1147802	A	24-10-2001	FI 20000854 A EP 1147802 A1 US 2002013226 A1	11-10-2001 24-10-2001 31-01-2002