




(86) Date de dépôt PCT/PCT Filing Date: 1999/03/02
(87) Date publication PCT/PCT Publication Date: 1999/09/10
(45) Date de délivrance/Issue Date: 2008/10/07
(85) Entrée phase nationale/National Entry: 2000/08/28
(86) N° demande PCT/PCT Application No.: SE 1999/000299
(87) N° publication PCT/PCT Publication No.: 1999/045656
(30) Priorité/Priority: 1998/03/02 (SE9800635-6)

(51) Cl.Int./Int.Cl. *H04B 3/02* (2006.01),
H01L 27/00 (2006.01), *H03F 1/56* (2006.01),
H03F 3/45 (2006.01)
(72) Inventeurs/Inventors:
NIANXIONG, TAN, SE;
ERLANDS, JOHAN, SE;
WIKNER, JACOB, SE
(73) Propriétaire/Owner:
TELEFONAKTIEBOLAGET LM ERICSSON, SE
(74) Agent: NICOLAESCU, SAWYER

(54) Titre : ETAGE D'ATTAQUE DE LIGNE DIFFERENTIEL
(54) Title: A DIFFERENTIAL LINE DRIVER

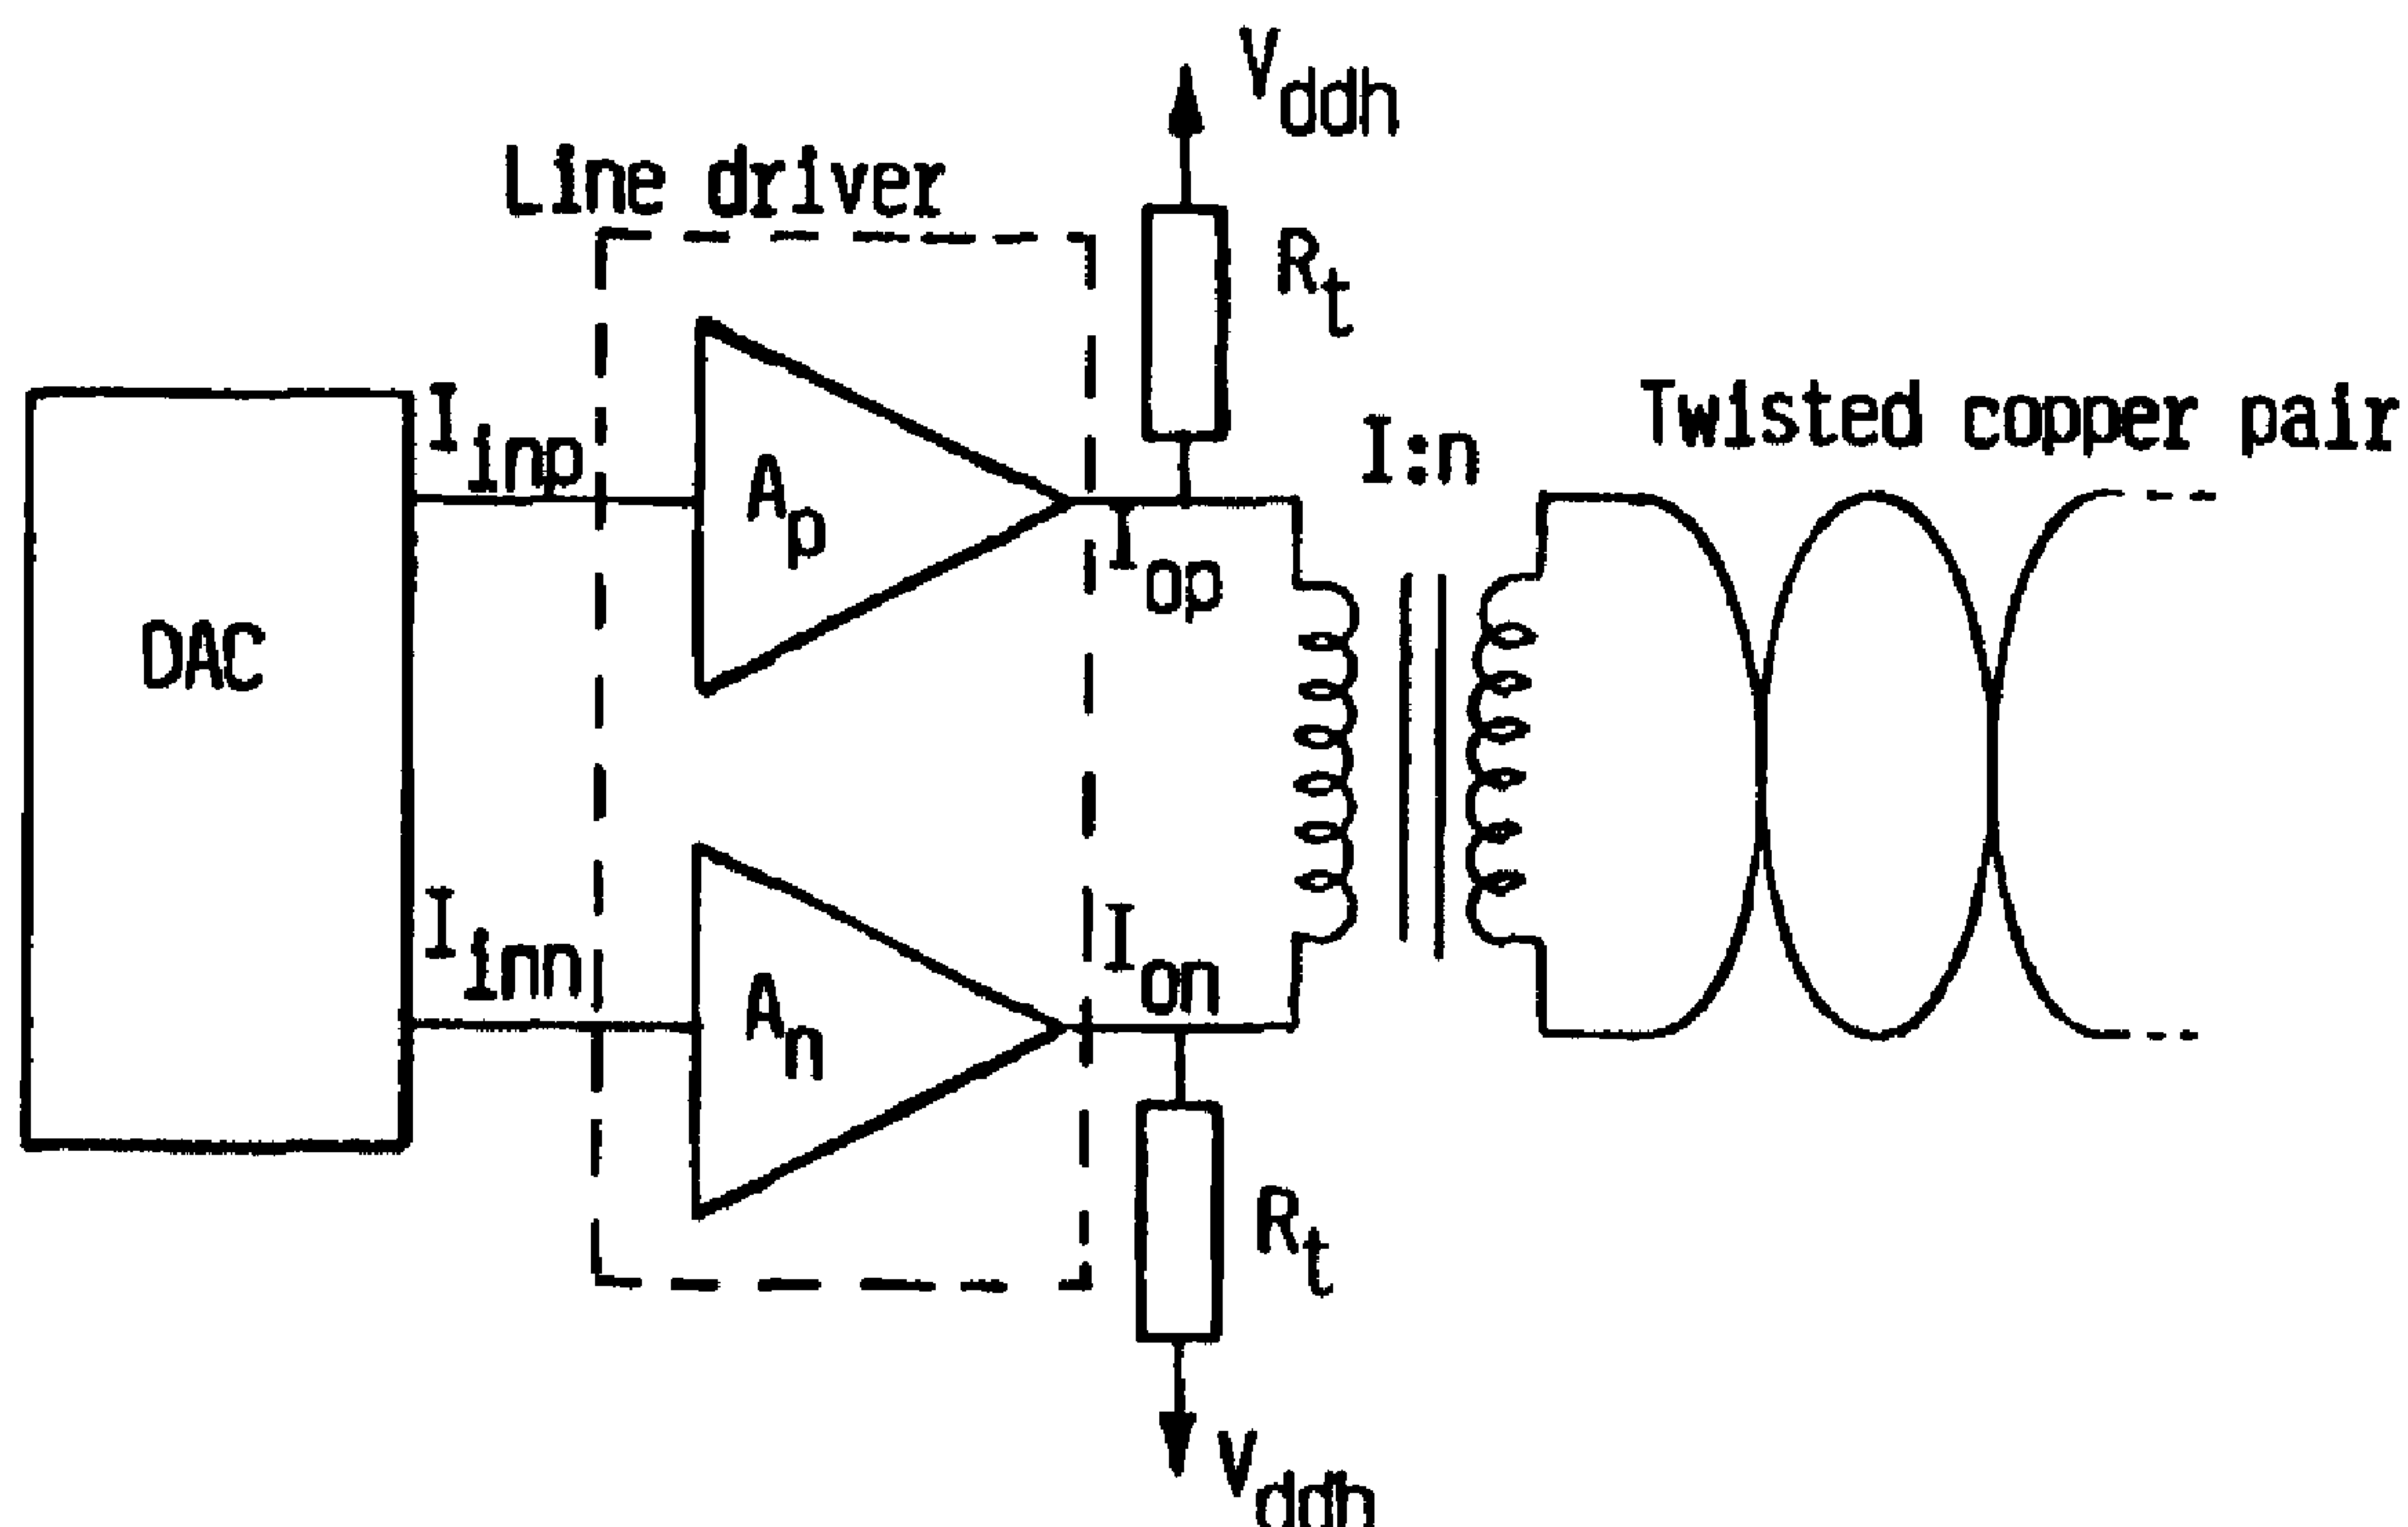

(57) Abrégé/Abstract:

A fully differential line driver, especially for twisted copper pairs. It comprises two current amplifiers (A_p , A_n), made in standard CMOS technique, each having an input (I_{inp} , I_{inn}) and an output (I_{op} , I_{on}), which latter are connected via terminal resistors (R_t) to a voltage source, which may be set to a larger voltage than that used for driving the CMOS amplifiers. With this invention, a low output impedance can be combined with a large swing. Further, feedback is not necessary, avoiding problems like potential instability. A preferred embodiment also has a very low-impedance input, making it appropriate for connecting to a DAC, thus reducing distortion of its output signal. The invention is suitable for very-high-speed-digital-subscriber-line modems.



PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 3/02, H04L 25/02	A3	(11) International Publication Number: WO 99/45656 (43) International Publication Date: 10 September 1999 (10.09.99)
(21) International Application Number: PCT/SE99/00299 (22) International Filing Date: 2 March 1999 (02.03.99) (30) Priority Data: 9800635-6 2 March 1998 (02.03.98) SE (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: NIANXIONG, Tan; Lomvägen 39 NB, S-192 56 Sollentuna (SE). ERLANDS, Johan; Skomakarevägen 6, S-582 36 Linköping (SE). WIKNER, Jacob; Rydsvägen 378 B, S-584 39 Linköping (SE). (74) Agents: GRENNBERG, B. et al.; Albihns Patentbyrå Stock- holm AB, P.O. Box 5581, S-114 85 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims</i> <i>and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 14 October 1999 (14.10.99)
(54) Title: A DIFFERENTIAL LINE DRIVER The diagram shows a differential line driver circuit. On the left, a block labeled 'DAC' has two output lines, I_{inp} and I_{inn}. These lines connect to the inputs of two current amplifiers, A_p and A_n. The outputs of A_p and A_n are labeled I_{op} and I_{on}. Each output is connected to a terminal resistor R_t. The top resistor R_t is connected to a voltage source V_{ddh}, and the bottom resistor R_t is connected to another V_{ddh} source. The outputs of the resistors are connected to a 'Twisted copper pair' represented by two overlapping loops. A transformer-like symbol with a ratio $I:n$ is shown between the resistors and the twisted pair.		
(57) Abstract A fully differential line driver, especially for twisted copper pairs. It comprises two current amplifiers (A_p , A_n), made in standard CMOS technique, each having an input (I_{inp} , I_{inn}) and an output (I_{op} , I_{on}), which latter are connected via terminal resistors (R_t) to a voltage source, which may be set to a larger voltage than that used for driving the CMOS amplifiers. With this invention, a low output impedance can be combined with a large swing. Further, feedback is not necessary, avoiding problems like potential instability. A preferred embodiment also has a very low-impedance input, making it appropriate for connecting to a DAC, thus reducing distortion of its output signal. The invention is suitable for very-high-speed-digital-subscriber-line modems.		

A differential line driver

5

BACKGROUND OF THE INVENTION

10 The invention regards a CMOS differential line driver, in particular for driving a line comprising a twisted copper pair, and having a differential input with two input terminals and a differential analog output with two output terminals, which are each provided with a terminal resistor. It is thought primarily for use with twisted copper pairs or the like as used for high speed applications like high speed internet access.

15 A traditional type of a fully differential line driver is shown schematically in Fig. 1. The twisted copper pair 1 is fed with power via a transformer 2. In order to obtain impedance matching, the transformed impedance of the twisted copper pair must be matched by termination resistors R_t .

20 A full description of an embodiment of this prior art is given in the article by Khorramabadi, IEEE J. Solid-State Circuits, Vol. 27 No. 4, (1992) p. 539, which is hereby included by reference into the present disclosure. General problems with line drivers are exposed in Johns and Essig, Integrated Circuits for Data Transmission Over Twisted-Pair Channels, IEEE J. Solid-State Circuits, Vol. 32 No. 3 (1997) p. 398.

25 This known architecture has several drawbacks. The line driver must have a low output impedance and high common-mode rejection, since very high voltage in the copper wire may be coupled back as common-mode signals via parasitic capacitance. The input-dependent variation in the output impedance of the line driver must also be very small in order to have low distortion. Therefore, effective feedbacks are needed in the
30 line driver. Improper compensation in the line driver may result in low signal bandwidth and/or instability.

To deliver a high power to the line driver, a high supply voltage is usually needed.

35 A line driver of the envisaged type would usually be handling signals from a high speed digital-to-analog converter (DAC) for high speed internet access. It is normal for such high speed DACs to be arranged as current-output devices, meaning that the driving DAC would have a high output impedance. In order to minimize the distortion in the DAC, the input impedance of the line driver must be low.

40

It is an object of the invention to obtain a fully differential line driver, which obviates the above-mentioned difficulties. Another object is to obtain such a driver which can be made with a standard 5-V CMOS process. This would even enable its integrating with a driving DAC on a single chip. A further object is to obtain very low distortion at
45 high bandwidth without stability problems.

SUMMARY OF THE INVENTION

Said objects and other objects and advantages are obtained, according to the invention,
5 with a line driver of the kind mentioned, and which is provided such

(i) that the said input is a current input,

(ii) that the driver comprises two current amplifiers (A_p , A_n), each forming a said input
10 terminal (I_{inp} , I_{inn}) and a said output terminal (I_{op} , I_{on}) respectively, and provided for feeding with a drive voltage (V_{cc})

(iii) that said terminal resistors (R_t) are connected with first ends to said output
15 terminals (I_{op} , I_{on}) and have second ends connectible to a drive voltage (V_{ddh}).

Typical for the inventive solution is that amplifying circuits are used, which are current
amplifying, enabling the obtaining of a low input impedance and a high output
impedance. For obtaining high common-mode rejection and impedance matching,
20 termination resistors are arranged.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention shall now be described with reference to the figures, which are to be
25 considered as non-limiting.

Fig. 1, already mentioned, shows a prior-art line driver.

Fig. 2 shows schematically the inventive solution.
30

Fig. 3 shows an exemplary embodiment schematically drawn, and applied for the use
of a standard 5-V CMOS manufacturing process.

DETAILED DESCRIPTION OF THE INVENTION

35 The general concept of the invention may be understood from Fig. 2. A line driver is provided with a pair of current inputs I_{inp} and I_{inn} . The line driver (inside the dashed rectangle) has a pair of current outputs, which are provided with terminal resistors R_t connected to drive voltages V_{ddh} and connected to a transformer winding, with another
40 winding connected to a twisted copper pair. As is apparent, there is inside the dashed rectangle a set of two current amplifiers A_p and A_n .

In order to easily interface with a driving DAC, the line driver itself will have a very
low input impedance. Unlike the traditional approach shown in Fig. 1, the proposed
45 line driver has a very high output impedance. Having a low input impedance and a high output impedance, this line driver thus is a current-mode line driver. The

termination resistors at the outputs of the line drivers will give high common-mode rejection and impedance matching.

5 The effective impedance must be equal to the transformed line impedance Z_T for impedance matching. If we assume that the output impedance of the line driver is very large, we have the value of the termination resistor R_t given by

$$R_t = 2 \times Z_T = 2 \times Z_l / n^2 \quad (1)$$

10 where Z_T is the transformed line impedance, Z_l is the line impedance, and n is the turns ratio of the transformer.

Since the DAC usually uses offset binary codes, the outputs of the DAC, i.e. the input currents to the line driver, can be represented as

$$I_{inp} = I_{os} + i_{ac} / 2 \quad (2)$$

$$I_{inn} = I_{os} - i_{ac} / 2 \quad (3)$$

20 where I_{os} is constant and i_{ac} is the analog representation of the digital input signal of the DAC. Suppose that the line driver has a gain of A for both positive and negative branches, we have the output currents given by

$$I_{op} = A \times (I_{os} + i_{ac} / 2) \quad (4)$$

$$I_{on} = A \times (I_{os} - i_{ac} / 2) \quad (5)$$

Suppose the output impedance of the line driver is very large, then the ac current flowing into the transformer is given by

$$i_T = K \times A \times i_{ac} \quad (6)$$

where the constant K is determined by the transformed line impedance Z_T and the termination resistance R_t , given by

$$K = R_t / (2 R_t + Z_T) \quad (7)$$

40 Notice that the constant current I_{os} disappears in equation (6). As a matter of fact, any common-mode signals have no influence on the current flowing into the transformer and equation (7) holds independent of any common-mode signals.

In order to obtain impedance matching, equation (1) must be satisfied. Therefore, we have

$$45 \quad K = R_t / (2 R_t + Z_T) = 2 Z_T / (4 Z_T + Z_T) = 0,4 \quad (8)$$

WO 99/45656

PCT/SE99/00299

The power delivered to the line is equal to the power delivered to the transformer and is given by

$$P_l = P_t = i_T^2 \times Z_T = K^2 \times A^2 \times i_{ac}^2 \times Z_l / n^2 =$$

$$= 0,16 \times A^2 \times i_{ac}^2 \times Z_l / n^2 \quad (9)$$

This makes it clear that the line driver can be realized by using current amplifiers terminated by resistors. Several advantages are won with such a solution.

Current amplifiers have inherently high bandwidth due to low internal impedance, and therefore this approach is suitable for high speed application. Further, no global feedback is necessary in the current amplifiers, and the line driver may thus be unconditionally stable in the global sense. Another great advantage with the architecture shown in Fig. 2 is that the supply voltage for the termination resistors can be much higher than the supply voltage for the line driver, in order to accommodate voltage swing at the output. As long as the output voltage swing of the driver is not very large, such that all the transistors within the line driver do not break out, the line driver can be integrated with the DAC in a component made in a standard CMOS process.

It may be noted that the use of an extra supply voltage for the termination resistors is advantageous in that large common-mode signals are directed to this extra supply voltage without disturbing the supply voltages for the DAC and current amplifiers.

A disadvantage would be the power efficiency, since some power is wasted on the termination resistors due to the matching requirement.

In the above discussion, it has been assumed that the output impedance of the current amplifiers are infinite. If the output impedance of the current amplifiers changes dependent on the input current, distortion results. In order to ensure low distortion, a very high output impedance is desirable for the current amplifiers. This can be ensured by proper design.

Preferred embodiment

In Fig. 3 is shown an example for a current amplifier, forming one of the amplifiers A_p within the dashed rectangle in Fig. 2. As the amplifier A_n may be rigorously similar, only the first-mentioned current amplifier is shown in Fig. 2, with inputs and outputs shown.

In order to have high signal bandwidth, it is preferable to use only NMOS transistors in the signal path. For obtaining a large gain A , it is preferable to use several stages in cascade in order to maintain the high bandwidth.

The current amplifier consists of two stages, The first stage comprises transistors M1, M2 and M3, and the gain of this stage is determined by the dimension ratio of M2 and M1. The second stage comprises transistors M4, M5, M6 and M7, and the gain of this stage is determined by the dimension ratio of M5 and M4.

5

All the PMOS transistors M8 - M18 are used as bias current sources and provided with proper bias/source voltages. The parallel/serial configuration of PMOS transistors e.g. M10 - M18 is an effect of using a standard CMOS process with appropriate maskwork, which is also the feature of arranging the dimension ratios of M2-M1 and M5 -M4 respectively, something which is immediately understood by the man of the art knowledgeable in CMOS construction.

10

Since the output impedance of MOS transistors decreases when the current is increased, double cascodes are used for enabling large currents, as shown in Fig. 3.

15

The input impedance is very low, determined by the transconductance of the input device M1. The output impedance is very high, determined approximately by the product of the output impedance of transistor M5 and the gains of transistors M6 and M7.

20

It is seen in Fig. 3 that the only transistor that might be broken is M7. As long as its drain voltage is not so large that the gate-drain voltage or. drain-source voltage is smaller than its respective break-down voltage, transistor M7 is safe. The whole line driver may therefore be integrated in a standard CMOS process like the 5V CMOS process, and higher supply voltages can be used for the termination resistors.

25

As a numerical example, the twisted copper pair may have an impedance Z_t of 100 Ω , with the terminal resistances R_t at 50 Ω and $n = 2$.

Claims:

1. A CMOS differential line driver having a differential input with two input
 5 terminals and a differential analog output with two output terminals, which are each provided with a termination resistor, wherein:
 said input is a current input;
 the driver comprises two current amplifiers each coupled to a respective one of said two input terminals, and to a respective one of said two output terminals, and to a
 10 respective one of said two output terminals and provided for feeding with a first drive voltage; and
 the termination resistors are connected with first ends to said output terminals and have second ends for connection to a second drive voltage, wherein each said current amplifier has
 15 an input stage comprising a first current source, a first NMOS transistor connected with its gate and drain to said first current source and its source to a common lead;
 a second current source arranged to deliver a larger current than said first current source, a second NMOS transistor connected with its drain to second current source, with its gate to the gate of the first NMOS transistor and with its source to said common lead;
 20 an output stage comprising a third NMOS transistor connected with its gate and drain to said second current source and its source to said common lead, a fourth NMOS transistor connected with its source to said common lead, with its gate to the gate of said third NMOS transistor and with its drain to an output ; and
 said second NMOS transistor having a larger dimension in the ratio of W/L than
 25 said first NMOS transistor, and said fourth NMOS transistor having a larger dimension in the ratio of W/L than said third NMOS transistor.
2. A driver according to claim 1, wherein the current amplifiers are provided for feeding with the first drive voltage, and the second ends of said termination resistors are
 30 for connection to the second drive voltage, the second drive voltage being higher than the first drive voltage.



WO 99/45656

PCT/SE99/00299

6a

3. A driver according to claim 1, further comprising a transformer having a first winding connected to said output terminals and a second winding having winding
5 terminals for connecting to a symmetric line pair.
4. A driver according to claim 1, wherein said driver drives a line comprising a twisted copper pair.
- 10 5. The driver according to claim 1, wherein an input stage of each of the current amplifiers is a biased input stage.
-
6. The driver according to claim 5, wherein the biased input stage comprises a bias
15 voltage input.
7. The driver according to claim 1, wherein each of the current amplifiers comprises a plurality of transistors.

1 / 2

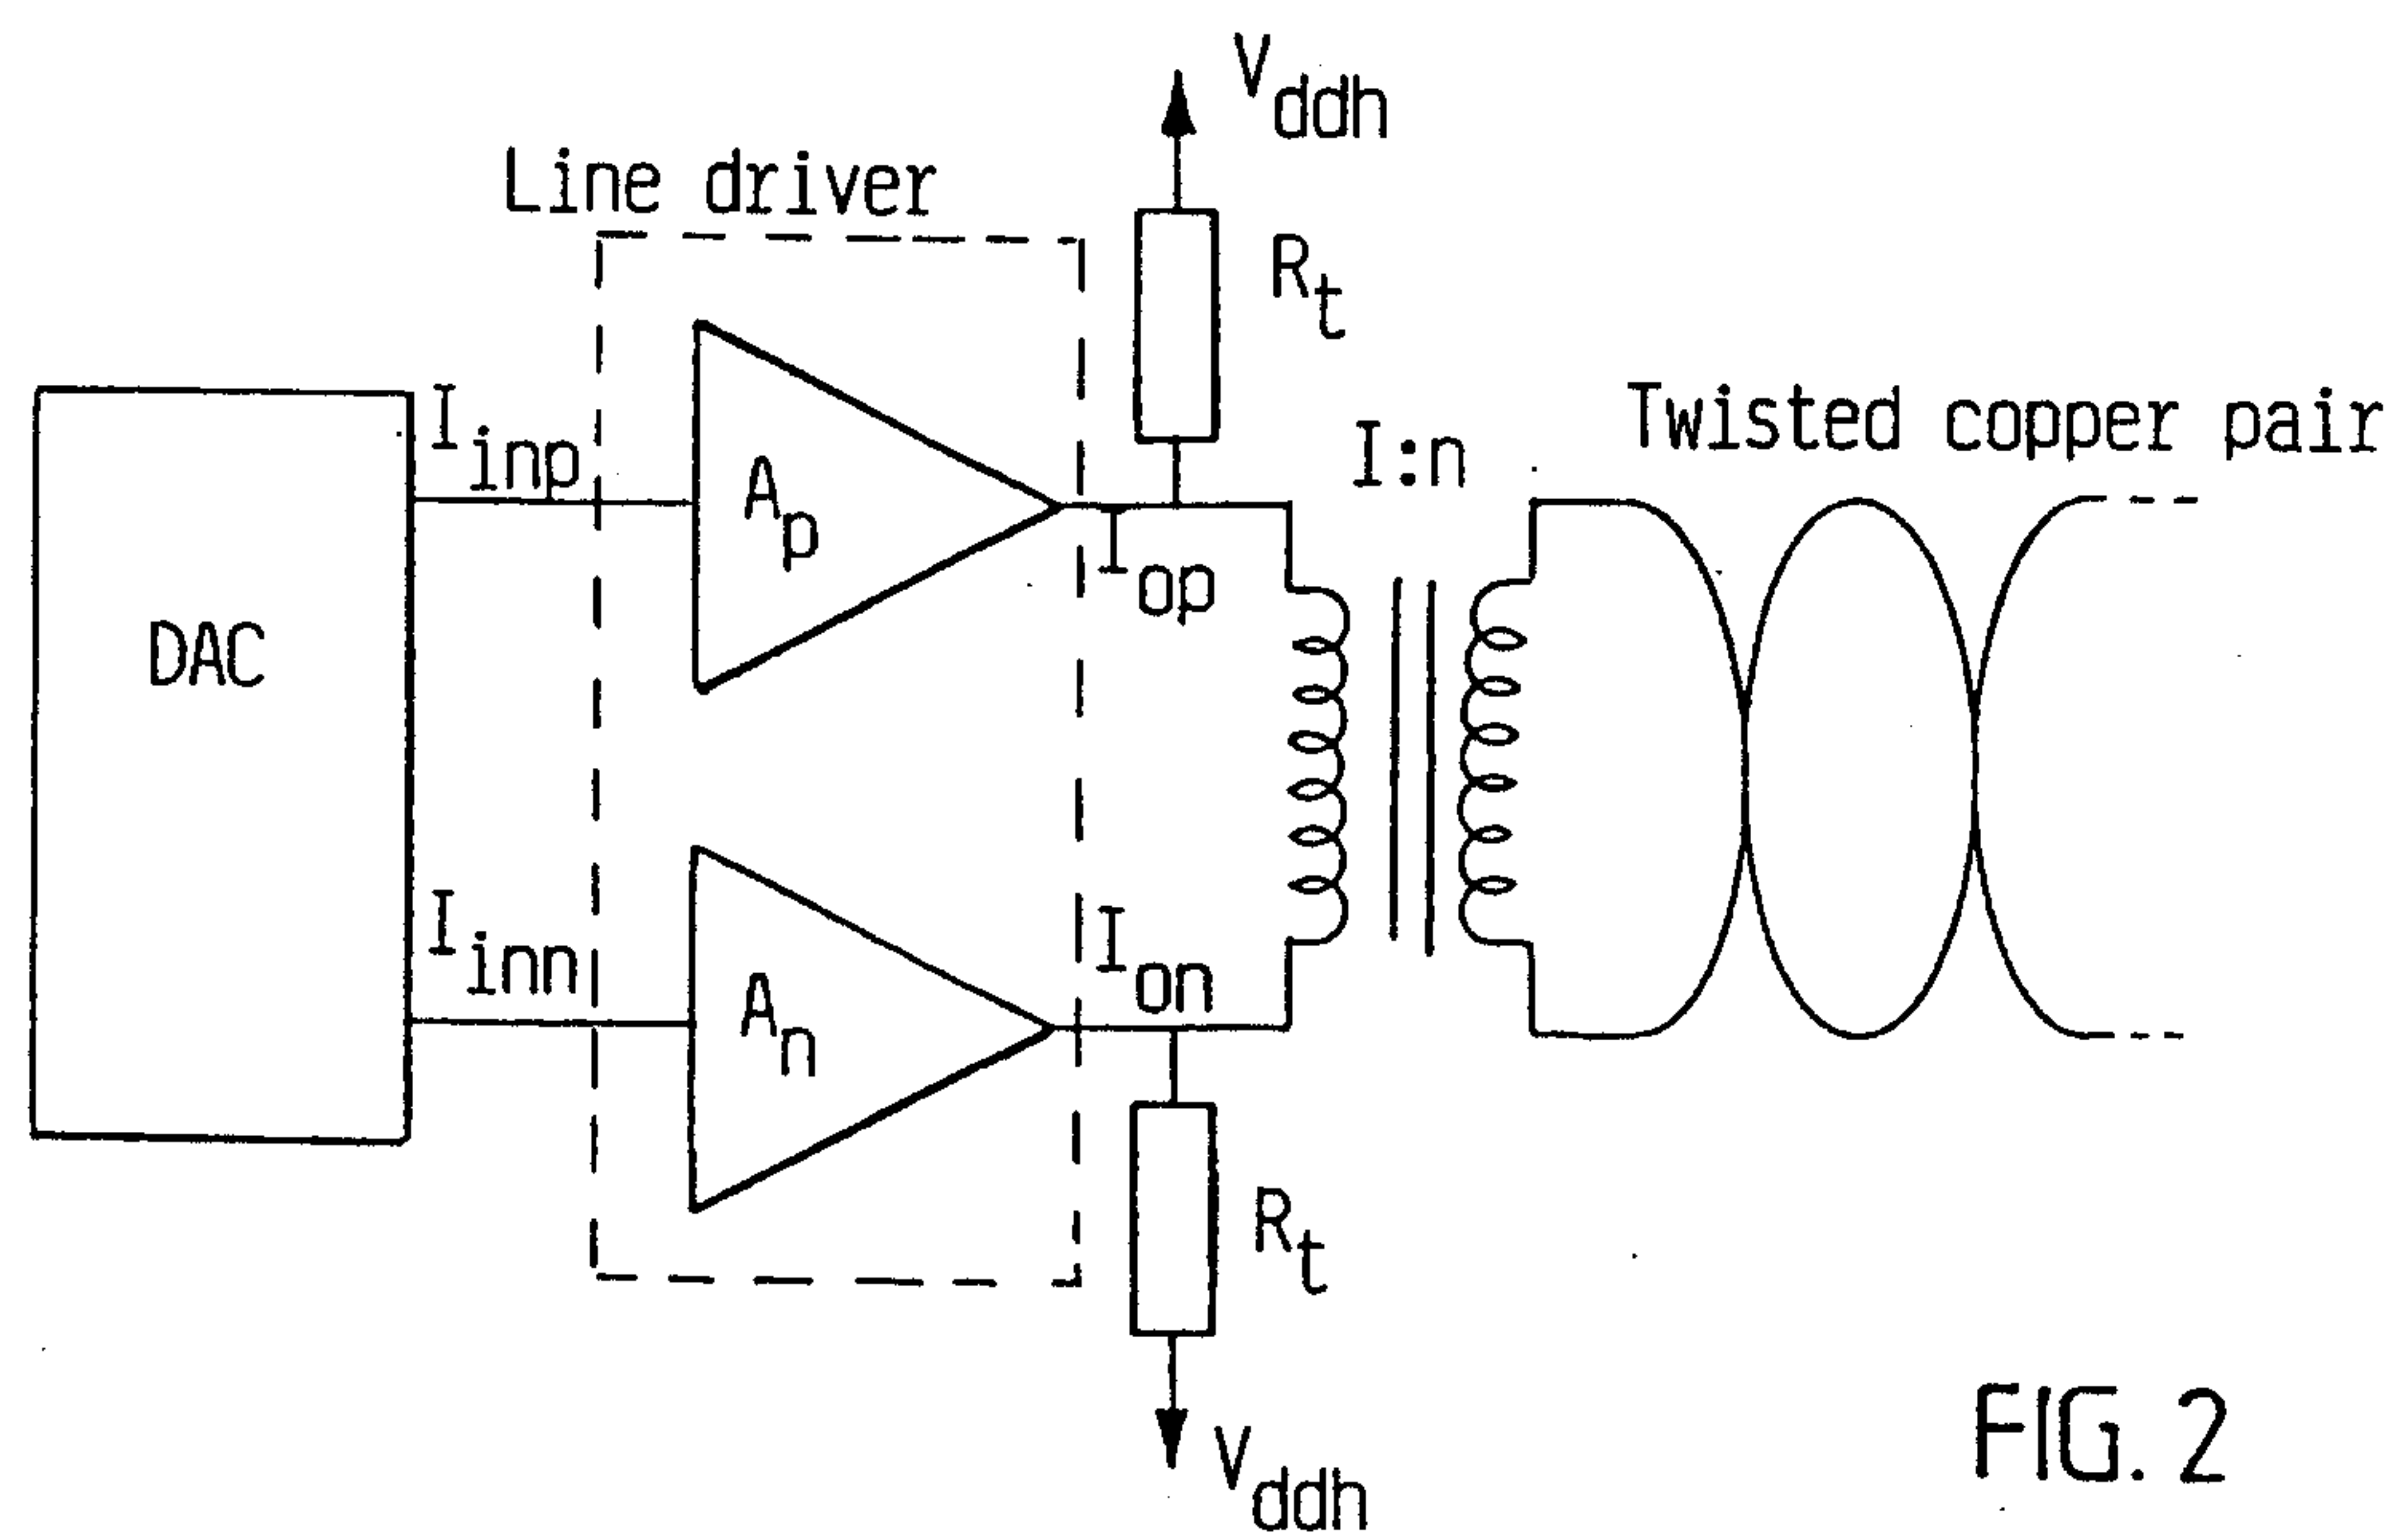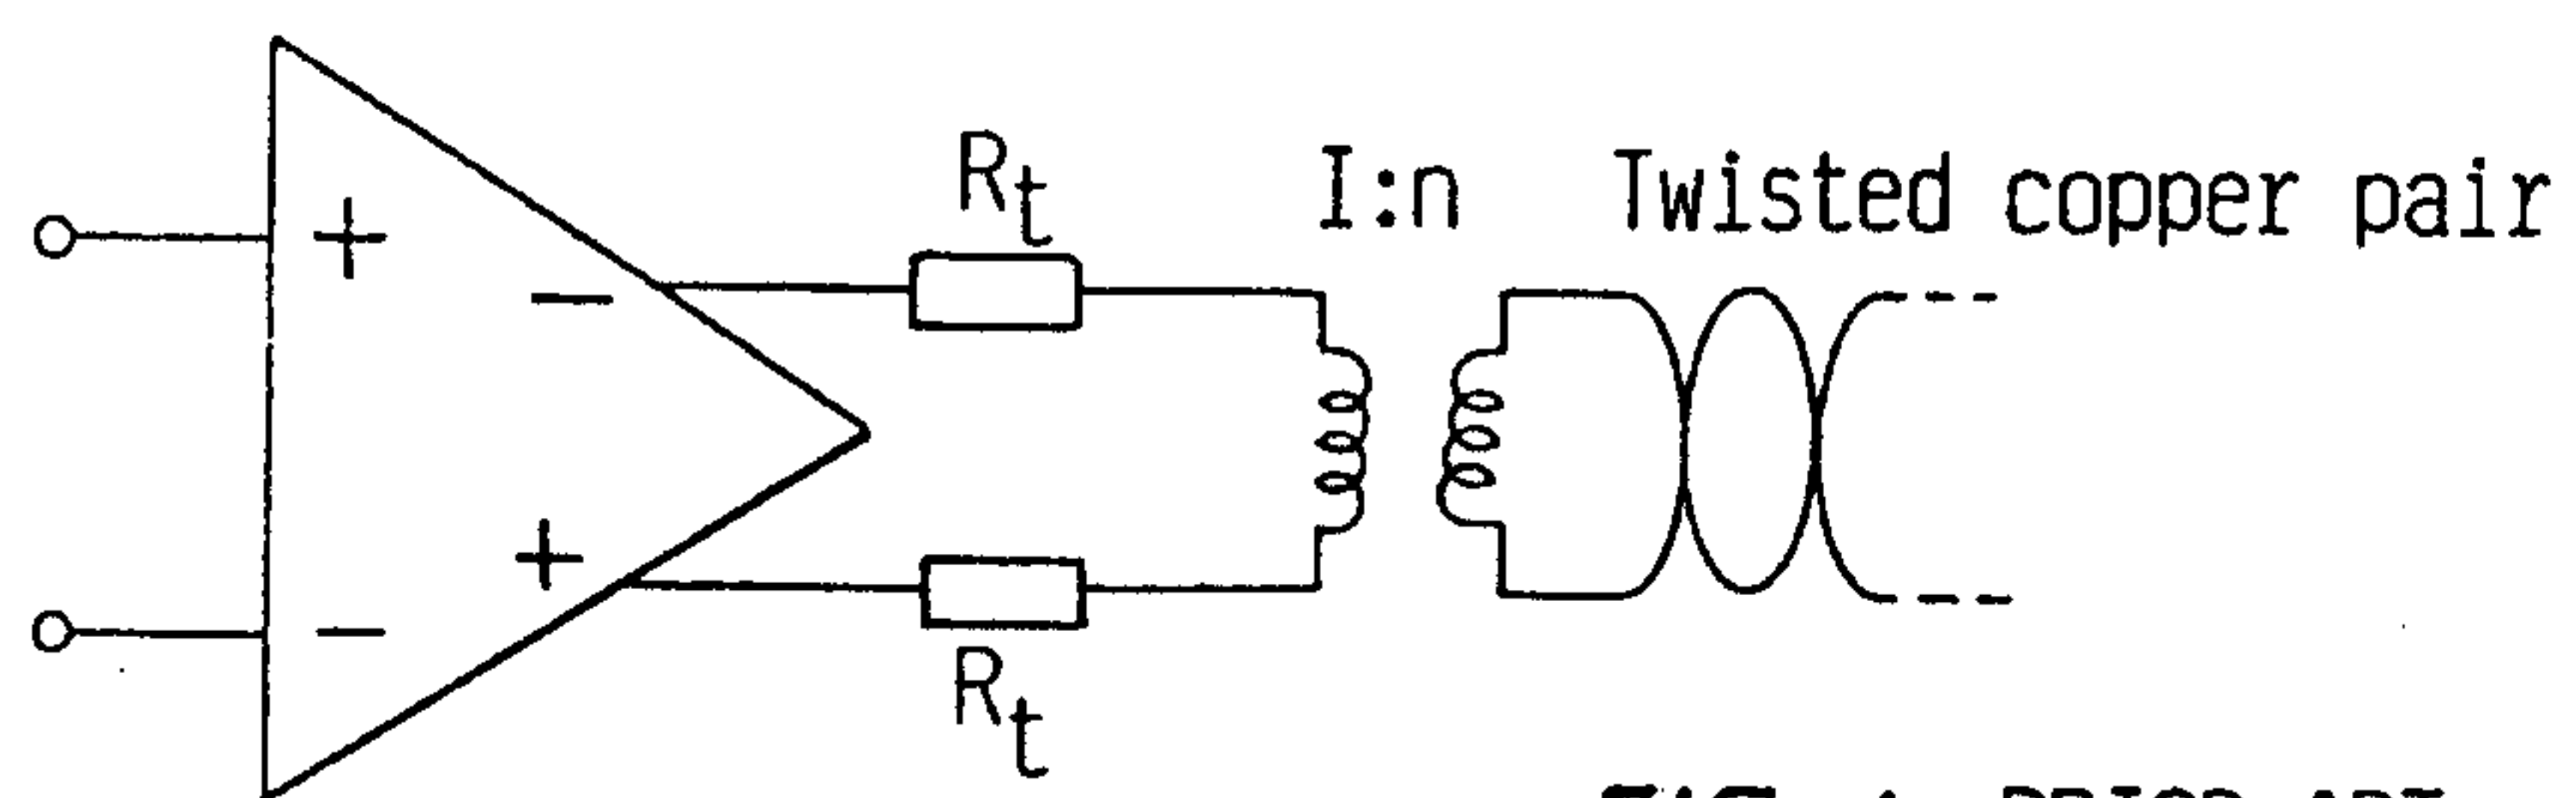

Marks & Clerk

2/2

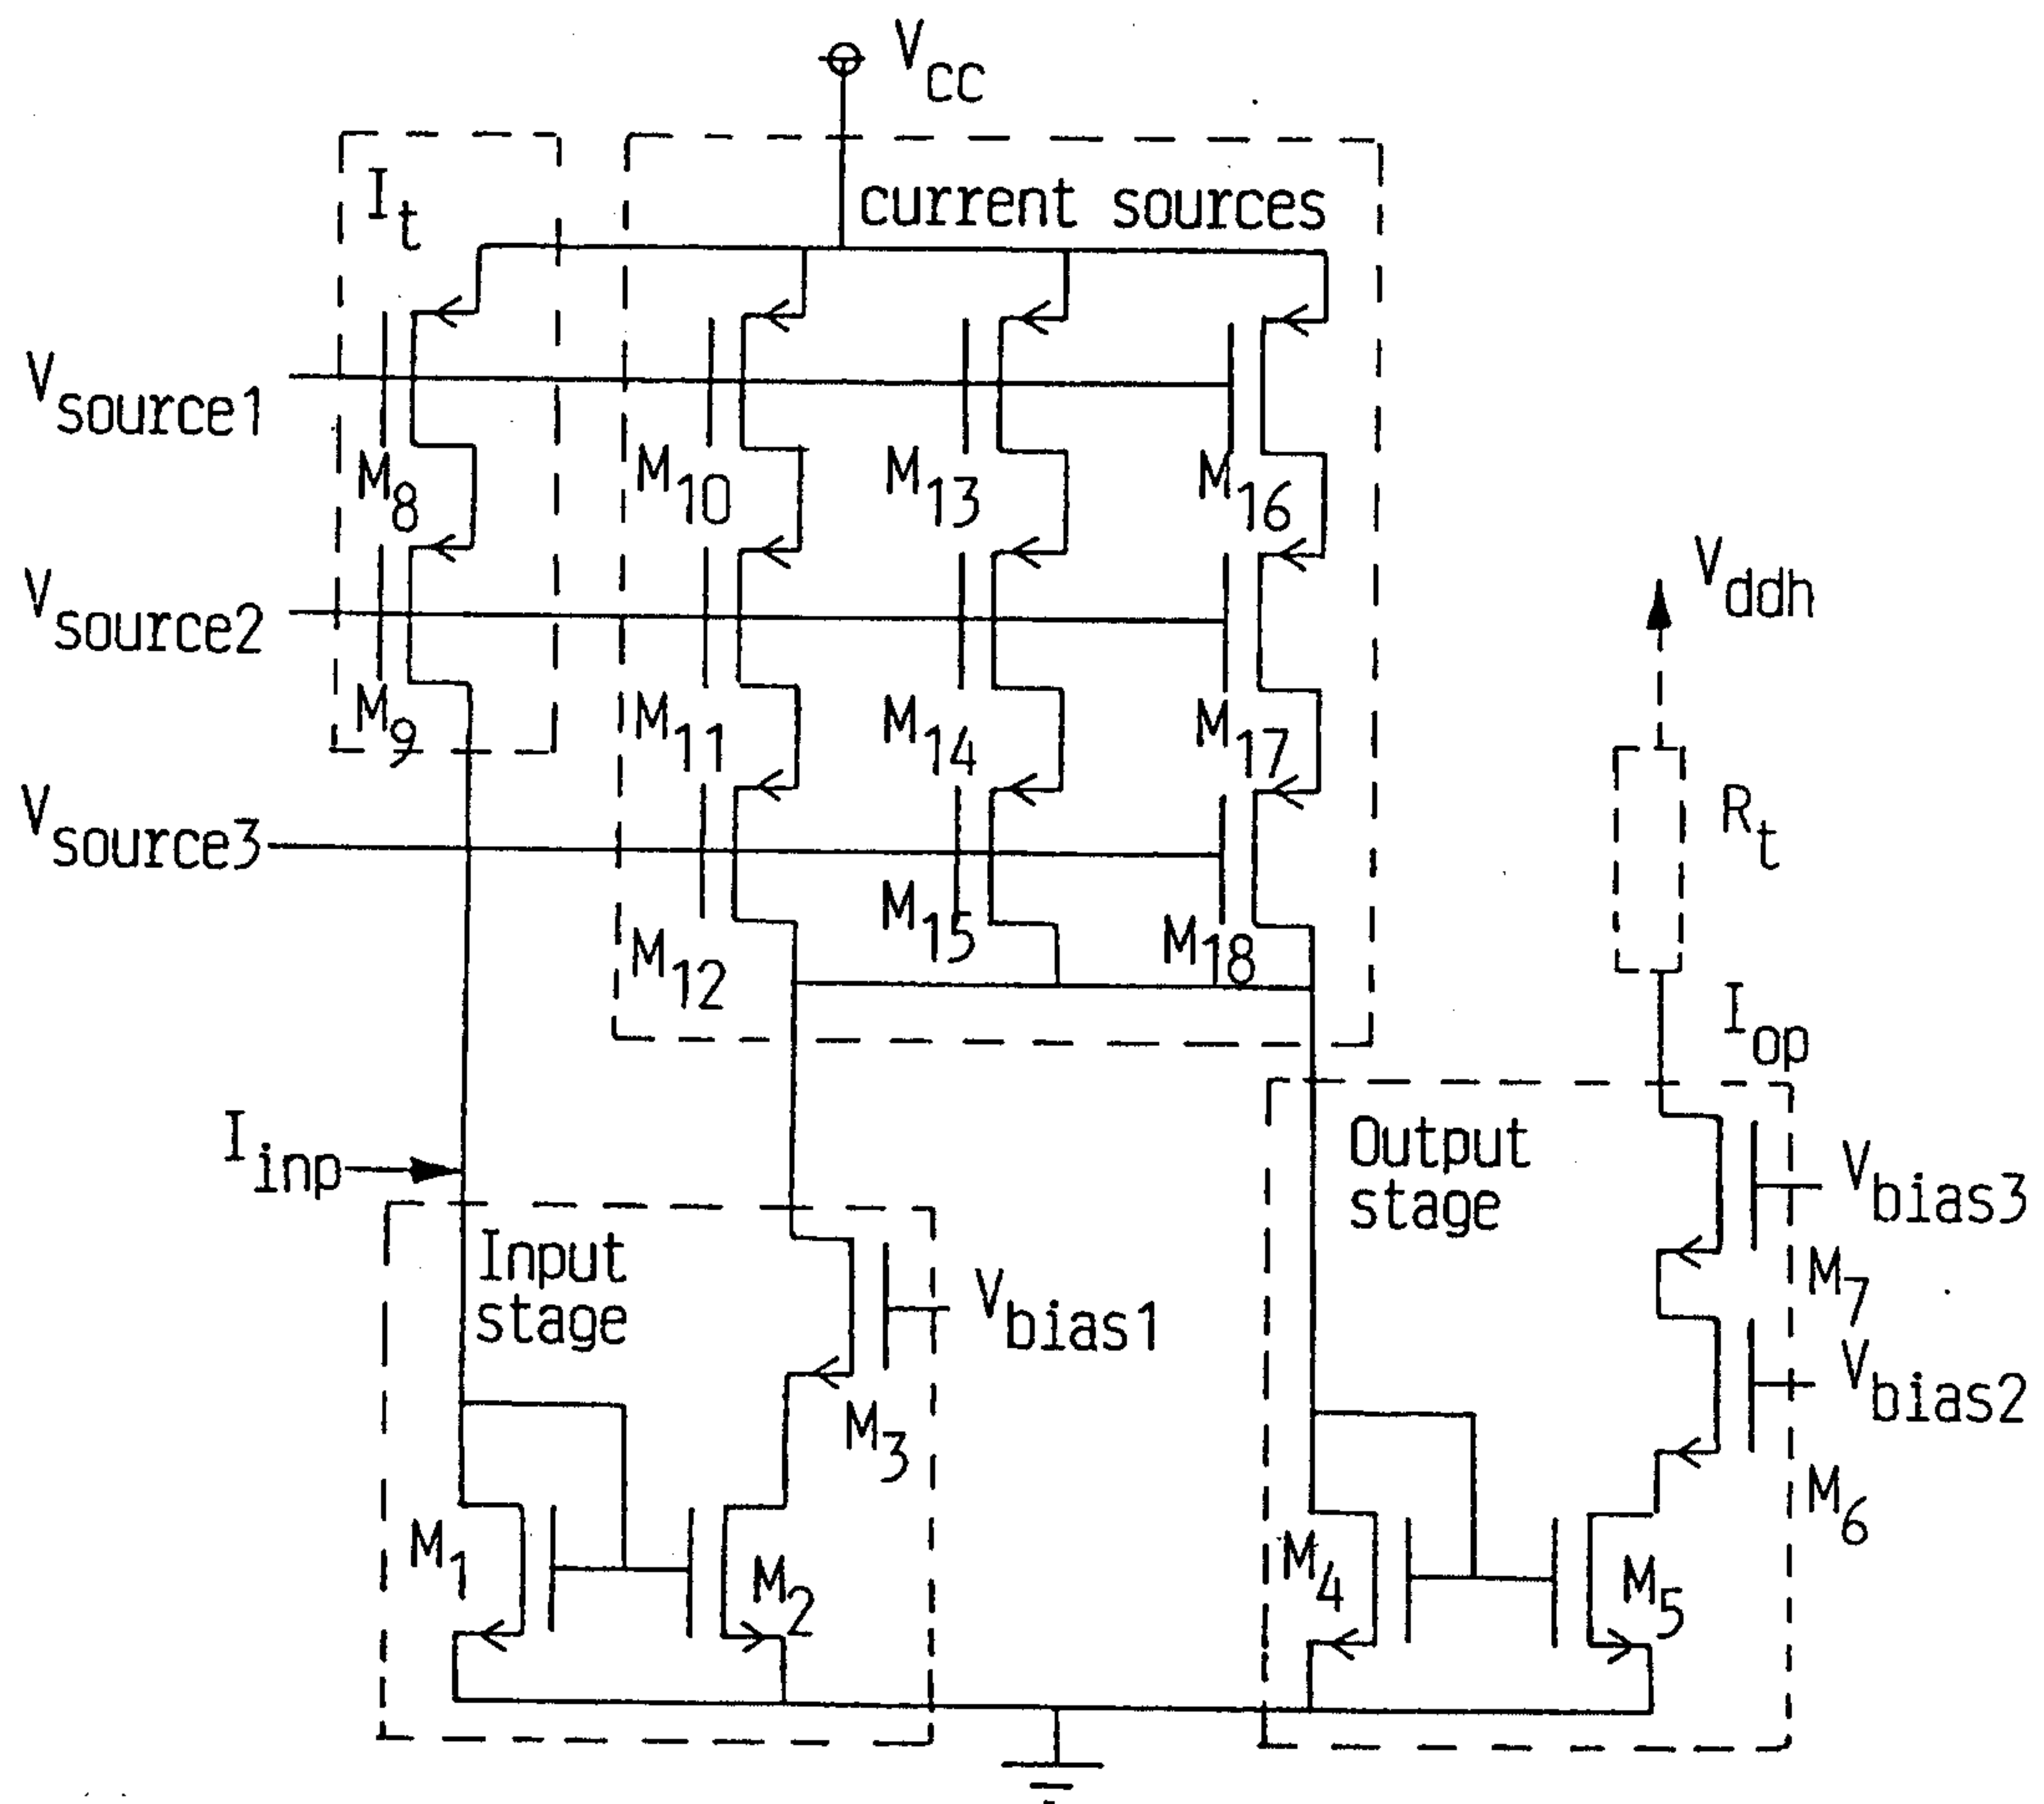


FIG. 3

Marks & Clerk

