

(19)



(11) Publication number:

**SG 172032 A1**

(43) Publication date:

**28.07.2011**

(51) Int. Cl:

;

(12)

## Patent Application

(21) Application number: **2011041811**

(71) Applicant:

**ALLTECH ASSOCIATES INC. 7500  
GRACE DRIVE, COLUMBIA, MD 21044  
ML US**

(22) Date of filing: **10.12.2009**

(30) Priority: **US 61/201,350 10.12.2008**

(72) Inventor:

**ANDERSON, JAMES, M., JR. 2526 EAST  
HUNTER DRIVE ARLINGTON HEIGHTS,  
IL 60004 US  
BYSTRON, JOSEF, P. 5809 N. KENTON  
CHICAGO, IL 60646 US  
MENDOZA, WASHINGTON, J. 3  
SONOMA COURT LAKE IN THE HILLS,  
IL 60156 US  
SAARI-NORDHAUS, RAAIDAH 709  
BIRCH HOLLOW DRIVE ANITCOH, IL  
60002 US  
HELGEMO, DIRK 2426 PONDS WAY  
SHAKOPEE, MN 55379 US  
LEWIS, STEVE 5117 HERITAGE HILLS  
DRIVE BLOOMINGTON, MN 55437 US  
NELSON, SHELDON 320 QUAKER LANE  
PLYMOUTH, MN 55441 US  
FROHMAN, BRUCE 2557 OREGON  
AVENUE S. ST. LOUIS PARK, MN 55426  
US  
KLEIN, NICK 1330 118TH AVENUE NW  
COON RAPIDS, MN 55418 US**

(54) **Title:**  
**CHROMATOGRAPHY SYSTEMS AND SYSTEM  
COMPONENTS**

(57) **Abstract:**  
Chromatography systems and components suitable for use in chromatography systems are disclosed. Methods of making chromatography systems and components suitable for use in chromatography systems and methods of using chromatography systems and components suitable for use in chromatography systems are also disclosed.

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
17 June 2010 (17.06.2010)

(10) International Publication Number  
**WO 2010/068276 A1**

- (51) International Patent Classification:  
*B01D 15/08* (2006.01)
- (21) International Application Number:  
PCT/US2009/006497
- (22) International Filing Date:  
10 December 2009 (10.12.2009)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/201,350 10 December 2008 (10.12.2008) US
- (71) Applicant (for all designated States except US): **ALL-TECH ASSOCIATES INC.** [US/US]; 7500 Grace Drive, Columbia, MD 21044 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ANDERSON, James, M., Jr.** [US/US]; 2526 East Hunter Drive, Arlington Heights, IL 60004 (US). **BYSTRON, Josef, P.**

[US/US]; 5809 N. Kenton, Chicago, IL 60646 (US). **MENDOZA, Washington, J.** [US/US]; 3 Sonoma Court, Lake in the Hills, IL 60156 (US). **SAARI-NORDHAUS, Raaidah** [MY/US]; 709 Birch Hollow Drive, Anitoch, IL 60002 (US). **HELGEMO, Dirk** [US/US]; 2426 Ponds Way, Shakopee, MN 55379 (US). **LEWIS, Steve** [US/US]; 5117 Heritage Hills Drive, Bloomington, MN 55437 (US). **NELSON, Sheldon** [US/US]; 320 Quaker Lane, Plymouth, MN 55441 (US). **FROHMAN, Bruce** [US/US]; 2557 Oregon Avenue S., St. Louis Park, MN 55426 (US). **KLEIN, Nick** [US/US]; 1330 118th Avenue NW, Coon Rapids, MN 55418 (US).


(74) Agent: **BUNCH, William, D.**; 7500 Grace Drive, Columbia, MD 21044 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

[Continued on next page]

(54) Title: CHROMATOGRAPHY SYSTEMS AND SYSTEM COMPONENTS

FIG. 1

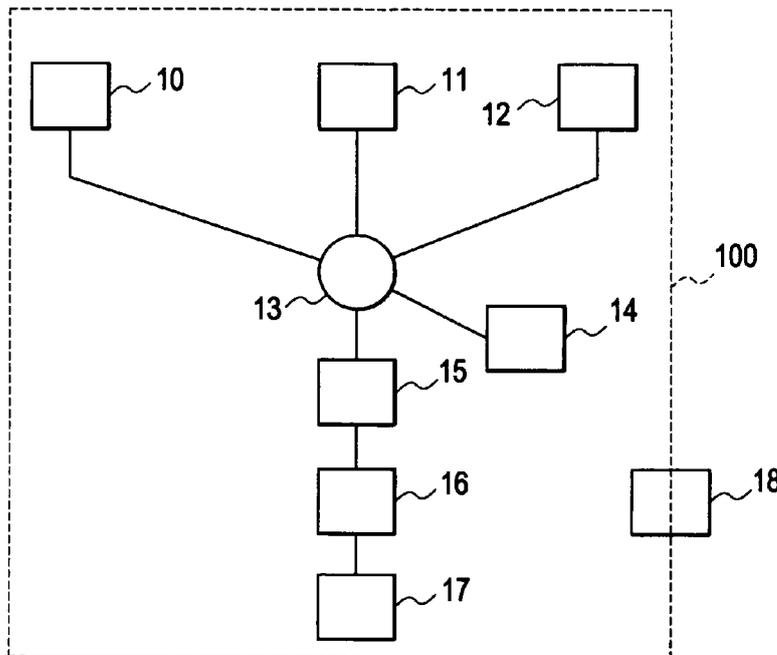

(57) Abstract: Chromatography systems and components suitable for use in chromatography systems are disclosed. Methods of making chromatography systems and components suitable for use in chromatography systems and methods of using chromatography systems and components suitable for use in chromatography systems are also disclosed.

KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

## **CHROMATOGRAPHY SYSTEMS AND SYSTEM COMPONENTS**

### **FIELD OF THE INVENTION**

[0001] The present invention is directed to chromatography systems and components suitable for use in chromatography systems.

### **BACKGROUND OF THE INVENTION**

[0002] There is a need in the art for accurate and efficient reading of machine readable tags (e.g., radio frequency identification (RFID) tags) within a chromatography system. Further, there is a need in the art to efficiently record historical data relating to a given cartridge (e.g., the use history of the cartridge) within a chromatography system.

### **SUMMARY OF THE INVENTION**

[0003] The present invention addresses some of the need in the art discussed above by the discovery of new chromatography systems and system components that enable accurate and efficient reading of machine readable tags (e.g., RFID tags) within a chromatography system. In one exemplary embodiment of the present invention, the system component comprises a machine readable tag reader for use in a chromatography system, wherein the machine readable tag reader is operatively adapted to (i) read existing tag data from a machine readable tag; and (ii) write new data onto the machine readable tag. For example, the machine readable tag reader may be used to read existing tag data and write new data on a machine readable tag (e.g., a RFID tag) positioned along a chromatography cartridge. The new data may comprise, for example, historical cartridge use data comprising one or more pieces of data selected from the group consisting of a date of cartridge use, a solvent used in the cartridge on the date, a count of how many times the cartridge has been used, and any combination thereof. The existing tag data may comprise data that sets one or more operational conditions of the chromatography system.

[0004] In some embodiments, the system component may comprise a mobile machine readable tag reader suitable for use in a chromatography system, wherein the mobile machine readable tag reader comprises a reader arm having a first end and a second end, the first end being connectable to an object within the

chromatography system, and the second end being operatively adapted to move relative to the object when the first end is connected to the object; and a tag reader component attached to the second end, wherein the tag reader component is operatively adapted to (i) move relative to the second end, (ii) read existing tag data from a machine readable tag, and (iii) write new data onto the machine readable tag.

**[0005]** In another exemplary embodiment of the present invention, the system component comprises a fraction collection system of a chromatography system, wherein the fraction collection system comprises a fraction collector tray bay; and one or more sensors positioned along one or more bay wall surfaces of the fraction collector tray bay, the one or more sensors being operatively adapted to detect one or more fraction collector trays positioned within the fraction collector tray bay. For example, one or more (or each) of the one or more sensors may comprise an optical sensor. The exemplary fraction collection system may further comprise one or more stationary machine readable tag readers positioned along the one or more bay wall surfaces of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray.

**[0006]** The system component may comprise a fraction collection system of a chromatography system, wherein the fraction collection system comprises a fraction collector tray bay; one or more stationary machine readable tag readers positioned along one or more bay wall surfaces of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray; and one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises a single machine readable tag positioned along a tray surface of the fraction collector tray.

**[0007]** The present invention is also directed to chromatography systems comprising one or more system components disclosed herein. In one exemplary embodiment of the present invention, the chromatography system comprises a machine readable tag reader, wherein the machine readable tag reader is operatively adapted to (i) read existing tag data from a machine readable tag; and (ii) write new data onto the machine readable tag. In some embodiments, the machine readable tag reader is a mobile machine readable tag reader comprising a tag

reader component that is operatively adapted to move so as to position an outer surface of the tag reader component adjacent to and over an outer surface of a given machine readable tag. These exemplary chromatography systems may further comprise one or more machine readable tags alone or in combination with (i) one or more chromatography cartridges, (ii) one or more fraction collector tray bays, or both (i) and (ii). For example, the one or more machine readable tags may be individually positioned along (i) a surface of a given chromatography cartridge, (ii) a surface of a given fraction collector tray bay, or both (i) and (ii). In another exemplary embodiment according to the invention, the chromatography system comprises a machine readable tag reader and a machine readable tag, wherein the machine readable tag reader is operatively adapted to write new data onto the machine readable tag.

**[0008]** In another exemplary embodiment of the present invention, the chromatography system comprises a fraction collection system comprising a fraction collector tray bay; and one or more sensors (e.g., optical sensors) positioned along one or more bay wall surfaces of the fraction collector tray bay, the one or more sensors being operatively adapted to detect one or more fraction collector trays positioned within the fraction collector tray bay.

**[0009]** The chromatography system may comprise a fraction collection system comprising a fraction collector tray bay; one or more stationary machine readable tag readers positioned along one or more bay wall surfaces of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray; and one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises a single machine readable tag positioned along a tray surface of the fraction collector tray.

**[0010]** In some exemplary embodiments of the present invention, the chromatography system comprises at least one mobile machine readable tag reader and in combination with at least one stationary machine readable tag reader, wherein each machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag. In some embodiments, one or more (or each) machine readable tag reader is also operatively adapted to write new tag data onto a given machine readable tag. These exemplary chromatography systems may

further comprise one or more machine readable tags alone or in combination with (i) one or more chromatography cartridges, (ii) one or more fraction collector tray bays, or both (i) and (ii). For example, the one or more machine readable tags may be individually positioned along (i) a surface of a given chromatography cartridge, and (ii) a surface of a given fraction collector tray so as to be the only machine readable tag on a given chromatography cartridge or a given fraction collector tray.

**[0011]** In a further exemplary embodiment of the present invention, the chromatography system comprises (1) a fraction collection system comprising (i) a fraction collector tray bay; (ii) one or more stationary machine readable tag readers positioned along one or more bay wall surfaces of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a surface of a fraction collector tray; and (iii) one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises a single machine readable tag positioned along a tray surface of the fraction collector tray; and (2) at least one mobile machine readable tag reader, wherein each mobile machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag. In some embodiments, one or more (or each) machine readable tag readers of the chromatography system (i.e., stationary and/or mobile) is operatively adapted to write new tag data onto one or more machine readable tags within the chromatography system.

**[0012]** In yet another exemplary embodiment of the present invention, the chromatography system comprises (1) a fraction collection system comprising a fraction collector tray bay; and one or more stationary machine readable tag readers positioned along one or more bay wall surfaces of the fraction collector tray bay, each of the one or more stationary machine readable tag readers being operatively adapted to read existing tag data from a machine readable tag on a surface of a fraction collector tray; and (2) at least one mobile machine readable tag reader, wherein each mobile machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag on a surface of a chromatography cartridge. In some embodiments, one or more (or each) of the machine readable tag readers of the chromatography system (i.e., stationary and/or mobile) is

operatively adapted to write new tag data onto one or more machine readable tags within the chromatography system.

**[0013]** In another exemplary embodiment of the present invention, the chromatography system comprises (1) a fraction collection system comprising (i) a fraction collector tray bay; (ii) one or more sensors (e.g., optical sensors) positioned along one or more bay wall surfaces of the fraction collector tray bay, the one or more sensors being operatively adapted to detect one or more fraction collector trays positioned within the fraction collector tray bay; (iii) one or more stationary machine readable tag readers positioned along the one or more bay wall surfaces of the fraction collector tray bay, each of the one or more stationary machine readable tag readers being operatively adapted to read existing tag data from a machine readable tag on a surface of a fraction collector tray; and (iv) one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises at least one machine readable tag (typically, a single tag) positioned along a tray surface of the fraction collector tray; (2) at least one mobile machine readable tag reader, wherein each mobile machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag on a surface of a chromatography cartridge; and (3) at least one chromatography cartridge, wherein each chromatography cartridge has at least one machine readable tag (typically, a single tag) positioned along a surface of the chromatography cartridge. In some embodiments, one or more (or each) of the machine readable tag readers of the chromatography system (i.e., stationary and/or mobile) is operatively adapted to write new tag data onto one or more machine readable tags within the chromatography system (e.g., a tag on a fraction collector tray and/or a tag on a chromatography cartridge).

**[0014]** The present invention is further directed to methods of making chromatography systems and system components within a chromatography system. In one exemplary method, the method of making a chromatography system comprises incorporating a machine readable tag reader into the chromatography system, wherein the machine readable tag reader is operatively adapted to (i) read existing tag data from a machine readable tag; and (ii) write new data onto the machine readable tag. The method may further comprise incorporating (i) one or more chromatography cartridges, (ii) one or more fraction collector trays, or (iii) both (i) to (ii) into the chromatography system, wherein each chromatography cartridge

and/or fraction collector tray comprises at least one machine readable tag (typically one) thereon.

**[0015]** In another exemplary method, the method of making a chromatography system comprises incorporating a mobile machine readable tag reader into the chromatography system, wherein the mobile machine readable tag reader comprises a reader arm having a first end and a second end, the first end being connectable to an object within the chromatography system, and the second end being operatively adapted to move relative to the object when the first end is connected to the object; and a tag reader component attached to the second end, wherein the tag reader component is operatively adapted to (i) move relative to the second end, (ii) read existing tag data from a machine readable tag, and (iii) write new data onto the machine readable tag. The method may further comprise incorporating (i) one or more chromatography cartridges, (ii) one or more fraction collector trays, or (iii) both (i) to (ii) into the chromatography system, wherein each chromatography cartridge and/or fraction collector tray comprises at least one machine readable tag (typically one) thereon.

**[0016]** In yet another exemplary method, the method of making a chromatography system comprises incorporating a fraction collection system into the chromatography system, wherein the fraction collection system comprises a fraction collector tray bay; and one or more sensors (e.g., one or more optical sensors) positioned along one or more bay wall surfaces of the fraction collector tray bay, the one or more sensors being operatively adapted to detect one or more fraction collector trays positioned within the fraction collector tray bay. The exemplary method may further comprise incorporating into the chromatography system one or more stationary machine readable tag readers positioned along the one or more bay wall surfaces of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray. The exemplary method may even further comprise incorporating into the chromatography system one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises at least one machine readable tag (typically, a single tag) positioned along a tray surface of the fraction collector tray.

**[0017]** In another exemplary method, the method of making a chromatography system comprises incorporating a fraction collection system into the chromatography system, wherein the fraction collection system comprises a fraction collector tray bay; one or more stationary machine readable tag readers positioned along one or more bay wall surfaces of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray; and one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises a single machine readable tag positioned along a tray surface of the fraction collector tray.

**[0018]** In another exemplary method, the method of making a chromatography system comprises incorporating a fraction collection system into the chromatography system, wherein the fraction collection system comprises (i) a fraction collector tray bay; (ii) one or more stationary machine readable tag readers positioned along one or more bay wall surfaces of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a surface of a fraction collector tray; and (iii) one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises a single machine readable tag positioned along a tray surface of the fraction collector tray; and incorporating at least one mobile machine readable tag reader into the chromatography system, wherein each mobile machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag. In some embodiments, one or more (or each) machine readable tag readers of the resulting chromatography system (i.e., stationary and/or mobile) is operatively adapted to write new tag data onto one or more machine readable tags within the chromatography system.

**[0019]** In yet another exemplary method, the method of making a chromatography system comprises incorporating a fraction collection system into the chromatography system, wherein the fraction collection system comprises a fraction collector tray bay; and one or more stationary machine readable tag readers positioned along one or more bay wall surfaces of the fraction collector tray bay, each of the one or more stationary machine readable tag readers being operatively

adapted to read existing tag data from a machine readable tag on a surface of a fraction collector tray; incorporating one or more chromatography cartridges into the chromatography system; and incorporating at least one mobile machine readable tag reader into the chromatography system, wherein each mobile machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag on a surface of the one or more chromatography cartridges.

**[0020]** In yet another exemplary method, the method of making a chromatography system comprises (1) incorporating a fraction collection system into the chromatography system, wherein the fraction collection system comprises (i) a fraction collector tray bay; (ii) one or more sensors (e.g., optical sensors) positioned along one or more bay wall surfaces of the fraction collector tray bay, the one or more sensors being operatively adapted to detect one or more fraction collector trays positioned within the fraction collector tray bay; (iii) one or more stationary machine readable tag readers positioned along the one or more bay wall surfaces of the fraction collector tray bay, each of the one or more stationary machine readable tag readers being operatively adapted to read existing tag data from a machine readable tag on a surface of a fraction collector tray; and (iv) one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises at least one machine readable tag (typically, a single tag) positioned along a tray surface of the fraction collector tray; (2) incorporating at least one mobile machine readable tag reader into the chromatography system, wherein each mobile machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag on a surface of a chromatography cartridge; and (3) incorporating at least one chromatography cartridge into the chromatography system, wherein each chromatography cartridge has at least one machine readable tag (typically, a single tag) positioned along a surface of the chromatography cartridge. In some embodiments, one or more (or each) of the machine readable tag readers of the resulting chromatography system (i.e., stationary and/or mobile) is operatively adapted to write new tag data onto one or more machine readable tags within the chromatography system (e.g., a tag on a fraction collector tray and/or a tag on a chromatography cartridge).

**[0021]** The present invention is further directed to methods of making system components within a chromatography system. In one exemplary embodiment, the

method of making a system component comprises incorporating one or more sensors (e.g., one or more optical sensors) into a fraction collection system. The method may comprise positioning one or more sensors (e.g., one or more optical sensors) along one or more bay wall surfaces of a fraction collector tray bay, the one or more sensors being operatively adapted to detect one or more fraction collector trays positioned within the fraction collector tray bay. The method may further comprise positioning one or more stationary machine readable tag readers along the one or more bay wall surfaces of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray. The method may even further comprise forming one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises at least one machine readable tag (typically, a single tag) positioned along a tray surface of the fraction collector tray.

**[0022]** In another exemplary embodiment, the method of making a system component comprises positioning one or more stationary machine readable tag readers along one or more bay wall surfaces of a fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray; and forming one or more fraction collector trays configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises a single machine readable tag positioned along a tray surface of the fraction collector tray. In some embodiments, the step of forming one or more fraction collector trays comprises forming fraction collector trays configured to be positioned in a side-by-side arrangement within the fraction collector tray bay so that an outer perimeter of at least two side-by-side fraction collector trays each independently abut two adjacent bay side wall surfaces when positioned within the fraction collector tray bay.

**[0023]** The present invention is even further directed to methods of using chromatography systems and system components within a chromatography system. In one exemplary method, the method of using a system component comprises reading existing tag data from a machine readable tag within a chromatography system via a machine readable tag reader; and writing new data onto the machine

readable tag within the chromatography system via the machine readable tag reader. The steps of reading existing tag data and writing new data may comprise reading existing tag data and writing new data on a machine readable tag (e.g., a RFID tag) positioned along a chromatography cartridge. For example, the step of writing new data may comprise writing new data onto the chromatography cartridge tag such as historical cartridge use data comprising one or more pieces of data selected from the group consisting of a date of cartridge use, a solvent used in the cartridge on the date, a count of how many times the cartridge has been used, and any combination thereof. The step of reading existing tag data from the chromatography cartridge tag may comprise reading data that sets one or more operational conditions of the chromatography system.

**[0024]** In another exemplary method, the method of using a system component comprises reading existing tag data from a machine readable tag within a chromatography system via a mobile machine readable tag reader; and writing new data onto the machine readable tag within the chromatography system via the mobile machine readable tag reader. The mobile machine readable tag reader may comprise a reader arm having a first end and a second end, the first end being connectable to an object within the chromatography system, and the second end being operatively adapted to move relative to the object when the first end is connected to the object; and a tag reader component attached to the second end, wherein the tag reader component is operatively adapted to (i) move relative to the second end, (ii) read existing tag data from a machine readable tag, and (iii) write new data onto the machine readable tag.

**[0025]** In yet another exemplary method, the method of using a system component comprises utilizing one or more sensors (e.g., one or more optical sensors) to detect one or more fraction collector trays positioned within a fraction collector tray bay of a fraction collection system within a chromatography system. The one or more sensors may be positioned along one or more bay wall surfaces of the fraction collector tray bay so as to detect the presence or absence of one or more fraction collector trays positioned within the fraction collector tray bay. The exemplary method of using a system component may further comprise utilizing one or more stationary machine readable tag readers positioned along the one or more bay wall surfaces of the fraction collector tray bay to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray.

**[0026]** In a further exemplary method, the method of using a system component comprises utilizing one or more stationary machine readable tag readers positioned along one or more bay wall surfaces of a fraction collector tray bay to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray; and collecting one or more sample fractions within one or more collection vessels positioned at one or more specific locations along the fraction collector tray based on the existing tag data. Typically, each fraction collector tray within the chromatography system comprises a single machine readable tag positioned along an abutting tray surface (i.e., a tray surface that abuts a bay wall surface of the fraction collector tray bay) of a given fraction collector tray.

**[0027]** In some embodiments, the method of using a system component may comprise utilizing one or more system components in a chromatography system, wherein the method comprises utilizing at least one mobile machine readable tag reader and in combination with at least one stationary machine readable tag reader within the chromatography system, wherein each machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag, and at least one (or each) of the machine readable tag readers is also operatively adapted to write new tag data onto a given machine readable tag within the chromatography system. The exemplary methods may further comprise utilizing one or more machine readable tags within the chromatography system either alone or in combination with (i) one or more chromatography cartridges, (ii) one or more fraction collector tray bays, or both (i) and (ii).

**[0028]** In yet a further exemplary method, the method of using a system component comprises utilizing one or more system components in a chromatography system, wherein the method comprises (1) utilizing one or more sensors (e.g., one or more optical sensors) to detect one or more fraction collector trays positioned within a fraction collector tray bay of a fraction collection system within a chromatography system; (2) utilizing one or more stationary machine readable tag readers positioned along one or more bay wall surfaces of the fraction collector tray bay to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray; (3) collecting one or more sample fractions within one or more collection vessels positioned at one or more specific locations along the fraction collector tray based on the existing tag data; (4) utilizing at least one mobile machine readable tag reader within the chromatography system, wherein each

mobile machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag on a surface of a chromatography cartridge; and (5) utilizing at least one chromatography cartridge within the chromatography system, wherein each chromatography cartridge has at least one machine readable tag (typically, a single tag) positioned along a surface of the chromatography cartridge. In some embodiments, one or more (or each) of the machine readable tag readers of the chromatography system (i.e., stationary and/or mobile) is operatively adapted to also write new tag data onto one or more machine readable tags within the chromatography system (e.g., a tag on a fraction collector tray and/or a tag on a chromatography cartridge).

**[0029]** These and other features and advantages of the present invention will become apparent after a review of the following detailed description of the disclosed embodiments and the appended claims.

#### **BRIEF DESCRIPTION OF THE FIGURES**

**[0030]** FIG. 1 depicts a schematic diagram of an exemplary chromatography system of the present invention and individual system components within the exemplary chromatography system;

**[0031]** FIG. 2 depicts an exemplary mobile machine readable tag reader of the present invention suitable for use in the exemplary chromatography system shown in FIG. 1;

**[0032]** FIG. 3 depicts another exemplary mobile machine readable tag reader in combination with an exemplary chromatography cartridge having thereon an exemplary machine readable tag;

**[0033]** FIG. 4 depicts an exemplary fraction collector tray bay suitable for use in a fraction collection system within the exemplary chromatography system shown in FIG. 1;

**[0034]** FIG. 5 depicts an exemplary fraction collector tray used in the exemplary fraction collector tray bay shown in FIG. 4;

**[0035]** FIG. 6A depicts an exemplary cartridge height sensing device of the present invention suitable for use in the exemplary chromatography system shown in FIG. 1; and

**[0036]** FIG. 6B depicts the exemplary cartridge height sensing device of FIG. 6A while measuring the height of a cartridge.

**DETAILED DESCRIPTION OF THE INVENTION**

**[0037]** To promote an understanding of the principles of the present invention, descriptions of specific embodiments of the invention follow and specific language is used to describe the specific embodiments. It will nevertheless be understood that no limitation of the scope of the invention is intended by the use of specific language. Alterations, further modifications, and such further applications of the principles of the present invention discussed are contemplated as would normally occur to one ordinarily skilled in the art to which the invention pertains.

**[0038]** It must be noted that as used herein and in the appended claims, the singular forms "a", "and", and "the" include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to "a solvent" includes a plurality of such solvents and reference to "solvent" includes reference to one or more solvents and equivalents thereof known to those skilled in the art, and so forth.

**[0039]** "About" modifying, for example, the quantity of an ingredient in a composition, concentrations, volumes, process temperatures, process times, recoveries or yields, flow rates, and like values, and ranges thereof, employed in describing the embodiments of the disclosure, refers to variation in the numerical quantity that may occur, for example, through typical measuring and handling procedures; through inadvertent error in these procedures; through differences in the ingredients used to carry out the methods; and like proximate considerations. The term "about" also encompasses amounts that differ due to aging of a formulation with a particular initial concentration or mixture, and amounts that differ due to mixing or processing a formulation with a particular initial concentration or mixture. Whether modified by the term "about" the claims appended hereto include equivalents to these quantities.

**[0040]** As used herein, the term "chromatography" means a physical method of separation in which the components to be separated are distributed between two phases, one of which is stationary (stationary phase) while the other (the mobile phase) moves in a definite direction.

**[0041]** As used herein, the term "liquid chromatography" means the separation of mixtures by passing a fluid mixture dissolved in a "mobile phase" through a column comprising a stationary phase, which separates the analyte (i.e.,

the target substance) from other molecules in the mixture and allows it to be isolated.

**[0042]** As used herein, the term "mobile phase" means a fluid liquid, a gas, or a supercritical fluid that comprises the sample being separated and/or analyzed and the solvent that moves the sample comprising the analyte through the column. The mobile phase moves through the chromatography column or cartridge (i.e., the container housing the stationary phase) where the analyte in the sample interacts with the stationary phase and is separated from the sample.

**[0043]** As used herein, the term "stationary phase" or "media" means material fixed in the column or cartridge that selectively adsorbs the analyte from the sample in the mobile phase separation of mixtures by passing a fluid mixture dissolved in a "mobile phase" through a column comprising a stationary phase, which separates the analyte to be measured from other molecules in the mixture and allows it to be isolated.

**[0044]** As used herein, the term "flash chromatography" means the separation of mixtures by passing a fluid mixture dissolved in a "mobile phase" under pressure through a column comprising a stationary phase, which separates the analyte (i.e., the target substance) from other molecules in the mixture and allows it to be isolated.

**[0045]** As used herein, the term "fluid" means a gas, liquid, and supercritical fluid.

**[0046]** As used herein, the term "substantially" means within a reasonable amount, but includes amounts which vary from about 0% to about 50% of the absolute value, from about 0% to about 40%, from about 0% to about 30%, from about 0% to about 20% or from about 0% to about 10%.

**[0047]** The present invention is directed to chromatography systems and individual system components that may be used in chromatography systems either alone or in combination with one another. The present invention is further directed to methods of making chromatography systems and individual system components that may be used in chromatography systems. The present invention is even further directed to methods of using chromatography systems, as well as methods of using individual system components within a variety of chromatography systems. One exemplary chromatography system containing individual system components of the present invention is shown in FIG. 1.

**[0048]** As shown in FIG. 1, exemplary chromatography system **100** comprises a sample injection apparatus **10**, a mobile phase source **11**, an air source **12**, a valve **13**, a waste collector **14**, a column station **15**, a detector **16** (e.g., a UV detector), a fraction collection system **17**, and a microprocessor **18**. The present invention provides individual system components that are particularly suitable for use within column station **15**, fraction collection system **17**, or both column station **15** and fraction collection system **17** of exemplary chromatography system **100**, as well as chromatography systems containing a column station and/or a fraction collection system. A description of the individual system components of the present invention, as well as chromatography systems containing the individual system components is provided below.

**[0049]** It should be noted that other chromatography system components disclosed in exemplary chromatography system **100** (e.g., sample injection apparatus **10**, mobile phase source **11**, air source **12**, valve **13**, waste collector **14**, detector **16**, and microprocessor **18**) may comprise known components. For example, sample injection apparatus **10** and valve **13** may respectively comprise any known sample injection apparatus and valve used in chromatography systems. In some embodiments, sample injection apparatus **10** may comprise an automated sample injection apparatus and valve **13** may comprise a six port rotary valve as disclosed in U.S. Provisional Patent Application Serial No. \_\_\_\_\_, entitled "AUTOMATED SAMPLE INJECTION APPARATUS, MULTI-PORT VALVE, AND METHODS OF MAKING AND USING THE SAME" and filed on December 10, 2008, the subject matter of which is incorporated herein in its entirety.

**[0050]** Further, it should be noted that although not shown in FIG. 1, exemplary chromatography system **100** comprises one or more additional components typically present in a given chromatography system so as to provide for fluid flow throughout the chromatography system between the various components of a given chromatography system. For example, exemplary chromatography system **100** may comprise one or more additional components including, but not limited to, one or more pumps, one or more additional valves, tubing between components, electronics and electronic circuitry to power and control the various components, etc.

*I. Chromatography System Components and Configurations*

**[0051]** The chromatography systems of the present invention may comprise one or more of the following individual system components in a variety of chromatography system configurations.

*A. Chromatography System Components*

**[0052]** The chromatography systems of the present invention may comprise one or more of the following individual system components.

*1. Machine Readable Tag Readers/Writers*

**[0053]** The chromatography systems of the present invention may comprise one or more machine readable tag readers. In some embodiments, at least one machine readable tag reader is operatively adapted to (i) read existing tag data from a machine readable tag (e.g., a RFID tag); and (ii) write new data onto the same machine readable tag. For example, when the machine readable tag is present on a cartridge (also referred to herein as a column) used in the chromatography system, the new data written to the machine readable tag may comprise historical cartridge use data. The historical cartridge use data may comprise one or more pieces of data including, but not limited to, data including the date of cartridge use, a solvent used in the cartridge on the date, a count of how many times the cartridge has been used, sample type, user name, and any combination thereof.

**[0054]** The existing tag data on a given machine readable tag (e.g., the above-described cartridge machine readable tag) may comprise data that sets one or more operational conditions of the chromatography system. For example, when the machine readable tag is present on a cartridge used in the chromatography system, the new data written to the machine readable tag may comprise data including, but not limited to, the cartridge size, the solid phase material (e.g., silica) within the cartridge, the mobile phase (i.e., solvent) to be used with the cartridge in an upcoming run, operating temperatures, flow rates, other operational conditions to run the cartridge in the system, and any combination thereof.

**[0055]** The machine readable tag readers used in the present invention may be mobile machine readable tag readers or stationary machine readable tag readers. As used herein, the term "mobile" is used to describe a machine readable

tag reader that comprises a tag reader component that is operatively adapted to move from an initial location to a reading location during the step of reading a given machine readable tag. The mobile machine readable tag reader of the present invention comprises a tag reader component that is operatively adapted to move so as to position an outer surface of the tag reader component adjacent to and over an outer surface of the machine readable tag. In contrast, stationary machine readable tag readers used in the present invention do not move. In order to read a given machine readable tag using a stationary machine readable tag reader, the machine readable tag has to be moved so that the machine readable tag is positioned in front of a tag reader component of the stationary machine readable tag reader. The tag read, writer and tag may be composed of any suitable media including magnetic media, bar code, solid state memory, polycarbonate, etc.

**[0056]** FIG. 2 depicts an exemplary mobile machine readable tag reader of the present invention. As shown in FIG. 2, exemplary mobile machine readable tag reader **20** comprises (i) a reader arm **21** having a first end **22** and a second end **23** with first end **22** being connectable to an object **24** within the chromatography system (e.g., an object within column station **15** of exemplary chromatography system **100**), and second end **23** being operatively adapted to move relative to object **24** when first end **22** is connected to object **24**; and (ii) a tag reader component **25** attached to second end **23**, wherein tag reader component **25** is operatively adapted to (i) move relative to second end **23**, (ii) read existing tag data from a machine readable tag (not shown), and (iii) write new data onto the machine readable tag. Exemplary tag reader component **25** is operatively adapted to move so as to position an outer surface **26** of tag reader component **25** adjacent to and over an outer surface of a machine readable tag (not shown).

**[0057]** As shown in FIG. 2, exemplary mobile machine readable tag reader **20** comprises two reader arm sections, namely, first reader arm section **210** and second reader arm section **211** joined to one another via arm section connector **212**. Typically, arm section connector **212** may move to any three-dimensional coordinate relative to first end **22**, second end **23** may move to any three-dimensional coordinate relative to arm section connector **212**, and tag reader component **25** may move relative to second end **23** as shown by arrows **A** and **B** with arrow **A** representing movement of an outer surface **26** of tag reader component **25** relative

to an axis extending in the y direction (i.e., side-to-side movement), and arrow **B** representing movement of an outer surface **26** of tag reader component **25** relative to an axis extending in the x direction (i.e., up and down movement).

**[0058]** It should be noted that other exemplary mobile machine readable tag readers suitable for use in the chromatography systems of the present invention may comprise a single reader arm section (i.e., no arm section connector **212**) having a first end connected to an object (e.g., object **24**) and a second end connected to a tag reader component (e.g., tag reader component **25**). In other embodiments, the mobile machine readable tag reader may comprise three or more reader arm sections and two or more arm section connectors.

**[0059]** At least one mobile machine readable tag reader, such as exemplary mobile machine readable tag reader **20**, is particularly useful within column station **15** of exemplary chromatography system **100**. The at least one mobile machine readable tag reader may be used in combination with one or more machine readable tags. In some desired embodiment, the at least one mobile machine readable tag reader is used in combination with one or more machine readable tags, wherein each machine readable tag is positioned on a separate chromatography cartridge. As noted above, the at least one mobile machine readable tag reader may be operatively adapted to (i) read existing tag data from a machine readable tag (e.g., a RFID tag) on a chromatography cartridge; as well as (ii) write new data onto the same machine readable tag on the chromatography cartridge.

**[0060]** FIG. 3 depicts another exemplary mobile machine readable tag reader **30** in combination with an exemplary chromatography cartridge **31** having thereon an exemplary machine readable tag **32**. As shown in FIG. 3, exemplary mobile machine readable tag reader **30** comprises a reader arm **33** having a first end **34** and a second end **35** with first end **34** being connectable to an object **36** within the chromatography system. In this exemplary embodiment, object **36** comprises a cartridge support member comprising a vertically extending member **363** and two horizontally extending members: upper member **361** (also referred to herein as column arm **361**) and lower member **362**. Object **36** is within a column station such as column station **15** of exemplary chromatography system **100**. Second end **35** is operatively adapted to move relative to object **36** when first end **34** is connected to object **36**. Exemplary mobile machine readable tag reader **30** further comprises tag

reader component **37** attached to second end **35**, wherein tag reader component **37** is operatively adapted to (i) move relative to second end **35**, (ii) read existing tag data from machine readable tag **32**, and (iii) write new data onto machine readable tag **32**.

**[0061]** As shown in FIG. 3, tag reader component **37** of exemplary mobile machine readable tag reader **30** is operatively adapted to move in a direction as shown by arrow **C** so as to position an outer surface **38** of tag reader component **37** adjacent to column or cartridge **31** and near or over an outer surface **39** of machine readable tag **32**. Desirably, tag reader component **37** of exemplary mobile machine readable tag reader **30** is operatively adapted to identify a location of machine readable tag **32**, and move as needed to position an outer surface **38** of tag reader component **37** adjacent to and over an outer surface **39** of machine readable tag **32**.

**[0062]** Chromatography systems of the present invention may also comprise one or more stationary machine readable tag readers alone or in combination with one or more mobile machine readable tag readers. As discussed further below, in some embodiments of the present invention, a given chromatography system may comprise at least one mobile machine readable tag reader and/or at least one stationary machine readable tag reader in combination with (1) one or more machine readable tags, and (2) (i) a chromatography cartridge, (ii) a fraction collector tray bay, or both (i) the chromatography cartridge and (ii) the fraction collector tray bay, wherein the one or more machine readable tags are positioned along a surface of the chromatography cartridge, a surface of the fraction collector tray bay, or both. One or more stationary machine readable tag readers are particularly useful within a fraction collection system such as exemplary fraction collection system **17** of exemplary chromatography system **100**.

## *2. Fraction Collection Tray Sensors*

**[0063]** The chromatography systems of the present invention may comprise one or more fraction collection tray sensors alone or in combination with the herein described machine readable tag readers (e.g., one or more mobile machine readable tag readers, and/or one or more stationary machine readable tag readers, at least one of which may also write new data onto one or more machine readable tags).

**[0064]** In one exemplary embodiment, a chromatography system of the present invention comprises a fraction collection system, wherein the fraction collection system comprises (i) a fraction collector tray bay; and (ii) one or more sensors positioned along one or more bay wall surfaces of the fraction collector tray bay, wherein the one or more sensors are operatively adapted to detect one or more fraction collector trays positioned within the fraction collector tray bay. In some embodiments, at least one of the one or more sensors comprises an optical sensor. For example, during operation, a user may decide to remove a tray from the fraction collector tray bay. By positioning one or more sensors in the fraction collector tray bay, the fraction collection system automatically shuts down (or pauses) a given operation when the sensor detects that the tray has been removed, and remains shut down or paused until the tray is returned to the fraction collector tray bay.

**[0065]** In some embodiments, the fraction collection system further comprises one or more stationary machine readable tag readers positioned along the one or more bay wall surfaces of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a surface of a fraction collector tray. At least one of the one or more stationary machine readable tag readers may be operatively adapted to also write new data onto a given machine readable tag on a surface of a fraction collector tray.

**[0066]** FIG. 4 depicts an exemplary fraction collector tray bay suitable for use in fraction collection system 17 within exemplary chromatography system 100 shown in FIG. 1. As shown in FIG. 4, exemplary fraction collector tray bay 40 comprises one or more sensors 41 positioned along bay wall surface 42 of fraction collector tray bay 40. Each sensor 41 is operatively adapted to detect a fraction collector tray (e.g., exemplary fraction collector tray 50 shown in FIG. 5) positioned within fraction collector tray bay 40. Exemplary fraction collector tray bay 40 also comprises stationary machine readable tag readers 43 positioned along bay wall surface 42 of fraction collector tray bay 40. Each of stationary machine readable tag readers 43 is operatively adapted to read existing tag data from a machine readable tag on a surface of a fraction collector tray (e.g., machine readable tag 51 on surface 52 of fraction collector tray 50 shown in FIG. 5). Each of stationary machine readable tag readers 43 may also be operatively adapted to write new data onto a given machine

readable tag on a surface of a fraction collector tray (e.g., machine readable tag **51** on surface **52** of fraction collector tray **50** shown in FIG. 5).

**[0067]** One or more fraction collector trays are configured to be positioned within fraction collector tray bay **40**, along track **44** and/or track **45** shown in FIG. 4. Each of tracks **44** and **45** comprise one or more grooves **47** within lower bay surface **48** so that corresponding tray extension on a given fraction collector tray can extend into grooves **47** as to guide the given fraction collector tray into fraction collector tray bay **40**.

**[0068]** FIG. 5 depicts an exemplary fraction collector tray configured for use in exemplary fraction collector tray bay **40** shown in FIG. 4. As shown in FIG. 5, exemplary fraction collector tray **50** comprises machine readable tag **51** positioned along tray surface **52**. When positioned within fraction collector tray bay **40**, tray surface **52** of exemplary fraction collector tray **50** faces and is positioned directly in front of one of stationary machine readable tag readers **43** positioned along bay wall surface **42** of fraction collector tray bay **40**. As noted above, tray extensions **54** on exemplary fraction collector tray **50** can extend into grooves **47** as to guide exemplary fraction collector tray **50** into fraction collector tray bay **40**.

**[0069]** Exemplary fraction collector tray **50** also comprises sensor tab **53** positioned along tray surface **52**. When positioned within fraction collector tray bay **40**, sensor tab **53** of exemplary fraction collector tray **50** faces and is positioned directly in front of one of sensors **41** positioned along bay wall surface **42** of fraction collector tray bay **40**. Sensor tab **53** provides a signal to microprocessor **18** that exemplary fraction collector tray **50** is present within fraction collector tray bay **40**, and the fraction collection system is equipped to receive more fractions.

**[0070]** Exemplary fraction collector tray **50** further comprises fraction vessel positions **55** along an outer tray surface **56** of exemplary fraction collector tray **50**. Each fraction vessel position **55** is sized so as to position a fraction vessel (e.g., test tube) (not shown) along an upper surface **56** of exemplary fraction collector tray **50**. Exemplary fraction collector tray **50** may further comprise one or more additional features including, but not limited to, a tray handle (not shown) along tray surface **57**.

**[0071]** Exemplary fraction collector tray **50** may comprise one or more machine readable tags (e.g., machine readable tag **51**). In some embodiments, each fraction collector tray **50** comprises a single machine readable tag **51**

positioned along tray surface **52** of fraction collector tray **50**. The single machine readable tag **51** may comprise fraction/tray data, wherein the fraction/tray data comprising (i) fraction vessel positions/locations **55** along an outer tray surface **56** of exemplary fraction collector tray **50**, (ii) empty fraction vessel positions **55** along an outer tray surface **56** of exemplary fraction collector tray **50**, (iii) occupied fraction vessel positions **55** along an outer tray surface **56** of exemplary fraction collector tray **50**, (iv) fraction vessel information for each fraction vessel positioned within one or more of the occupied fraction vessel positions **55**, (v) fraction information for each fraction positioned within one or more of the occupied fraction vessel positions **55**, (vi) a unique identification of a given tray, (vii) a fraction vessel (i.e., vial) size, (viii) a collectable volume for each fraction vessel (i.e., vial), (ix), the last time the tray was used, and (x) any combination of (i) to (ix).

**[0072]** Each exemplary fraction collector tray **50** and exemplary fraction collector tray bay **40** may be sized and configured so that a desired number of exemplary fraction collector trays **50** are positionable within exemplary fraction collector tray bay **40**. As shown in FIG. **4**, in some desired embodiments, at least two fraction collector trays (e.g., two exemplary fraction collector trays **50**) are positionable in a side-by-side arrangement relative to one another, and an outer perimeter of at least two side-by-side fraction collection trays (e.g., two exemplary fraction collector trays **50**) faces at least two adjacent bay wall surfaces of exemplary fraction collector tray bay **40**. For example, when two exemplary fraction collector trays **50** are positioned in a side-by-side manner within fraction collector tray bay **40**, exemplary fraction collector tray **50** positioned along track **44** has an outer perimeter, namely, tray surfaces **52** and **58**, facing adjacent bay wall surfaces **42** and **49** respectively of exemplary fraction collector tray bay **40**, while an adjacent exemplary fraction collector tray **50** positioned along track **45** has an outer perimeter, namely, tray surfaces **52** and **59**, facing adjacent bay wall surfaces **42** and **491** respectively of exemplary fraction collector tray bay **40**.

**[0073]** Although exemplary fraction collector tray bay **40** is shown in FIG. **4** as having only two stationary machine readable tag readers **43**, it should be understood that exemplary fraction collector tray bay **40** may comprise any number of stationary machine readable tag readers **43**. For example, exemplary fraction collector tray bay **40** may comprise one or more stationary machine readable tag readers **43** along

bay wall surfaces **49** and **491**, for example, when four or more fraction collector trays **50** are positioned within exemplary fraction collector tray bay **40**. Typically, the one or more bay wall surfaces (i.e., bay wall surfaces **49**, **42** and **491**) comprise a single stationary machine readable tag reader **43** for each fraction collector tray **50** positioned within fraction collector tray bay **40**. In one embodiment, a single bay wall surface (e.g., bay wall surface **42**) comprises at least two stationary machine readable tag readers **43** for at least two side-by-side fraction collector trays **43**. In one desired embodiment, a single bay wall surface (e.g., bay wall surface **42**) comprises two stationary machine readable tag readers **43** for two side-by-side fraction collector trays **43**.

### 3. Cartridge Height Sensors

[0074] The chromatography columns of the present invention may comprise one or more cartridge height sensors alone or in combination with (1) the herein described machine readable tag readers (e.g., one or more mobile machine readable tag readers, and/or one or more stationary machine readable tag readers, at least one of which may also write new data onto one or more machine readable tags), (2) the herein described fraction collection tray sensors, or (3) both (1) and (2).

[0075] FIG. **6A** depicts an exemplary cartridge height sensing device of the present invention suitable for use, for example, within column station **15** of exemplary chromatography system **100** shown in FIG. **1**. As shown in FIG. **6**, exemplary cartridge height sensing device **60** comprises a printed circuit board **61**, one or more pad sensors **62** extending vertically along printed circuit board **61**, and one or more contact sensors **63** positioned along upper member **361** (also referred to herein as column arm **361**) of cartridge support member **36**. Column arm **361** moves up or down as shown by arrow **D** to accommodate a cartridge (see FIG. **6B**) positioned between column arm **361** and lower member **362**. When a cartridge is not present as shown in FIG. **6A**, column arm **361** rests in a home position, which corresponds to a minimum height,  $h_{\min}$ .

[0076] Contact sensor **63** slides along printed circuit board **61** and contacts one or more of pad sensors **62**. The position of contact sensor **63** along one or more of pad sensors **62** causes printed circuit board **61** to send a specific analog signal, shown as dash lines  $S_1$ , corresponding to the position of contact, to a

microprocessor (e.g., microprocessor **18**), which converts the specific analog signal  $S_1$  into a specific cartridge height.

[0077] FIG. **6B** depicts exemplary cartridge height sensing device **60** while measuring the height,  $h_c$ , of exemplary cartridge **66**. As shown in FIG. **6B**, column arm **361** is moved upward to accommodate cartridge **66** positioned between column arm **361** and lower member **362**. In this position, contact sensor **63** in contact with one or more of pad sensors **62** causes printed circuit board **61** to send a specific analog signal, shown as dash lines  $S_2$ , corresponding to the position of contact, to a microprocessor (e.g., microprocessor **18**), which converts the specific analog signal  $S_2$  into a specific cartridge height,  $h_c$ .

[0078] Once exemplary cartridge **66** is removed from cartridge support member **36**, column arm **361** will automatically slide back down to the home position (i.e., minimum height reading  $h_{min}$ ). The home position is a unique setting that does not match the height value associated with any cartridge (e.g., exemplary cartridge **66**) or bypass cartridge. In some embodiments, in order to start a run, column arm **361** and cartridge height sensing device **60** will need to recognize the presence of a cartridge (e.g., exemplary cartridge **66**) or bypass cartridge. If column arm **361** and contact sensor **63** has not been moved away from the home position, the system will (i) error and (ii) stop the unit from starting or completing a run.

[0079] Cartridge height sensing device **60** is designed to work with a variety of flash cartridges with and without machine readable tags (e.g., RFID inlays). If a non-RFID cartridge (e.g., exemplary cartridge **66**) is installed, cartridge height sensing device **60** can use the determined height measurement of the non-RFID cartridge to automatically configure the system to work with the cartridge. For example, a particular height measurement determined by microprocessor **18** may result in microprocessor **18** making one or more process changes to the system configuration. In some embodiments, if an RFID cartridge (e.g., exemplary cartridge **31** shown in FIG. **3**) is installed, the read data from the RFID tag is compared with the data collected from cartridge height sensing device **60** and compared. If the collected information does not match, the system will error and the user will have to correct the error before continuing the run. If the information matches, the system will proceed as normal.

[0080] Cartridges with RFID inlays (e.g., exemplary cartridge **31** shown in FIG. **3**) are specially designed to work at high pressures. If the system does not recognize the RFID inlay, the system will default to the lower column pressures. If the system is setup to work with an RFID (high pressure) cartridge and the cartridge is replaced prior to the run, cartridge height sensing device **60** within the system will recognize the change, check for the absence of an RFID inlay (e.g., machine readable tag, such as machine readable tag **32** shown in FIG. **3**), and default to the lower pressure setting. Cartridge height sensing device **60** can be used to prevent a user from using higher-pressure settings on lower pressure rated cartridges.

[0081] Although contact sensor **63** is shown in FIGS. **6A-6B** as extending outward from a distal end **364** of upper member **361** (column arm **361**), it should be understood that contact sensor **63** may extend from any portion of upper member **361** (column arm **361**).

#### 4. *Microprocessor(s)*

[0082] Microprocessor **18** may be remotely located relative to the other components of exemplary chromatography system **100** or may be directly connected to one or more components within exemplary chromatography system **100**. Microprocessor **18** is programmed to (i) recognize signals from various components within exemplary chromatography system **100** (e.g., machine readable tag readers, tray sensors, and/or cartridge height sensing device signals) and (ii) initiate one or more signal-specific automated steps in response to receiving one or more signals (e.g., reading existing data from a tag, writing new data onto a tag, changing one or more process settings, routing a given fraction to a specific fraction vessel along a fraction collection tray, starting or stopping a given process, etc.). As long as microprocessor **18** is capable of (i) recognizing signals from various components within exemplary chromatography system **100**, and (ii) initiate one or more signal-specific automated steps in response to receiving one or more signals, microprocessor **18** may be in any location relative to exemplary chromatography system **100**.

[0083] Although not shown in exemplary chromatography system **100**, it should be understood that exemplary chromatography system **100** comprises one or more user interface stations (e.g., a personal computer, laptop, touch screen,

keyboard, etc.), as needed, to enable a user to safely operate exemplary chromatography system **100**.

*B. Chromatography System Configurations*

**[0084]** The chromatography systems of the present invention may comprise one or more of the above-described individual system components. For example, in one embodiment, the chromatography system comprises (i) the above-described fraction collection system comprising at least two stationary machine readable tag readers and at least two tray sensors in combination with (ii) at least one of the above-described mobile machine readable tag readers. In some embodiments, the mobile machine readable tag reader is operatively adapted to write new data onto one or more machine readable tags.

**[0085]** Regardless of the configuration, the chromatography systems of the present invention utilize one or more components (e.g., machine readable tags and readers/writers, optical sensors, and electronic sensors) to collect and monitor critical operational functions within a given chromatography system, and act intelligently with the information to ensure safe and intuitive operations.

**[0086]** In one desired configuration, the chromatography system of the present invention comprises three strategically placed machine readable tag readers/writers, namely, one mobile machine readable tag reader (e.g., RFID reader/writer such as mobile machine readable tag reader **30**) on cartridge support member **36** as shown in FIG. **3**, and two stationary machine readable tag readers (e.g., RFID reader/writer such as stationary machine readable tag readers **43**) mounted along back bay wall surface **42** of a fraction collection tray bay **40** as shown in FIG. **4**. The three strategically placed machine readable tag readers/writers are positioned to minimize read/write distance and ensure read/write accuracy. The chromatography system also comprises optical tray sensors **41** mounted along back bay wall surface **42** of a fraction collection tray bay **40** as shown in FIG. **4**. The chromatography system further comprises cartridge height sensing device **60** as shown in FIGS. **6A-6B**.

*II. Methods of Making Chromatography Systems and System Components*

**[0087]** The present invention is further directed to methods of making chromatography systems comprising one or more of the above-described system components. In one exemplary method, the method of making a chromatography system comprises incorporating a mobile or stationary machine readable tag reader (e.g., mobile machine readable tag reader **30** or stationary machine readable tag reader **43**) into the chromatography system, wherein the mobile or stationary machine readable tag reader is operatively adapted to (i) read existing tag data from a machine readable tag; and (ii) write new data onto the machine readable tag. The method may further comprise incorporating (i) one or more chromatography cartridges, (ii) one or more fraction collector trays, or (iii) both (i) to (ii) into the chromatography system, wherein each chromatography cartridge and/or fraction collector tray comprises at least one machine readable tag (typically one) thereon.

**[0088]** Methods of making a chromatography system may also comprise incorporating a fraction collection system into the chromatography system, wherein the fraction collection system comprises a fraction collector tray bay (e.g., fraction collector tray bay **40**); and one or more sensors (e.g., one or more optical sensors **41**) positioned along one or more bay wall surfaces (e.g., bay wall surface **42**) of the fraction collector tray bay, the one or more sensors being operatively adapted to detect one or more fraction collector trays (e.g., fraction collector trays **50**) positioned within the fraction collector tray bay. The exemplary method may further comprise incorporating into the chromatography system one or more stationary machine readable tag readers (e.g., stationary machine readable tag readers **43**) positioned along the one or more bay wall surfaces (e.g., bay wall surface **42**) of the fraction collector tray bay, wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray (e.g., tray tag **51**). The exemplary method may even further comprise incorporating into the chromatography system one or more fraction collector trays (e.g., fraction collector trays **50**) configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises at least one machine readable tag (typically, a single tag) positioned along a tray surface of the fraction collector tray.

**[0089]** In one exemplary method, the method of making a chromatography system comprises (1) incorporating a fraction collection system into the chromatography system, wherein the fraction collection system comprises (i) a fraction collector tray bay (e.g., fraction collector tray bay **40**); (ii) one or more sensors (e.g., optical sensors **41**) positioned along one or more bay wall surfaces (e.g., bay wall surface **42**) of the fraction collector tray bay, the one or more sensors being operatively adapted to detect one or more fraction collector trays (e.g., fraction collector trays **50**) positioned within the fraction collector tray bay; (iii) one or more stationary machine readable tag readers (e.g., stationary machine readable tag readers **43**) positioned along the one or more bay wall surfaces (e.g., bay wall surface **42**) of the fraction collector tray bay, each of the one or more stationary machine readable tag readers being operatively adapted to read existing tag data from a machine readable tag on a surface of a fraction collector tray (e.g., tray tag **51**); and (iv) one or more fraction collector trays (e.g., fraction collector trays **50**) configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises at least one machine readable tag (typically, a single tag) positioned along a tray surface of the fraction collector tray (e.g., tray tag **51**); (2) incorporating at least one mobile machine readable tag reader (e.g., mobile machine readable tag reader **30**) into the chromatography system, wherein each mobile machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag on a surface of a chromatography cartridge (e.g., machine readable tag **32**); and (3) incorporating at least one chromatography cartridge (e.g., cartridge **31**) into the chromatography system, wherein each chromatography cartridge has at least one machine readable tag (typically, a single tag) positioned along a surface of the chromatography cartridge (e.g., machine readable tag **32**). Desirably, one or more (or each) of the machine readable tag readers of the resulting chromatography system (e.g., stationary machine readable tag readers **43** and mobile machine readable tag reader **30**) is operatively adapted to write new tag data onto one or more machine readable tags within the chromatography system (e.g., machine readable tag **32** and/or tray tag **51**).

**[0090]** The present invention is further directed to methods of making system components within a chromatography system. In one exemplary embodiment, the

method of making a system component comprises incorporating one or more sensors (e.g., one or more optical sensors **41**) into a fraction collection system. The method may comprise positioning one or more sensors (e.g., one or more optical sensors) along one or more bay wall surfaces (e.g., bay wall surface **42**) of a fraction collector tray bay (e.g., fraction collector tray bay **40**), the one or more sensors being operatively adapted to detect one or more fraction collector trays (e.g., fraction collector trays **50**) positioned within the fraction collector tray bay. The method may further comprise positioning one or more stationary machine readable tag readers (e.g., stationary machine readable tag readers **43**) along the one or more bay wall surfaces (e.g., bay wall surface **42**) of the fraction collector tray bay (e.g., fraction collector tray bay **40**), wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray (e.g., tray tag **51**). The method may even further comprise forming one or more fraction collector trays (e.g., fraction collector trays **50**) configured to be positioned within the fraction collector tray bay (e.g., fraction collector tray bay **40**), wherein each of the one or more fraction collector trays comprises at least one machine readable tag (typically, a single tag) positioned along a tray surface of the fraction collector tray (e.g., tray tag **51**).

**[0091]** In another exemplary embodiment, the method of making a system component comprises positioning one or more stationary machine readable tag readers (e.g., stationary machine readable tag readers **43**) along one or more bay wall surfaces (e.g., bay wall surface **42**) of a fraction collector tray bay (e.g., fraction collector tray bay **40**), wherein each of the one or more stationary machine readable tag readers is operatively adapted to read existing tag data from a machine readable tag on a tray surface of a fraction collector tray (e.g., tray tag **51**); and forming one or more fraction collector trays (e.g., fraction collector trays **50**) configured to be positioned within the fraction collector tray bay, wherein each of the one or more fraction collector trays comprises a single machine readable tag positioned along a tray surface of the fraction collector tray (e.g., tray tag **51**). In some embodiments, the step of forming one or more fraction collector trays comprises forming fraction collector trays configured to be positioned in a side-by-side arrangement within the fraction collector tray bay so that an outer perimeter of at least two side-by-side

fraction collector trays each independently abut two adjacent bay side wall surfaces when positioned within the fraction collector tray bay.

*III. Methods of Using Chromatography Systems and System Components Within Chromatography Systems*

**[0092]** The present invention is even further directed to methods of using chromatography systems and system components within a chromatography system. The method of using a system component may comprise reading existing tag data from a machine readable tag within a chromatography system via a mobile or stationary machine readable tag reader (e.g., mobile machine readable tag reader **30** or stationary machine readable tag reader **43**); and writing new data onto the machine readable tag within the chromatography system via the mobile or stationary machine readable tag reader (e.g., mobile machine readable tag reader **30** or stationary machine readable tag reader **43**).

**[0093]** Some methods of using a system component may comprise utilizing one or more sensors (e.g., one or more optical sensors **41**) to detect one or more fraction collector trays (e.g., fraction collector trays **50**) positioned within a fraction collector tray bay (e.g., fraction collector tray bay **40**) of a fraction collection system within a chromatography system. The one or more sensors may be positioned along one or more bay wall surfaces (e.g., bay wall surface **42**) of the fraction collector tray bay (e.g., fraction collector tray bay **40**) so as to detect the presence or absence of one or more fraction collector trays (e.g., fraction collector trays **50**) positioned within the fraction collector tray bay.

**[0094]** Methods of using a system component may further comprise utilizing one or more stationary machine readable tag readers (e.g., stationary machine readable tag reader **43**) positioned along one or more bay wall surfaces (e.g., bay wall surface **42**) of a fraction collector tray bay (e.g., fraction collector tray bay **40**) to read existing tag data from a machine readable tag (and, if desired, write new data onto the tag) on a tray surface of a fraction collector tray (e.g., tray tag **51**).

**[0095]** Other methods of using a system component comprise utilizing one or more stationary machine readable tag readers (e.g., stationary machine readable tag reader **43**) positioned along one or more bay wall surfaces (e.g., bay wall surface **42**) of a fraction collector tray bay (e.g., fraction collector tray bay **40**) to read existing

tag data from a machine readable tag (and, if desired, write new data onto the tag) on a tray surface of a fraction collector tray (e.g., tray tag **51**); and collecting one or more sample fractions within one or more collection vessels positioned at one or more specific locations along the fraction collector tray (e.g., fraction collector tray **50**) based on the existing tag data (e.g., existing tag data on tray tag **51**). Typically, each fraction collector tray (e.g., fraction collector tray **50**) within the chromatography system comprises a single machine readable tag (e.g., tray tag **51**) positioned along an abutting tray surface (i.e., a tray surface (e.g., tray surface **52**) that abuts a bay wall surface of the fraction collector tray bay (e.g., bay wall surface **42**)) of a given fraction collector tray.

**[0096]** In some embodiments, the method of using a system component may comprise utilizing one or more system components in a chromatography system, wherein the method comprises utilizing at least one mobile machine readable tag reader (e.g., mobile machine readable tag reader **30**) in combination with at least one stationary machine readable tag reader (e.g., stationary machine readable tag reader **43**) within the chromatography system, wherein each machine readable tag reader is operatively adapted to read existing tag data from a machine readable tag, and at least one (or each) of the machine readable tag readers is also operatively adapted to write new tag data onto a given machine readable tag within the chromatography system. The exemplary methods may further comprise utilizing one or more machine readable tags within the chromatography system either alone or in combination with (i) one or more chromatography cartridges, (ii) one or more fraction collector tray bays, or both (i) and (ii).

**[0097]** As discussed above, the system components of the present invention enable efficient, safe and intelligent operation of a given chromatography system. For example, swappable, extendable fraction collector trays allow a user to extend fraction collection capabilities without purchasing additional fraction collectors. Information collected from one or more optical sensors **41** informs a given system that a fraction collector tray (e.g., fraction collector tray **50**) is installed, while machine readable tray tag **51** (e.g., an RFID inlay) informs the system of the type of tray and its unique identifier.

**[0098]** The system components may provide that all trays (e.g., fraction collector trays **50**) have a unique identifier that distinguishes one tray from another. In this exemplary embodiment, the system will know when a new tray has been

placed into the system. If a tray is removed during a run and a new tray of the same size or a different size is installed, the system will give a user the option to extend the fraction collector capabilities or replace a given tray. The user will have the option to continue or extend the fraction collection capabilities to as many trays as needed.

**[0099]** The system components also enable pull and pause fraction collector sampling. Users periodically need to take samples from a fraction collector vial during a run. If a user pulls a tray (e.g., fraction collector tray **50**) while the system of the present invention is running, a tray bay sensor (e.g., optical sensors **41**) will trigger the system to pause and wait to restart once the tray bay sensor (e.g., optical sensors **41**) identifies that the tray (e.g., fraction collector tray **50**) has been reinstalled. If the system identifies that machine readable tray tag **51** of the tray (e.g., the RFID unique identifier) has not changed, the system will resume where it left off. If the machine readable tray tag **51** of the tray (e.g., the RFID unique identifier) has changed, the user will be prompted regarding the change, and how to restart collecting if the user wishes to continue the collection process.

**[0100]** The system components further enable mix and match fraction collector trays and collection patterns. A user may use two different vial size fraction collector trays in the system at any time and collect peak, non-peaks in two different trays during a run. The machine readable tray tag **51** of the tray (e.g., the RFID unique identifier) on each tray is embedded with a unique ID, vial size and pattern. The collection pattern and volume is dependent on the information collected from the machine readable tray tag **51** of a given tray (e.g., the RFID unique identifier). Since the system knows the flow rate, time for each collected peak and non-peak, vial size, position and maximum volume for each vial, the system is able to collect peaks in one tray and non-peaks in another. This allows the user to collect any and all peaks in any vial pattern and size in a single run.

### **EXAMPLES**

**[0101]** The present invention is further illustrated by the following examples, which are not to be construed in any way as imposing limitations upon the scope thereof. On the contrary, it is to be clearly understood that resort may be had to various other embodiments, modifications, and equivalents thereof which, after reading the description herein, may suggest themselves to those skilled in the art

without departing from the spirit of the present invention and/or the scope of the appended claims.

### EXAMPLE 1

**[0102]** A 12g Reveleris silica cartridge, equipped with an RFID tag, is installed on a Reveleris flash chromatography system. The RFID reader on the Reveleris system reads the tag on the silica cartridge that contains the column size, packing type and number of times the cartridge has been used. Based on the column size, the Reveleris sets the default flow to 25ml/minute and the system upper pressure limit to 200psig. A sample is analyzed and thereafter the flash system's RFID reader writes to the RFID tag on the cartridge incrementing the number of times the cartridge has been used by one.

**[0103]** While the invention has been described with a limited number of embodiments, these specific embodiments are not intended to limit the scope of the invention as otherwise described and claimed herein. It may be evident to those of ordinary skill in the art upon review of the exemplary embodiments herein that further modifications, equivalents, and variations are possible. All parts and percentages in the examples, as well as in the remainder of the specification, are by weight unless otherwise specified. Further, any range of numbers recited in the specification or claims, such as that representing a particular set of properties, units of measure, conditions, physical states or percentages, is intended to literally incorporate expressly herein by reference or otherwise, any number falling within such range, including any subset of numbers within any range so recited. For example, whenever a numerical range with a lower limit,  $R_L$ , and an upper limit  $R_U$ , is disclosed, any number  $R$  falling within the range is specifically disclosed. In particular, the following numbers  $R$  within the range are specifically disclosed:  $R = R_L + k(R_U - R_L)$ , where  $k$  is a variable ranging from 1% to 100% with a 1% increment, e.g.,  $k$  is 1%, 2%, 3%, 4%, 5%. ... 50%, 51%, 52%. ... 95%, 96%, 97%, 98%, 99%, or 100%. Moreover, any numerical range represented by any two values of  $R$ , as calculated above is also specifically disclosed. Any modifications of the invention, in addition to those shown and described herein, will become apparent to those skilled in the art from the foregoing description and accompanying drawings. Such

modifications are intended to fall within the scope of the appended claims. All publications cited herein are incorporated by reference in their entirety.

**WHAT IS CLAIMED IS:**

1. A machine readable tag reader for use in a chromatography system, said machine readable tag reader being operatively adapted to:
  - (a) read existing tag data from a machine readable tag; and
  - (b) write new data onto the machine readable tag.
  
2. The machine readable tag reader of Claim 1, wherein the new data comprises historical cartridge use data, said historical cartridge use data comprising one or more pieces of data including a date of cartridge use, a solvent used in the cartridge on the date, a count of how many times the cartridge has been used, sample type, user name, and any combination thereof.
  
3. The machine readable tag reader of Claim 1, wherein the existing tag data comprises data that sets one or more operational conditions of the chromatography system.
  
4. The machine readable tag reader of Claim 1, said machine readable tag reader comprising:
  - (a) a reader arm having a first end and a second end, said first end being connectable to an object within the chromatography system, and said second end being operatively adapted to move relative to the object when said first end is connected to the object; and
  - (b) a tag reader component attached to said second end, wherein said tag reader component is operatively adapted to (i) read existing tag data from the machine readable tag, (ii) write new data onto the machine readable tag, and (iii) move relative to said second end.
  
5. The machine readable tag reader of claim 1 in combination with (1) one or more machine readable tags, and (2) (i) a chromatography cartridge, (ii) a fraction collector tray bay, or both (i) the chromatography cartridge and (ii) the fraction collector tray bay; said one or more machine readable tags being positioned along a surface of the chromatography cartridge, a surface of the fraction collector tray bay, or both.

6. A machine readable tag reader suitable for use in a chromatography system, said machine readable tag reader comprising:

(a) a reader arm having a first end and a second end, said first end being connectable to an object within the chromatography system, and said second end being operatively adapted to move relative to the object when said first end is connected to the object; and

(b) a tag reader component attached to said second end, wherein said tag reader component is operatively adapted to (i) move relative to said second end, (ii) read existing tag data from a machine readable tag, and (iii) write new data onto the machine readable tag.

7. The machine readable tag reader of claim 6, said tag reader component being operatively adapted to move so as to position an outer surface of said tag reader component adjacent to and over an outer surface of the machine readable tag.

8. The machine readable tag reader of claim 6 in combination with one or more machine readable tags.

9. The machine readable tag reader of claim 8, wherein each machine readable tag is positioned on a separate chromatography cartridge.

10. A fraction collection system of a chromatography system, said fraction collection system comprising:

(a) a fraction collector tray bay; and

(b) one or more sensors positioned along one or more bay wall surfaces of said fraction collector tray bay, said one or more sensors being operatively adapted to detect one or more fraction collector trays positioned within said fraction collector tray bay.

11. The fraction collection system of claim 10, wherein at least one of said one or more sensors comprises an optical sensor.

12. The fraction collection system of claim 10, further comprising:
  - (a) one or more stationary machine readable tag readers positioned along said one or more bay wall surfaces of said fraction collector tray bay, each of said one or more stationary machine readable tag readers being operatively adapted to (i) read existing tag data from a machine readable tag on a surface of a fraction collector tray.
  
13. The fraction collection system of claim 12, wherein at least one of said one or more stationary machine readable tag readers is operatively adapted to (ii) write new data onto a given machine readable tag.
  
14. The fraction collection system of claim 12, further comprising:
  - (a) one or more fraction collector trays configured to be positioned within said fraction collector tray bay, wherein each of said one or more fraction collector trays comprises a machine readable tag positioned along a tray surface of the fraction collector tray.
  
15. The fraction collection system of claim 14, wherein each of said one or more fraction collector trays comprises a single machine readable tag positioned along a tray surface of the fraction collector tray.
  
16. The fraction collection system of claim 15, wherein said single machine readable tag comprises fraction data, said fraction data comprising (i) fraction vessel positions along an outer tray surface of the fraction collector tray, (ii) empty fraction vessel positions along the outer tray surface of the fraction collector tray, (iii) occupied fraction vessel positions along the outer tray surface of the fraction collector tray, (iv) fraction vessel information for each fraction vessel positioned within one or more of the occupied fraction vessel positions, (v) fraction information for each fraction positioned within one or more of the occupied fraction vessel positions, or (vi) any combination of (i) to (v).
  
17. The fraction collection system of claim 14, wherein at least two fraction collector trays are positioned side-by-side relative to one another, and an outer

perimeter of said at least two side-by-side fraction collection trays faces at least two adjacent bay wall surfaces of said fraction collector tray bay.

18. The fraction collection system of claim 17, wherein said one or more bay wall surfaces comprise a stationary machine readable tag reader for each fraction collector tray positioned within the fraction collector tray bay.

19. The fraction collection system of claim 17, wherein a single bay wall surface comprises at least two stationary machine readable tag readers for said at least two side-by-side fraction collector trays.

20. The fraction collection system of claim 12, further comprising:

(a) a mobile machine readable tag reader suitable for use in the chromatography system, said mobile machine readable tag reader comprising:

(b) a reader arm having a first end and a second end, said first end being connectable to an object within the chromatography system, and said second end being operatively adapted to move relative to the object when said first end is connected to the object; and

(c) a tag reader component attached to said second end, wherein said tag reader component is operatively adapted to (i) move relative to said second end, and (ii) read existing tag data from a machine readable tag.

21. The fraction collection system of claim 20, wherein said tag reader component is operatively adapted to (iii) write new data onto the machine readable tag.

22. A cartridge height sensing device comprising:

(a) a printed circuit board;

(b) one or more pad sensors extending vertically along an outer surface of said printed circuit board; and

(c) one or more contact sensors positioned along a column arm of a cartridge support member;

(d) wherein a location of said one or more contact sensors in contact with said one or more pad sensors determines a height of a cartridge positioned within the cartridge support member.

23. A chromatography system comprising the machine readable tag reader of claim 1.

24. A chromatography system comprising the machine readable tag reader of claim 6.

25. A chromatography system comprising the fraction collection system of claim 10.

26. A chromatography system comprising the fraction collection system of claim 12.

27. A chromatography system comprising the fraction collection system of claim 20.

28. A chromatography system comprising the cartridge height sensing device of claim 22.

29. A chromatography system comprising:

(a) a machine readable tag reader, and

(b) a machine readable tag, wherein the machine readable tag reader is operatively adapted to write new data onto the machine readable tag.