

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 August 2006 (10.08.2006)

PCT

(10) International Publication Number
WO 2006/083055 A1

(51) International Patent Classification:
F25D 17/00 (2006.01)

(21) International Application Number:
PCT/KR2005/000754

(22) International Filing Date: 16 March 2005 (16.03.2005)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2005-0008965 1 February 2005 (01.02.2005) KR

(71) Applicant (for all designated States except US): **MOAT-ECH CO., LTD** [KR/KR]; 292, Guwol 1-dong Nam-dong-gu, Incheon 405-827 (KR).

(72) Inventor: **PARK, Jung-bum**; Poonglim 1-cha Apt. 108-1004, Yeonsu 3-dong Yeonsu-gu, Incheon 406-768 (KR).

(74) Agent: **KIM, Young-soo**; 648-15 Shinwon B/D 3F, Yeoksam 1-dong Gangnam-gu, Seoul 135-911 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DAMPER DEVICE FOR REFRIGERATOR

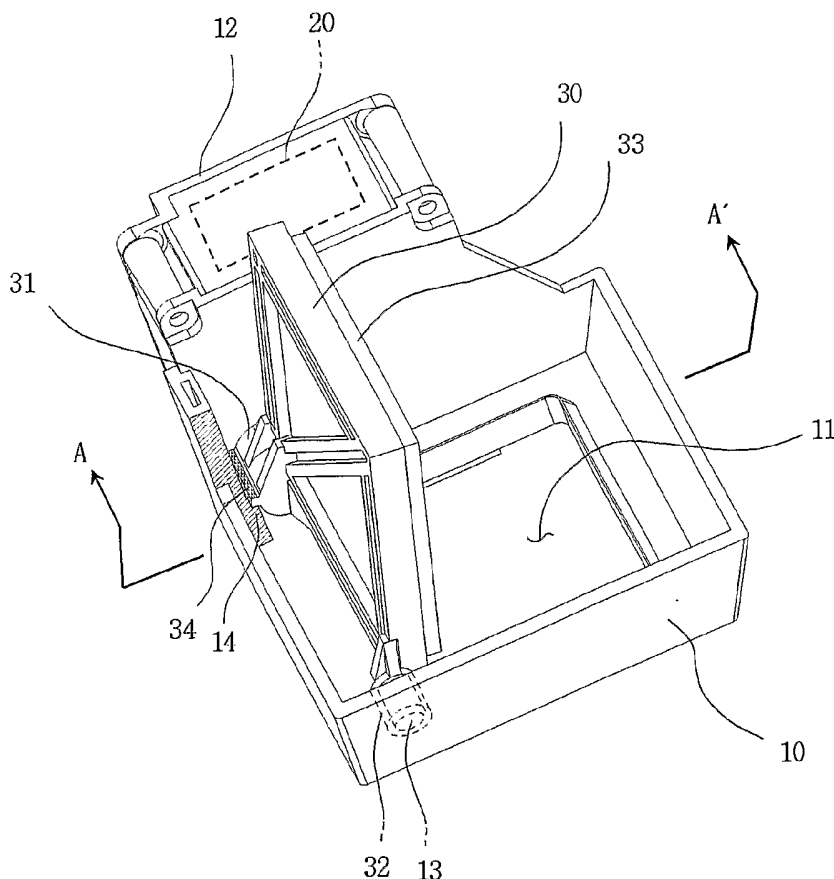

(57) Abstract: A damper device for refrigerator has a step motor used as the power source for rotating a baffle to open/close the cold air passage of the refrigerator in a more secured manner. The damper device for a refrigerator includes a frame installed in the cold air passage of the refrigerator and provided with an opening at the center thereof, a baffle rotatably installed on the frame to open/close the opening, a gear-equipped step motor installed on a surface of the frame and having a reduction gear and a motor integrally formed therein to transmit a rotation force necessary for opening/closing operation of the baffle, and a stopper adapted to mechanically limit the baffle in such a manner that it can be positioned in the desired opening position.

DAMPER DEVICE FOR REFRIGERATOR

Technical Field

The present invention relates to a damper device
5 for a refrigerator, and more particularly to a damper
device for a refrigerator, which has a step motor used
as the power source for rotating a baffle to open/close
the cold air passage of the refrigerator in a more
secured manner.

10

Background Art

In general, a refrigerator is provided with a
damper device in the cold air passage, such as a duct,
to regulate the flow of cold air inside the refrigerator
15 and maintain the temperature within the refrigerator at
a preset temperature.

The present invention has been made to improve the
prior art disclosed in Korean Registered Utility Model
No. 20-0285567 in the name of the present applicant,
20 entitled "REFRIGERATOR DAMPER USING GEAR-EQUIPPED STEP
MOTOR", the disclosure of which will now be described
with reference to FIG. 1.

As shown in FIG. 1, the refrigerator damper 100
using a gear-equipped step motor a frame 110 installed
25 in the cold air passage and provided with an opening
114, a baffle 130 adapted to regulate the flow of cold
air in the opening 114 of the frame 110, and a gear-
equipped step motor 120 installed in a motor case formed
on a side of the frame 110 to rotate the baffle 130 a
30 predetermined angle based on the temperature condition
of the refrigerator.

The baffle 130 is a square plate and is adapted to
be rotated a predetermined angle by the gear-equipped
step motor 120 to open/close the opening 114 of the
35 frame 110. The baffle 130 has an output shaft cap 132

formed on a side thereof to be inserted into and coupled to the output shaft 122 of the gear-equipped step motor 120 and a rotation support shaft cap 134 formed on the other side thereof into which the rotation support shaft 112 formed on the frame 110 is inserted and coupled to support the rotation of the output shaft.

As currents are applied to the gear-equipped step motor 120, it generates a rotation force which is transmitted to the output shaft cap 132 inserted and coupled to the output shaft 122. The baffle 130 is then reciprocally rotated by the rotation force within a predetermined range of rotation angle to open/close the opening 114 and control the outflow of the cold air.

When the baffle 130 completely closes the opening 114, the flow of cold air is interrupted and, when the baffle 130 completely opens the opening 114, the flow of cold air is maximized. As such, the amount of cold air flowing into the refrigerating chamber or the freezing chamber is regulated.

When the baffle position (rotation angle) of the damper is controlled by the conventional gear-equipped step motor, however, the gear-equipped step motor may operate erroneously and the rotation angle of the baffle may exceed a desired range. Thus, the opening/closing operation of the baffle becomes unreliable frequently.

Particularly, the step motor has a preset rotation angle corresponding to each electrical input signal (pulse) and is suitable for position control. When a predetermined frequency or pulse is applied to the gear-equipped step motor for opening operation of the baffle, the absence of a means for limiting the maximum rotation angle of the baffle generates frequent errors in the baffle position.

Such errors in the baffle position due to the gear-equipped step motor make the opening/closing

operation of the baffle inaccurate. When the baffle incompletely opens the opening, the circulation of cold air within the refrigerator is disturbed and, when the baffle incompletely closes the opening, the cold air
5 leaks out and the efficiency of the refrigerator degrades.

When the baffle position of the damper is controlled by the gear-equipped step motor, it is difficult to install a means for limiting the maximum
10 rotation angle of the baffle, e.g., a stopper, inside the gear-equipped step motor. Even when such a means is installed therein, it is not easy to adjust the initial position when the damper is assembled.

15 Disclosure of the Invention

Therefore, the present invention has been made in view of the above-mentioned problems, and it is an object of the present invention to provide a damper device for a refrigerator, which has a gear-equipped
20 step motor used as the driving source for opening/closing operation of a baffle and a mechanical means for limiting the desired maximum opening position of the baffle for more secured opening/closing operation thereof.

25 According to an aspect of the present invention, there is provided a damper device for a refrigerator, which includes a frame installed in the cold air passage of the refrigerator and provided with an opening at the center thereof, a baffle rotatably installed on the
30 frame to open/close the opening, a gear-equipped step motor installed on a surface of the frame and having a reduction gear and a motor integrally formed therein to transmit a rotation force necessary for opening/closing operation of the baffle, and a stopper adapted to
35 mechanically limit the baffle in such a manner that it

can be positioned in the desired opening position.

The baffle has an output shaft cap formed on a surface thereof to be coupled to an output shaft of the gear-equipped step motor and a rotation support shaft cap formed on the other surface thereof to be coupled to a rotation support shaft formed on the frame.

The stopper is installed on each of the baffle and the frame.

Alternatively, the stopper is installed on the baffle or the frame.

The stopper has a baffle stopper protruding from the output shaft cap of the baffle.

The stopper has a step-shaped frame stopper formed on a portion of the frame abutting the baffle stopper when the baffle is in the desired maximum opening position.

The stopper has a number of baffle stoppers formed on the back surface of the baffle in the shape of protrusions.

Brief Description of the Drawings

The foregoing and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1 a partially-broken front view showing a conventional damper device for a refrigerator when its baffle has closed the opening;

FIG. 2 is a perspective view showing a damper device for a refrigerator according to the present invention when its baffle has opened the opening;

FIG. 3 is a sectional view taken along line A-A' of FIG. 2;

FIG. 4 is a front view showing a damper device for

a refrigerator according to another embodiment of the present invention; and

FIG. 5 is a sectional view taken along line B-B' of FIG. 4.

5

Best Mode for Carrying Out the Invention

Reference will now be made in detail to the preferred embodiments of the present invention.

FIG. 2 is a perspective view showing a damper
10 device for a refrigerator according to the present invention when its baffle has opened the opening and FIG. 3 is a sectional view taken along line A-A' of FIG. 2.

As shown in FIGs. 2 and 3, the damper device for a
15 refrigerator according to the present invention includes a frame 10 installed in the cold air passage of the refrigerator and provided with an opening 11, a gear-equipped step motor 20 installed on a side of the frame 10 to generate a rotation force, a baffle 30 installed
20 in the opening 11 of the frame 10 to receive the rotation force from the step motor 20 for opening/closing operation, and stoppers 14 and 34 adapted to limit the maximum degree of openness of the opening 11 by the baffle 30.

25 The construction of the damper device for a refrigerator will now be described in more detail.

The frame 10 has an opening 11 formed at the center thereof through which cold air flows and a motor case 12 formed on a side thereof to contain the gear-
30 equipped step motor 20.

The gear-equipped step motor 20 has a motor and a reduction gear integrally formed therein and is adapted to reciprocally rotate at predetermined speed and rotation angle based on a pulse and/or frequency signal
35 supplied from the exterior.

The gear-equipped step motor 20 is installed inside the motor case 12 and has an output shaft 21 protruding and extending through the bottom surface of the motor case 12.

5 The output shaft 21 is coupled to a output shaft cap 31 formed on a side of the baffle 30 to transmit the rotation force from the gear-equipped step motor 20 to the baffle 30.

10 The baffle 30 has a rotation support cap 32 formed on the other side thereof to be coupled to a rotation support shaft 13 formed on the frame 10, in order to smoothly transmit the rotation force from the gear-equipped step motor 20 to the baffle 30.

15 The baffle 30 is a square plate and has an output shaft cap 31 formed on a side thereof into which the output shaft 21 is inserted and a rotation support shaft cap 32 formed on the other side thereof into which the rotation support shaft 13 formed on the frame 10 is inserted. The baffle 30 also has a buffering member 33
20 formed on a surface thereof abutting the opening 11 for improved buffering and sealing effect when the baffle 30 closes the opening 11.

25 The buffering member 33 preferably has foamed polyurethane, rubber, or a soft tape member formed on a surface thereof abutting the opening 11 for improved buffering and sealing effect.

 The opening 11 preferably has a protrusion formed on the periphery thereof for improved sealing effect when the baffle 30 closes the opening 11.

30 The baffle 30 is mounted on the frame 10 in such a manner that it can reciprocally rotate about the output shaft 21 and the rotation support shaft 13 and is adapted to open/close the opening 11 of the frame 10 as the reciprocating rotational motion is transmitted from
35 the gear-equipped step motor 20.

The baffle 30 has a baffle stopper 34 protruding from the output shaft cap 31 to mechanically limit the maximum opening position of the baffle 30 during opening operation.

5 The baffle stopper 34 engages the frame stopper 14 protruding from the frame 10 when the baffle 30 is in the maximum opening position and prevents the baffle 30 from rotating any further.

10 Specifically, the baffle stopper 34 protruding from the output shaft cap 31 of the baffle 30 is adapted to abut the frame stopper 14 formed inside the frame 10 in a step configuration.

15 As such, the frame stopper 14 abuts the baffle stopper 34 on the output shaft cap 31 in the rotation direction of the baffle 30 when the baffle 30 is in the maximum opening position.

20 The baffle and frame stoppers 34 and 14 play the role of mechanically constraining the baffle 30 when it opens the opening 11 to the maximum degree at a specific angle and preventing it from rotating further.

25 The position of the baffle 30 in which its rotation is constrained by the baffle and frame stoppers 34 and 14 coincides with the desired position of the baffle 30 in which the rotation angle of the baffle 30 in its maximum opening condition is limited by the step motor according to a pulse and/or frequency.

30 Accordingly, the baffle 30 is prevented from opening the opening 11 further from the desired maximum opening position and from incompletely closing the opening 11 due to erroneous operation of the step motor.

35 Not only the stoppers 14 and 34 cause the baffle 30 to completely close the opening 11 during closing operation of the baffle 30, but also the detent torque of the gear-equipped step motor 20 causes the baffle 30 to close the opening 11 in a more secured manner. This

completely avoids leakage of cold air.

A damper device for a refrigerator having modified position and shape of the stoppers according to another embodiment of the present invention will now be
5 described.

FIG. 4 is a front view showing a damper device for a refrigerator according to another embodiment of the present invention and FIG. 5 is a sectional view taken along line B-B' of FIG. 4.

10 The damper device for a refrigerator according to another embodiment of the present invention, as shown in FIGs. 4 and 5, has a number of baffle stoppers 34 formed as protrusions in a predetermined size protruding from predetermined portions of the back surface of the baffle
15 30.

The baffle stoppers 34 are adapted to abut the inner surface of the frame 10 when the baffle 30 is in the desired maximum opening position and limit the maximum opening condition thereof.

20 The frame 10 has a frame stopper 14 formed as a protrusion in a predetermined size protruding from a predetermined portion of the inner surface thereof.

The frame 14 is adapted to abut the baffle 30 when the baffle 30 is in the desired maximum opening position
25 and mechanically limits the opening operation of the baffle 30.

More than one baffle stoppers 34 and frame stoppers 14 may be provided if necessary.

The baffle stoppers 34 formed on the back surface
30 of the baffle 30 and the frame stopper 14 formed on the inner surface of the frame 10 may be separately manufactured and coupled to the baffle 30 and the frame 10, respectively. In consideration of efficiency of manufacturing processes, however, the baffle 30 and the
35 frame 10 are preferably integrally injection-molded

together with the baffle stopper 34 and the frame stopper 14, respectively.

In summary, the inventive damper device for a refrigerator uses the baffle stopper 34 and/or the frame stopper 14 to mechanically limit the desired maximum opening position of the baffle 30. Accordingly, any error in the opening position of the baffle 30 caused by erroneous operation of the gear-equipped step motor 20 is avoided and complete opening/closing operation of the baffle 30 is realized.

As mentioned above, the damper device for a refrigerator according to the present invention uses a gear-equipped step motor as a driving source and has a stopper installed on the frame or baffle for coincidence with the electrical signal inputted to the step motor when the baffle opens/closes the opening of the frame. This guarantees secured opening/closing operation of the baffle, avoids loss and leakage of cold air inside the refrigerator, and improves the efficiency of the refrigerator.

While this invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not limited to the disclosed embodiment and the drawings, but, on the contrary, it is intended to cover various modifications and variations within the spirit and scope of the appended claims.

Claims


1. A damper device for a refrigerator, comprising:
a frame installed in the cold air passage of the
5 refrigerator and provided with an opening at the center
thereof;
a baffle rotatably installed on the frame to
open/close the opening;
a gear-equipped step motor installed on a surface
10 of the frame and having a reduction gear and a motor
integrally formed therein to transmit a rotation force
necessary for opening/closing operation of the baffle;
and
a stopper adapted to mechanically limit the baffle
15 in such a manner that it can be positioned in the
desired opening position.
2. The damper device for a refrigerator as claimed
in claim 1, wherein the baffle has an output shaft cap
20 formed on a surface thereof to be coupled to an output
shaft of the gear-equipped step motor and a rotation
support shaft cap formed on the other surface thereof to
be coupled to a rotation support shaft formed on the
frame.
- 25
3. The damper device for a refrigerator as claimed
in claim 1, wherein the stopper is installed on each of
the baffle and the frame.
- 30
4. The damper device for a refrigerator as claimed
in claim 1, wherein the stopper is installed on the
baffle or the frame.
5. The damper device for a refrigerator as claimed
35 in claim 2, wherein the stopper has a baffle stopper

protruding from the output shaft cap of the baffle.

6. The damper device for a refrigerator as claimed
in claim 5, wherein the stopper has a step-shaped frame
5 stopper formed on a portion of the frame abutting the
baffle stopper when the baffle is in the desired maximum
opening position.


7. The damper device for a refrigerator as claimed
10 in claim 1 or 2, wherein the stopper has a number of
baffle stoppers formed on the back surface of the baffle
in the shape of protrusions.

Fig 1

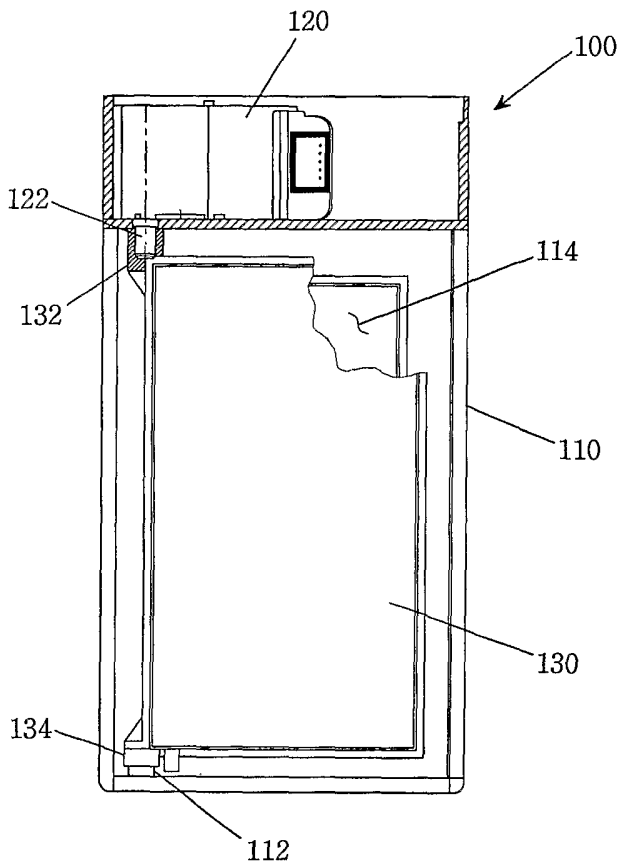

2/4

Fig 2

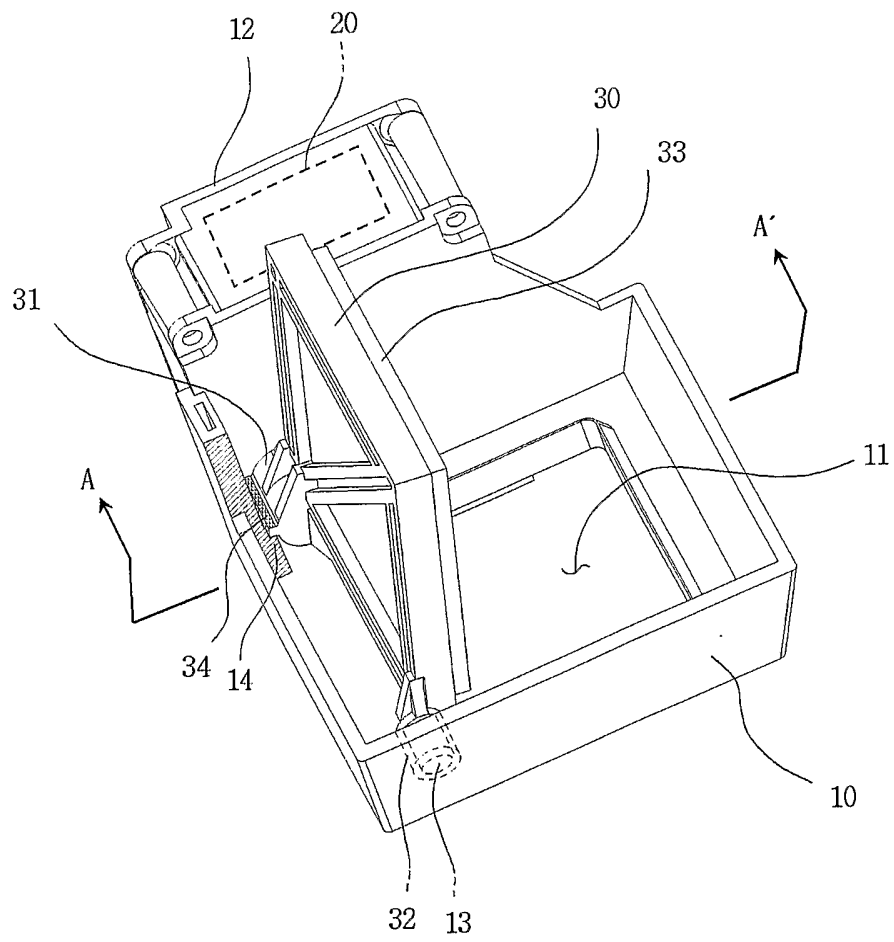

3/4

Fig 3

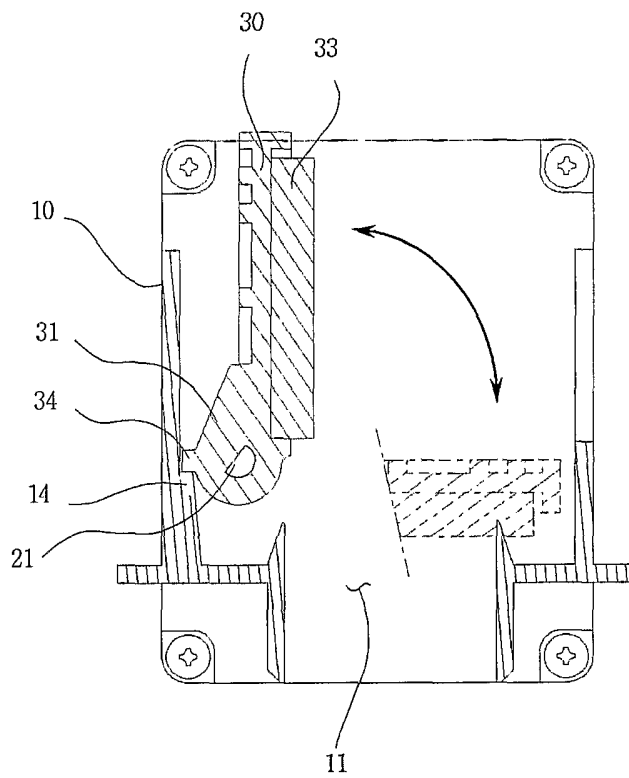


Fig 4


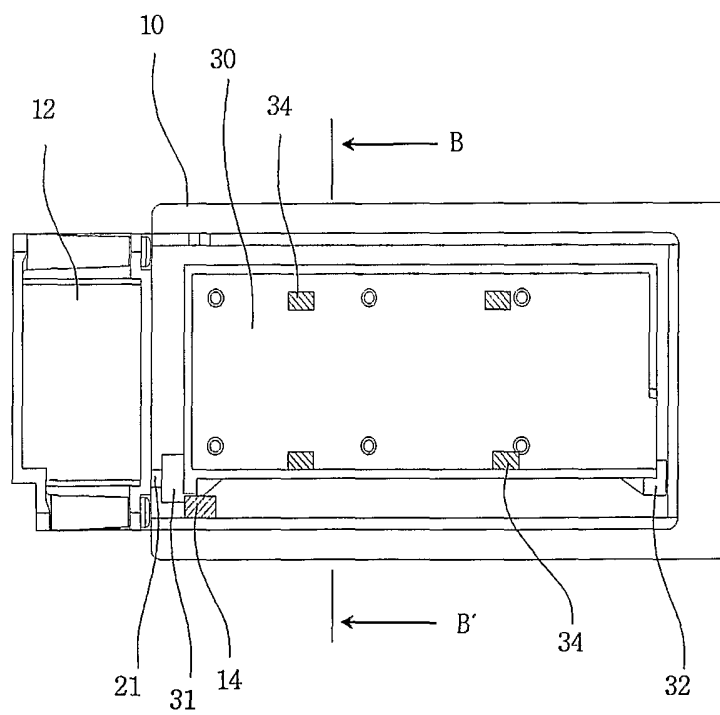


Fig 5

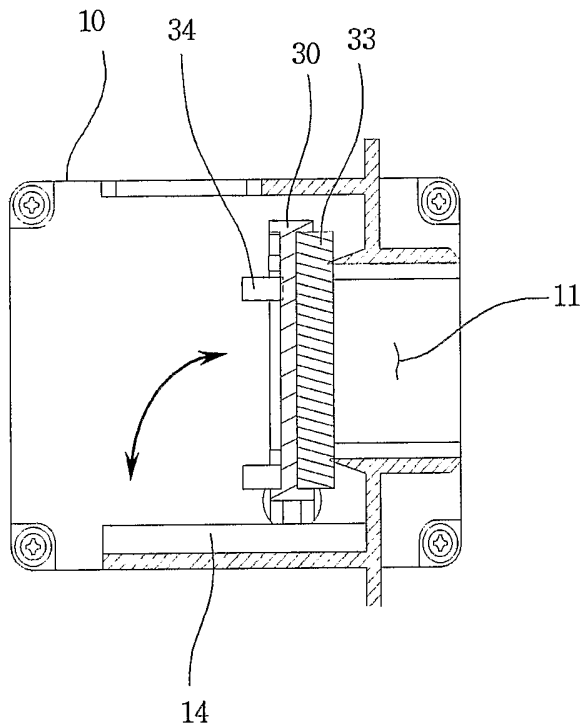

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2005/000754

A. CLASSIFICATION OF SUBJECT MATTER

IPC7 F25D 17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F25D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
KR.JP : classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 08-210754 A (MIYAMAE:KK) 20 August 1996 see the whole document	1-7
Y	JP 07-00865 Y2 (SANKYO SEIKI MFG CO LTD) 11 January 1995 see the whole document	1-7
Y	JP 09-264652 A (SANKYO SEIKI MFG CO LTD) 07 October 1997 see page 7	1-7



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 OCTOBER 2005 (27.10.2005)

Date of mailing of the international search report

27 OCTOBER 2005 (27.10.2005)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Jin Uk

Telephone No. 82-42-481-5514



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2005/000754

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP08210754 A	20.08.1996	JP2780219 B2 JP8210754 A2	30.07.1998 20.08.1996
JP07000865 Y2	11.01.1995	NONE	
JP09264652 A	07.10.1997	JP3270889 B2 JP9264652 A2	02.04.2002 07.10.1997